
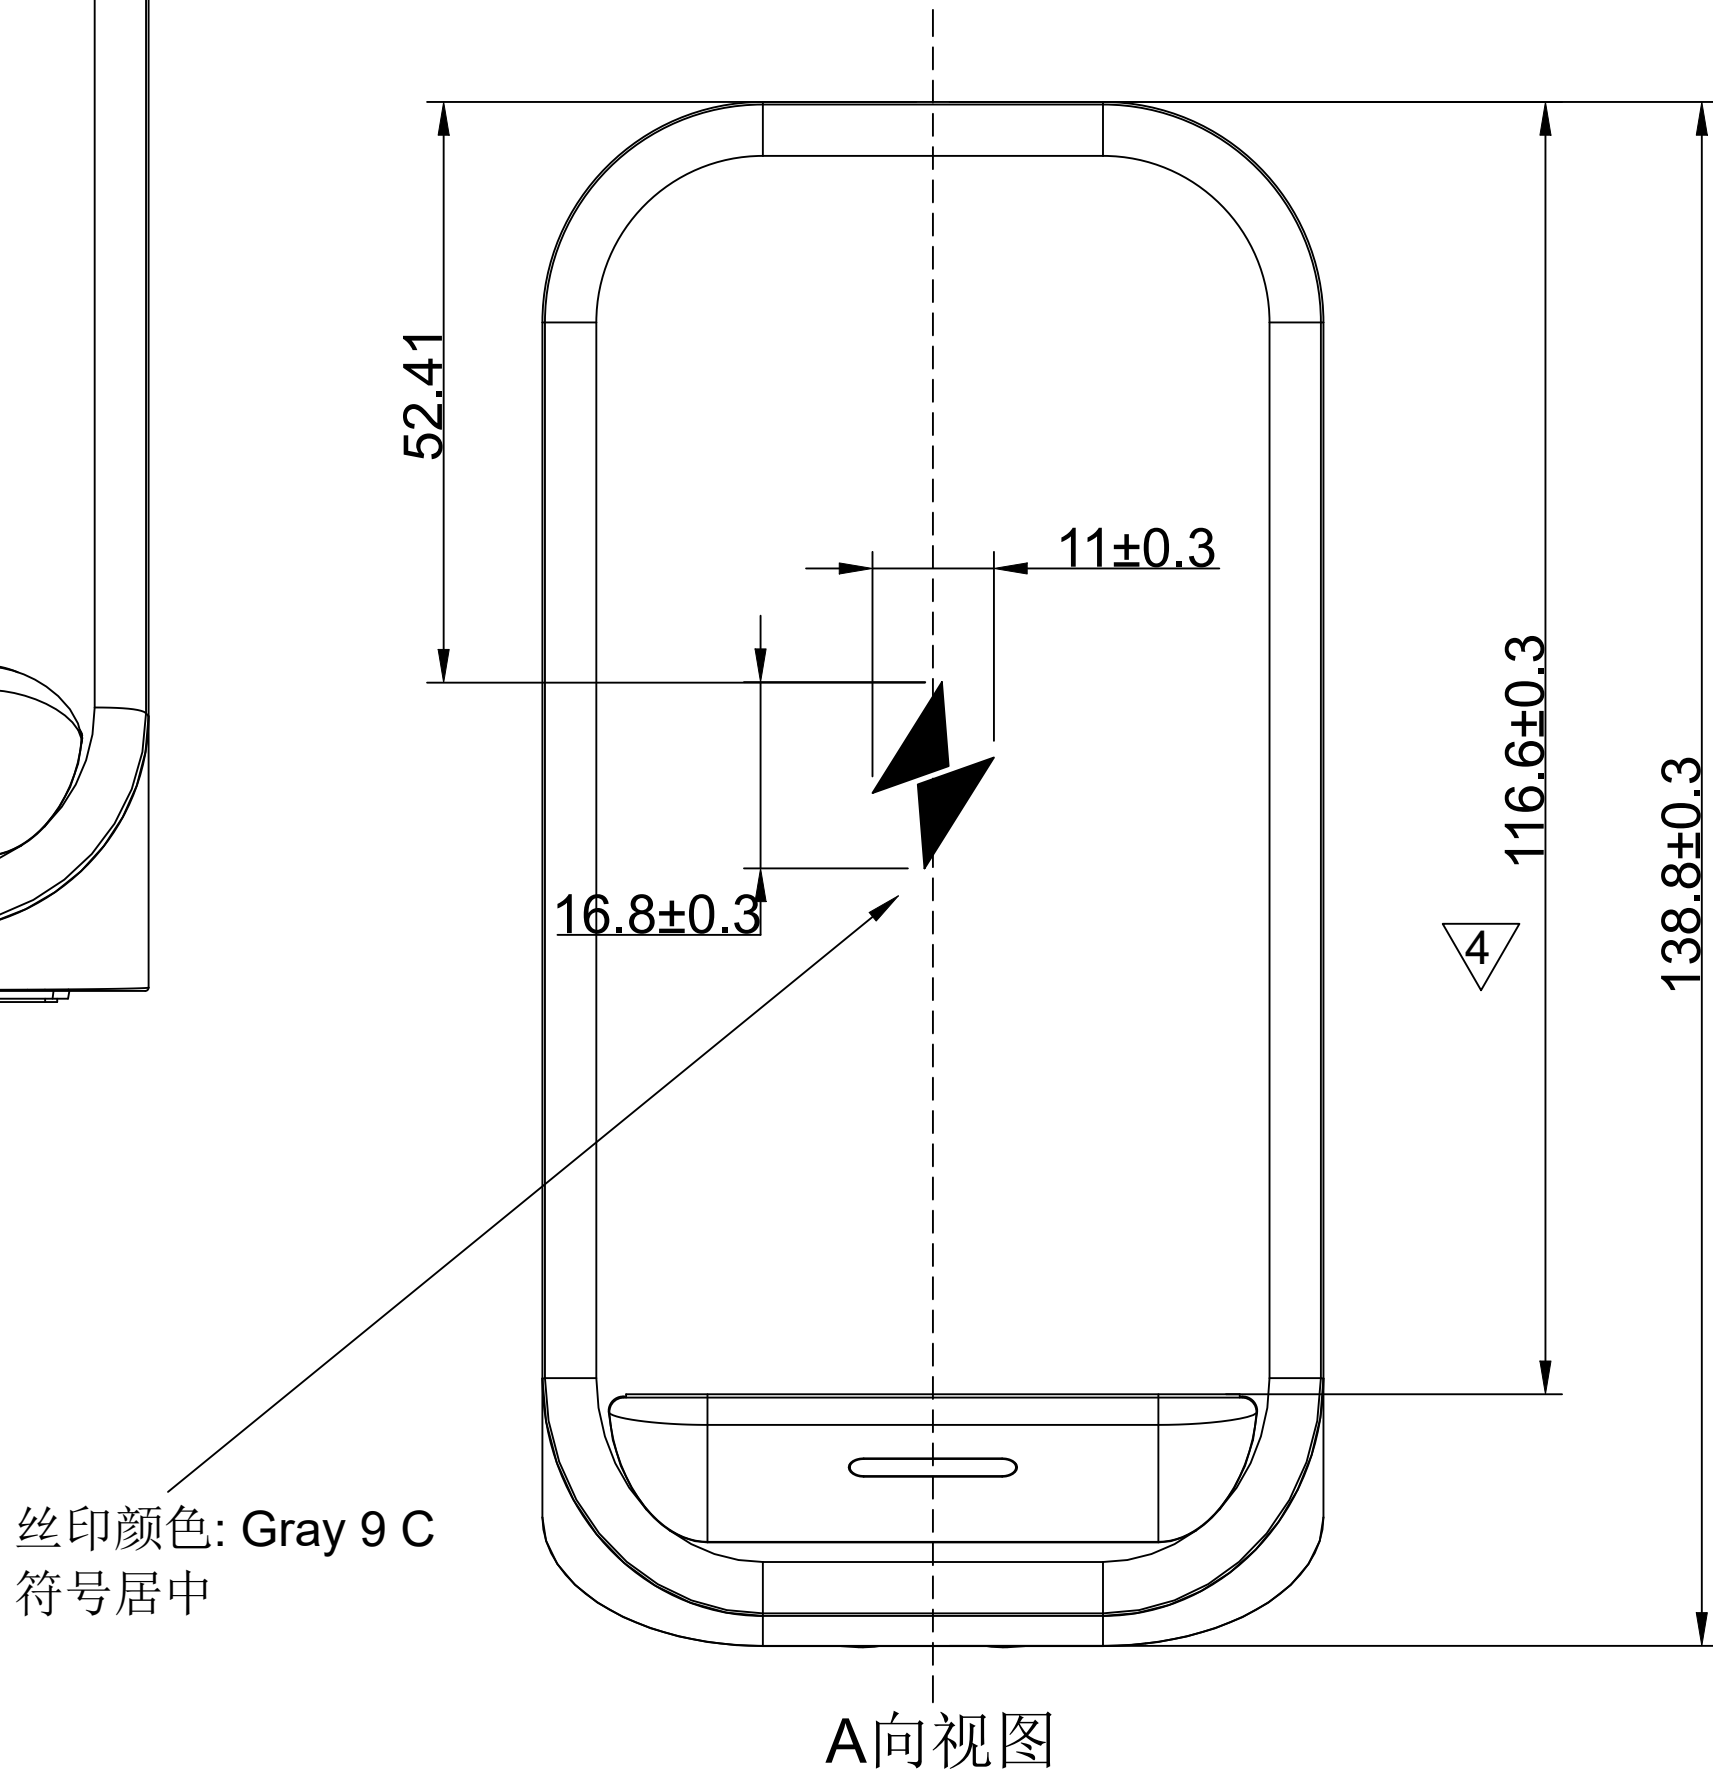
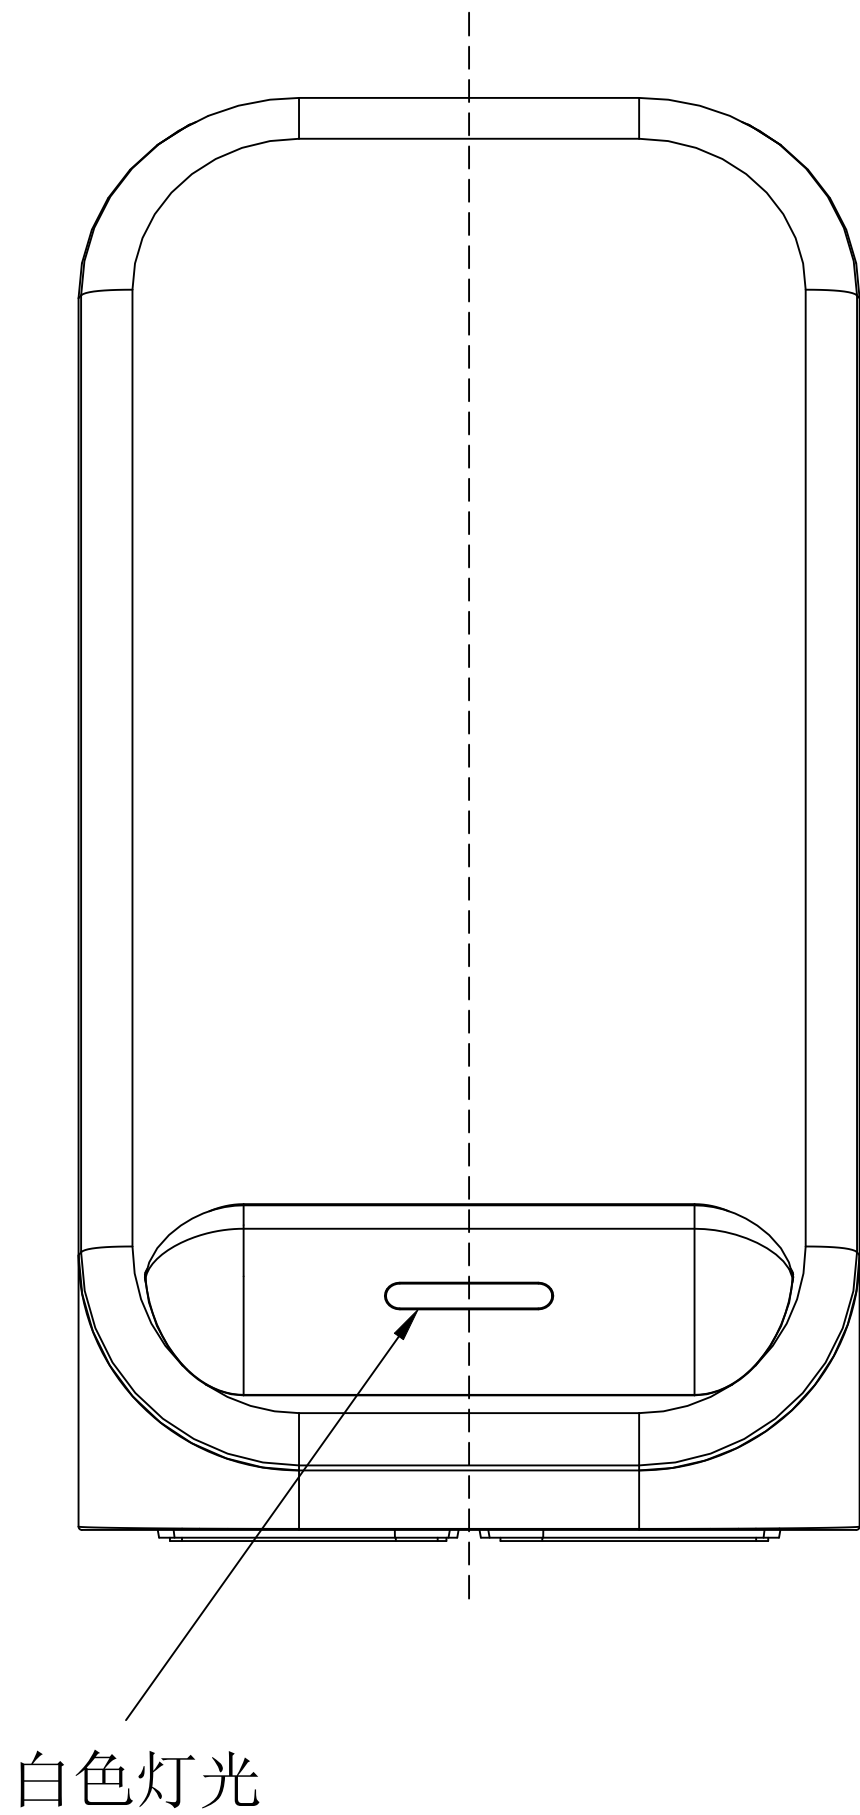
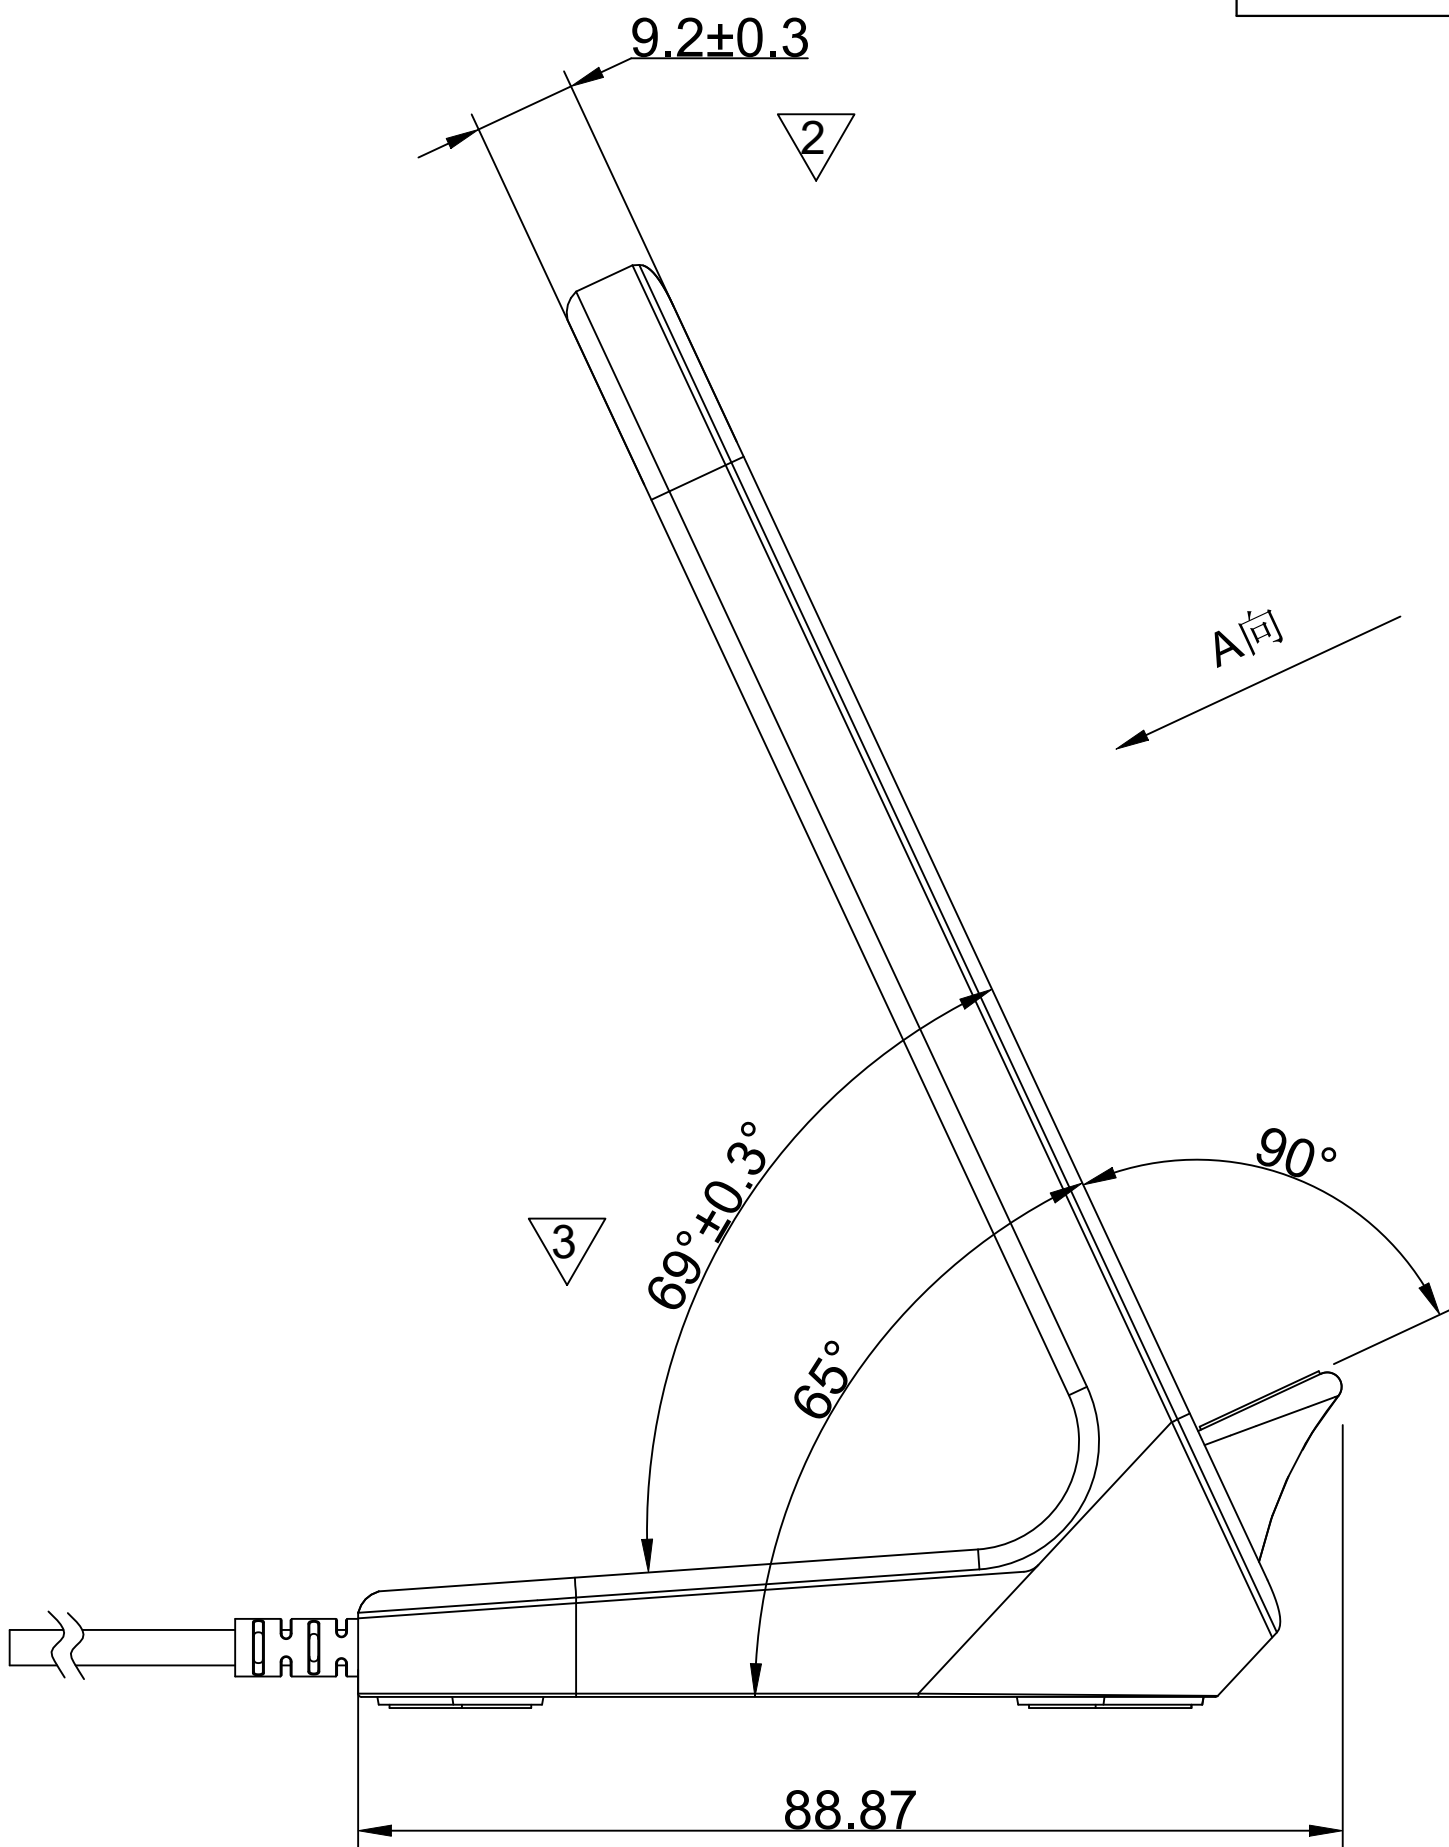


876

RoHSReachCP65

REV.	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	SHIHAO XIE	XIONGWU LI	2024/03/16

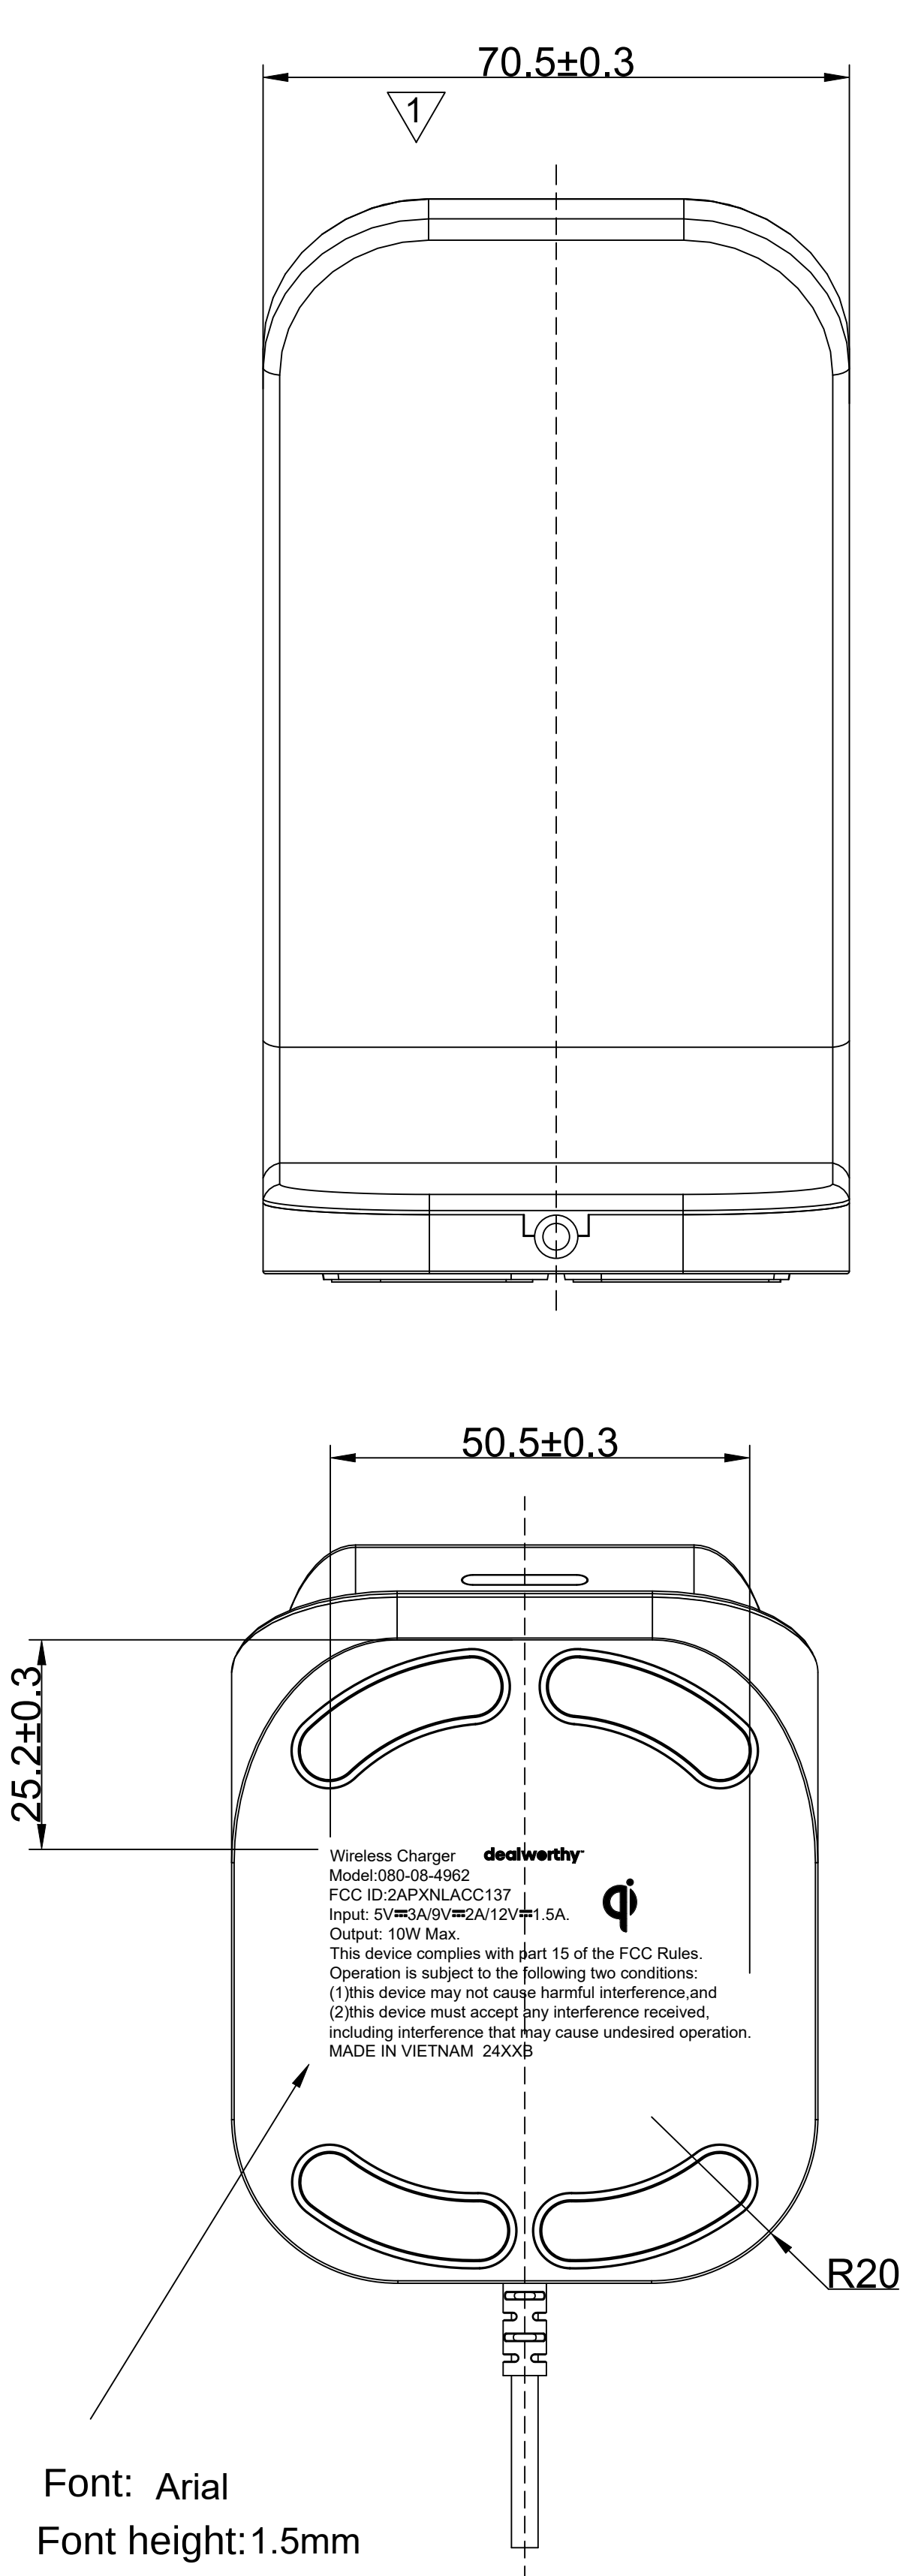

X.± 1	X.°±1	PART NO. LUZWC003-CS-R1	LUXSHARE-TECH TITLE: LACC137无线充10W(Qi) 直连USB-A 3FT黑色（无包材） DWG NO:			
.X± 0.3	.X°±0.5					
.XX± 0.20	.XX°±0.3					
.XXX± 0.100	.XXX°±0.1					
UNITS:	mm					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-TECH AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-TECH		APPD: XIONGWU LI	SCALE SHEET REV.			
		CHKD: SHUIPING ZHOU				
		Safety Eng: Juan Luo				
		DRAW: SHIHAO XIE				

印字图


Wireless Charger **dealworthy™**

Model:080-08-4962

FCC ID:2APXNLACC137

Input: 5V≡3A/9V≡2A/12V≡1.5A.

Output: 10W Max.

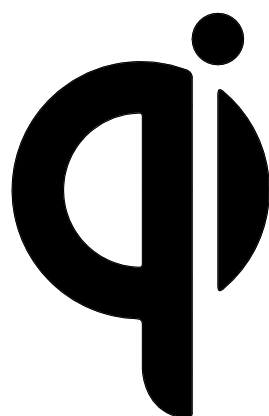

24XXB process:laser carving date code
Font Arial font height:1.5
vendor code(Fixed value)
ww
yy


This device complies with part 15 of the FCC Rules

Operation is subject to the following two conditions:



(1)this device may not cause harmful interference,and

(2)this device must accept any interference received,
including interference that may cause undesired operation.


MADE IN VIETNAM 24XXB

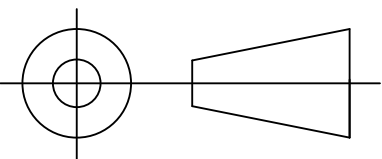X.± 1	X.°±1	PART NO. LUZWC003-CS-R1	LUXSHARE-TECH TITLE: LACC137无线充10W(Qi) 直连USB-A 3FT黑色（无包材） DWG NO:			
.X± 0.3	.X°±0.5					
.XX± 0.20	.XX°±0.3					
.XXX± 0.100	.XXX°±0.1					
UNITS:	mm					
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-TECH AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-TECH		APPD: XIONGWU LI				
		CHKD: SHUIPING ZHOU				
		Safety Eng: Juan Luo		SCALE	SHEET	REV.
		DRAW: SHIHAO XIE				
			1:3	1/8	A1	



爆炸图

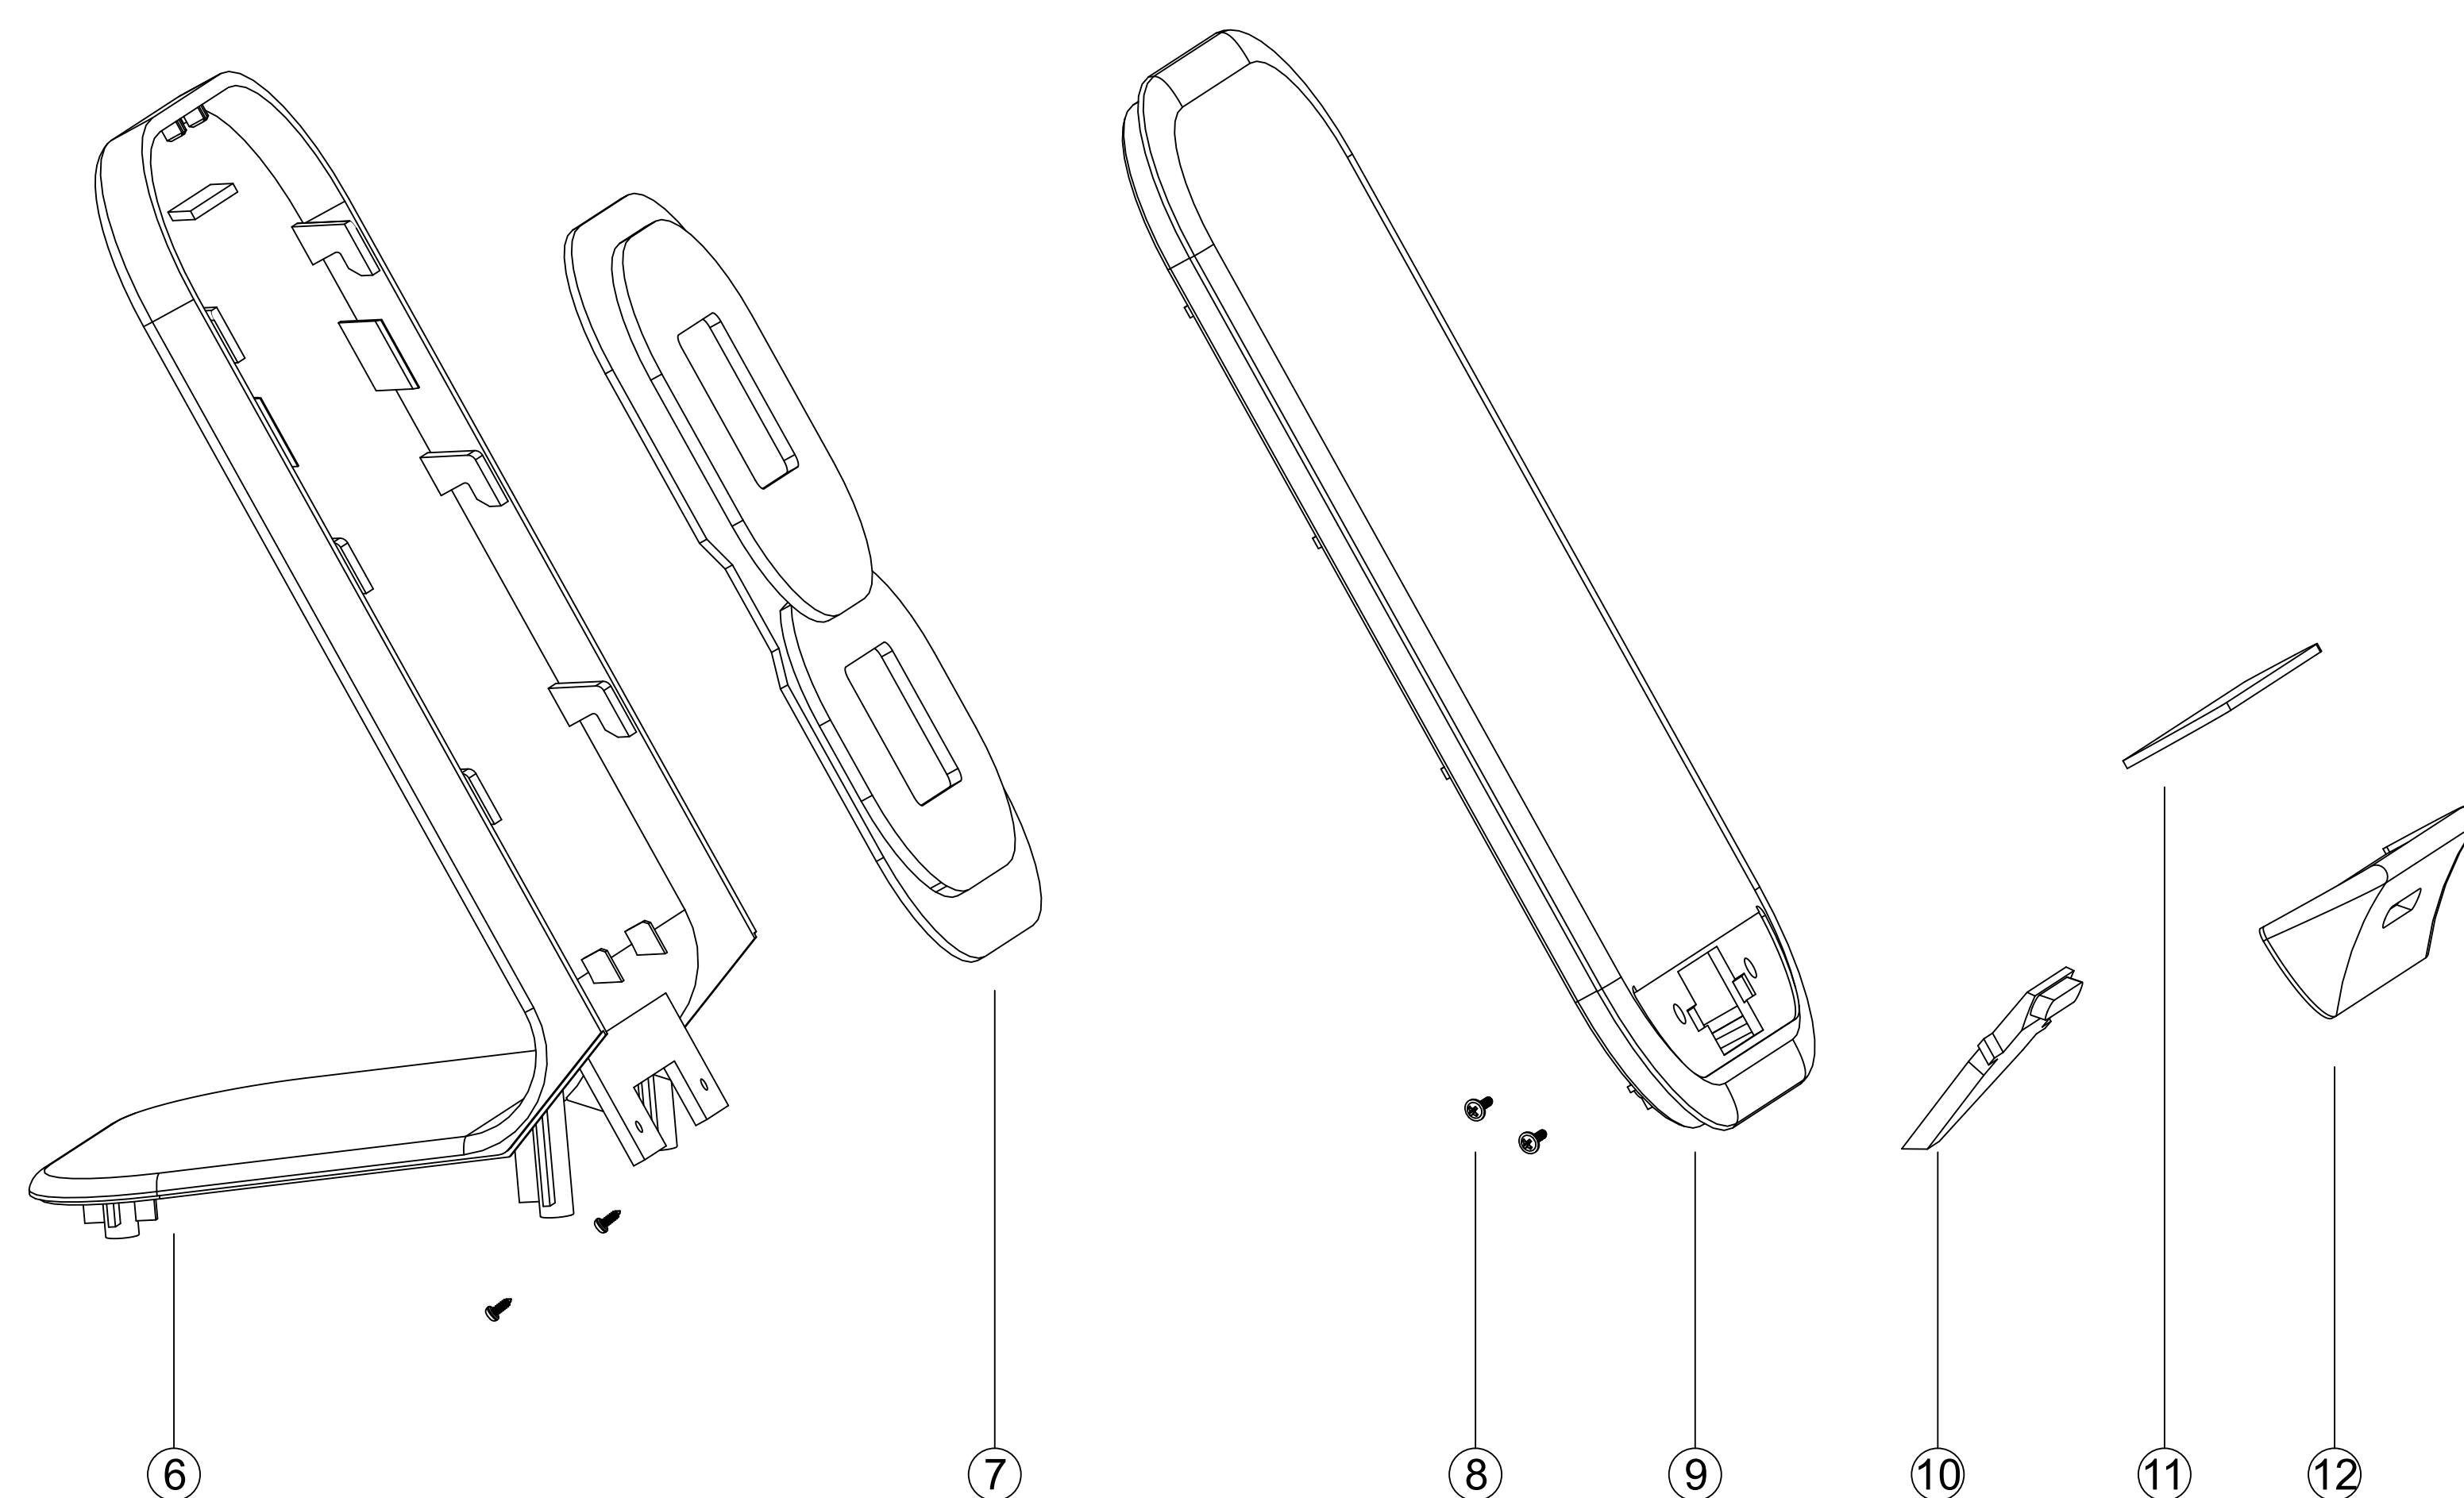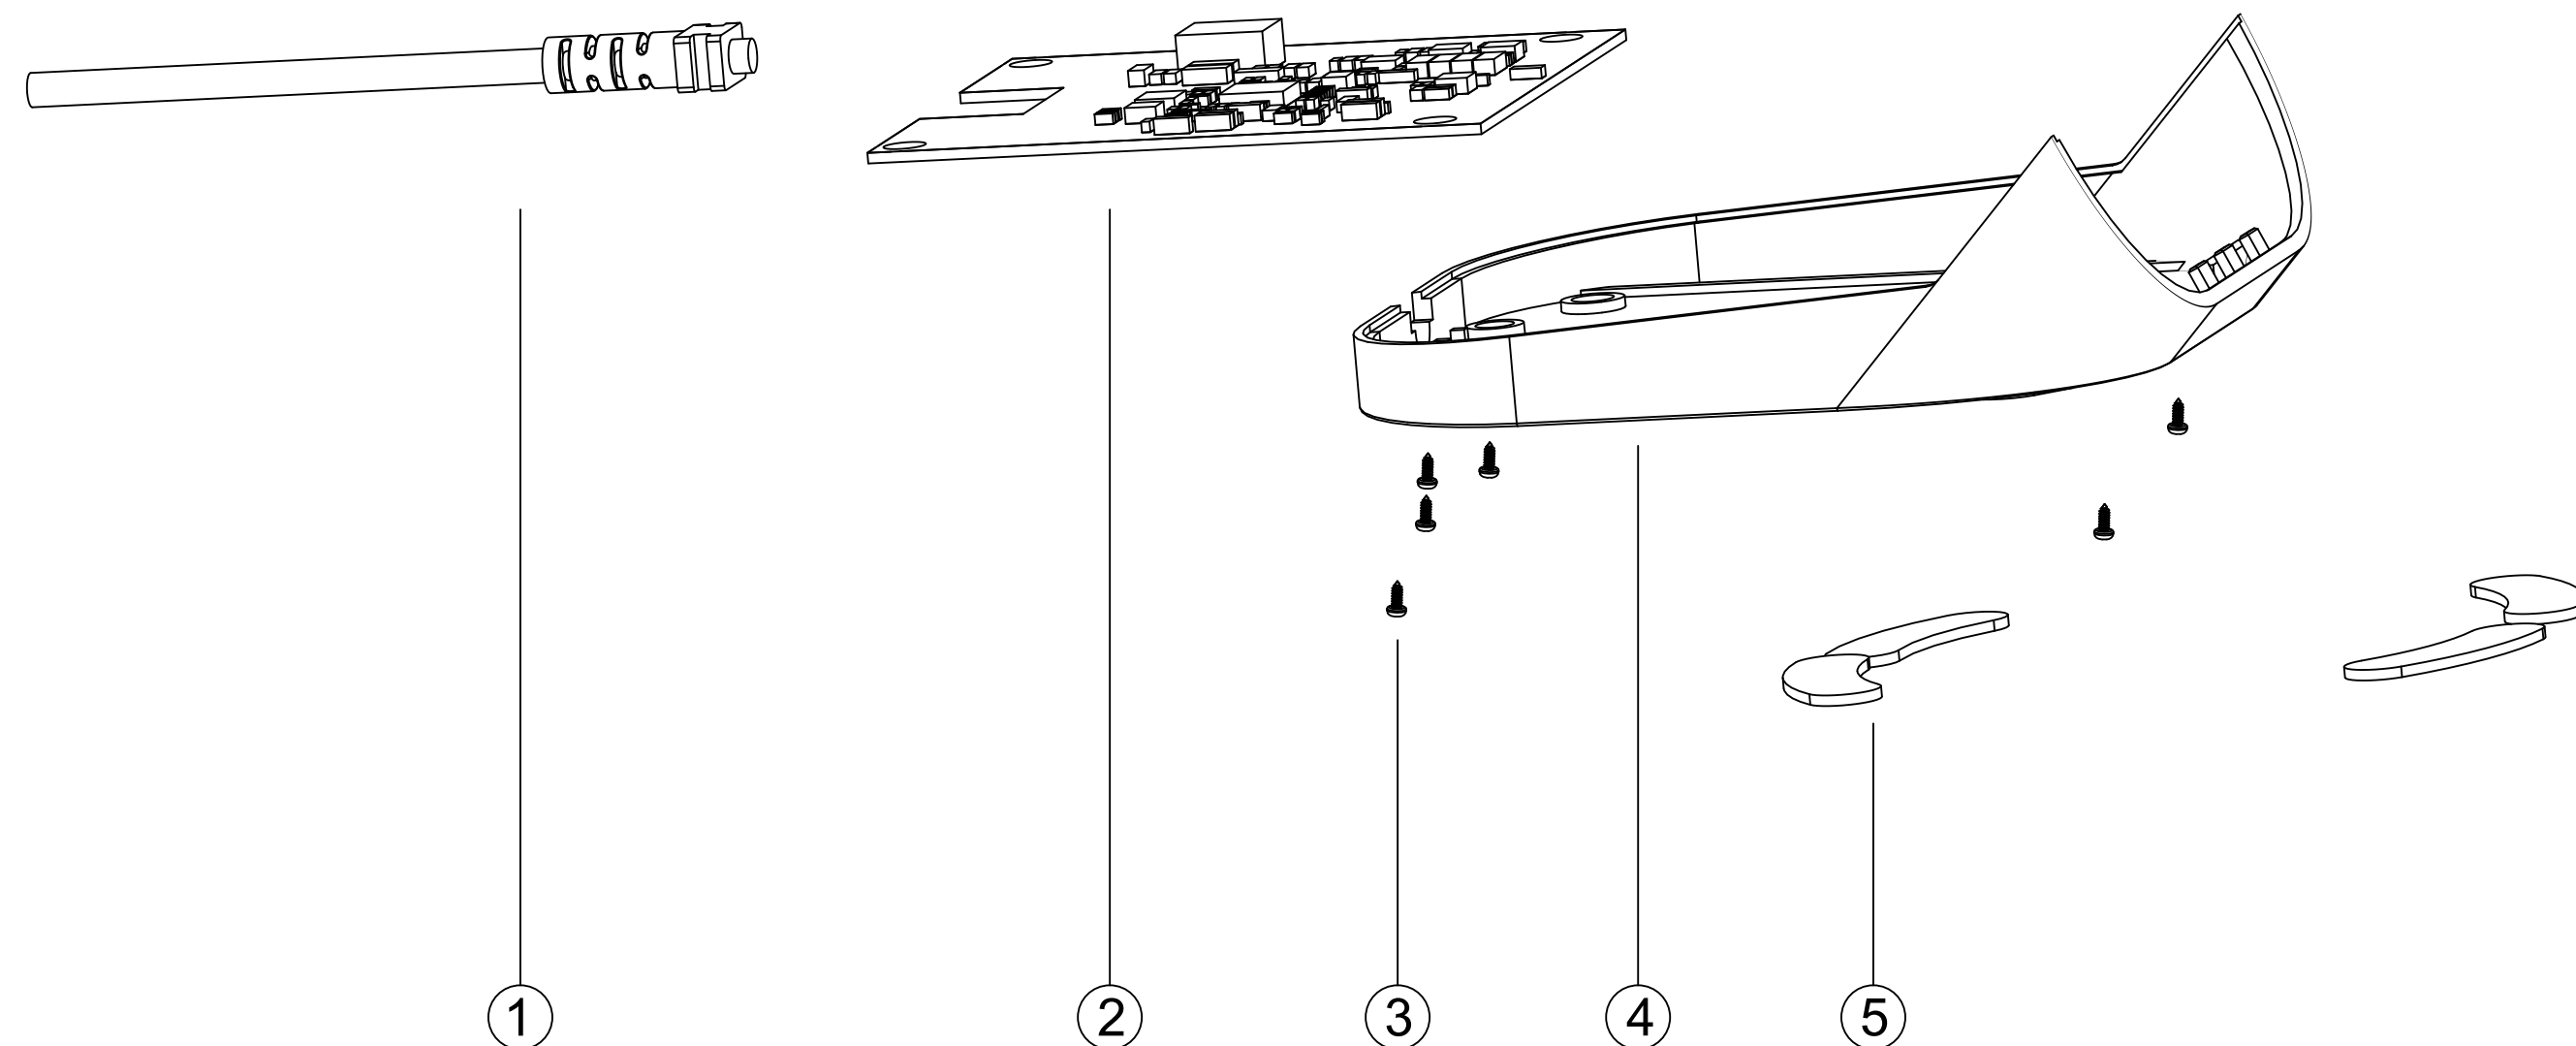


⑫	支架	塑壳-支架-PC-黑色-V0-58.4*14*13-纹面-丝印-R	1	pcs
⑪	防滑垫	硅胶件-防滑垫-黑色-背胶-纹面-55.8*12*1-R	1	pcs
⑩	导光柱	塑壳-导光柱-PC-透明-V0-25.7*24.8*2.3-纹面-R	1	pcs
⑨	面盖	塑壳-面盖-PC-黑色-V0-70.5*126.7*5.3-纹面-丝印-R	1	pcs
⑧	螺丝	螺丝-C1010-C-A-+-镀黑锌-M2*4-H	2	pcs
⑦	线圈	Coil,JUYUAN,MP-A20-TX,6.9μH,R	1	pcs
⑥	主壳	塑壳-主壳-PC-黑色-V0-131*70.5*7.4-纹面-R	8	pcs
⑤	脚垫	硅胶件-脚垫-黑色-背胶-纹面-26*7*1-R	4	pcs
④	底盖	塑壳-底盖-PC-黑色-V0-70.5*82.5*24.8-纹面-丝印-R	1	pcs
③	螺丝	螺丝-C1010-F-A-+-镀黑锌-M2.0*7-H	1	pcs
②	PCBA	LACC137无线充10W(Qi)主板（SMT）	1	pcs
①	Cable	U2-A TO OPEN-3FT-PVC- 黑色-OD3.2-RS	1	pcs
ITEM	NAME	DESCRIPTION	Q'TY	UNIT

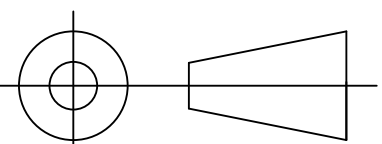X.± 1 .X± 0.3 .XX± 0.20 .XXX± 0.100 UNITS: mm		PART NO. LUZWC003-CS-R1		LUXSHARE-TECH TITLE: LACC137无线充10W(Qi) 直连USB-A 3FT黑色（无包材）		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-TECH AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-TECH		APPD: XIONGWU LI		DWG NO:		
		CHKD: SHUIPING ZHOU				
		Safety Eng: Juan Luo		 SCALE 1:3 SHEET 1/8 REV. A1		
		DRAW: SHIHAO XIE				

爆炸图

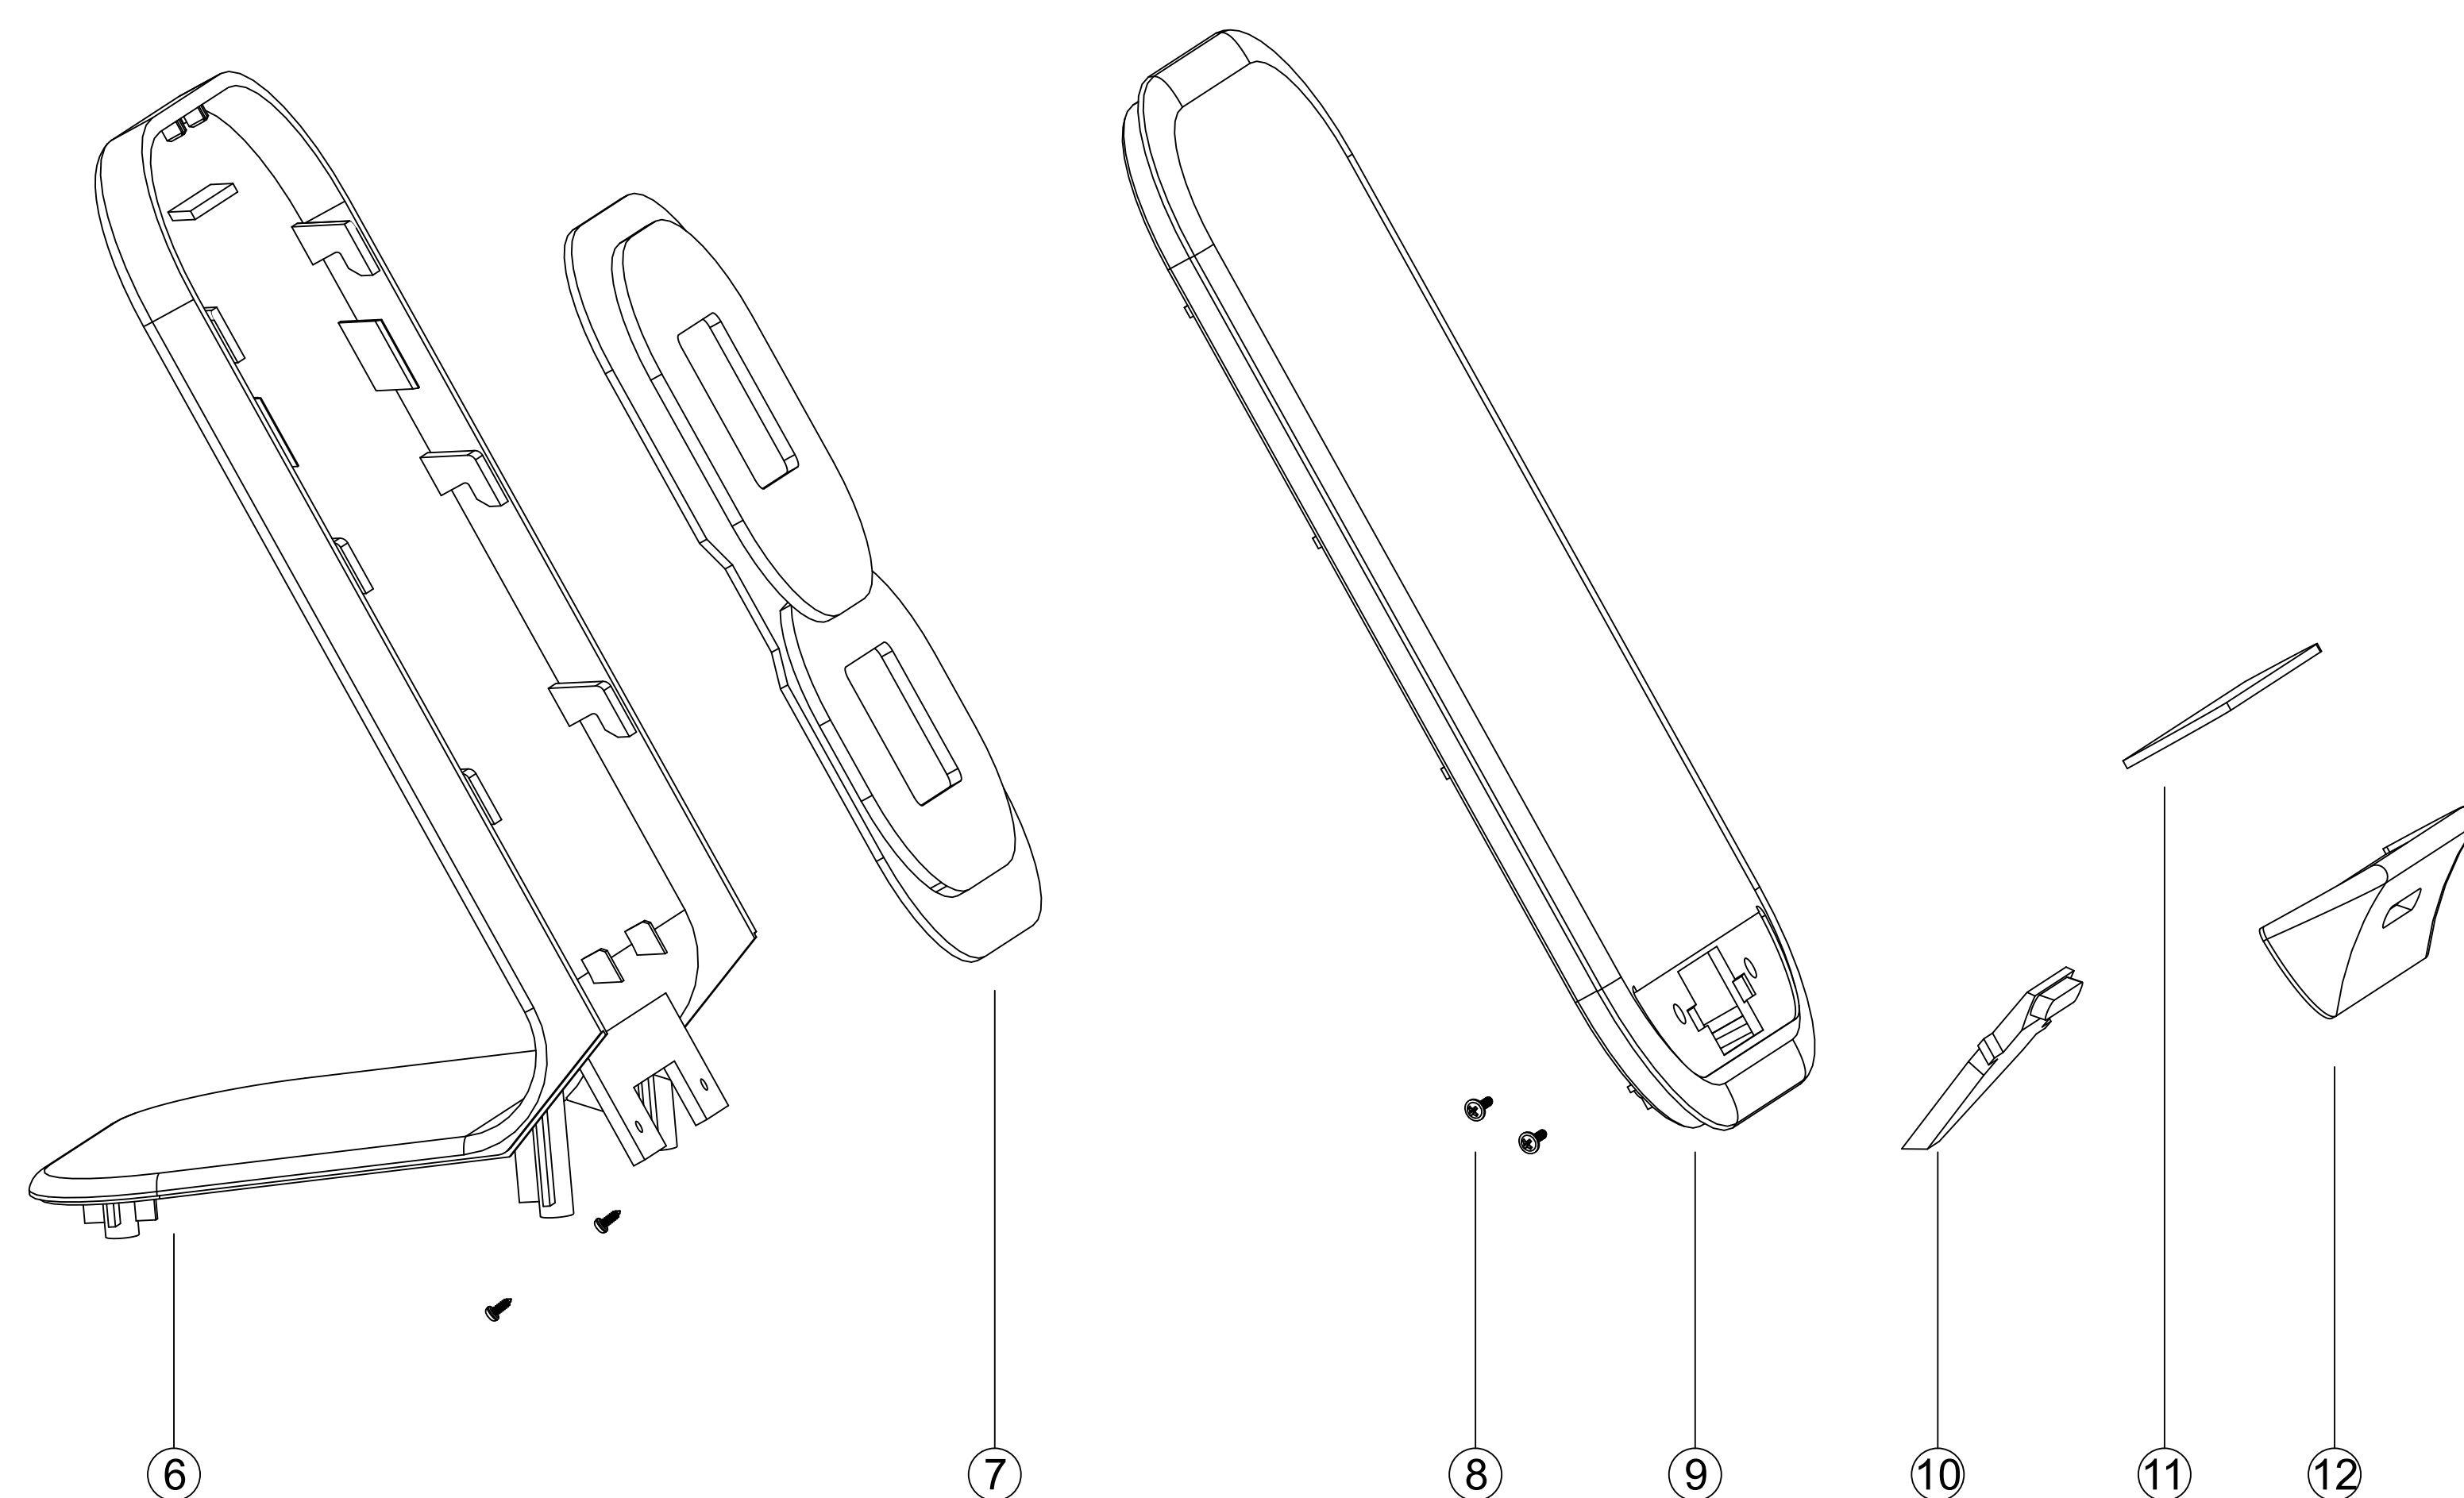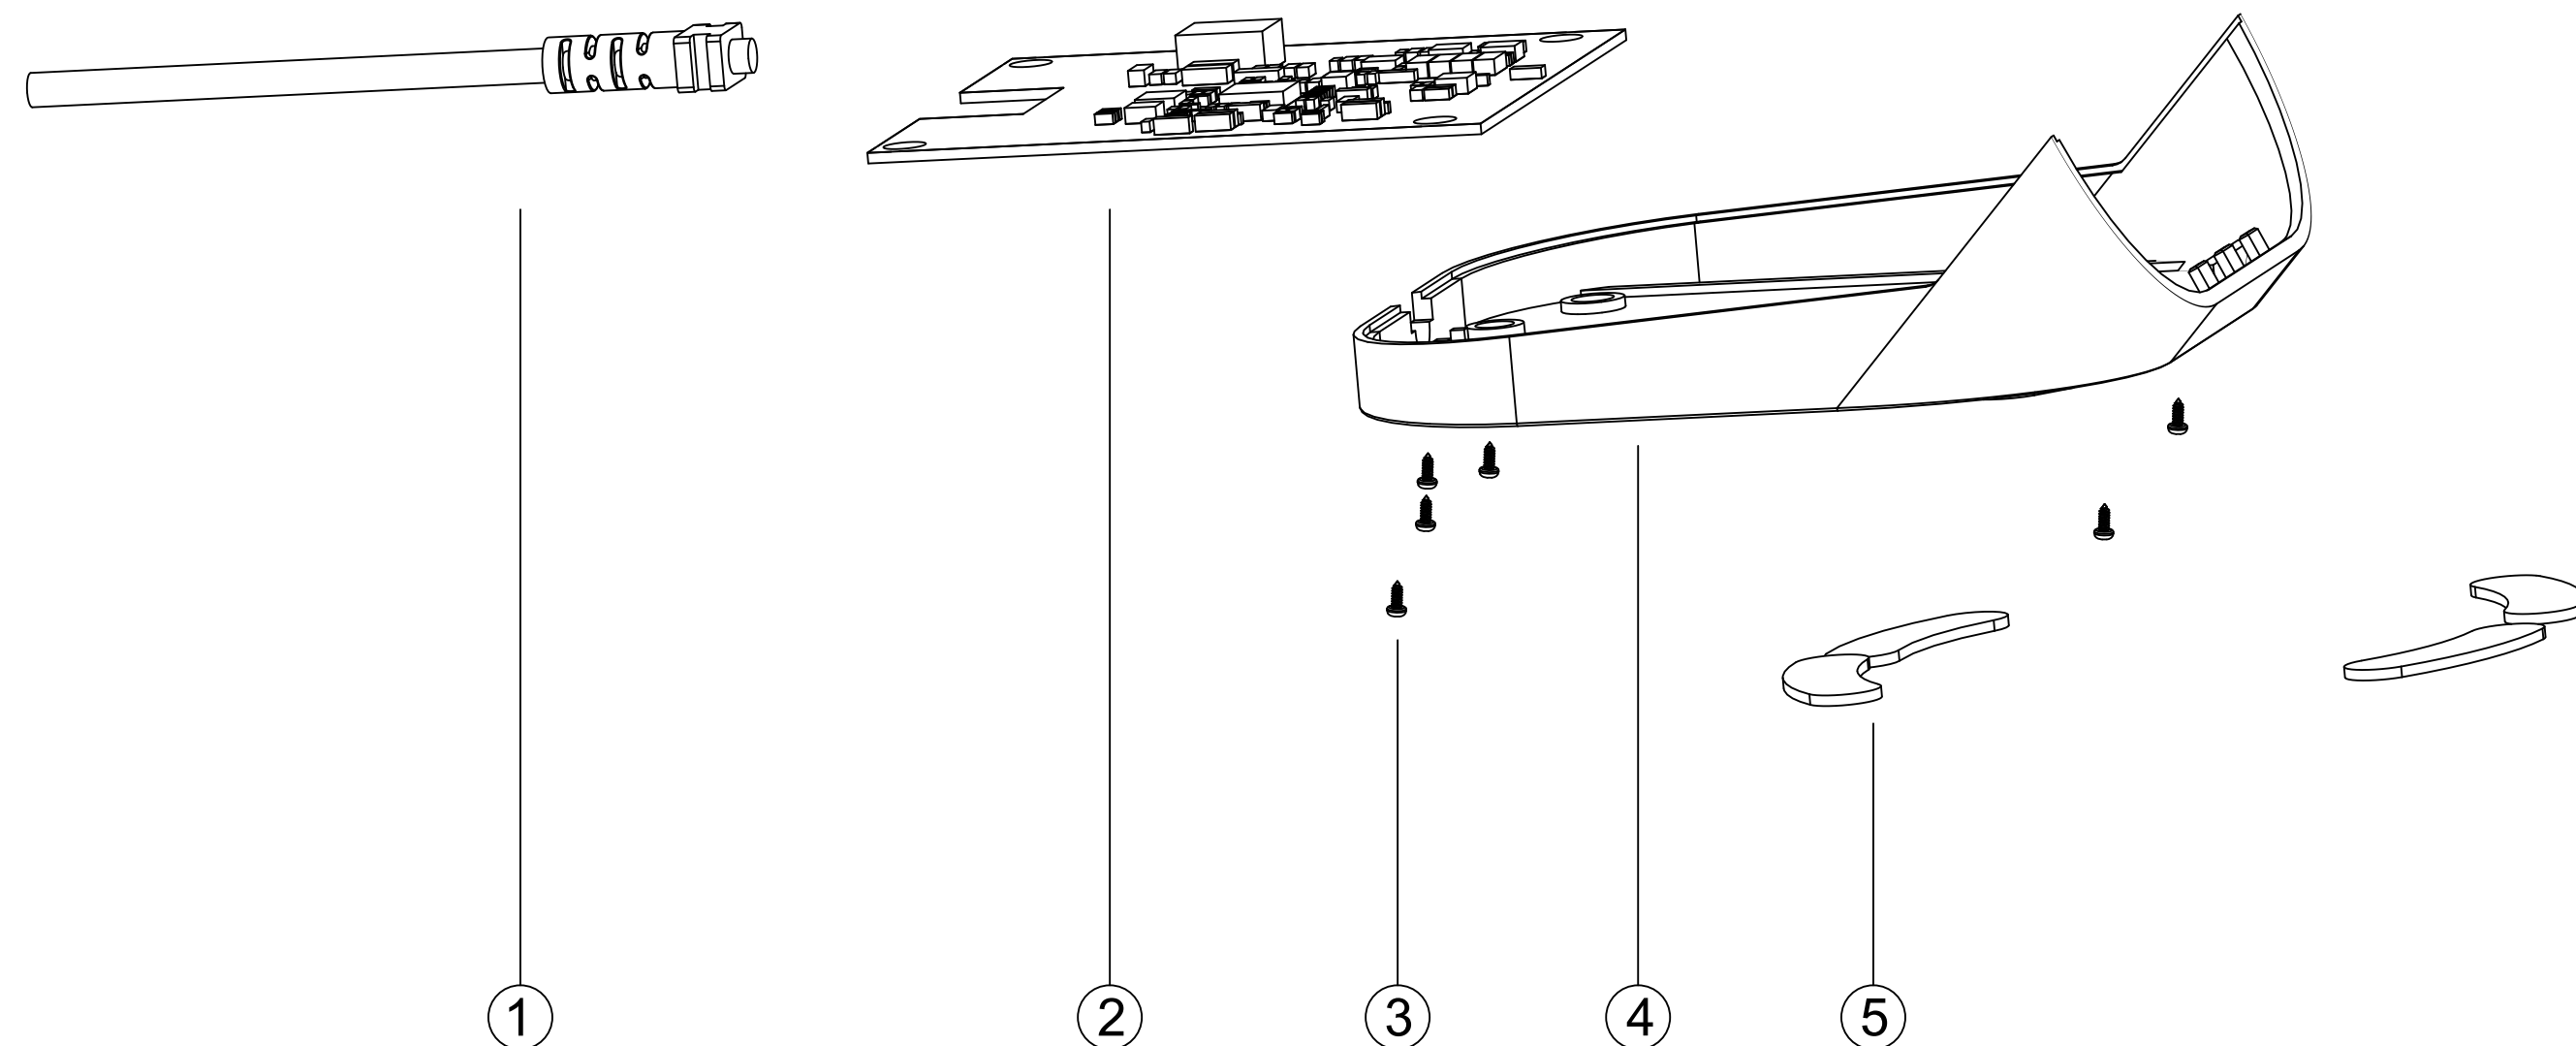

⑫	支架	塑壳-支架-PC-黑色-V0-58.4*14*13-纹面-丝印-R	1	pcs
⑪	防滑垫	硅胶件-防滑垫-黑色-背胶-纹面-55.8*12*1-R	1	pcs
⑩	导光柱	塑壳-导光柱-PC-透明-V0-25.7*24.8*2.3-纹面-R	1	pcs
⑨	面盖	塑壳-面盖-PC-黑色-V0-70.5*126.7*5.3-纹面-丝印-R	1	pcs
⑧	螺丝	螺丝-C1010-C-A-+-镀黑锌-M2*4-H	2	pcs
⑦	线圈	Coil,JUYUAN,MP-A20-TX,6.9μH,R	1	pcs
⑥	主壳	塑壳-主壳-PC-黑色-V0-131*70.5*7.4-纹面-R	8	pcs
⑤	脚垫	硅胶件-脚垫-黑色-背胶-纹面-26*7*1-R	4	pcs
④	底盖	塑壳-底盖-PC-黑色-V0-70.5*82.5*24.8-纹面-丝印-R	1	pcs
③	螺丝	螺丝-C1010-F-A-+-镀黑锌-M2.0*7-H	1	pcs
②	PCBA	LACC137无线充10W(Qi)主板（SMT）	1	pcs
①	Cable	U2-A TO OPEN-3FT-PVC- 黑色-OD3.2-RS	1	pcs
ITEM	NAME	DESCRIPTION	Q'TY	UNIT

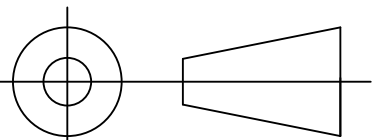X.± 1 .X± 0.3 .XX± 0.20 .XXX± 0.100 UNITS: mm		PART NO. LUZWC003-CS-R1		LUXSHARE-TECH TITLE: LACC137无线充10W(Qi) 直连USB-A 3FT黑色（无包材）		
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-TECH AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-TECH		APPD: XIONGWU LI		DWG NO:		
		CHKD: SHUIPING ZHOU				
		Safety Eng: Juan Luo		 SCALE 1:3 SHEET 1/8 REV. A1		
		DRAW: SHIHAO XIE				

E	8	7	6	5	4	3	2	1																																		
	RoHS	Reach	CP65																																							
	NOTES:(注解) 1. Appearance shall be inspected in accordance with the 《AEQW-QA-012 Charger finished product inspection standard》 and the content should comply with drawing. 外观依《AEQW-QA-012 Charger成品检验标准》检验、内容应符合图纸。 2.Mechanical Test(机械测试): 2.1.Unit drop: falls freely on the cement floor at the height of 100cm, once each surface, 6 times, no cracking on enclosure, no electrical failure. 单体跌落:高度100cm自由跌落于水泥地板, 每个面一次, 跌落6次,外壳无开裂, 电性正常 2.2. Tumbling test : 200 times from the height of 50 cm,15times/Min,After the test ,the housing has no crack and the electrical function keeps normal. 滚筒测试:高度50cm, 200次, 15次/min,外壳无开裂, 电性正常 3.Environmental test(环境测试): 3.1. Inner box or color box for high and low temperature storage: keep the temperature at -40℃ for 23 minutes, and then keep it is 85℃ for 23 minutes, go through 50 cycles, placed at room temperature for 1H, the product can work normally, and have no appearance defect such as enclosure melting. 内箱或彩盒高低温存储:环境温度-40℃/23分钟, 温度85℃/23分钟, 循环50个周期, 常温放置1H,产品通电可以正常工作及不允许出现外壳溶胶等外观不良。 3.2.High temperature and humidity: Temperature 85℃, humidity 85%, Use matching power input ,output no-load, work for 72H, the product can work normally. It is not allowed to have appearance defects such as enclosure melting. 高温高湿:温度85℃湿度85%, 使用配套电源输入、输出空载, 工作72H,产品通电可以正常工作不允许现外壳溶胶等外观不良。 3.3.High low temperature work: Use matching power input, temperature range at -10℃~40℃, keep at hightemperature and low temperature each for 20min, total 36 cycles. 高低温工作:温度变化范围-10℃~40℃, 使用配套电源输入、输出满载, 高低温各保持20min, 共进行36个循环。 4. Foreign object detection: under the condition of Useing matching power input, the product will stop charging after the foreign object is placed in the wireless charging area 异物检测:使用配套电源输入条件下,无线充充电区域放入异物后, 产品停止充电 5.Salt spray test: the sodium chloride solution with a concentration of 5% is automatically sprayed for 24 hours after the salt spray test, and the test is started after placed 4H at room temperature.After the test, clean it with clean water and let it dry naturally, there should be no corrosion, rust or other abnormal phenomena. 盐雾测试:5%浓度的氯化钠溶液,经盐雾试验自动喷雾24小时, 室温放置4H后开始检测。测试完成后使用清水清洗, 自然晾干无腐蚀, 生锈等异常现象 6.Anhydrous alcohol (concentration above 99.5%), wear-resisting testing machine, with pure cotton cloth dipped in anhydrous alcohol (wrapped on the test head,1cm²) , apply 500g load. After the test, slight wear and fading of the font is allowed, but the font content is required to be fully legible. 无水酒精（浓度99.5%以上），耐磨试验机, 用纯棉布蘸满无水酒精（包在测试头上, 包过后面积约为1cm²），施加500g的载荷。试验30次完成后, 允许字体有轻微的磨损及褪色, 但要求字体内容仍完整可辨认。																																									
D																																										
C																																										
B																																										
A	<table><tr><td>X.± 1</td><td>X.°±1</td><td rowspan="4">PART NO. LUZWC003-CS-R1</td><td colspan="4">LUXSHARE-ICT</td></tr><tr><td>.X± 0.3</td><td>.X°±0.5</td><td colspan="4">TITLE: LACC137无线充10W(Qi) 直连USB-A 3FT黑色（无包材）</td></tr><tr><td>.XX± 0.20</td><td>.XX°±0.3</td><td colspan="4">DWG NO:</td></tr><tr><td>.XXX± 0.100</td><td>.XXX°±0.1</td><td colspan="4"> SCALE SHEET REV. 1:1 4/5 A1 </td></tr><tr><td>UNITS:</td><td>mm</td><td>THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-ICT AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-ICT</td><td>APPD: XIONGWU LI</td><td>CHKD: SHUIPING ZHOU</td><td>Safety Eng: Juan Luo</td><td>DRAW: SHIHAO XIE</td><td colspan="2"></td></tr></table>								X.± 1	X.°±1	PART NO. LUZWC003-CS-R1	LUXSHARE-ICT				.X± 0.3	.X°±0.5	TITLE: LACC137无线充10W(Qi) 直连USB-A 3FT黑色（无包材）				.XX± 0.20	.XX°±0.3	DWG NO:				.XXX± 0.100	.XXX°±0.1	SCALE SHEET REV. 1:1 4/5 A1				UNITS:	mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-ICT AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-ICT	APPD: XIONGWU LI	CHKD: SHUIPING ZHOU	Safety Eng: Juan Luo	DRAW: SHIHAO XIE		
X.± 1	X.°±1	PART NO. LUZWC003-CS-R1	LUXSHARE-ICT																																							
.X± 0.3	.X°±0.5		TITLE: LACC137无线充10W(Qi) 直连USB-A 3FT黑色（无包材）																																							
.XX± 0.20	.XX°±0.3		DWG NO:																																							
.XXX± 0.100	.XXX°±0.1		SCALE SHEET REV. 1:1 4/5 A1																																							
UNITS:	mm	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF LUXSHARE-ICT AND SHALL NOT BE REPRODUCED, COPIED OR CUED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF LUXSHARE-ICT	APPD: XIONGWU LI	CHKD: SHUIPING ZHOU	Safety Eng: Juan Luo	DRAW: SHIHAO XIE																																				
	8	7	6	5	4	3	2	1																																		

