

Report No.: KSEM210600089901 Page: 1 of 41

FCC SAR TEST REPORT

Application No.: Applicant: Address of Applicant: Manufacturer:	KSEM2106000899CR(SZCR2105021238AT) ASAP Technology(Jiangxi) Co., Ltd. Ji'an Industrial Park, Ji'an, Jiangxi 343100 China ASAP Technology(Jiangxi) Co., Ltd.		
Address of Manufacturer:	Ji'an Industrial Park, Ji'an, Jiangxi 343100 China		
Factory:	LUXSHARE-ICT (NGHE AN) LIMITED		
Address of Factory:	No.18 Street 03, VSIP Nghe An Industrial Park, Hung Tay Commune,Hung Nguyen District,Nghe An Province,Vietnam		
Product Name:	Onn. 23 miles Walkie talkie		
Model No.(EUT):	100068732		
Trade mark:	onn.		
FCC ID:	2APXNLWT002		
Standard(s) :	FCC 47CFR §2.1093		
Date of Receipt:	2021-06-15		
Date of Test:	2021-07-13 to 2021-07-13		
Date of Issue:	2021-07-14		
Test Result:	Pass*		
* In the configuration tested, t	* In the configuration tested, the EUT complied with the standards specified above.		

Eni fri

Eric Lin

Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-en-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@egs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 2 of 41

REVISION HISTORY

Revision Record			
Version	Description	Date	Remark
00	Original	2021-07-14	/

Authorized for issue by:		
	Richard. Kong	
	Richard.Kong/ Project Engineer	
	Eni fri	
	Eric.Lin/Reviewer	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report accertificate, please contact us at telephone: (86-755) 8307 1443, or email: CM_Doccheck@sgs.com (86-512)5730818 www.sgsgroup.com.cn

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com Member of the SGS Group (SGS SA)



Report No.: KSEM210600089901 Page: 3 of 41

TEST SUMMARY

Test Summary					
Frequency Band	Test position	Test mode	Max Reported SAR1g (W/kg)	SAR limit (W/kg)	Verdict
	Front of face	FM	0.37	1.6	PASS
PTT(450MHz)	Back side with Splint	FM	0.42	1.6	PASS



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5730818 www.sgsgroup.com.cn

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 4 of 41

CONTENTS

1	GENERAL INFORMATION	
	1.1 GENERAL DESCRIPTION OF EUT	
	1.1.1 DUT Antenna Locations	
	1.2 Test Specification	
	1.3 RF EXPOSURE LIMITS	
	1.4 Test Location	
	1.5 TEST FACILITY	
2	LABORATORY ENVIRONMENT	11
3	SAR MEASUREMENTS SYSTEM CONFIGURATION	12
	3.1 THE SAR MEASUREMENT SYSTEM	12
	3.2 ISOTROPIC E-FIELD PROBE EX3DV4	
	3.3 DATA ACQUISITION ELECTRONICS (DAE)	
	3.4 SAM TWIN PHANTOM	
	3.5 ELI PHANTOM	
	3.6 Device Holder for Transmitters	
	3.7 MEASUREMENT PROCEDURE	
	3.7.1 Scanning procedure	
	3.7.2 Data Storage	
	3.7.3 Data Storage	
4	SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	22
	4.1 SAR MEASUREMENT VARIABILITY	
	4.2 SAR MEASUREMENT UNCERTAINTY	23
5	DESCRIPTION OF TEST POSITION	24
	5.1 HANDHELD PUSH-TO-TALK (PTT) TWO-WAY RADIOS	24
6	SAR SYSTEM VERIFICATION PROCEDURE	25
	6.1 TISSUE SIMULATE LIQUID	25
	6.1.1 Recipes for Tissue Simulate Liquid	25
	6.1.2 Test Liquids Confirmation	
	6.1.3 Measurement for Tissue Simulate Liquid	27
	6.2 SAR System Check	
	6.2.1 Justification for Extended SAR Dipole Calibrations	29
	6.2.2 Summary System Check Result(s)	
	6.2.3 Detailed System Check Results	
7	TEST CONFIGURATION	31
	7.1 Operation Configurations	
	7.1.1 PTT Test Configuration	
8	TEST RESULT	32
	8.1 MEASUREMENT OF RF CONDUCTED POWER	
	8.1.1 Conducted Power Of PTT450MHz	
	8.1.2 SAR Result Of PTT450MHz	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's information contained hereon reflects the Company's to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only. **Attention:** To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-575) 8307 1443, or email: <u>Ch.Doccheck@sgs.com</u> No.10, Weige Road, Innovation Park, Kunshan, Jiangsu, China 215300 ((86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn mail: ch.Doccheck@sgs.com



Report No.: KSEM210600089901 Page: 5 of 41

8	.2	EQUIPMENT LIST	34
9	CAL	BRATION CERTIFICATE	35
10	РНО	TOGRAPHS	.35
API	PENDI	X A: DETAILED SYSTEM CHECK RESULTS	36
API	PENDI	X B: DETAILED TEST RESULTS	38
API	PENDI	X C: CALIBRATION CERTIFICATE	40
API	PENDI	X D: PHOTOGRAPHS	41



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (168-512)57305888 (168-512)5730818 www.sgsgroup.com.cn no.10 rights Road, Innovation Park, Kunshan, Jiangsu, China 215300 (168-512)57305888 (168-512)5730818 sgs.china@gsgs.com



Report No.: KSEM210600089901 Page: 6 of 41

1 General Information

1.1 General Description of EUT

Device Type :	portable device		
Exposure Category:	uncontrolled environm	nent / general population	
Product Phase:	production unit		
SN:	20#		
Hardware Version:	A		
Software Version:	A		
Antenna Type:	Inseparable		
Device Operating Configurati	ons :		
Modulation Mode:	PTT450MHz: FM		
Antenna Gain:	0dBi (Provided by th	ne manufacturer)	
Device Class:	В		
Frequency Bender	Band	Tx (MHz)	Rx (MHz)
Frequency Bands:	PTT450MHz	462.55~467.7125	462.55~467.7125
Power Supply:	DC 4.5V by battery an	d recharged by DC 5V	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or faisfication of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5730818 www.sgsgroup.com.cn

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01


Member of the SGS Group (SGS SA)

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 7 of 41

1.1.1 DUT Antenna Locations

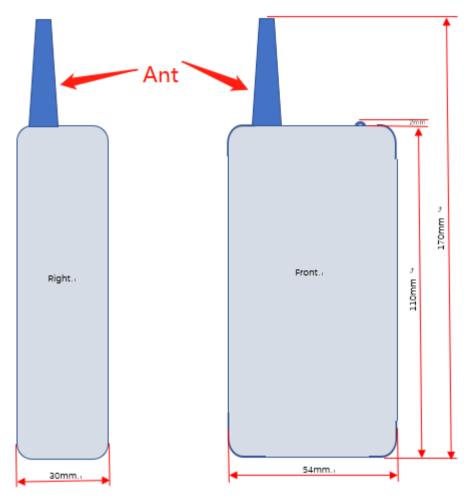

The test device is a Onn. 23 miles Walkie talkie.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: Ch.Doccheck@sgs.com

 No.10, Weige Road, Innovation Park, Kunshan, Jiangsu, China 215300
 ((86-512)5737081
 www.sgsgroup.com.cn.

 mail < fifth of the sign is placed by the sample(s) tested and such sample(s) are retained for 30 days only.</td>
 ((86-512)5737081
 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 8 of 41

1.2 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radio frequency Radiation Exposure Evaluation: Portable Devices
IEEE Std C95.1 – 2019	IEEE Standard for Safety Levels with Respect to Human Exposure to Electric, Magnetic, and Electromagnetic Fields, 0 Hz to 300 GHz
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
KDB447498 D01 General RF Exposure Guidance v06	Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies
KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04	SAR Measurement Requirements for 100 MHz to 6 GHz
KDB 865664 D02 RF Exposure Reporting v01r02	RF Exposure Compliance Reporting and Documentation Considerations
KDB 643646 D01: SAR test for PTT Radios v01r03	SAR Test Reduction Considerations for Occupational PTT Radios





Report No.: KSEM21060008990 Page: 9 of 41

1.3 RF exposure limits

	Uncontrolled Environment	Controlled Environment	
Human Exposure	General Population	Occupational	
Spatial Peak SAR*	1.60 W/kg	8.00 W/kg	
(Brain*Trunk)	1.00 W/Kg		
Spatial Average SAR**		0.40 \\//ka	
(Whole Body)	0.08 W/kg	0.40 W/kg	
Spatial Peak SAR***	4.00 \\///ca	20.00 \\//ka	
(Hands/Feet/Ankle/Wrist)	4.00 W/kg	20.00 W/kg	

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888

f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 10 of 41 Page:

1.4 Test Location

Company:	Compliance Certification Services (Kunshan) Inc.	
Address:	No.10 Weiye Rd., Innovation park, Eco&Tec, Development Zone, Kunshan City, Jiangsu, China	
Post code:	215300	
Telephone:	86-512-57355888	
Fax:	86-512-57370818	

1.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS (No. CNAS L4354)

CNAS has accredited Compliance Certification Services (Kunshan) Inc. to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

A2LA (Certificate No. 2541.01)

Compliance Certification Services (Kunshan) Inc. is accredited by the American Association for Laboratory Accreditation (A2LA). Certificate No. 2541.01.

FCC –Designation Number: CN1172

Compliance Certification Services Inc. has been recognized as an accredited testing laboratory.

Designation Number: CN1172.

ISED (CAB identifier: CN0072)

Compliance Certification Services (Kunshan) Inc. has been recognized by Innovation, Science and Economic Development Canada (ISED) as an accredited testing laboratory

CAB Identifier: CN0072.

• VCCI (Member No.: 1938)

The 3m and 10m Semi-anechoic chamber and Shielded Room of Compliance Certification Services (Kunshan) Inc. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-1600, C-1707, T-1499, G-10216 respectively.



中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888



Report No.: KSEM210600089901 Page: 11 of 41

Laboratory Environment 2

Min. = 18°C, Max. = 25 °C		
Min. = 30%, Max. = 70%		
< 0.5 Ω		
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.		

Table 1: The Ambient Conditions



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forger or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) lested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@ess.com No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSEM210600089901 Page: 12 of 41

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY5 professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation SAR= σ (|Ei|2)/ ρ where σ and ρ are the conductivity and mass density of the tissue-Simulate.

The DASY5 system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software .An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, presented cut at at telephone: (86-755)8307 1443, or email: CN_Doccheck@sgs.com


中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888

f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 13 of 41

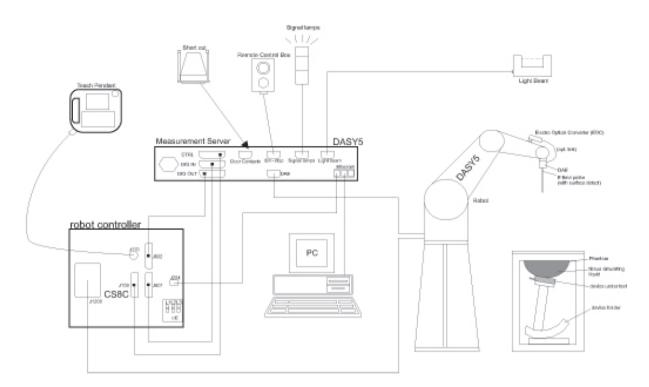

F-1. SAR Measurement System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validat the proper functioning of the system.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)8307 1443, or email: CN.Doccheck@sgs.com

 No.10, Weijve Road, Innovation Park, Kunshan, Jiangsu, China 215300
 t(86-512)57370818
 www.sgsgroup.com.cn

 中国 • 江苏 • 昆山市留学生创业园伟业路10号
 邮编 215300
 t(86-512)57370818
 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 14 of 41

3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exoered the prior the approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, preserve accent us at telephone: (86-755) 8307 1443, or email: <u>CN_Doccheck@sgs.com</u> No.10, Weig Road, Innovation Park, Kunshan, Jiangsu, China 215300 (86-512)5730818 www.sgsgroup.com.cn

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 15 of 41

3.3 Data Acquisition Electronics (DAE)

Model	DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	- Ale
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5µV (with auto zero)	
Input Bias Current	< 50 f A	A
Dimensions	60 x 60 x 68 mm	

3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE- GF)	- n
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	T. T
Dimensions	Length: 1000 mm	
(incl. Wooden Support)	Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	-
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention: To check the authenticity of testing linspection report & certificate, please contact us at telephone: (86-755)8307 1443, or email: Ch.Doccheck@sgs.com
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
(88-512)57370818 www.sgsgroup.com.cn
reflex is the sample solve the wash 10-B wisg 215300
(88-512)57370818 sys.china@sgs.com



Report No.: KSEM210600089901 Page: 16 of 41

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.

ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, pieses contact us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com (86-512)5730818 www.sgsgroup.com.cn

Test Report Form Version: Rev01

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-51 t(86-51



Report No.: KSEM210600089901 Page: 17 of 41

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity ε =3 and loss tangent δ =0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888



Report No.: KSEM210600089901 Page: 18 of 41

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The "reference" and "drift" measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm.Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 30mm*30mm*30mm (fine resolution volume scan, zoom scan) was assessed by measuring 5x5x7 points (≤2GHz) and 7x7x7 points (≥2GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation or liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exconse parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) tere retained for 30 days on). No.10, Weive Road, Innovation Park, Kunshan, Jiangsu, China 215300 t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn f(86-512)57370818 sgs.china@sgs.com

邮编 215300

中国・江苏・昆山市留学生创业园伟业路10号

t(86-512)57355888



Report No.: KSEM210600089901 Page: 19 of 41

			\leq 3 GHz	> 3 GHz		
Maximum distance fro (geometric center of pr		•	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$		
Maximum probe angle surface normal at the n	-	•	30°±1°	20°±1°		
			≤ 2 GHz: ≤ 15 mm 2 - 3 GHz: ≤ 12 mm	$\begin{array}{l} 3-4 \text{ GHz:} \leq 12 \text{ mm} \\ 4-6 \text{ GHz:} \leq 10 \text{ mm} \end{array}$		
Maximum area scan sp	atial resolu	ution: Δx _{Area} , Δy _{Area}	When the x or y dimension of measurement plane orientation the measurement resolution in x or y dimension of the test d measurement point on the test	on, is smaller than the above, must be \leq the corresponding evice with at least one		
Maximum zoom scan s	spatial reso	lution: Δx _{Zoom} , Δy _{Zoom}	$\leq 2 \text{ GHz}: \leq 8 \text{ mm}$ 2 - 3 GHz: $\leq 5 \text{ mm}^*$	$3 - 4 \text{ GHz} \le 5 \text{ mm}^*$ $4 - 6 \text{ GHz} \le 4 \text{ mm}^*$		
	uniform grid: $\Delta z_{Zoom}(n)$		\leq 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm		
Maximum zoom scan spatial resolution, normal to phantom surface	graded	$\Delta z_{Z_{0000}}(1)$: between 1 st two points closest to phantom surface	\leq 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm		
	grid	Δz _{Zoom} (n>1): between subsequent points	$\leq 1.5 \cdot \Delta z$	Zoom(n-1)		
Minimum zoom scan volume	x, y, z		\geq 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm		
 Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details. * When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. 						

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max. \pm 5 %





Report No.: KSEM210600089901 Page: 20 of 41

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DAE3". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivi	ity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters: - Frequer	юу	f
- Crest factor	cf	
Media parameters: - Conduct	tivity	3
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$V_i = U_i + U_i^2 \cdot c f / d c p_i$

With Vi = compensated signal of channel i (i = x, y, z) Ui = input signal of channel i (i = x, y, z) cf = crest factor of exciting field (DASY parameter) dcp i = diode compression point (DASY parameter)



Unless otherwise agreed in writing, this document is issued by the Comp overleaf, available on request or accessible at http://www.sgs.com/en/Terms subject to Terms and Conditions for Electronic Documents at http://www.sg .com/en/Terms Attention is drawn to the limitation of liability, indemnification and jurisdiciti advised that information contained hereon reflects the Company's findings Client's instructions, if any. The Company's sole responsibility is to its Cl transaction from exercising all their rights and obligations under the trans except in full, without prior written approval of the Company. Any unautho appearance of this document is unlawful and offenders may be prosecuted to results shown in this test report refer only to the sample(s) tested and such sa Attention: To check the authenticity of testing /inspection report & certifion or email: CN_Doccheck@ess.com	-and-Conditions.aspx is.com/en/Terms-and- on issues defined that at the time of its inter lient and this docume action documents. Th rized alteration, forg o the fullest extent of mple(s) are retained for	and, for electroni <u>Conditions/Term</u> rein. Any holder rvention only and nt does not exc nis document ca ery or falsification the law. Unless of r 30 days only.	c format documents, s-e-Document.aspx. of this document is d within the limits of onerate parties to a noto be reproduced on of the content or otherwise stated the
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300	t(86-512)57355888	f(86-512)57370818	www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300	t(86-512)57355888	f(86-512)57370818	sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 21 of 41

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_{i} = (V_{i} / Norm_{i} \cdot ConvF)^{1/2}$$

H-field probes:

$$H_{i} = (V_{i})^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^{2})/f$$

With Vi = compensated signal of channel i (i = x, y, z)Normi = sensor sensitivity of channel I (i = x, y, z)[mV/(V/m)2] for E-field Probes ConvF = sensitivity enhancement in solution aij = sensor sensitivity factors for H-field probes f = carrier frequency [GHz] Ei = electric field strength of channel i in V/m

Hi = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$

The primary field data are used to calculate the derived field units.

$SAR = (Etot^2 \cdot \sigma) / (\varepsilon \cdot 1000)$

With SAR = local specific absorption rate in mW/g Etot = total field strength in V/m σ = conductivity in [mho/m] or [Siemens/m] ϵ = equivalent tissue density in g/cm3

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 2 / 3770$$
 or $P_{pwe} = H_{tot}^2 \cdot 37.7$

with Ppwe = equivalent power density of a plane wave in mW/cm2 Etot = total electric field strength in V/m

Htot = total magnetic field strength in A/m



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Cilent's instructions, if any. The Company's sole responsibility is to its Cilent and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, filester catined for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)57370818 www.sgsgroup.com.cn sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 22 of 41

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is remounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.

2) When the original highest measured SAR is \geq 0.80 W/kg, repeat that measurement once.

3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is \geq 1.45 W/kg (~ 10% from the 1-g SAR limit).

4) Perform a third repeated measurement only if the original, first or second repeated measurement is \geq 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20.

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.



中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888

f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 23 of 41

4.2 SAR measurement uncertainty

Per KDB865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of festing / inspection report & certificate, pressecuted to the fullest cut as telephone: (86-756) 8307 1443, or email: Ch.Doccheck@sas.com

Test Report Form Version: Rev01

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com Member of the SGS Group (SGS SA)



Report No.: KSEM210600089901 Page: 24 of 41

5 Description of Test Position

5.1 Handheld push-to-talk (PTT) two-way radios

This EUT was tested in Two different positions. They are Face-Held Configuration and Body-worn Configuration.

Face-Held Configuration

Face-held Configuration- per IEEE 1528-2013: "If the user instructions provided by the manufacturer specify an intended use with an appropriate accessory at a certain separation distance to the body, the device shall be positioned as intended at the distance to the outer surface of the phantom that corresponds to the specified distance. When evaluating device SAR without a specific carry accessory, the separation distance shall not exceed 25 mm"

Body-worn Configuration

Body-worn measurements-per IEEE 1528-2013: The surface of the device pointing towards the flat phantom should be parallel to the surface of the phantom. However, all devices do not have a flat surface. Therefore the details of the device position, e.g. the definition of the distance and the physical relationship between the device and the phantom, shall be documented in the measurement report according to the manufacturer instructions

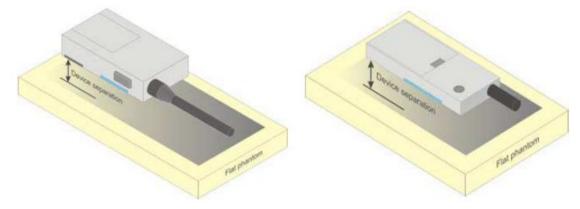


Illustration for Two-way radios



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing linspection report & certificate, piease contact us at telephone: (86-512)5730818 www.sgsgroup.com.cn No.10, Weige Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)57370818 sys.china@sgs.com



Report No.: KSEM210600089901 Page: 25 of 41

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The bellowing tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients	Frequency (MHz)										
(% by weight)	450		83	835		915		1900		2450	
Tissue Type	Head	Body	Head	Body	Head	Body	Head	Body	Head	Body	
Water	38.56	51.16	41.45	52.4	41.05	56.0	54.9	40.4	62.7	73.2	
Salt (NaCl)	3.95	1.49	1.45	1.4	1.35	0.76	0.18	0.5	0.5	0.04	
Sugar	56.32	46.78	56.0	45.0	56.5	41.76	0.0	58.0	0.0	0.0	
HEC	0.98	0.52	1.0	1.0	1.0	1.21	0.0	1.0	0.0	0.0	
Bactericide	0.19	0.05	0.1	0.1	0.1	0.27	0.0	0.1	0.0	0.0	
Triton X-100	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	36.8	0.0	
DGBE	0.0	0.0	0.0	0.0	0.0	0.0	44.92	0.0	0.0	26.7	
Dielectric Constant	43.42	58.0	42.54	56.1	42.0	56.8	39.9	54.0	39.8	52.5	
Conductivity (S/m)	0.85	0.83	0.91	0.95	1.0	1.07	1.42	1.45	1.88	1.78	
HSL5GHz is compos	ed of the	following	ingredier	nts:							
Water: 50-65%											
Mineral oil: 10-30%											
Emulsifiers: 8-25%											
Sodium salt: 0-1.5%)										
MSL5GHz is compos	ed of the	following	ingrediei	nts:							
Water: 64-78%											
Mineral oil: 11-18%											
Emulsifiers: 9-15%											
Sodium salt: 2-3%											

Table 2: Recipe of Tissue Simulate Liquid



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention to check the authenticity of testing /inspection report & certificate, press content or asile(s) are retained for 30 days only. No.10, Weige Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)57370818 www.sgsgroup.com.cn no. No.10, Yeige Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 26 of 41

6.1.2 Test Liquids Confirmation

Simulated tissue liquid parameter confirmation

The dielectric parameters were checked prior to assessment using the SPEAG DAK3.5 dielectric probe kit. The dielectric parameters measured are reported in each correspondent section.

IEEE SCC-34/SC-2 P1528 recommended tissue dielectric parameters

The head tissue dielectric parameters recommended by the IEEE SCC-34/SC-2 in P1528 have been incorporated in the following table. These head parameters are derived from planar layer models simulating the highest expected SAR for the dielectric properties and tissue thickness variations in a human head. Other head and body tissue parameters that have not been specified in P1528 are derived from the tissue dielectric parameters computed from the 4-Cole-Cole equations and extrapolated according to the head parameters specified in P1528

Target Frequency	Не	ad	Bo	dy
(MHz)	ε _r	σ (S/m)	ε _r	σ (S/m)
150	52.3	0.76	61.9	0.80
300	45.3	0.87	58.2	0.92
450	43.5	0.87	56.7	0.94
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
915	41.5	0.98	55.0	1.06
1450	40.5	1.20	54.0	1.30
1610	40.3	1.29	53.8	1.40
1800-2000	40.0	1.40	53.3	1.52
2450	39.2	1.80	52.7	1.95
3000	38.5	2.40	52.0	2.73
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and ρ = 1000 kg/m³)





Report No.: KSEM210600089901 Page: 27 of 41

6.1.3 Measurement for Tissue Simulate Liquid

The dielectric properties for this Tissue Simulate Liquids were measured by using the Agilent Model 85070E Dielectric Probe in conjunction with Agilent E5071C Network Analyzer (300 KHz-8500 MHz). The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was 22±2°C.

Tissue Type	Measured Frequency (MHz)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Liquid Temp. (℃)	Date	
450 Head	450	0.874	43.757	0.87	43.50	0.46	0.59	±5	22	2021/7/13	ĺ

Table 3: Measurement result of Tissue electric parameters



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client is unement does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-575) 8307 1443, or email: <u>CN.Doccheck@sgs.com</u> (186-51215730818 www.sgsgroup.com.ch

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)

t(86-512)57355888


f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 28 of 41

6.2 SAR System Check

The microwave circuit arrangement for system check is sketched in bellow figure. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within +/- 10% from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table. During the tests, the ambient temperature of the laboratory was in the range 22±2°C, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

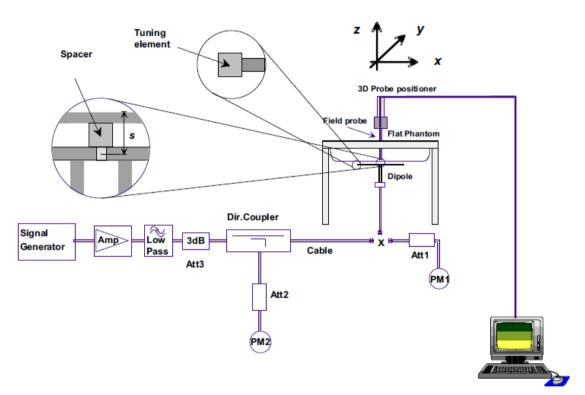

F-3. the microwave circuit arrangement used for SAR system verification



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are relatined for 30 days only. Attention: To check the authenticity of testing linspace into accument (as at telephone: (86-512)5730818 www.sgsgroup.com.cn www.sgsgroup.com.cn (90-512)5730818 www.sgsgroup.com.cn (90-512)57370818 sys.china@sgs.com



Report No.: KSEM210600089901 Page: 29 of 41

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of festing / inspection report & certificate, pressecuted to the fullest cut as telephone: (86-756) 8307 1443, or email: Ch.Doccheck@sas.com

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888

f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 30 of 41

6.2.2 Summary System Check Result(s)

Validatio	n Kit	Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1w)	Measured SAR (normalized to 1w)	Target SAR (normalized to 1w) (±10%)	Target SAR (normalized to 1w) (±10%)	Liquid Temp. (℃)	Measured Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)		
D450V2	Head	1.11	0.729	4.44	2.916	4.53 (4.08~4.98)	3.03 (2.73~3.33)	22	2021/7/13

Table 4: SAR System Check Result

6.2.3 Detailed System Check Results

Please see the Appendix A



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company, any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing linspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: Ch.Doccheck@sgs.com No.10, Weige Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)5730618 www.sgsgroup.com.cn (86-512)5730818 sgs.china@sgs.com

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)



Report No.: KSEM210600089901 Page: 31 of 41

Test Configuration 7

7.1 Operation Configurations

7.1.1 PTT Test Configuration

For the PTT SAR tests, a communication link is set up with the test mode software for PTT mode test. The Absolute Radio Frequency Channel Number (ARFCN) is allocated one channel in the case of 450 MHz during the test at the test frequency channel. The EUT is operated at the RF continuous emission mode. The channel should be tested at the 100% duty cycle.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refor only to the sample(s) tested and such sample(s) are retained for 30 days only. t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn No.10, Weive Road, Innovation Park, Kunshan, Jiangsu, China 215300 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 f(86-512)57370818 sgs.china@sgs.com

t(86-512)57355888



Report No.: KSEM210600089901 Page: 32 of 41

Test Result 8

8.1 Measurement of RF Conducted Power

8.1.1 Conducted Power Of PTT450MHz

Channel	Frequency	Test mode	Ch Space(KHz)	Average Power(dBm)	Tune-up
1	462.5625MHz	FM	12.5	30.7	31
14	467.7125MHz	FM	12.5	26.1	27
22	462.7250MHz	FM	12.5	30.3	31

Conducted Power Of PTT450MHz Table 5:

Note:

Per KDB447498 D01 Section 4.1.g, When the frequency channels required for SAR testing are not specified in the published RF exposure KDB procedures, the following should be applied to determine the number of required test channels. The test channels should be evenly spread across the transmission frequency band of each wireless mode.

$$N_{\rm c} = Round \left\{ \left[100 (f_{\rm high} - f_{\rm low}) / f_{\rm c} \right]^{0.5} \times (f_{\rm c} / 100)^{0.2} \right\}$$

where

- N_c is the number of test channels, rounded to the nearest integer,
- fhigh and flow are the highest and lowest channel frequencies within the transmission band,
- fc is the mid-band channel frequency,
- all frequencies are in MHz.

f High (MHz)	f low (MHz)	f c (MHz)	Nc
467.7125	462.5625	462.6750	1

Table 6: Although the test channel number is 1, but the customer requires testing all channels.



中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300



Report No.: KSEM210600089901 Page: 33 of 41

8.1.2 SAR Result Of PTT450MHz

Test position	Test mode	Test Ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	SAR (W/kg) 10-g	Power drift (dB)	Cond ucted power (dBm)	Tune up Limit (dBm)	Scaled factor	Scaled SAR (W/kg)	Liquid Temp.	SAR limit (W/kg)
Front To Face (Separate 25mm)													
Front side	FM	1/462.5625	100.00%	1	0.322	0.157	0.04	30.7	31	1.072	0.345	22.0	1.6
Front side	FM	14/467.7125	100.00%	1	0.289	0.136	0.02	26.1	27	1.230	0.356	22.0	1.6
Front side	FM	22/462.725	100.00%	1	0.311	0.150	-0.16	30.3	31	1.175	0.365	22.0	1.6
Body Touch with Back Splint (Separate 0mm)													
Back side	FM	1/462.5625	100.00%	1	0.375	0.184	0.07	30.7	31	1.072	0.402	22.0	1.6
Back side	FM	14/467.7125	100.00%	1	0.307	0.153	-0.15	26.1	27	1.230	0.378	22.0	1.6
Back side	FM	22/462.725	100.00%	1	0.353	0.172	0.05	30.3	31	1.175	0.415	22.0	1.6

 Table 7:
 SAR Result of PTT450MHz

 Note:

1) The maximum Scaled SAR value is marked in bold. Graph Results refer to Appendix B

2) If the reported (scaled) SAR measured at the middle channel or highest output power channel for each test configuration is \leq 0.8 W/kg then testing at the other channels is not required for such test configuration(s).



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, results at us at telephone: (86-755) 8307 1443, or email: CN_Doccheck@sgs.com

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)

t(86-512)57355888

f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 34 of 41

8.2 Equipment list

Test Platform		SPEAG DASY5 Professional								
	Location	Compliance Certification Services (Kunshan) Inc.								
So	ftware Reference	DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)								
	Hardware Reference									
	Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration				
\square	PC	HP	Core(rm)3.16G	CZCO48171H	N/A	N/A				
\square	Signal Generator	Agilent	E8257C	MY43321570	2020/10/18	2021/10/18				
\boxtimes	S-Parameter Network Analyzer	Agilent	E5071B	MY42301382	2021/02/01	2022/01/31				
\square	DAK-3.5 probe	SPEAG	DAK-3.5	1102	N/A	N/A				
\boxtimes	Power meter	Anritsu	ML2495A	1445010	2021/04/15	2022/04/14				
\square	Power sensor	Anritsu	MA2411B	1339220	2021/04/15	2022/04/14				
\square	DAE	SPEAG	DAE4	913	2021/04/21	2022/04/20				
\square	E-field PROBE	SPEAG	EX3DV4	3798	2021/05/31	2022/05/30				
\square	Dipole	SPEAG	D450V3	1103	2021/04/21	2024/04/20				
\boxtimes	Electro Thermometer	DTM	DTM3000	3030	2020/10/24	2021/10/23				
\square	Amplifier	Mini-circuits	ZVE-8G	110405	N/A	N/A				
\square	Amplifier	Mini-circuits	ZHL-42	QA1331003	N/A	N/A				
\square	3db ATTENUATO	R MINI	MCL BW-S3W5	0533	N/A	N/A				
\square	DUMMY PROBE	SPEAG	DP_2	SPDP2001AA	N/A	N/A				
\boxtimes	Dual Directional Coupler	Woken	20W couple	DOM2BHW1A1	N/A	N/A				
	SAM PHANTOM (ELI4 v4.0)	SPEAG	QDOVA001BB	1102	N/A	N/A				
\boxtimes	Twin SAM Phanton	n SPEAG	QD000P40CD	1609	N/A	N/A				
\boxtimes	ROBOT	SPEAG	TX60	F10/5E6AA1/A101	N/A	N/A				
\square	ROBOT KRC	SPEAG	CS8C	F10/5E6AA1/C101	N/A	N/A				
	LIQUID CALIBRATION KI	ANTENNESSA	41/05 OCP9	00425167	N/A	N/A				

Note: All the equipments are within the valid period when the tests are performed.

All measurement facilities used to collect the measurement data are located at

No.10, Weiye Rd., Innovation Park, Eco & Tec. Development Part, Kunshan City, Jiangsu Province, China.



Unless otherwise agreed in writing, this document is is overleaf, available on request or accessible at http://www. subject to Terms and Conditions for Electronic Documer Attention is drawn to the limitation of liability, indemnific advised that information contained hereon reflects the C Client's instructions, if any. The Company's sole respon- transaction from exercising all their rights and obligatio except in full, without prior written approval of the Com appearance of this document is unlawful and offenders m results shown in this test report refer only to the sample(s) Attention: To check the authenticity of testing /inspect or email: CN_Doccheck@sas.com	sgs.com/en/Terms-and- tis at http://www.sgs.com ation and jurisdiction iss ompany's findings at the nsibility is to its Client a ns under the transaction pany. Any unauthorized ay be prosecuted to the tested and such sample(ion report & certificate,	Conditions.aspx i n/en/Terms-and-o sues defined the a time of its inter and this docume n documents. The alteration, forge fullest extent of s) are retained for please contact	and, for electronic Conditions/Terms rein. Any holder vention only and int does not exc is document car ery or falsification the law. Unless cor 30 days only. us at telephone	c format documents, s-e-Document.aspx. of this document is d within the limits of onerate parties to a not be reproduced on of the content or otherwise stated the : (86-755) 8307 1443,
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China	215300	t(86-512)57355888	f(86-512)57370818	www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编	215300	t(86-512)57355888	f(86-512)57370818	sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 35 of 41

9 Calibration certificate

Please see the Appendix C

10 Photographs

Please see the Appendix D



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing inspection report & certificate, jinspection report & certinated for 30 days only. No.10, Weiye Road, Innovatio

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 36 of 41

Appendix A: Detailed System Check Results

The plots are showing as followings.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of festing linspection report & certificate, please contact us at telephone: (66-755) 8307 1443, or email: Ch.Doccheck@sgs.com

<u>Service3222</u> 中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 37 of 41

Date: 2021/07/13

Test Laboratory: Compliance Certification Services Inc.

System Performance Check-Head 450MHz

DUT: Dipole 450 MHz ; Type: D450V3; Serial: 1103

Communication System: UID 0, CW (0); Frequency: 450 MHz;Duty Cycle: 1:1 Medium parameters used: f = 450 MHz; σ = 0.874 S/m; ϵ_r = 43.757; ρ = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 SN3798; ConvF(10.18, 10.18, 10.18); Calibrated: 2021/05/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2021/04/21
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

System Performance Check at Frequencies Low 1 GHz/Pin=250 mW, dist=15 mm (EX-Probe)/Area Scan (7x23x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 1.32 W/kg

System Performance Check at Frequencies Low 1 GHz/Pin=250 mW, dist=15 mm (EX-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.48 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 1.57 W/kg SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.729 W/kg

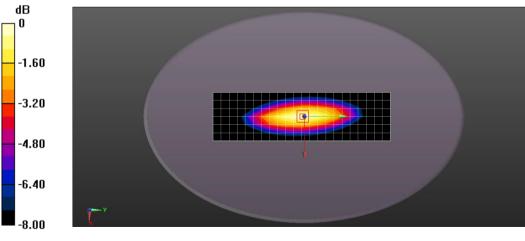

0 dB = 1.32 W/kg = 1.21 dBW/kg



Unless otherwise agreed in writing, this document is is overleaf, available on request or accessible at <u>http://www</u> subject to Terms and Conditions for Electronic Document Attention is drawn to the limitation of liability, indemnific advised that information contained hereon reflects the C Client's instructions, if any. The Company's sole respoi transaction from exercising all their rights and obligatio except in full, without prior written approval of the Com appearance of this document is unlawful and offenders m results shown in this test report refer only to the sample(s) Attention: To check the authenticity of testing /inspect	sgs.com/en/Terms-and- ts at http://www.sgs.com ation and jurisdiction iss ompany's findings at the nsibility is to its Client i ns under the transaction pany. Any unauthorized ay be prosecuted to the tested and such sample/	<u>Conditions.aspx</u> n/en/Terms-and- sues defined the e time of its inter and this docume n documents. Th alteration, forg fullest extent of (s) are retained fo	and, for electronic Conditions/Terms rein. Any holder vention only and nt does not exo is document car ery or falsificatio the law. Unless o r 30 days only.	c format documents, <u>s-e-Document aspx</u> . of this document is I within the limits of nerate parties to a not be reproduced n of the content or therwise stated the
or email: <u>CN.Doccheck@sgs.com</u> No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China	215300	t(86-512)57355888	f(86-512)57370818	www.sgsgroup.com.cn
中国・江苏・昆山市留学生创业园伟业路10号 邮编	215300	t(86-512)57355888	f(86-512)57370818	sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 38 of 41

Appendix B: Detailed Test Results

The plots of worse case are showing as followings.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/en/Terms-and-Conditions.aspx and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of festing / inspection report & certificate, presecuted to the fullest cut us at telephone: (86-755) 8307 1443, or email: Ch.Doccheck@sas.com

中国・江苏・昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com



Report No.: KSEM210600089901 Page: 39 of 41

Date: 2021/07/13

Test Laboratory: Compliance Certification Services Inc.

PTT450MHz FM Front side 25mm Ch22

DUT: Onn. 23 miles Walkie talkie; Type: 100068732

Communication System: UID 0, PTT450MHz (0); Frequency: 462.725 MHz;Duty Cycle: 1:1 Medium parameters used: f = 463 MHz; σ = 0.883 S/m; ϵ_r = 43.557; ρ = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 SN3798; ConvF(10.18, 10.18, 10.18); Calibrated: 2021/05/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2021/04/21
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.461 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm,

dy=8mm, dz=5mm Reference Value = 20.86 V/m; Power Drift = -0.16 dB Peak SAR (extrapolated) = 0.534 W/kg SAR(1 g) = 0.311 W/kg; SAR(10 g) = 0.150 W/kg Maximum value of SAR (measured) = 0.471 W/kg

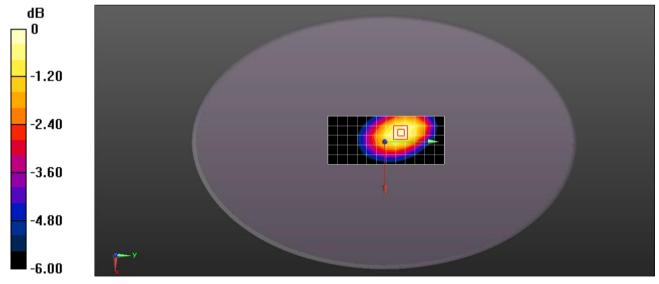

0 dB = 0.471 W/kg = -3.27 dBW/kg



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing linspection report & certificate, please contact us at telephone: (86-512)5730818 www.sgsgroup.com.cn to writewasting linspection report & certificate, please contact us at telephone: 68-512)5730818 www.sgsgroup.com.cn to writewasting linspection report & certificate, please contact us at telephone: 68-512)5730818 www.sgsgroup.com.cn to writewasting linspection report & certificate, please contact us at telephone: 68-512)5730818 www.sgsgroup.com.cn to writewasting linspection report & certificate, please contact us at telephone: 68-512)5730818 www.sgsgroup.com.cn to writewasting linspection report & certificate, please contact us at telephone: 68-512)5730818 www.sgsgroup.c



Report No.: KSEM210600089901 Page: 40 of 41

Date: 2021/07/13

Test Laboratory: Compliance Certification Services Inc.

PTT450MHz FM Back side 0mm Ch22

DUT: Onn. 23 miles Walkie talkie; Type: 100068732

Communication System: UID 0, PTT450MHz (0); Frequency: 462.725 MHz;Duty Cycle: 1:1 Medium parameters used: f = 463 MHz; σ = 0.883 S/m; ϵ_r = 43.557; ρ = 1000 kg/m³ Phantom section: Flat Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)


DASY5 Configuration:

- Probe: EX3DV4 SN3798; ConvF(10.18, 10.18, 10.18); Calibrated: 2021/05/31;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn913; Calibrated: 2021/04/21
- Phantom: ELI v4.0; Type: QDOVA001BB; Serial: TP:1102
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Configuration/Body/Area Scan (6x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.521 W/kg

Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

dy=8mm, dz=5mm Reference Value = 22.15 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.517 W/kg SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.172 W/kg Maximum value of SAR (measured) = 0.593 W/kg

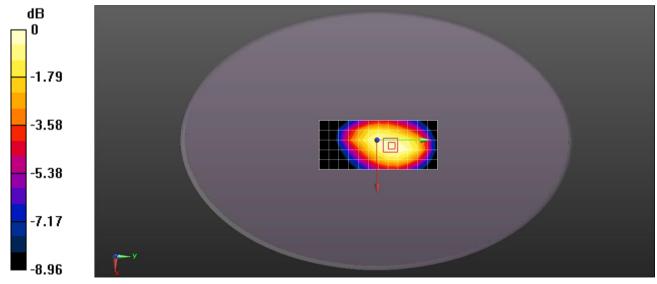

0 dB = 0.593 W/kg = -2.27 dBW/kg



Unless otherwise agreed in writing, this document is is	sued by the Company s	subject to its Ge	neral Conditions	s of Service printed
overleaf, available on request or accessible at http://www	sas com/en/Terms-and-	Conditions asny	and for electronic	c format documents
subject to Terms and Conditions for Electronic Documer				
Attention is drawn to the limitation of liability, indemnific	ation and jurisdiction is	defined the	soin Any holdor	of this document is
advised that information contained hereon reflects the C				
Client's instructions, if any. The Company's sole respon				
transaction from exercising all their rights and obligatio	ns under the transaction	n documents. Th	is document car	nnot be reproduced
except in full, without prior written approval of the Com	pany. Any unauthorized	alteration, forge	erv or falsificatio	on of the content or
appearance of this document is unlawful and offenders m				
results shown in this test report refer only to the sample(s)	tosted and such sample	(c) are retained for	r 30 days only	stated and
Attention: To check the authenticity of testing /inspect	ion report & cortificate	(s) are retained to	is at talaphone	(86-755) 8307 1443
	ion report à certificate,	please contact	us at telephone	. (00-100)0001 1440,
or email: CN.Doccheck@sgs.com				
No.10, Weive Road, Innovation Park, Kunshan, Jiangsu, China	215300	t(86-512)57355888	f(86-512)57370818	www.sgsgroup.com.cn
		· · · · ·	1 1	
中国・江苏・昆山市留学生创业园伟业路10号 邮编	215300	t(86-512)57355888	f(86-512)57370818	sgs.china@sgs.com

Member of the SGS Group (SGS SA)



Report No.: KSEM210600089901 Page: 41 of 41

Appendix C: Calibration certificate

Appendix D: Photographs





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>http://www.sgs.com/en/Terms-and-Conditions.aspx</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. Attention: To check the authenticity of testing /inspection report & certificate, pressecuted to the fullest extent of the law. Unless otherwise stated the results shown to this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)57370818 www.sgsgroup.com.cn no.10 refer to the sample(s) are retained for 30 days only. No.10 refer Road and such sample(s) are retained for 30 days only. No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300 (186-512)57370818 sys.china@sgs.com

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)