



FCC PART 15B TEST REPORT

No. I23Z61566-EMC01

for

Wingtech Group (Hong Kong) Limited

4G Mobile Hotspot

Model name: ATTCKTHS02

FCC ID: 2APXW-ATTCKTHS02

with

Hardware Version: 80177_1_11

Software Version: ATTCKTHS02_0.00.010

Issued Date: 2023-09-14

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL-Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I23Z61566-EMC01	Rev.0	1 st edition	2023-09-14

Note: the latest revision of the test report supersedes all previous version.



CONTENTS

1. TEST LABORATORY	4
1.1. TESTING LOCATION	4
1.2. TESTING ENVIRONMENT	4
1.3. PROJECT DATA	4
1.4. SIGNATURE.....	4
2. CLIENT INFORMATION	5
2.1. APPLICANT INFORMATION.....	5
2.2. MANUFACTURER INFORMATION.....	5
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	6
3.1. ABOUT EUT.....	6
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST	6
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	6
3.4. EUT SET-UPS	6
4. REFERENCE DOCUMENTS.....	7
4.1. REFERENCE DOCUMENTS FOR TESTING.....	7
5. SUMMARY OF TEST RESULTS.....	8
6. TEST EQUIPMENTS UTILIZED.....	9
7. MEASUREMENT UNCERTAINTY	10
ANNEX A: MEASUREMENT RESULTS	11

1. Test Laboratory

1.1. Testing Location

CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

1.2. Testing Environment

Normal Temperature: 15-35°C

Relative Humidity: 20-75%

1.3. Project data

Testing Start Date: 2023-08-30

Testing End Date: 2023-08-27


1.4. Signature



Wang Xue
(Prepared this test report)



Zhang Ying
(Reviewed this test report)



Zhang Xia
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Wingtech Group (Hong Kong) Limited
Address: Flat/RM 1903, 19/F, Podium Plaza 5 Hanoi Road, Tsim Sha Tsui
Kowloon, Hong Kong
Contact sharui
Email sharui@wingtech.com
Tel. +86-21-53529900
Fax: /

2.2. Manufacturer Information

Company Name: Wingtech Group (Hong Kong) Limited
Address: Flat/RM 1903, 19/F, Podium Plaza 5 Hanoi Road, Tsim Sha Tsui
Kowloon, Hong Kong
Contact sharui
Email sharui@wingtech.com
Tel. +86-21-53529900
Fax: /

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	4G Mobile Hotspot
Model Name	ATTCKTHS02
FCC ID:	2APXW-ATTCKTHS02

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL, Telecommunication Technology Labs, CAICT.

3.2. Internal Identification of EUT used during the test

EUT ID*	SN or IMEI	HW Version	SW Version
EUT1	864747070000592	80177_1_11	ATTCKTHS02_0.00.010

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description	Model	Manufacture
AE1	Battery	MF02	Jiade Energy Technology (Zhuhai) Co., Ltd.
AE2	Charger	PA-US5V2A-036	HUIZHOU PUAN ELECTRONICS Co., Ltd.
AE3	USB Cable	HX-WT-54	HEXIN

*AE ID: is used to identify the test sample in the lab internally.

3.4. EUT set-ups

EUT set-up No.	Combination of EUT and AE	Remarks
Set.1	EUT1 + AE1 + AE2 + AE3	Charger1+ WCDMA 850 idle
Set.1	EUT1 + AE1 + AE3	USB +LTE B5 idle

Note:

Equipment Under Test (EUT) is a model of 4G Mobile Hotspot.

It supports

UMTS Band FDD Band II(W1900) /FDD Band IV(W1700) /FDD Band V(W850)

LTE Band FDD Bands 2/4/5/12/14/29/30/66

It has Wi-Fi (802.11a/b/g/n/ac, 802.11n supports 20MHz and 40MHz bandwidth, 802.11ac supports 20MHz, 40MHz and 80MHz bandwidth) function.

Only the worst-case emissions are reported.

4. Reference Documents

4.1. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 15, Subpart B	Radio frequency devices - Unintentional Radiators	2019
ANSI C63.4	American National Standard for Methods of Measurement of Radio- Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2014

Note: The test methods have no deviation with standards.

5. SUMMARY OF TEST RESULTS

Abbreviations used in this clause:		
Verdict Column	P	Pass
	NA	Not applicable
	F	Fail

Items	Test Name	Clause in FCC rules	Section in this report	Verdict	Test Location
1	Radiated Emission	15.109(a)	B.1	P	CTTL(huayuan North Road)
2	Conducted Emission	15.107(a)	B.2	P	CTTL(huayuan North Road)

6. Test Equipments Utilized

NO.	Description	TYPE	SERIES NUMBER	MANUFACTURE	CAL DUE DATE	CALIBRATION INTERVAL
1	Test Receiver	ESW44	103144	R&S	2023-10-25	1 Year
2	LISN	ENV216	101200	R&S	2023-06-29	1 year
3	Test Receiver	ESCI 7	100344	R&S	2024-02-28	1 Year
4	EMI Antenna	VULB 9163	01222	SCHWARZBECK	2023-07-25	1 year
5	EMI Antenna	3115	6914	ETS-Lindgren	2024-04-25	1 year
6	Universal Communication Tester	CMW500	150344	R&S	2024-01-03	1 year

Test software information		
Test Item	Software	Version
Radiated Emission	EMC32	V8.53.0
Conducted Emission	EMC32	V11.50.00

Semi-anechoic chamber utilized did not exceed following limits along the testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω
Normalised site attenuation (NSA)	< ±4 dB, 10 m distance
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 6GHz

Shielded room utilized did not exceed following limits along the testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	0.014MHz-1MHz, >60dB; 1MHz—1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4 Ω

7. Measurement Uncertainty

Where relevant, the following measurement uncertainty(worse case) levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Location 1: CTTL(huayuan North Road)

Test item	Frequency ranges	Measurement uncertainty
Radiated Emission	30MHz-1GHz	4.72dB($k=2$)
	1GHz-18GHz	4.84dB($k=2$)
Conducted Emission	150kHz-30MHz	AC Power Line: 3.08dB($k=2$)

ANNEX A: MEASUREMENT RESULTS

A.1 Radiated Emission

Reference

FCC: CFR Part 15.109(a).

A.1.1 Method of measurement

The field strength of radiated emissions from the unintentional radiator (USB mode of MS and charging mode of MS) at distances of 3 meters is tested. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 8.3.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3/10 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

A.1.2 EUT Operating Mode

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

The EUT was tested while operating in licensed band Rx mode. All licensed band receivers that tune in the range of 30MHz-960MHz, as listed in section 3.4, are investigated. Only the worst case emissions are reported.

All equipment is placed on the test table top and arranged in a typical configuration in accordance with ANSI C63.4-2014 and manipulated to obtain worst case emissions.

A.1.3 Measurement Limit

Frequency range (MHz)	Field strength limit ($\mu\text{V}/\text{m}$)		
	Quasi-peak	Average	Peak
30-88	100		
88-216	150		
216-960	200		
960-1000	500		
>1000		500	5000

Note: the above limit is for 3 meters test distance. 10 meters' limit is got by converting.

A.1.4 Test Condition

Frequency range (MHz)	RBW/VBW	Sweep Time (s)	Detector
30-1000	120kHz (IF Bandwidth)	5	Peak/Quasi-peak
Above 1000	1MHz/3MHz	15	Peak, Average

A.1.5 Measurement Results

A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss". It includes the antenna factor of receive antenna and the path loss.

The measurement results are obtained as described below:

$$\text{Result} = P_{\text{Mea}} + A_{Rpl} = P_{\text{Mea}} + G_A + G_{PL}$$

Where

G_A : Antenna factor of receive antenna

G_{PL} : Path Loss

P_{Mea} : Measurement result on receiver.

Measurement uncertainty (worst case): $U = 4.84 \text{ dB}$, $k=2$.

Measurement results for Set.1:

Charing Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17993.200	46.30	-29.06	46.66	28.70	54.00	7.70	V
17994.900	46.20	-29.06	46.66	28.60	54.00	7.80	V
17994.220	46.20	-29.06	46.66	28.60	54.00	7.80	H
17986.740	46.20	-29.06	46.66	28.60	54.00	7.80	H
17958.180	46.20	-28.94	46.66	28.48	54.00	7.80	H
17999.660	46.10	-29.06	46.66	28.50	54.00	7.90	V

Charging Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17979.260	57.20	-29.06	46.66	39.60	74.00	16.80	H
17951.380	57.10	-28.94	46.66	39.38	74.00	16.90	H
17891.540	57.10	-29.53	45.95	40.68	74.00	16.90	V
17973.140	56.70	-29.06	46.66	39.10	74.00	17.30	H
17957.840	56.70	-28.94	46.66	38.98	74.00	17.30	V
17996.940	56.40	-29.06	46.66	38.80	74.00	17.60	V

Measurement results for Set.2:
USB Mode/Average detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17995.240	46.50	-29.06	46.66	28.90	54.00	7.50	H
17963.620	46.50	-29.06	46.66	28.90	54.00	7.50	H
17995.580	46.30	-29.06	46.66	28.70	54.00	7.70	V
17968.720	46.30	-29.06	46.66	28.70	54.00	7.70	H
17978.580	45.90	-29.06	46.66	28.30	54.00	8.10	V
17962.260	45.80	-29.06	46.66	28.20	54.00	8.20	H

USB Mode/Peak detector

Frequency (MHz)	Measurement Result (dB μ V/m)	Cable loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dB μ V)	Limit (dB μ V/m)	Margin (dB)	Antenna Pol. (H/V)
17891.880	56.80	-29.53	45.95	40.38	74.00	17.20	H
17988.780	56.50	-29.06	46.66	38.90	74.00	17.50	H
17989.120	56.50	-29.06	46.66	38.90	74.00	17.50	V
17974.500	56.40	-29.06	46.66	38.80	74.00	17.60	V
17997.280	56.30	-29.06	46.66	38.70	74.00	17.70	V
17977.560	56.30	-29.06	46.66	38.70	74.00	17.70	H

Measurement results for Set.1:

Full Spectrum

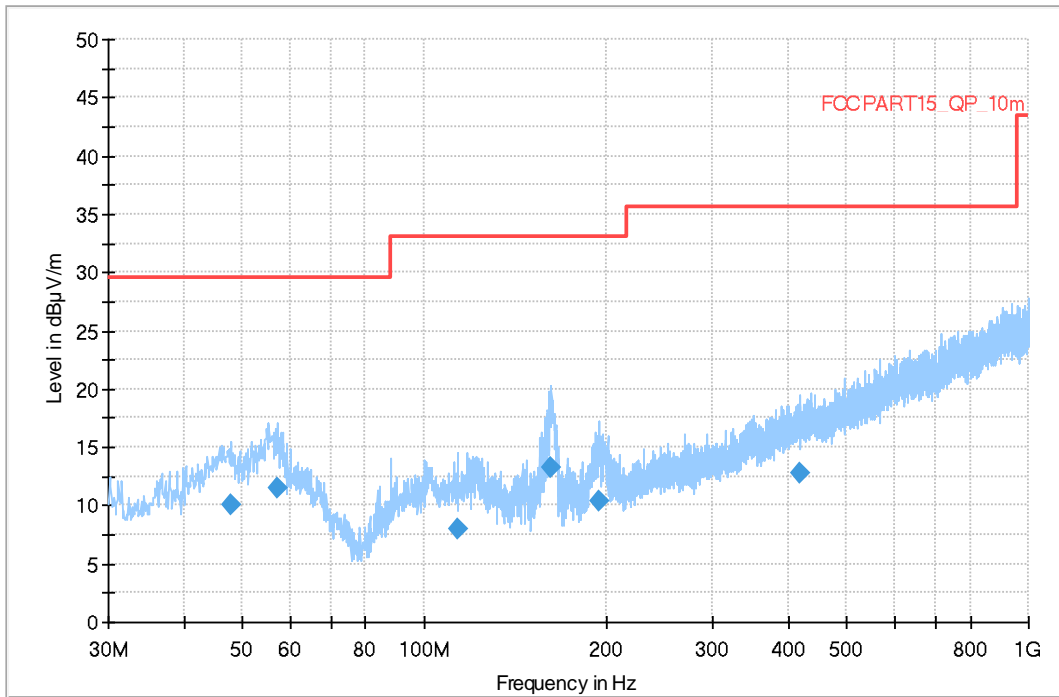


Fig A.1 Radiated Emission from 30MHz to 1GHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
47.848000	10.14	29.54	19.40	120.000	202.0	V	135.0
57.257000	11.50	29.54	18.04	120.000	175.0	V	315.0
113.420000	8.00	33.06	25.06	120.000	125.0	V	-45.0
162.405000	13.26	33.06	19.80	120.000	100.0	V	-18.0
194.706000	10.31	33.06	22.75	120.000	125.0	V	47.0
417.709000	12.74	35.56	22.82	120.000	175.0	H	278.0

Full Spectrum

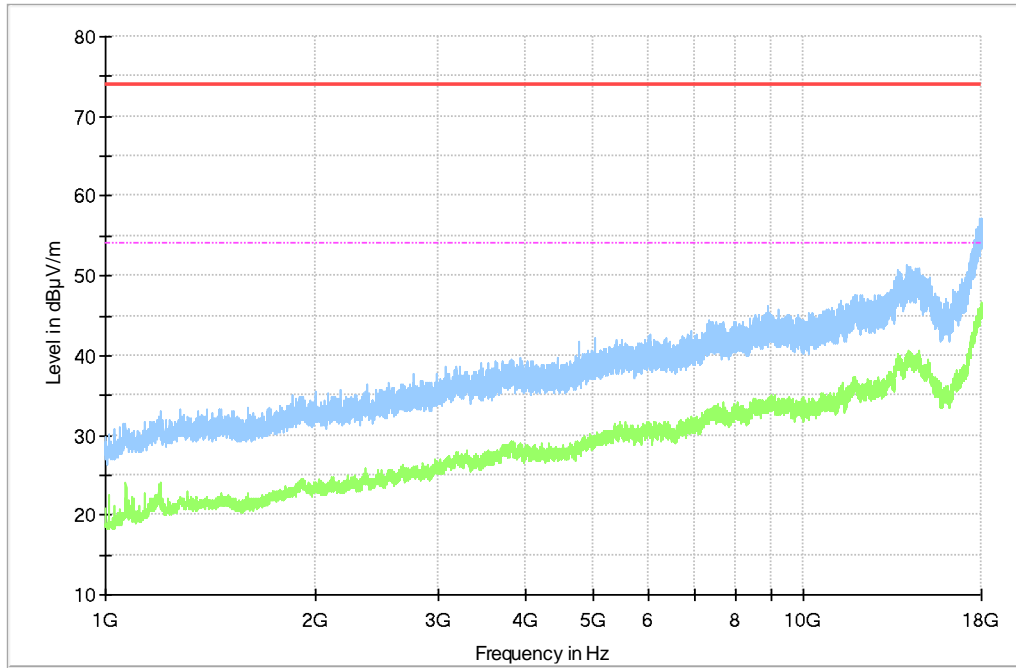
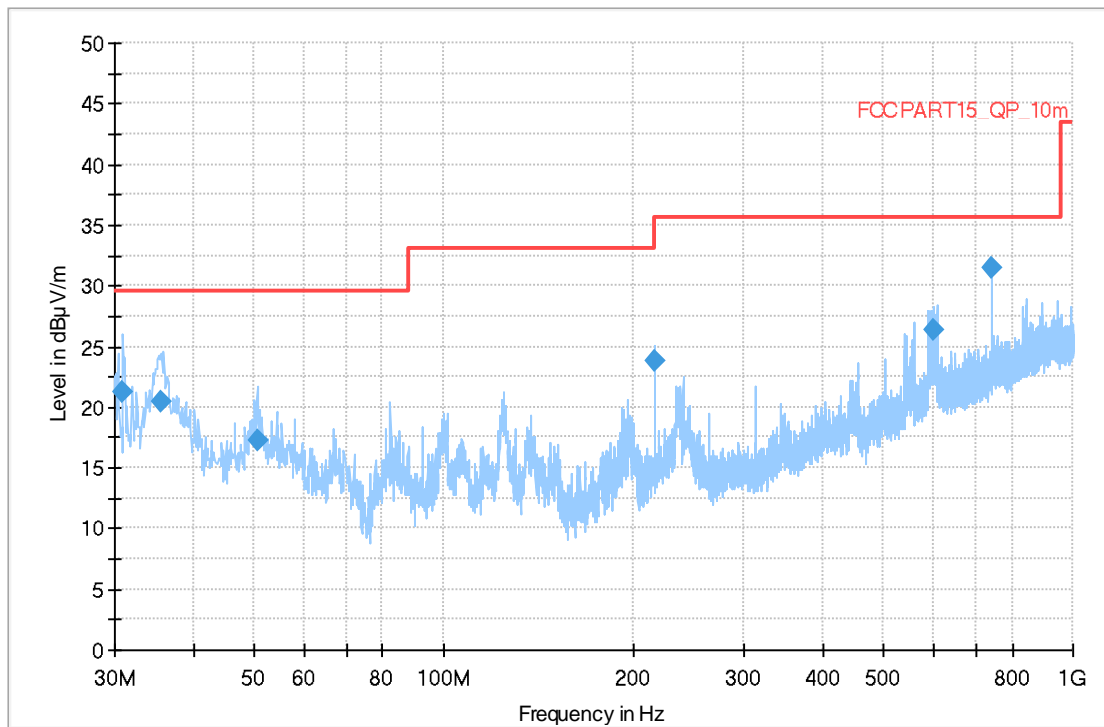


Fig A.2 Radiated Emission from 1GHz to 18GHz

Measurement results for Set.2:

Full Spectrum


Fig A.3 Radiated Emission from 30MHz to 1GHz
Final Result 1

Frequency (MHz)	QuasiPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)
30.970000	21.23	29.54	8.31	120.000	100.0	V	190.0
35.626000	20.51	29.54	9.03	120.000	100.0	V	149.0
50.564000	17.29	29.54	12.25	120.000	100.0	V	149.0
215.949000	23.73	33.06	9.33	120.000	302.0	H	176.0
598.905000	26.37	35.56	9.19	120.000	202.0	V	315.0
744.017000	31.44	35.56	4.12	120.000	125.0	H	266.0

Full Spectrum

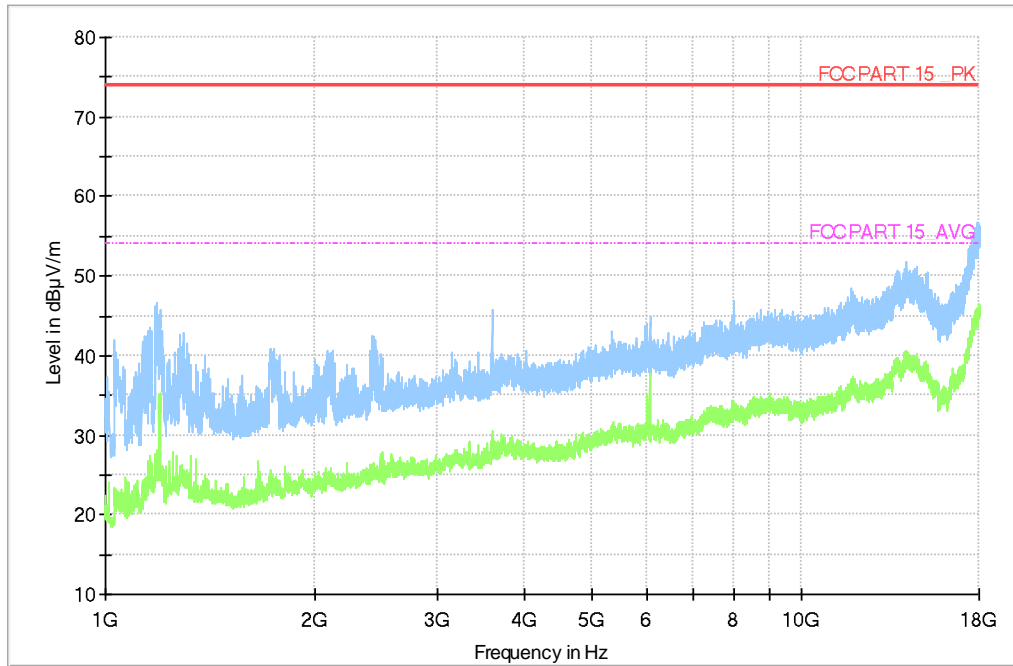


Fig A.4 Radiated Emission from 1GHz to 18GHz

A.2 Conducted Emission

Reference

FCC: CFR Part 15.107(a).

A.2.1 Method of measurement

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits. Tested in accordance with the procedures of ANSI C63.4 – 2014, section 7.3.

A.2.2 EUT Operating Mode

The MS is operating in the charging mode. During the test MS is connected to a charger in the case of charging mode.

A.2.3 Measurement Limit

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency

A.2.4 Test Condition in charging mode

Voltage (V)	Frequency (Hz)
120	60

RBW/IF bandwidth	Sweep Time(s)
9kHz	1

A.2.5 Measurement Results

Measurement uncertainty: $U= 3.08$ dB, $k=2$.

Charging Mode, Set.1:

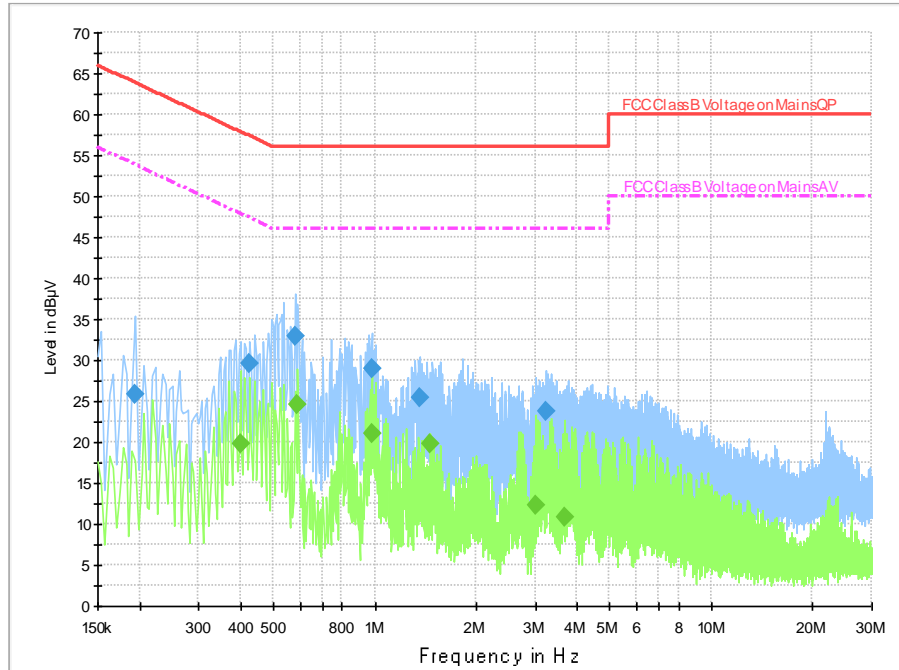


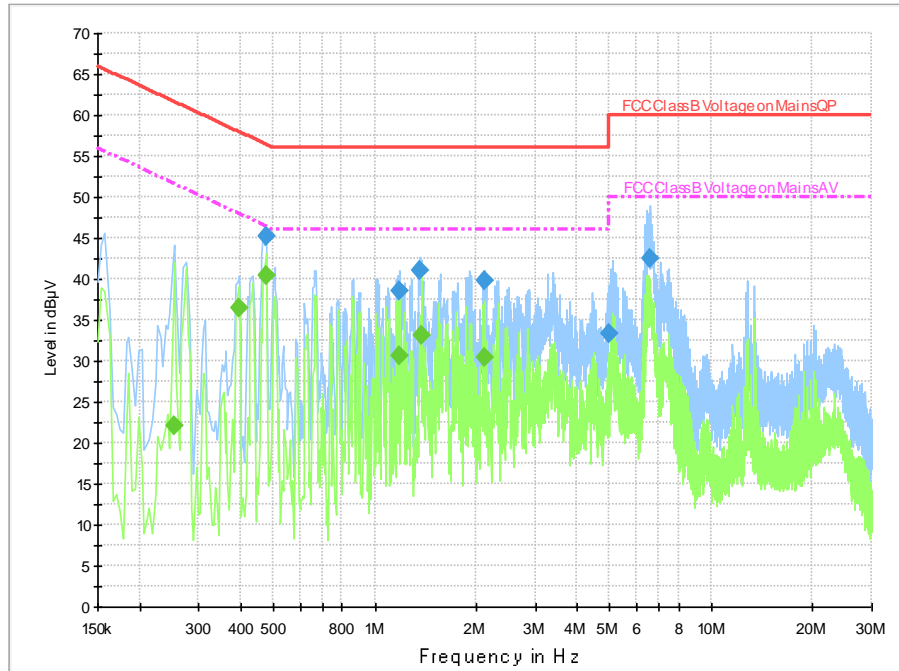
Fig A.5 Conducted Emission from 150kHz to 30MHz

Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.194000	25.8	2000.0	9.000	On	L1	19.7	38.1	63.9
0.426000	29.5	2000.0	9.000	On	L1	19.7	27.8	57.3
0.578000	33.0	2000.0	9.000	On	N	19.7	23.0	56.0
0.978000	28.9	2000.0	9.000	On	L1	19.7	27.1	56.0
1.362000	25.5	2000.0	9.000	On	N	19.6	30.5	56.0
3.218000	23.8	2000.0	9.000	On	L1	19.6	32.2	56.0

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.398000	19.9	2000.0	9.000	On	N	19.6	28.0	47.9
0.590000	24.5	2000.0	9.000	On	N	19.6	21.5	46.0
0.978000	21.1	2000.0	9.000	On	L1	19.7	24.9	46.0
1.462000	19.8	2000.0	9.000	On	L1	19.7	26.2	46.0
3.026000	12.3	2000.0	9.000	On	N	19.6	33.7	46.0
3.650000	10.8	2000.0	9.000	On	N	19.6	35.2	46.0

USB Mode, Set.2:

Fig A.6 Conducted Emission from 150kHz to 30MHz
Final Result 1

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.474000	45.2	2000.0	9.000	On	L1	19.7	11.3	56.4
1.182000	38.5	2000.0	9.000	On	N	19.6	17.5	56.0
1.366000	41.1	2000.0	9.000	On	N	19.6	14.9	56.0
2.126000	39.8	2000.0	9.000	On	L1	19.6	16.2	56.0
4.966000	33.4	2000.0	9.000	On	L1	19.6	22.6	56.0
6.570000	42.5	2000.0	9.000	On	L1	19.6	17.5	60.0

Final Result 2

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.254000	22.2	2000.0	9.000	On	N	19.7	29.4	51.6
0.394000	36.4	2000.0	9.000	On	L1	19.7	11.6	48.0
0.474000	40.5	2000.0	9.000	On	L1	19.7	6.0	46.4
1.182000	30.6	2000.0	9.000	On	N	19.6	15.4	46.0
1.374000	33.1	2000.0	9.000	On	N	19.6	12.9	46.0
2.122000	30.5	2000.0	9.000	On	N	19.6	15.5	46.0

END OF REPORT