



# FCC PART 15C TEST REPORT No.I23Z61566-IOT01

for

**Wingtech Group (Hong Kong) Limited**

**4G Mobile Hotspot**

**ATTCKTHS02**

**FCC ID: 2APXW-ATTCKTHS02**

with

**Hardware Version: 80177\_1\_11**

**Software Version: ATTCKTHS02\_0.00.010**

**Issued Date: 2023-10-15**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

**Test Laboratory:**

**CTTL-Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512, Fax:+86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I23Z61566-IOT01	Rev.0	1st edition	2023-10-15

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>5</b>
1.1. INTRODUCTION & ACCREDITATION .....	5
1.2. TESTING LOCATION .....	5
1.3. TESTING ENVIRONMENT.....	6
1.4. PROJECT DATE .....	6
1.5. SIGNATURE .....	6
<b>2. CLIENT INFORMATION.....</b>	<b>7</b>
2.1. APPLICANT INFORMATION .....	7
2.2. MANUFACTURER INFORMATION .....	7
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>8</b>
3.1. ABOUT EUT .....	8
3.2. INTERNAL IDENTIFICATION OF EUT .....	8
3.3. INTERNAL IDENTIFICATION OF AE.....	8
3.4. GENERAL DESCRIPTION.....	9
3.5. INTERPRETATION OF THE TEST ENVIRONMENT.....	9
<b>4. REFERENCE DOCUMENTS.....</b>	<b>9</b>
4.1. DOCUMENTS SUPPLIED BY APPLICANT .....	9
4.2. REFERENCE DOCUMENTS FOR TESTING.....	9
<b>5. LABORATORY ENVIRONMENT.....</b>	<b>10</b>
<b>6. TEST RESULTS .....</b>	<b>10</b>
6.1. SUMMARY OF TEST RESULTS .....	10
6.2. STATEMENTS.....	10
6.3. TEST CONDITIONS .....	10
<b>7. TEST FACILITIES UTILIZED .....</b>	<b>11</b>
<b>8. MEASUREMENT UNCERTAINTY .....</b>	<b>12</b>
8.1. MAXIMUM OUTPUT POWER.....	12
8.2. PEAK POWER SPECTRAL DENSITY.....	12
8.3. DTS 6-DB SIGNAL BANDWIDTH.....	12
8.4. BAND EDGES COMPLIANCE.....	12
8.5. TRANSMITTER SPURIOUS EMISSION .....	12
8.6. AC POWER-LINE CONDUCTED EMISSION .....	12
<b>ANNEX A: DETAILED TEST RESULTS.....</b>	<b>13</b>
<b>A.1. MEASUREMENT METHOD.....</b>	<b>13</b>
<b>A.2. MAXIMUM OUTPUT POWER.....</b>	<b>14</b>
A.2.1 ANTENNA GAIN.....	14



A.2.2. PEAK OUTPUT POWER-CONDUCTED ..... 14

**A.3. PEAK POWER SPECTRAL DENSITY ..... 16**

**A.4. DTS 6-DB SIGNAL BANDWIDTH ..... 23**

**A.5. BAND EDGES COMPLIANCE ..... 30**

**A.6. TRANSMITTER SPURIOUS EMISSION ..... 35**

    A.6.1 TRANSMITTER SPURIOUS EMISSION – CONDUCTED..... 35

    A.6.2 TRANSMITTER SPURIOUS EMISSION - RADIATED ..... 56

**A.7. AC POWER-LINE CONDUCTED EMISSION ..... 70**

**ANNEX B: EUT PARAMETERS..... 74**

**ANNEX C: ACCREDITATION CERTIFICATE ..... 74**



## **1. Test Laboratory**

### **1.1.Introduction & Accreditation**

**Telecommunication Technology Labs, CAICT** is an ISO/IEC 17025:2017 accredited test laboratory under American Association for Laboratory Accreditation (A2LA) with lab code 7049.01, and is also an FCC accredited test laboratory (CN1349), and ISED accredited test laboratory (CAB identifier:CN0066). The detail accreditation scope can be found on A2LA website.

### **1.2. Testing Location**

Conducted testing Location: CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

Radiated testing Location: CTTL(Huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China100191

### **1.3. Testing Environment**

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### **1.4. Project date**


Testing Start Date: 2023-08-30  
Testing End Date: 2023-10-15

### **1.5. Signature**



---

Yao Xingyu  
(Prepared this test report)



---

Zheng Wei  
(Reviewed this test report)



---

Pang Shuai  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Wingtech Group (Hong Kong) Limited  
Address: Flat/RM 1903 19/F, Podium Plaza, 5 Hanoi Road, Tsim Sha Tsui, KL,  
HK  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: +86-21-53529900  
Fax: /

### **2.2. Manufacturer Information**

Company Name: Wingtech Group (Hong Kong) Limited  
Address: Flat/RM 1903 19/F, Podium Plaza, 5 Hanoi Road, Tsim Sha Tsui, KL,  
HK  
City: Hong Kong  
Postal Code: /  
Country: China  
Telephone: +86-21-53529900  
Fax: /

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	4G Mobile Hotspot
Model name	ATTCKTHS02
FCC ID	2APXW-ATTCKTHS02
With WLAN Function	Yes
Frequency Band	ISM 2400MHz~2483.5MHz
Type of Modulation	DSSS/CCK/OFDM
Number of Channels	11
Antenna	Integral Antenna
MAX Conducted Power	27.73dBm
Nominal Voltage	3.8V
Extreme High Voltage	4.4V
Extreme Low Voltage	3.6V

#### **3.2. Internal Identification of EUT**

<b>EUT ID*</b>	<b>SN or IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Date of receipt</b>
EUT1	864747070000238	80177_1_11	ATTCKTHS02_0.00.010	2023-08-24
EUT2	864747070000451	80177_1_11	ATTCKTHS02_0.00.010	2023-08-24

\*EUT ID: is used to identify the test sample in the lab internally.

EUT2 is used for Conduction test, EUT1 is used for Radiation test.

#### **3.3. Internal Identification of AE**

<b>AE ID*</b>	<b>Description</b>	<b>SN</b>
AE1	Battery	---
AE2	Charger	---
AE3	USB Cable	---

##### **AE1**

Model	MF02
Manufacturer	Jiade Energy Technology (Zhuhai) Co., Ltd.
Capacity	3000mAh
Nominal Voltage	3.85V

##### **AE2**

Model	PA-US5V2A-036
Manufacturer	HUIZHOU PUAN ELECTRONICS Co., Ltd.
Length of cable	/

##### **AE3**

Model	HX-WT-54
Manufacturer	HEXIN
Length of cable	/

\*AE ID: is used to identify the test sample in the lab internally.



### **3.4. General Description**

The Equipment under Test (EUT) is a model of 4G Mobile Hotspot with integrated antenna and inbuilt battery.

It consists of normal options: travel charger, USB cable.

Manual and specifications of the EUT were provided to fulfil the test.

Samples undergoing test were selected by the client.

### **3.5. Interpretation of the Test Environment**

For the test methods, the test environment uncertainty figures correspond to an expansion factor  $k=2$ .

Measurement Uncertainty

Parameter	Uncertainty
temperature	0.48°C
humidity	2 %
DC voltages	0.003V

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT feature information is supplied by the applicant or manufacturer, which is the basis of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	2021
ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices Federal Communications Commission Office of Engineering and Technology Laboratory Division	2013
KDB 558074 D01	GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES	2019

## 5. LABORATORY ENVIRONMENT

Conducted RF performance testing is performed in shielding room.

EMC performance testing is performed in Semi-anechoic chamber.

## 6. Test Results

### 6.1. Summary of Test Results

SUMMARY OF MEASUREMENT RESULTS	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Peak Output Power	15.247 (b)	/	P
Peak Power Spectral Density	15.247 (e)	/	P
Occupied 6dB Bandwidth	15.247 (a)	/	P
Band Edges Compliance	15.247 (d)	/	P
Transmitter Spurious Emission - Conducted	15.247 (d)	/	P
Transmitter Spurious Emission - Radiated	15.247, 15.205, 15.209	/	P
AC Powerline Conducted Emission	15.107, 15.207	/	P

Please refer to **ANNEX A** for detail.

Terms used in Verdict column

P	Pass, The EUT complies with the essential requirements in the standard.
NP	Not Perform, The test was not performed by CTTL
NA	Not Applicable, The test was not applicable
F	Fail, The EUT does not comply with the essential requirements in the standard

### 6.2. Statements

CTTL has evaluated the test cases as listed in section 6.1 of this report for the EUT specified in section 3 according to the standards or reference documents listed in section 4.

This report only deals with the WLAN function among the features described in section 3.

### 6.3. Test Conditions

For this report, all the test cases are tested under normal temperature and normal voltage, and also under norm humidity, the specific condition is shown as follows:

Temperature	26°C
Voltage	3.8V
Humidity	44%

## 7. Test Facilities Utilized

### Conducted test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Vector Signal Analyzer	FSQ40	200089	Rohde & Schwarz	1 year	2024-07-04
2	LISN	ENV216	101200	R&S	1 year	2024-06-05
3	Test Receiver	ESCI	100344	R&S	1 year	2024-02-21
4	Attenuator	10dB/2W	/	Rosenberger	/	/
5	Shielding Room	S81	/	ETS-Lindgren	/	/

### Radiated emission test system

No.	Equipment	Model	Serial Number	Manufacturer	Calibration Period	Calibration Due date
1	Test Receiver	ESW44	103144	R&S	1 year	2023-10-25
2	EMI Antenna	VULB 9163	01222	SCHWARZBECK	1 year	2024-02-28
3	EMI Antenna	3115	6914	ETS-Lindgren	1 year	2024-04-25

## 8. Measurement Uncertainty

### 8.1. Maximum Output Power

Measurement Uncertainty: 0.387dB,k=1.96

### 8.2. Peak Power Spectral Density

Measurement Uncertainty: 0.705dB,k=1.96

### 8.3. DTS 6-dB Signal Bandwidth

Measurement Uncertainty: 60.80Hz,k=1.96

### 8.4. Band Edges Compliance

Measurement Uncertainty : 0.62dB,k=1.96

### 8.5. Transmitter Spurious Emission

#### Conducted (k=1.96)

Frequency Range	Uncertainty(dB)
$30\text{MHz} \leq f \leq 2\text{GHz}$	1.22
$2\text{GHz} \leq f \leq 3.6\text{GHz}$	1.22
$3.6\text{GHz} \leq f \leq 8\text{GHz}$	1.22
$8\text{GHz} \leq f \leq 12.75\text{GHz}$	1.51
$12.75\text{GHz} \leq f \leq 26\text{GHz}$	1.51
$26\text{GHz} \leq f \leq 40\text{GHz}$	1.59

#### Radiated (k=2)

Frequency Range	Uncertainty(dB)
9kHz-30MHz	/
$30\text{MHz} \leq f \leq 1\text{GHz}$	4.72
$1\text{GHz} \leq f \leq 18\text{GHz}$	4.84
$18\text{GHz} \leq f \leq 40\text{GHz}$	5.12

### 8.6. AC Power-line Conducted Emission

Measurement Uncertainty : 3.08dB,k=2

## **ANNEX A: Detailed Test Results**

### **A.1. Measurement Method**

#### **A.1.1. Conducted Measurements**


Connect the EUT to the test system as Fig.A.1.1.1 shows.

Set the EUT to the required work mode.

Set the EUT to the required channel.

Set the Vector Signal Analyzer and start measurement.

Record the values. Vector Signal Analyzer

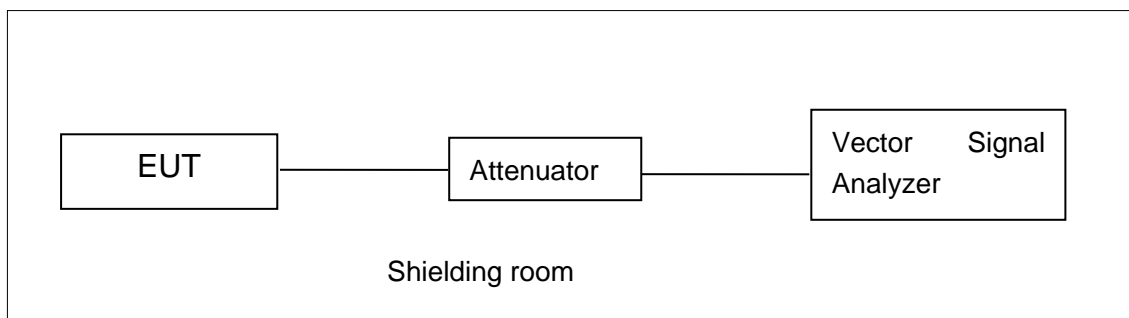


**Fig.A.1.1.1: Test Setup Diagram for Conducted Measurements**

#### **A.1.2. Radiated Emission Measurements**

In the case of radiated emission, the used settings are as follows,

Sweep frequency from 30 MHz to 1GHz, RBW = 100 kHz, VBW = 300 kHz;

Sweep frequency from 1 GHz to 26GHz, RBW = 1MHz, VBW = 3MHz;

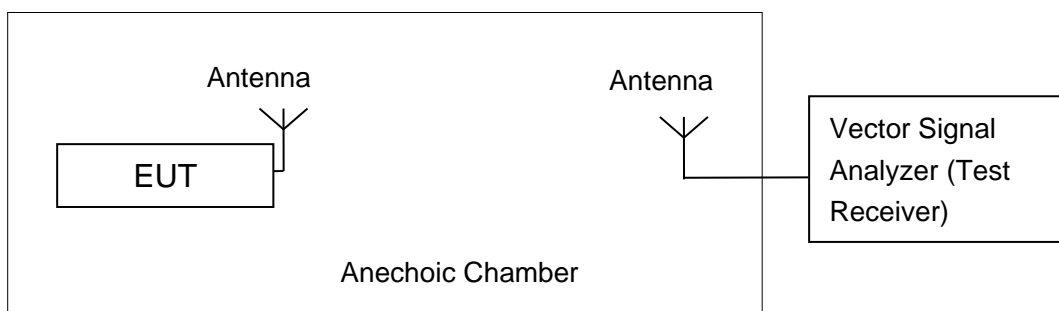

**Fig.A.1.2.1: Test Setup Diagram for Radiated Measurements**

## A.2. Maximum Output Power

**Method of Measurement: See ANSI C63.10-2013-clause 11.9.1.3**

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

**Measurement Limit:**

Standard	Limit (dBm)
FCC CRF Part 15.247(b)	< 30

### A.2.1 Antenna Gain

Antenna gain is 0.2dBi and the value is supplied by the applicant or manufacturer.

### A.2.2. Peak Output Power-conducted

**EUT ID: EUT2**

**Measurement Results:**

**802.11b/g mode**

Mode	Data Rate (Mbps)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11b	1	24.14	24.04	24.08
	2	/	/	/
	5.5	/	/	/
	11	/	/	/
802.11g	6	27.73	27.62	27.55
	9	/	/	/
	12	/	/	/
	18	/	/	/
	24	/	/	/
	36	/	/	/
	48	/	/	/
54	/	/	/	

The data rate 1Mbps and 6Mbps are selected as worst condition, and the following cases are performed with this condition.

**802.11n-HT20 mode**

Mode	Data Rate (Index)	Test Result (dBm)		
		2412MHz (Ch1)	2437MHz (Ch6)	2462 MHz (Ch11)
802.11n (20MHz)	MCS0	27.59	27.43	27.45
	MCS1	/	/	/
	MCS2	/	/	/
	MCS3	/	/	/
	MCS4	/	/	/
	MCS5	/	/	/
	MCS6	/	/	/
	MCS7	/	/	/

The data rate MSC0 is selected as worst condition, and the following cases are performed with this condition.

**802.11n-HT40 mode**

Mode	Data Rate (Index)	Test Result (dBm)		
		2422MHz (Ch3)	2437MHz (Ch6)	2452 MHz (Ch9)
802.11n (40MHz)	MCS0	24.57	24.37	24.50
	MCS1	/	/	/
	MCS2	/	/	/
	MCS3	/	/	/
	MCS4	/	/	/
	MCS5	/	/	/
	MCS6	/	/	/
	MCS7	/	/	/

The data rate MSC0 is selected as worst condition, and the following cases are performed with this condition.

Duty Cycle

Mode	802.11b	802.11g	802.11n20	802.11n40
Duty Cycle	99%	98%	98%	99%

**Conclusion: Pass**

### **A.3. Peak Power Spectral Density**

**Method of Measurement: See ANSI C63.10-2013-clause 11.10.2**

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to RBW = 3 kHz.
- d) Set the VBW = 10 kHz.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

**Measurement Limit:**

Standard	Limit
FCC CRF Part 15.247(e)	< 8 dBm/3 kHz

**EUT ID: EUT2**

**Measurement Results:**

#### **802.11b/g mode**

Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11b	1	Fig.A.3.1	0.18	<b>P</b>
	6	Fig.A.3.2	-0.10	<b>P</b>
	11	Fig.A.3.3	0.28	<b>P</b>
802.11g	1	Fig.A.3.4	-6.15	<b>P</b>
	6	Fig.A.3.5	-6.97	<b>P</b>
	11	Fig.A.3.6	-6.26	<b>P</b>

#### **802.11n-HT20 mode**


Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11n (HT20)	1	Fig.A.3.7	-6.20	<b>P</b>
	6	Fig.A.3.8	-6.18	<b>P</b>
	11	Fig.A.3.9	-6.38	<b>P</b>

#### **802.11n-HT40 mode**


Mode	Channel	Power Spectral Density ( dBm/3 kHz )		Conclusion
802.11n (HT40)	3	Fig.A.3.10	-12.21	<b>P</b>
	6	Fig.A.3.11	-12.90	<b>P</b>
	9	Fig.A.3.12	-12.81	<b>P</b>




Test graphs as below:

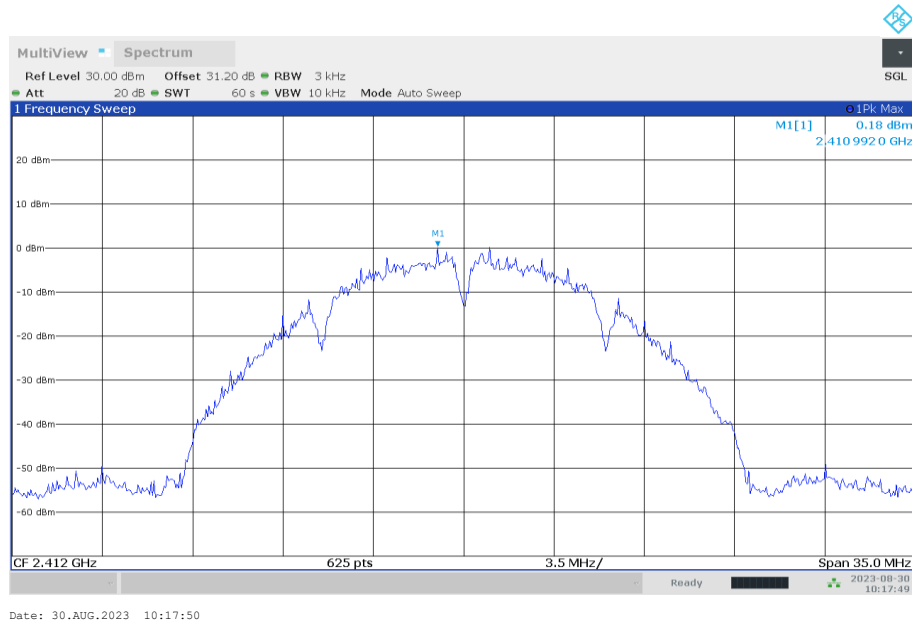


**Fig.A.3.1 Power Spectral Density(802.11b,Ch1)**

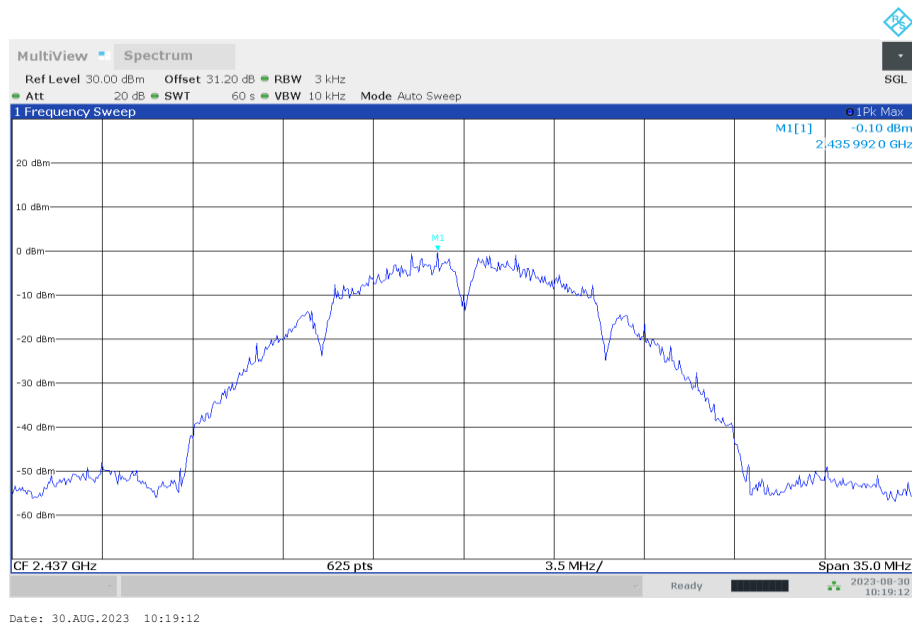


**Fig.A.3.2 Power Spectral Density (802.11b, Ch 6)**

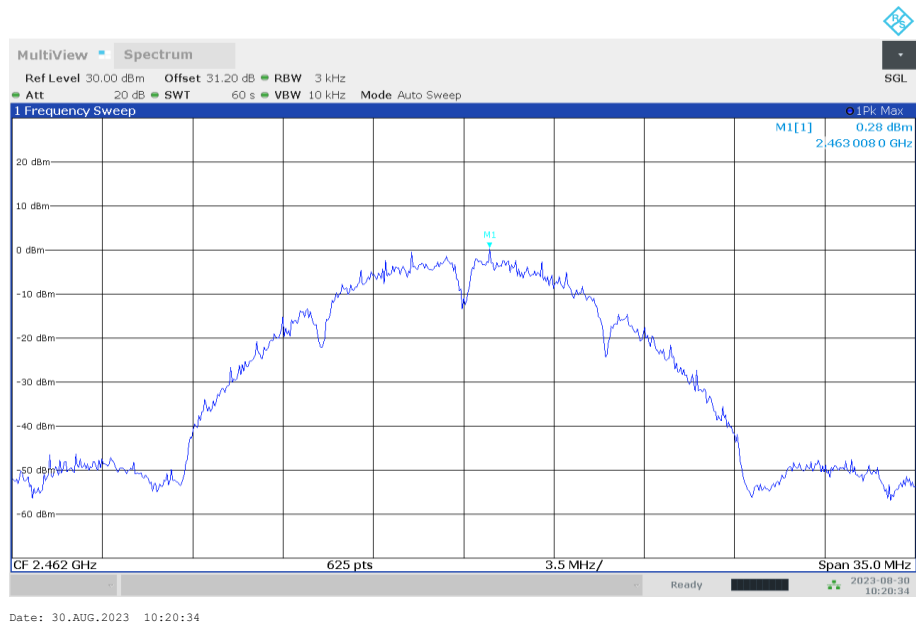


**Fig.A.3.3 Power Spectral Density (802.11b, Ch 11)**

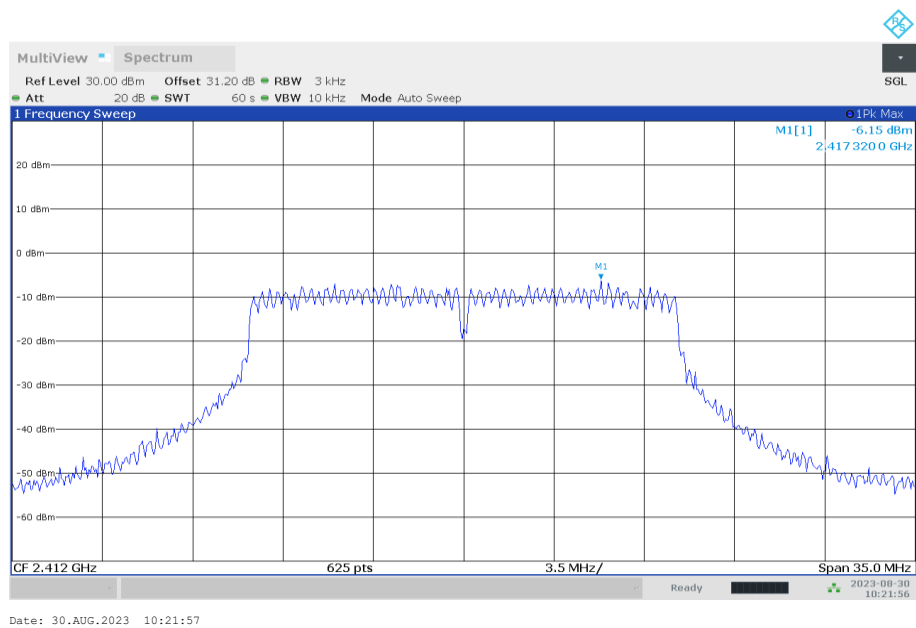


**Fig.A.3.4 Power Spectral Density (802.11g, Ch 1)**

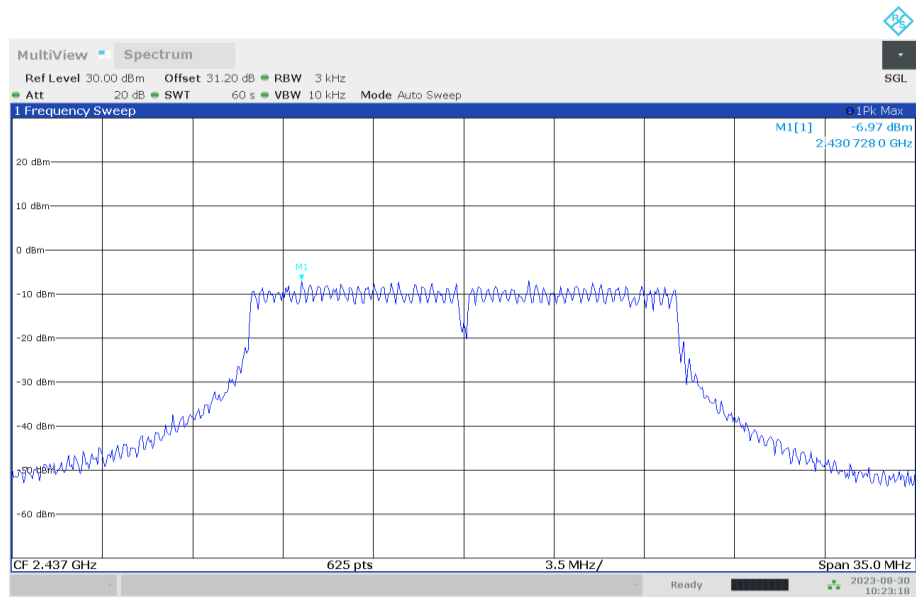

**Fig.A.3.5 Power Spectral Density (802.11g, Ch 6)**

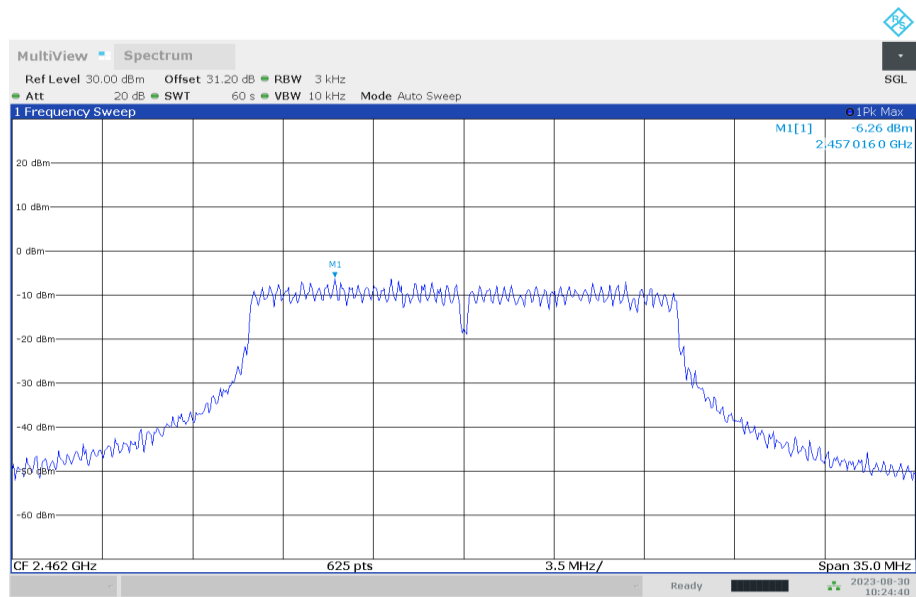


**Fig.A.3.6 Power Spectral Density (802.11g, Ch 11)**

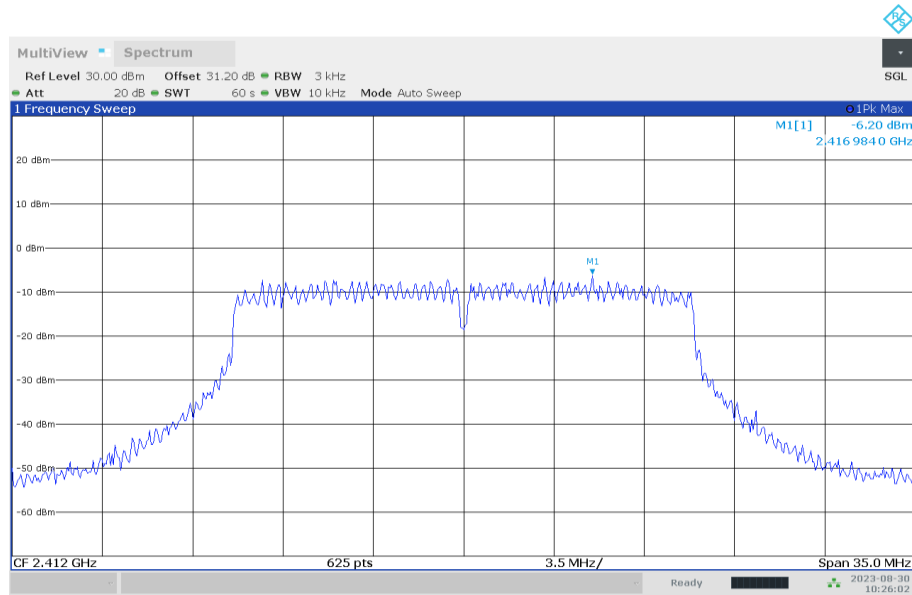


Date: 30.AUG.2023 10:26:02

**Fig.A.3.7 Power Spectral Density (802.11n-HT20, Ch 1)**

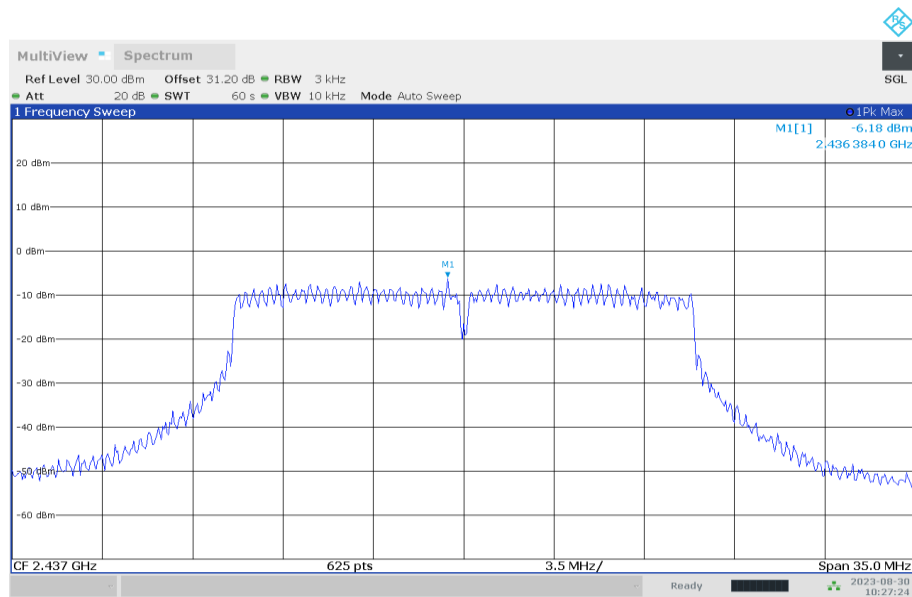


Date: 30.AUG.2023 10:27:25

**Fig.A.3.8 Power Spectral Density (802.11n-HT20, Ch 6)**

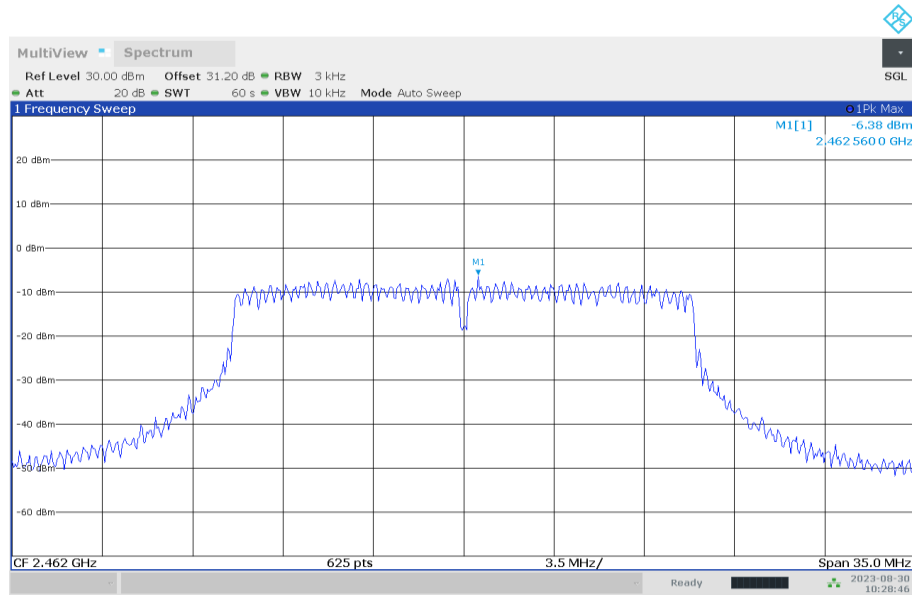


Date: 30.AUG.2023 10:28:46

**Fig.A.3.9 Power Spectral Density (802.11n-HT20, Ch 11)**

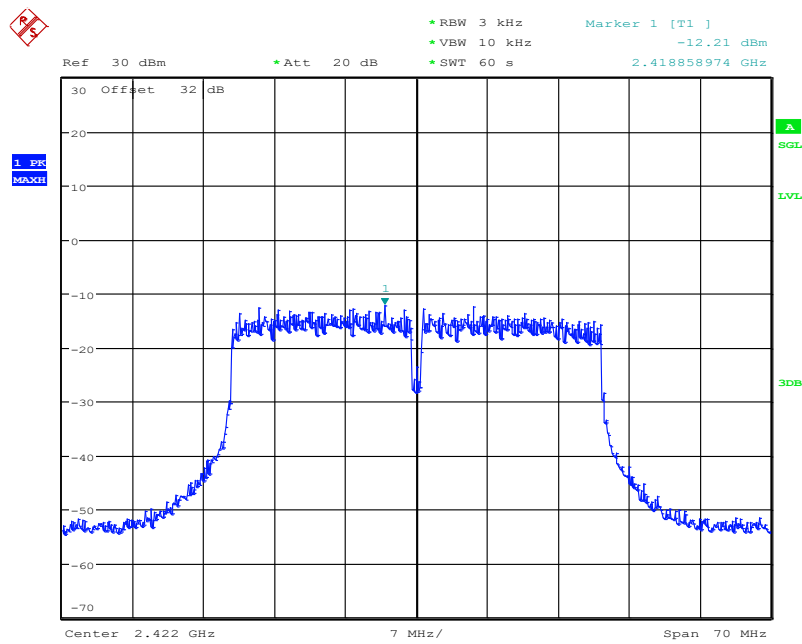


Date: 13.SEP.2023 10:19:54

**Fig.A.3.10 Power Spectral Density (802.11n-HT40, Ch 3)**

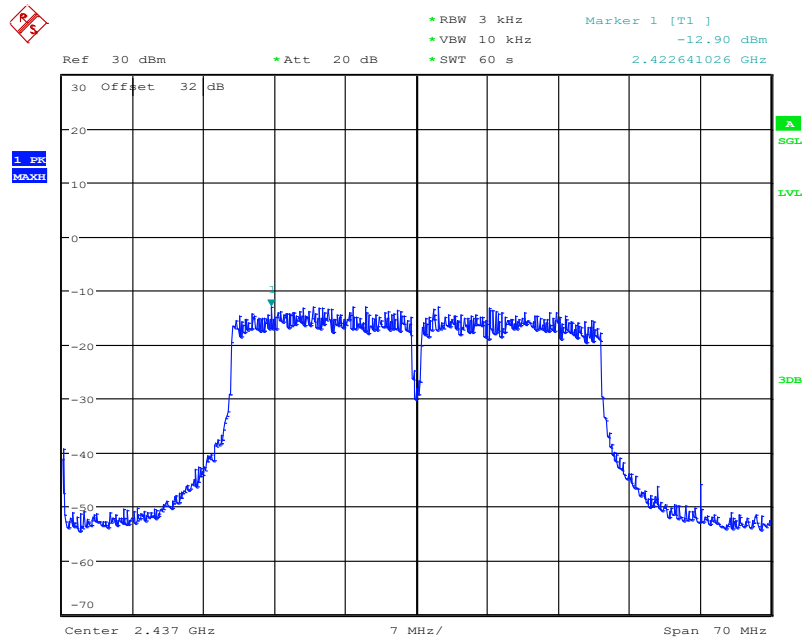

Date: 13.SEP.2023 10:21:17

**Fig.A.3.11 Power Spectral Density (802.11n-HT40, Ch 6)**

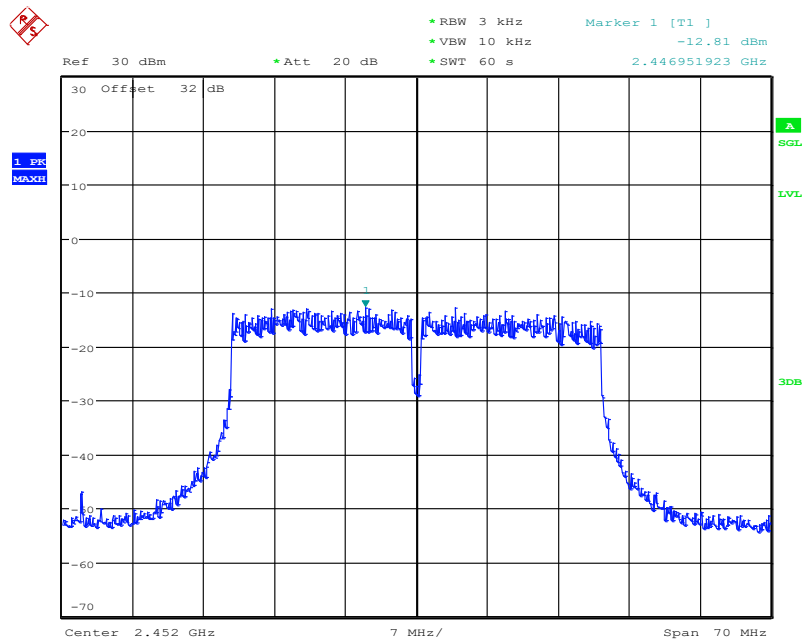

Date: 13.SEP.2023 10:22:40

**Fig.A.3.12 Power Spectral Density (802.11n-HT40, Ch 9)**

**Conclusion: Pass**

#### **A.4. DTS 6-dB Signal Bandwidth**

**Method of Measurement: See ANSI C63.10-2013 section 11.8.1.**

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW) = 300 kHz.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

**Measurement Limit:**

Standard	Limit (kHz)
FCC 47 CFR Part 15.247 (a)	≥ 500

**EUT ID: EUT2**

**Measurement Result:**

##### **802.11b/g mode**

Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11b	1	Fig.A.4.1	8.05	<b>P</b>
	6	Fig.A.4.2	8.01	<b>P</b>
	11	Fig.A.4.3	8.52	<b>P</b>
802.11g	1	Fig.A.4.4	16.28	<b>P</b>
	6	Fig.A.4.5	16.29	<b>P</b>
	11	Fig.A.4.6	15.92	<b>P</b>

##### **802.11n-HT20 mode**

Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11n (HT20)	1	Fig.A.4.7	17.02	<b>P</b>
	6	Fig.A.4.8	16.88	<b>P</b>
	11	Fig.A.4.9	16.86	<b>P</b>

##### **802.11n-HT40 mode**

Mode	Channel	Occupied 6dB Bandwidth ( kHz)		conclusion
802.11n (HT40)	3	Fig.A.4.10	35.44	<b>P</b>
	6	Fig.A.4.11	35.70	<b>P</b>
	9	Fig.A.4.12	35.68	<b>P</b>

Test graphs as below:

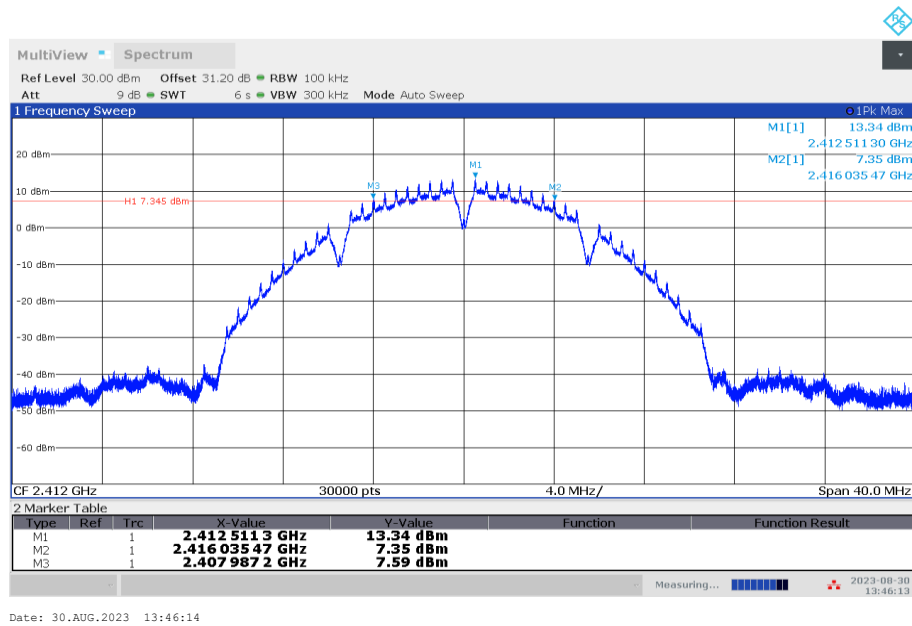


Fig.A.4.1 Occupied 6dB Bandwidth(802.11b,Ch 1)



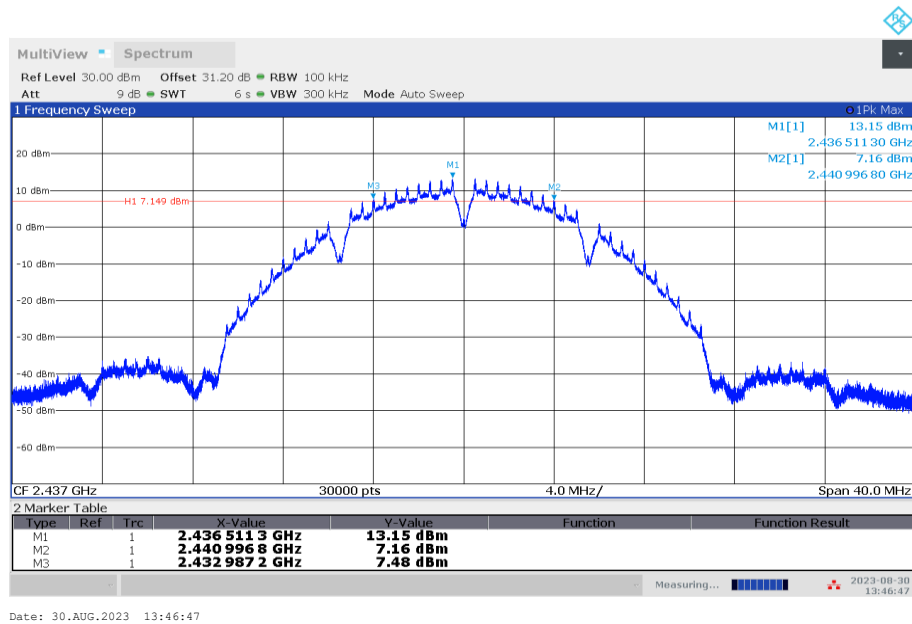


Fig.A.4.2 Occupied 6dB Bandwidth (802.11b, Ch 6)




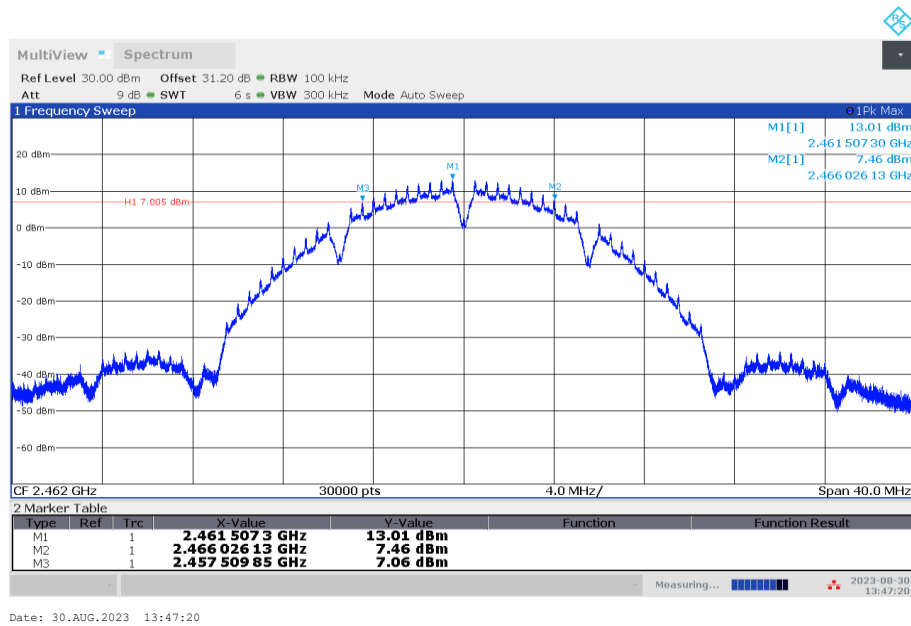

**Fig.A.4.3 Occupied 6dB Bandwidth (802.11b, Ch 11)**

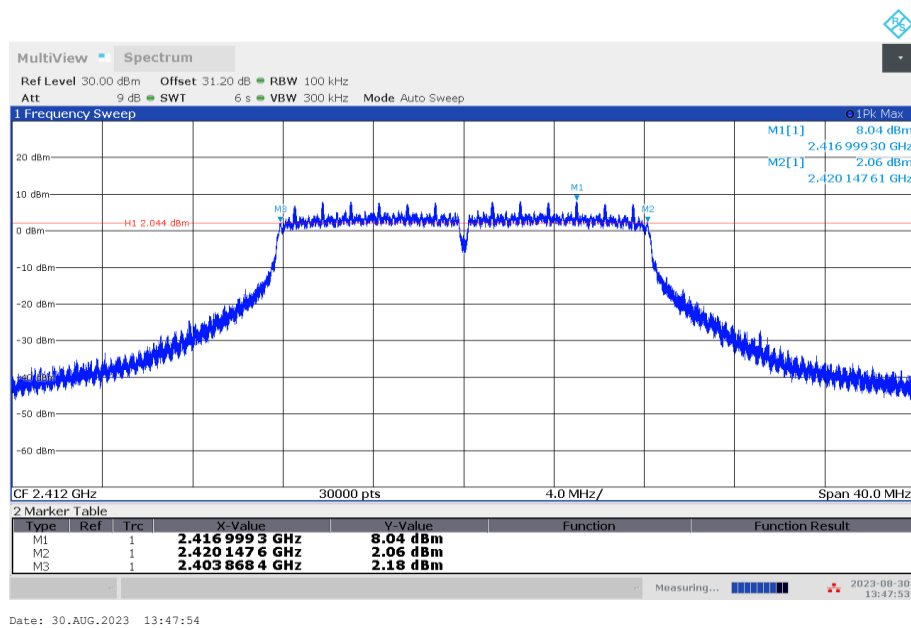


**Fig.A.4.4 Occupied 6dB Bandwidth (802.11g, Ch 1)**

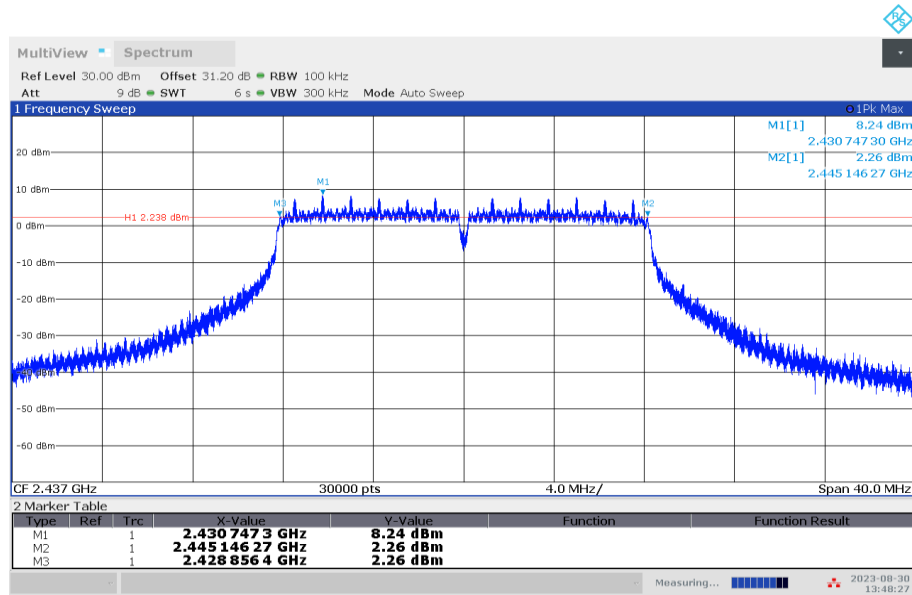


Date: 30.AUG.2023 13:48:27

**Fig.A.4.5 Occupied 6dB Bandwidth (802.11g, Ch 6)**

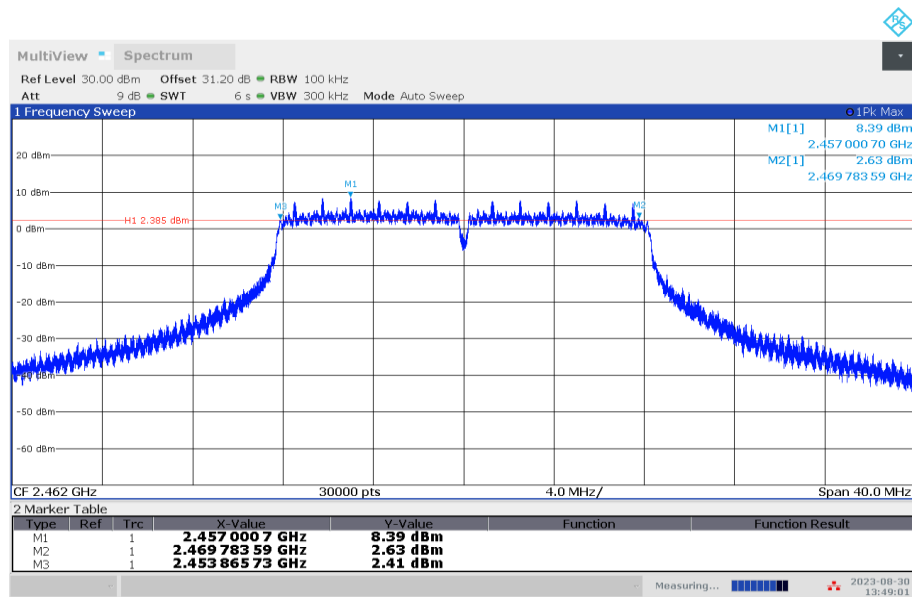


Date: 30.AUG.2023 13:49:01


**Fig.A.4.6 Occupied 6dB Bandwidth (802.11g, Ch 11)**

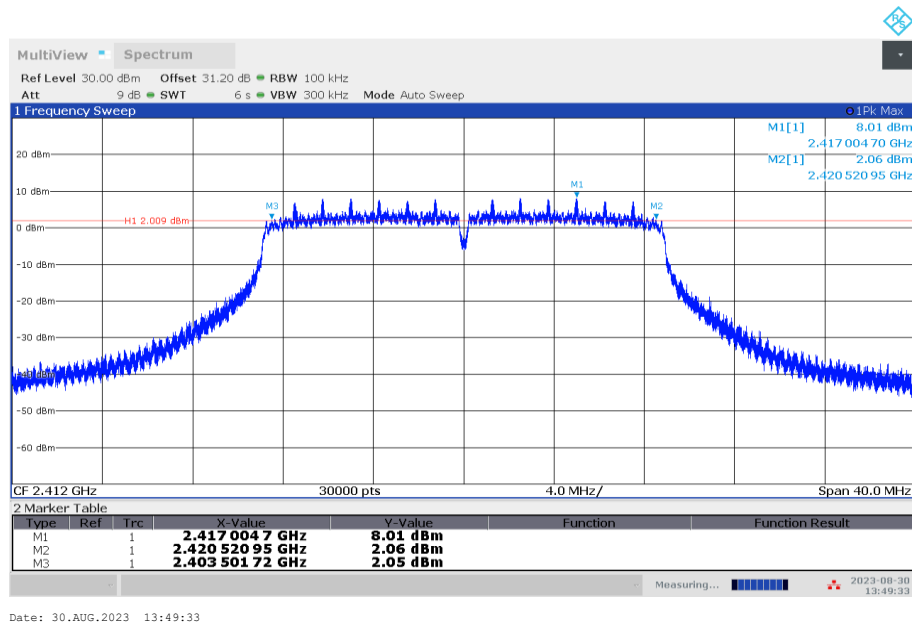


**Fig.A.4.7 Occupied 6dB Bandwidth (802.11n-20MHz, Ch 1)**

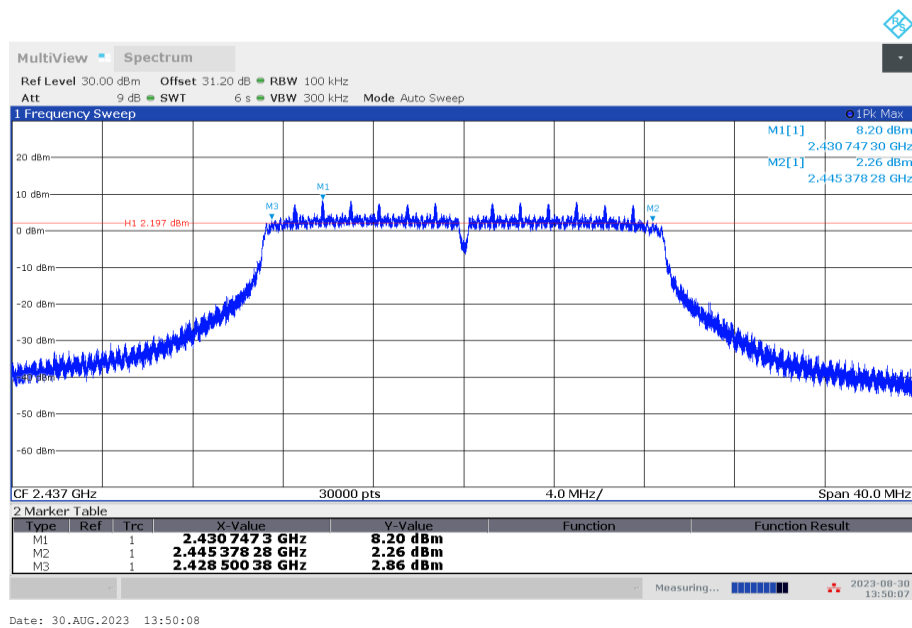

**Fig.A.4.8 Occupied 6dB Bandwidth (802.11n-HT20, Ch 6)**

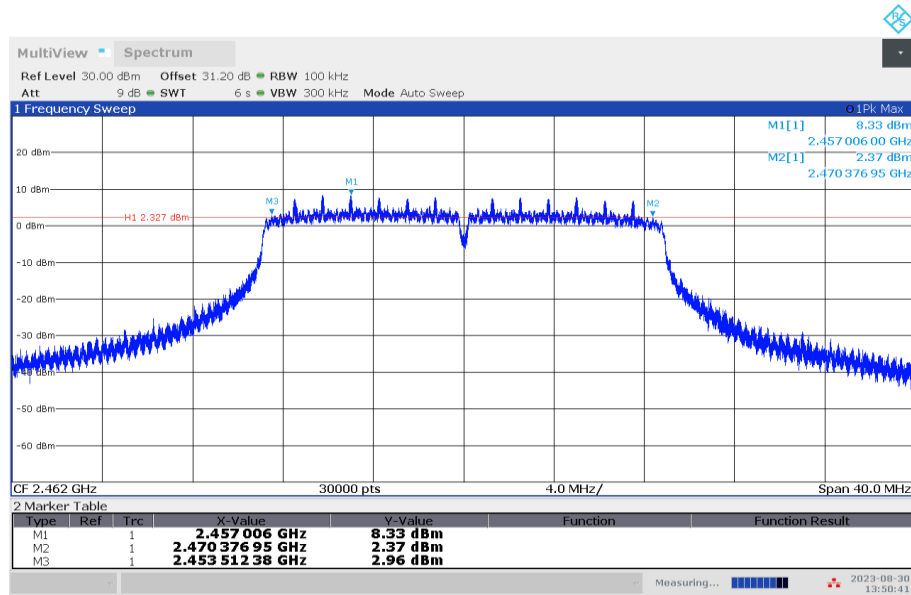

**Fig.A.4.9 Occupied 6dB Bandwidth (802.11n-HT20, Ch 11)**

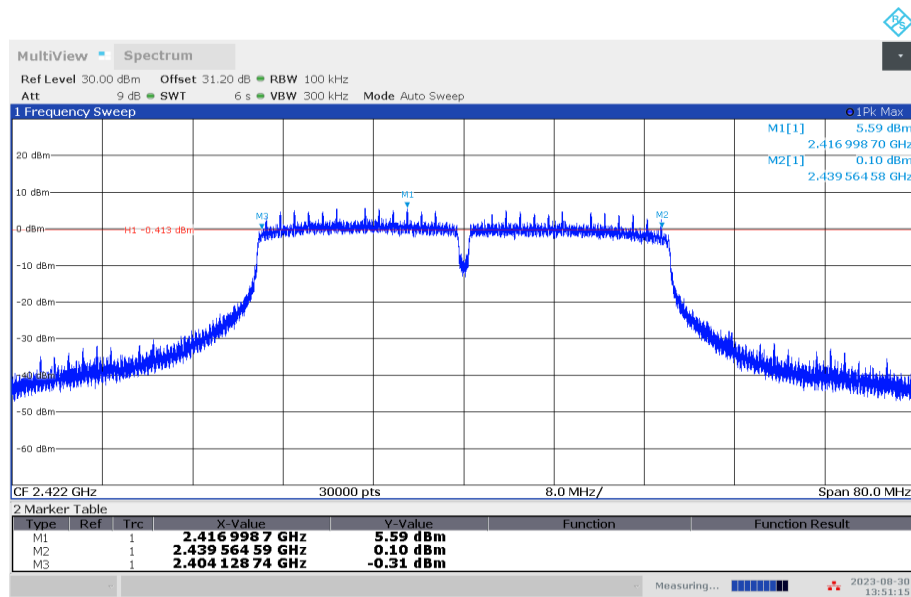

**Fig.A.4.10 Occupied 6dB Bandwidth (802.11n-40MHz, Ch 3)**

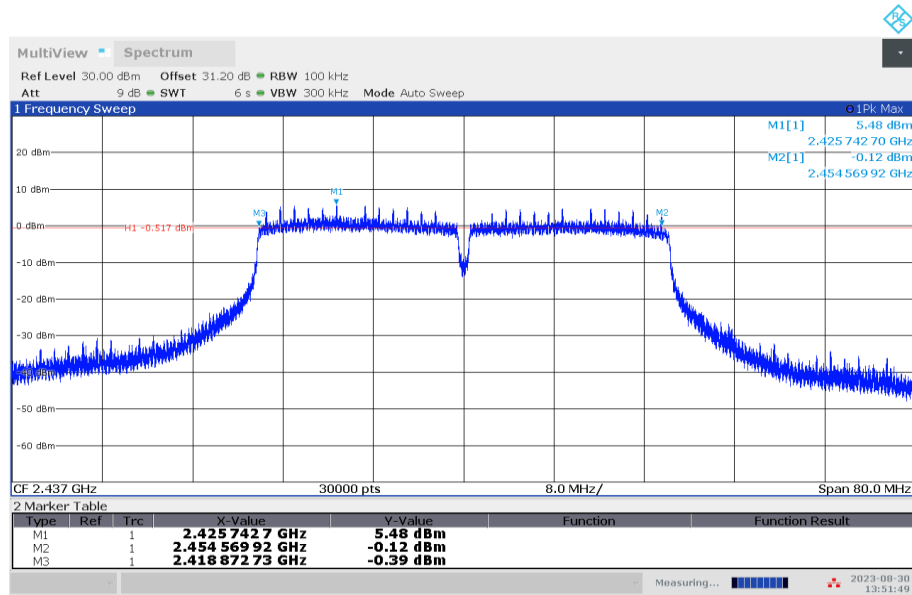


Fig.A.4.11 Occupied 6dB Bandwidth (802.11n-HT40, Ch 6)

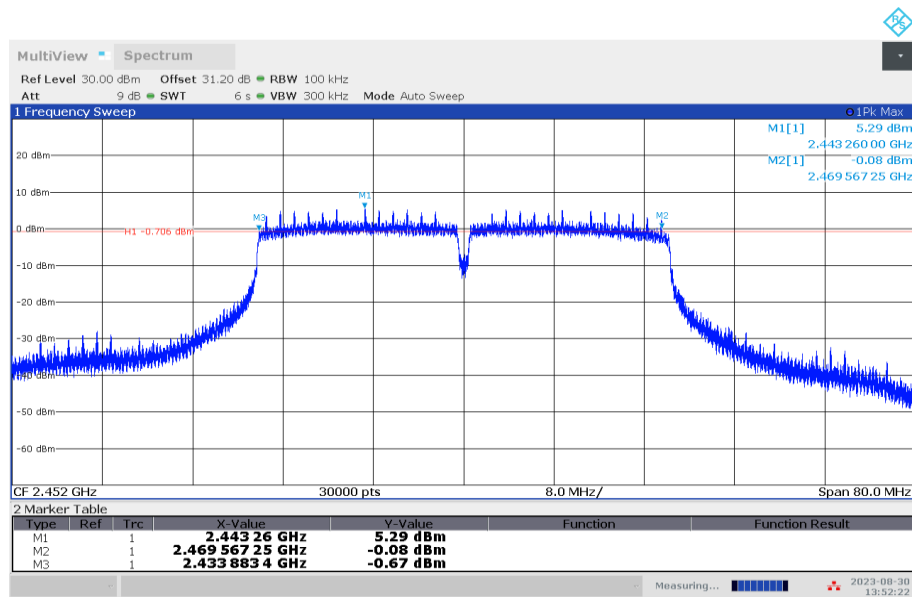


Fig.A.4.12 Occupied 6dB Bandwidth (802.11n-HT40, Ch 9)

Conclusion: Pass

## **A.5. Band Edges Compliance**

### **Method of Measurement: See ANSI C63.10-2013-clause 6.10.4**

Connect the spectrum analyzer to the EUT using an appropriate RF cable connected to the EUT output. Configure the spectrum analyzer settings as described below.

- a) Set Span = 100MHz
- b) Sweep Time: coupled
- c) Set the RBW= 100 kHz
- c) Set the VBW= 300 kHz
- d) Detector: Peak
- e) Trace: Max hold

### **Measurement Limit:**

Standard	Limit (dBc)
FCC 47 CFR Part 15.247 (d)	> 20

**EUT ID: EUT2**

### **Measurement Result:**

#### **802.11b/g mode**

Mode	Channel	Test Results	Conclusion
802.11b	1	Fig.A.5.1	<b>P</b>
	11	Fig.A.5.2	<b>P</b>
802.11g	1	Fig.A.5.3	<b>P</b>
	11	Fig.A.5.4	<b>P</b>


#### **802.11n-HT20 mode**

Mode	Channel	Test Results	Conclusion
802.11n (HT20)	1	Fig.A.5.5	<b>P</b>
	11	Fig.A.5.6	<b>P</b>


#### **802.11n-HT40 mode**

Mode	Channel	Test Results	Conclusion
802.11n (HT40)	3	Fig.A.5.7	<b>P</b>
	9	Fig.A.5.8	<b>P</b>


**Test graphs as below:**

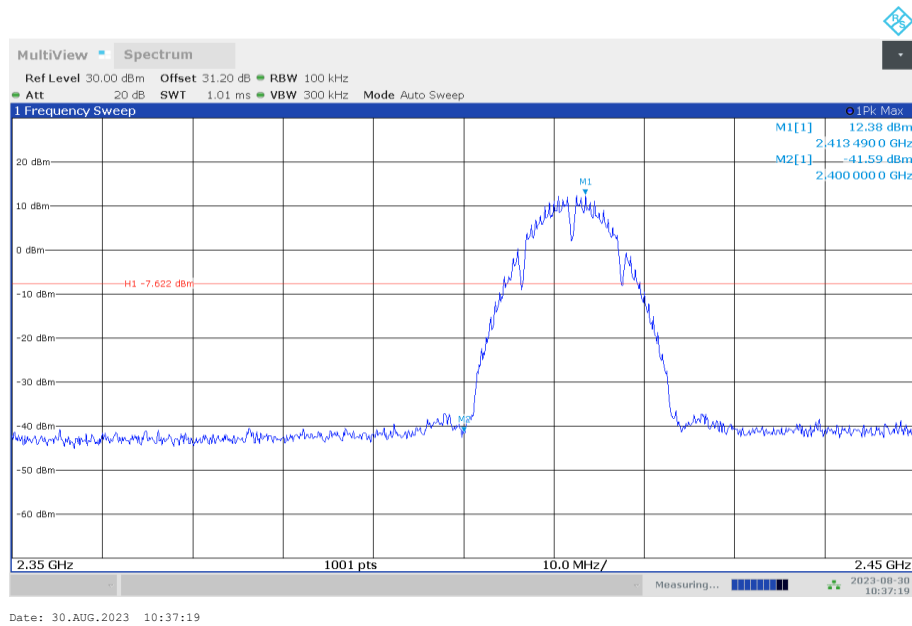


**Fig.A.5.1 Band Edges (802.11b, Ch 1)**

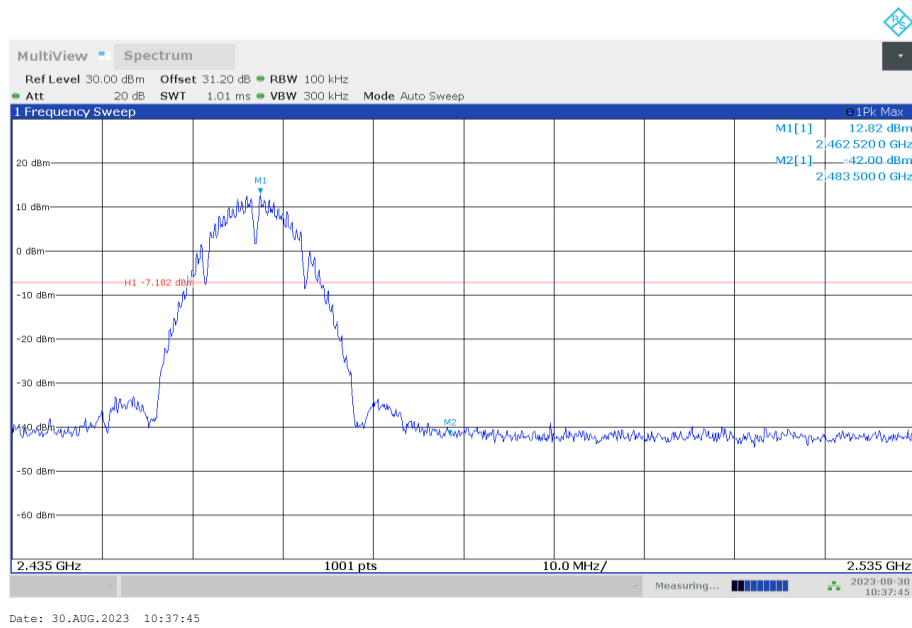

**Fig.A.5.2 Band Edges (802.11b, Ch 11)**

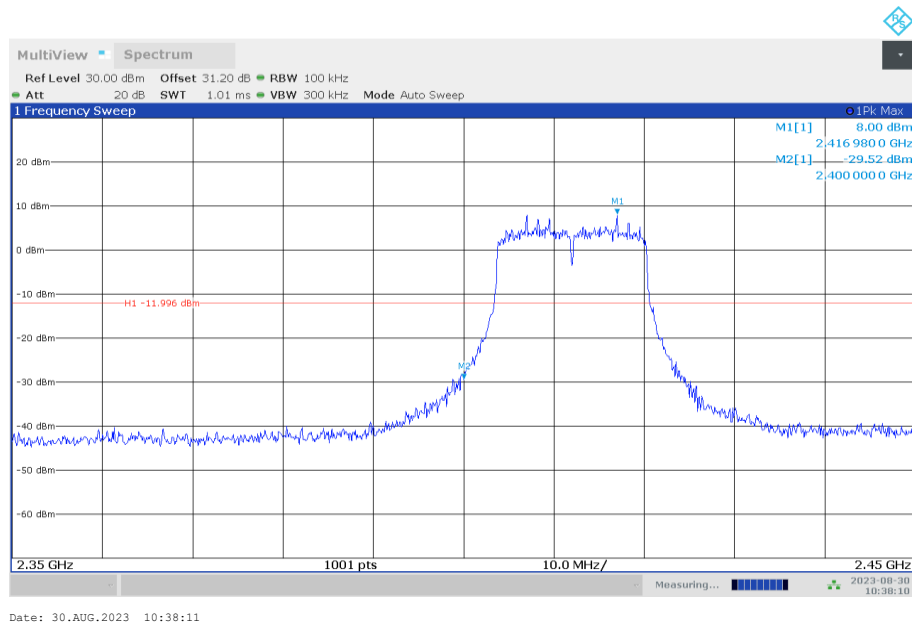


**Fig.A.5.3 Band Edges (802.11g, Ch 1)**

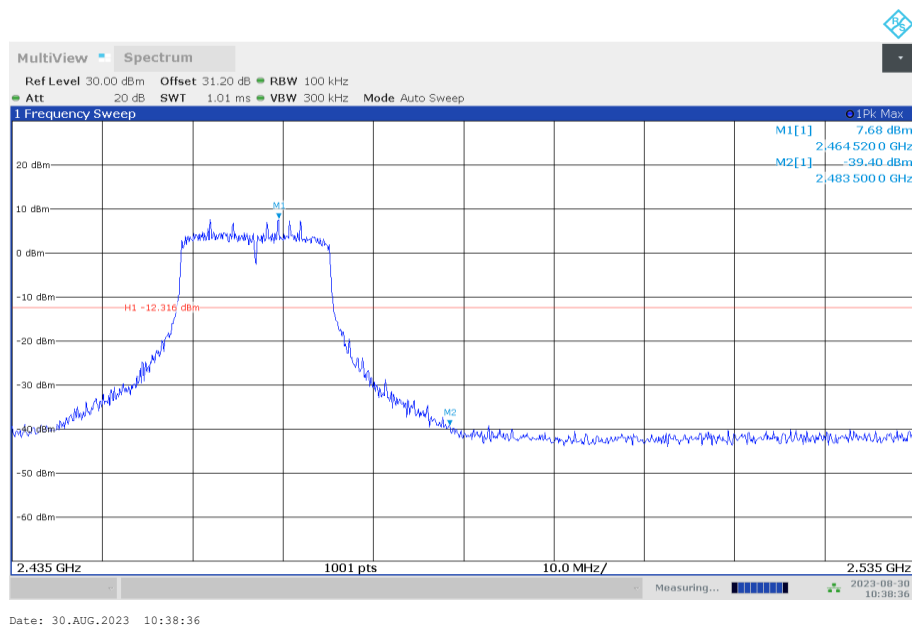


**Fig.A.5.4 Band Edges (802.11g, Ch 11)**




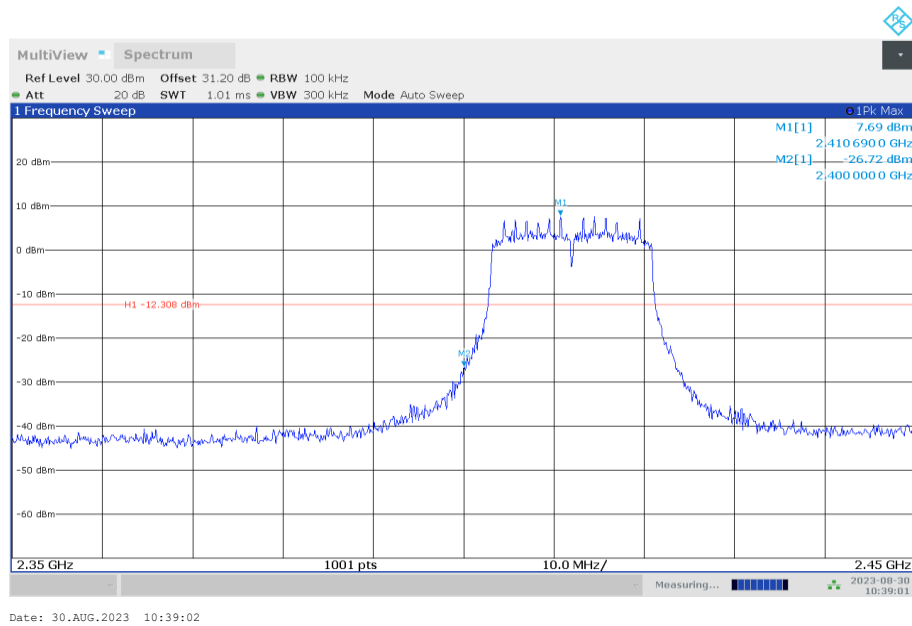


**Fig.A.5.5 Band Edges (802.11n-HT20, Ch 1)**

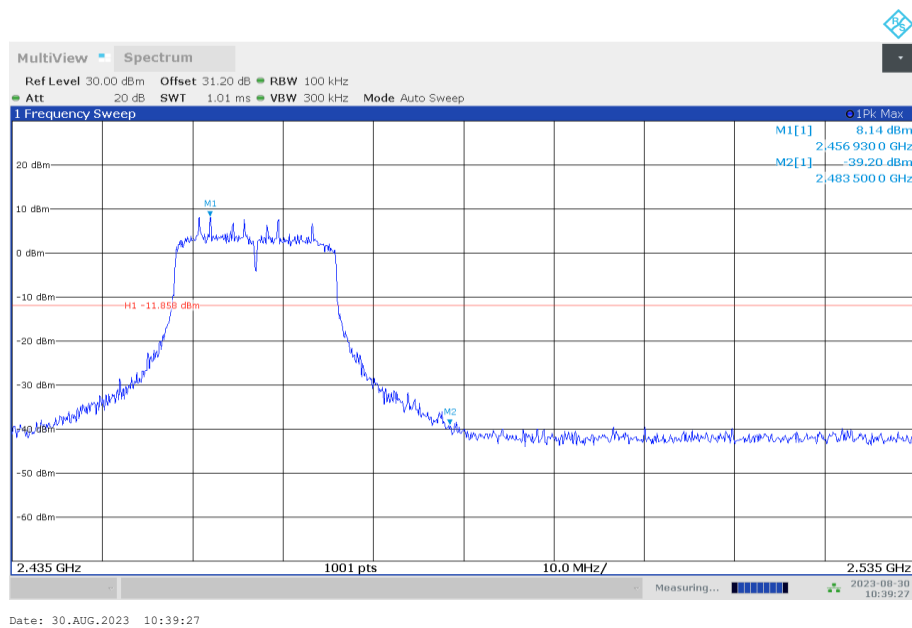

**Fig.A.5.6 Band Edges (802.11n-HT20, Ch 11)**

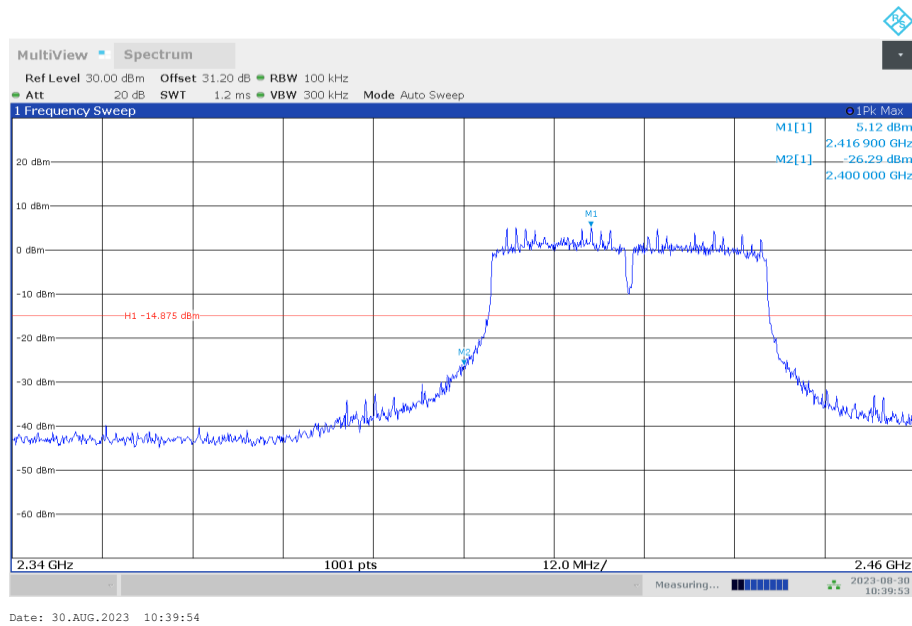

**Fig.A.5.7 Band Edges (802.11n-HT40, Ch 3)**

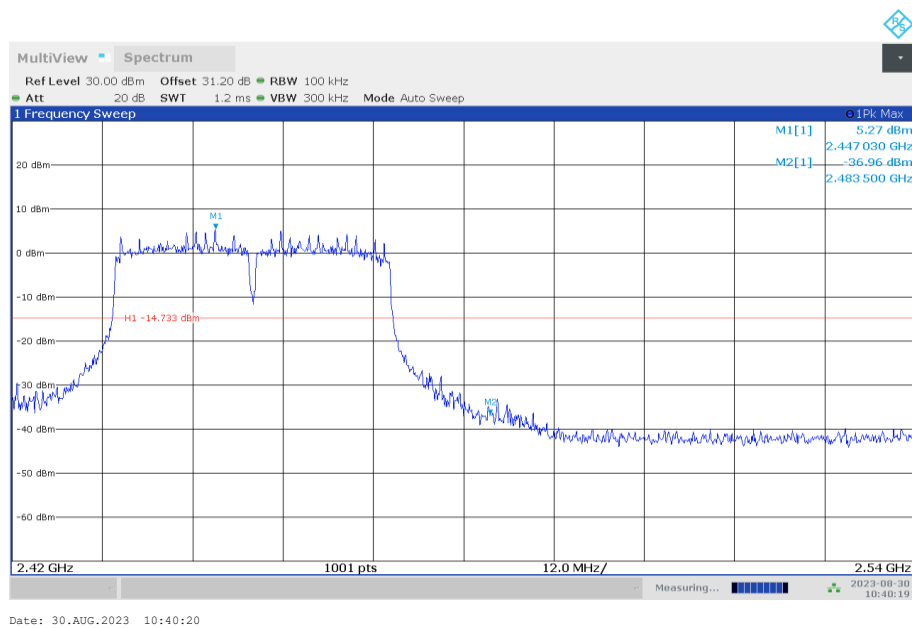

**Fig.A.5.8 Band Edges (802.11n-HT40, Ch 9)**

**Conclusion: Pass**

## **A.6. Transmitter Spurious Emission**

### **A.6.1 Transmitter Spurious Emission – Conducted**

#### **Method of Measurement: See ANSI C63.10-2013-clause 11.11**

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency
- b) Set the span to  $\geq 1.5$  times the DTS bandwidth
- c) Set the RBW= 100 kHz
- d) Set the VBW= 300 kHz
- e) Detector = Peak
- f) Sweep time = auto couple
- g) Trace mode = max hold
- h) Allow trace to fully stabilize
- i) Use the peak marker function to determine the maximum PSD level

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

Establish an emission level by using the following procedure:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW = 300 kHz.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

#### **Measurement Limit:**

<b>Standard</b>	<b>Limit</b>
FCC 47 CFR Part 15.247 (d)	20dB below peak output power in 100 kHz bandwidth

**EUT ID: EUT2**

**Measurement Results:**

**802.11b mode**

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.412 GHz	Fig.A.6.1.1	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.2	<b>P</b>
		1 GHz ~ 26.5 GHz	Fig.A.6.1.3	<b>P</b>
	6	2.437 GHz	Fig.A.6.1.4	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.5	<b>P</b>
		1 GHz ~ 26.5 GHz	Fig.A.6.1.6	<b>P</b>
	11	2.462 GHz	Fig.A.6.1.7	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.8	<b>P</b>
		1 GHz ~ 26.5 GHz	Fig.A.6.1.9	<b>P</b>

**802.11g mode**

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.412 GHz	Fig.A.6.1.10	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.11	<b>P</b>
		1 GHz ~ 26.5 GHz	Fig.A.6.1.12	<b>P</b>
	6	2.437 GHz	Fig.A.6.1.13	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.14	<b>P</b>
		1 GHz ~ 26.5 GHz	Fig.A.6.1.15	<b>P</b>
	11	2.462 GHz	Fig.A.6.1.16	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.17	<b>P</b>
		1 GHz ~ 26.5 GHz	Fig.A.6.1.18	<b>P</b>


**802.11n-HT20 mode**

MODE	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.412 GHz	Fig.A.6.1.19	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.20	<b>P</b>
		1 GHz ~ 26.5 GHz	Fig.A.6.1.21	<b>P</b>
	6	2.437 GHz	Fig.A.6.1.22	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.23	<b>P</b>
		1 GHz ~ 26.5 GHz	Fig.A.6.1.24	<b>P</b>
	11	2.462 GHz	Fig.A.6.1.25	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.26	<b>P</b>
		1 GHz ~ 26.5 GHz	Fig.A.6.1.27	<b>P</b>


**802.11n-HT40 mode**

<b>MODE</b>	<b>Channel</b>	<b>Frequency Range</b>	<b>Test Results</b>	<b>Conclusion</b>
802.11n (HT40)	3	2.422 GHz	Fig.A.6.1.28	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.29	<b>P</b>
		1 GHz ~ 26.5 GHz	Fig.A.6.1.30	<b>P</b>
	6	2.437 GHz	Fig.A.6.1.31	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.32	<b>P</b>
		1 GHz ~ 26.5 GHz	Fig.A.6.1.33	<b>P</b>
	9	2.452 GHz	Fig.A.6.1.34	<b>P</b>
		30 MHz ~ 1 GHz	Fig.A.6.1.35	<b>P</b>
		1 GHz ~ 26.5 GHz	Fig.A.6.1.36	<b>P</b>


Test graphs as below:

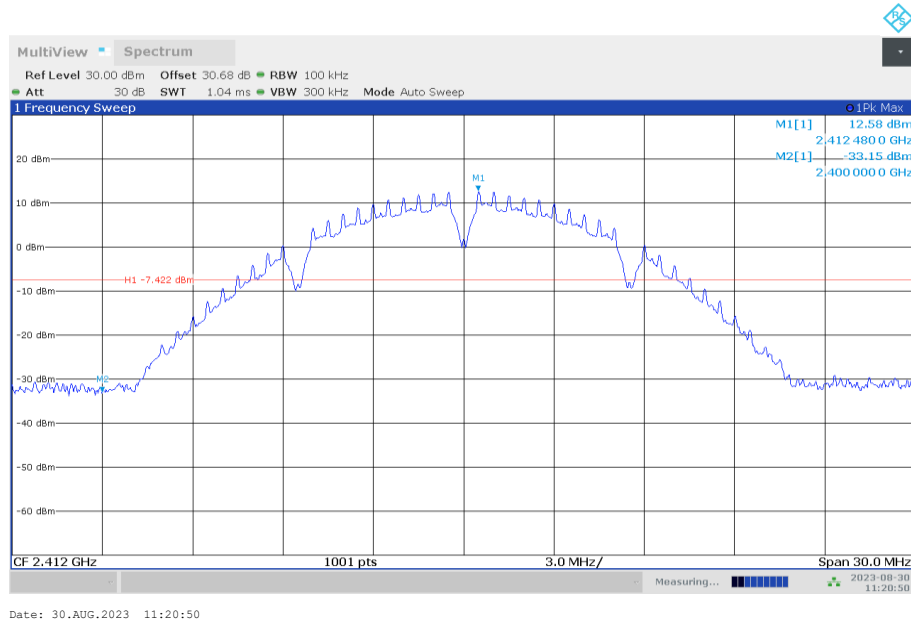


**Fig.A.6.1.1 Transmitter Spurious Emission - Conducted (802.11b, Ch1, Center Frequency)**

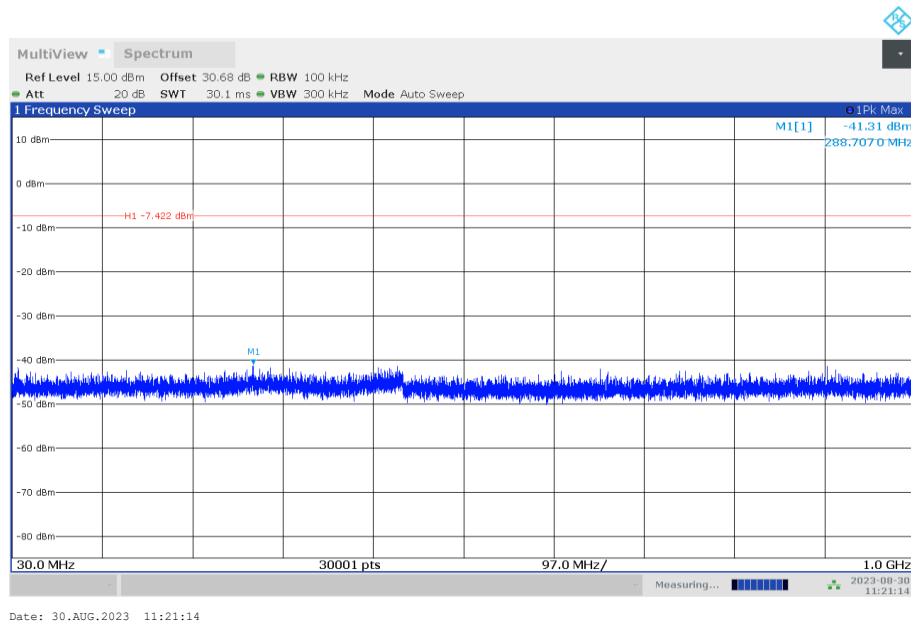


**Fig.A.6.1.2 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 30 MHz-1 GHz)**

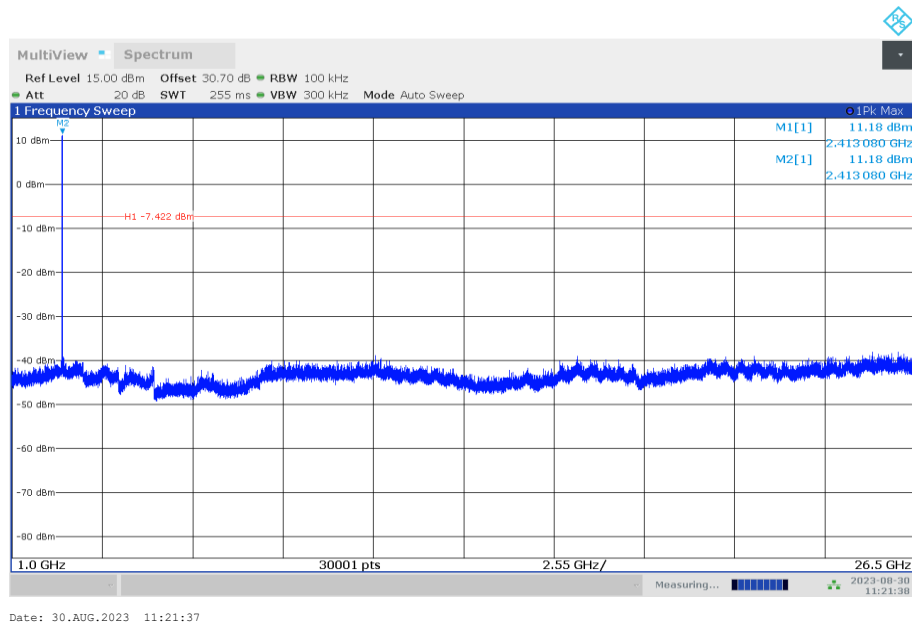


**Fig.A.6.1.3 Transmitter Spurious Emission - Conducted (802.11b, Ch1, 1 GHz-26.5 GHz)**

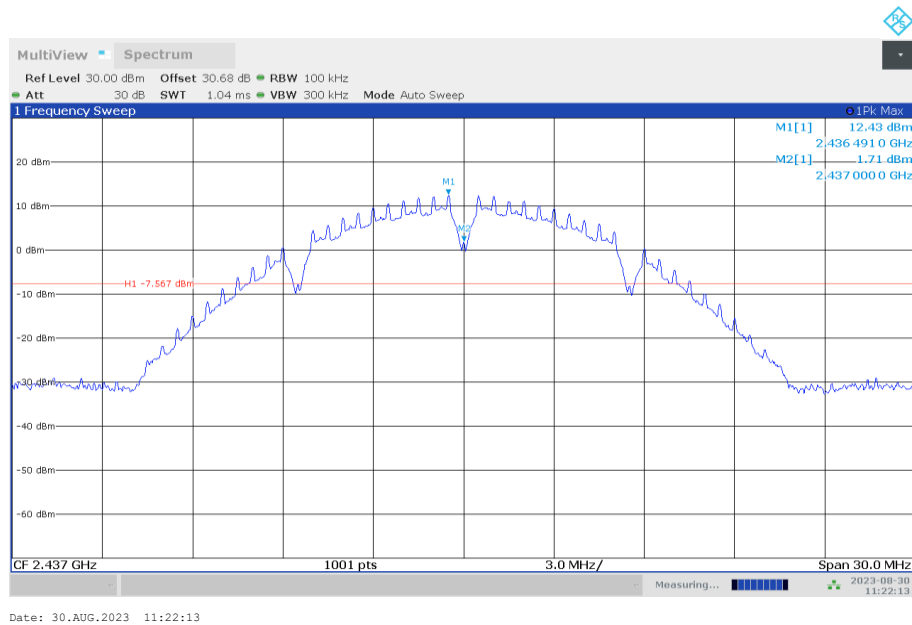

**Fig.A.6.1.4 Transmitter Spurious Emission - Conducted (802.11b, Ch6, Center Frequency)**

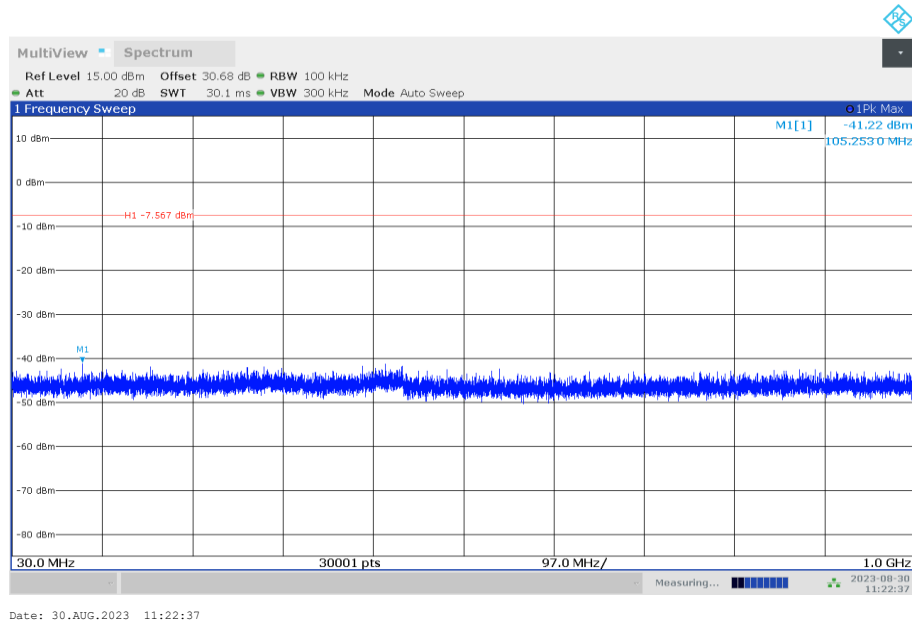


**Fig.A.6.1.5 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 30 MHz-1 GHz)**

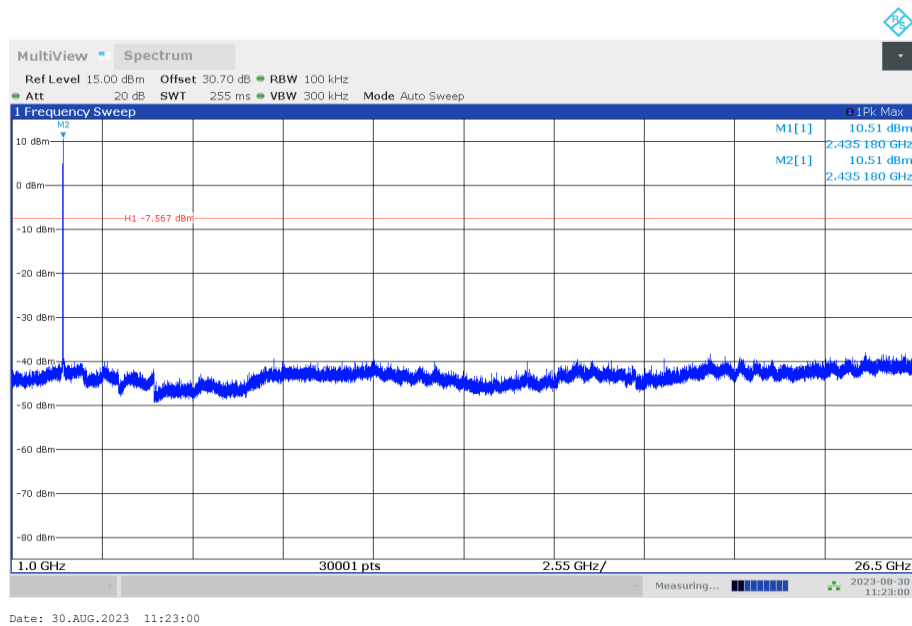


**Fig.A.6.1.6 Transmitter Spurious Emission - Conducted (802.11b, Ch6, 1 GHz-26.5 GHz)**




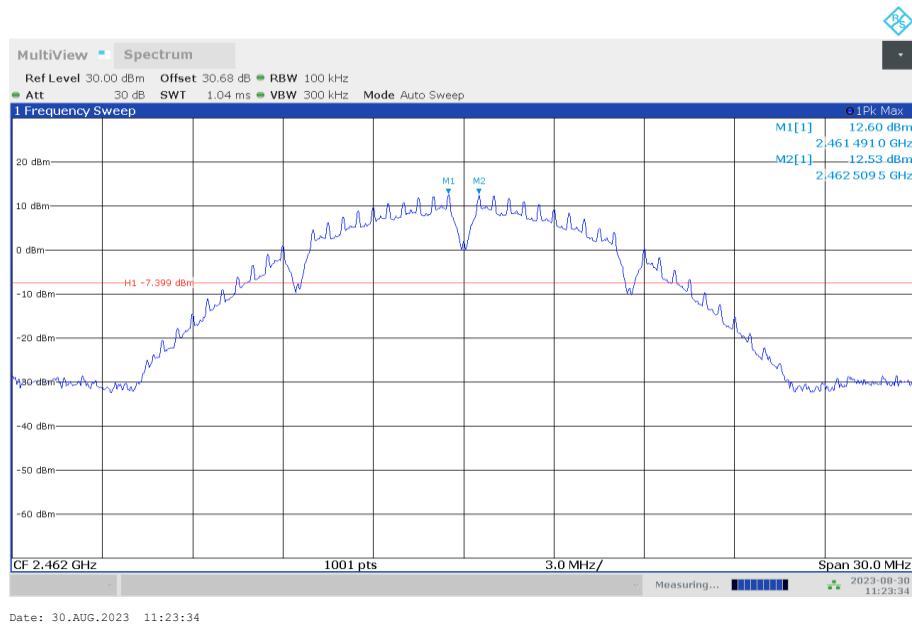


**Fig.A.6.1.7 Transmitter Spurious Emission - Conducted (802.11b, Ch11, Center Frequency)**

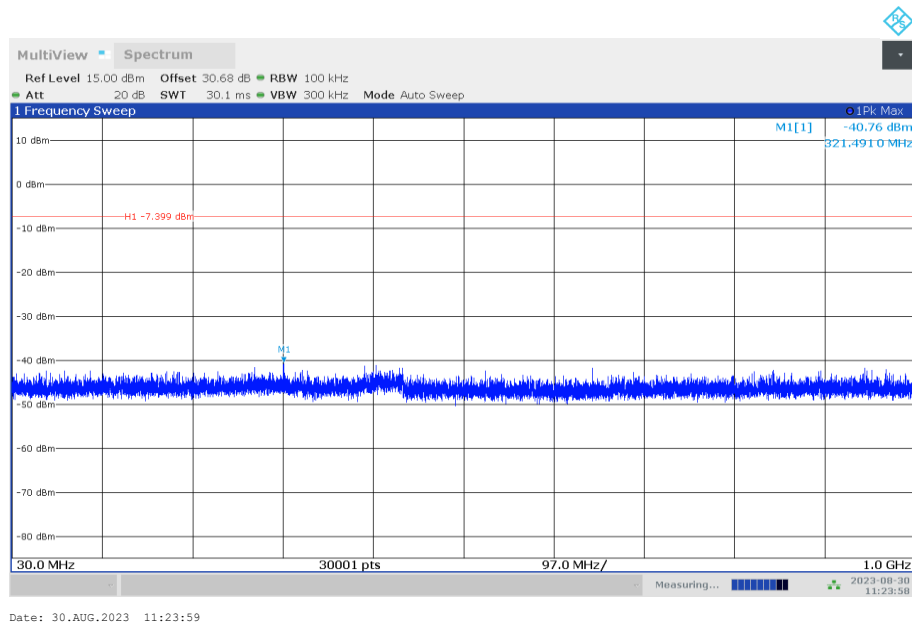


**Fig.A.6.1.8 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 30 MHz-1 GHz)**

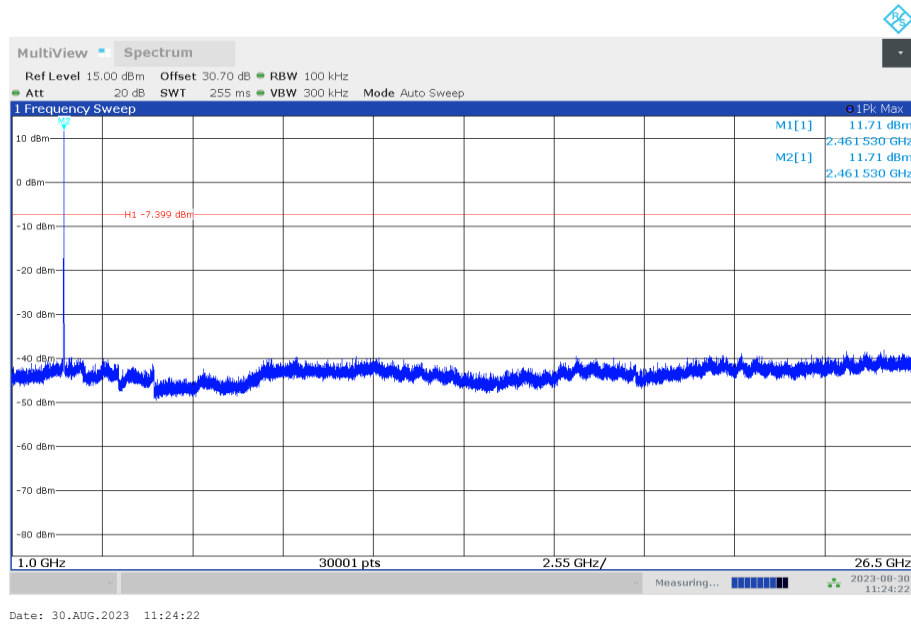


**Fig.A.6.1.9 Transmitter Spurious Emission - Conducted (802.11b, Ch11, 1 GHz-26.5 GHz)**

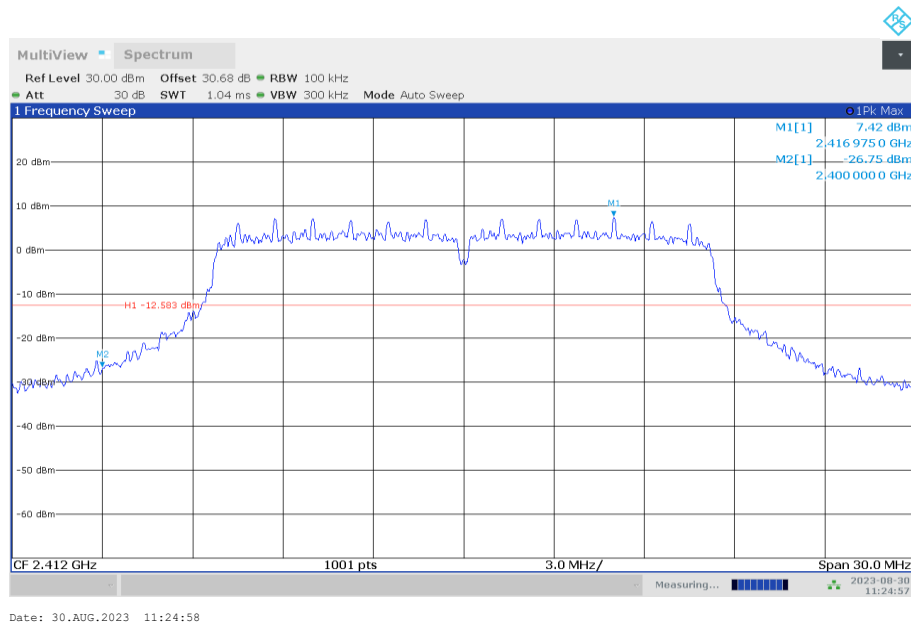


**Fig.A.6.1.10 Transmitter Spurious Emission - Conducted (802.11g, Ch1, Center Frequency)**

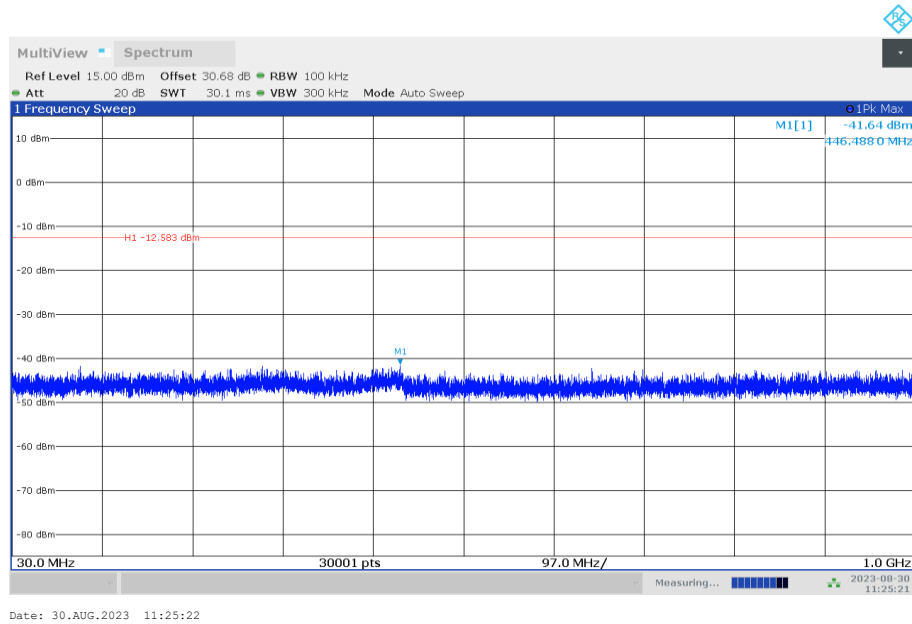


**Fig.A.6.1.11 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 30 MHz-1 GHz)**

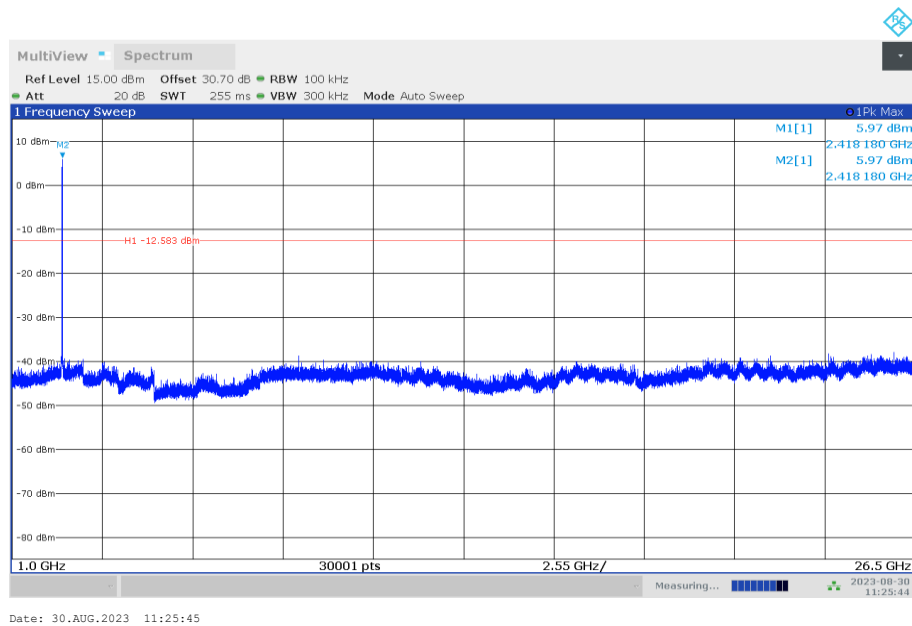


**Fig.A.6.1.12 Transmitter Spurious Emission - Conducted (802.11g, Ch1, 1 GHz-26.5 GHz)**

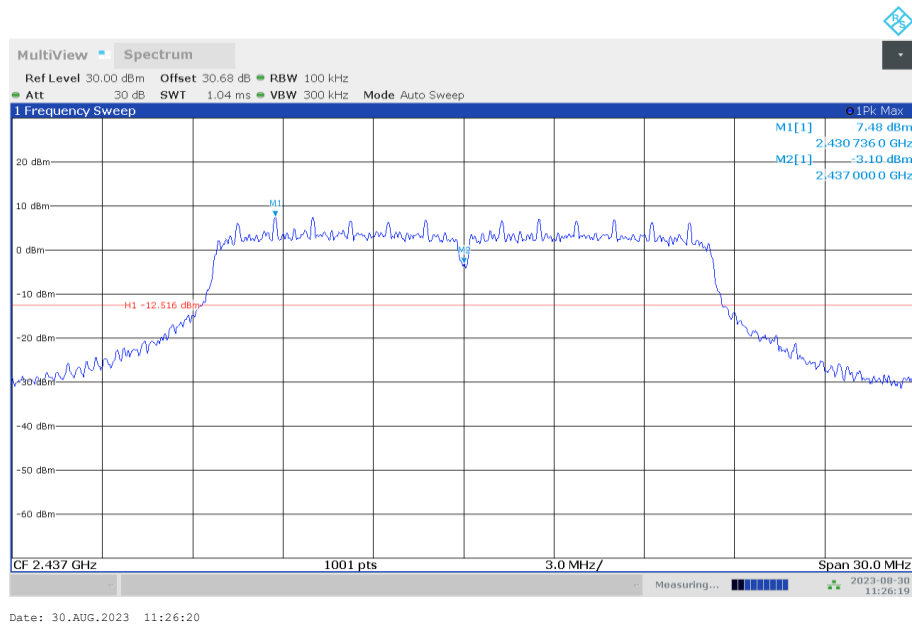


**Fig.A.6.1.13 Transmitter Spurious Emission - Conducted (802.11g, Ch6, Center Frequency)**

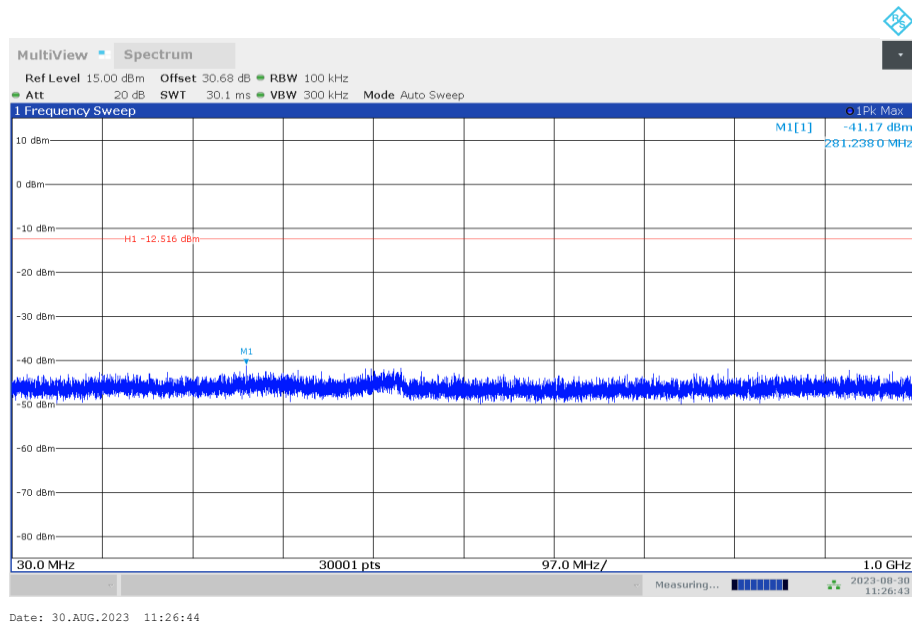


**Fig.A.6.1.14 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 30 MHz-1 GHz)**

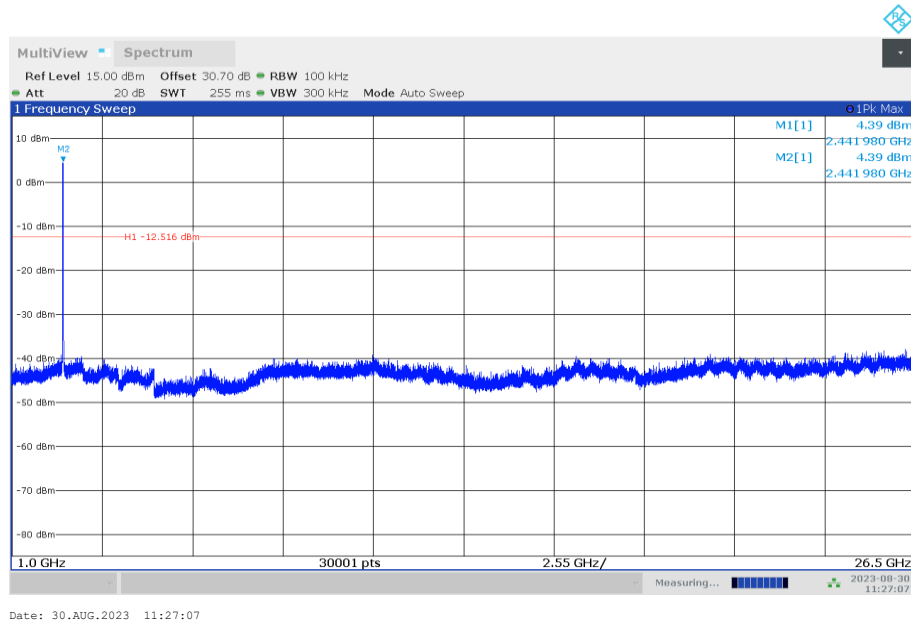


**Fig.A.6.1.15 Transmitter Spurious Emission - Conducted (802.11g, Ch6, 1 GHz-26.5 GHz)**

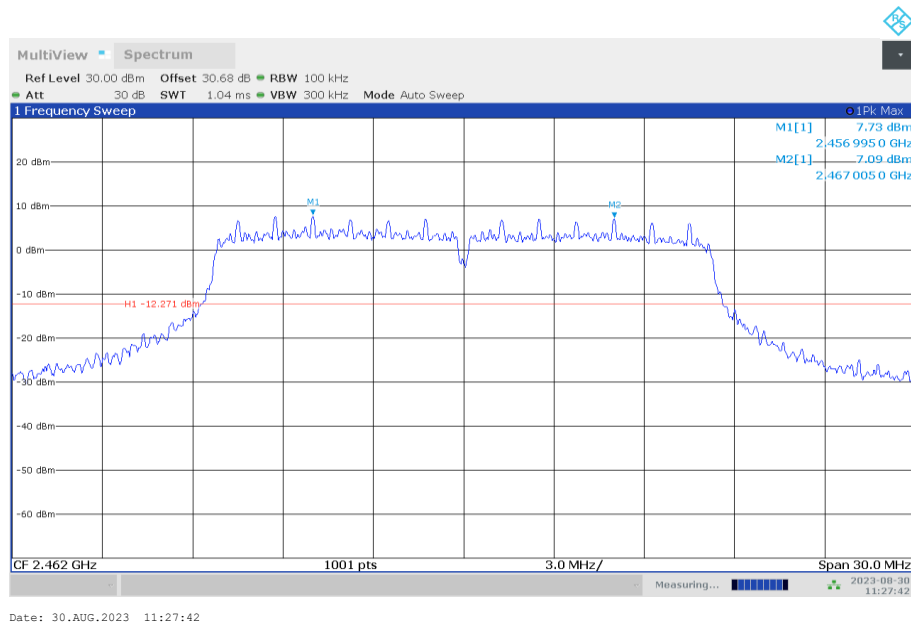


**Fig.A.6.1.16 Transmitter Spurious Emission - Conducted (802.11g, Ch11, Center Frequency)**

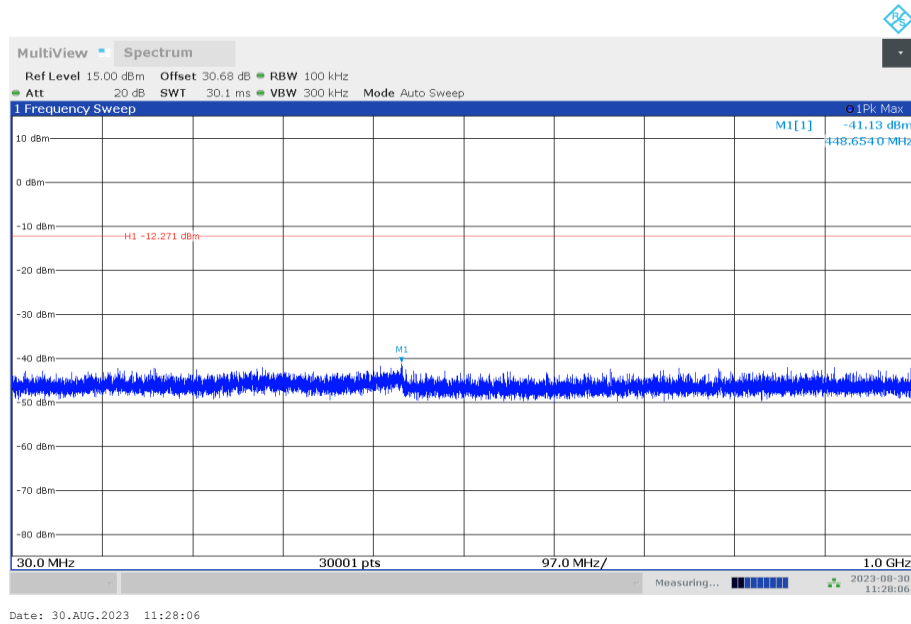


**Fig.A.6.1.17 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 30 MHz-1 GHz)**

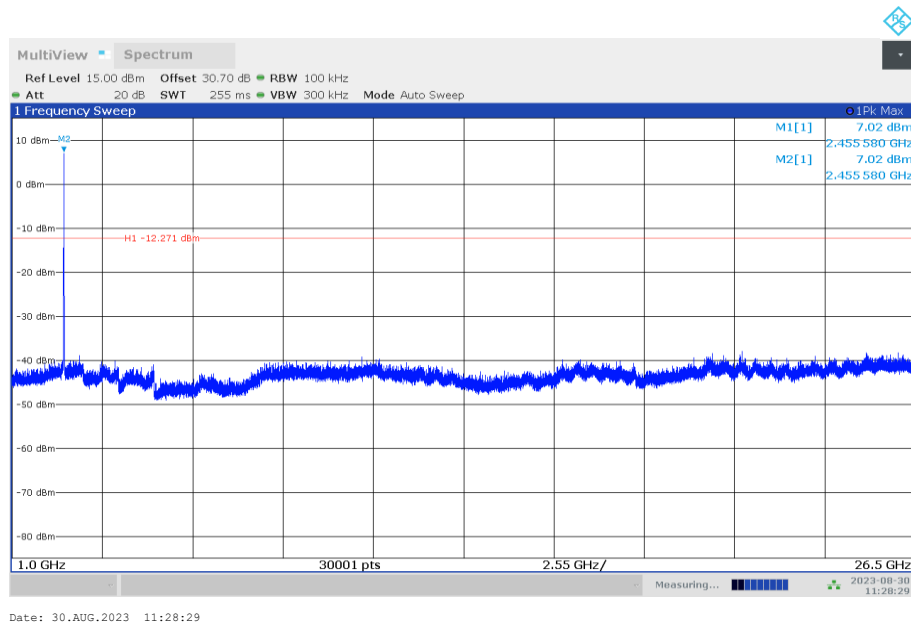


**Fig.A.6.1.18 Transmitter Spurious Emission - Conducted (802.11g, Ch11, 1 GHz-26.5 GHz)**

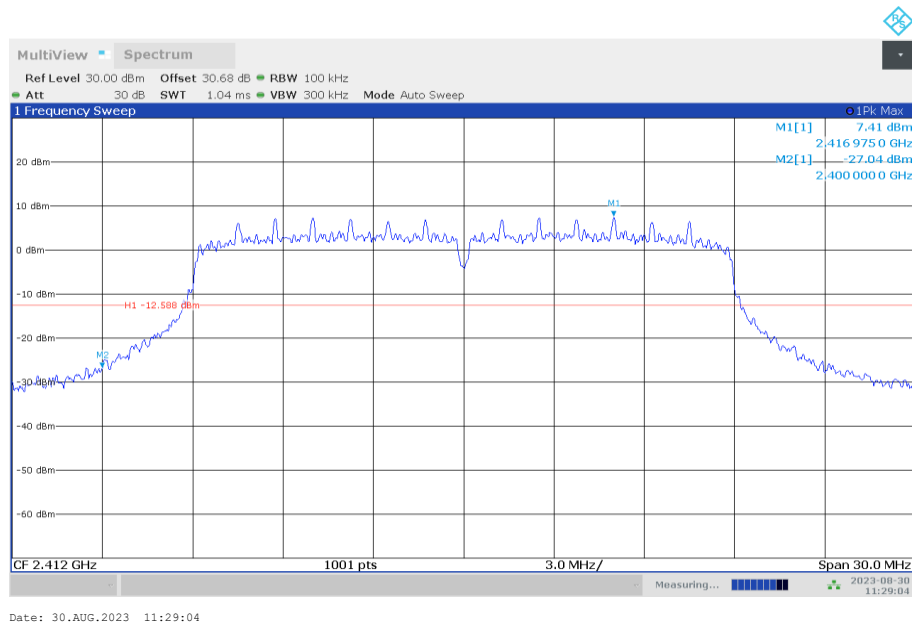


**Fig.A.6.1.19 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, Center Frequency)**

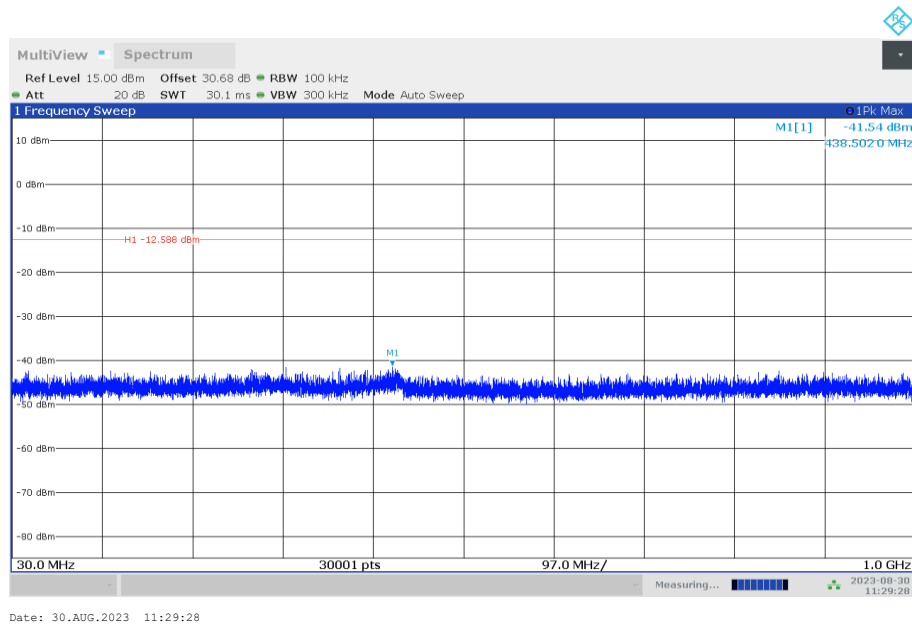

**Fig.A.6.1.20 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 30 MHz-1 GHz)**

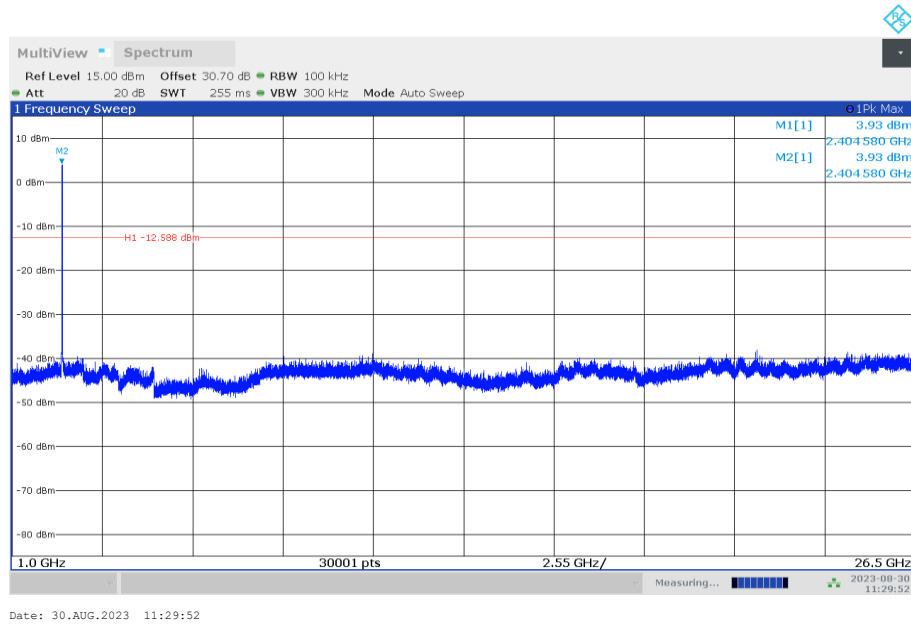


**Fig.A.6.1.21 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch1, 1 GHz-26.5 GHz)**

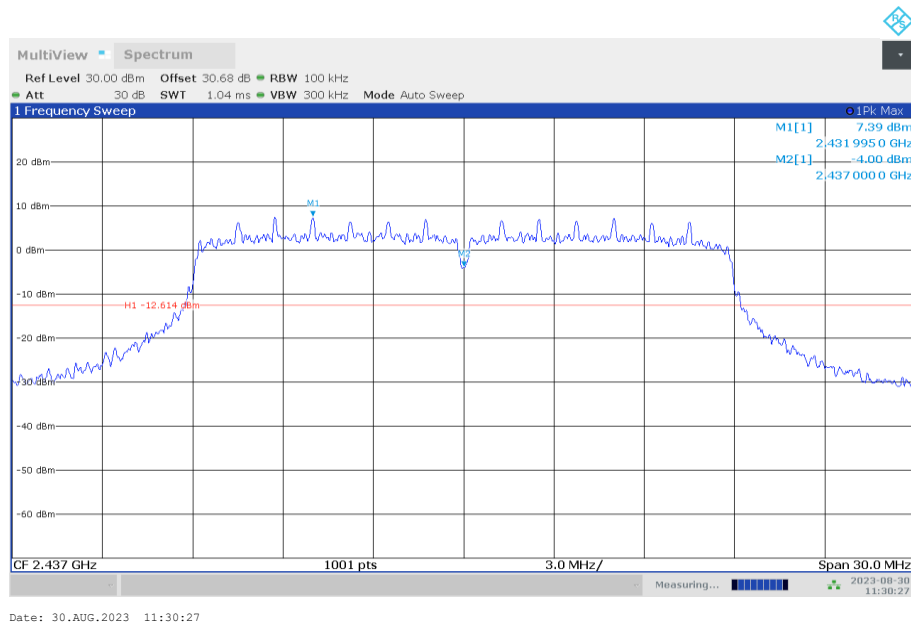


**Fig.A.6.1.22 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, Center Frequency)**




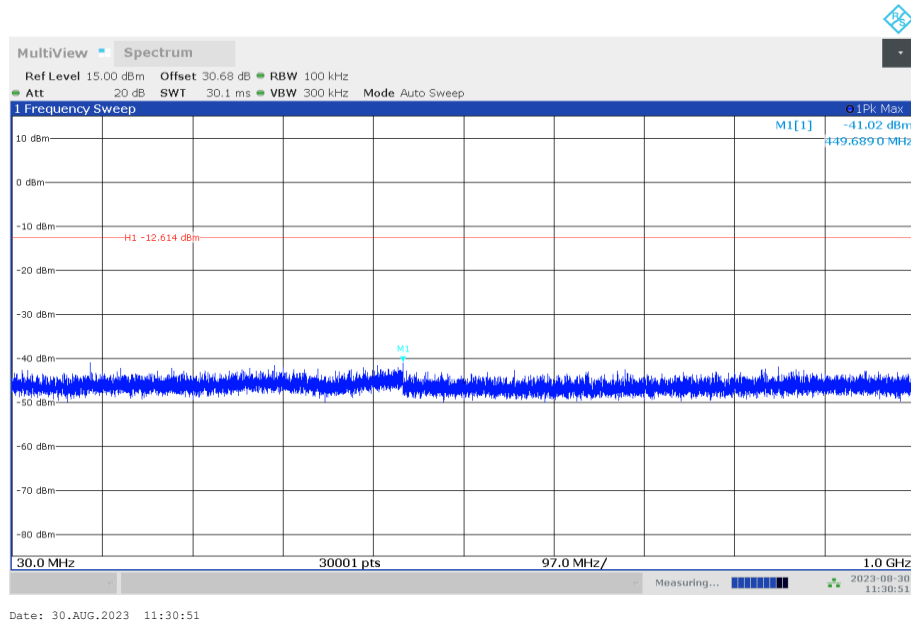


**Fig.A.6.1.23 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 30 MHz-1 GHz)**

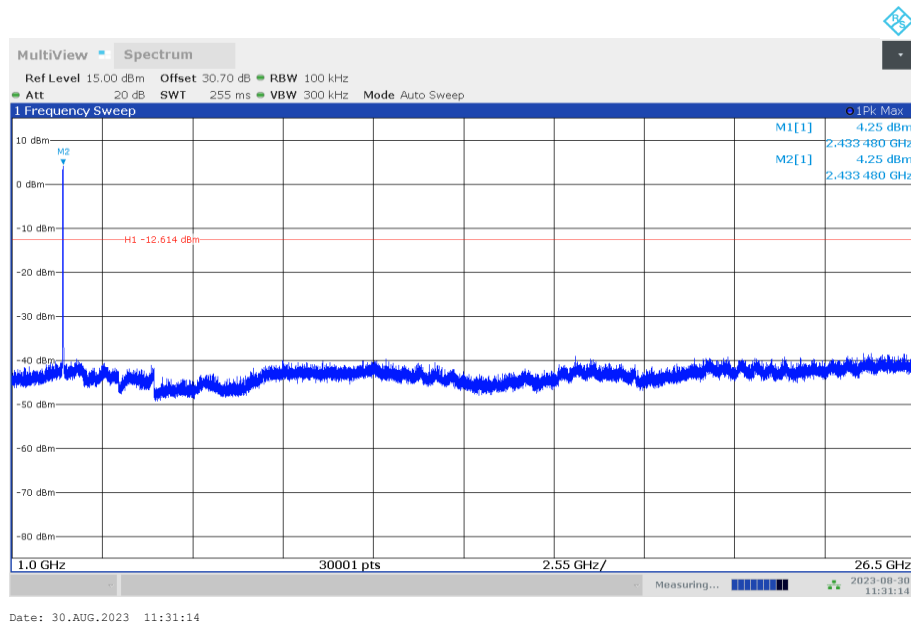


**Fig.A.6.1.24 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch6, 1 GHz-26.5 GHz)**

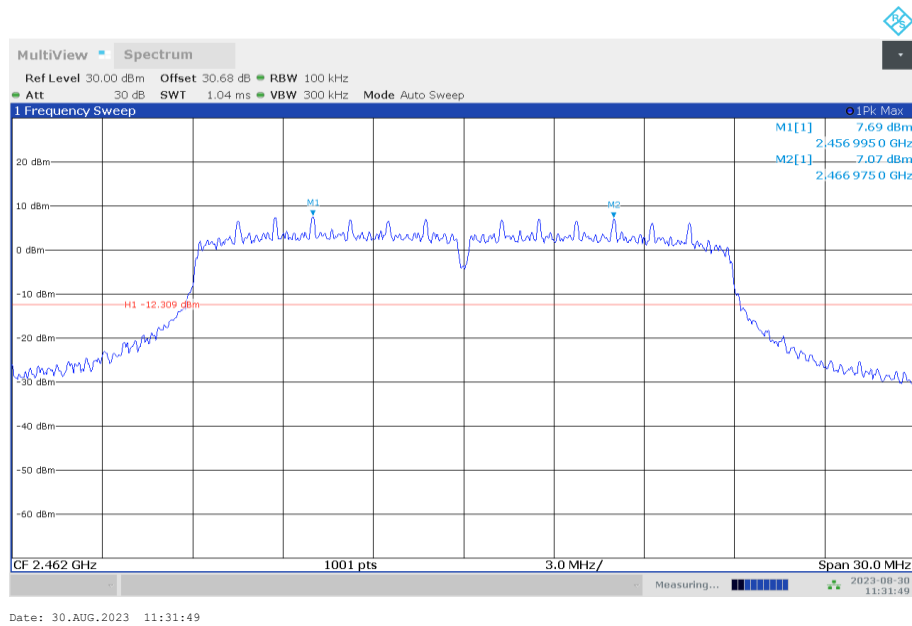


**Fig.A.6.1.25 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, Center Frequency)**

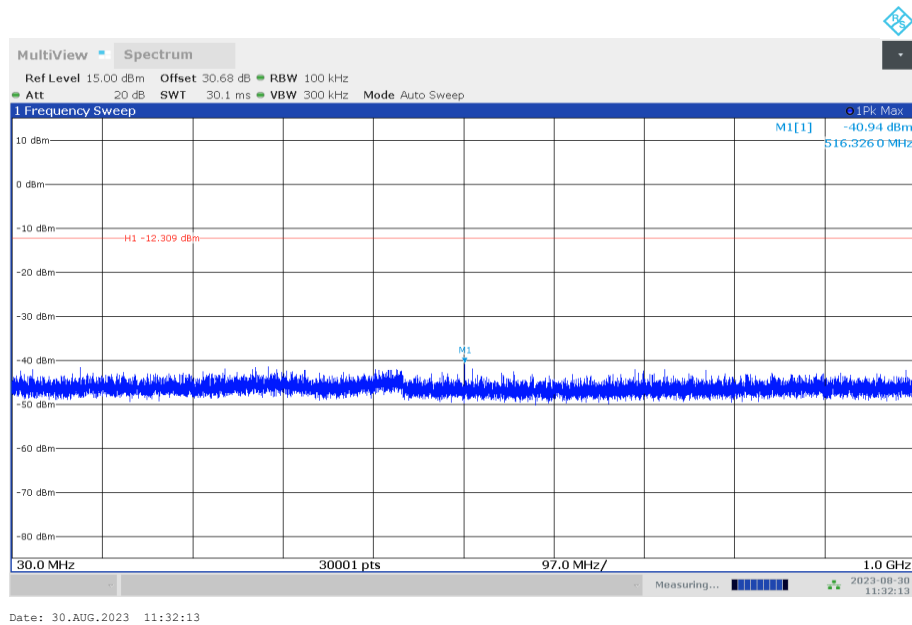


**Fig.A.6.1.26 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 30 MHz-1 GHz)**

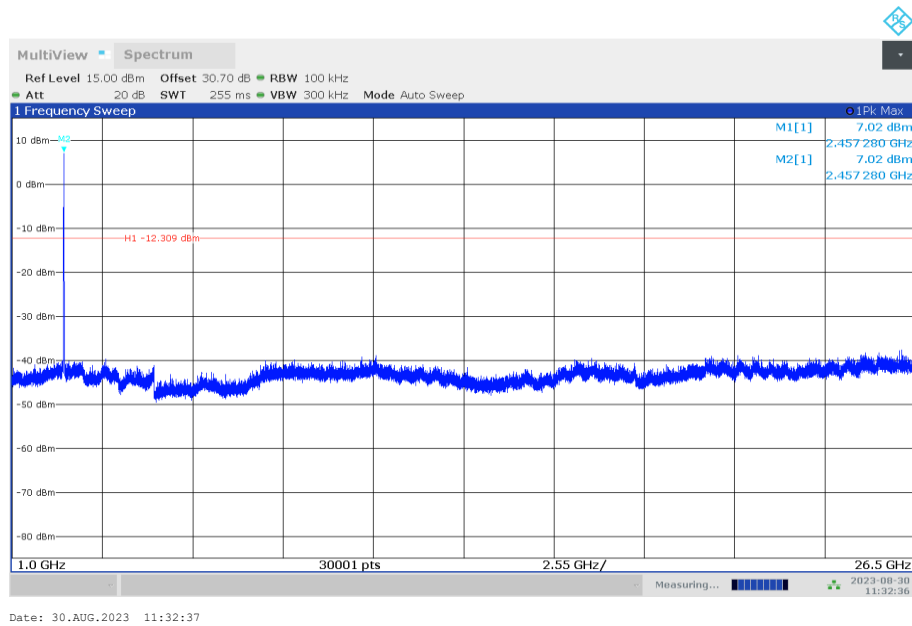


**Fig.A.6.1.27 Transmitter Spurious Emission - Conducted (802.11n-HT20, Ch11, 1 GHz-26.5 GHz)**

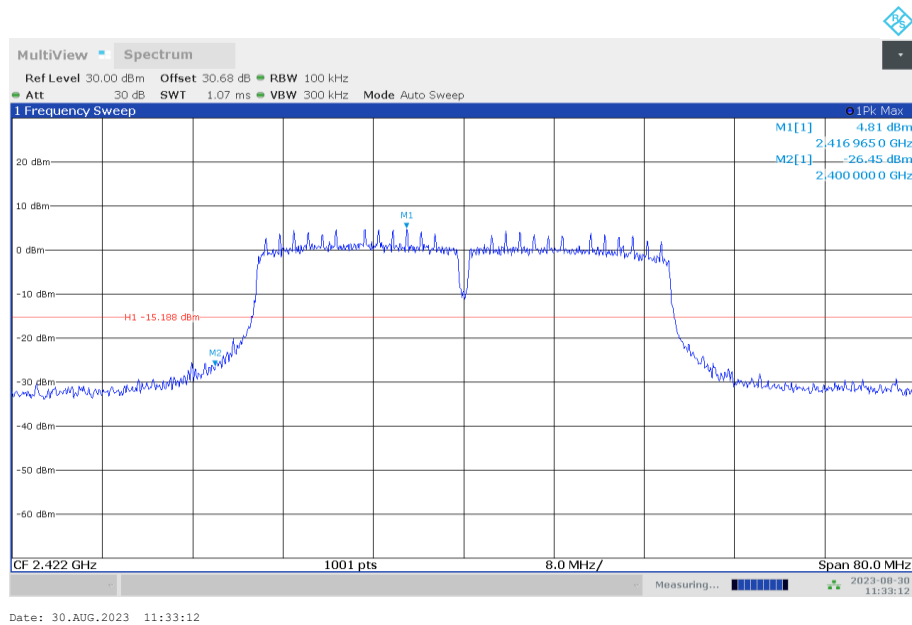


**Fig.A.6.1.28 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, Center Frequency)**

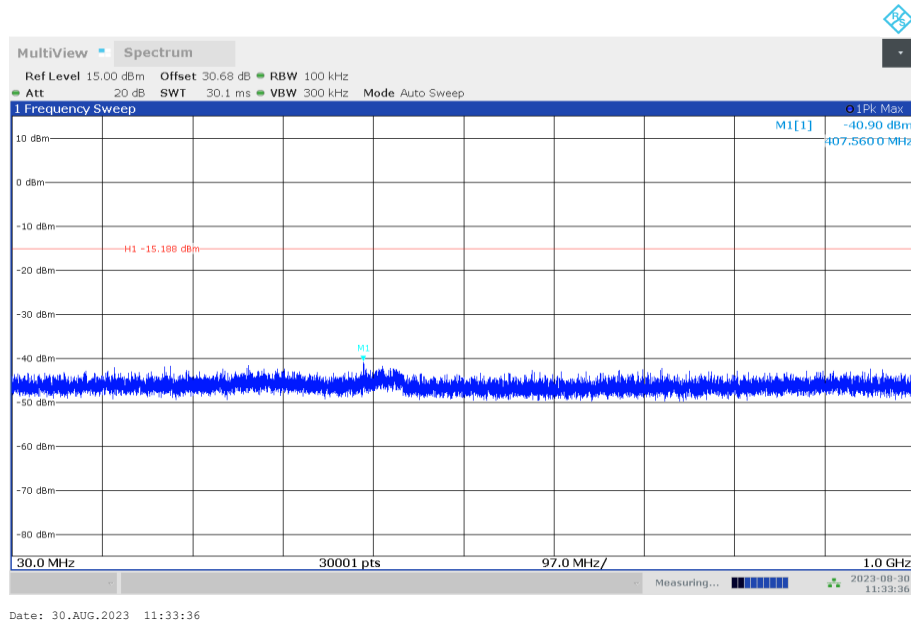


**Fig.A.6.1.29 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 30 MHz-1 GHz)**

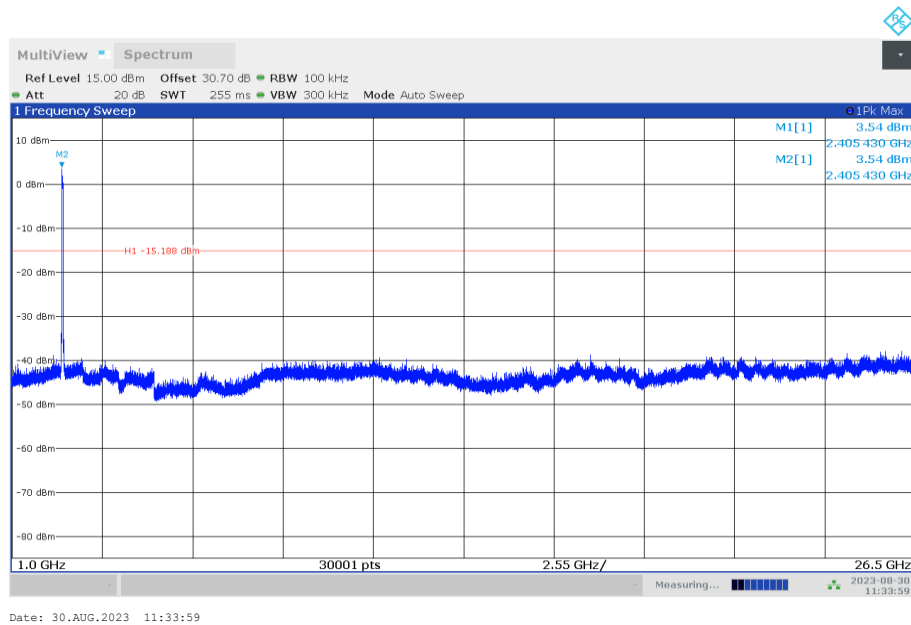


**Fig.A.6.1.30 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch3, 1 GHz-26.5 GHz)**

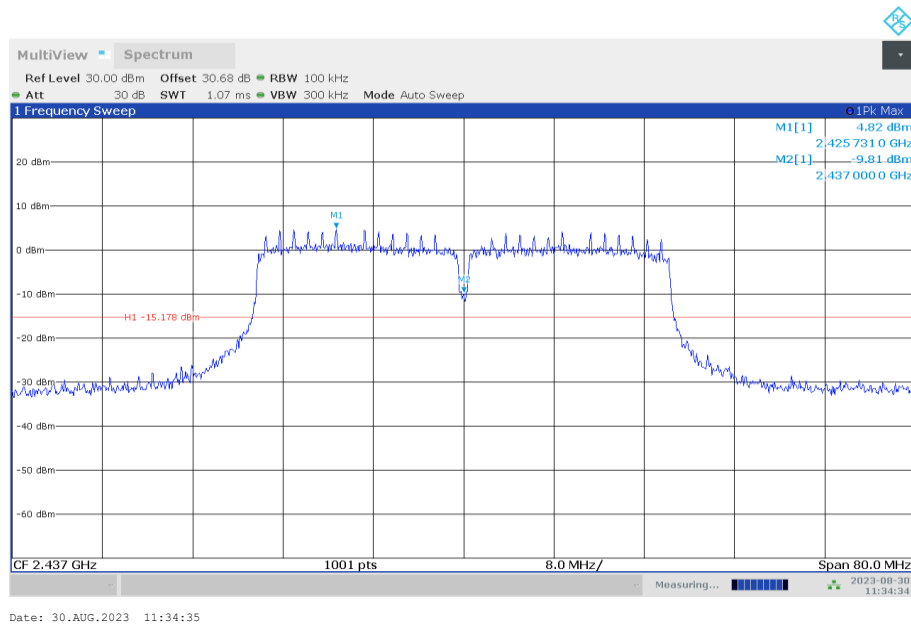


**Fig.A.6.1.31 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, Center Frequency)**

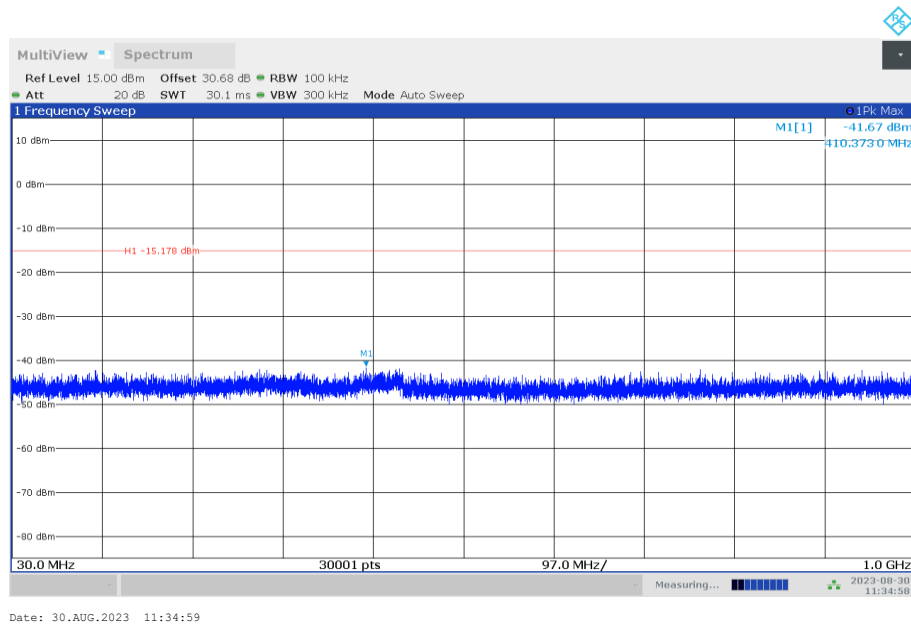


**Fig.A.6.1.32 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 30 MHz-1 GHz)**

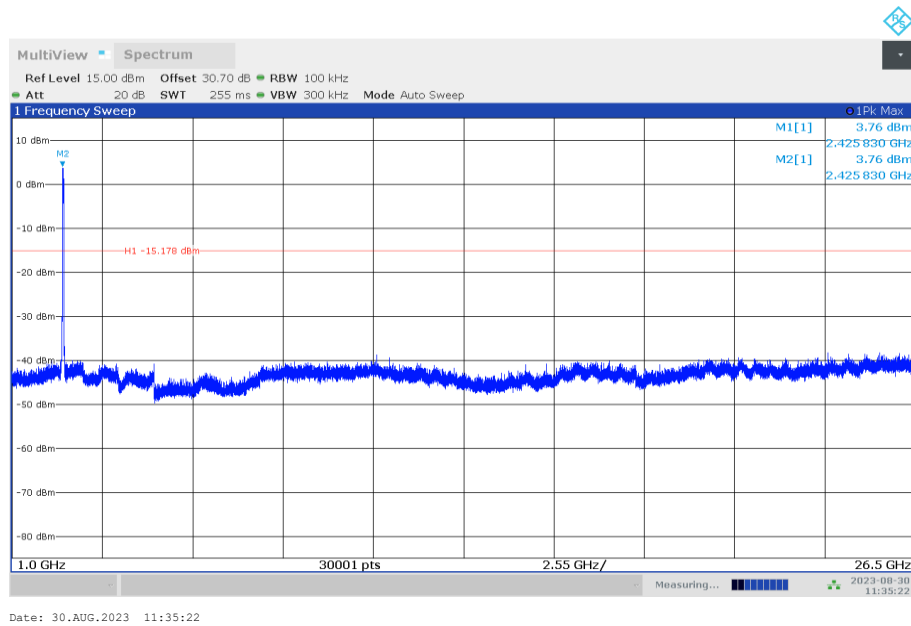


**Fig.A.6.1.33 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch6, 1 GHz-26.5 GHz)**

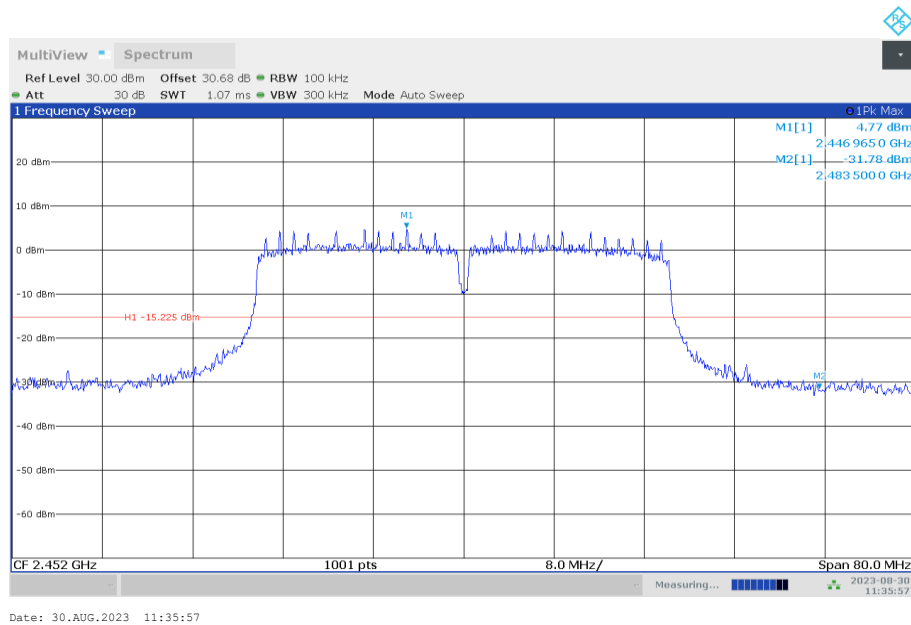

**Fig.A.6.1.34 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, Center Frequency)**

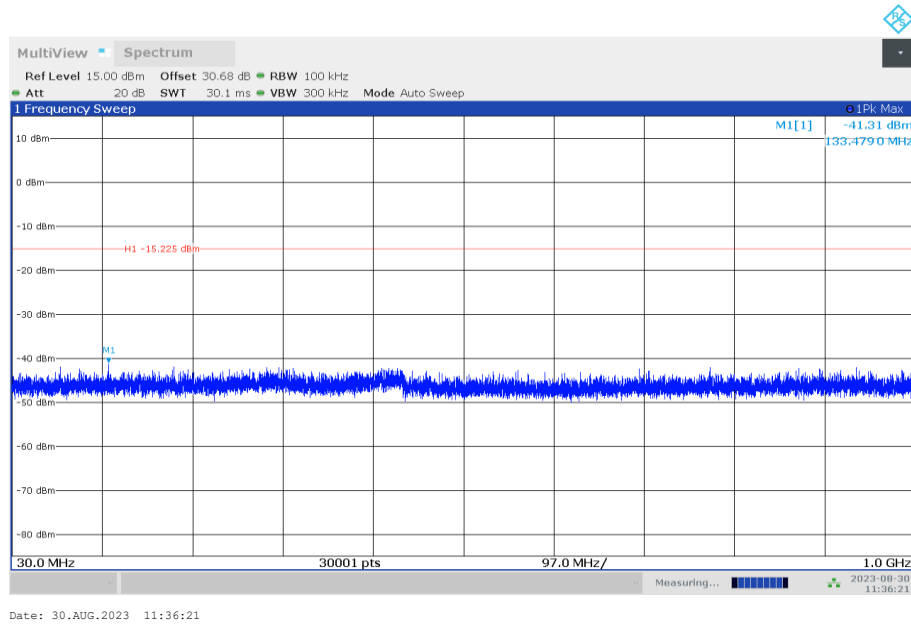

**Fig.A.6.1.35 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 30 MHz-1 GHz)**

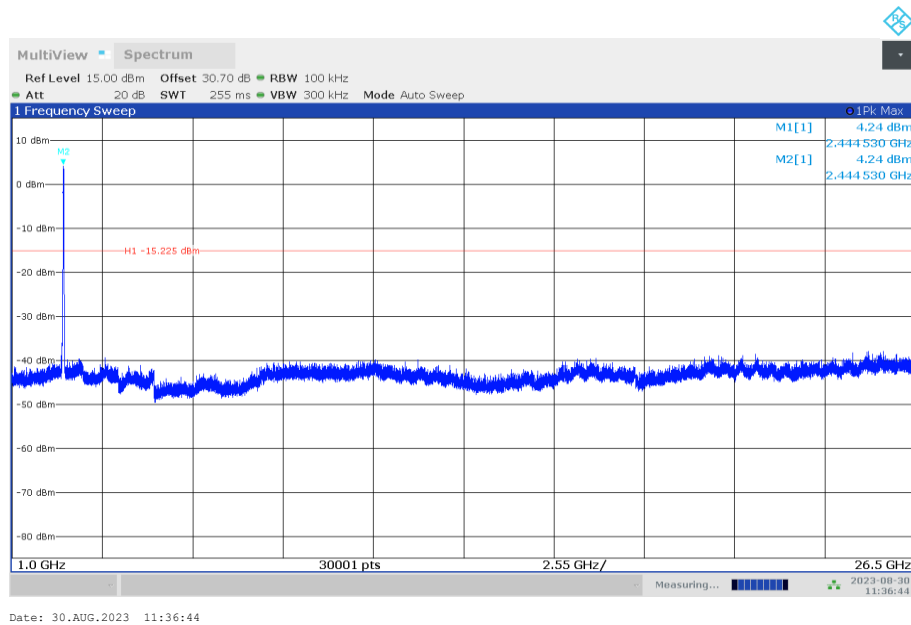

**Fig.A.6.1.36 Transmitter Spurious Emission - Conducted (802.11n-HT40, Ch9, 1 GHz-26.5 GHz)**

**Conclusion: Pass**

### **A.6.2 Transmitter Spurious Emission - Radiated**

**Method of Measurement: See ANSI C63.10-2013-clause 6.4 &6.5 & 6.6**

**Measurement Limit:**

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

**Limit in restricted band:**

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Frequency (MHz)	Field strength(μV/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

### **Test Condition**

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Frequency of emission (MHz)	RBW/VBW	Sweep Time(s)
30-1000	100KHz/300KHz	5
1000-4000	1MHz/1MHz	15
4000-18000	1MHz/1MHz	40
18000-26500	1MHz/1MHz	20

**EUT ID: EUT1**



**Measurement Results:**
**802.11b mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11b	1	2.31GHz~2.43GHz---L	Fig.A.6.2.1	<b>P</b>
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.2	<b>P</b>

**802.11g mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11g	1	2.31GHz~2.43GHz---L	Fig.A.6.2.3	<b>P</b>
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.4	<b>P</b>

**802.11n-HT20 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT20)	1	2.31GHz~2.43GHz---L	Fig.A.6.2.5	<b>P</b>
	11	2.45GHz~2.50GHz---H	Fig.A.6.2.6	<b>P</b>

**802.11n-HT40 mode**

Mode	Channel	Frequency Range	Test Results	Conclusion
802.11n (HT40)	3	2.31GHz~2.43GHz---L	Fig.A.6.2.7	<b>P</b>
	9	2.45GHz~2.50GHz---H	Fig.A.6.2.8	<b>P</b>

**Conclusion: Pass**
**Note:**

A "reference path loss" is established and the  $A_{Rpl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

$P_{Mea}$  is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

**Peak**  
**802.11b**

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17981.000	50.56	-29.40	46.00	33.96	74.00	23.44	V
12312.000	46.76	-32.10	39.00	39.86	74.00	27.24	H
14626.500	46.13	-30.80	41.70	35.23	74.00	27.87	H
9179.500	43.29	-34.70	37.70	40.29	74.00	30.71	V
7527.500	41.12	-35.50	36.30	40.32	74.00	32.88	H
2384.500	52.87	-19.80	28.20	44.47	74.00	21.13	V

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17982.000	50.73	-29.40	46.00	34.13	74.00	23.27	H
12548.000	47.58	-31.20	39.20	39.58	74.00	26.42	H
14527.500	46.94	-30.60	41.90	35.64	74.00	27.06	V
9170.500	43.40	-34.70	37.70	40.40	74.00	30.60	H
7802.000	41.22	-35.60	36.50	40.32	74.00	32.78	V
3465.000	40.68	-37.60	30.80	47.48	74.00	33.32	V

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17948.500	50.20	-29.40	46.00	33.60	74.00	23.80	H
12311.000	47.80	-32.10	39.00	40.90	74.00	26.20	H
14490.500	46.28	-29.70	41.90	34.08	74.00	27.72	H
9157.500	43.17	-34.30	37.70	39.77	74.00	30.83	H
7923.500	40.82	-35.40	36.80	39.42	74.00	33.18	V
2487.500	54.76	-19.70	28.20	46.26	74.00	19.24	V

**802.11g**

## Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17952.500	50.00	-29.40	46.00	33.40	74.00	24.00	H
13184.000	46.83	-31.00	40.40	37.43	74.00	27.17	H
12311.500	46.29	-32.10	39.00	39.39	74.00	27.71	H
9180.500	43.38	-34.70	37.70	40.38	74.00	30.62	H
7987.500	40.95	-35.40	36.90	39.45	74.00	33.05	V
2389.500	58.51	-19.80	28.20	50.11	74.00	15.49	V

## Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17978.000	50.17	-29.40	46.00	33.57	74.00	23.83	V
14601.000	46.70	-29.00	41.90	33.80	74.00	27.30	V
12721.500	45.94	-31.90	39.50	38.34	74.00	28.06	H
9154.000	42.61	-34.30	37.70	39.21	74.00	31.39	H
7993.500	40.95	-35.40	36.90	39.45	74.00	33.05	V
3596.500	39.74	-38.10	31.50	46.34	74.00	34.26	H

## Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17947.500	49.83	-29.40	46.00	33.23	74.00	24.17	V
14554.500	46.40	-29.00	41.90	33.50	74.00	27.60	V
12541.500	45.70	-31.20	39.20	37.70	74.00	28.30	H
8857.500	43.08	-34.50	37.80	39.78	74.00	30.92	V
7990.000	40.80	-35.40	36.90	39.30	74.00	33.20	H
2485.000	58.08	-19.70	28.20	49.58	74.00	15.92	V

**802.11n-HT20**

## Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17948.000	50.30	-29.40	46.00	33.70	74.00	23.70	V
12244.500	46.14	-32.50	39.00	39.64	74.00	27.86	V
14671.500	46.03	-30.00	41.50	34.53	74.00	27.97	H
9934.500	42.69	-33.80	37.90	38.59	74.00	31.31	H
7999.000	40.97	-35.40	36.90	39.47	74.00	33.03	H
2389.900	60.87	-19.80	28.20	52.47	74.00	13.13	V

## Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.500	50.27	-29.40	46.00	33.67	74.00	23.73	V
12335.000	46.99	-32.30	39.00	40.39	74.00	27.01	H
13208.000	46.02	-31.00	40.40	36.62	74.00	27.98	V
9800.500	42.98	-33.80	38.00	38.78	74.00	31.02	V
7432.000	40.74	-35.50	36.50	39.74	74.00	33.26	H
4380.500	37.29	-37.70	32.20	42.79	74.00	36.71	H

## Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17985.000	49.63	-29.40	46.00	33.03	74.00	24.37	H
14537.500	46.70	-30.60	41.90	35.40	74.00	27.30	H
12811.500	46.28	-31.50	39.80	37.98	74.00	27.72	H
9167.000	42.83	-34.70	37.70	39.83	74.00	31.17	V
3484.500	41.32	-38.00	31.00	48.32	74.00	32.68	H
2485.000	60.38	-19.70	28.20	51.88	74.00	13.62	H

**802.11n-HT40**

## Ch3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.000	50.81	-29.40	46.00	34.21	74.00	23.19	H
14642.500	46.04	-30.80	41.70	35.14	74.00	27.96	V
12580.500	46.01	-32.20	39.30	38.91	74.00	27.99	H
8807.500	42.80	-34.20	37.90	39.10	74.00	31.20	H
7435.500	41.04	-35.50	36.50	40.04	74.00	32.96	H
2389.000	61.98	-19.80	28.20	53.58	74.00	12.02	V

## Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17975.500	50.26	-29.40	46.00	33.66	74.00	23.74	H
12312.000	46.64	-32.10	39.00	39.74	74.00	27.36	V
13234.000	46.41	-32.00	40.50	37.91	74.00	27.59	H
9202.000	42.41	-34.70	37.70	39.41	74.00	31.59	V
7985.500	41.74	-35.40	36.90	40.24	74.00	32.26	V
3470.000	39.10	-38.00	31.00	46.10	74.00	34.90	V

## Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17945.500	49.88	-29.40	46.00	33.28	74.00	24.12	H
12315.500	46.31	-32.10	39.00	39.41	74.00	27.69	V
14690.000	46.11	-30.00	41.50	34.61	74.00	27.89	H
9677.500	42.73	-34.00	37.70	39.03	74.00	31.27	H
7504.000	40.63	-35.10	36.40	39.33	74.00	33.37	H
2485.200	64.94	-19.70	28.20	56.44	74.00	9.06	H

**Average**  
**802.11b**

Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17951.500	40.64	-29.40	46.00	24.04	54.00	13.36	H
12540.500	37.36	-31.20	39.20	29.36	54.00	16.64	H
14559.000	36.99	-29.00	41.90	24.09	54.00	17.01	V
9648.000	33.34	-34.30	37.60	30.04	54.00	20.66	V
3460.000	32.45	-37.60	30.80	39.25	54.00	21.55	V
2388.300	43.49	-19.80	28.20	35.09	54.00	10.51	H

Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17946.000	40.95	-29.40	46.00	24.35	54.00	13.05	V
12817.000	36.80	-31.50	39.80	28.50	54.00	17.20	V
14674.000	36.79	-30.00	41.50	25.29	54.00	17.21	H
9748.000	34.38	-34.50	37.80	31.08	54.00	19.62	H
3465.500	33.60	-38.00	31.00	40.60	54.00	20.40	V
7972.000	31.34	-35.40	36.90	29.84	54.00	22.66	H

Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.500	40.57	-29.40	46.00	23.97	54.00	13.43	H
12564.000	37.06	-31.20	39.20	29.06	54.00	16.94	H
14647.000	36.88	-30.80	41.70	25.98	54.00	17.12	V
9848.000	34.49	-34.10	37.90	30.69	54.00	19.51	V
7981.500	31.32	-35.40	36.90	29.82	54.00	22.68	H
2486.300	44.94	-19.70	28.20	36.44	54.00	9.06	V

**802.11g**

## Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17981.500	40.70	-29.40	46.00	24.10	54.00	13.30	H
14647.000	36.99	-30.80	41.70	26.09	54.00	17.01	V
12559.000	36.96	-31.20	39.20	28.96	54.00	17.04	V
9648.000	33.75	-34.30	37.60	30.45	54.00	20.25	H
7978.000	31.28	-35.40	36.90	29.78	54.00	22.72	H
2389.600	48.50	-19.80	28.20	40.10	54.00	5.50	H

## Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17911.500	40.45	-29.40	46.00	23.85	54.00	13.55	V
12311.500	36.89	-32.10	39.00	29.99	54.00	17.11	V
14649.000	36.84	-30.80	41.70	25.94	54.00	17.16	V
3597.000	35.59	-38.10	31.50	42.19	54.00	18.41	H
9748.000	34.10	-34.50	37.80	30.80	54.00	19.90	H
7994.500	31.52	-35.40	36.90	30.02	54.00	22.48	H

## Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17943.000	40.66	-29.40	46.00	24.06	54.00	13.34	V
14691.000	36.50	-30.00	41.50	25.00	54.00	17.50	V
12560.000	36.47	-31.20	39.20	28.47	54.00	17.53	H
9848.000	33.70	-34.10	37.90	29.90	54.00	20.30	V
7994.500	31.99	-35.40	36.90	30.49	54.00	22.01	V
2485.100	47.76	-19.70	28.20	39.26	54.00	6.24	V

**802.11n-HT20**

## Ch1

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17979.500	40.75	-29.40	46.00	24.15	54.00	13.25	H
14524.500	36.88	-30.60	41.90	25.58	54.00	17.12	V
12309.000	36.76	-32.10	39.00	29.86	54.00	17.24	H
9648.000	33.55	-34.30	37.60	30.25	54.00	20.45	H
3517.500	32.20	-38.00	31.20	39.00	54.00	21.80	H
2389.600	49.67	-19.80	28.20	41.27	54.00	4.33	V

## Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.500	40.45	-29.40	46.00	23.85	54.00	13.55	V
14487.500	36.68	-29.70	41.90	24.48	54.00	17.32	V
12539.000	36.55	-31.20	39.20	28.55	54.00	17.45	H
9748.000	33.65	-34.50	37.80	30.35	54.00	20.35	V
7445.500	31.32	-35.50	36.50	30.32	54.00	22.68	H
3312.500	29.64	-38.10	31.20	36.54	54.00	24.36	V

## Ch11

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17984.000	40.79	-29.40	46.00	24.19	54.00	13.21	H
14647.000	36.68	-30.80	41.70	25.78	54.00	17.32	V
12561.500	36.40	-31.20	39.20	28.40	54.00	17.60	V
3425.500	34.44	-37.60	30.80	41.24	54.00	19.56	V
8510.000	33.05	-34.60	37.30	30.35	54.00	20.95	V
2485.100	49.36	-19.70	28.20	40.86	54.00	4.64	H



**802.11n-HT40**

## Ch3

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17980.500	40.84	-29.40	46.00	24.24	54.00	13.16	V
14552.500	36.63	-30.60	41.90	25.33	54.00	17.37	V
12676.500	36.57	-31.90	39.50	28.97	54.00	17.43	H
3418.000	36.14	-37.60	30.80	42.94	54.00	17.86	V
9688.000	33.24	-34.00	37.70	29.54	54.00	20.76	H
2389.600	49.32	-19.80	28.20	40.92	54.00	4.68	V


## Ch6

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17979.500	40.51	-29.40	46.00	23.91	54.00	13.49	H
13157.000	36.70	-31.90	40.30	28.30	54.00	17.30	V
12562.000	36.52	-31.20	39.20	28.52	54.00	17.48	H
9748.000	33.49	-34.50	37.80	30.19	54.00	20.51	V
7994.000	31.46	-35.40	36.90	29.96	54.00	22.54	H
3470.000	29.88	-38.00	31.00	36.88	54.00	24.12	V


## Ch9

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
17957.000	40.50	-29.40	46.00	23.90	54.00	13.50	V
14488.000	36.49	-29.70	41.90	24.29	54.00	17.51	V
12561.000	36.47	-31.20	39.20	28.47	54.00	17.53	H
9808.000	33.41	-34.10	37.90	29.61	54.00	20.59	V
7595.500	31.32	-35.60	36.30	30.62	54.00	22.68	V
2485.700	53.04	-19.70	28.20	44.54	54.00	0.96	H


Test graphs as below:

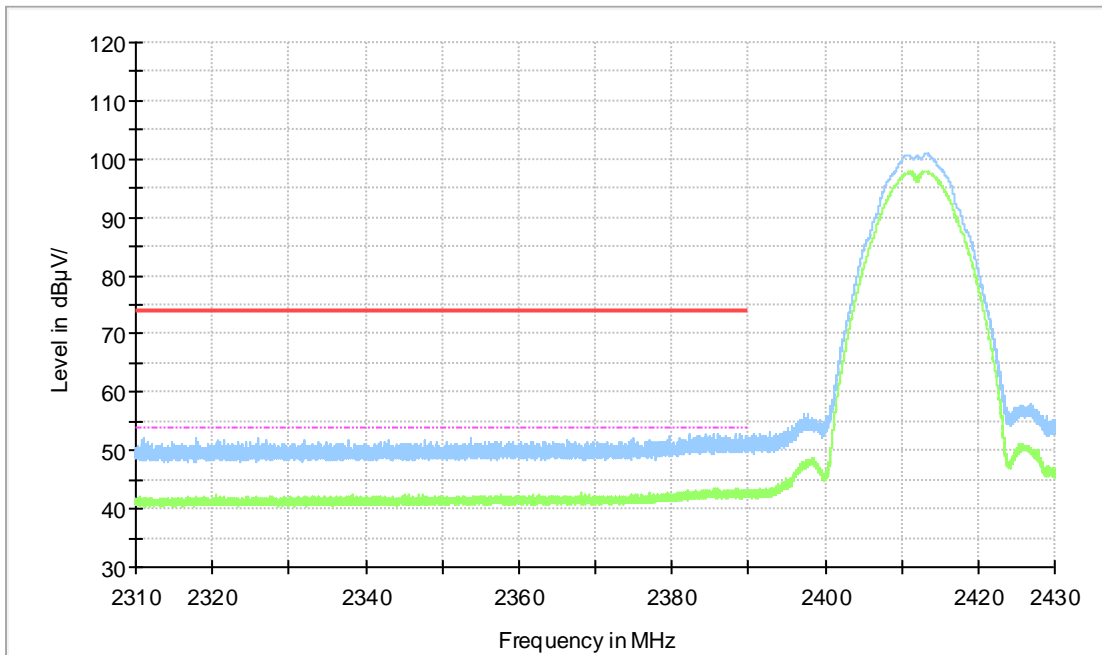


**Fig.A.6.2.1 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch1, 2.31 GHz – 2.43GHz**

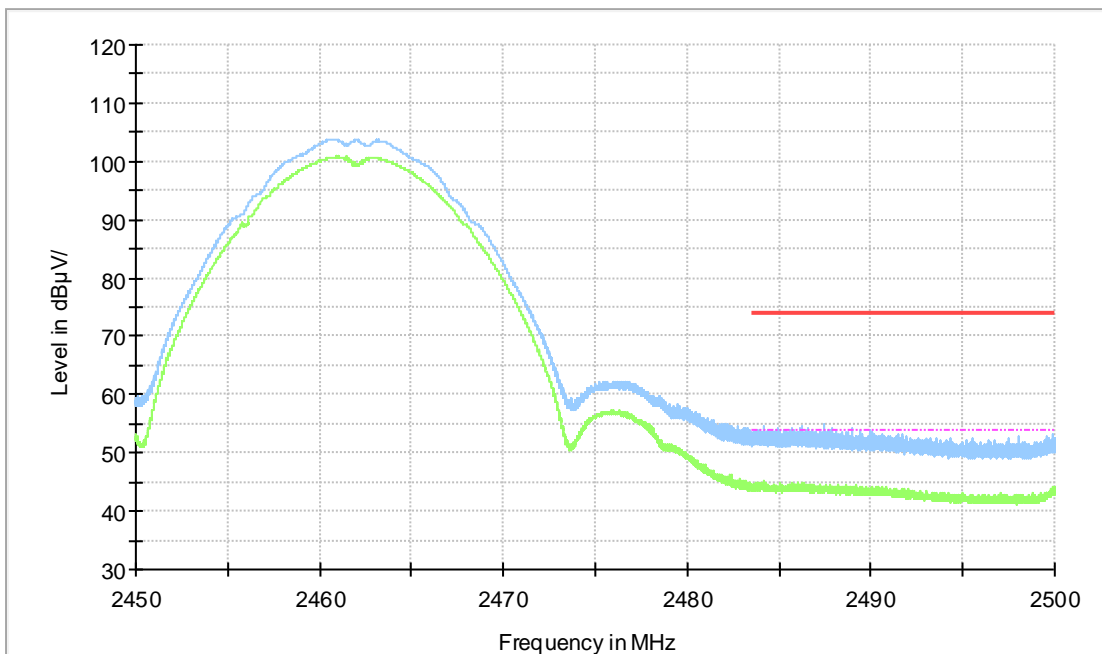


**Fig.A.6.2.2 Transmitter Spurious Emission - Radiated (Power): 802.11b, ch11, 2.45 GHz - 2.50GHz**

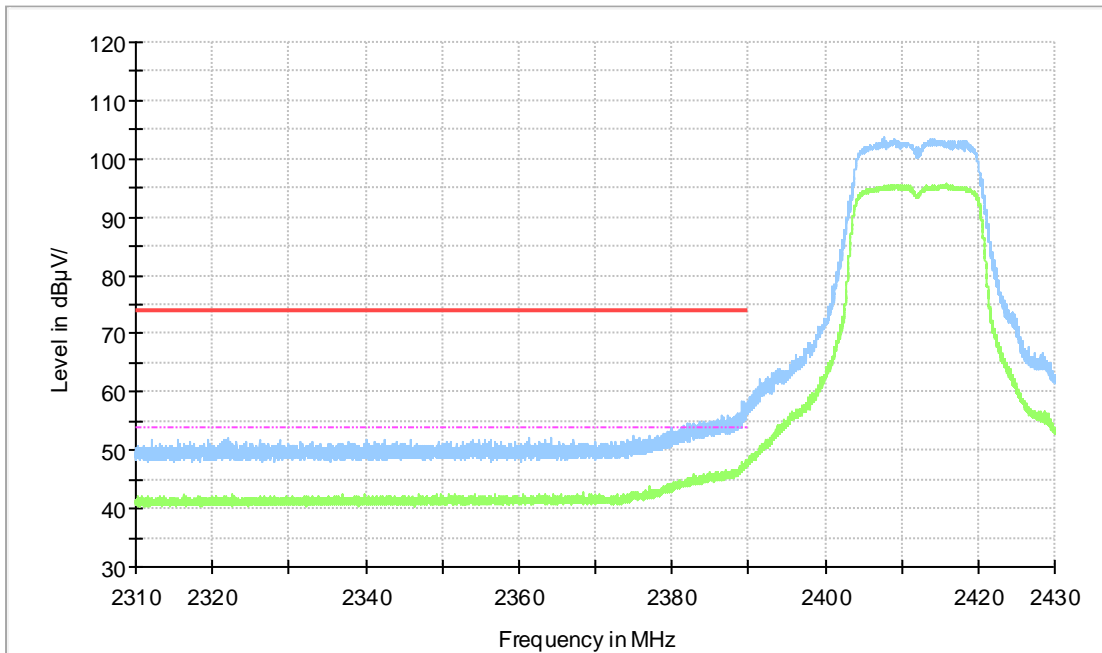


**Fig.A.6.2.3 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch1, 2.31 GHz - 2.43GHz**

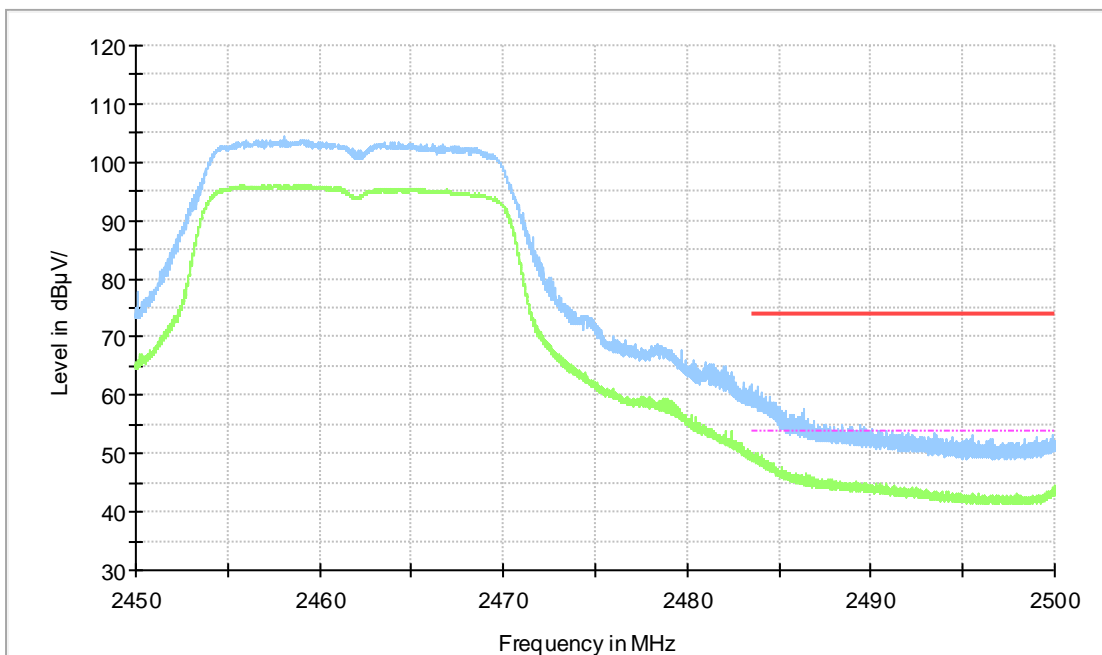


**Fig.A.6.2.4 Transmitter Spurious Emission - Radiated (Power): 802.11g, ch11, 2.45 GHz - 2.50GHz**

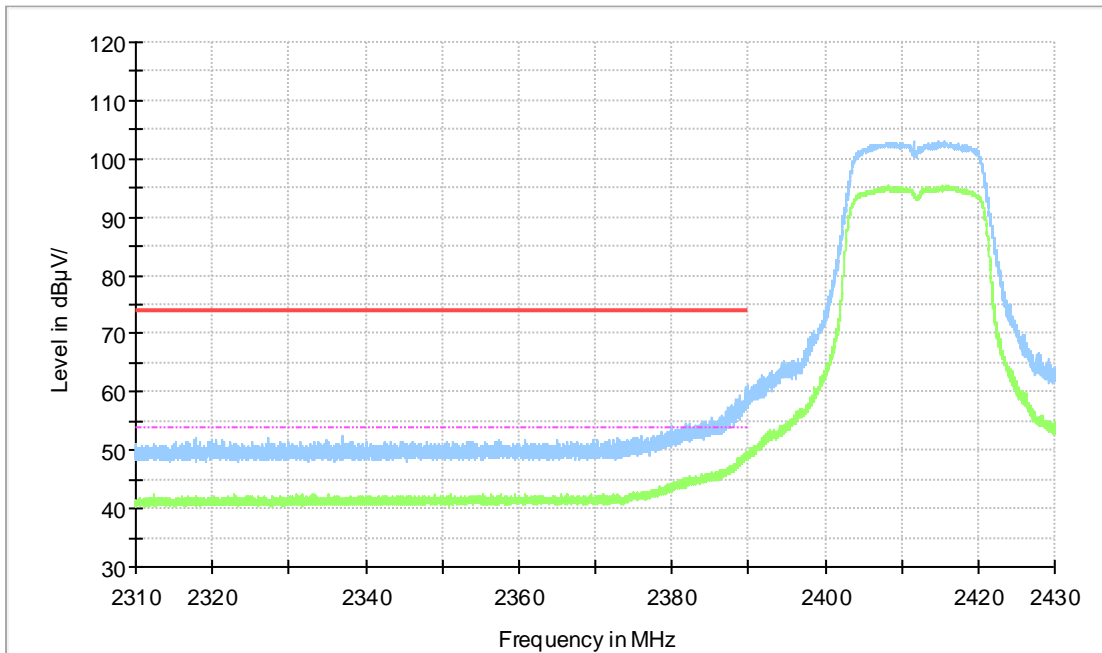


**Fig.A.6.2.5 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch1, 2.31 GHz - 2.43GHz**

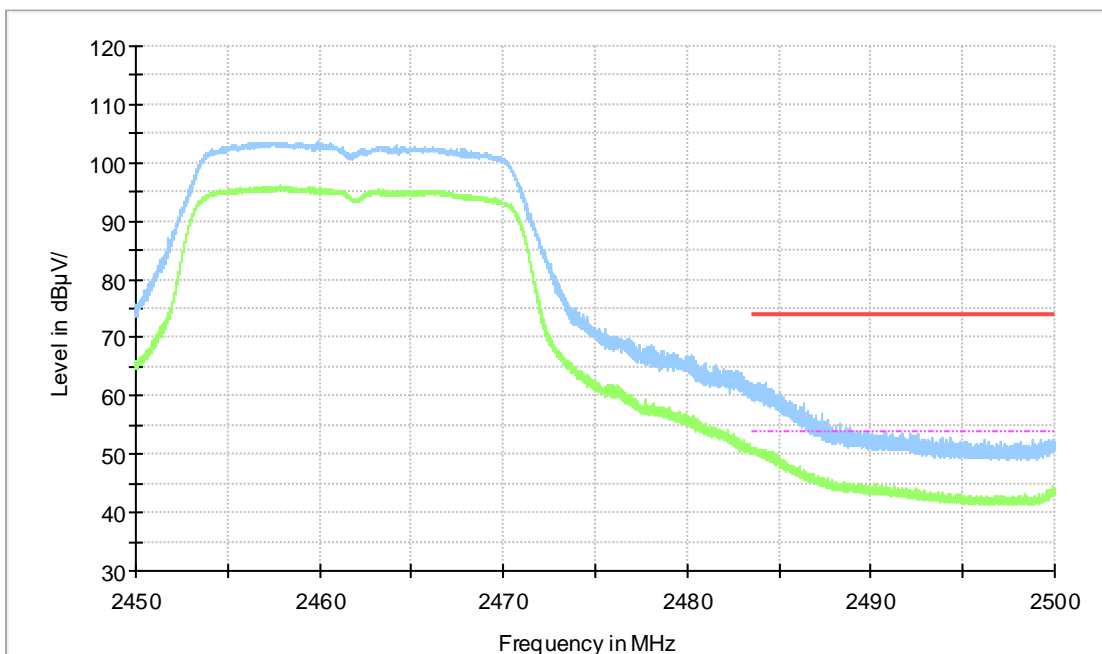

**Fig.A.6.2.6 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT20, ch11, 2.45 GHz - 2.50GHz**

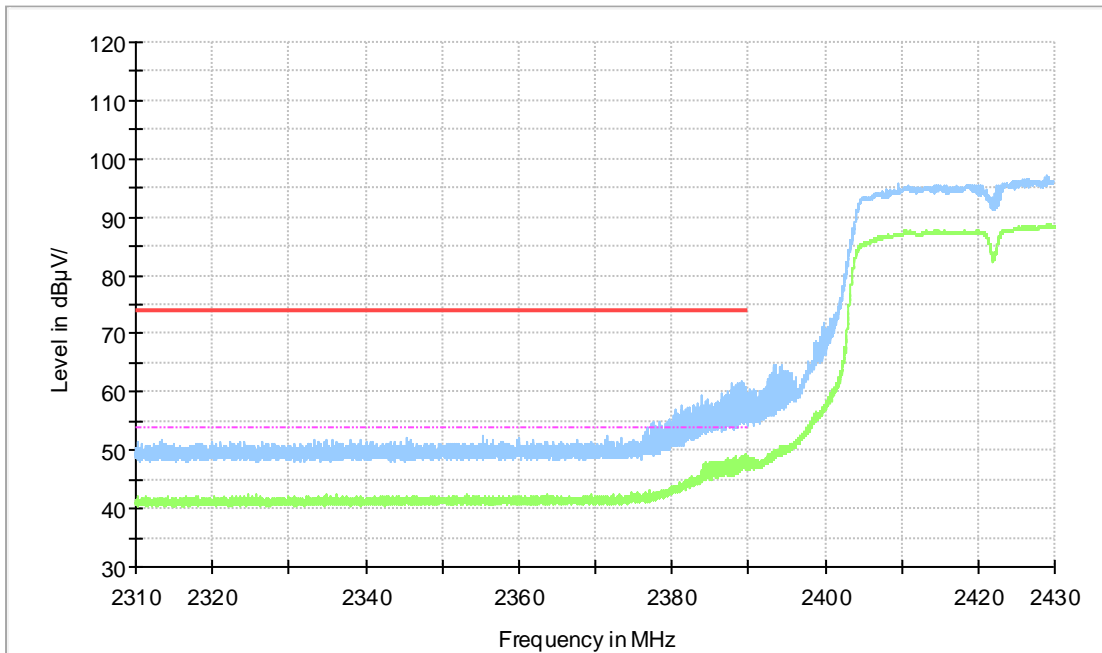

**Fig.A.6.2.7 Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch3, 2.31 GHz - 2.43GHz**

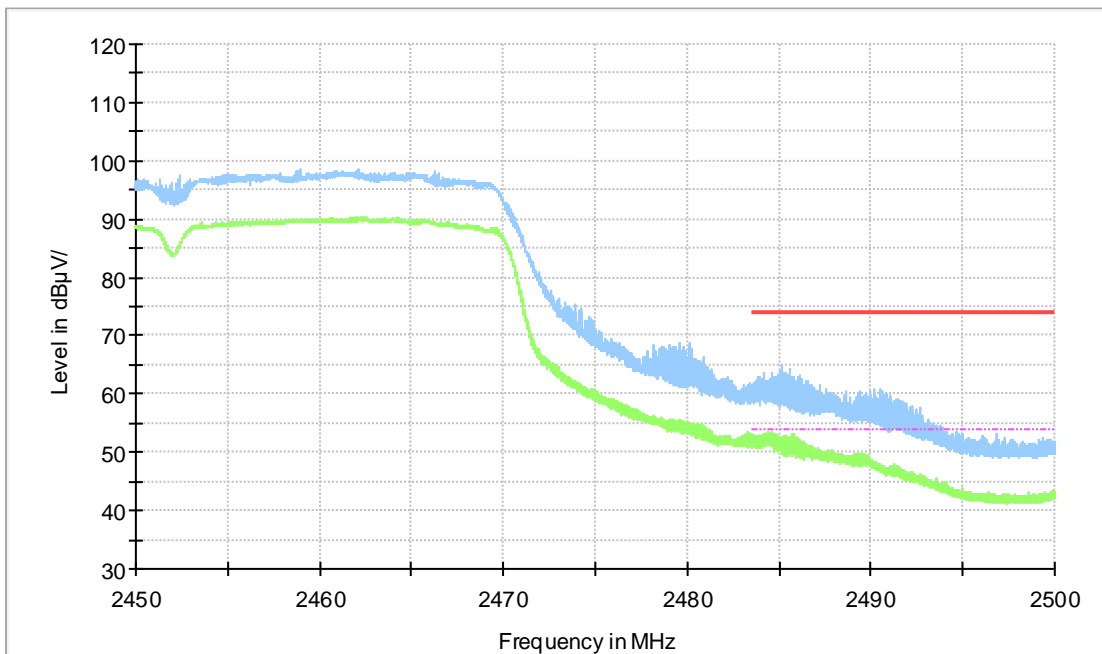

**Transmitter Spurious Emission - Radiated (Power): 802.11n-HT40, ch9, 2.45 GHz - 2.50GHz**

## **A.7. AC Power-line Conducted Emission**

### **Method of Measurement: See ANSI C63.10-2013-clause 6.2**

- 1 The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
- 2 If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
- 3 The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
- 4 If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.
- 5 If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.<sup>36</sup> Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

### **Test Condition:**

<b>Voltage (V)</b>	<b>Frequency (Hz)</b>
120	60

**Measurement Result and limit:**

WLAN (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	66 to 56	Fig.A.7.1	Fig.A.7.2	<b>P</b>
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.


WLAN (Average Limit)

Frequency range (MHz)	Average Limit (dB $\mu$ V)	Result (dB $\mu$ V)		Conclusion
		With charger		
		802.11b	Idle	
0.15 to 0.5	56 to 46	Fig.A.7.1	Fig.A.7.2	<b>P</b>
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

**Conclusion: Pass**
**Test graphs as below:**

**Measurement results for Set.1:**  
**Result for Traffic:**

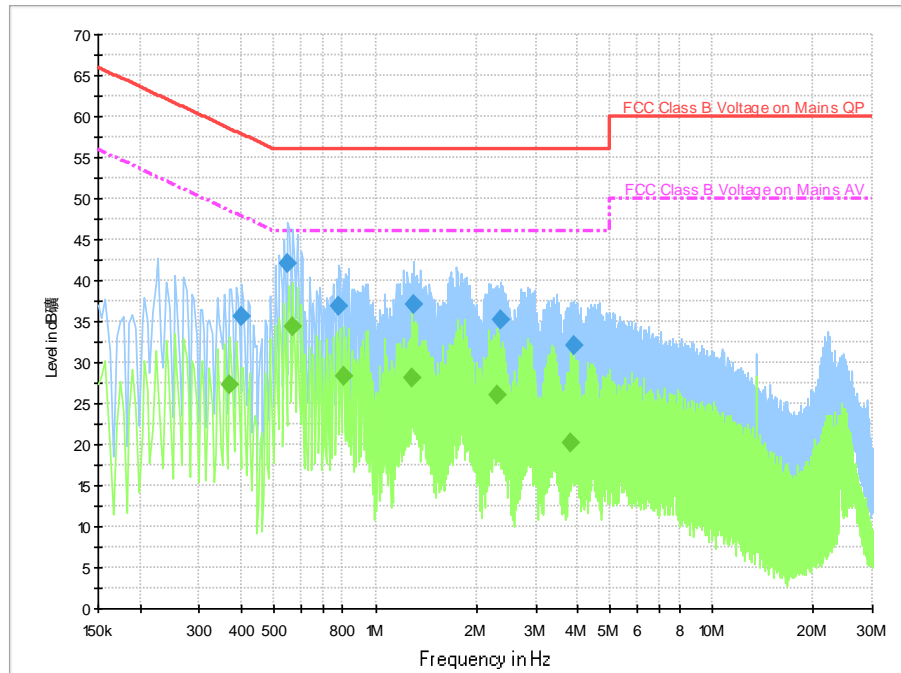

**Fig.A.7.1 AC Powerline Conducted Emission-802.11b**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**


Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.402000	35.6	2000.0	9.000	On	N	19.6	22.2	57.8	
0.550000	42.0	2000.0	9.000	On	L1	19.7	14.0	56.0	
0.782000	36.8	2000.0	9.000	On	L1	19.7	19.2	56.0	
1.298000	37.1	2000.0	9.000	On	L1	19.7	18.9	56.0	
2.366000	35.3	2000.0	9.000	On	L1	19.6	20.7	56.0	
3.874000	32.1	2000.0	9.000	On	L1	19.6	23.9	56.0	

**Final Result 2**

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.370000	27.2	2000.0	9.000	On	L1	19.7	21.3	48.5	
0.570000	34.3	2000.0	9.000	On	N	19.7	11.7	46.0	
0.802000	28.3	2000.0	9.000	On	L1	19.7	17.7	46.0	
1.282000	28.2	2000.0	9.000	On	L1	19.7	17.8	46.0	
2.306000	26.1	2000.0	9.000	On	L1	19.6	19.9	46.0	
3.814000	20.2	2000.0	9.000	On	N	19.6	25.8	46.0	



**Measurement results for Set.1:**  
**Result for Idle:**

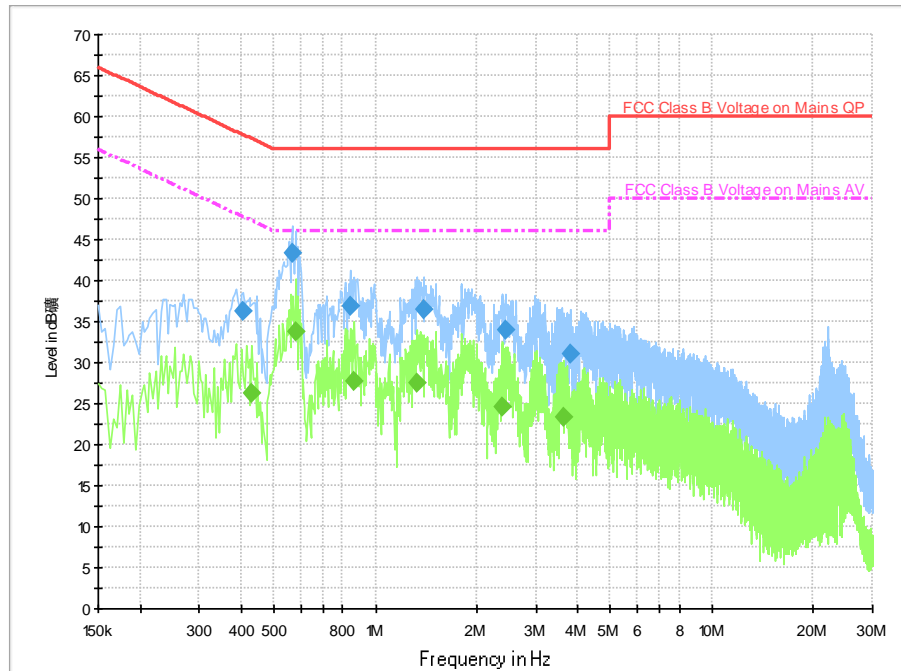

**Fig.A.7.2 AC Powerline Conducted Emission-Idle**

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

**Final Result 1**

Frequency (MHz)	QuasiPeak (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.406000	36.3	2000.0	9.000	On	L1	19.7	21.4	57.7	
0.566000	43.2	2000.0	9.000	On	L1	19.7	12.8	56.0	
0.842000	36.9	2000.0	9.000	On	N	19.6	19.1	56.0	
1.390000	36.5	2000.0	9.000	On	N	19.6	19.5	56.0	
2.430000	33.9	2000.0	9.000	On	N	19.6	22.1	56.0	
3.810000	31.0	2000.0	9.000	On	N	19.6	25.0	56.0	

**Final Result 2**

Frequency (MHz)	Average (dBuV)	Meas. Time (ms)	Bandwidth (kHz)	Filter	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)	Comment
0.430000	26.2	2000.0	9.000	On	N	19.7	21.1	47.3	
0.578000	33.7	2000.0	9.000	On	N	19.7	12.3	46.0	
0.866000	27.7	2000.0	9.000	On	L1	19.7	18.3	46.0	
1.330000	27.4	2000.0	9.000	On	L1	19.6	18.6	46.0	
2.378000	24.6	2000.0	9.000	On	L1	19.6	21.4	46.0	
3.634000	23.3	2000.0	9.000	On	N	19.6	22.7	46.0	

## ANNEX B: EUT parameters

Disclaimer: The antenna gain and worse case provided by the client may affect the validity of the measurement results in this report, and the client shall bear the impact and consequences arising therefrom.

## ANNEX C: Accreditation Certificate



**Accredited Laboratory**

A2LA has accredited

**TELECOMMUNICATION TECHNOLOGY LABS, CAICT**  
*Beijing, People's Republic of China*

for technical competence in the field of  
**Electrical Testing**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 26<sup>th</sup> day of June 2023.



Mr. Trace McInturf, Vice President, Accreditation Services  
For the Accreditation Council  
Certificate Number 7049.01  
Valid to July 31, 2024

*For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.*

\*\*\*END OF REPORT\*\*\*