



# TEST REPORT

## No. I21Z62328-WMD02

for

**Wingtech Group (Hong Kong) Limited**

**4G Mobile Phone**

**Model Name: TMRVL4G**

**FCC ID: 2APXW-TMRVL4G1**

with

**Hardware Version: 98117\_1\_10**

**Software Version: TMRVL4G\_0.03.25**

**Issued Date: 2021-12-21**

**Note:**

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

**Test Laboratory:**

**CTTL, Telecommunication Technology Labs, CAICT**

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: [ctl\\_terminals@caict.ac.cn](mailto:ctl_terminals@caict.ac.cn), website: [www.caict.ac.cn](http://www.caict.ac.cn)



## **REPORT HISTORY**

<b>Report Number</b>	<b>Revision</b>	<b>Description</b>	<b>Issue Date</b>
I21Z62328-WMD02	Rev.0	1 <sup>st</sup> edition	2021-12-21

Note: the latest revision of the test report supersedes all previous version.

## **CONTENTS**

<b>1. TEST LABORATORY .....</b>	<b>4</b>
<b>1.1. INTRODUCTION &amp; ACCREDITATION.....</b>	<b>4</b>
<b>1.2. TESTING LOCATION .....</b>	<b>4</b>
<b>1.3. TESTING ENVIRONMENT .....</b>	<b>5</b>
<b>1.4. PROJECT DATA .....</b>	<b>5</b>
<b>1.5. SIGNATURE .....</b>	<b>5</b>
<b>2. CLIENT INFORMATION.....</b>	<b>6</b>
<b>2.1. APPLICANT INFORMATION .....</b>	<b>6</b>
<b>2.2. MANUFACTURER INFORMATION.....</b>	<b>6</b>
<b>3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE) .....</b>	<b>7</b>
<b>3.1. ABOUT EUT .....</b>	<b>7</b>
<b>3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST .....</b>	<b>7</b>
<b>3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST .....</b>	<b>7</b>
<b>4. REFERENCE DOCUMENTS.....</b>	<b>8</b>
<b>4.1. DOCUMENTS SUPPLIED BY APPLICANT .....</b>	<b>8</b>
<b>4.2. REFERENCE DOCUMENTS FOR TESTING.....</b>	<b>8</b>
<b>5. LABORATORY ENVIRONMENT .....</b>	<b>9</b>
<b>6. SUMMARY OF TEST RESULT .....</b>	<b>10</b>
<b>7. TEST EQUIPMENT UTILIZED .....</b>	<b>12</b>
<b>ANNEX A: MEASUREMENT RESULTS.....</b>	<b>13</b>
<b>A.1 OUTPUT POWER .....</b>	<b>13</b>
<b>A.2 EMISSION LIMIT .....</b>	<b>18</b>
<b>A.3 FREQUENCY STABILITY .....</b>	<b>27</b>
<b>A.4 OCCUPIED BANDWIDTH.....</b>	<b>30</b>
<b>A.5 EMISSION BANDWIDTH.....</b>	<b>37</b>
<b>A.6 BAND EDGE COMPLIANCE.....</b>	<b>44</b>
<b>A.7 CONDUCTED SPURIOUS EMISSION .....</b>	<b>48</b>
<b>A.8 PEAK-TO-AVERAGE POWER RATIO .....</b>	<b>55</b>
<b>ANNEX B: ACCREDITATION CERTIFICATE.....</b>	<b>56</b>



## **1. Test Laboratory**

### **1.1. Introduction & Accreditation**

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0 and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

### **1.2. Testing Location**

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,  
P. R. China 100191

Location 2: CTTL (Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road,  
Haidian District, Beijing, P. R. China 100191

Location 3: CTTL (BDA)

Address: No. 18A, Kangding Street, Beijing Economic-Technology  
Development Area, Beijing, 100176, P.R. China

### 1.3. Testing Environment

Normal Temperature: 15-35°C  
Relative Humidity: 20-75%

### 1.4. Project Data

Testing Start Date: 2021-06-08  
Testing End Date: 2021-12-20

### 1.5. Signature



---

Dong Yuan  
(Prepared this test report)



---

Zhou Yu  
(Reviewed this test report)



---

Zhao Hui Lin  
Deputy Director of the laboratory  
(Approved this test report)



## **2. Client Information**

### **2.1. Applicant Information**

Company Name: Wingtech Group (Hong Kong) Limited  
Address /Post: Flat/RM 1903, 19/F, Podium Plaza 5 Hanoi Road, Tsim Sha Tsui  
Kowloon, Hong Kong  
Contact: NA  
Email: NA  
Telephone: NA  
Fax: NA

### **2.2. Manufacturer Information**

Company Name: Wingtech Group (Hong Kong) Limited  
Address /Post: Flat/RM 1903, 19/F, Podium Plaza 5 Hanoi Road, Tsim Sha Tsui  
Kowloon, Hong Kong  
Contact: NA  
Email: NA  
Telephone: NA  
Fax: NA

### **3. Equipment Under Test (EUT) and Ancillary Equipment (AE)**

#### **3.1. About EUT**

Description	4G Mobile Phone
Model Name	TMRVL4G
FCC ID	2APXW-TMRVL4G1
Antenna	Embedded
Output power	26.40dBm maximum EIRP measured for WCDMA Band II
Extreme vol. Limits	3.6VDC to 4.4VDC (nominal: 3.85VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

#### **3.2. Internal Identification of EUT used during the test**

<b>EUT ID*</b>	<b>IMEI</b>	<b>HW Version</b>	<b>SW Version</b>	<b>Date of receipt</b>
UT37a	863892050025671	98117_1_10	TMRVL4G_0.03.25	2021-11-18
UT26a	863892050022207	98117_1_10	TMRVL4G_0.03.25	2021-11-18

\*EUT ID: is used to identify the test sample in the lab internally.

#### **3.3. Internal Identification of AE used during the test**

<b>AE ID*</b>	<b>Description</b>
AE1	Battery
AE2	Battery
AE1	
Model	JU001
Manufacturer	Jiade Energy Technology (Zhuhai) Co.,Ltd.
Capacitance	4000mAh
AE2	
Model	JU001
Manufacturer	Sunwoda Electronic Co., Ltd.
Capacitance	4000mAh

\*AE ID: is used to identify the test sample in the lab internally.

## **4. Reference Documents**

### **4.1. Documents supplied by applicant**

EUT parameters are supplied by the client or manufacturer, which are the bases of testing.

### **4.2. Reference Documents for testing**

The following documents listed in this section are referred for testing.

<b>Reference</b>	<b>Title</b>	<b>Version</b>
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-20 Edition
FCC Part 22	PUBLIC MOBILE SERVICES	10-1-20 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-20 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01



## 5. Laboratory Environment

**Control room / conducted chamber** did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 M $\Omega$
Ground system resistance	< 0.5 $\Omega$

**Semi-anechoic chamber SAC-1** (23 meters  $\times$  17 meters  $\times$  10 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 M $\Omega$
Ground system resistance	< 4 $\Omega$
Normalised site attenuation (NSA)	< $\pm$ 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

**Fully-anechoic chamber FAC-3** (8.6 meters  $\times$  6.1 meters  $\times$  3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 M $\Omega$
Ground system resistance	< 1 $\Omega$
Site voltage standing-wave ratio ( $S_{VSWR}$ )	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

## 6. Summary Of Test Result

### WCDMA Band II

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	24.232	P
2	Emission Limit	2.1051/24.238	P
3	Frequency Stability	2.1055	BR
4	Occupied Bandwidth	2.1049	BR
5	Emission Bandwidth	24.238	BR
6	Band Edge Compliance	24.238	BR
7	Conducted Spurious Emission	24.238	BR
8	Peak-to-Average Power Ratio	24.232	BR

### WCDMA Band V

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	22.913	P
2	Emission Limit	2.1051/22.917	P
3	Frequency Stability	2.1055	BR
4	Occupied Bandwidth	2.1049	BR
5	Emission Bandwidth	22.917	BR
6	Band Edge Compliance	22.917	BR
7	Conducted Spurious Emission	22.917	BR

### WCDMA Band IV

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	BR
4	Occupied Bandwidth	2.1049	BR
5	Emission Bandwidth	27.53	BR
6	Band Edge Compliance	27.53	BR
7	Conducted Spurious Emission	27.53	BR
8	Peak-to-Average Power Ratio	27.50	BR

## Terms used in Verdict column

P	Pass. The EUT complies with the essential requirements in the standard.
NP	Not Performed. The test was not performed by CTTL.
NA	Not Applicable. The test was not applicable.
BR	Re-use test data from basic model report.
F	Fail. The EUT does not comply with the essential requirements in the standard.

## Explanation of worst-case configuration

The worst-case scenario for all measurements is based on the conducted output power measurement investigation results. The test results shown in the following sections represent the worst case emission.

The Equipment Under Test (EUT) model TMRVL4G (FCC ID: 2APXW-TMRVL4G1) is a variant product of TMRVL4G (FCC ID: 2APXW-TMRVL4G), according to the declaration of changes provided by the applicant and FCC KDB publication 484596 D01, spot check measurements were performed on this device, all the test results are derived from test report No.I21Z61109-WMD02. Please refer Annex A for detail spot check verification data and reference data. The spot check test results are consistent with basic model.

For detail differences between two models please refer the Declaration of Changes document.

## 7. Test Equipment Utilized

Description	Type	Series Number	Manufacture	Cal Due Date	Calibration Interval
Universal Radio Communication Tester	CMU200	108646	R&S	2023-01-17	25 months
Spectrum Analyzer	FSU	200030	R&S	2022-06-02	1 year
Climate chamber	SH-242	93008556	ESPEC	2023-12-23	3 years
Test Receiver	E4440A	Agilent	MY48250642	2022-03-04	1 year
EMI Antenna	VULB9163	Schwarzbeck	9163-235	2022-04-07	1 year
EMI Antenna	LB-7180-NF	A-INFO	2030013000041	2022-02-28	1 year
EMI Antenna	3117	ETS-Lindgren	00058889	2022-11-07	1 year
Signal Generator	N5183A	Agilent	MY49060052	2022-07-11	1 year
Universal Radio Communication Tester	CMW500	143008	R&S	2022-12-01	1 year

## **Annex A: Measurement Results**

### **A.1 Output Power**

#### **A.1.1 Summary**

During the process of testing, the EUT was controlled via communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

#### **A.1.2 Conducted**

##### **A.1.2.1 Method of Measurements**

The EUT was set up for the max output power with pseudo random data modulation.

These measurements were done at 3 frequencies (bottom, middle and top of operational frequency range) for each bandwidth.

##### **A.1.2.2 Measurement Result**

###### **Spot Check Measurement Results:**

###### **WCDMA Band II**

###### **QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	23.22
	9400	1880.0	23.31
	9538	1907.6	23.35

###### **WCDMA Band V**

###### **QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	23.75
	4183	836.6	23.76
	4233	846.6	23.78

###### **WCDMA Band IV**

###### **QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band IV)	1312	1712.4	23.88
	1412	1732.4	23.91
	1513	1752.6	23.87

**Reference Measurement Results from basic model:****WCDMA Band II****QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band II)	9262	1852.4	23.51
	9400	1880.0	23.46
	9538	1907.6	23.39

**WCDMA Band V****QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band V)	4132	826.4	23.48
	4183	836.6	23.44
	4233	846.6	23.49

**WCDMA Band IV****QPSK**

	CH	Frequency (MHz)	output power (dBm)
WCDMA (Band IV)	1312	1712.4	23.38
	1412	1732.4	23.49
	1513	1752.6	23.56



**Spot Check Measurement Results:**
**WCDMA Band II-EIRP**
**Limits**

	Burst Peak EIRP (dBm)
WCDMA Band II	≤33dBm

**QPSK**

WCDMA (Band II)	CH	Frequency (MHz)	output power (dBm)	EIRP(dBm) ( $G_T - L_C = 2.89$ )
	9262	1852.4	23.22	26.11
	9400	1880.0	23.31	26.20
	9538	1907.6	23.35	26.24

**WCDMA Band V-ERP**
**Limits**

	Burst Peak ERP (dBm)
WCDMA Band V	≤38.45dBm

**QPSK**

WCDMA (Band V)	CH	Frequency (MHz)	output power (dBm)	ERP(dBm) ( $G_T - L_C = -2.12$ )
	4132	826.4	23.75	19.48
	4183	836.6	23.76	19.49
	4233	846.6	23.78	19.51

**WCDMA Band IV-EIRP**
**Limits**

	Burst Peak EIRP (dBm)
WCDMA Band IV	≤30dBm

**WCDMA Band IV**
**QPSK**

WCDMA (Band IV)	CH	Frequency (MHz)	output power (dBm)	EIRP(dBm) ( $G_T - L_C = 0.26$ )
	1312	1712.4	23.88	24.14
	1412	1732.4	23.91	24.17
	1513	1752.6	23.87	24.13



**Reference Measurement Results from basic model:**
**WCDMA Band II-EIRP**
**Limits**

	Burst Peak EIRP (dBm)
WCDMA Band II	≤33dBm

**QPSK**

WCDMA (Band II)	CH	Frequency (MHz)	output power (dBm)	EIRP(dBm) ( $G_T - L_C = 2.89$ )
	9262	1852.4	23.51	26.40
	9400	1880.0	23.46	26.35
	9538	1907.6	23.39	26.28

**WCDMA Band V-ERP**
**Limits**

	Burst Peak ERP (dBm)
WCDMA Band V	≤38.45dBm

**QPSK**

WCDMA (Band V)	CH	Frequency (MHz)	output power (dBm)	ERP(dBm) ( $G_T - L_C = -2.12$ )
	4132	826.4	23.48	19.21
	4183	836.6	23.44	19.17
	4233	846.6	23.49	19.22

**WCDMA Band IV-EIRP**
**Limits**

	Burst Peak EIRP (dBm)
WCDMA Band IV	≤30dBm

**WCDMA Band IV**
**QPSK**

WCDMA (Band IV)	CH	Frequency (MHz)	output power (dBm)	EIRP(dBm) ( $G_T - L_C = 0.26$ )
	1312	1712.4	23.38	23.64
	1412	1732.4	23.49	23.75
	1513	1752.6	23.56	23.82

## A.2 Emission Limit


### **A.2.1 Measurement Method**

The measurements procedures in TIA-603E-2016 are used.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment. The resolution bandwidth is set as outlined in Part 24.238, Part 22.917, Part 27.53. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of WCDMA Band II, WCDMA Band V and WCDMA Band IV.

#### **The procedure of radiated spurious emissions is as follows:**

1. EUT was placed on a 1.5-meter-high non-conductive stand at a 3-meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

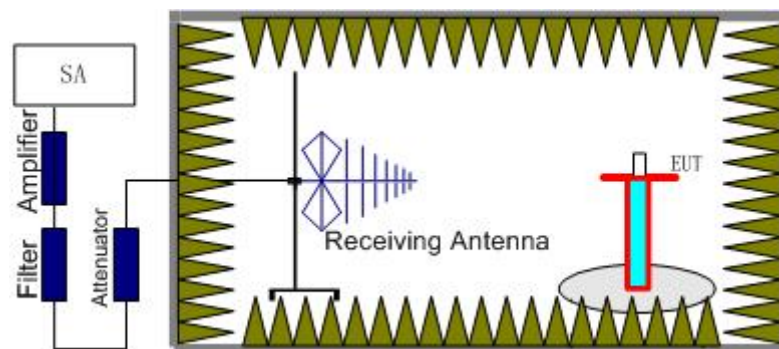

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as ( $P_r$ ).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

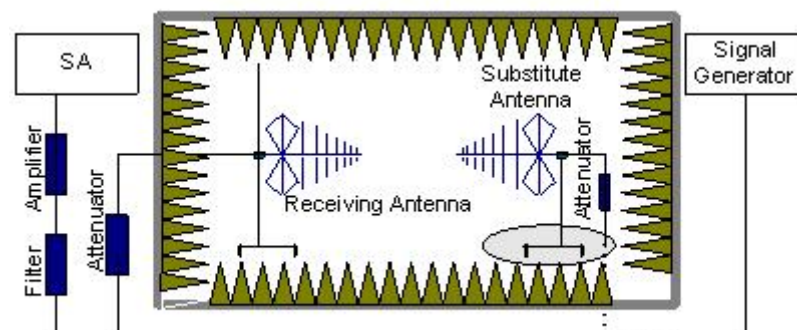

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power ( $P_{Mea}$ ) is applied to the input of the

substitution antenna and adjust the level of the signal generator output until the value of the receiver reach the previously recorded ( $P_r$ ). The power of signal source ( $P_{Mea}$ ) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss ( $P_{pl}$ ) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain ( $G_a$ ) should be recorded after test.

A amplifier should be connected in for the test.

The Path loss ( $P_{pl}$ ) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15\text{dBi}$ .

### A.2.2 Measurement Limit

Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power ( $P$ ) by a factor of at least  $43 + 10\log(P)$  dB.

### A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of WCDMA Band II (1852.4 MHz, 1880.0MHz and 1907.6MHz), WCDMA Band V(826.4MHz, 836.6MHz and 846.6MHz) and WCDMA Band IV(1712.4MHz, 1732.4MHz and 1752.6MHz). It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur well outside the band and no radiation was seen from a carrier in one block of the WCDMA Band II, WCDMA Band V and WCDMA Band IV into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The range of evaluated frequency is from 9 kHz to 20 GHz. Measurement value show only up to 6 maximum emissions noted.

#### A.2.4 Sweep Table

Working Frequency	Subrange (GHz)	RBW	VBW	Sweep time (s)
WCDMA Band V	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~10	1 MHz	3 MHz	3
WCDMA Band II	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2
WCDMA Band IV	0.03~1	100kHz	300kHz	10
	1-2	1 MHz	3 MHz	2
	2~5	1 MHz	3 MHz	3
	5~8	1 MHz	3 MHz	3
	8~11	1 MHz	3 MHz	3
	11~14	1 MHz	3 MHz	3
	14~18	1 MHz	3 MHz	3
	18~20	1 MHz	3 MHz	2

**Spot Check Measurement Results:**
**WCDMA BAND II Mode Channel 9262/1852.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3704.02	-59.26	6.42	8.49	-57.19	-13.00	44.19	H
5561.02	-58.95	7.19	10.59	-55.55	-13.00	42.55	H
7431.01	-54.88	8.20	12.12	-50.96	-13.00	37.96	V
9255.01	-53.72	9.05	13.25	-49.52	-13.00	36.52	H
11127.01	-50.08	9.72	13.17	-46.63	-13.00	33.63	H
12979.01	-46.89	10.47	13.49	-43.87	-13.00	30.87	H

**WCDMA BAND II Mode Channel 9400/1880MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3763.02	-57.74	6.25	8.57	-55.42	-13.00	42.42	H
5646.02	-56.56	7.27	10.57	-53.26	-13.00	40.26	H
7526.01	-54.98	8.28	12.22	-51.04	-13.00	38.04	H
9390.01	-53.51	9.05	13.33	-49.23	-13.00	36.23	H
11299.01	-50.11	9.99	13.14	-46.96	-13.00	33.96	H
13161.01	-45.12	10.67	13.73	-42.06	-13.00	29.06	H

**WCDMA BAND II Mode Channel 9538/1907.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3813.02	-60.57	6.10	8.64	-58.03	-13.00	45.03	H
5751.02	-58.53	7.26	10.55	-55.24	-13.00	42.24	H
7624.01	-54.98	8.08	12.30	-50.76	-13.00	37.76	H
9556.01	-53.60	9.34	13.34	-49.60	-13.00	36.60	V
11479.01	-49.90	9.87	13.10	-46.67	-13.00	33.67	V
13362.01	-44.67	10.57	14.01	-41.23	-13.00	28.23	H

**WCDMA BAND V Mode Channel 4132/826.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1629.01	-55.53	3.55	5.27	2.15	-55.96	-13.00	42.96	V
2455.00	-45.63	4.58	5.97	2.15	-46.39	-13.00	33.39	H
3287.02	-59.63	5.28	7.69	2.15	-59.37	-13.00	46.37	V
4134.02	-58.33	6.06	9.03	2.15	-57.51	-13.00	44.51	H
4954.01	-56.78	6.68	9.85	2.15	-55.76	-13.00	42.76	H
5766.01	-56.17	7.24	10.55	2.15	-55.01	-13.00	42.01	H

**WCDMA BAND V Mode Channel 4183/836.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1669.01	-54.66	3.58	5.20	2.15	-55.19	-13.00	42.19	V
2523.00	-47.85	4.65	6.14	2.15	-48.51	-13.00	35.51	V
3334.02	-60.34	5.30	7.80	2.15	-59.99	-13.00	46.99	V
4193.02	-57.82	6.19	9.09	2.15	-57.07	-13.00	44.07	H
5028.01	-56.97	6.57	9.94	2.15	-55.75	-13.00	42.75	H
5873.01	-56.96	7.31	10.53	2.15	-55.89	-13.00	42.89	H

**WCDMA BAND V Mode Channel 4233/846.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1714.01	-54.39	3.61	5.11	2.15	-55.04	-13.00	42.04	H
2565.00	-46.42	4.68	6.22	2.15	-47.03	-13.00	34.03	H
3387.02	-59.95	5.35	7.93	2.15	-59.52	-13.00	46.52	H
4252.02	-58.35	6.24	9.15	2.15	-57.59	-13.00	44.59	V
5088.01	-56.40	6.74	10.02	2.15	-55.27	-13.00	42.27	H
5940.01	-55.74	7.47	10.51	2.15	-54.85	-13.00	41.85	H

**WCDMA BAND IV Mode Channel 1312/1712.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3423.02	-71.83	5.38	8.02	-69.19	-13.00	56.19	V
5139.02	-69.08	6.86	10.09	-65.85	-13.00	52.85	H
6849.01	-65.00	7.83	11.42	-61.41	-13.00	48.41	H
8566.01	-65.19	8.55	13.01	-60.73	-13.00	47.73	H
10270.01	-63.09	9.54	13.01	-59.62	-13.00	46.62	V
11965.01	-60.15	10.21	13.01	-57.35	-13.00	44.35	H

**WCDMA BAND IV Mode Channel 1412/1732.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3483.02	-71.94	5.49	8.16	-69.27	-13.00	56.27	V
5201.02	-69.69	6.96	10.18	-66.47	-13.00	53.47	V
6979.01	-66.14	8.14	11.57	-62.71	-13.00	49.71	V
8718.01	-65.40	8.41	13.04	-60.77	-13.00	47.77	V
10454.01	-62.98	9.72	13.08	-59.62	-13.00	46.62	V
12194.01	-60.27	10.08	13.08	-57.27	-13.00	44.27	H

**WCDMA BAND IV Mode Channel 1513/1752.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3511.02	-71.79	5.54	8.22	-69.11	-13.00	56.11	V
5260.02	-68.19	7.00	10.26	-64.93	-13.00	51.93	V
7013.01	-65.41	8.28	11.62	-62.07	-13.00	49.07	H
8750.01	-64.89	8.51	13.05	-60.35	-13.00	47.35	V
10501.01	-62.69	9.65	13.10	-59.24	-13.00	46.24	V
12285.01	-60.28	10.00	13.11	-57.17	-13.00	44.17	H

Note: Expanded measurement uncertainty is U = 5.16 dB, k = 2.

**Reference Measurement Results from basic model:**  
**WCDMA BAND II Mode Channel 9262/1852.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7433.01	-54.08	8.21	12.12	-50.17	-13.00	37.17	V
9253.01	-53.60	9.05	13.25	-49.40	-13.00	36.40	V
11112.01	-50.96	9.78	13.18	-47.56	-13.00	34.56	V
12950.01	-48.99	10.49	13.47	-46.01	-13.00	33.01	V
14823.00	-45.90	11.14	14.14	-42.90	-13.00	29.90	H
16676.00	-42.74	11.80	13.67	-40.87	-13.00	27.87	H

**WCDMA BAND II Mode Channel 9400/1880MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7520.01	-54.42	8.31	12.22	-50.51	-13.00	37.51	H
9397.01	-54.24	9.04	13.34	-49.94	-13.00	36.94	H
11279.01	-50.88	9.87	13.14	-47.61	-13.00	34.61	H
13171.01	-47.98	10.62	13.74	-44.86	-13.00	31.86	H
15029.00	-45.37	11.25	13.98	-42.64	-13.00	29.64	H
16930.00	-42.35	12.11	13.77	-40.69	-13.00	27.69	V

**WCDMA BAND II Mode Channel 9538/1907.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss (dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
7639.01	-54.47	8.15	12.31	-50.31	-13.00	37.31	V
9540.01	-53.20	9.40	13.36	-49.24	-13.00	36.24	V
11469.01	-50.85	9.89	13.11	-47.63	-13.00	34.63	V
13389.01	-48.46	10.57	14.04	-44.99	-13.00	31.99	H
15294.00	-45.32	11.29	13.82	-42.79	-13.00	29.79	H
17185.00	-43.16	12.40	14.21	-41.35	-13.00	28.35	V



**WCDMA BAND V Mode Channel 4132/826.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1632.01	-60.16	3.55	5.26	2.15	-60.60	-13.00	47.60	V
2455.00	-53.45	4.58	5.97	2.15	-54.21	-13.00	41.21	V
3294.02	-54.71	5.29	7.71	2.15	-54.44	-13.00	41.44	V
4114.02	-55.39	6.04	9.01	2.15	-54.57	-13.00	41.57	H
4944.01	-54.30	6.70	9.84	2.15	-53.31	-13.00	40.31	V
5780.01	-53.57	7.22	10.54	2.15	-52.40	-13.00	39.40	V

**WCDMA BAND V Mode Channel 4183/836.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1684.01	-59.40	3.59	5.17	2.15	-59.97	-13.00	46.97	V
2525.00	-52.76	4.65	6.15	2.15	-53.41	-13.00	40.41	H
3343.02	-54.34	5.31	7.82	2.15	-53.98	-13.00	40.98	V
4191.02	-54.73	6.19	9.09	2.15	-53.98	-13.00	40.98	V
5023.01	-54.53	6.56	9.93	2.15	-53.31	-13.00	40.31	V
5848.01	-52.72	7.23	10.53	2.15	-51.57	-13.00	38.57	V

**WCDMA BAND V Mode Channel 4233/846.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Correction (dB)	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polarization
1680.01	-57.31	3.59	5.18	2.15	-57.87	-13.00	44.87	H
2536.00	-53.07	4.66	6.16	2.15	-53.72	-13.00	40.72	V
3398.02	-55.02	5.36	7.96	2.15	-54.57	-13.00	41.57	V
4259.02	-53.78	6.23	9.16	2.15	-53.00	-13.00	40.00	V
5074.01	-54.25	6.70	10.00	2.15	-53.10	-13.00	40.10	V
5944.01	-52.84	7.47	10.51	2.15	-51.95	-13.00	38.95	H

**WCDMA BAND IV Mode Channel 1312/1712.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3417.02	-57.22	5.38	8.00	-54.60	-13.00	41.60	V
5144.02	-55.38	6.87	10.10	-52.15	-13.00	39.15	V
6836.01	-54.39	7.84	11.40	-50.83	-13.00	37.83	H
8560.01	-54.03	8.56	13.01	-49.58	-13.00	36.58	H
10285.01	-50.59	9.59	13.01	-47.17	-13.00	34.17	V
11998.01	-49.90	10.06	13.00	-46.96	-13.00	33.96	V

**WCDMA BAND IV Mode Channel 1412/1732.4MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3483.02	-56.41	5.49	8.16	-53.74	-13.00	40.74	H
5237.02	-55.97	7.00	10.23	-52.74	-13.00	39.74	V
6963.01	-54.31	8.01	11.56	-50.76	-13.00	37.76	H
8684.01	-54.12	8.38	13.04	-49.46	-13.00	36.46	V
10436.01	-52.28	9.75	13.07	-48.96	-13.00	35.96	H
12163.01	-49.18	10.17	13.07	-46.28	-13.00	33.28	V

**WCDMA BAND IV Mode Channel 1513/1752.6MHz**

Frequency (MHz)	P <sub>Mea</sub> (dBm)	Path Loss(dB)	Antenna Gain(dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polarization
3506.02	-57.09	5.53	8.21	-54.41	-13.00	41.41	H
5264.02	-56.04	6.99	10.27	-52.76	-13.00	39.76	H
7002.01	-53.79	8.30	11.60	-50.49	-13.00	37.49	H
8756.01	-54.14	8.53	13.05	-49.62	-13.00	36.62	H
10519.01	-51.03	9.58	13.10	-47.51	-13.00	34.51	V
12268.01	-49.54	10.02	13.11	-46.45	-13.00	33.45	V

Note: Expanded measurement uncertainty is U = 5.16 dB, k = 2.

## **A.3 Frequency Stability**

### **A.3.1 Method of Measurement**

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as  $F_L$  and  $F_H$  respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a "call mode". This is accomplished with the use of CMU200.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on mid channel of each band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
5. Remeasure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments remeasuring carrier frequency at each voltage. Pause at nominal voltage for 1 1/2 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMU200 and in a simulated call on the centre channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1 1/2 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

### A.3.2 Measurement results

#### WCDMA Band II QPSK

##### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.85	1850.120	1909.880		
50				5.28	0.0028
40				9.67	0.0051
30				9.83	0.0052
10				10.04	0.0053
0				6.04	0.0032
-10				6.09	0.0032
-20				7.64	0.0041
-30				6.62	0.0035

##### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	1850.120	1909.880	-2.73	0.0015
4.4				5.69	0.0030

#### WCDMA Band V QPSK

##### Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.85	824.120	848.880		
50				1.80	0.0022
40				-1.53	0.0018
30				6.52	0.0078
10				-0.14	0.0002
0				0.55	0.0007
-10				-2.20	0.0026
-20				8.01	0.0096
-30				8.33	0.0100

##### Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	824.120	848.880	-0.95	0.0011
4.4				2.27	0.0027

**WCDMA Band IV QPSK**
**Frequency Error vs Temperature**

Temperature(°C)	Voltage(V)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.85	1710.104	1754.888		
50				5.19	0.0030
40				10.48	0.0060
30				9.03	0.0052
10				9.51	0.0055
0				10.06	0.0058
-10				9.38	0.0054
-20				9.77	0.0056
-30				8.54	0.0049

**Frequency Error vs Voltage**

Voltage(V)	Temperature(°C)	F <sub>L</sub> (MHz)	F <sub>H</sub> (MHz)	Offset(Hz)	Frequency error(ppm)
3.6	20	1710.104	1754.888	2.41	0.0014
4.4				6.90	0.0040

#### **A.4 Occupied Bandwidth**

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the extreme and mid frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times$  RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

**WCDMA Band II (99%)-QPSK**

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1852.4	4182.69
1880.0	4182.69
1907.6	4182.69


**WCDMA Band II (99%)**

**Channel 9262-Occupied Bandwidth (99% BW)**

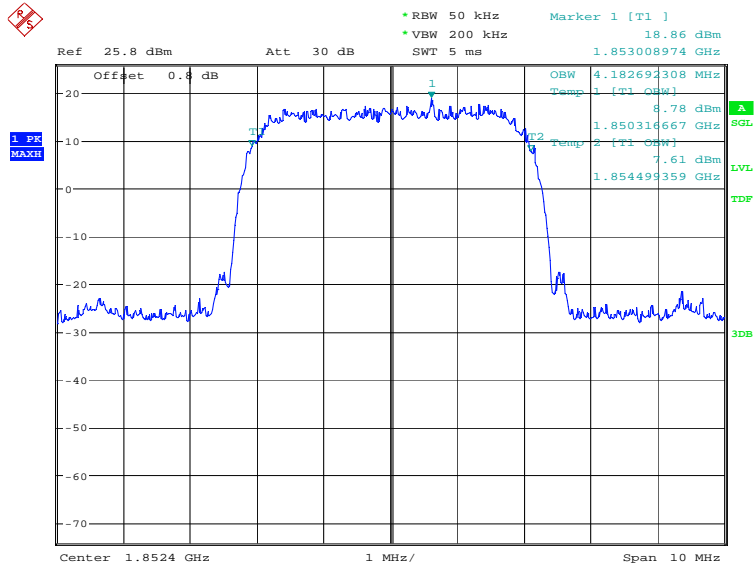


Date: 11.JUN.2021 12:30:53

### Channel 9400-Occupied Bandwidth (99% BW)

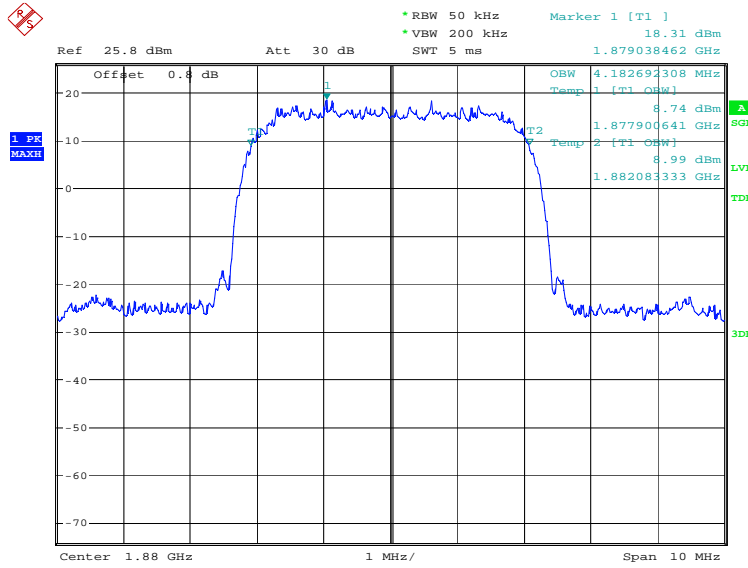

Date: 11.JUN.2021 12:31:20

### Channel 9538-Occupied Bandwidth (99% BW)

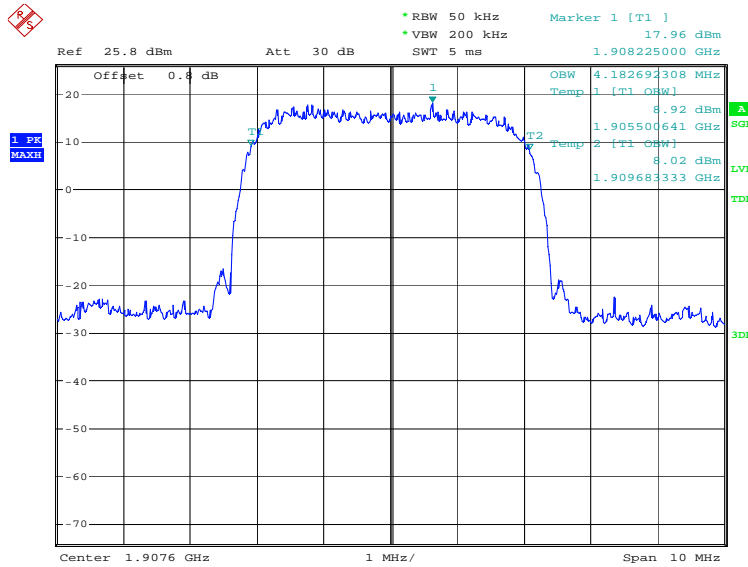

Date: 11.JUN.2021 12:31:47




### WCDMA Band V (99%)-QPSK

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
826.4	4166.67
836.6	4166.67
846.6	4166.67


### WCDMA Band V (99%)

#### Channel 4132-Occupied Bandwidth (99% BW)

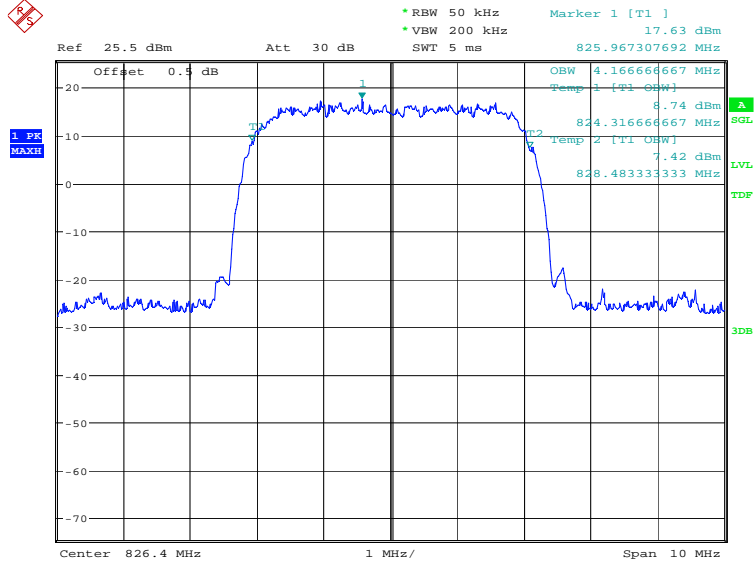


Date: 11.JUN.2021 14:19:18

### Channel 4183-Occupied Bandwidth (99% BW)

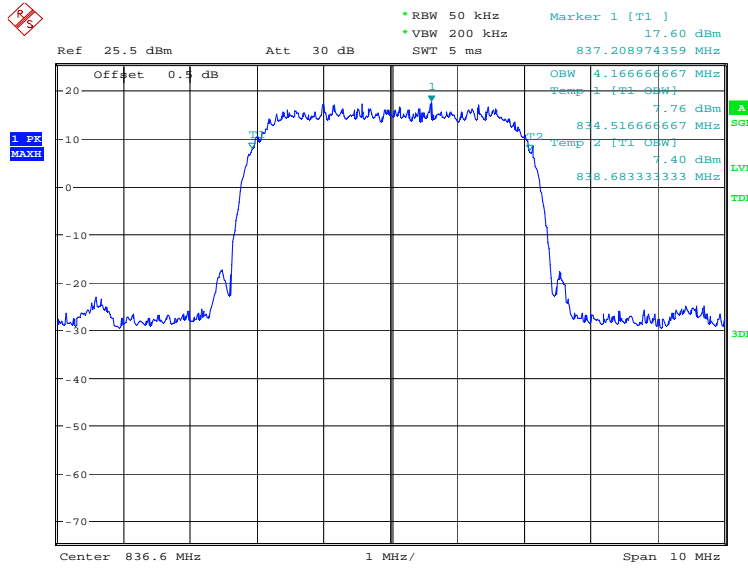

Date: 11.JUN.2021 14:19:44

### Channel 4233-Occupied Bandwidth (99% BW)

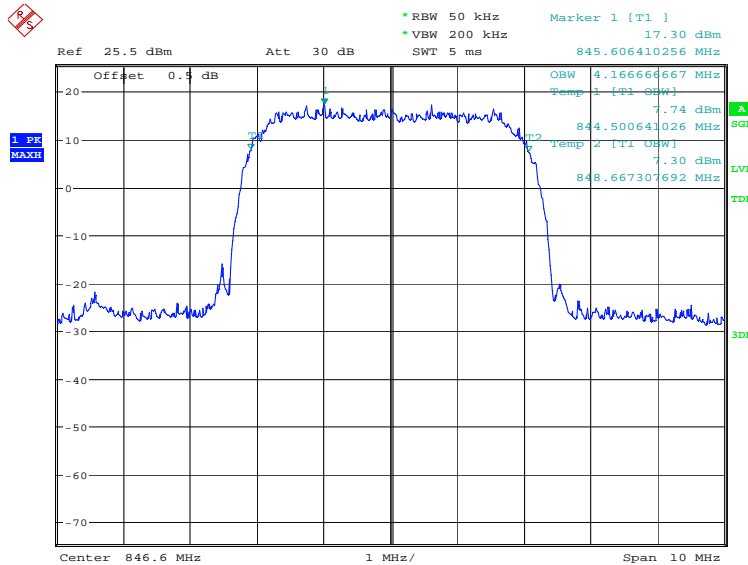


Date: 11.JUN.2021 14:20:11

### WCDMA Band IV (99%)-QPSK

Frequency (MHz)	Occupied Bandwidth (99%)(kHz)
1712.4	4198.72
1732.4	4198.72
1752.6	4198.72


### WCDMA Band IV (99%)

#### Channel 1312-Occupied Bandwidth (99% BW)

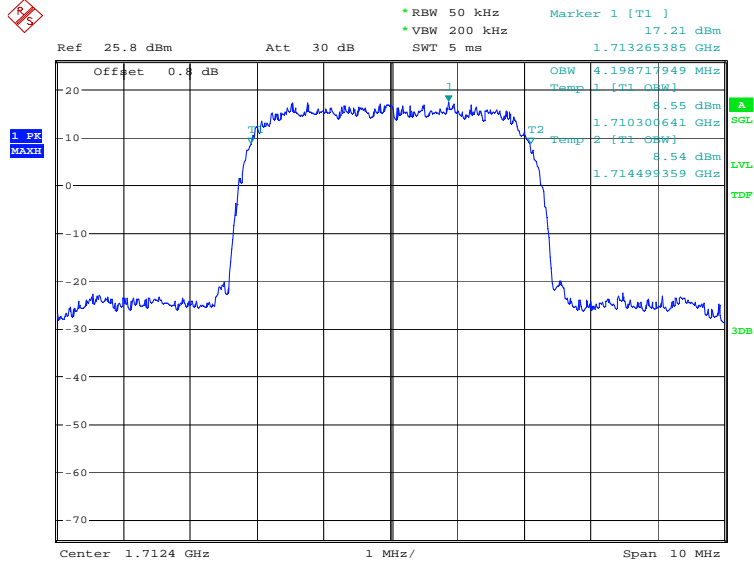


Date: 11.JUN.2021 12:33:13

### Channel 1412-Occupied Bandwidth (99% BW)

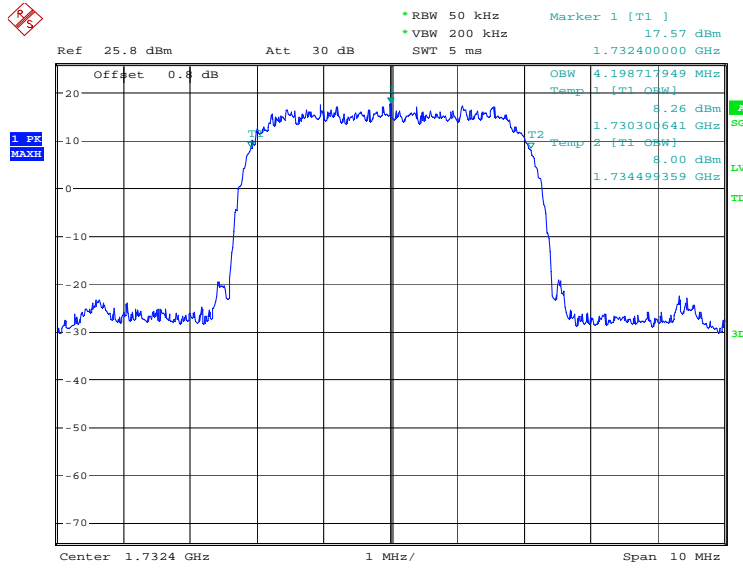

Date: 11.JUN.2021 12:33:40

### Channel 1513-Occupied Bandwidth (99% BW)

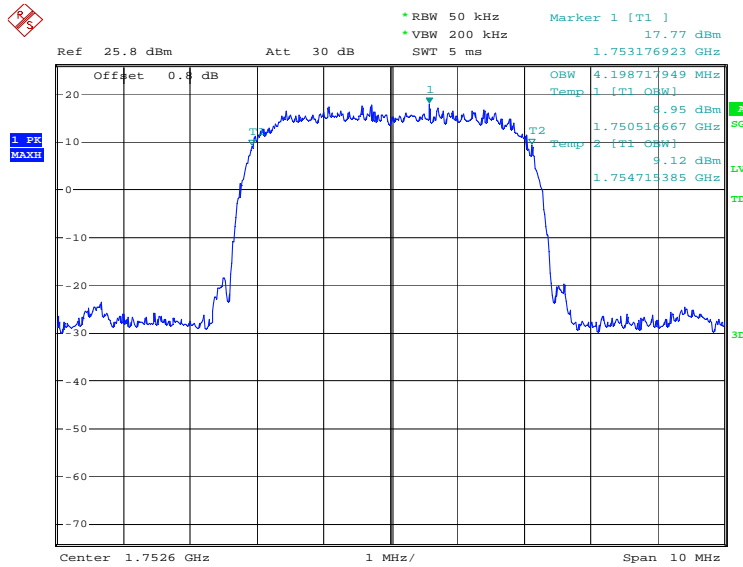

Date: 11.JUN.2021 12:34:07

## **A.5 Emission Bandwidth**

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

The measurement method is from ANSI C63.26:


- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set  $\geq 3 \times \text{RBW}$ .
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.

### WCDMA Band II-QPSK (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1852.4	4695.51
1880.0	4695.51
1907.6	4695.51


### WCDMA Band II (-26dBc)

#### Channel 9262-Emission Bandwidth (-26dBc BW)

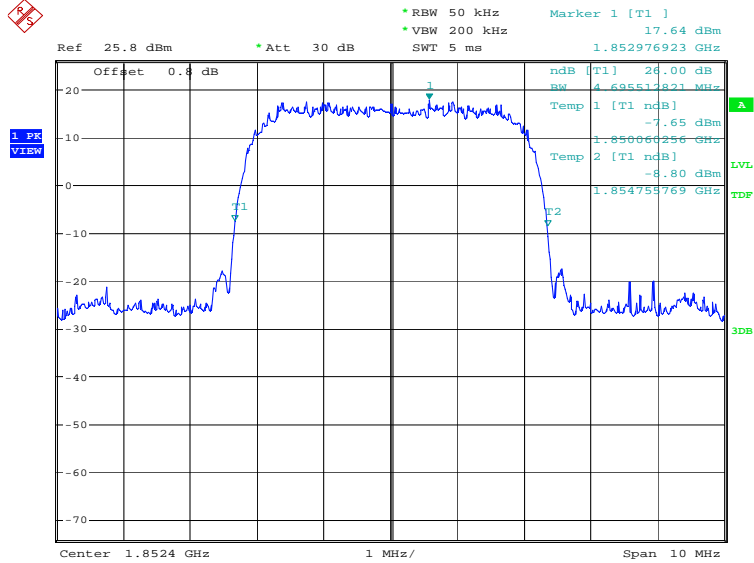


Date: 11.JUN.2021 12:35:23

### Channel 9400-Emission Bandwidth (-26dBc BW)

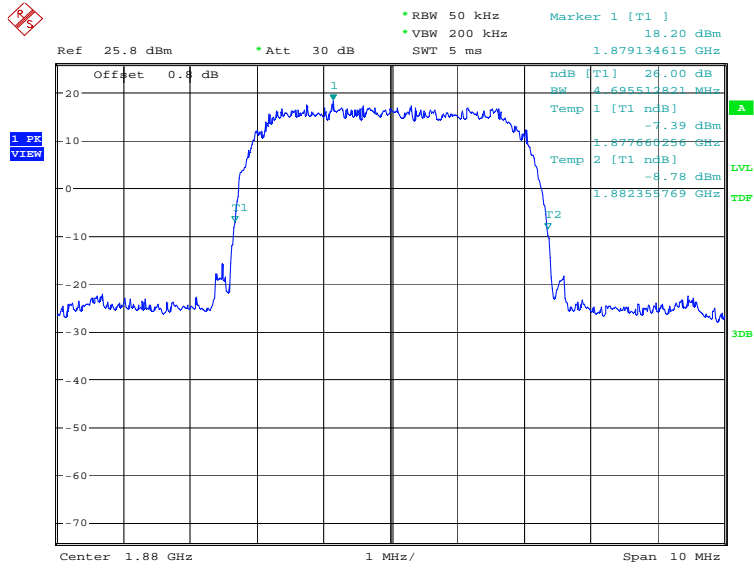

Date: 11.JUN.2021 12:35:50

### Channel 9538-Emission Bandwidth (-26dBc BW)

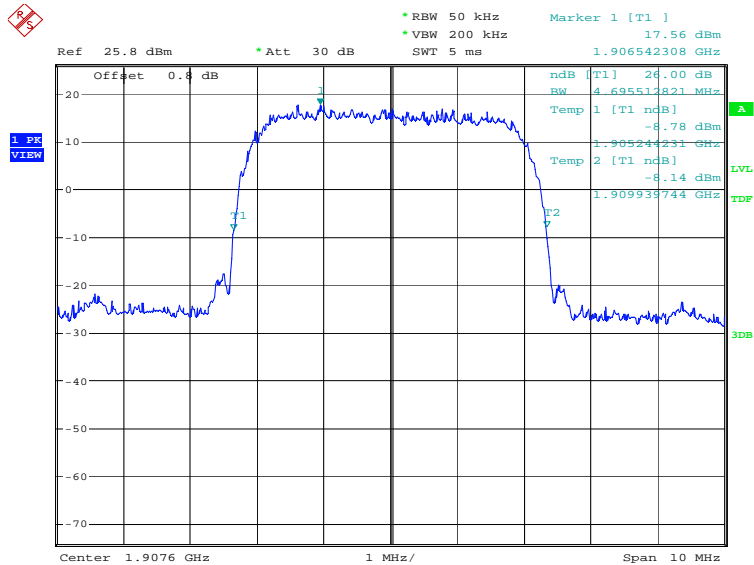


Date: 11.JUN.2021 12:36:17

### WCDMA Band V-QPSK (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
826.40	4695.51
836.60	4679.49
846.60	4711.54

### WCDMA Band V (-26dBc)


#### Channel 4132-Emission Bandwidth (-26dBc BW)

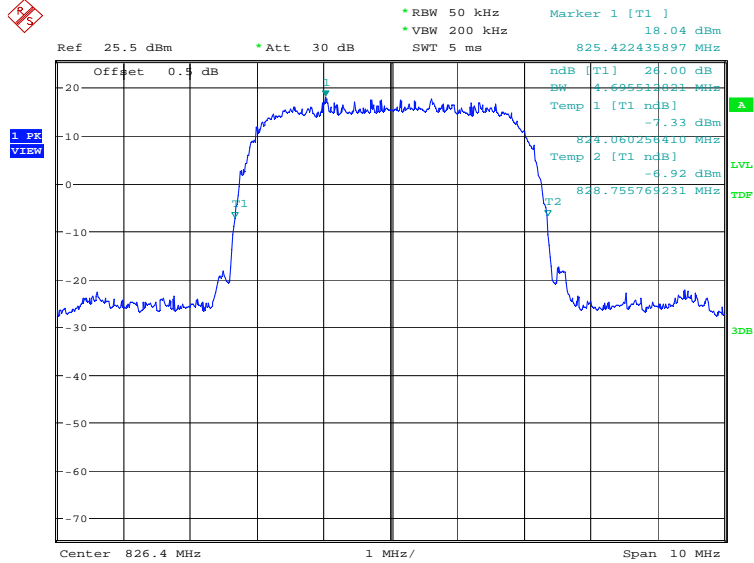

Date: 11.JUN.2021 14:21:27




### Channel 4183-Emission Bandwidth (-26dBc BW)

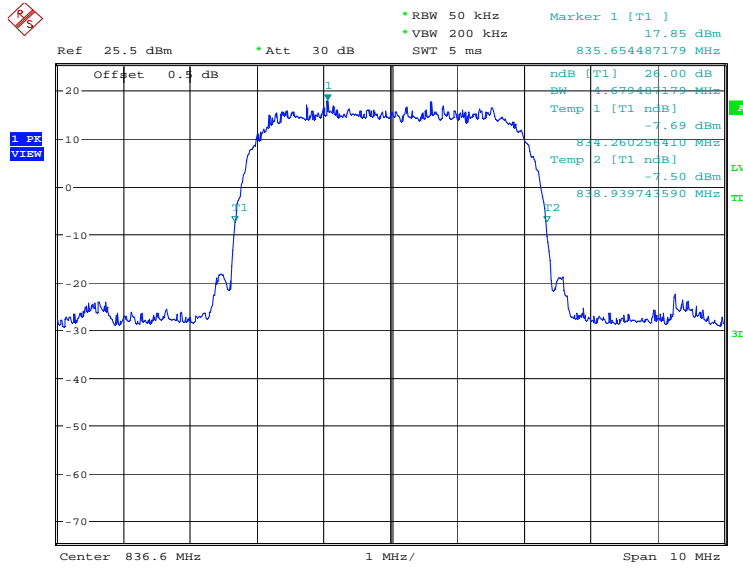

Date: 11.JUN.2021 14:21:54

### Channel 4233-Emission Bandwidth (-26dBc BW)

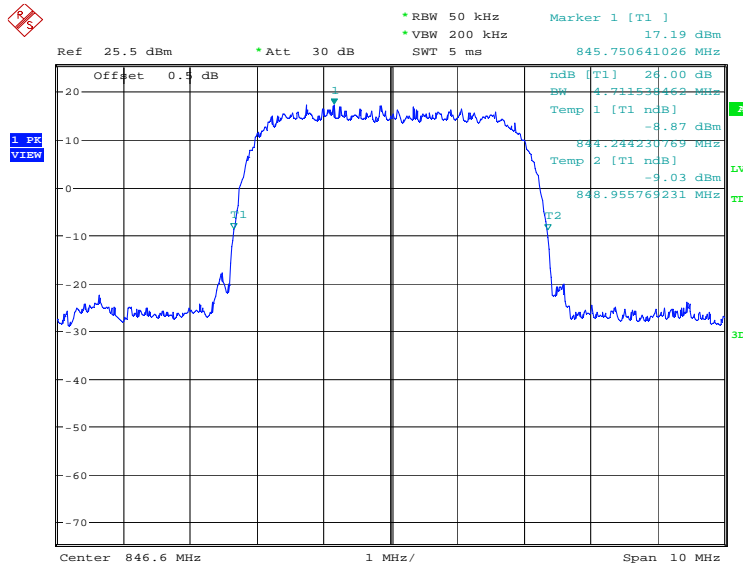


Date: 11.JUN.2021 14:22:21

### WCDMA Band IV-QPSK (-26dBc)

Frequency (MHz)	Emission Bandwidth (-26dBc)(kHz)
1712.4	4711.54
1732.4	4679.49
1752.6	4711.54


### WCDMA Band IV (-26dBc)

#### Channel 1312-Emission Bandwidth (-26dBc BW)

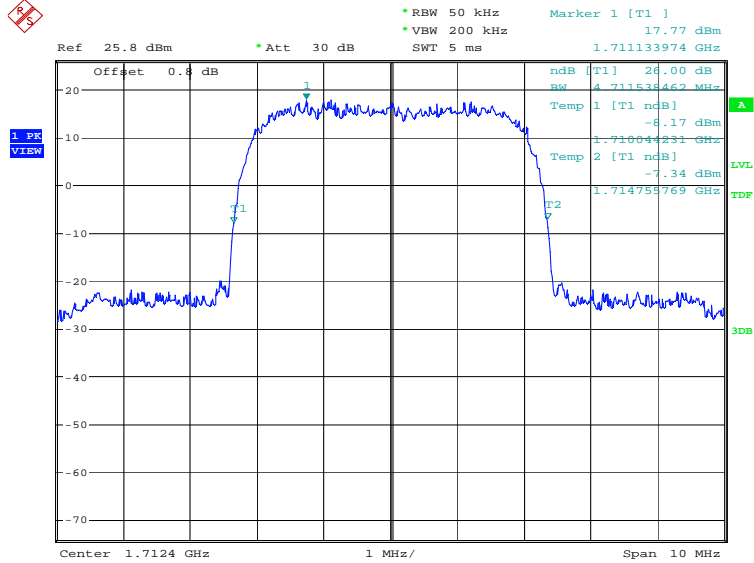


Date: 11.JUN.2021 12:37:22

### Channel 1412-Emission Bandwidth (-26dBc BW)

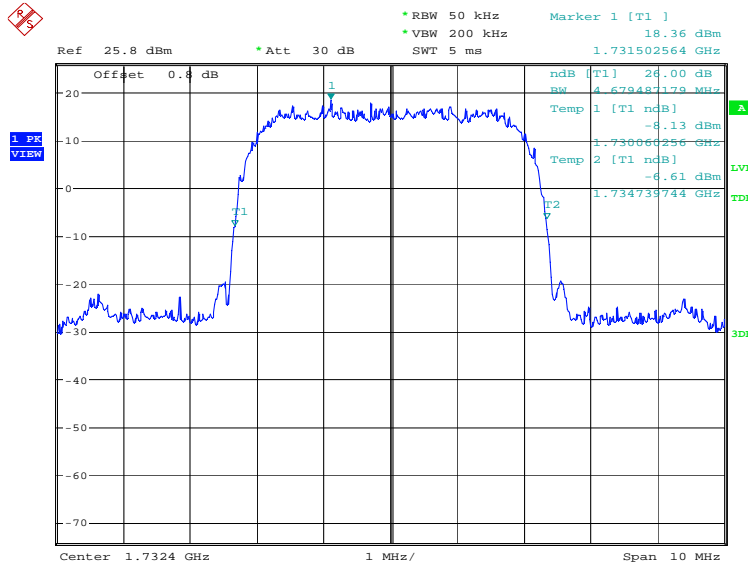

Date: 11.JUN.2021 12:37:49

### Channel 1513-Emission Bandwidth (-26dBc BW)

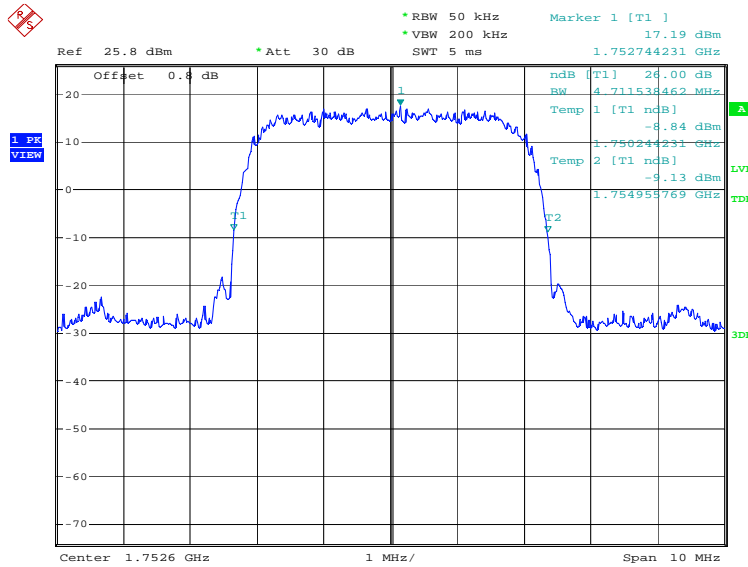

Date: 11.JUN.2021 12:38:16


## **A.6 Band Edge Compliance**

### **A.6.1 Measurement limit**

Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


According to KDB 971168, a relaxation of the reference bandwidth is often provided for measurements within a specified frequency range at the edge of the authorized frequency block/band. This is often implemented by permitting the use of a narrower RBW (typically limited to a minimum RBW of 1% of the OBW) for measuring the out-of-band emissions without a requirement to integrate the result over the full reference bandwidth.

**A.6.2 Measurement result**  
**WCDMA Band II-QPSK**  
**Channel 9262**

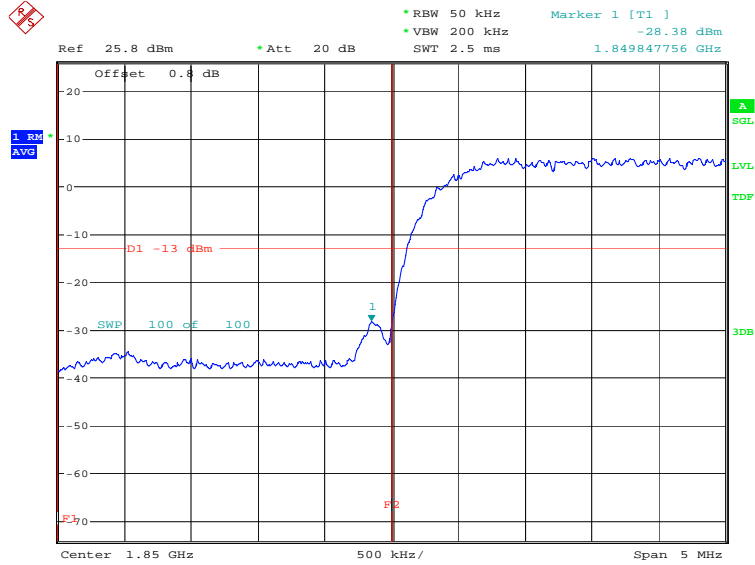


Date: 11.JUN.2021 12:39:23

**Channel 9538**

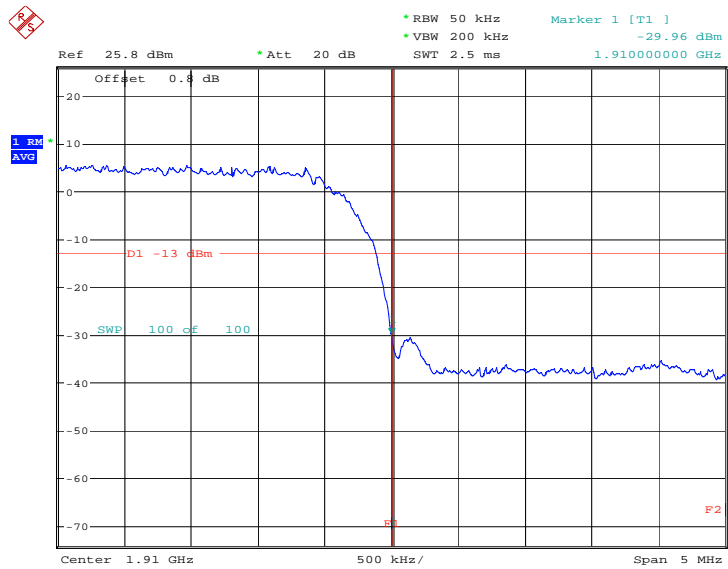


Date: 11.JUN.2021 12:40:38

### WCDMA Band V-QPSK Channel 4132

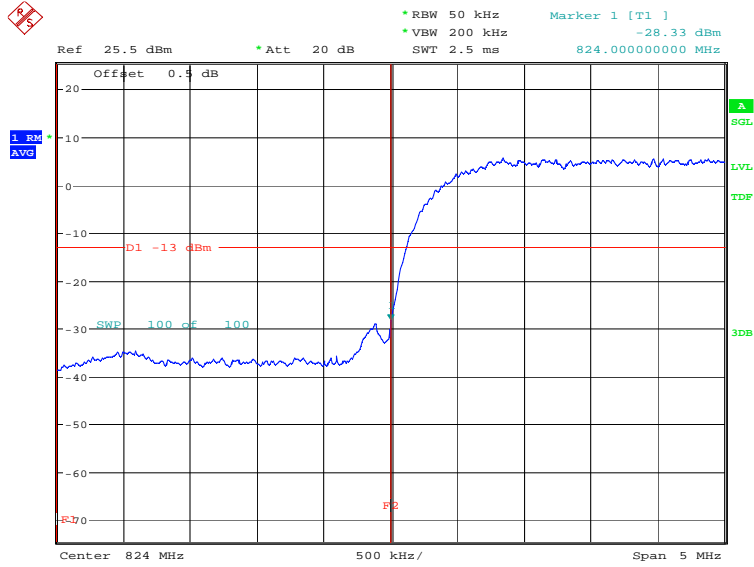


Date: 11.JUN.2021 14:23:29

### Channel 4233

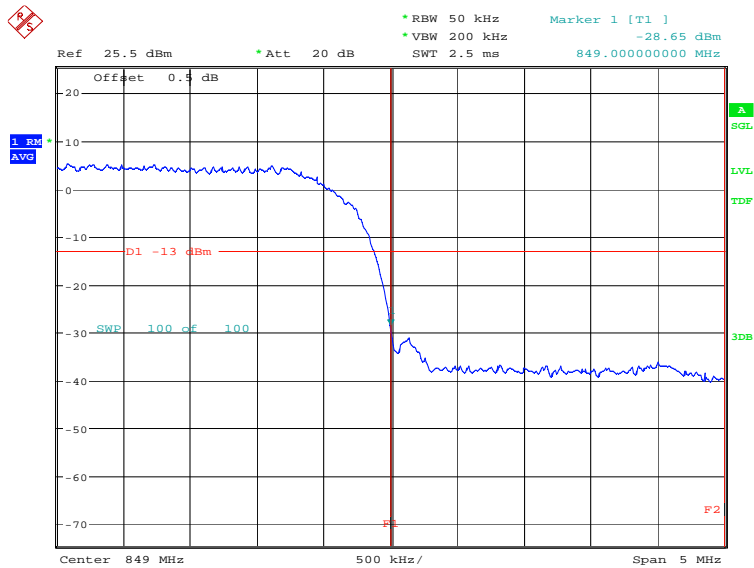


Date: 11.JUN.2021 14:24:44

**WCDMA Band IV-QPSK**  
**Channel 1312**

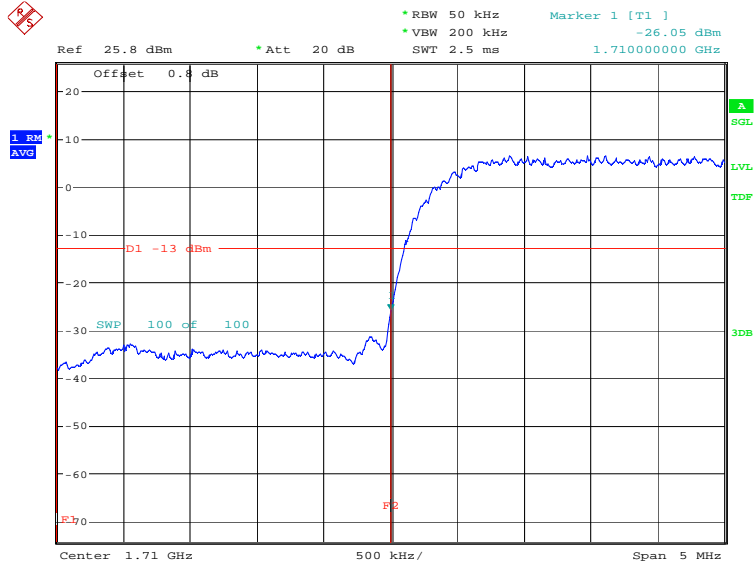

Date: 11.JUN.2021 12:42:30

**Channel 1513**

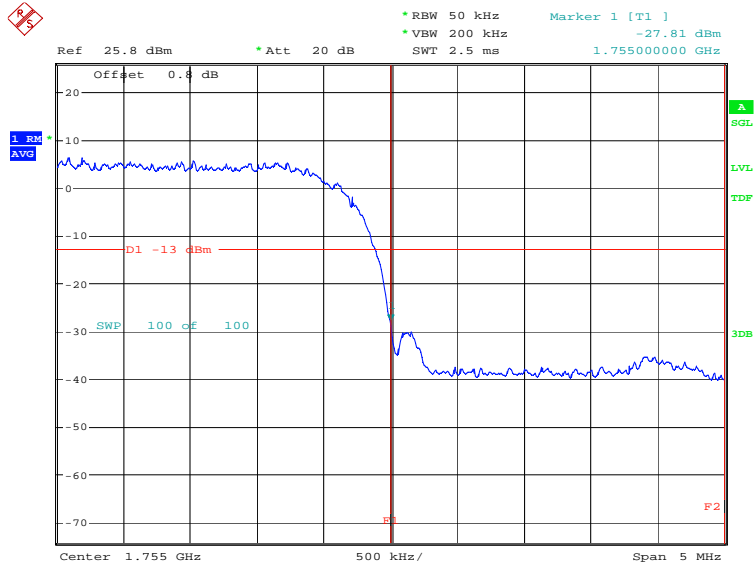

Date: 11.JUN.2021 12:43:44

## **A.7 Conducted Spurious Emission**

### **A.7.1 Measurement Method**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
  - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
  - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is greater than  $2 \times \text{span}/\text{RBW}$ .

### **A. 7.2 Measurement Limit**

Part 22.917 , Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.




### A.7.3 Measurement result

#### WCDMA Band II

#### Channel 9262: 30MHz – 19.10GHz


NOTE: peak above the limit line is the carrier frequency.

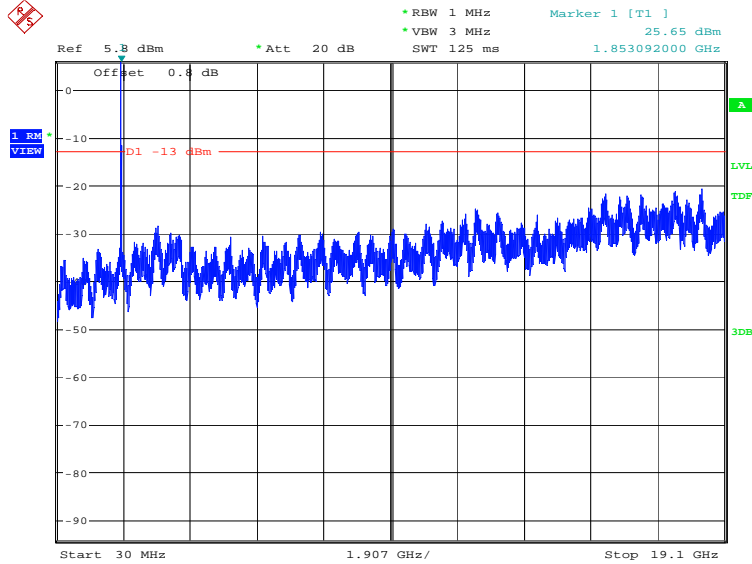

Date: 11.JUN.2021 12:46:00

#### Channel 9400: 30MHz – 19.10GHz

NOTE: peak above the limit line is the carrier frequency.

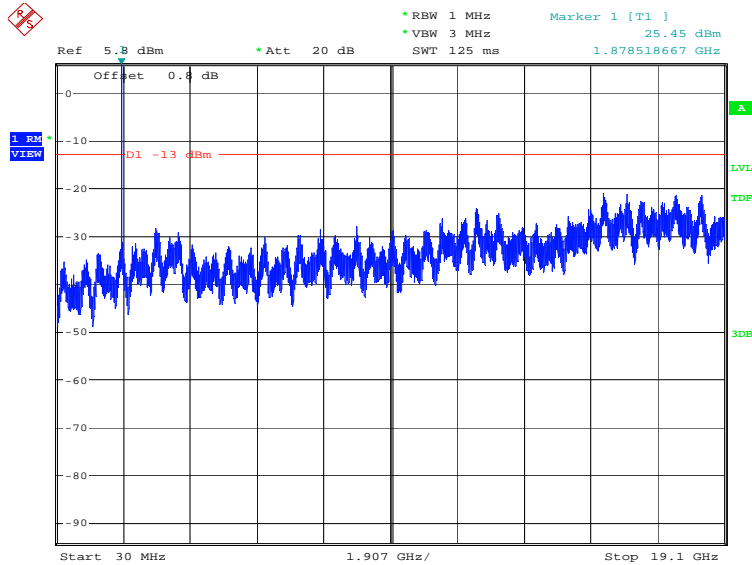


Date: 11.JUN.2021 12:46:30



### Channel 9538: 30MHz –19.10GHz

NOTE: peak above the limit line is the carrier frequency.

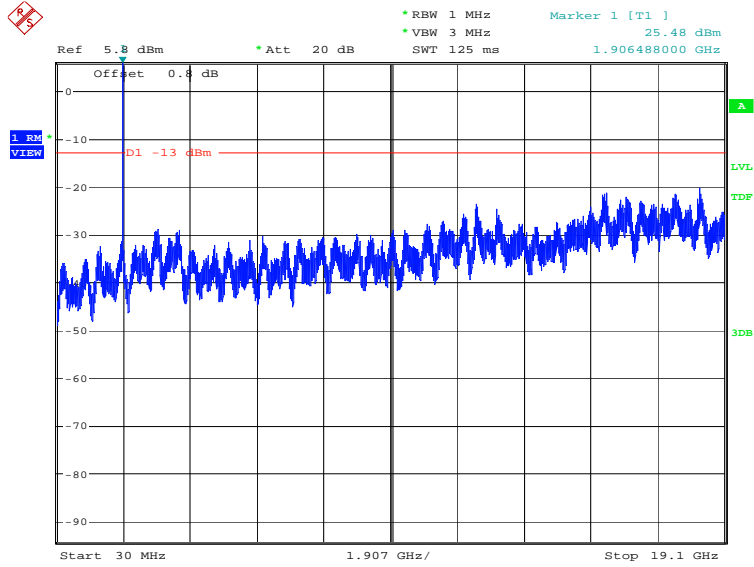


Date: 11.JUN.2021 12:47:01

### WCDMA Band V

### Channel 4132: 30MHz –8.49GHz


NOTE: peak above the limit line is the carrier frequency.

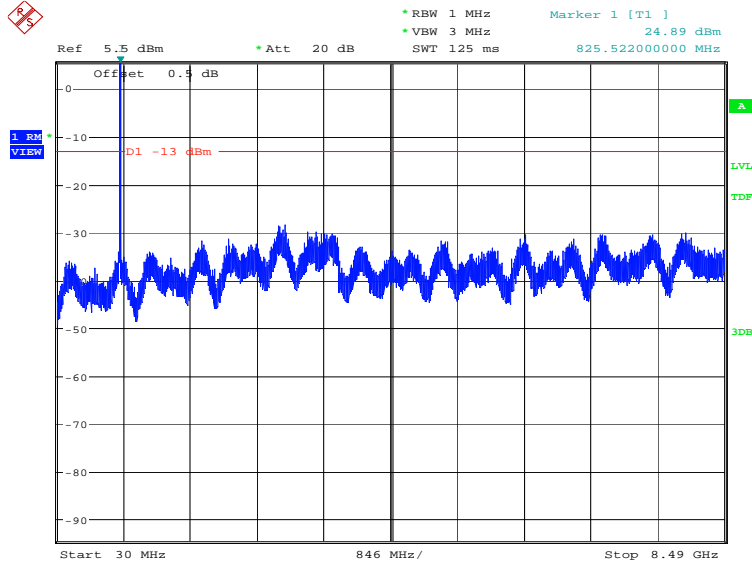

Date: 11.JUN.2021 14:27:00

### Channel 4183: 30MHz –8.49GHz


NOTE: peak above the limit line is the carrier frequency.

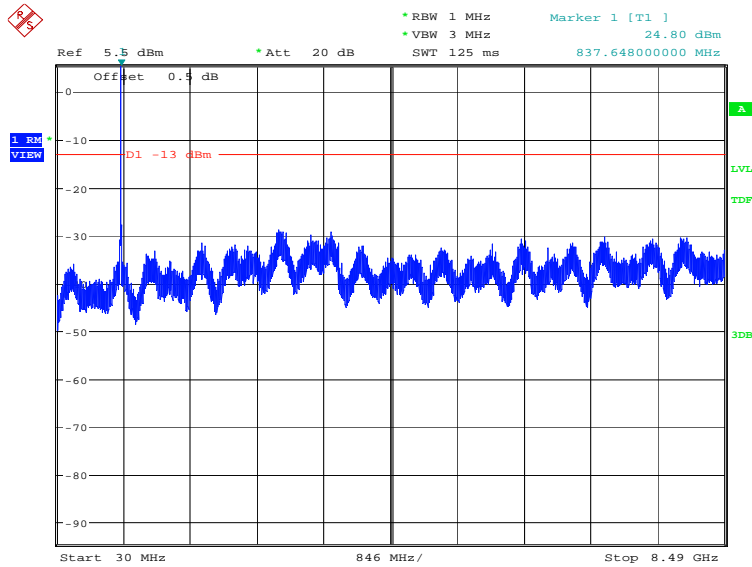

Date: 11.JUN.2021 14:27:30

### Channel 4233: 30MHz –8.49GHz

NOTE: peak above the limit line is the carrier frequency.

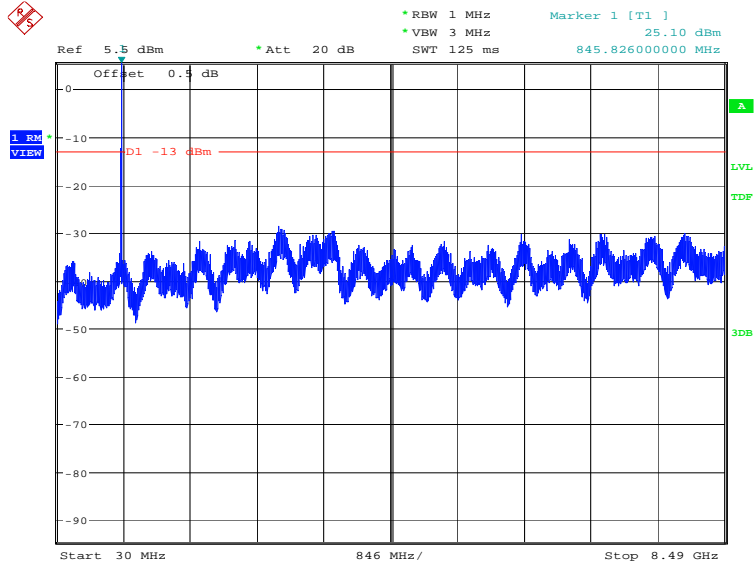


Date: 11.JUN.2021 14:28:00

### WCDMA Band IV

Channel 1312: 30MHz –17.55GHz

NOTE: peak above the limit line is the carrier frequency.

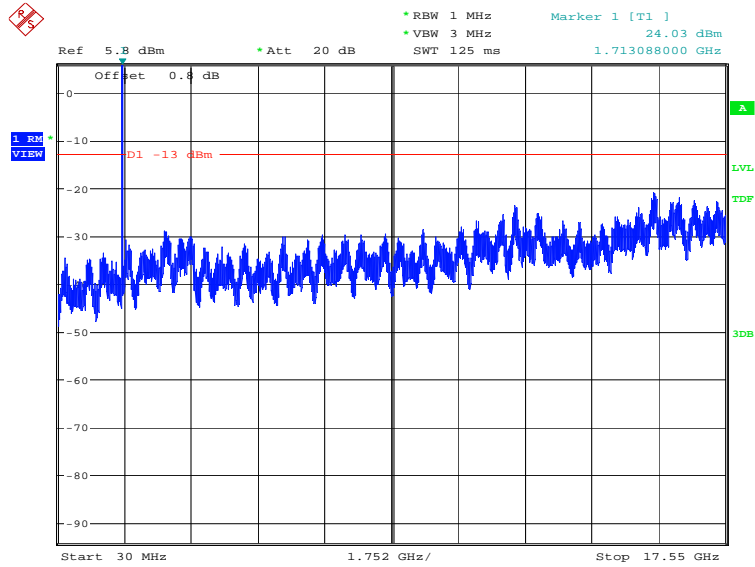


Date: 11.JUN.2021 12:48:08

### WCDMA Band IV

Channel 1412: 30MHz –17.55GHz

NOTE: peak above the limit line is the carrier frequency.

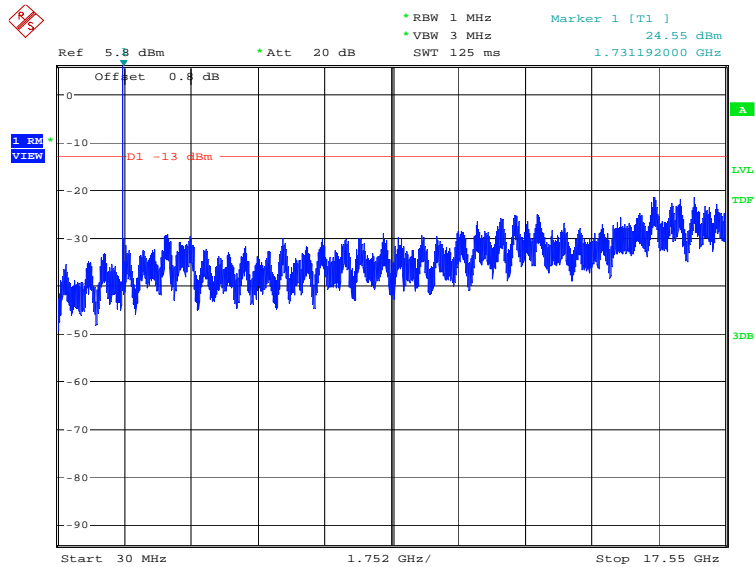


Date: 11.JUN.2021 12:48:38

### WCDMA Band IV

### Channel 1513: 30MHz –17.55GHz

**NOTE: peak above the limit line is the carrier frequency.**

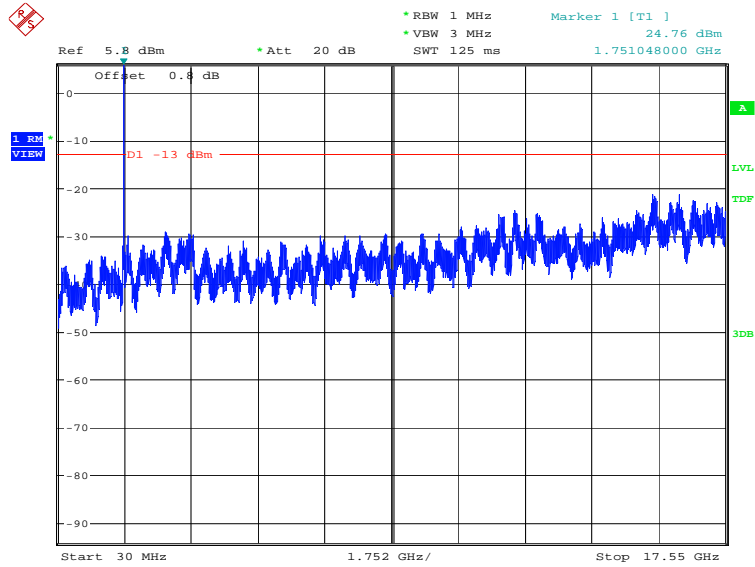

Date: 11.JUN.2021 12:49:09

## **A.8 Peak-to-Average Power Ratio**

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

### **WCDMA Band II-QPSK**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
9400	1880.0	3.59

### **WCDMA Band IV-QPSK**

#### **Measurement result**

CH	Frequency (MHz)	PAPR (dB)
1412	1732.4	3.14

## Annex B: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> <b>Certificate of Accreditation to ISO/IEC 17025:2017</b> <hr/>	
NVLAP LAB CODE: 600118-0	
<b>Telecommunication Technology Labs, CAICT</b> Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
<b>Electromagnetic Compatibility &amp; Telecommunications</b>	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
2021-09-29 through 2022-09-30 <i>Effective Dates</i>	  <i>For the National Voluntary Laboratory Accreditation Program</i>

\*\*\*END OF REPORT\*\*\*