

Fig.60. Conducted spurious emission: 8DPSK, Channel 78, 30MHz - 1GHz

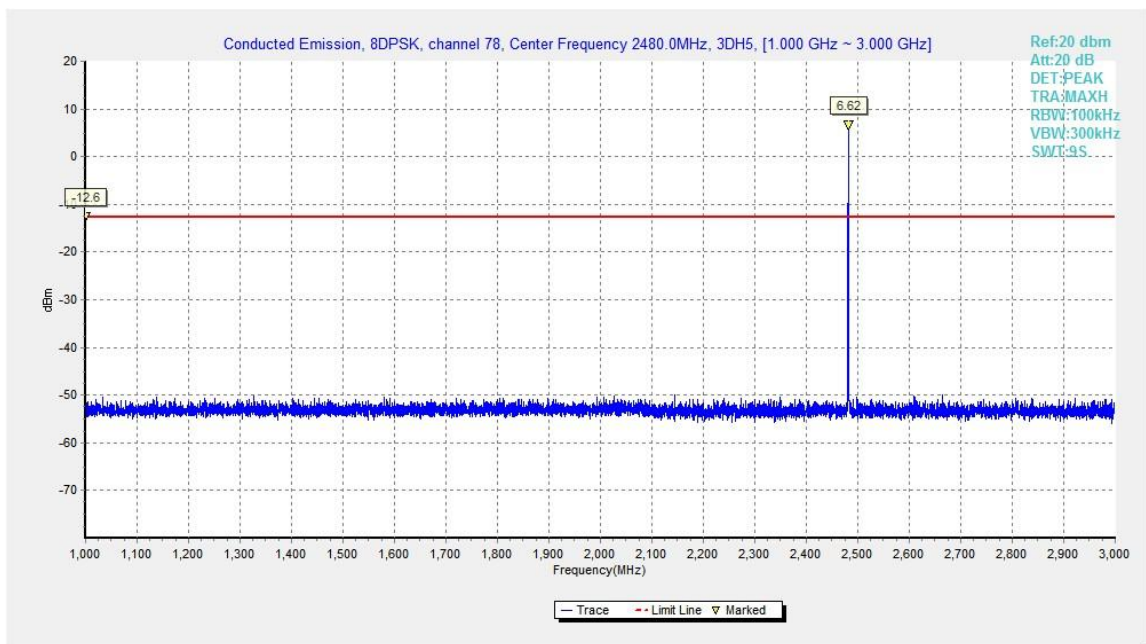


Fig.61. Conducted spurious emission: 8DPSK, Channel 78, 1GHz - 3GHz

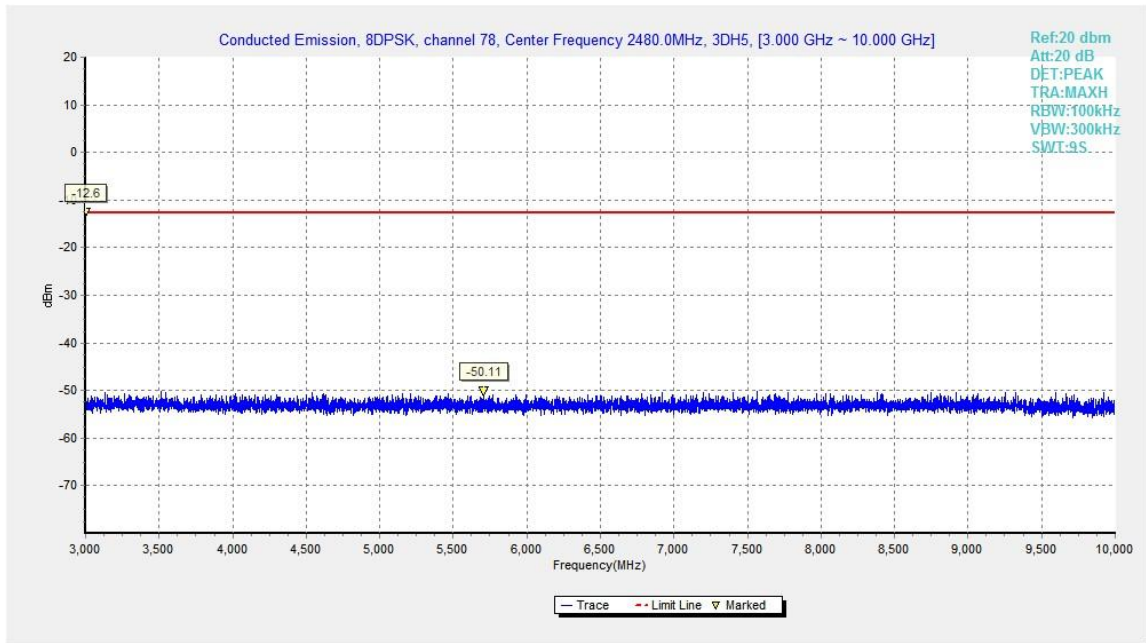


Fig.62. Conducted spurious emission: 8DPSK, Channel 78, 3GHz - 10GHz

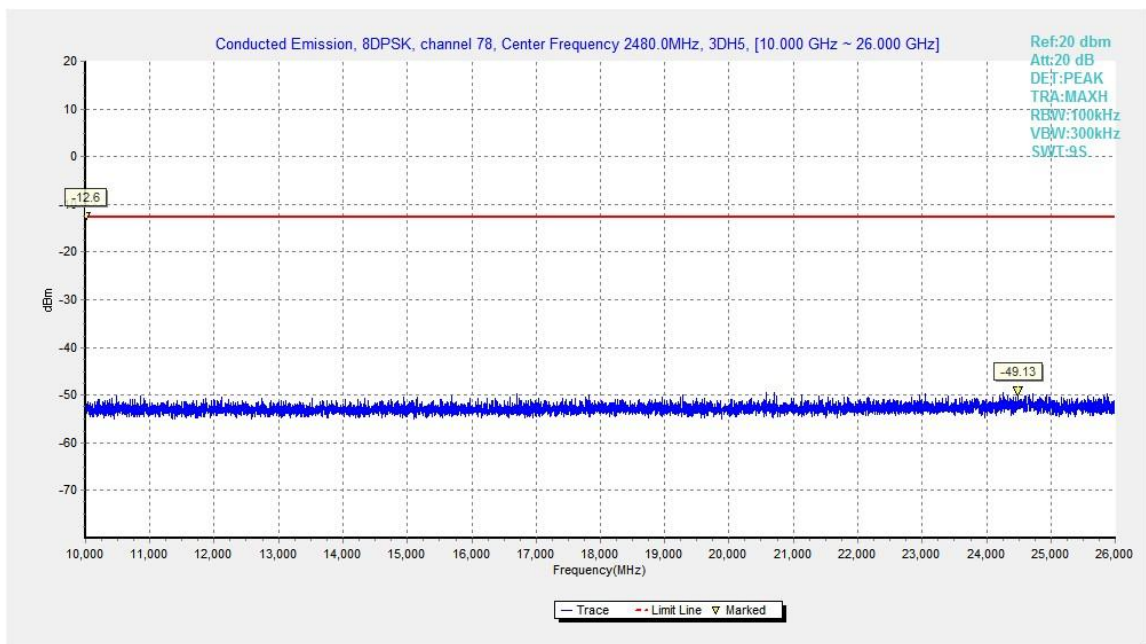


Fig.63. Conducted spurious emission: 8DPSK, Channel 78, 10GHz - 26GHz

B.6. Transmitter Spurious Emission - Radiated

Method of Measurement: See ANSI C63.10-2013-clause 6.4 & 6.5 & 6.6

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247, 15.205, 15.209	20dB below peak output power

radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Limit in restricted band:

Frequency (MHz)	Field strength(μ V/m)	Measurement distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

Set up:

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m

The EUT and transmitting antenna shall be centered on the turntable.

Note:

1. A "reference path loss" is established and the A_{Rpl} is the attenuation of "reference path loss", and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

P_{Mea} is the field strength recorded from the instrument.

The measurement results are obtained as described below:

$$\text{Result} = P_{Mea} + A_{Rpl} = P_{Mea} + \text{Cable Loss} + \text{Antenna Factor}$$

2. The range of evaluated frequency is from 9 kHz to 26GHz. Measurement value show only up to 6 maximum emissions noted.

Peak Measurement results
GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2372.986	60.15	2.85	31.98	25.31	74.00	13.85	V
2387.630	60.14	2.86	32.00	25.28	74.00	13.86	H
4804.000	43.90	-33.27	34.12	43.05	74.00	30.10	V
7206.000	43.22	-31.17	35.78	38.60	74.00	30.78	H
9608.000	44.20	-30.55	36.65	38.10	74.00	29.80	V
12010.000	47.13	-28.93	38.71	37.36	74.00	26.87	V

GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2364.200	44.12	-35.34	31.97	47.48	74.00	29.88	V
2508.600	44.54	-34.95	32.12	47.37	74.00	29.46	V
4882.000	44.20	-33.32	34.15	43.36	74.00	29.80	H
7323.000	43.19	-30.91	35.83	38.26	74.00	30.81	V
9764.000	44.46	-30.33	36.87	37.92	74.00	29.54	H
12205.000	46.90	-28.02	38.82	36.09	74.00	27.10	V

GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2486.400	60.40	2.93	32.09	25.38	74.00	13.60	H
2490.250	60.72	2.94	32.09	25.69	74.00	13.28	V
4960.000	44.30	-33.60	34.18	43.71	74.00	29.70	V
7440.000	42.42	-31.69	35.88	38.23	74.00	31.58	V
9920.000	44.85	-30.00	37.09	37.76	74.00	29.15	V
12400.000	46.74	-28.10	38.94	35.90	74.00	27.26	H

$\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2366.994	60.07	2.85	31.98	25.24	74.00	13.93	V
2383.290	60.60	2.86	31.99	25.75	74.00	13.40	V
4804.000	42.73	-33.27	34.12	41.87	74.00	31.27	V
7206.000	43.59	-31.17	35.78	38.97	74.00	30.41	V
9608.000	43.43	-30.55	36.65	37.33	74.00	30.57	H
12010.000	46.71	-28.93	38.71	36.93	74.00	27.29	H

 $\pi/4$ DQPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2365.000	43.22	-35.34	31.98	46.58	74.00	30.78	V
2511.000	43.69	-34.91	32.12	46.47	74.00	30.31	V
4882.000	42.60	-33.32	34.15	41.76	74.00	31.40	V
7323.000	43.62	-30.91	35.83	38.70	74.00	30.38	V
9764.000	44.24	-30.33	36.87	37.70	74.00	29.76	V
12205.000	46.44	-28.02	38.82	35.64	74.00	27.56	H

 $\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2489.660	60.65	2.94	32.09	25.62	74.00	13.35	V
2499.670	60.48	2.94	32.10	25.43	74.00	13.52	V
4960.000	42.47	-33.60	34.18	41.89	74.00	31.53	H
7440.000	44.49	-31.69	35.88	40.30	74.00	29.51	V
9920.000	45.06	-30.00	37.09	37.97	74.00	28.94	V
12400.000	46.91	-28.10	38.94	36.07	74.00	27.09	H

8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2377.550	60.33	2.86	31.99	25.49	74.00	13.67	H
2387.252	60.33	2.86	32.00	25.47	74.00	13.67	V
4804.000	42.84	-33.27	34.12	41.99	74.00	31.16	H
7206.000	43.29	-31.17	35.78	38.68	74.00	30.71	V
9608.000	43.98	-30.55	36.65	37.88	74.00	30.02	V
12010.000	46.47	-28.93	38.71	36.69	74.00	27.53	V

8DPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2374.000	44.16	-35.35	31.98	47.52	74.00	29.84	V
2509.800	44.14	-34.93	32.12	46.95	74.00	29.86	V
4882.000	42.23	-33.32	34.15	41.39	74.00	31.77	V
7323.000	43.11	-30.91	35.83	38.19	74.00	30.89	H
9764.000	44.37	-30.33	36.87	37.83	74.00	29.63	H
12205.000	46.83	-28.02	38.82	36.02	74.00	27.17	V

8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2496.725	60.25	2.94	32.10	25.21	74.00	13.75	H
2499.120	60.49	2.94	32.10	25.45	74.00	13.51	V
4960.000	43.26	-33.60	34.18	42.67	74.00	30.74	H
7440.000	42.63	-31.69	35.88	38.44	74.00	31.37	V
9920.000	44.29	-30.00	37.09	37.19	74.00	29.71	H
12400.000	46.36	-28.10	38.94	35.51	74.00	27.64	H

Average Measurement results
GFSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.320	46.36	2.87	32.00	11.50	54.00	7.64	V
2389.980	46.29	2.87	32.00	11.42	54.00	7.71	V
4803.700	34.29	-33.27	34.12	33.44	54.00	19.71	V
7206.000	30.95	-31.17	35.78	26.33	54.00	23.05	V
9608.000	30.72	-30.55	36.65	24.62	54.00	23.28	V
12010.000	33.51	-28.93	38.71	23.74	54.00	20.49	H

GFSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2435.040	46.44	2.90	32.04	11.50	54.00	7.56	V
2447.160	46.48	2.91	32.05	11.52	54.00	7.52	V
4881.500	31.89	-33.32	34.15	31.05	54.00	22.11	H
7323.000	30.23	-30.91	35.83	25.31	54.00	23.77	H
9764.000	31.24	-30.33	36.87	24.70	54.00	22.76	V
12205.000	33.94	-28.02	38.82	23.13	54.00	20.06	H

GFSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.520	50.85	2.93	32.09	15.83	54.00	3.15	V
2483.580	50.31	2.93	32.09	15.30	54.00	3.69	V
4960.000	35.03	-33.60	34.18	34.44	54.00	18.97	V
7440.000	30.63	-31.69	35.88	26.45	54.00	23.37	H
9920.000	31.53	-30.00	37.09	24.44	54.00	22.47	V
12400.000	33.87	-28.10	38.94	23.02	54.00	20.13	H

$\pi/4$ DQPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.920	46.34	2.87	32.00	11.48	54.00	7.66	V
2389.980	46.36	2.87	32.00	11.50	54.00	7.64	V
4803.500	32.39	-33.27	34.12	31.54	54.00	21.61	V
7206.000	30.89	-31.17	35.78	26.27	54.00	23.11	H
9608.000	30.84	-30.55	36.65	24.74	54.00	23.16	V
12010.000	33.63	-28.93	38.71	23.85	54.00	20.37	H

 $\pi/4$ DQPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2434.980	46.45	2.90	32.04	11.52	54.00	7.55	V
2446.680	46.49	2.91	32.05	11.53	54.00	7.51	V
4881.500	32.54	-33.32	34.15	31.70	54.00	21.46	H
7323.000	30.38	-30.91	35.83	25.46	54.00	23.62	H
9764.000	31.37	-30.33	36.87	24.83	54.00	22.63	V
12205.000	33.79	-28.02	38.82	22.98	54.00	20.21	H

 $\pi/4$ DQPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.520	49.34	2.93	32.09	14.32	54.00	4.66	V
2483.580	48.74	2.93	32.09	13.72	54.00	5.26	V
4959.500	31.36	-33.60	34.18	30.77	54.00	22.64	V
7440.000	30.56	-31.69	35.88	26.37	54.00	23.44	H
9920.000	31.46	-30.00	37.09	24.37	54.00	22.54	V
12400.000	33.75	-28.10	38.94	22.91	54.00	20.25	H

8DPSK Ch 0

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2389.920	46.22	2.87	32.00	11.35	54.00	7.78	V
2389.980	46.26	2.87	32.00	11.39	54.00	7.74	V
4803.700	32.02	-33.27	34.12	31.17	54.00	21.98	V
7206.000	30.96	-31.17	35.78	26.34	54.00	23.04	H
9608.000	30.93	-30.55	36.65	24.83	54.00	23.07	V
12010.000	33.66	-28.93	38.71	23.88	54.00	20.34	V

8DPSK Ch 39

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2436.780	46.57	2.90	32.04	11.63	54.00	7.43	V
2445.540	46.79	2.90	32.05	11.84	54.00	7.21	V
4803.500	31.45	-33.27	34.12	30.60	54.00	22.55	H
7323.000	30.38	-30.91	35.83	25.46	54.00	23.62	H
9764.000	31.40	-30.33	36.87	24.86	54.00	22.60	V
12205.000	33.87	-28.02	38.82	23.06	54.00	20.13	V

8DPSK Ch 78

Frequency (MHz)	Measurement Result (dBuV/m)	Cable Loss (dB)	Antenna Factor (dB/m)	Receiver Reading (dBuV)	Limit (dBuV/m)	Margin (dB)	Antenna Pol. (H/V)
2483.520	48.54	2.93	32.09	13.52	54.00	5.46	V
2483.580	48.52	2.93	32.09	13.50	54.00	5.48	V
4959.500	31.54	-33.60	34.18	30.95	54.00	22.46	V
7440.000	30.16	-31.69	35.88	25.97	54.00	23.84	H
9920.000	31.52	-30.00	37.09	24.43	54.00	22.48	H
12400.000	33.84	-28.10	38.94	23.00	54.00	20.16	H

Conclusion: Pass

B.7. Time of Occupancy (Dwell Time)

Method of Measurement: See ANSI C63.10-clause 7.8.4

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = zero span, centered on a hopping channel
- RBW = 1 MHz
- VBW \geq RBW
- Sweep = as necessary to capture the entire dwell time per hopping channel
- Detector function = peak
- Trace = max hold

Measure a pulse time in time domain at middle frequency and then count the hopping number in 31.6s(which equals with 0.4 multiply 79) of middle frequency ,then multiply the pulse time and hopping number and record them.

Measurement Limit:

Standard	Limit (ms)
FCC 47 CFR Part 15.247(a) (1)(iii)	< 400

Measurement Result:

For GFSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	Value	Fig.	Value		
39	DH1	Fig.64	0.37	Fig.65	319	118.03	P
	DH3	Fig.66	1.63	Fig.67	108	176.04	P
	DH5	Fig.68	2.88	Fig.69	69	198.72	P

For $\pi/4$ DQPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	Value	Fig.	Value		
39	2DH1	Fig.70	0.38	Fig.71	320	121.6	P
	2DH3	Fig.72	1.63	Fig.73	100	163	P
	2DH5	Fig.74	2.88	Fig.75	55	158.4	P

For 8DPSK

Channel	Packet	Pulse time (ms)		Number of Transmissions		Dwell Time (ms)	Conclusion
		Fig.	Value	Fig.	Value		
39	3DH1	Fig.76	0.38	Fig.77	320	121.6	P
	3DH3	Fig.78	1.63	Fig.79	120	195.6	P
	3DH5	Fig.80	2.88	Fig.81	69	198.72	P

Conclusion: PASS

Test graphs as below:

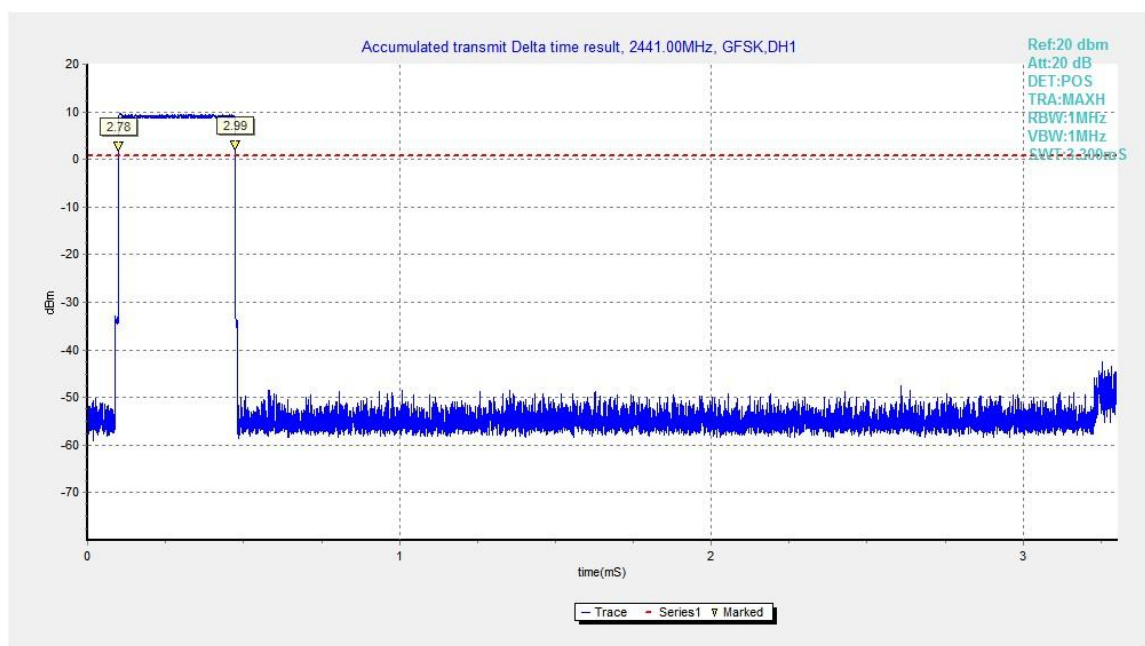


Fig.64. Time of occupancy (Dwell Time): Channel 39, Packet DH1

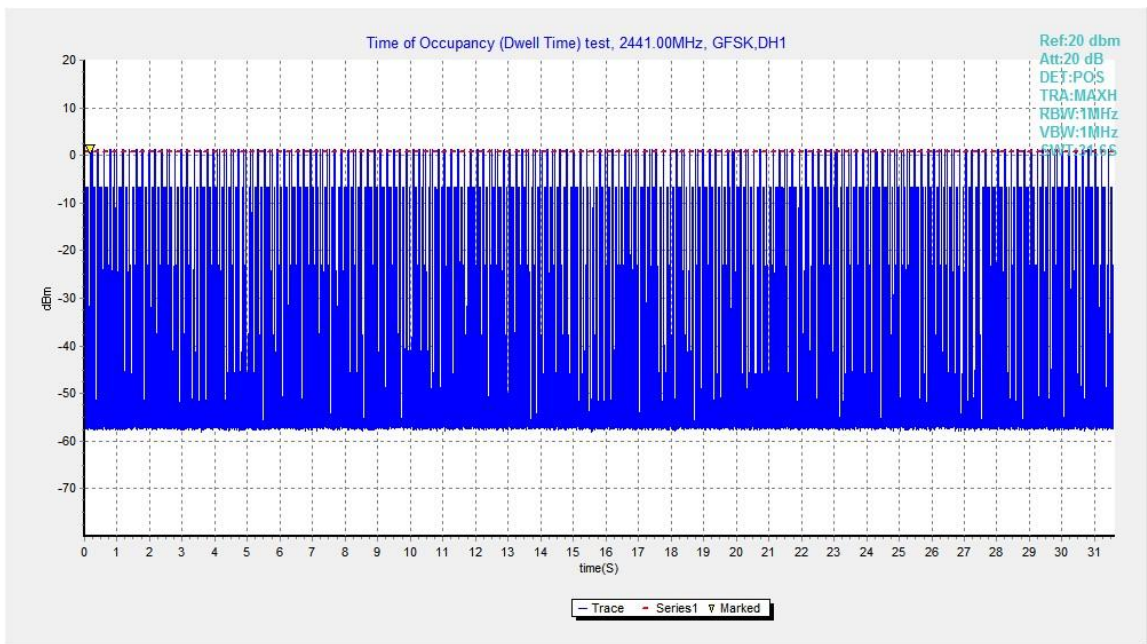


Fig.65. Number of Transmissions Measurement: Channel 39,Packet DH1

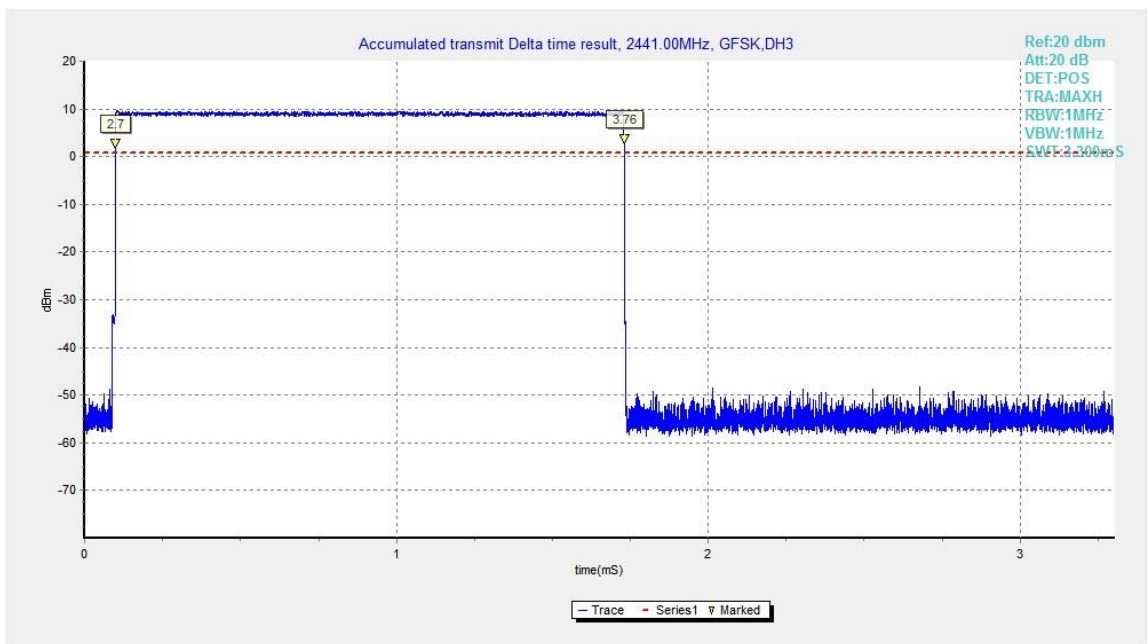


Fig.66. Time of occupancy (Dwell Time): Channel 39, Packet DH3

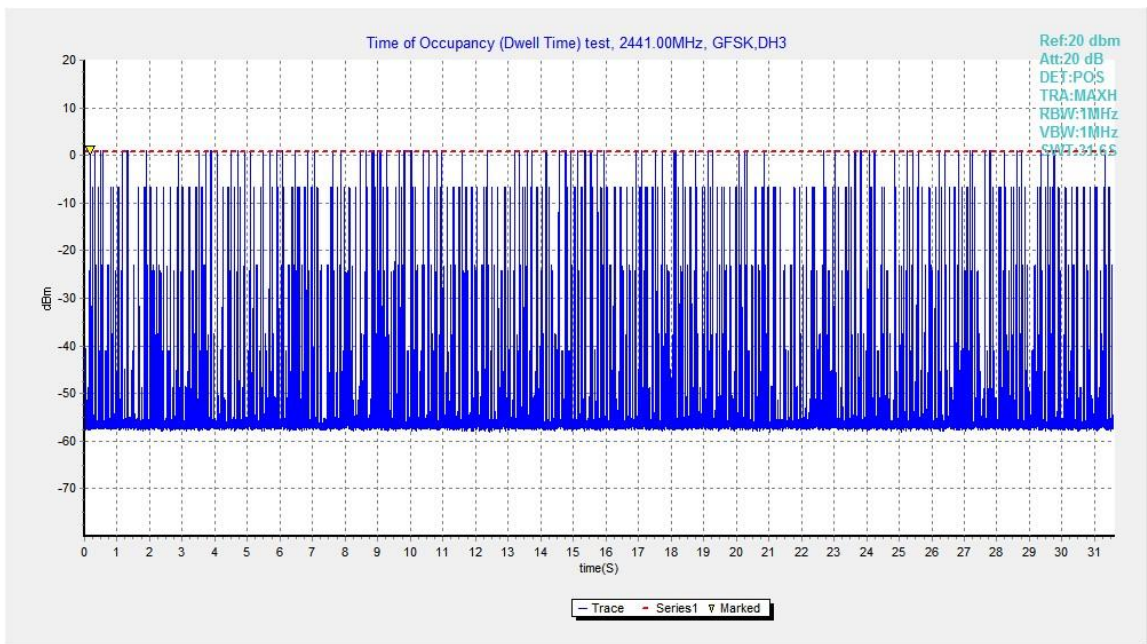


Fig.67. Number of Transmissions Measurement: Channel 39,Packet DH3

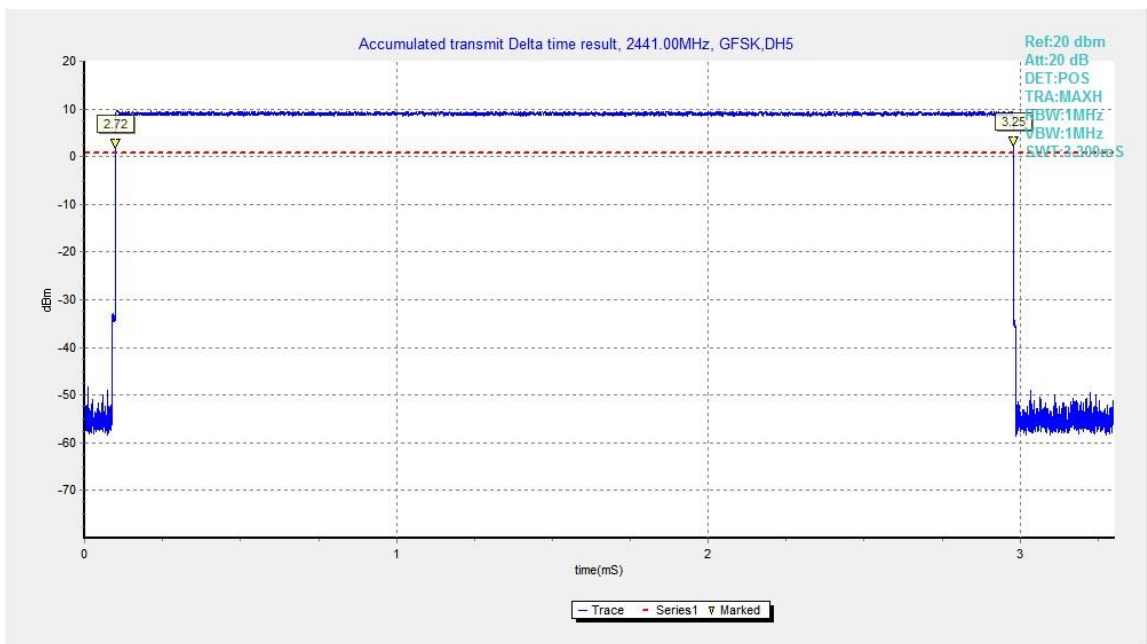


Fig.68. Time of occupancy (Dwell Time): Channel 39, Packet DH5

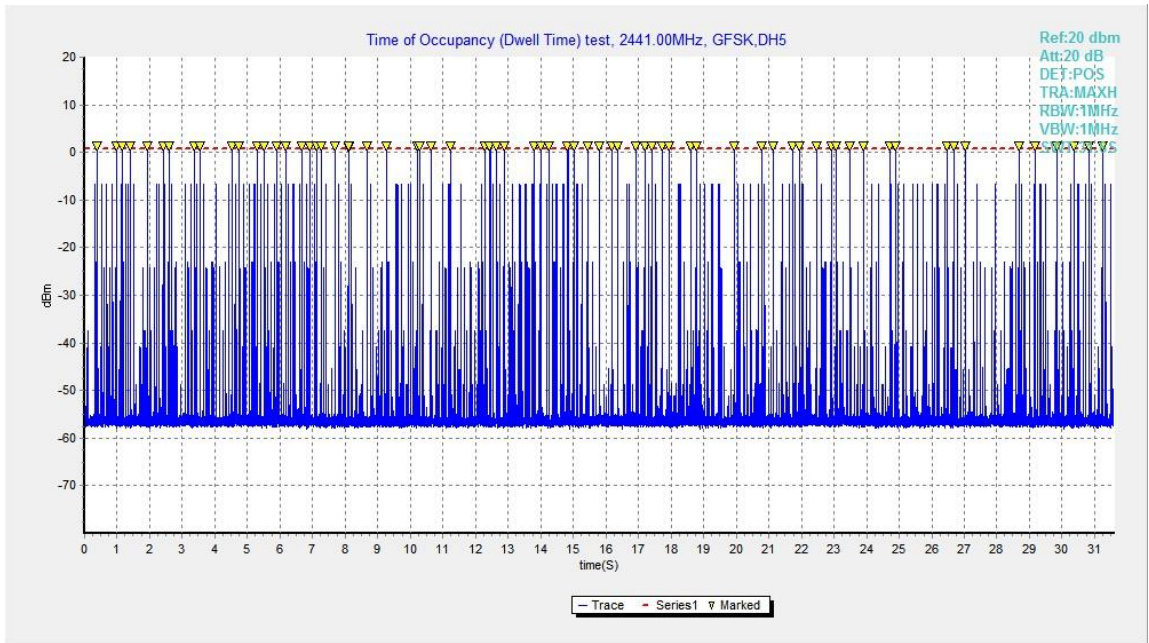


Fig.69. Number of Transmissions Measurement: Channel 39,Packet DH5

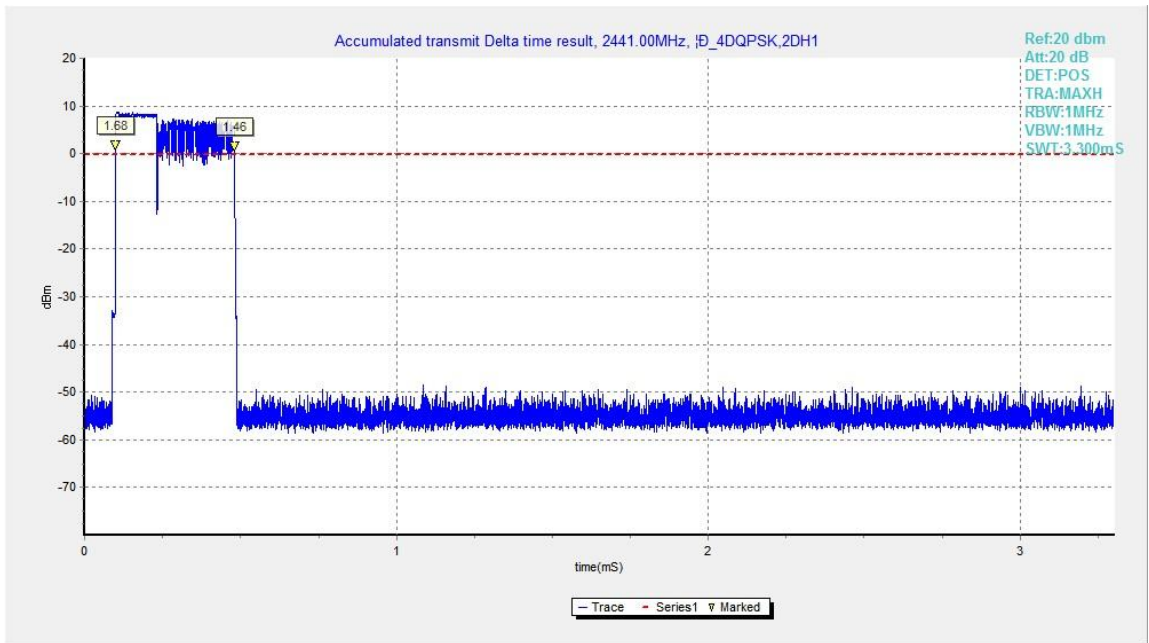


Fig.70. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH1

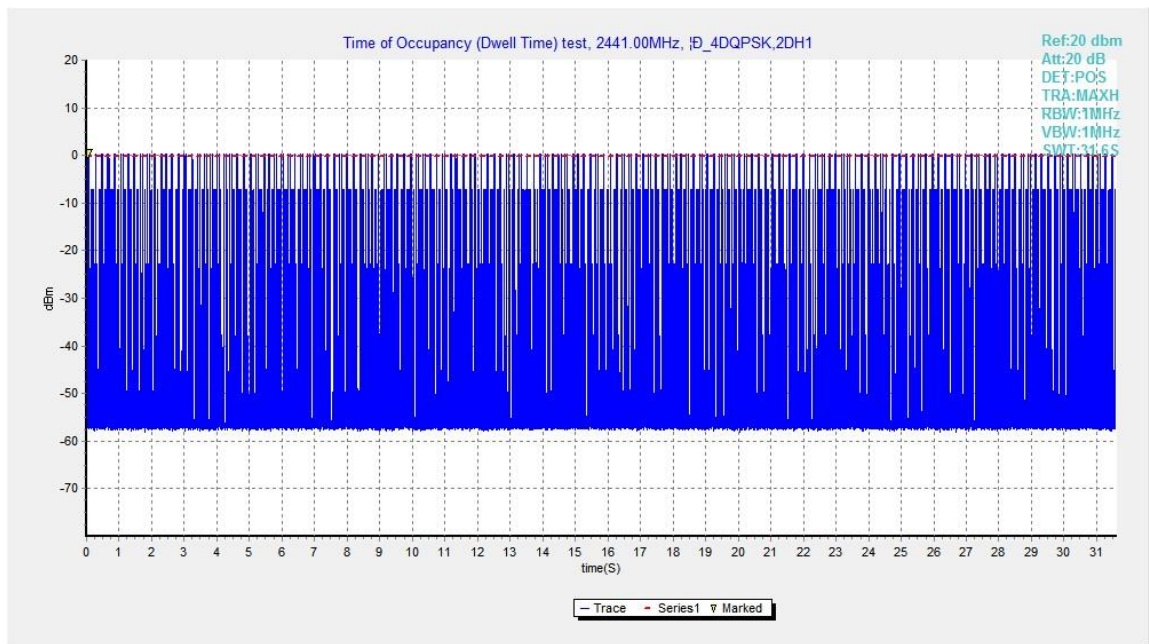


Fig.71. Number of Transmissions Measurement: Channel 39,Packet 2-DH1

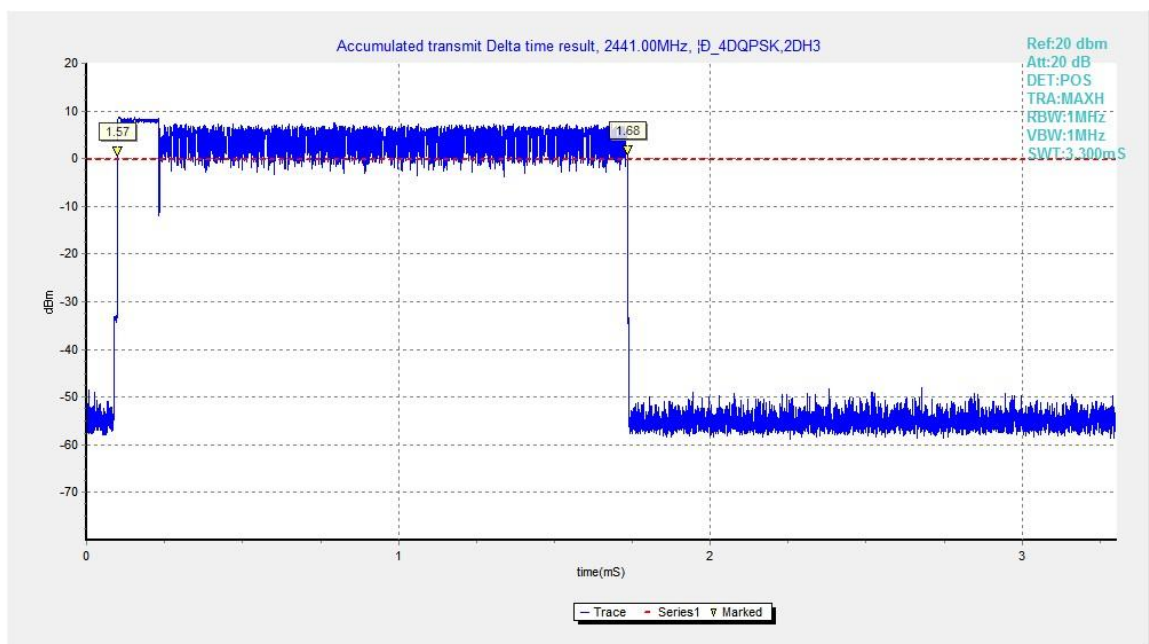


Fig.72. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH3

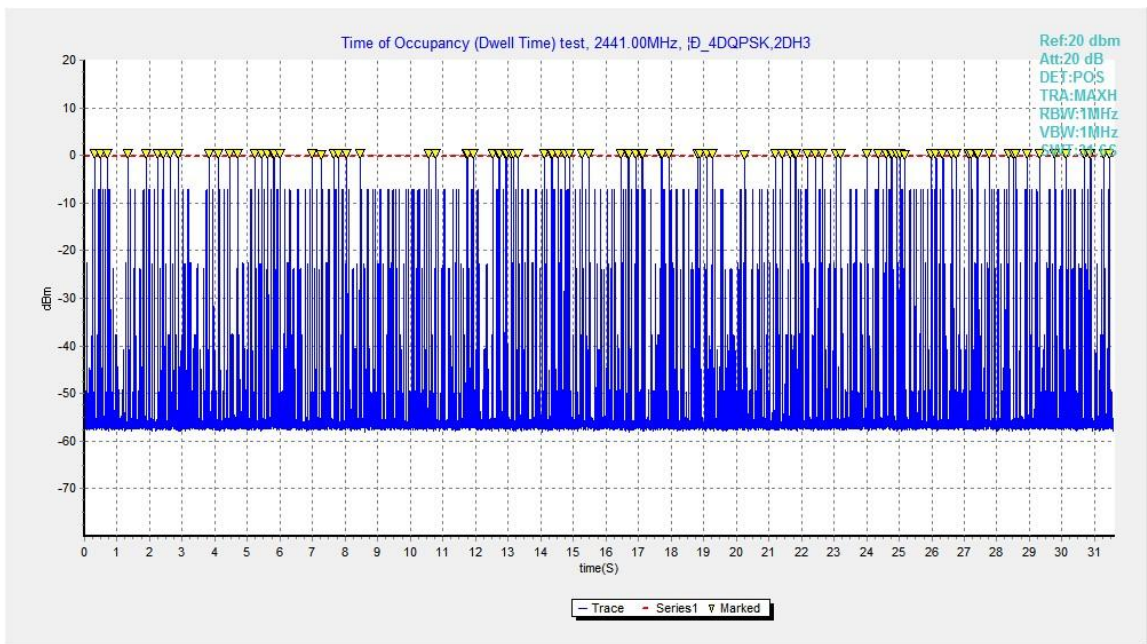


Fig.73. Number of Transmissions Measurement: Channel 39,Packet 2-DH3

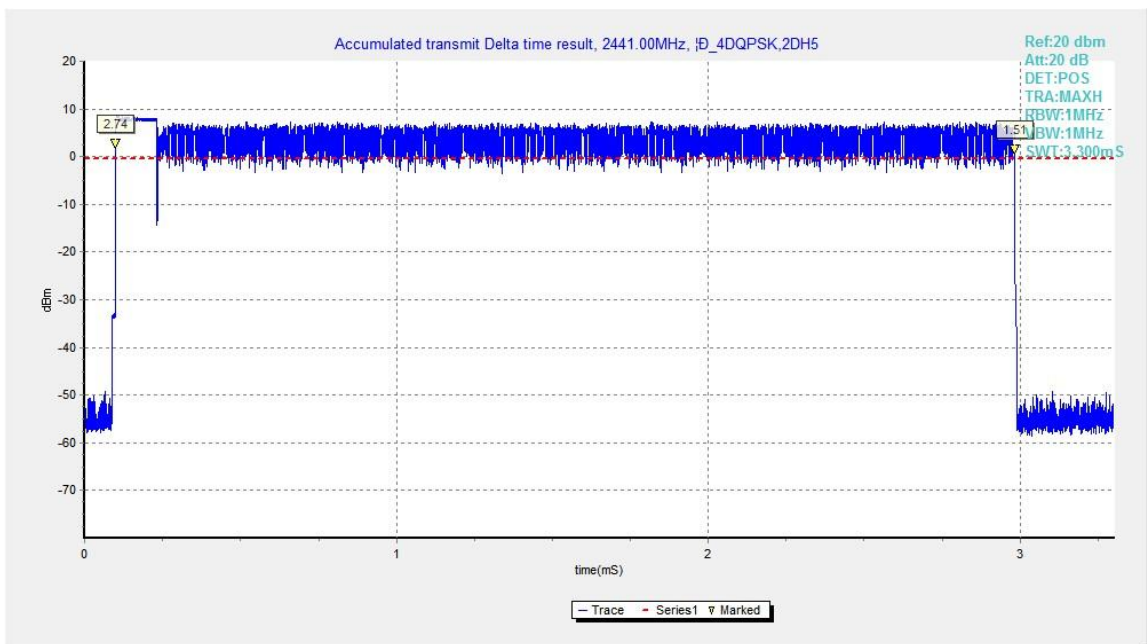


Fig.74. Time of occupancy (Dwell Time): Channel 39, Packet 2-DH5

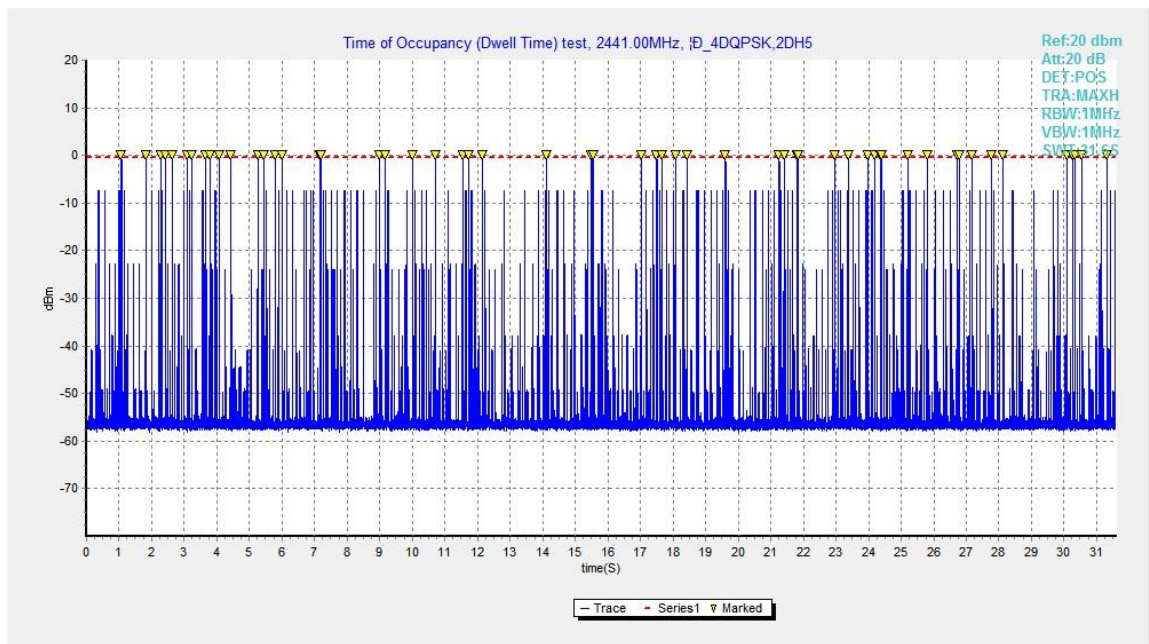


Fig.75. Number of Transmissions Measurement: Channel 39,Packet 2-DH5

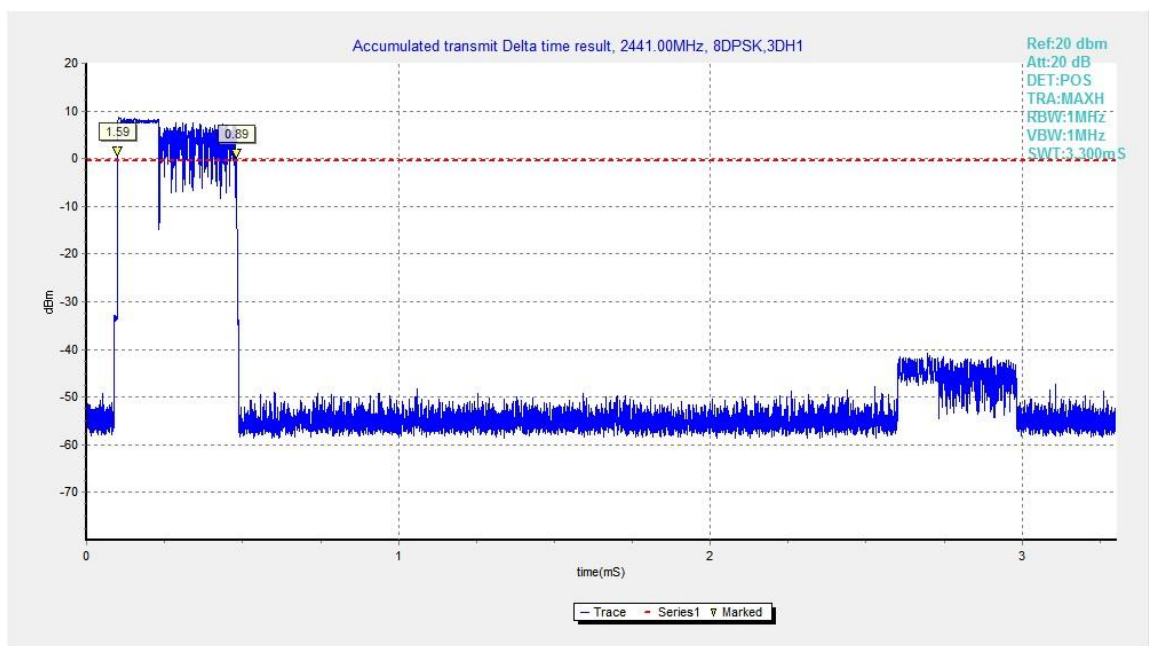


Fig.76. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH1

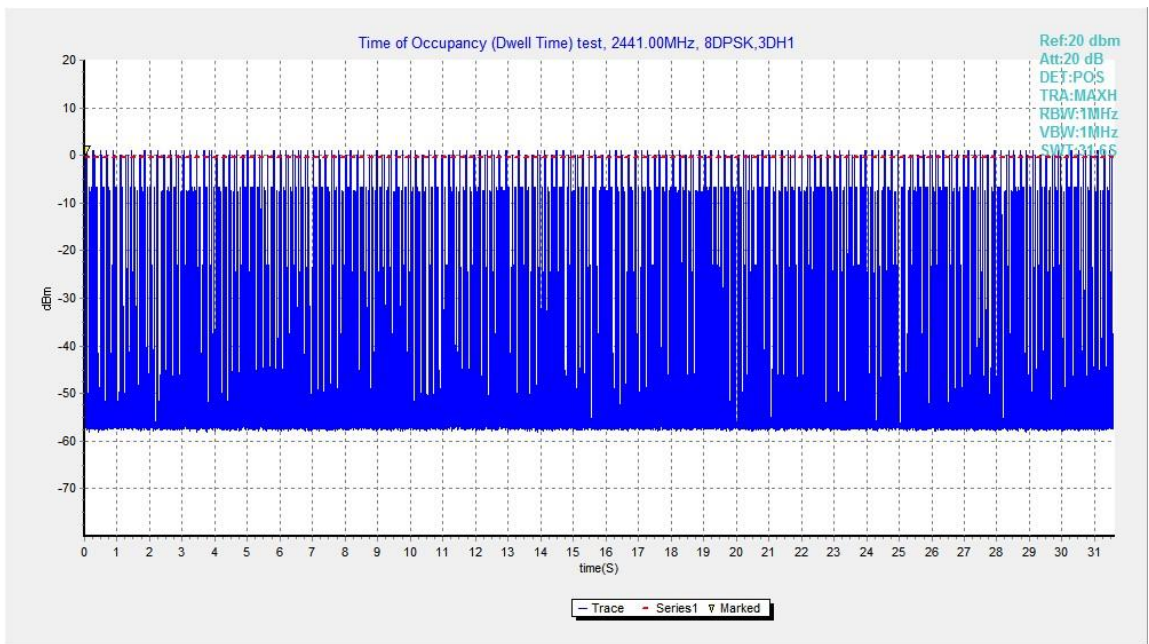


Fig.77. Number of Transmissions Measurement: Channel 39,Packet 3-DH1

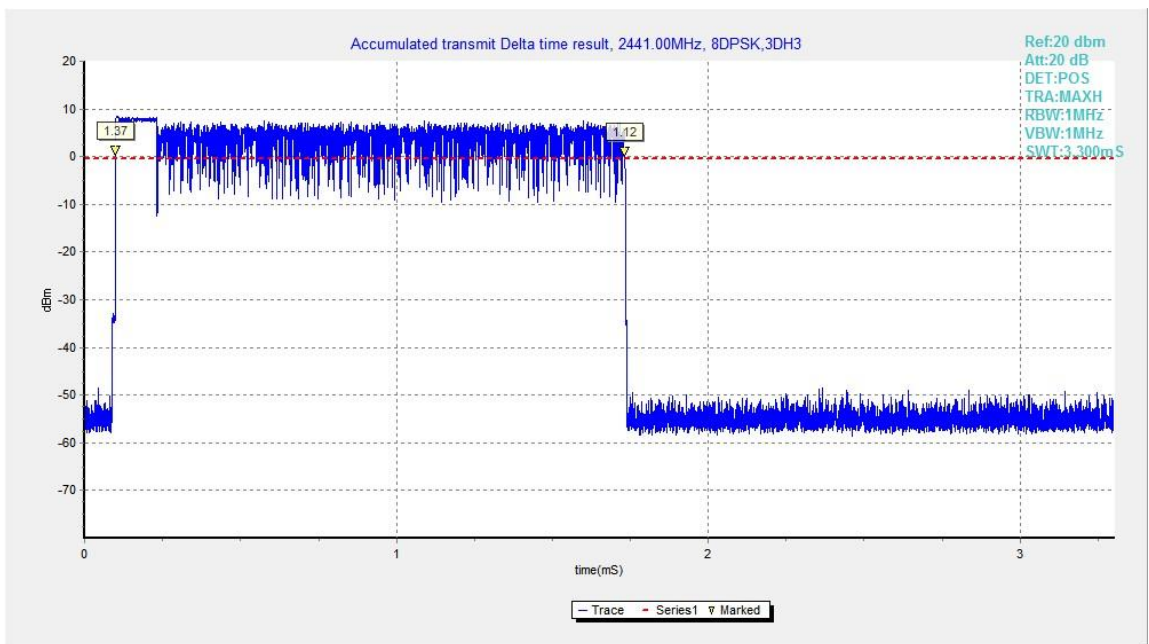


Fig.78. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH3

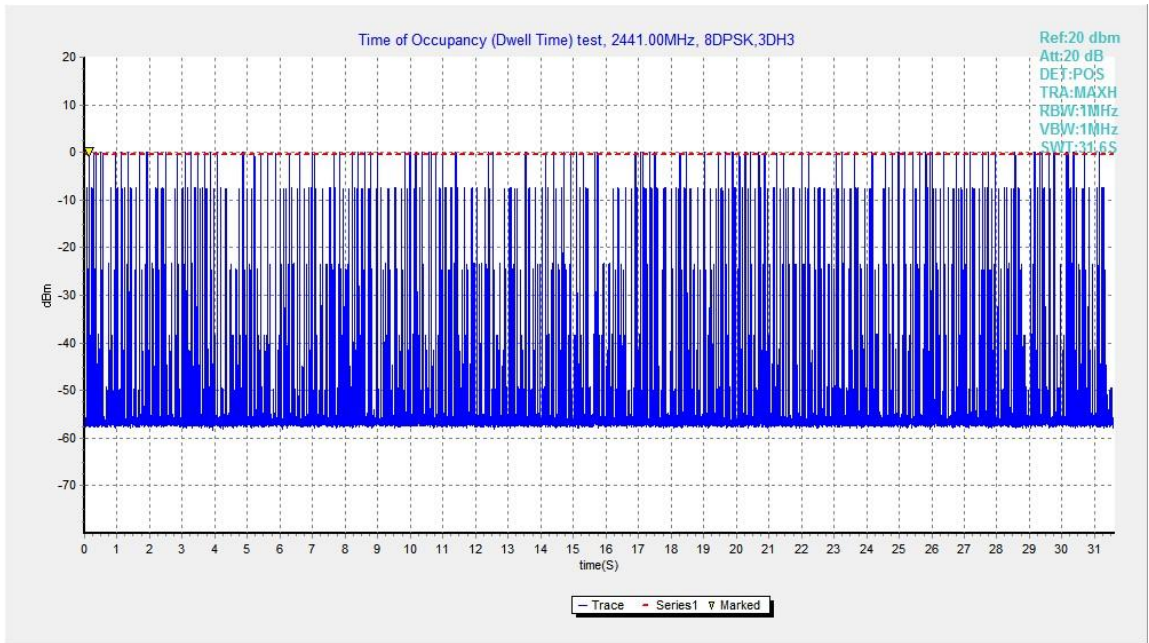


Fig.79. Number of Transmissions Measurement: Channel 39,Packet 3-DH3

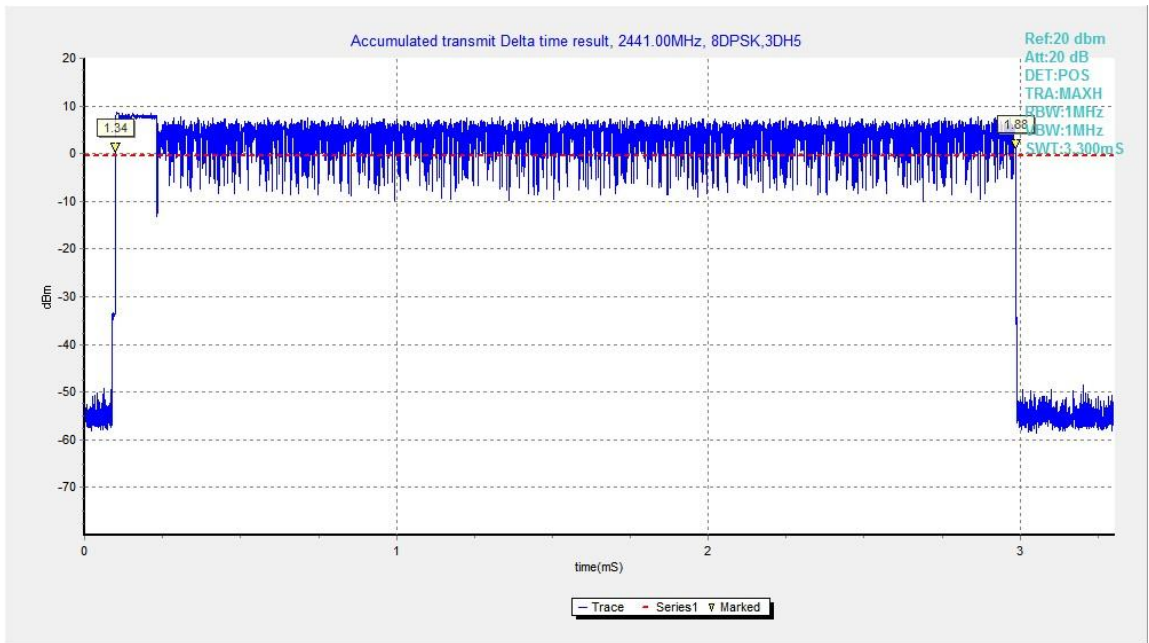


Fig.80. Time of occupancy (Dwell Time): Channel 39, Packet 3-DH5

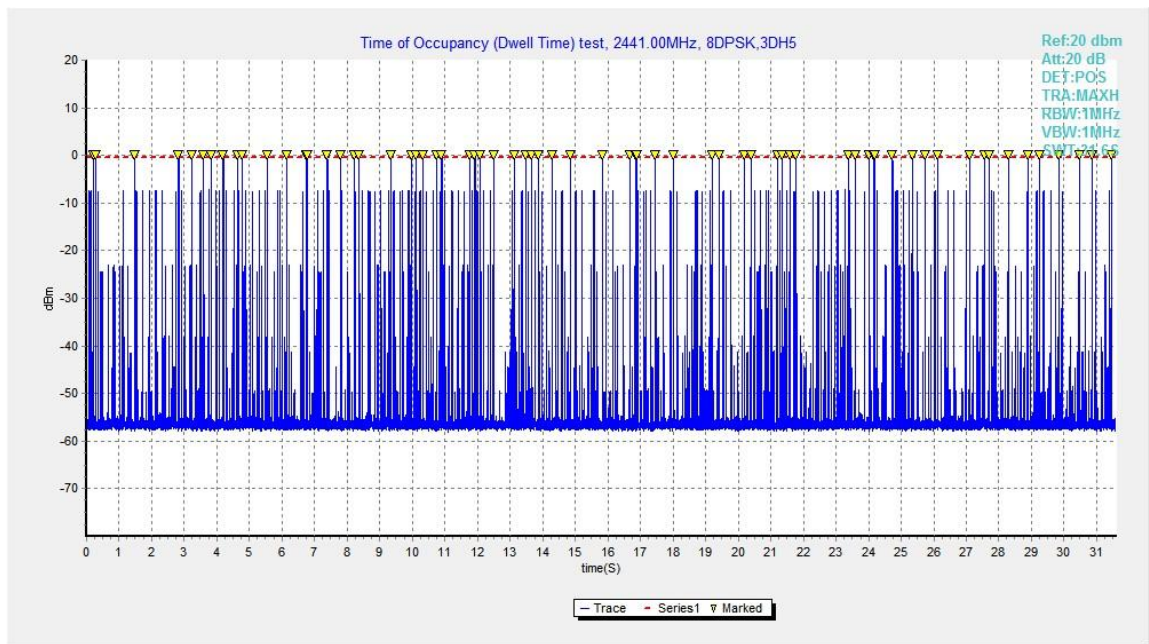


Fig.81. Number of Transmissions Measurement: Channel 39,Packet 3-DH5

B.8. 20dB Bandwidth

Method of Measurement: See ANSI C63.10-clause 6.9.2

Measurement Procedure - Unwanted Emissions

1. Set RBW = 30kHz.
2. Set VBW = 100 kHz.
3. Set span to 3MHz
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize (this may take some time, depending on the extent of the span).

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a)(1)	NA*

Use NdB Down function of the SA to measure the 20dB Bandwidth

*Comment: This test case is not required according to the latest FCC 47 CFR Part 15.247. But the test results are necessary for “carrier frequency separation” test case, in Annex A.8.

Measurement Results:

For GFSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.82	947.25	NA
39	Fig.83	940.50	NA
78	Fig.84	939.00	NA

For $\pi/4$ DQPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.85	1260.75	NA
39	Fig.86	1256.25	NA
78	Fig.87	1235.25	NA

For 8DPSK

Channel	20dB Bandwidth (kHz)		Conclusion
0	Fig.88	1266.00	NA
39	Fig.89	1259.25	NA
78	Fig.90	1204.50	NA

Conclusion: NA

Test graphs as below:

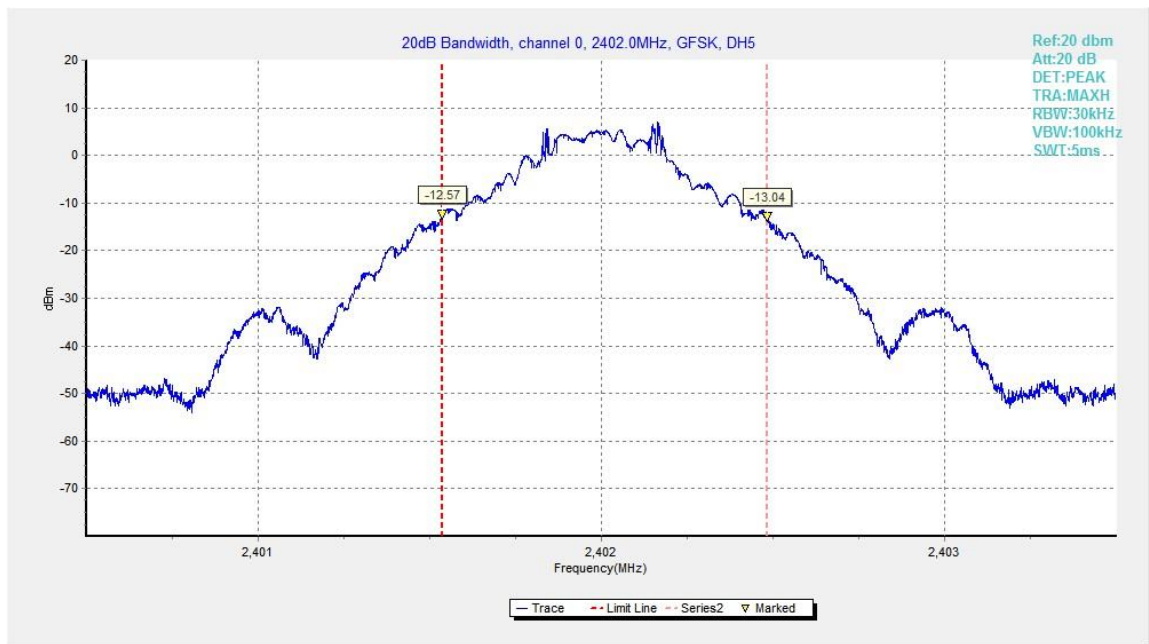


Fig.82. 20dB Bandwidth: GFSK, Channel 0

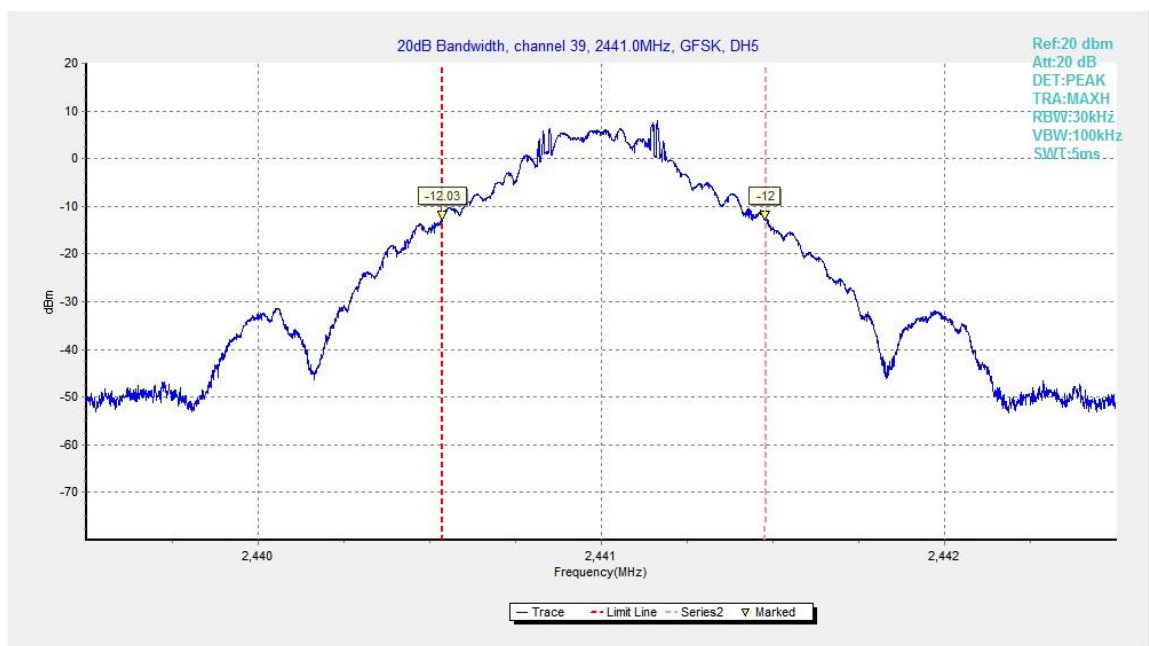


Fig.83. 20dB Bandwidth: GFSK, Channel 39

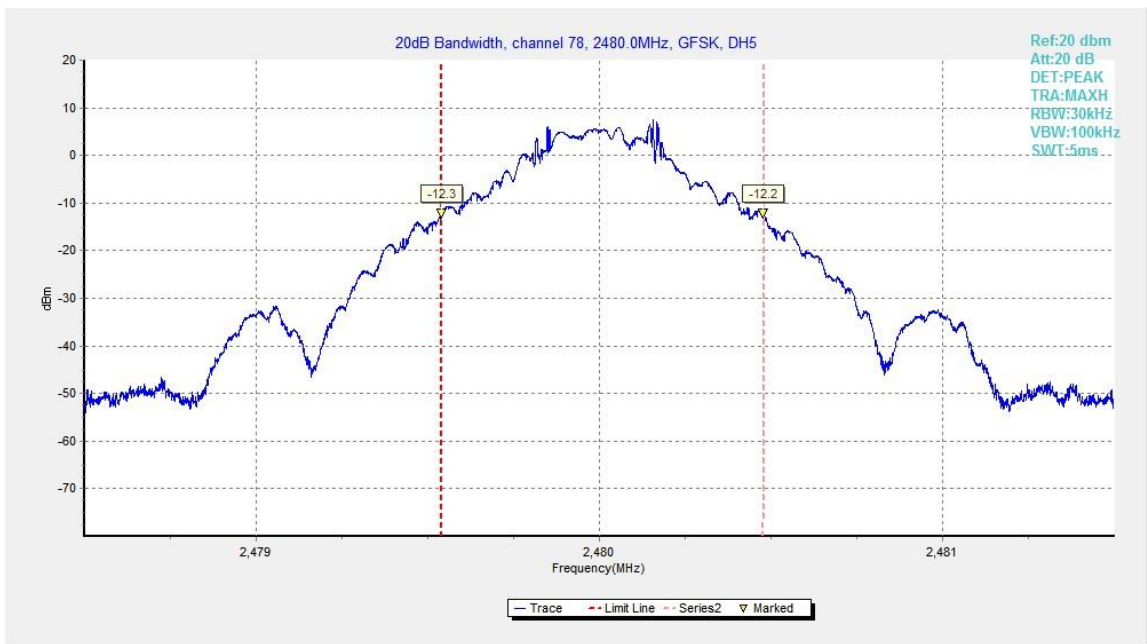


Fig.84. 20dB Bandwidth: GFSK, Channel 78

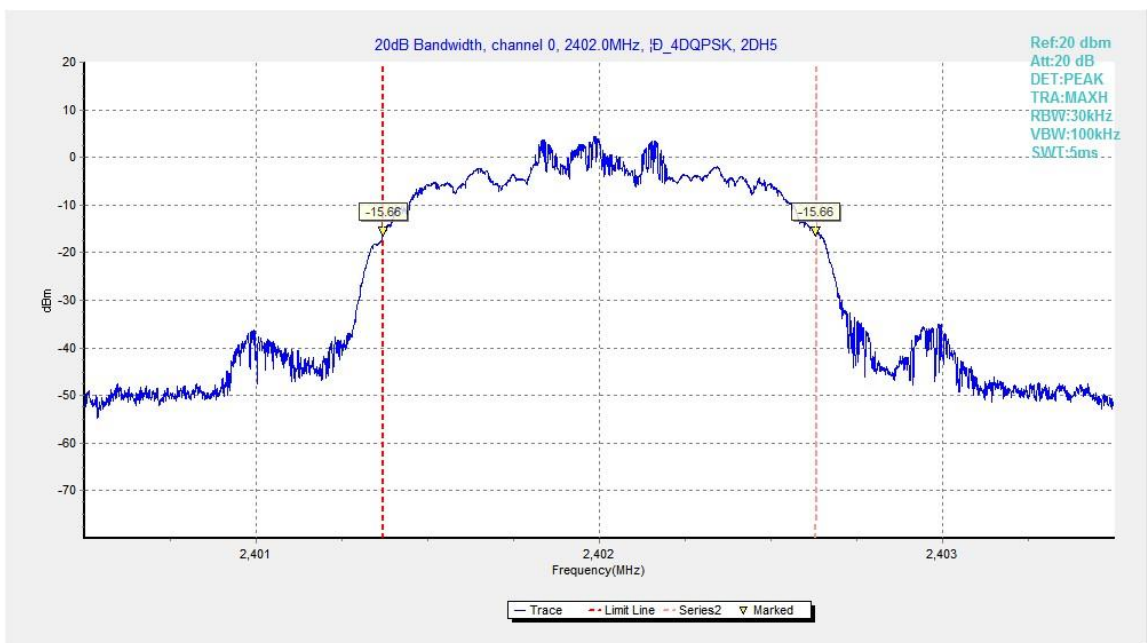


Fig.85. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 0

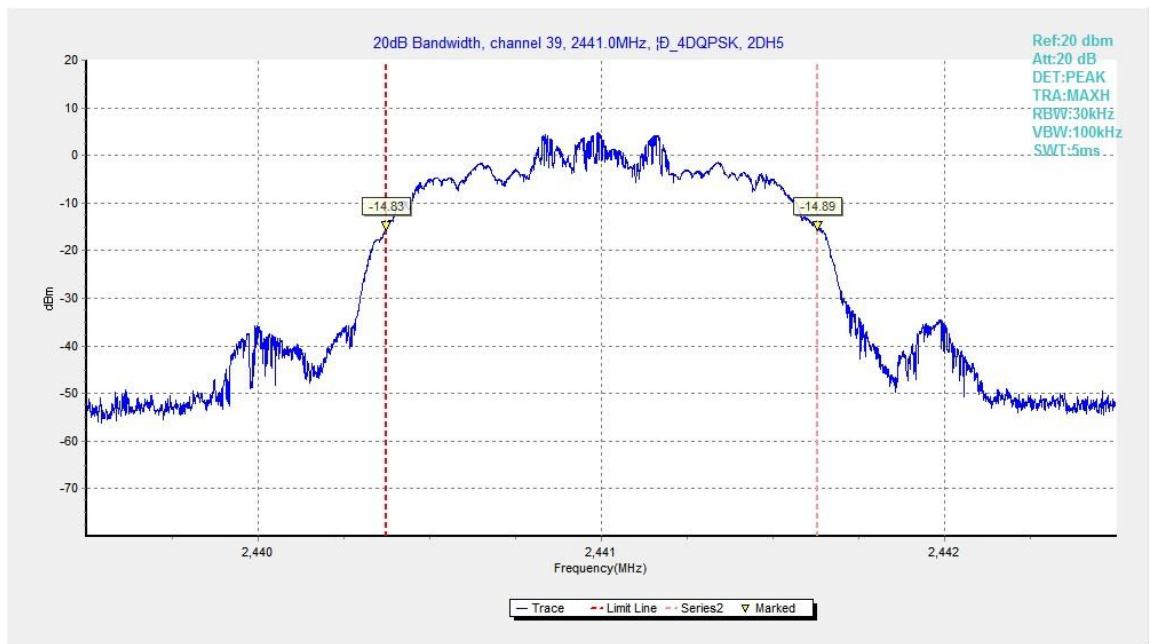


Fig.86. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 39

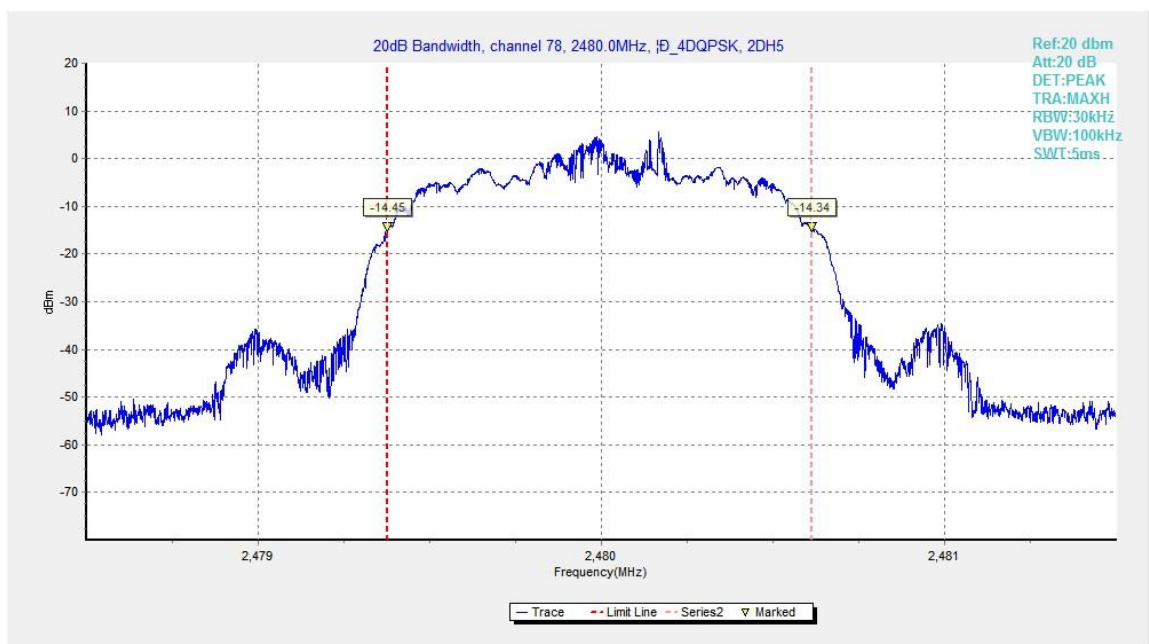


Fig.87. 20dB Bandwidth: $\pi/4$ DQPSK, Channel 78

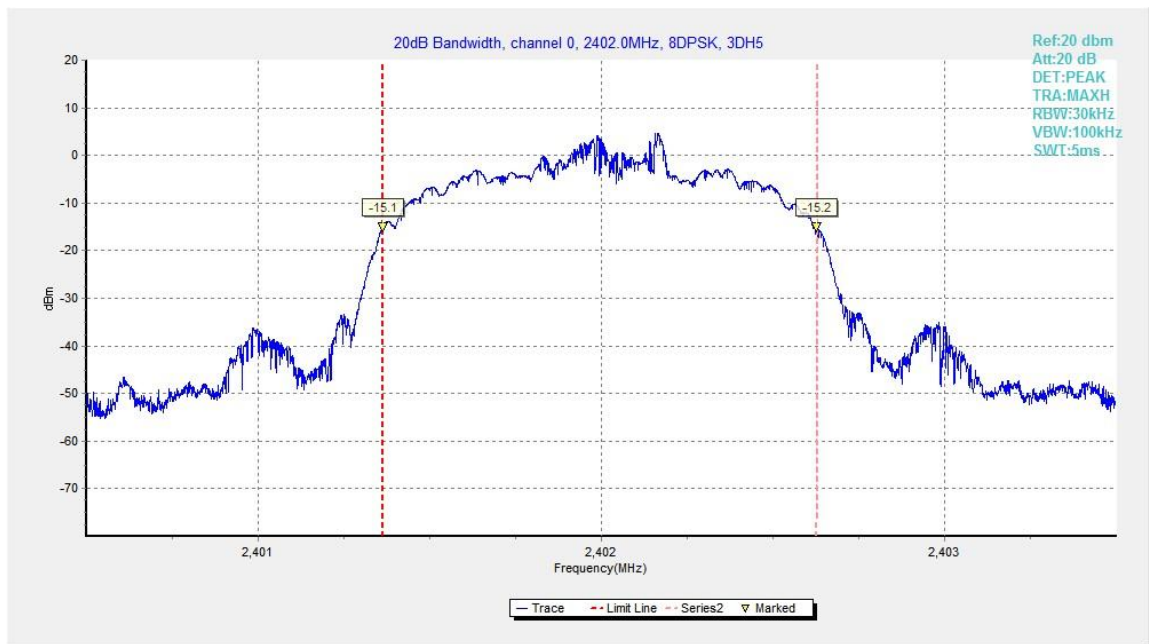


Fig.88. 20dB Bandwidth: 8DPSK, Channel 0

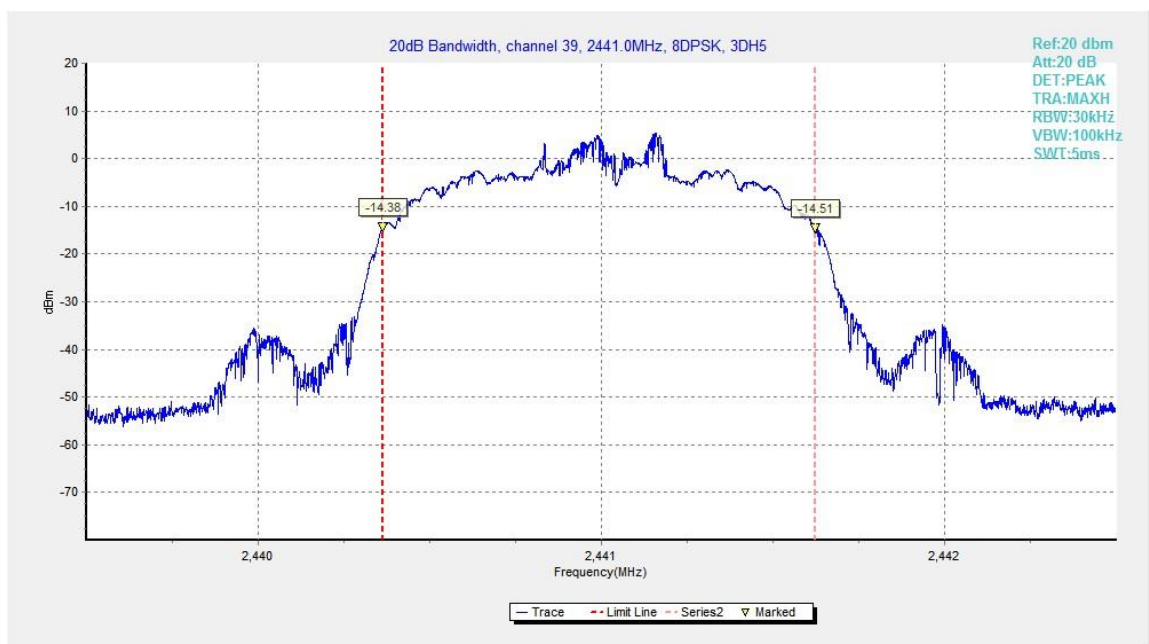


Fig.89. 20dB Bandwidth: 8DPSK, Channel 39

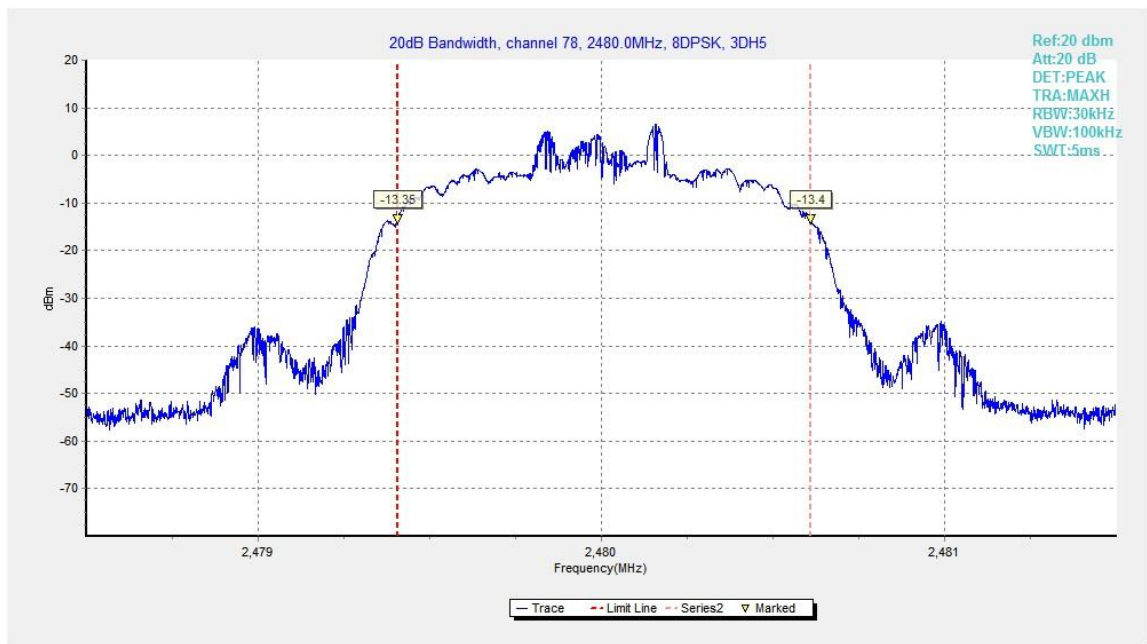


Fig.90. 20dB Bandwidth: 8DPSK, Channel 78

B.9. Carrier Frequency Separation

Method of Measurement: See ANSI C63.10-clause 7.8.2

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = 3MHz
- RBW=300kHz
- VBW=300kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

Search the peak marks of the middle frequency and adjacent channel, then record the separation between them.

·Comment: This limit should be over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth, whichever is greater.

Measurement Limit:

Standard	Limit(kHz)
FCC 47 CFR Part 15.247(a)(1)	over 25 kHz or $(2/3) * 20\text{dB}$ bandwidth

Measurement Result:

For GFSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.91	980.25	P

For $\pi/4$ DQPSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.92	1182.00	P

For 8DPSK

Channel	Carrier frequency separation (kHz)	Conclusion	
39	Fig.93	1131.00	P

Conclusion: PASS

Test graphs as below:

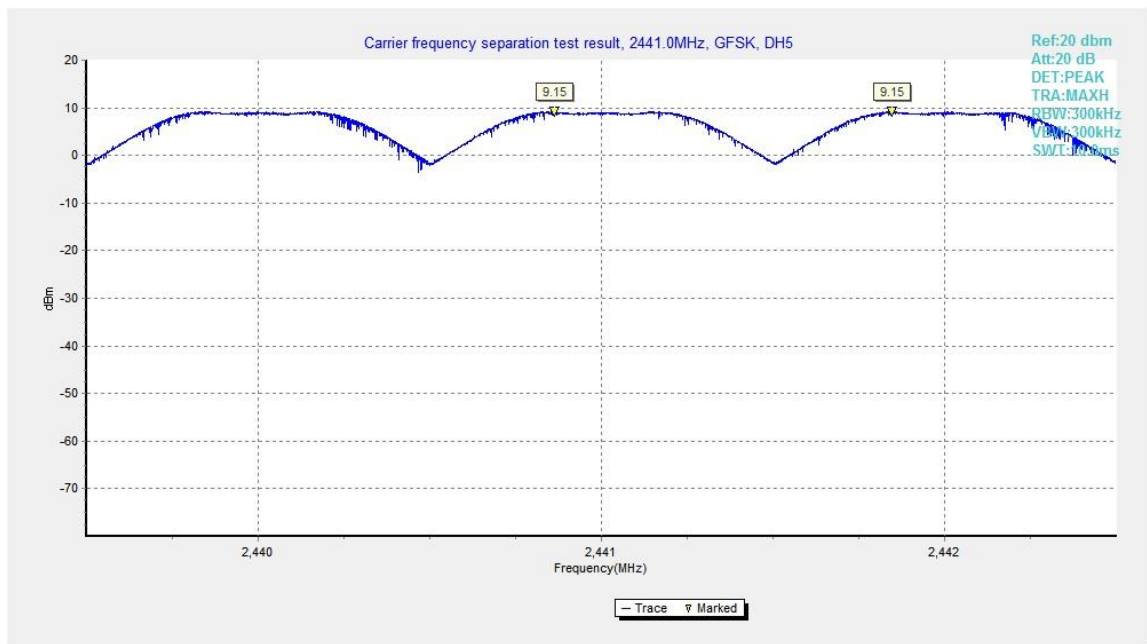


Fig.91. Carrier frequency separation measurement: GFSK, Channel 39

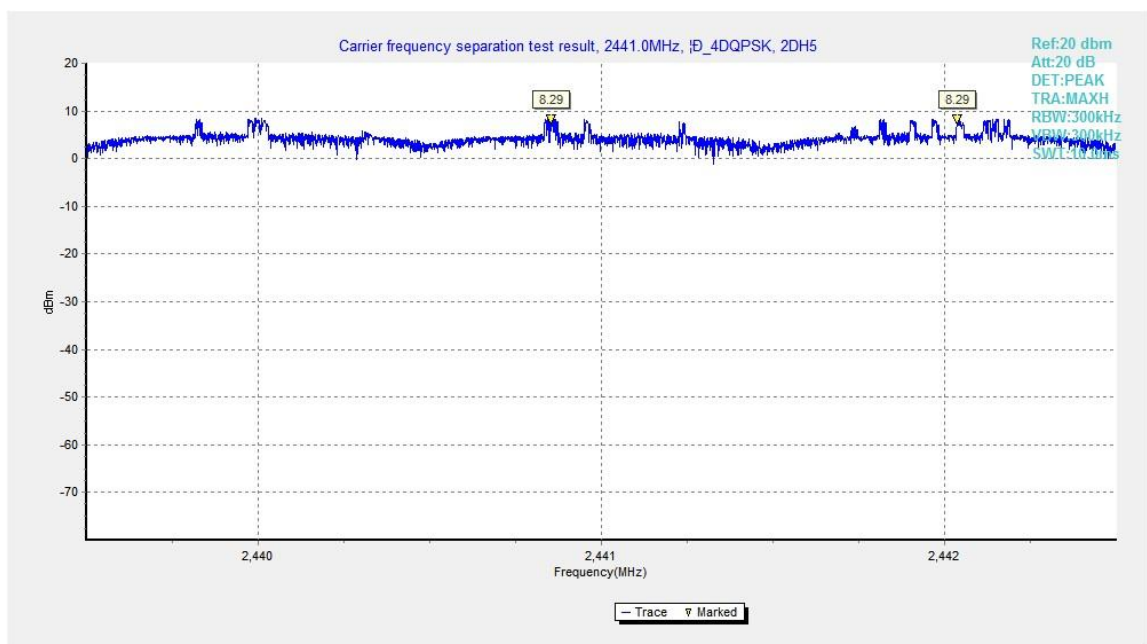


Fig.92. Carrier frequency separation measurement: $\pi/4$ DQPSK, Channel 39

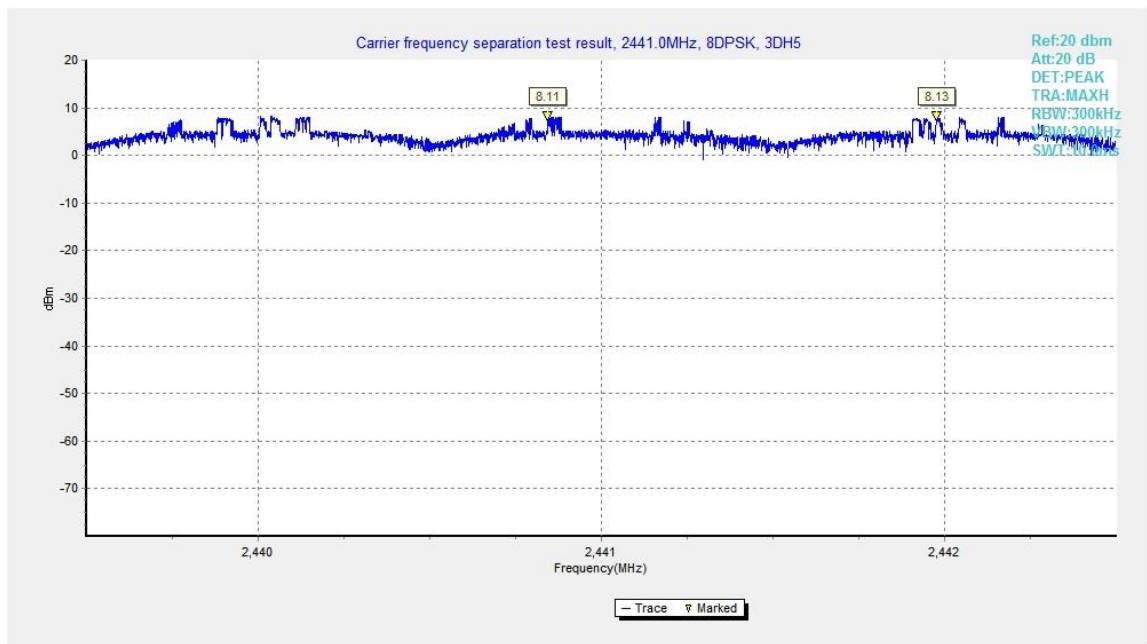


Fig.93. Carrier frequency separation measurement: 8DPSK, Channel 39

B.10. Number of Hopping Channels

Method of Measurement: See ANSI C63.10-clause 7.8.3

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

- Span = the frequency band of operation
- RBW = 500kHz
- VBW = 500kHz
- Sweep = auto
- Detector function = peak
- Trace = max hold
- Allow the trace to stabilize

It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

Measurement Limit:

Standard	Limit
FCC 47 CFR Part 15.247(a) (1)(iii)	At least 15 non-overlapping channels

Measurement Result:

For GFSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.94	79	P
40~78	Fig.95		

For $\pi/4$ DQPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.96	79	P
40~78	Fig.97		

For 8DPSK

Channel	Number of hopping channels		Conclusion
0~39	Fig.98	79	P
40~78	Fig.99		

Conclusion: PASS

Test graphs as below:

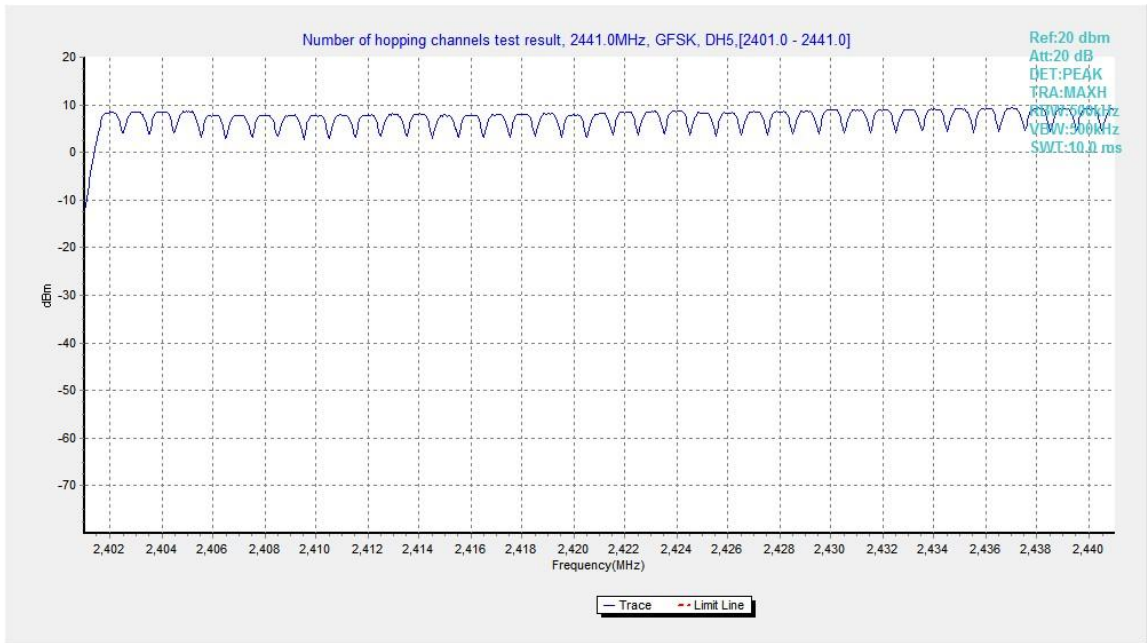


Fig.94. Number of hopping frequencies: GFSK, Channel 0 - 39

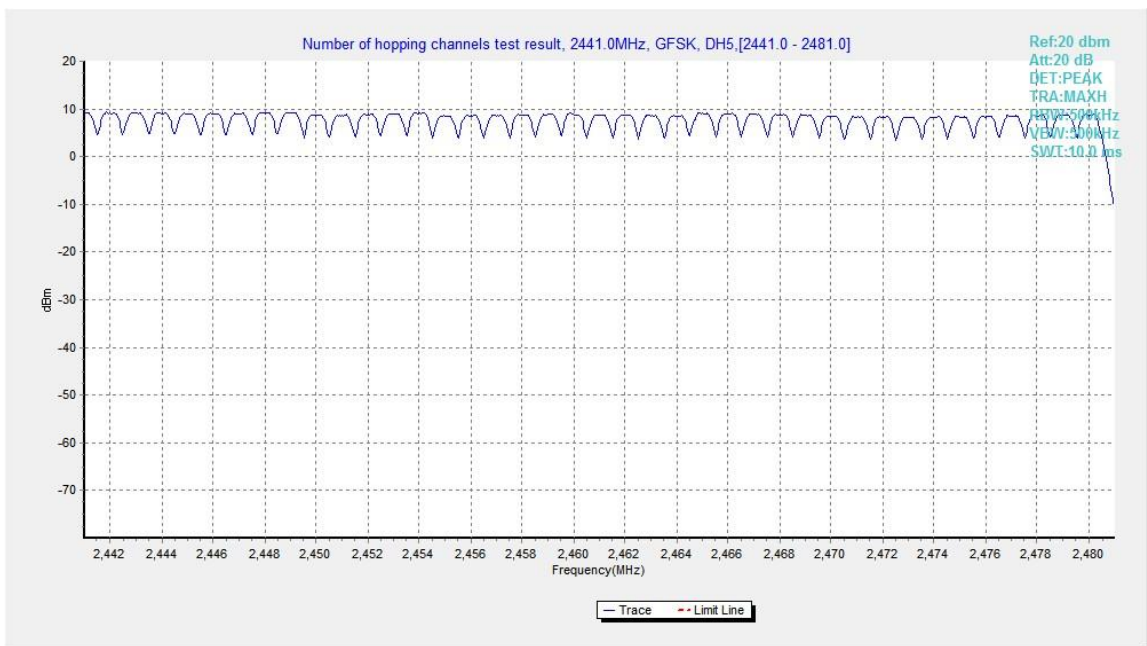


Fig.95. Number of hopping frequencies: GFSK, Channel 40 - 78

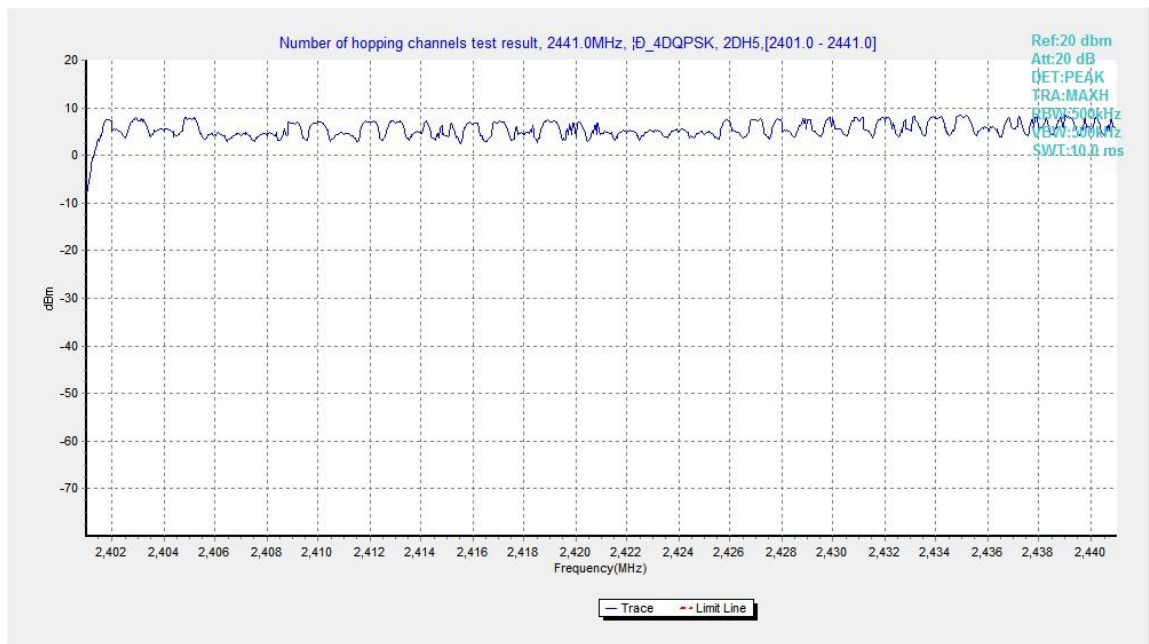


Fig.96. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 0 - 39

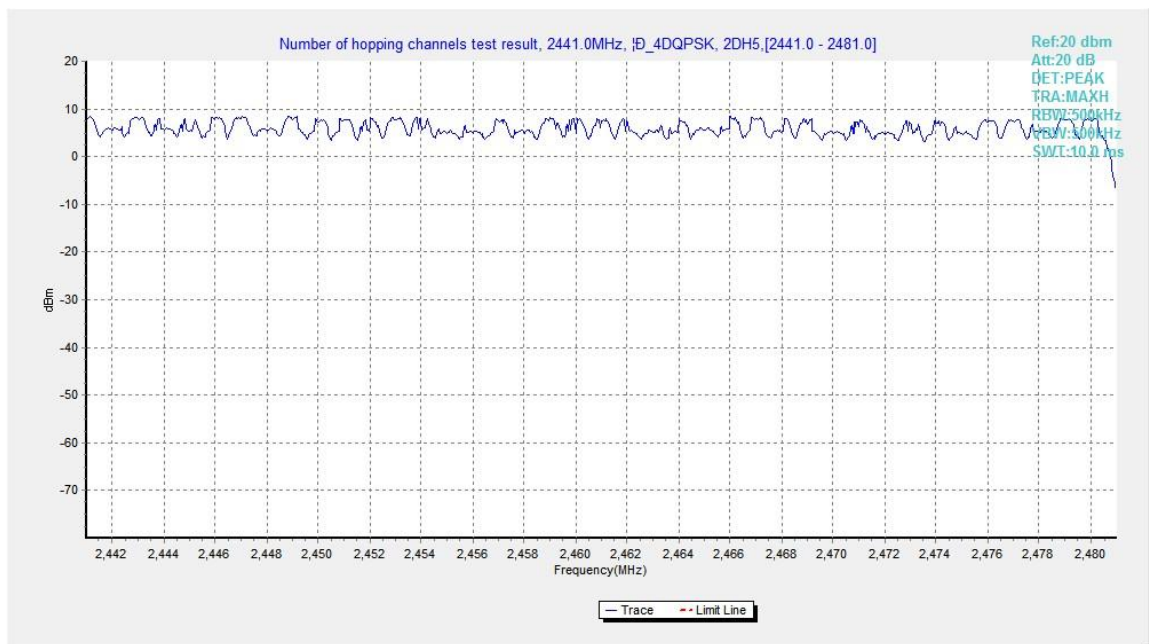


Fig.97. Number of hopping frequencies: $\pi/4$ DQPSK, Channel 40 - 78

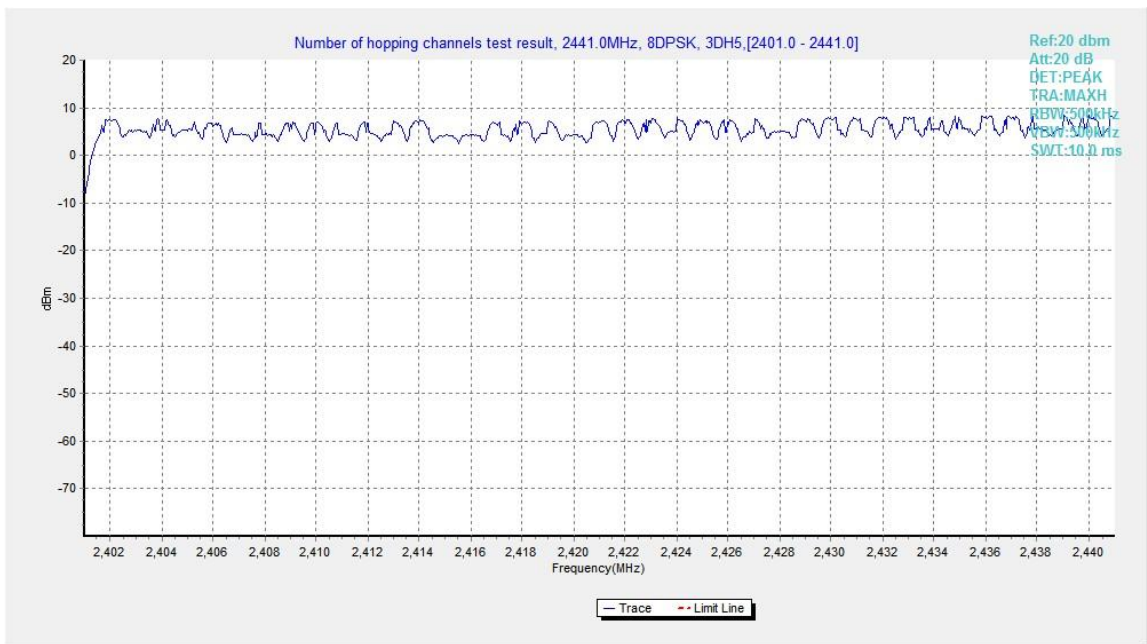


Fig.98. Number of hopping frequencies: 8DPSK, Channel 0 - 39

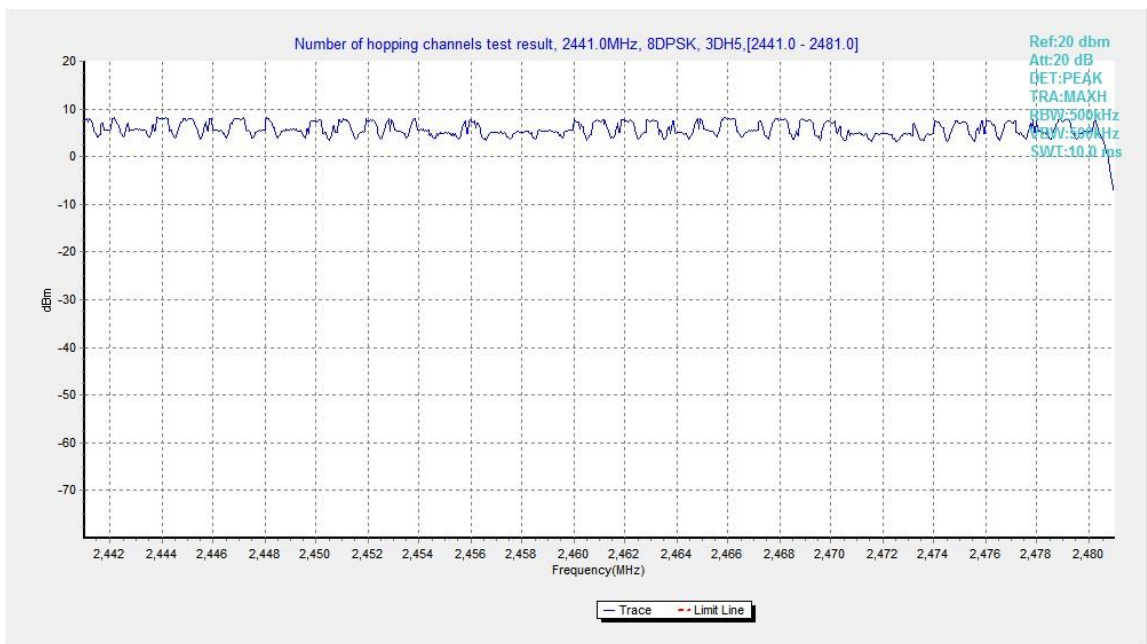


Fig.99. Number of hopping frequencies: 8DPSK, Channel 40 - 78

B.11. AC Powerline Conducted Emission

Method of Measurement:

See Clause 6.2 of ANSI C63.10-2013 specifically.

See Clause 4 and Clause 5 of ANSI C63.10-2013 generally.

The conducted emissions from the AC port of the EUT are measured in a shielding room. The EUT is connected to a Line Impedance Stabilization Network (LISN). An overview sweep with peak detection was performed. The measurements were performed with a quasi-peak detector and if required, an average detector.

The conducted emission measurements were made with the following detector of the test receiver: Quasi-Peak / Average Detector.


The measurement bandwidth is:

Frequency of Emission (MHz)	RBW/VBW
0.15-30	9kHz

Test Condition:

Voltage (V)	Frequency (Hz)
120	60

Measurement Setup

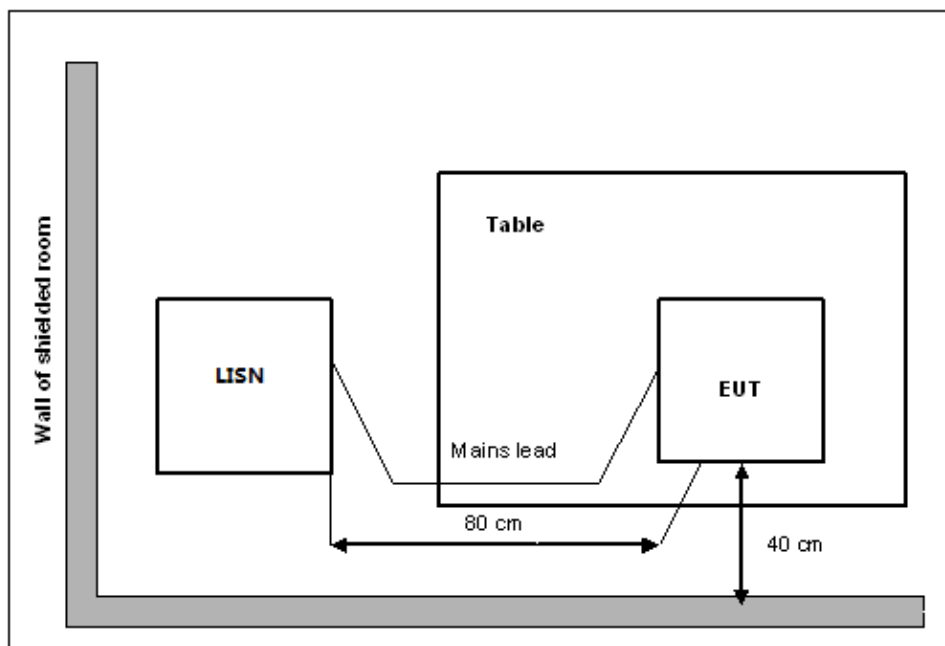

Measurement Result and limit:
EUT ID: EUT1

Bluetooth (Quasi-peak Limit)

Frequency range (MHz)	Quasi-peak Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	66 to 56	Fig.B.11.1	Fig.B.11.2	P
0.5 to 5	56			
5 to 30	60			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Bluetooth (Average Limit)

Frequency range (MHz)	Average Limit (dB μ V)	Result (dB μ V)		Conclusion
		With charger		
		bluetooth	Idle	
0.15 to 0.5	56 to 46	Fig.B.11.1	Fig.B.11.2	P
0.5 to 5	46			
5 to 30	50			

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Conclusion: Pass
Test graphs as below:

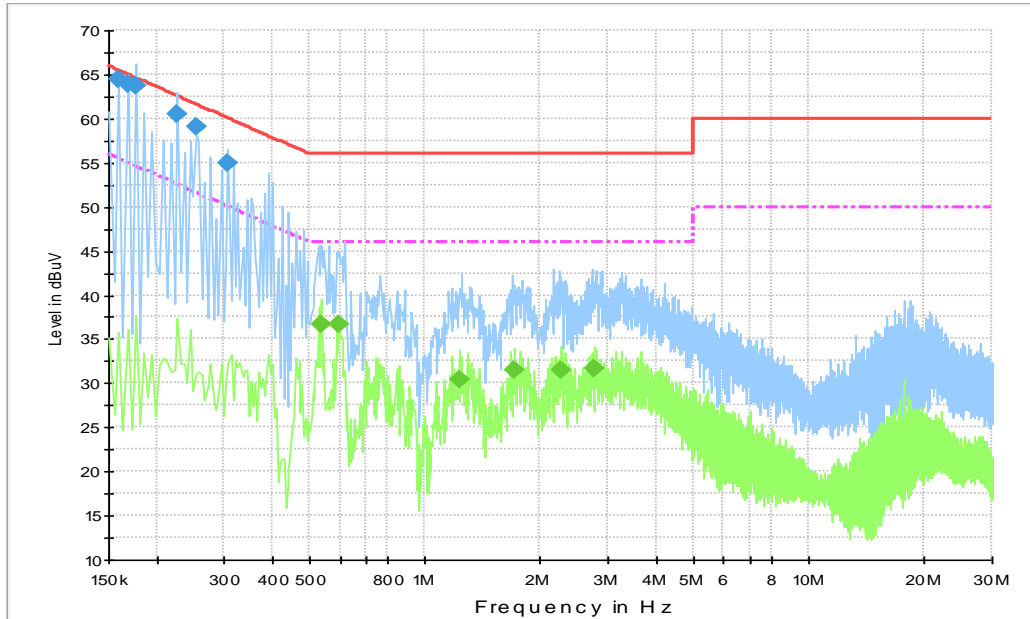


Fig.B.11.1 AC Powerline Conducted Emission- bluetooth

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.

Final Result 1

Frequency (MHz)	QuasiPeak (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.159000	64.5	1000.	9.000	N	19.8	1.0	65.5
0.168000	63.8	1000.	9.000	N	19.9	1.2	65.1
0.177000	63.8	1000.	9.000	N	19.9	0.8	64.6
0.226500	60.6	1000.	9.000	N	19.7	2.0	62.6
0.253500	59.1	1000.	9.000	N	19.7	2.5	61.6
0.307500	55.0	1000.	9.000	N	19.8	5.0	60.0

Final Result 2

Frequency (MHz)	Average (dBμV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.537000	36.7	1000.0	9.000	L1	19.8	9.3	46.0
0.595500	36.7	1000.0	9.000	L1	19.7	9.3	46.0
1.225500	30.5	1000.0	9.000	L1	19.6	15.5	46.0
1.716000	31.5	1000.0	9.000	L1	19.6	14.5	46.0
2.260500	31.4	1000.0	9.000	L1	19.6	14.6	46.0
2.773500	31.7	1000.0	9.000	L1	19.6	14.3	46.0

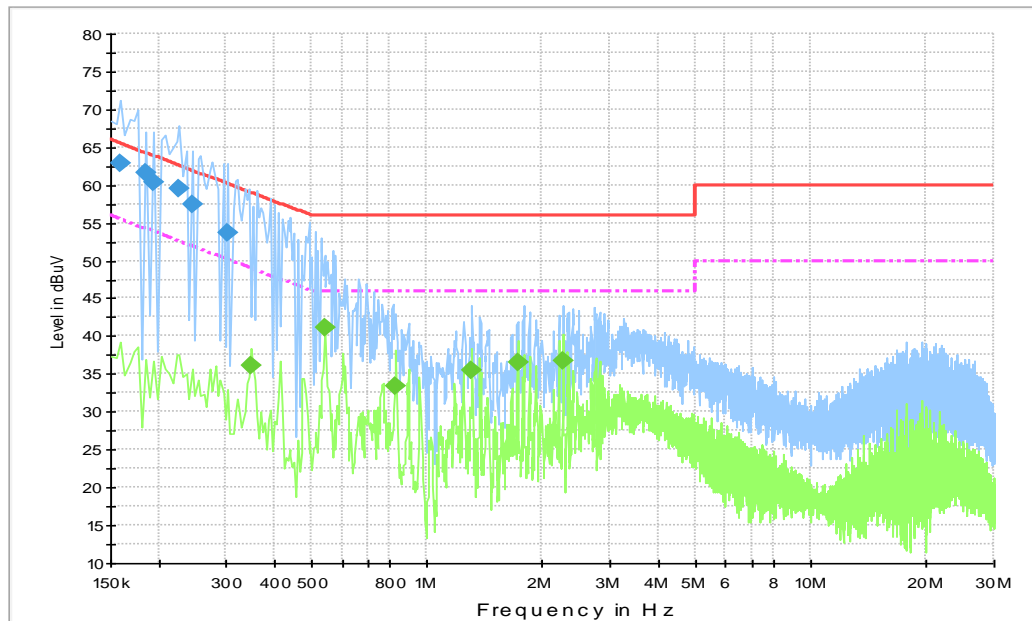


Fig.B.11.2 AC Powerline Conducted Emission-Idle

Note: The graphic result above is the maximum of the measurements for both phase line and neutral line.




Final Result 1

Frequency (MHz)	QuasiPeak (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.159000	62.8	1000.	9.000	N	19.8	2.7	65.5
0.186000	61.7	1000.	9.000	L1	19.9	2.5	64.2
0.195000	60.4	1000.	9.000	L1	19.8	3.5	63.8
0.226500	59.5	1000.	9.000	L1	19.7	3.0	62.6
0.244500	57.4	1000.	9.000	L1	19.8	4.6	61.9
0.303000	53.8	1000.	9.000	L1	19.7	6.4	60.2

Final Result 2

Frequency (MHz)	Average (dBµV)	Meas. Time (ms)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.348000	36.2	1000.0	9.000	L1	19.8	12.9	49.0
0.541500	41.0	1000.0	9.000	L1	19.8	5.0	46.0
0.829500	33.5	1000.0	9.000	L1	19.7	12.5	46.0
1.311000	35.4	1000.0	9.000	L1	19.6	10.6	46.0
1.720500	36.5	1000.0	9.000	L1	19.6	9.5	46.0
2.265000	36.7	1000.0	9.000	L1	19.6	9.3	46.0

ANNEX C: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> <h3>Certificate of Accreditation to ISO/IEC 17025:2017</h3> <hr/>	
<p>NVLAP LAB CODE: 600118-0</p>	
<p>Telecommunication Technology Labs, CAICT Beijing China</p>	
<p><i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i></p>	
<p>Electromagnetic Compatibility & Telecommunications</p>	
<p><i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i></p>	
<hr/> <p>2020-09-29 through 2021-09-30 <i>Effective Dates</i></p>	 <hr/> <p><i>[Signature]</i> For the National Voluntary Laboratory Accreditation Program</p>

END OF REPORT