



TEST REPORT

No. I21Z60426-WMD04

for

Wingtech Group (Hong Kong) Limited

5G Mobile Phone

Model Name: WTRVL5G

FCC ID: 2APXW-WTRVL5G

with

Hardware Version: V1.3

Software Version: WTRVL5G_0.01.10

Issued Date: 2021-05-10

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: ctl_terminals@caict.ac.cn, website: www.caict.ac.cn



REPORT HISTORY

Report Number	Revision	Description	Issue Date
I21Z60426-WMD04	Rev.0	1 st edition	2021-05-10

Note: the latest revision of the test report supersedes all previous version.



CONTENTS

1. TEST LABORATORY	4
1.1. INTRODUCTION & ACCREDITATION	4
1.2. TESTING LOCATION	4
1.3. TESTING ENVIRONMENT	5
1.4. PROJECT DATA	5
1.5. SIGNATURE	5
2. CLIENT INFORMATION	6
2.1. APPLICANT INFORMATION	6
2.2. MANUFACTURER INFORMATION	6
3. EQUIPMENT UNDER TEST (EUT) AND ANCILLARY EQUIPMENT (AE)	7
3.1. ABOUT EUT	7
3.2. INTERNAL IDENTIFICATION OF EUT USED DURING THE TEST.....	7
3.3. INTERNAL IDENTIFICATION OF AE USED DURING THE TEST	7
4. REFERENCE DOCUMENTS	8
4.1. DOCUMENTS SUPPLIED BY APPLICANT	8
4.2. REFERENCE DOCUMENTS FOR TESTING	8
5. LABORATORY ENVIRONMENT	9
6. SUMMARY OF TEST RESULT	10
7. TEST EQUIPMENT UTILIZED	12
ANNEX A: MEASUREMENT RESULTS	13
A.1 OUTPUT POWER.....	13
A.2 EMISSION LIMIT	23
A.3 FREQUENCY STABILITY	32
A.4 OCCUPIED BANDWIDTH.....	36
A.5 EMISSION BANDWIDTH.....	62
A.6 BAND EDGE COMPLIANCE.....	88
A.7 CONDUCTED SPURIOUS EMISSION	107
A.8 PEAK-TO-AVERAGE POWER RATIO	111
ANNEX B: ACCREDITATION CERTIFICATE	112



1. Test Laboratory

1.1. Introduction & Accreditation

Telecommunication Technology Labs, CAICT is an ISO/IEC 17025:2017 accredited test laboratory under NATIONAL VOLUNTARY LABORATORY ACCREDITATION PROGRAM (NVLAP) with lab code 600118-0 and is also an FCC accredited test laboratory (CN5017), and ISED accredited test laboratory (CN0066). The detail accreditation scope can be found on NVLAP website.

1.2. Testing Location

Location 1: CTTL (huayuan North Road)

Address: No. 52, Huayuan North Road, Haidian District, Beijing,
P. R. China 100191

Location 2: CTTL(Shouxiang)

Address: No. 51 Shouxiang Science Building, Xueyuan Road, Haidian District,
Beijing, P. R. China 100191

1.3. Testing Environment

Normal Temperature: 15-35°C
Relative Humidity: 20-75%

1.4. Project Data

Testing Start Date: 2021-03-08
Testing End Date: 2021-04-28

1.5. Signature



Dong Yuan
(Prepared this test report)



Zhou Yu
(Reviewed this test report)



Zhao Hui Lin
Deputy Director of the laboratory
(Approved this test report)



2. Client Information

2.1. Applicant Information

Company Name: Wingtech Group (Hong Kong) Limited
Address /Post: Flat/RM 1903, 19/F, Podium Plaza 5 Hanoi Road, Tsim Sha Tsui
Kowloon, Hong Kong
Contact: NA
Email: NA
Telephone: NA

2.2. Manufacturer Information

Company Name: Wingtech Group (Hong Kong) Limited
Address /Post: Flat/RM 1903, 19/F, Podium Plaza 5 Hanoi Road, Tsim Sha Tsui
Kowloon, Hong Kong
Contact: NA
Email: NA
Telephone: NA

3. Equipment Under Test (EUT) and Ancillary Equipment (AE)

3.1. About EUT

Description	5G Mobile Phone
Model Name	WTRVL5G
FCC ID	2APXW-WTRVL5G
Antenna	Embedded
Output power	22.35dBm maximum EIRP measured for LTE Band 41
Extreme vol. Limits	3.6VDC to 4.45VDC (nominal: 3.87VDC)
Extreme temp. Tolerance	-10°C to +55°C

Note: Components list, please refer to documents of the manufacturer; it is also included in the original test record of CTTL.

3.2. Internal Identification of EUT used during the test

EUT ID*	IMEI	HW Version	SW Version	Date of receipt
UT32a	357492490009840	V1.3	WTRVL5G_0.01.10	2021-03-05
UT93a	357492490017504	V1.3	WTRVL5G_0.01.10	2021-03-30

*EUT ID: is used to identify the test sample in the lab internally.

3.3. Internal Identification of AE used during the test

AE ID*	Description
AE1	Battery
AE1	
Model	TM001
Manufacturer	Jiade Energy Technology (Zhuhai) Co.,Ltd.
Capacitance	4900mAh

*AE ID: is used to identify the test sample in the lab internally.



4. Reference Documents

4.1. Documents supplied by applicant

EUT parameters, referring to Annex A for detailed information, is supplied by the client or manufacturer, which is the basis of testing.

4.2. Reference Documents for testing

The following documents listed in this section are referred for testing.

Reference	Title	Version
FCC Part 24	PERSONAL COMMUNICATIONS SERVICES	10-1-19 Edition
FCC Part 27	MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES	10-1-19 Edition
ANSI/TIA-603-E	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards	2016
ANSI C63.26	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services	2015
KDB 971168 D01	MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS	v03r01

5. Laboratory Environment

Control room / conducted chamber did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 80 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 0.5 Ω

Semi-anechoic chamber SAC-1 (23 meters × 17 meters × 10 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 15 %, Max. = 75 %
Shielding effectiveness	0.014MHz - 1MHz, >60dB; 1MHz - 1000MHz, >90dB.
Electrical insulation	> 2 MΩ
Ground system resistance	< 4Ω
Normalised site attenuation (NSA)	< ± 4 dB, 3m/10m distance, from 30 to 1000 MHz
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

Fully-anechoic chamber FAC-3 (8.6 meters × 6.1 meters × 3.85 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 30 °C
Relative humidity	Min. = 35 %, Max. = 60 %
Shielding effectiveness	> 110 dB
Electrical insulation	> 2 MΩ
Ground system resistance	< 1 Ω
Site voltage standing-wave ratio (S_{VSWR})	Between 0 and 6 dB, from 1GHz to 18GHz
Uniformity of field strength	Between 0 and 6 dB, from 80 to 6000 MHz

6. Summary Of Test Result

LTE Band 2

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	24.232	P
2	Emission Limit	2.1051/24.238	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	24.238	P
6	Band Edge Compliance	24.238	P
7	Conducted Spurious Emission	24.238	P
8	Peak-to-Average Power Ratio	24.232	P

LTE Band 12

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

LTE Band 41

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P



LTE Band 66

Items	Test Name	Clause in FCC rules	Verdict
1	Output Power	27.50	P
2	Emission Limit	2.1051/27.53	P
3	Frequency Stability	2.1055	P
4	Occupied Bandwidth	2.1049	P
5	Emission Bandwidth	27.53	P
6	Band Edge Compliance	27.53	P
7	Conducted Spurious Emission	27.53	P
8	Peak-to-Average Power Ratio	27.50	P

Terms used in Verdict column

P	Pass. The EUT complies with the essential requirements in the standard.
NP	Not Performed. The test was not performed by CTTL.
NA	Not Applicable. The test was not applicable.
BR	Re-use test data from basic model report.
F	Fail. The EUT does not comply with the essential requirements in the standard.

LTE Band 41 is tested by power class 3.

Explanation of worst-case configuration

The worst-case scenario for all measurements is based on the conducted output power measurement investigation results. Output power was measured on QPSK, 16QAM and 64QAM modulations. It was found that QPSK was the worst case. All testing was performed using QPSK modulations to represent the worst case unless otherwise stated. The test results shown in the following sections represent the worst case emission.



7. Test Equipment Utilized

Description	Type	Series Number	Manufacture	Cal Due Date	Calibration Interval
Wideband Radio Communication Tester	CMW500	159082	R&S	2021-12-17	1 year
Spectrum Analyzer	FSU	200030	R&S	2021-06-01	1 year
Radio Communication Analyzer	MT8821C	6201763159	Anritsu	2021-08-12	1 year
Climate Chamber	SH-242	93008556	ESPEC	2023-12-23	3 years
EMI Antenna	9117	167	Schwarzbeck	2021-08-19	1 year
EMI Antenna	3117	00058889	ETS-Lindgren	2021-09-22	1 year
EMI Antenna	3117	00119024	ETS-Lindgren	2021-05-08	1 year
Test Receiver	E4440A	MY48250642	Agilent	2022-03-04	1 year
Universal Radio Communication Tester	CMW500	143008	R&S	2022-01-01	1 year
EMI Antenna	VULB9163	9163-301	Schwarzbeck	2021-08-04	1 year
Signal Generator	N5183A	MY49060052	Agilent	2021-07-01	1 year



Annex A: Measurement Results

A.1 Output Power

A.1.1 Summary

During the process of testing, the EUT was controlled via communication tester to ensure max power transmission and proper modulation.

In all cases, output power is within the specified limits.

A.1.2 Conducted

A.1.2.1 Method of Measurements

The EUT was set up for the max output power with pseudo random data modulation.



A.1.2.2 Measurement Result
LTE CA_2A-12A

PCC Power (dBm)								SCC Power (dBm)							
LTE Band	BW (MHz)	Frequency(MHz)	RB No	RB offset	QPSK	16QAM	64QAM	LTE Band	BW (MHz)	Frequency(MHz)	RB No	RB offset	QPSK	16QAM	64QAM
2	5	1880	1	0	22.64	22.02	20.83	12	3	707.5	1	14	19.33	17.63	19.71
			1	24	22.64	22.28	20.98				1	0	20.34	17.58	19.60
			25	0	21.80	20.84	19.67				15	0	17.34	19.75	20.97
2	10	1880	1	0	22.63	22.01	20.83	12	3	707.5	1	14	19.77	16.91	19.70
			1	49	22.54	22.33	20.29				1	0	19.60	17.68	19.78
			50	0	21.64	19.84	19.59				15	0	17.14	19.51	20.98
2	15	1880	1	0	22.59	22.01	20.89	12	3	707.5	1	14	20.08	17.43	19.66
			1	74	22.39	21.82	20.30				1	0	18.33	17.25	19.36
			75	0	21.63	20.58	19.55				15	0	17.13	19.67	20.92
2	20	1880	1	0	22.44	21.85	20.70	12	3	707.5	1	14	18.04	17.63	20.91
			1	99	22.33	20.98	20.86				1	0	17.11	17.00	19.15
			100	0	21.74	20.73	19.67				15	0	16.96	19.28	20.71
2	5	1880	1	0	22.53	21.96	20.62	12	5	707.5	1	24	16.86	17.08	19.65
			1	24	22.50	21.80	20.92				1	0	17.18	20.27	19.78
			25	0	21.59	20.54	19.56				25	0	17.16	20.92	20.99
2	5	1880	1	0	22.49	21.85	20.82	12	10	707.5	1	49	20.40	17.08	19.65
			1	24	22.48	21.85	21.03				1	0	17.47	17.15	19.69
			25	0	21.62	20.66	19.49				50	0	17.20	19.61	20.94
2	10	1880	1	0	22.53	21.90	20.83	12	10	707.5	1	49	19.84	17.95	19.58
			1	49	22.54	19.58	20.36				1	0	20.13	17.15	19.74
			50	0	21.54	20.58	19.53				50	0	17.27	20.95	19.57
2	15	1880	1	0	22.43	21.22	20.61	12	10	707.5	1	49	20.45	17.18	19.72
			1	74	22.26	21.66	20.45				1	0	20.57	18.52	19.68
			75	0	21.56	20.59	19.51				50	0	17.02	19.53	20.93
2	20	1880	1	0	22.73	22.09	21.30	12	10	707.5	1	49	19.08	17.34	19.80
			1	99	22.54	21.68	20.87				1	0	19.94	17.14	19.68
			100	0	21.82	20.84	19.78				50	0	17.32	19.66	21.03



LTE CA_12A-66A

PCC Power (dBm)								SCC Power (dBm)							
LTE Band	BW (MHz)	Frequency(MHz)	R B No	RB offset	QPS K	16QA M	64QA M	LTE Band	BW (MHz)	Frequency(MHz)	RB No	RB offset	QPS K	16QA M	64QA M
12	3	707.5	1	0	23.72	23.23	22.13	66	5	1745	1	24	18.26	16.22	18.12
			1	14	23.66	23.46	21.84				1	0	18.62	17.30	18.19
			15	0	22.70	21.79	20.67				25	0	17.64	18.12	19.35
12	3	707.5	1	0	23.68	23.01	22.03	66	10	1745	1	49	18.10	15.90	18.23
			1	14	23.62	23.79	22.05				1	0	17.55	16.09	19.43
			15	0	22.67	21.80	20.61				50	0	16.81	18.13	19.43
12	3	707.5	1	0	23.68	23.49	21.48	66	15	1745	1	74	17.03	15.85	18.39
			1	14	23.62	23.21	21.72				1	0	16.24	16.02	18.12
			15	0	22.78	21.79	20.71				75	0	16.66	18.11	19.36
12	3	707.5	1	0	23.63	23.06	22.02	66	20	1745	1	99	18.26	19.32	18.12
			1	14	23.65	23.05	22.23				1	0	17.85	15.89	18.04
			15	0	22.66	21.79	20.53				100	0	16.25	18.05	19.24
12	5	707.5	1	0	23.58	23.09	22.00	66	1.4	1745	1	5	18.29	15.76	18.07
			1	24	23.65	23.67	21.98				1	0	17.44	15.76	18.08
			25	0	22.73	21.75	20.61				6	0	17.68	18.28	19.45
12	5	707.5	1	0	23.75	23.20	21.98	66	5	1745	1	24	16.47	15.76	18.25
			1	24	23.74	23.42	22.31				1	0	16.35	16.56	17.83
			25	0	22.75	21.79	20.79				25	0	17.66	18.18	19.44
12	5	707.5	1	0	23.72	23.21	21.41	66	10	1745	1	49	17.00	15.95	18.06
			1	24	23.71	23.23	21.81				1	0	16.77	15.95	18.06
			25	0	22.70	21.58	20.82				50	0	16.25	18.18	19.36
12	5	707.5	1	0	23.60	23.62	22.22	66	15	1745	1	74	17.65	16.05	18.20
			1	24	23.64	22.92	21.77				1	0	17.43	17.52	18.11
			25	0	22.70	21.63	20.72				75	0	17.71	18.46	19.30
12	5	707.5	1	0	23.18	22.84	21.66	66	20	1745	1	99	17.79	17.43	18.13
			1	24	23.67	23.73	22.17				1	0	18.59	16.03	18.01
			25	0	22.74	21.82	20.58				100	0	18.60	17.99	19.25
12	10	707.5	1	0	23.66	21.77	21.63	66	1.4	1745	1	5	17.48	16.00	18.50
			1	49	23.21	22.64	21.31				1	0	16.83	16.20	18.14
			50	0	22.84	21.66	20.69				6	0	17.33	18.01	19.35
12	10	707.5	1	0	24.13	24.11	22.38	66	20	1745	1	99	19.66	17.44	18.32
			1	49	24.00	23.70	22.41				1	0	17.89	16.02	18.32
			50	0	23.21	22.14	21.10				100	0	18.61	18.66	19.83

LTE CA_band 41

Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB		SCC RB		Conducted Power(dBm)
				Size	Offset	Size	Offset	
5MHz/ 20MHz	2583.8	2595.5	QPSK	1	24	1	0	21.72
				25	0	100	0	20.19
			16QAM	1	24	1	0	21.53
				25	0	100	0	19.24
			64QAM	1	24	1	0	19.20
				25	0	100	0	19.22
20MHz/ 5MHz	2590.5	2602.2	QPSK	1	99	1	0	21.78
				100	0	25	0	20.28
			16QAM	1	99	1	0	21.58
				100	0	25	0	19.34
			64QAM	1	99	1	0	19.26
				100	0	25	0	19.29
10MHz/ 15MHz	2585.9	2597.9	QPSK	1	49	1	0	21.81
				50	0	75	0	20.22
			16QAM	1	49	1	0	21.65
				50	0	75	0	19.29
			64QAM	1	49	1	0	19.31
				50	0	75	0	19.28
15MHz/ 10MHz	2588.1	2600.1	QPSK	1	74	1	0	22.02
				75	0	50	0	20.31
			16QAM	1	74	1	0	21.81
				75	0	50	0	19.37
			64QAM	1	74	1	0	19.47
				75	0	50	0	19.33
10MHz/ 20MHz	2583.6	2598.0	QPSK	1	49	1	0	21.81
				50	0	100	0	20.18
			16QAM	1	49	1	0	21.62
				50	0	100	0	19.26
			64QAM	1	49	1	0	19.25
				50	0	100	0	19.20
20MHz/ 10MHz	2588.1	2602.5	QPSK	1	99	1	0	21.83
				100	0	50	0	20.25
			16QAM	1	99	1	0	21.64
				100	0	50	0	19.31
			64QAM	1	99	1	0	19.32
				100	0	50	0	19.26
15MHz/ 15MHz	2585.5	2600.5	QPSK	1	74	1	0	22.05
				75	0	75	0	20.23

			16QAM	1	74	1	0	21.82
				75	0	75	0	19.27
			64QAM	1	74	1	0	19.49
				75	0	75	0	19.24
15MHz/ 20MHz	2583.3	2600.4	QPSK	1	74	1	0	22.04
				75	0	100	0	20.21
			16QAM	1	74	1	0	21.83
				75	0	100	0	19.25
			64QAM	1	74	1	0	19.51
				75	0	100	0	19.23
20MHz/ 15MHz	2585.6	2602.7	QPSK	1	99	1	0	21.83
				100	0	75	0	20.21
			16QAM	1	99	1	0	21.66
				100	0	75	0	19.26
			64QAM	1	99	1	0	19.33
				100	0	75	0	19.24
20MHz/ 20MHz	2583.1	2602.9	QPSK	1	99	1	0	21.69
				100	0	100	0	19.94
			16QAM	1	99	1	0	21.51
				100	0	100	0	19.02
			64QAM	1	99	1	0	19.18
				100	0	100	0	18.98



A.1.3.3 Measurement result

LTE CA_2A-12A

PCC Power (dBm)			EIRP(dBm)(GT – LC =0.6)						SCC Power (dBm)						ERP(dBm)(GT – LC =4.0)						
LTE Band	BW (MHz)	Frequency(MHz)	RB No	RB offset	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM	LTE Band	BW (MHz)	Frequency(MHz)	RB No	RB offset	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
2	5	1880	1	0	22.64	22.02	20.83	22.04	21.42	20.23	12	3	707.5	1	14	19.33	17.63	19.71	13.18	11.48	13.56
			1	24	22.64	22.28	20.98	22.04	21.68	20.38				1	0	20.34	17.58	19.60	14.19	11.43	13.45
			25	0	21.80	20.84	19.67	21.2	20.24	19.07				15	0	17.34	19.75	20.97	11.19	13.6	14.82
2	10	1880	1	0	22.63	22.01	20.83	22.03	21.41	20.23	12	3	707.5	1	14	19.77	16.91	19.70	13.62	10.76	13.55
			1	49	22.54	22.33	20.29	21.94	21.73	19.69				1	0	19.60	17.68	19.78	13.45	11.53	13.63
			50	0	21.64	19.84	19.59	21.04	19.24	18.99				15	0	17.14	19.51	20.98	10.99	13.36	14.83
2	15	1880	1	0	22.59	22.01	20.89	21.99	21.41	20.29	12	3	707.5	1	14	20.08	17.43	19.66	13.93	11.28	13.51
			1	74	22.39	21.82	20.30	21.79	21.22	19.70				1	0	18.33	17.25	19.36	12.18	11.10	13.21
			75	0	21.63	20.58	19.55	21.03	19.98	18.95				15	0	17.13	19.67	20.92	10.98	13.52	14.77
2	20	1880	1	0	22.44	21.85	20.70	21.84	21.25	20.10	12	3	707.5	1	14	18.04	17.63	20.91	11.89	11.48	14.76
			1	99	22.33	20.98	20.86	21.73	20.38	20.26				1	0	17.11	17.00	19.15	10.96	10.85	13.00
			100	0	21.74	20.73	19.67	21.14	20.13	19.07				15	0	16.96	19.28	20.71	10.81	13.13	14.56
2	5	1880	1	0	22.53	21.96	20.62	21.93	21.36	20.02	12	5	707.5	1	24	16.86	17.08	19.65	10.71	10.93	13.50
			1	24	22.50	21.80	20.92	21.90	21.2	20.32				1	0	17.18	20.27	19.78	11.03	14.12	13.63
			25	0	21.59	20.54	19.56	20.99	19.94	18.96				25	0	17.16	20.92	20.99	11.01	14.77	14.84
2	5	1880	1	0	22.49	21.85	20.82	21.89	21.25	20.22	12	10	707.5	1	49	20.40	17.08	19.65	14.25	10.93	13.50
			1	24	22.48	21.85	21.03	21.88	21.25	20.43				1	0	17.47	17.15	19.69	11.32	11.00	13.54
			25	0	21.62	20.66	19.49	21.02	20.06	18.89				50	0	17.20	19.61	20.94	11.05	13.46	14.79
2	10	1880	1	0	22.53	21.90	20.83	21.93	21.30	20.23	12	10	707.5	1	49	19.84	17.95	19.58	13.69	11.8	13.43
			1	49	22.54	19.58	20.36	21.94	18.98	19.76				1	0	20.13	17.15	19.74	13.98	11.00	13.59
			50	0	21.54	20.58	19.53	20.94	19.98	18.93				50	0	17.27	20.95	19.57	11.12	14.80	13.42
2	15	1880	1	0	22.43	21.22	20.61	21.83	20.62	20.01	12	10	707.5	1	49	20.45	17.18	19.72	14.30	11.03	13.57
			1	74	22.26	21.66	20.45	21.66	21.06	19.85				1	0	20.57	18.52	19.68	14.42	12.37	13.53
			75	0	21.56	20.59	19.51	20.96	19.99	18.91				50	0	17.02	19.53	20.93	10.87	13.38	14.78
2	20	1880	1	0	22.73	22.09	21.30	22.13	21.49	20.70	12	10	707.5	1	49	19.08	17.34	19.80	12.93	11.19	13.65
			1	99	22.54	21.68	20.87	21.94	21.08	20.27				1	0	19.94	17.14	19.68	13.79	10.99	13.53
			100	0	21.82	20.84	19.78	21.22	20.24	19.18				50	0	17.32	19.66	21.03	11.17	13.51	14.88



LTE CA_2A-12A

PCC Power (dBm)									ERP(dBm)(GT - LC =4.0)			SCC Power (dBm)						EIRP(dBm)(GT - LC =-1.4)			
LTE Band	BW (MHz)	Frequency(MHz)	RB No	RB offset	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM	LTE Band	BW (MHz)	Frequency(MHz)	RB No	RB offset	QPSK	16QAM	64QAM	QPSK	16QAM	64QAM
12	3	707.5	1	0	23.72	23.23	22.13	17.57	17.08	15.98	66	5	1745	1	24	18.26	16.22	18.12	16.86	14.82	16.72
			1	14	23.66	23.46	21.84	17.51	17.31	15.69				1	0	18.62	17.30	18.19	17.22	15.9	16.79
			15	0	22.70	21.79	20.67	16.55	15.64	14.52				25	0	17.64	18.12	19.35	16.24	16.72	17.95
12	3	707.5	1	0	23.68	23.01	22.03	17.53	16.86	15.88	66	10	1745	1	49	18.10	15.90	18.23	16.70	14.50	16.83
			1	14	23.62	23.79	22.05	17.47	17.64	15.90				1	0	17.55	16.09	19.43	16.15	14.69	18.03
			15	0	22.67	21.80	20.61	16.52	15.65	14.46				50	0	16.81	18.13	19.43	15.41	16.73	18.03
12	3	707.5	1	0	23.68	23.49	21.48	17.53	17.34	15.33	66	15	1745	1	74	17.03	15.85	18.39	15.63	14.45	16.99
			1	14	23.62	23.21	21.72	17.47	17.06	15.57				1	0	16.24	16.02	18.12	14.84	14.62	16.72
			15	0	22.78	21.79	20.71	16.63	15.64	14.56				75	0	16.66	18.11	19.36	15.26	16.71	17.96
12	3	707.5	1	0	23.63	23.06	22.02	17.48	16.91	15.87	66	20	1745	1	99	18.26	19.32	18.12	16.86	17.92	16.72
			1	14	23.65	23.05	22.23	17.50	16.90	16.08				1	0	17.85	15.89	18.04	16.45	14.49	16.64
			15	0	22.66	21.79	20.53	16.51	15.64	14.38				100	0	16.25	18.05	19.24	14.85	16.65	17.84
12	5	707.5	1	0	23.58	23.09	22.00	17.43	16.94	15.85	66	1.4	1745	1	5	18.29	15.76	18.07	16.89	14.36	16.67
			1	24	23.65	23.67	21.98	17.50	17.52	15.83				1	0	17.44	15.76	18.08	16.04	14.36	16.68
			25	0	22.73	21.75	20.61	16.58	15.60	14.46				6	0	17.68	18.28	19.45	16.28	16.88	18.05
12	5	707.5	1	0	23.75	23.20	21.98	17.60	17.05	15.83	66	5	1745	1	24	16.47	15.76	18.25	15.07	14.36	16.85
			1	24	23.74	23.42	22.31	17.59	17.27	16.16				1	0	16.35	16.56	17.83	14.95	15.16	16.43
			25	0	22.75	21.79	20.79	16.60	15.64	14.64				25	0	17.66	18.18	19.44	16.26	16.78	18.04
12	5	707.5	1	0	23.72	23.21	21.41	17.57	17.06	15.26	66	10	1745	1	49	17.00	15.95	18.06	15.60	14.55	16.66
			1	24	23.71	23.23	21.81	17.56	17.08	15.66				1	0	16.77	15.95	18.06	15.37	14.55	16.66
			25	0	22.70	21.58	20.82	16.55	15.43	14.67				50	0	16.25	18.18	19.36	14.85	16.78	17.96
12	5	707.5	1	0	23.60	23.62	22.22	17.45	17.47	16.07	66	15	1745	1	74	17.65	16.05	18.20	16.25	14.65	16.8
			1	24	23.64	22.92	21.77	17.49	16.77	15.62				1	0	17.43	17.52	18.11	16.03	16.12	16.71
			25	0	22.70	21.63	20.72	16.55	15.48	14.57				75	0	17.71	18.46	19.30	16.31	17.06	17.9
12	5	707.5	1	0	23.18	22.84	21.66	17.03	16.69	15.51	66	20	1745	1	99	17.79	17.43	18.13	16.39	16.03	16.73
			1	24	23.67	23.73	22.17	17.52	17.58	16.02				1	0	18.59	16.03	18.01	17.19	14.63	16.61
			25	0	22.74	21.82	20.58	16.59	15.67	14.43				100	0	18.60	17.99	19.25	17.20	16.59	17.85
12	10	707.5	1	0	23.66	21.77	21.63	17.51	15.62	15.48	66	1.4	1745	1	5	17.48	16.00	18.50	16.08	14.60	17.10
			1	49	23.21	22.64	21.31	17.06	16.49	15.16				1	0	16.83	16.20	18.14	15.43	14.80	16.74
			50	0	22.84	21.66	20.69	16.69	15.51	14.54				6	0	17.33	18.01	19.35	15.93	16.61	17.95
12	10	707.5	1	0	24.13	24.11	22.38	17.98	17.96	16.23	66	20	1745	1	99	19.66	17.44	18.32	18.26	16.04	16.92
			1	49	24.00	23.70	22.41	17.85	17.55	16.26				1	0	17.89	16.02	18.32	16.49	14.62	16.92
			50	0	23.21	22.14	21.10	17.06	15.99	14.95				100	0	18.61	18.66	19.83	17.21	17.26	18.43

LTE CA_band 41

Bandwidth	Frequency (MHz)	Frequency (MHz)	Modulation	PCC RB		SCC RB		Conducted Power(dBm)	EIRP(dBm) (GT – LC=0.3)
				Size	Offset	Size	Offset		
5MHz/ 20MHz	2583.8	2595.5	QPSK	1	24	1	0	21.72	22.02
				25	0	100	0	20.19	20.49
			16QAM	1	24	1	0	21.53	21.83
				25	0	100	0	19.24	19.54
			64QAM	1	24	1	0	19.20	19.50
				25	0	100	0	19.22	19.52
20MHz/ 5MHz	2590.5	2602.2	QPSK	1	99	1	0	21.78	22.08
				100	0	25	0	20.28	20.58
			16QAM	1	99	1	0	21.58	21.88
				100	0	25	0	19.34	19.64
			64QAM	1	99	1	0	19.26	19.56
				100	0	25	0	19.29	19.59
10MHz/ 15MHz	2585.9	2597.9	QPSK	1	49	1	0	21.81	22.11
				50	0	75	0	20.22	20.52
			16QAM	1	49	1	0	21.65	21.95
				50	0	75	0	19.29	19.59
			64QAM	1	49	1	0	19.31	19.61
				50	0	75	0	19.28	19.58
15MHz/ 10MHz	2588.1	2600.1	QPSK	1	74	1	0	22.02	22.32
				75	0	50	0	20.31	20.61
			16QAM	1	74	1	0	21.81	22.11
				75	0	50	0	19.37	19.67
			64QAM	1	74	1	0	19.47	19.77
				75	0	50	0	19.33	19.63
10MHz/ 20MHz	2583.6	2598.0	QPSK	1	49	1	0	21.81	22.11
				50	0	100	0	20.18	20.48
			16QAM	1	49	1	0	21.62	21.92
				50	0	100	0	19.26	19.56
			64QAM	1	49	1	0	19.25	19.55
				50	0	100	0	19.20	19.50
20MHz/ 10MHz	2588.1	2602.5	QPSK	1	99	1	0	21.83	22.13
				100	0	50	0	20.25	20.55
			16QAM	1	99	1	0	21.64	21.94
				100	0	50	0	19.31	19.61
			64QAM	1	99	1	0	19.32	19.62
				100	0	50	0	19.26	19.56
15MHz/ 15MHz	2585.5	2600.5	QPSK	1	74	1	0	22.05	22.35
				75	0	75	0	20.23	20.53
			16QAM	1	74	1	0	21.82	22.12



				75	0	75	0	19.27	19.57
			64QAM	1	74	1	0	19.49	19.79
				75	0	75	0	19.24	19.54
15MHz/ 20MHz	2583.3	2600.4	QPSK	1	74	1	0	22.04	22.34
				75	0	100	0	20.21	20.51
			16QAM	1	74	1	0	21.83	22.13
				75	0	100	0	19.25	19.55
			64QAM	1	74	1	0	19.51	19.81
				75	0	100	0	19.23	19.53
20MHz/ 15MHz	2585.6	2602.7	QPSK	1	99	1	0	21.83	22.13
				100	0	75	0	20.21	20.51
			16QAM	1	99	1	0	21.66	21.96
				100	0	75	0	19.26	19.56
			64QAM	1	99	1	0	19.33	19.63
				100	0	75	0	19.24	19.54
20MHz/ 20MHz	2583.1	2602.9	QPSK	1	99	1	0	21.69	21.99
				100	0	100	0	19.94	20.24
			16QAM	1	99	1	0	21.51	21.81
				100	0	100	0	19.02	19.32
			64QAM	1	99	1	0	19.18	19.48
				100	0	100	0	18.98	19.28

A.2 Emission Limit


A.2.1 Measurement Method

The measurements procedures in TIA-603E-2016 are used. This measurement is carried out in fully anechoic chamber FAC-3.


The spectrum was scanned from 30 MHz to the 10th harmonic of the highest frequency generated within the equipment, which is the transmitted carrier. The resolution bandwidth is set 1MHz. The spectrum was scanned with the mobile station transmitting at carrier frequencies that pertain to low, mid and high channels of each LTE Band.

The procedure of radiated spurious emissions is as follows:

1. EUT was placed on a 1.5-meter-high non-conductive stand at a 3-meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna is 1.5m. The test setup refers to figure below. Detected emissions were maximized at each frequency by rotating the EUT through 360 and adjusting the receiving antenna polarization. The radiated emission measurements of all non-harmonic and harmonics of the transmit frequency through the 10th harmonic were measured with peak detector.

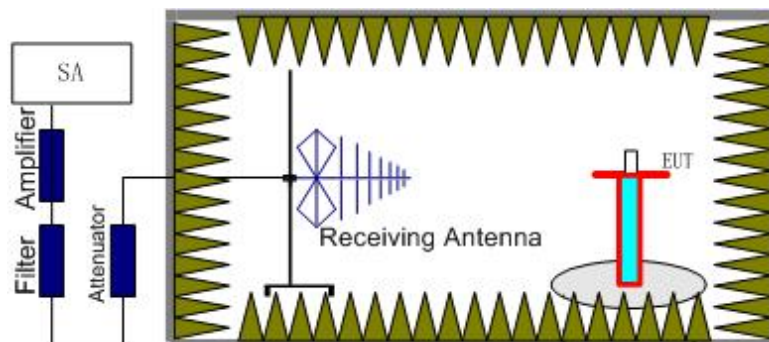

2. The EUT is then put into continuously transmitting mode at its maximum power level during the test. And the maximum value of the receiver should be recorded as (Pr).
3. The EUT shall be replaced by a substitution antenna. The test setup refers to figure below.

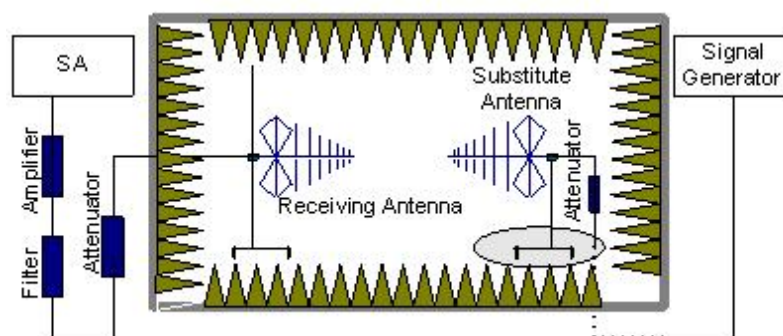

In the chamber, a substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the

substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P_{Mea}) is applied to the input of the substitution antenna. Adjust the level of the signal generator output until the value of the receiver reaches the previously recorded (P_r). The power of signal source (P_{Mea}) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

4. The Path loss (P_{pl}) between the Signal Source with the Substitution Antenna and the Substitution Antenna Gain (G_a) should be recorded after test.

An amplifier should be connected in for the test.

The Path loss (P_{pl}) is the summation of the cable loss and the gain of the amplifier.

The measurement results are obtained as described below:

$$\text{Power (EIRP)} = P_{Mea} - P_{pl} + G_a$$

5. This value is EIRP since the measurement is calibrated using an antenna of known gain (unit: dBi) and known input power.
6. ERP can be calculated from EIRP by subtracting the gain of the dipole, $ERP = EIRP - 2.15\text{dB}$.

A.2.2 Measurement Limit

FDD Band 2: Part 24.238 specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

FDD Band 66: Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

TDD Band 41: Part 27.53(m) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

FDD Band 12: Part 27.53(g) states for operations in the 600 MHz band and the 698–746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

A.2.3 Measurement Results

Radiated emissions measurements were made only at the upper, middle, and lower carrier frequencies of each LTE Band. It was decided that measurements at these three carrier frequencies would be sufficient to demonstrate compliance with emissions limits because it was seen that all the significant spurs occur



I21Z60426-WMD04

well outside the band and no radiation was seen from a carrier in one block of each LTE Band into any of the other blocks. The equipment must still, however, meet emissions requirements with the carrier at all frequencies over which it is capable of operating and it is the manufacturer's responsibility to verify this. The range of evaluated frequency is from 9 kHz to 26GHz. Measurement value show only up to 6 maximum emissions noted.

LTE CA_LB41_5M+20M_QPSK_CH39683

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
4956.02	-44.24	6.68	9.86	-41.06	-25.00	16.06	H
7461.01	-53.87	8.29	12.15	-50.01	-25.00	25.01	V
10044.01	-52.50	9.30	12.92	-48.88	-25.00	23.88	V
12463.01	-48.80	10.27	13.19	-45.88	-25.00	20.88	V
14979.00	-46.15	11.21	14.02	-43.34	-25.00	18.34	H
17532.00	-43.28	12.85	14.94	-41.19	-25.00	16.19	H

LTE CA_LB41_5M+20M_QPSK_CH40528

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5181.02	-55.64	6.93	10.15	-52.42	-25.00	27.42	H
7754.01	-53.65	8.35	12.40	-49.60	-25.00	24.60	H
10340.01	-51.21	9.71	13.04	-47.88	-25.00	22.88	V
12934.01	-48.48	10.49	13.46	-45.51	-25.00	20.51	V
15532.00	-44.55	11.52	13.70	-42.37	-25.00	17.37	H
16770.00	-41.95	12.00	13.71	-40.24	-25.00	15.24	H

LTE CA_LB41_5M+20M_QPSK_CH41373

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5313.02	-55.34	6.99	10.34	-51.99	-25.00	26.99	V
7987.01	-54.21	8.34	12.59	-49.96	-25.00	24.96	V
10649.01	-51.24	9.29	13.13	-47.40	-25.00	22.40	V
13348.01	-48.24	10.57	13.99	-44.82	-25.00	19.82	H
16022.00	-43.79	11.83	13.70	-41.92	-25.00	16.92	H
17367.00	-43.92	12.46	14.61	-41.77	-25.00	16.77	V

LTE CA_LB41_20M+20M_QPSK_CH39750

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5010.02	-56.58	6.59	9.91	-53.26	-25.00	28.26	V
7520.01	-54.78	8.31	12.22	-50.87	-25.00	25.87	H
10025.01	-52.51	9.25	12.91	-48.85	-25.00	23.85	V
12527.01	-49.79	10.25	13.22	-46.82	-25.00	21.82	H
15039.00	-46.58	11.27	13.98	-43.87	-25.00	18.87	H
17540.00	-45.09	12.88	14.96	-43.01	-25.00	18.01	V

LTE CA_LB41_20M+20M_QPSK_CH40521

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5184.02	-55.97	6.94	10.16	-52.75	-25.00	27.75	V
7759.01	-54.07	8.34	12.41	-50.00	-25.00	25.00	V
10303.01	-51.45	9.65	13.02	-48.08	-25.00	23.08	H
12887.01	-48.61	10.54	13.43	-45.72	-25.00	20.72	H
15520.00	-43.95	11.52	13.70	-41.77	-25.00	16.77	H
16762.00	-41.64	11.97	13.70	-39.91	-25.00	14.91	H

LTE CA_LB41_20M+20M_QPSK_CH41292

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
5300.02	-55.66	6.99	10.32	-52.33	-25.00	27.33	H
7961.01	-54.23	8.36	12.57	-50.02	-25.00	25.02	V
10636.01	-51.23	9.29	13.13	-47.39	-25.00	22.39	V
13312.01	-48.14	10.58	13.94	-44.78	-25.00	19.78	V
15950.00	-43.10	11.72	13.70	-41.12	-25.00	16.12	H
17276.00	-42.88	12.37	14.41	-40.84	-25.00	15.84	H

LTE CA_LB2_20M+LB12_10M_QPSK_CH18700

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
3745.02	-55.72	6.31	8.54	-53.49	-13.00	40.49	V
5573.02	-56.23	7.21	10.59	-52.85	-13.00	39.85	V
7478.01	-54.24	8.33	12.17	-50.40	-13.00	37.40	V
9259.01	-53.45	9.06	13.26	-49.25	-13.00	36.25	V
11180.01	-51.04	9.49	13.16	-47.37	-13.00	34.37	H
13055.01	-47.50	10.72	13.58	-44.64	-13.00	31.64	V

LTE CA_LB2_20M+LB12_10M_QPSK_CH18900

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
3794.02	-55.27	6.16	8.61	-52.82	-13.00	39.82	V
5651.02	-55.30	7.27	10.57	-52.00	-13.00	39.00	H
7555.01	-53.73	8.16	12.24	-49.65	-13.00	36.65	H
9438.01	-53.16	9.23	13.36	-49.03	-13.00	36.03	H
11233.01	-51.08	9.60	13.15	-47.53	-13.00	34.53	V
13110.01	-47.74	10.89	13.65	-44.98	-13.00	31.98	V

LTE CA_LB2_20M+LB12_10M_QPSK_CH19100

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
3847.02	-55.46	6.08	8.69	-52.85	-13.00	39.85	V
5726.02	-54.74	7.30	10.55	-51.49	-13.00	38.49	V
7609.01	-54.25	8.01	12.29	-49.97	-13.00	36.97	V
9487.01	-52.55	9.48	13.39	-48.64	-13.00	35.64	V
11370.01	-50.70	10.04	13.13	-47.61	-13.00	34.61	V
13263.01	-48.28	10.55	13.87	-44.96	-13.00	31.96	H

LTE CA_LB2_10M+LB12_5M_QPSK_CH18650

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
3744.02	-55.60	6.31	8.54	-53.37	-13.00	40.37	V
5610.02	-55.56	7.25	10.58	-52.23	-13.00	39.23	H
7450.01	-52.71	8.26	12.14	-48.83	-13.00	35.83	H
9227.01	-53.65	8.99	13.24	-49.40	-13.00	36.40	V
11081.01	-50.79	9.87	13.18	-47.48	-13.00	34.48	H
12938.01	-48.36	10.49	13.46	-45.39	-13.00	32.39	H

LTE CA_LB2_10M+LB12_5M_QPSK_CH18900

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
3725.02	-55.75	6.37	8.52	-53.60	-13.00	40.60	V
5620.02	-55.15	7.26	10.58	-51.83	-13.00	38.83	V
7476.01	-53.68	8.33	12.17	-49.84	-13.00	36.84	H
9448.01	-53.07	9.28	13.37	-48.98	-13.00	35.98	V
11259.01	-50.88	9.75	13.15	-47.48	-13.00	34.48	V
13118.01	-47.80	10.86	13.67	-44.99	-13.00	31.99	V

LTE CA_LB2_10M+LB12_5M_QPSK_CH19150

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Peak EIRP (dBm)	Limit (dBm)	Margin (dB)	Polorization
3778.02	-56.23	6.21	8.59	-53.85	-13.00	40.85	H
5697.02	-55.19	7.29	10.56	-51.92	-13.00	38.92	V
7656.01	-54.38	8.23	12.32	-50.29	-13.00	37.29	V
9566.01	-52.96	9.30	13.33	-48.93	-13.00	35.93	V
11479.01	-49.12	9.87	13.10	-45.89	-13.00	32.89	V
13351.01	-48.41	10.57	13.99	-44.99	-13.00	31.99	V

LTE CA_LB12_10M+LB66_20M_QPSK_CH23060

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Correction	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1415.01	-59.33	3.25	5.06	2.15	-59.67	-13.00	46.67	V
2116.00	-55.70	4.21	4.95	2.15	-57.11	-13.00	44.11	V
2807.00	-52.29	4.92	6.65	2.15	-52.71	-13.00	39.71	V
3505.02	-55.28	5.53	8.21	2.15	-54.75	-13.00	41.75	H
4227.02	-54.43	6.26	9.13	2.15	-53.71	-13.00	40.71	V
4920.01	-54.81	6.73	9.82	2.15	-53.87	-13.00	40.87	H

LTE CA_LB12_10M+LB66_20M_QPSK_CH23095

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Correction	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1400.01	-60.29	3.24	4.98	2.15	-60.70	-13.00	47.70	H
2123.00	-55.65	4.21	4.97	2.15	-57.04	-13.00	44.04	H
2835.00	-52.50	4.95	6.70	2.15	-52.90	-13.00	39.90	V
3535.02	-55.36	5.67	8.25	2.15	-54.93	-13.00	41.93	H
4233.02	-54.40	6.26	9.13	2.15	-53.68	-13.00	40.68	H
4956.01	-53.98	6.68	9.86	2.15	-52.95	-13.00	39.95	H

LTE CA_LB12_10M+LB66_20M_QPSK_CH23130

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Correction	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1422.01	-59.19	3.26	5.09	2.15	-59.51	-13.00	46.51	H
2144.00	-54.99	4.24	5.03	2.15	-56.35	-13.00	43.35	H
2848.00	-52.29	4.96	6.73	2.15	-52.67	-13.00	39.67	H
3565.02	-55.00	5.98	8.29	2.15	-54.84	-13.00	41.84	V
4256.02	-54.35	6.23	9.16	2.15	-53.57	-13.00	40.57	H
4989.01	-54.38	6.62	9.89	2.15	-53.26	-13.00	40.26	V

LTE CA_LB12_5M+LB66_10M_QPSK_CH23035

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Correction	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1416.01	-53.61	3.26	5.06	2.15	-53.96	-13.00	40.96	V
2101.00	-53.06	4.19	4.90	2.15	-54.50	-13.00	41.50	H
2818.00	-52.67	4.94	6.67	2.15	-53.09	-13.00	40.09	H
3497.02	-54.44	5.51	8.19	2.15	-53.91	-13.00	40.91	H
4204.02	-53.75	6.22	9.10	2.15	-53.02	-13.00	40.02	V
4896.01	-54.03	6.73	9.80	2.15	-53.11	-13.00	40.11	V

LTE CA_LB12_5M+LB66_10M_QPSK_CH23095

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Correction	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1418.01	-43.86	3.26	5.07	2.15	-44.20	-13.00	31.20	V
2126.00	-55.97	4.22	4.98	2.15	-57.36	-13.00	44.36	H
2825.00	-52.76	4.95	6.69	2.15	-53.17	-13.00	40.17	V
3546.02	-55.04	5.78	8.26	2.15	-54.71	-13.00	41.71	V
4232.02	-54.12	6.26	9.13	2.15	-53.40	-13.00	40.40	V
4947.01	-54.35	6.69	9.85	2.15	-53.34	-13.00	40.34	H

LTE CA_LB12_5M+LB66_10M_QPSK_CH23155

Frequency (MHz)	SG (dBm)	CableLoss (dB)	AntennaGain (dBi)	Correction	Peak ERP (dBm)	Limit (dBm)	Margin (dB)	Polorization
1427.01	-53.75	3.27	5.12	2.15	-54.05	-13.00	41.05	H
2135.00	-55.15	4.23	5.01	2.15	-56.52	-13.00	43.52	V
2844.00	-51.81	4.96	6.72	2.15	-52.20	-13.00	39.20	H
3573.02	-54.28	6.06	8.30	2.15	-54.19	-13.00	41.19	V
4276.02	-54.98	6.22	9.18	2.15	-54.17	-13.00	41.17	H
5006.01	-53.52	6.59	9.91	2.15	-52.35	-13.00	39.35	V

Note: The maximum value of expanded measurement uncertainty for this test item is $U = 5.16$ dB, $k = 2$.

A.3 Frequency Stability

A.3.1 Method of Measurement

Frequency stability is a measure of the frequency drift due to temperature and supply voltage variations, with reference to the frequency measured at +20 °C and rated supply voltage. Two reference points are established at the applicable unwanted emissions limit using a RBW equal to the RBW required by the unwanted emissions specification of the applicable regulatory standard. These reference points measured using the lowest and highest channel of operation shall be identified as F_L and F_H respectively.

In order to measure the carrier frequency under the condition of AFC lock, it is necessary to make measurements with the EUT in a “call mode”. This is accomplished with the use of CMW500.

1. Measure the carrier frequency at room temperature.
2. Subject the EUT to overnight soak at -30°C.
3. With the EUT, powered via nominal voltage, connected to the CMW500, and in a simulated call on middle channel for each LTE band, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
4. Repeat the above measurements at 10°C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
5. Re-measure carrier frequency at room temperature with nominal voltage. Vary supply voltage from minimum voltage to maximum voltage, in 0.1Volt increments re-measuring carrier frequency at each voltage. Pause at nominal voltage for 1.5 hours unpowered, to allow any self-heating to stabilize, before continuing.
6. Subject the EUT to overnight soak at +50°C.
7. With the EUT, powered via nominal voltage, connected to the CMW500 and in a simulated call on the center channel, measure the carrier frequency. These measurements should be made within 2 minutes of Powering up the EUT, to prevent significant self-warming.
8. Repeat the above measurements at 10 °C increments from -30°C to +50°C. Allow at least 1.5 hours at each temperature, unpowered, before making measurements.
9. At all temperature levels hold the temperature to +/- 0.5°C during the measurement procedure.

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block. As this transceiver is considered "Hand carried, battery powered equipment" Section 2.1055(d)(2) applies. This requires that the lower voltage for frequency stability testing be specified by the manufacturer. This transceiver is specified to operate with an input voltage of the lower, higher and nominal voltage. Operation above or below these voltage limits is prohibited by transceiver software in order to prevent improper operation as well as to protect components from overstress.

A.3.2 Measurement results

LTE Band 2@CA_2A-12A, 20MHz bandwidth QPSK (worst case of all bandwidths)

Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	1850.833	1909.199		
50				-1.66	0.0009
40				-2.95	0.0016
30				-2.33	0.0012
10				1.83	0.0010
0				-3.00	0.0016
-10				-5.48	0.0029
-20				0.36	0.0002
-30				-2.85	0.0015

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
3.60	20	1850.833	1909.199	-4.78	0.0025
4.45				-4.46	0.0024

LTE Band 12@CA_2A-12A, 10MHz bandwidth QPSK (worst case of all bandwidths)

Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	699.481	715.519		
50				-9.37	0.0132
40				-0.93	0.0013
30				-1.42	0.0020
10				-10.30	0.0146
0				-8.50	0.0120
-10				-10.06	0.0142
-20				-9.13	0.0129
-30				-0.13	0.0002

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
3.60	20	699.481	715.519	-10.47	0.0148
4.45				-8.21	0.0116

LTE Band 12@CA_12A-66A, 10MHz bandwidth QPSK (worst case of all bandwidths)
Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	699.465	715.519		
50				12.45	0.0176
40				11.00	0.0155
30				11.34	0.0160
10				1.65	0.0023
0				11.69	0.0165
-10				11.36	0.0161
-20				1.32	0.0019
-30				9.93	0.0140

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
3.60	20	699.465	715.519	1.93	0.0027
4.45				1.13	0.0016

LTE Band 66@CA_12A-66A, 20MHz bandwidth QPSK (worst case of all bandwidths)
Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	1710.833	1779.199		
50				-0.39	0.0002
40				2.57	0.0015
30				-0.72	0.0004
10				2.40	0.0014
0				2.40	0.0014
-10				2.86	0.0016
-20				-0.97	0.0006
-30				-0.29	0.0002

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
3.60	20	1710.833	1779.199	-1.40	0.0008
4.45				1.04	0.0006

LTE band 41_CA, 20MHz+20MHz bandwidth QPSK(worst case of all bandwidths)

Frequency Error vs Temperature

Temperature(°C)	Voltage(V)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
20	3.87	2496.449	2689.119		
50				8.10	0.0031
40				-1.30	0.0005
30				8.60	0.0033
10				-3.00	0.0012
0				-2.80	0.0011
-10				2.00	0.0008
-20				1.90	0.0007
-30				-2.20	0.0008

Frequency Error vs Voltage

Voltage(V)	Temperature(°C)	F _L (MHz)	F _H (MHz)	Offset(Hz)	Frequency error(ppm)
3.60	20	2496.449	2689.119	10.5	0.0040
4.45				5.0	0.0019

A.4 Occupied Bandwidth

Occupied bandwidth measurements are only provided for selected frequencies in order to reduce the amount of submitted data. Data were taken at the mid frequencies frequency. The table below lists the measured 99% BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts.
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) Set the detection mode to peak, and the trace mode to max-hold.

LTE band 2@CA_2A-12A, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	4471.15	4471.15

LTE band 2@CA_2A-12A, 5MHz Bandwidth, QPSK (99% BW)

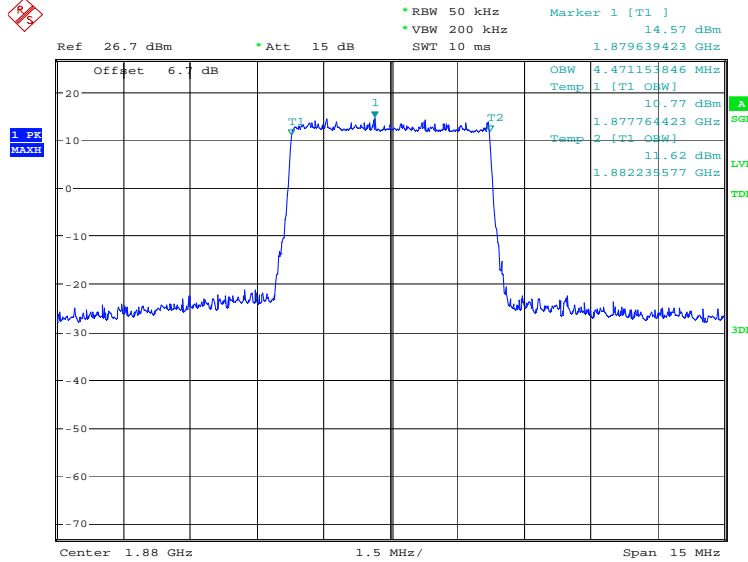

Date: 24.MAR.2021 10:53:56

LTE band 2@CA_2A-12A, 5MHz Bandwidth, 16QAM (99% BW)

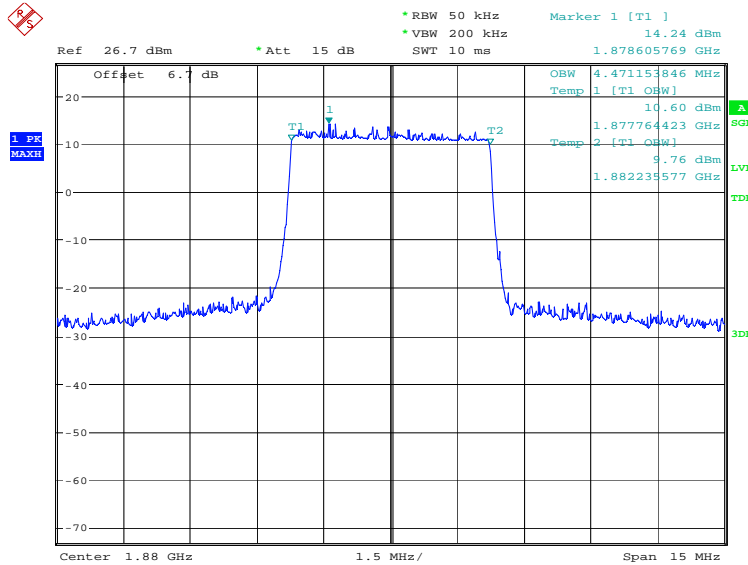


Date: 24.MAR.2021 10:54:35

LTE band 2@CA_2A-12A, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1880.0	QPSK	16QAM
	8990.38	8942.31

LTE band 2@CA_2A-12A, 10MHz Bandwidth, QPSK (99% BW)

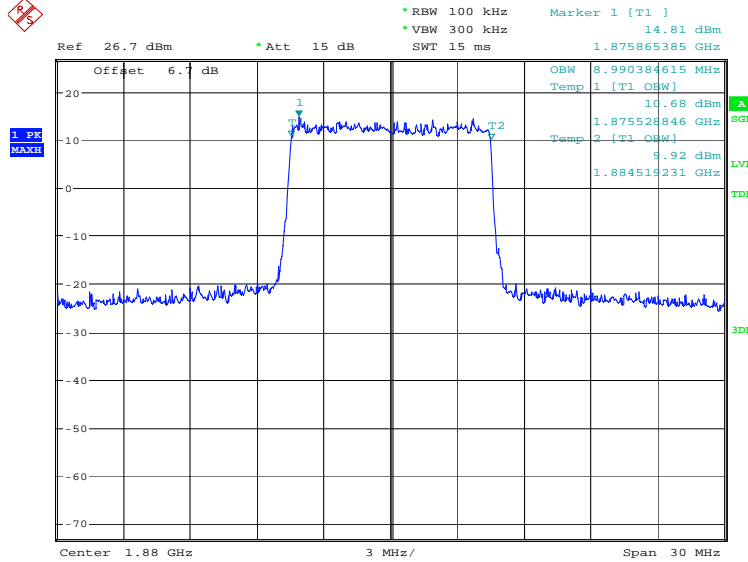

Date: 24.MAR.2021 10:58:27

LTE band 2@CA_2A-12A, 10MHz Bandwidth, 16QAM (99% BW)

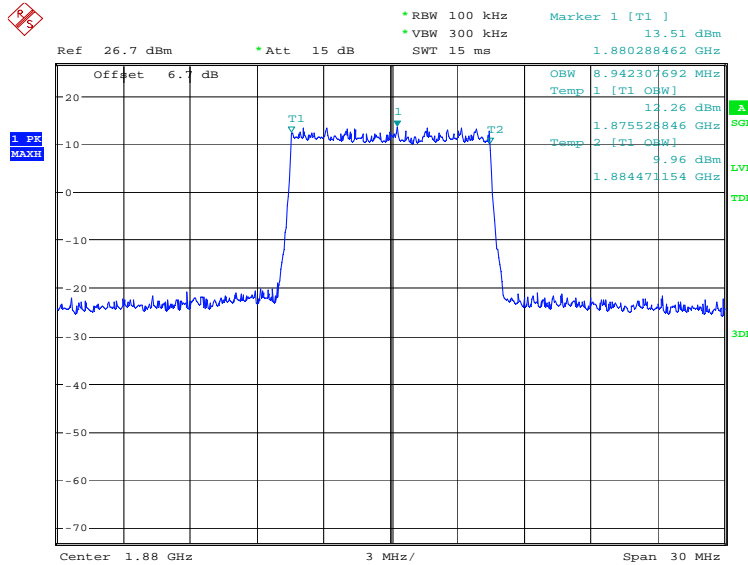


Date: 24.MAR.2021 10:59:07

LTE band 2@CA_2A-12A, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1880.0	QPSK	16QAM
	13485.58	13485.58

LTE band 2@CA 2A-12A. 15MHz Bandwidth. QPSK (99% BW)

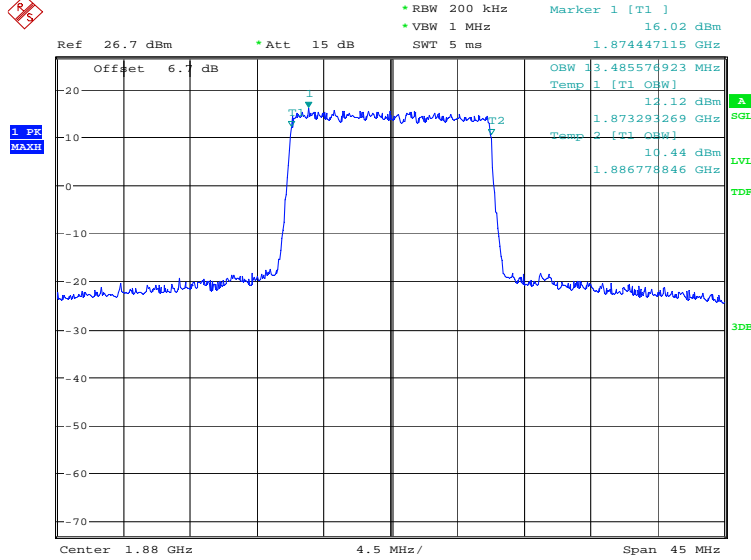

Date: 24.MAR.2021 11:00:36

LTE band 2@CA 2A-12A. 15MHz Bandwidth. 16QAM (99% BW)

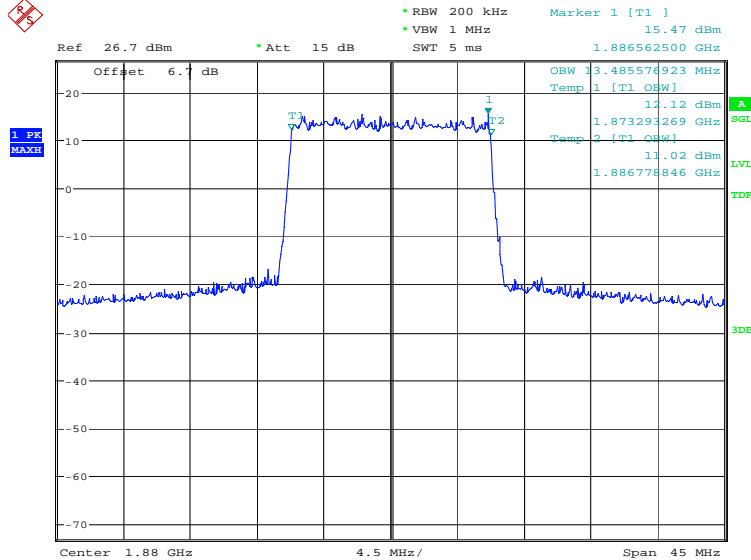


Date: 24.MAR.2021 11:01:15

LTE band 2@CA_2A-12A, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%) (kHz)	
1880.0	QPSK	16QAM
	17884.62	17884.62

LTE band 2@CA 2A-12A. 20MHz Bandwidth. QPSK (99% BW)

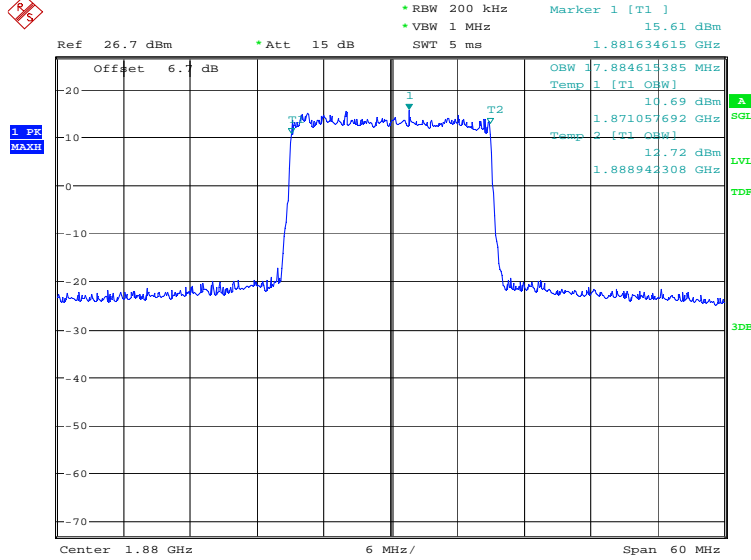

Date: 24.MAR.2021 11:02:44

LTE band 2@CA 2A-12A. 20MHz Bandwidth. 16QAM (99% BW)

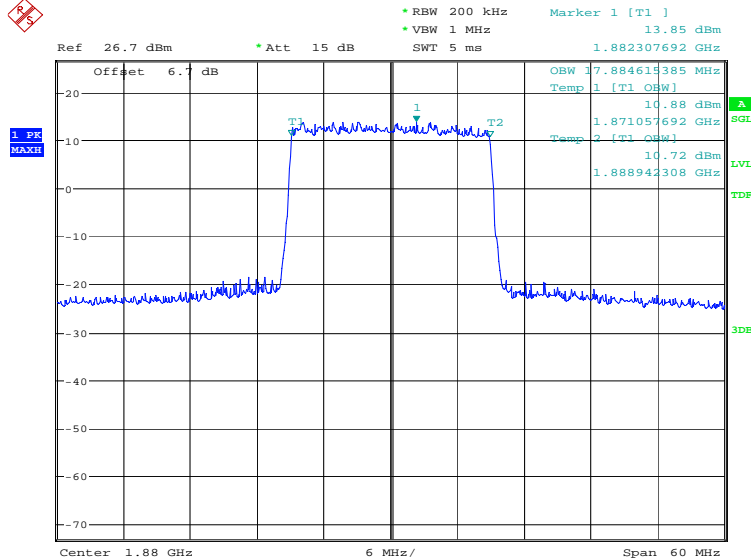


Date: 24.MAR.2021 11:03:23

LTE band 12@CA_2A-12A, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	2692.31	2692.31

LTE band 12@CA_2A-12A, 3MHz Bandwidth, QPSK (99% BW)

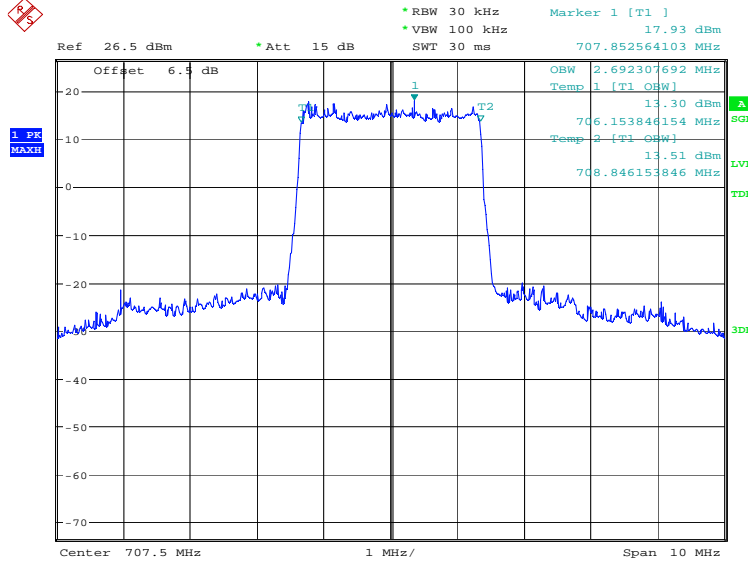

Date: 24.MAR.2021 10:05:30

LTE band 12@CA_2A-12A, 3MHz Bandwidth, 16QAM (99% BW)

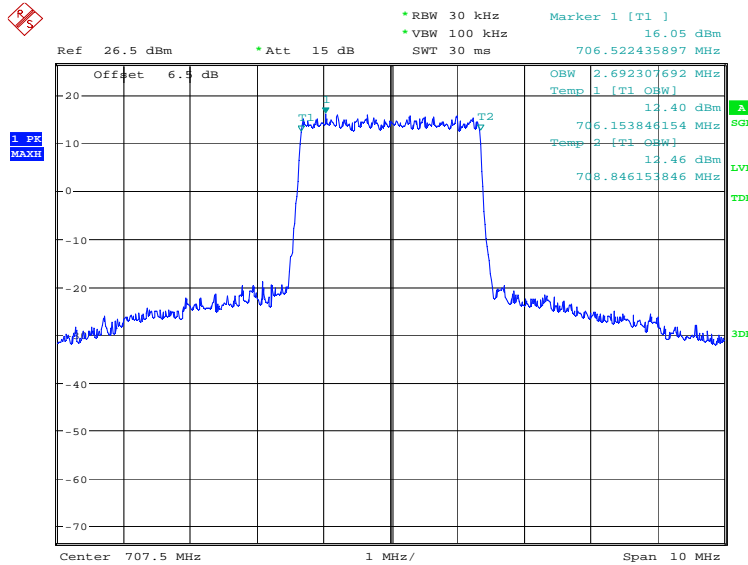


Date: 24.MAR.2021 10:06:10

LTE band 12@CA_2A-12A, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	4519.23	4471.15

LTE band 12@CA_2A-12A, 5MHz Bandwidth, QPSK (99% BW)

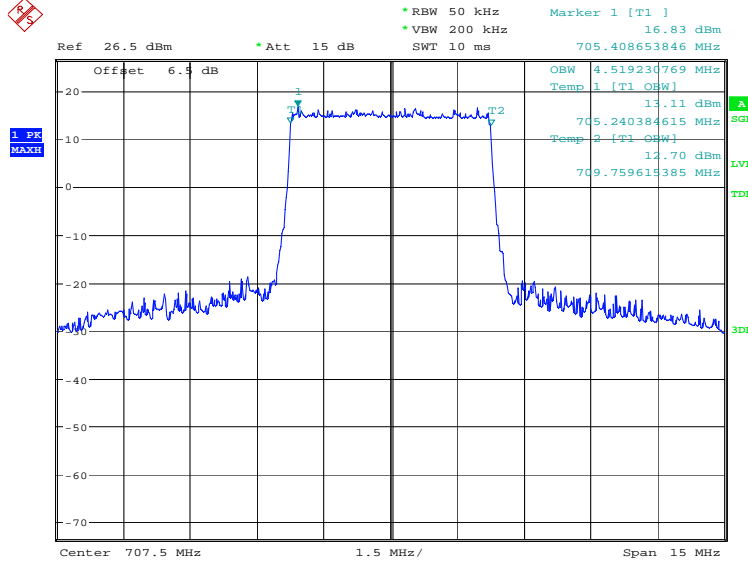

Date: 24.MAR.2021 10:07:38

LTE band 12@CA_2A-12A, 5MHz Bandwidth, 16QAM (99% BW)

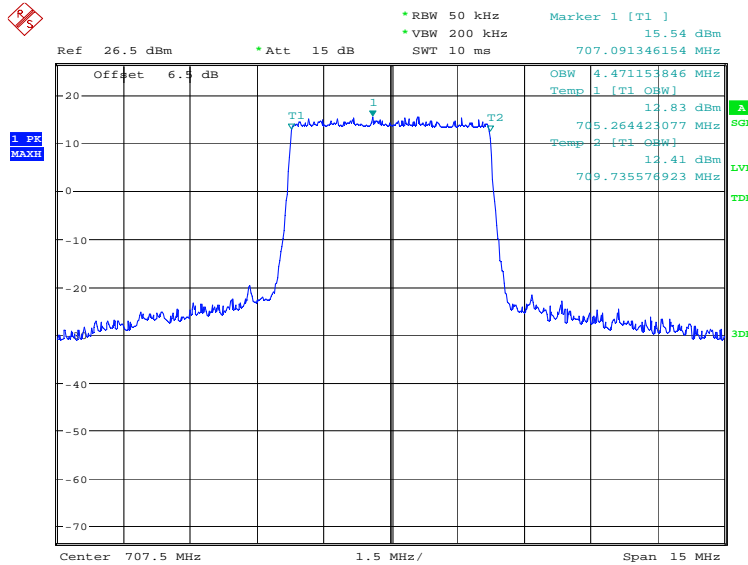


Date: 24.MAR.2021 10:08:18

LTE band 12@CA_2A-12A, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	8942.31	8942.31

LTE band 12@CA_2A-12A, 10MHz Bandwidth, QPSK (99% BW)

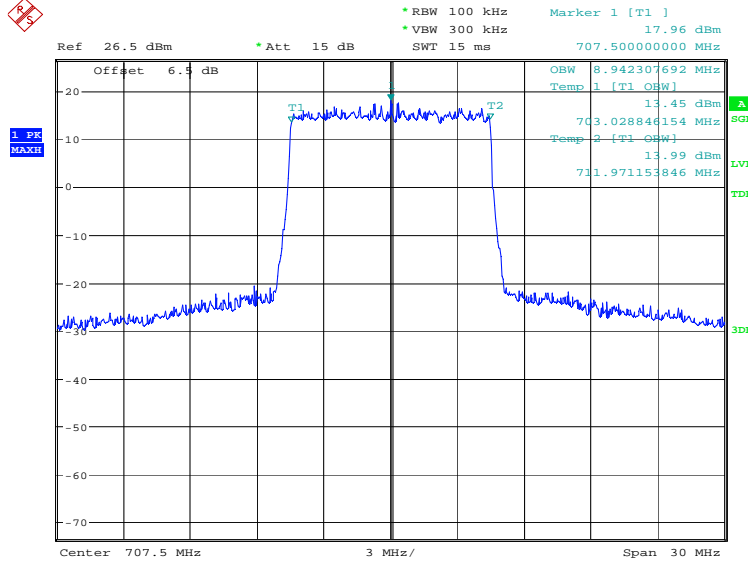

Date: 24.MAR.2021 10:09:47

LTE band 12@CA_2A-12A, 10MHz Bandwidth, 16QAM (99% BW)

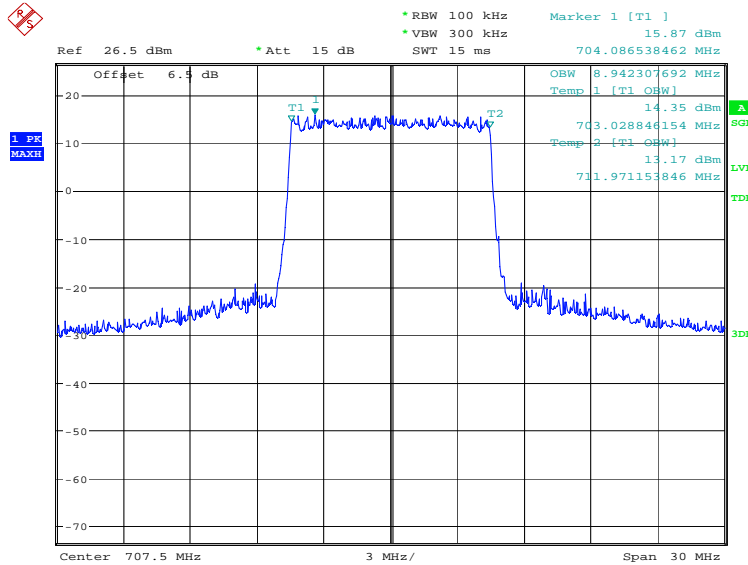


Date: 24.MAR.2021 10:10:26

LTE band 12@CA_12A-66A, 3MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	2692.31	2692.31

LTE band 12@CA_12A-66A, 3MHz Bandwidth, QPSK (99% BW)

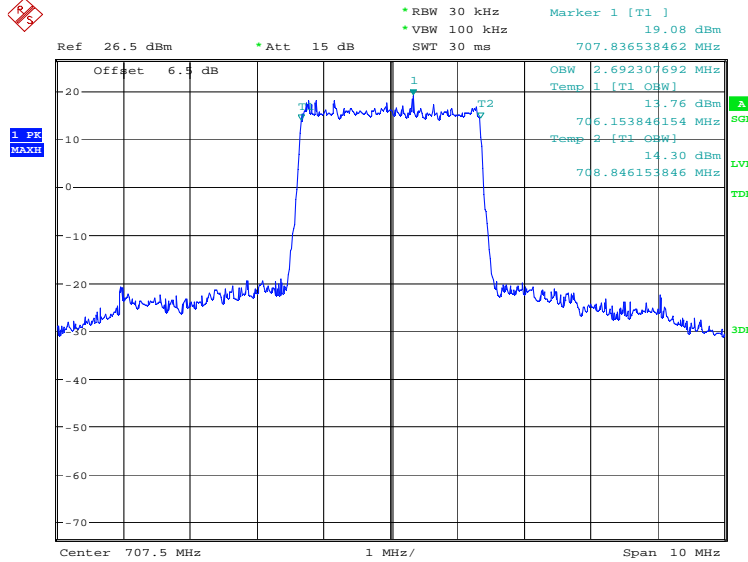

Date: 24.MAR.2021 14:38:23


LTE band 12@CA_12A-66A, 3MHz Bandwidth, 16QAM (99% BW)

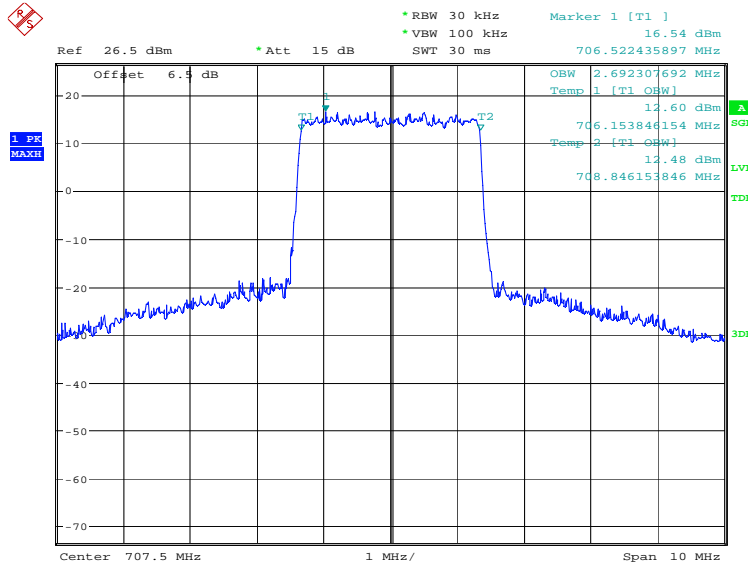


Date: 24.MAR.2021 14:39:02

LTE band 12@CA_12A-66A, 5MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	4471.15	4471.15

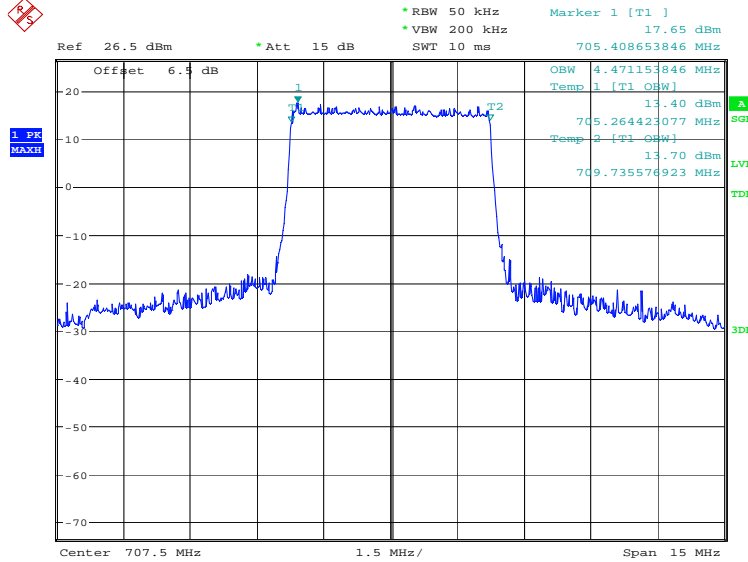LTE band 12@CA_12A-66A, 5MHz Bandwidth, QPSK (99% BW)


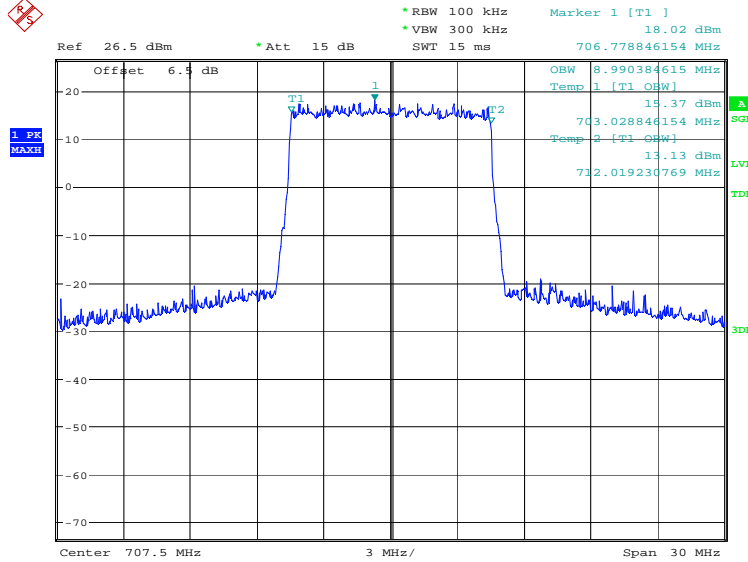
Date: 24.MAR.2021 14:40:29

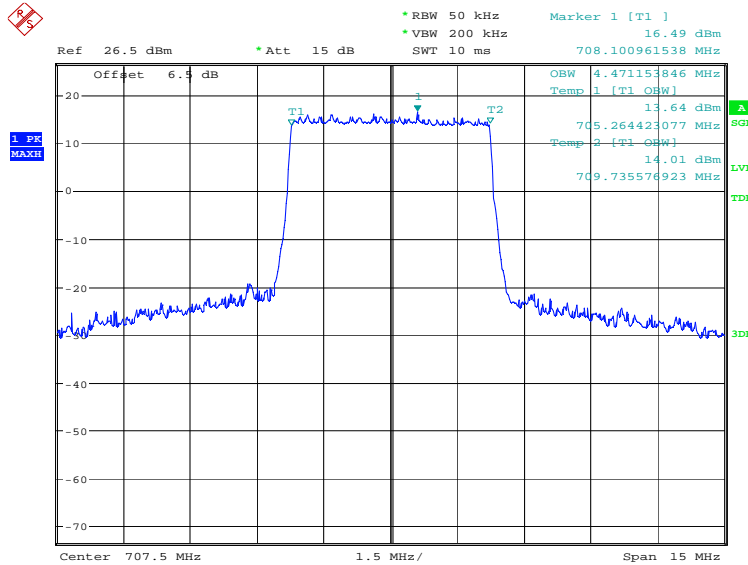LTE band 12@CA_12A-66A, 5MHz Bandwidth, 16QAM (99% BW)


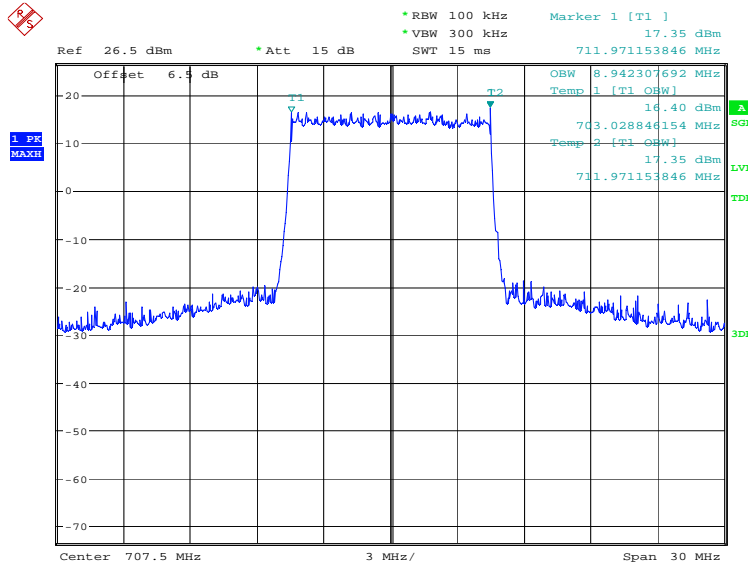
Date: 24.MAR.2021 14:41:08

LTE band 12@CA_12A-66A, 10MHz (99%)

Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
707.5	QPSK	16QAM
	8990.38	8942.31

LTE band 12@CA_12A-66A, 10MHz Bandwidth, QPSK (99% BW)


Date: 24.MAR.2021 14:42:36


LTE band 12@CA_12A-66A, 10MHz Bandwidth, 16QAM (99% BW)


Date: 24.MAR.2021 14:43:14

LTE band 66@CA_12A-66A, 1.4MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1745.0	QPSK	16QAM
	1089.74	1089.74

LTE band 66@CA_12A-66A, 1.4MHz Bandwidth, QPSK (99% BW)

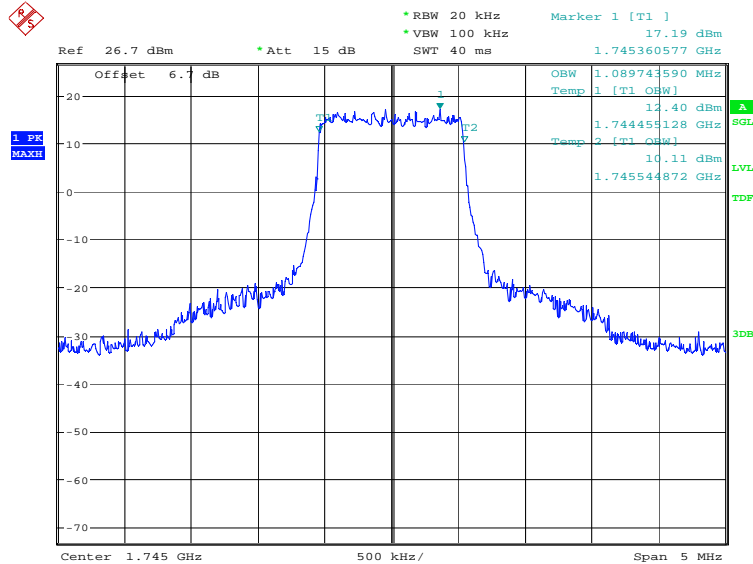

Date: 24.MAR.2021 14:07:44

LTE band 66@CA_12A-66A, 1.4MHz Bandwidth, 16QAM (99% BW)

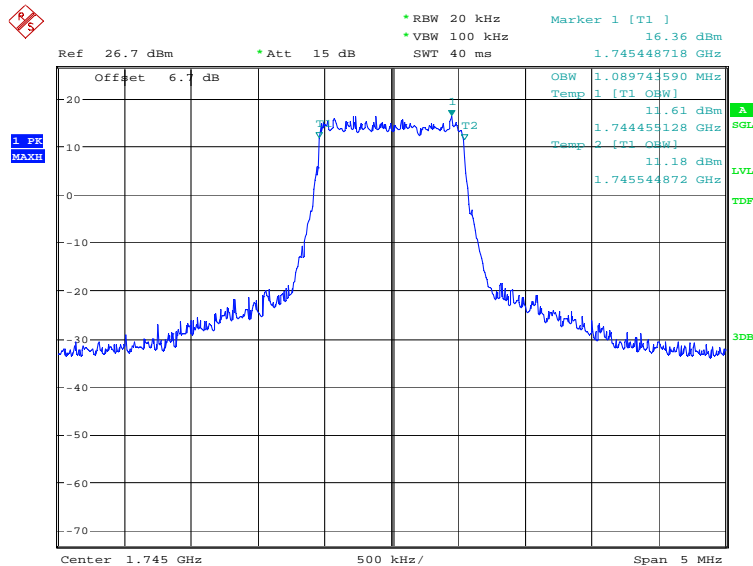


Date: 24.MAR.2021 14:08:23

LTE band 66@CA_12A-66A, 5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1745.0	QPSK	16QAM
	4495.19	4471.15

LTE band 66@CA_12A-66A, 5MHz Bandwidth, QPSK (99% BW)

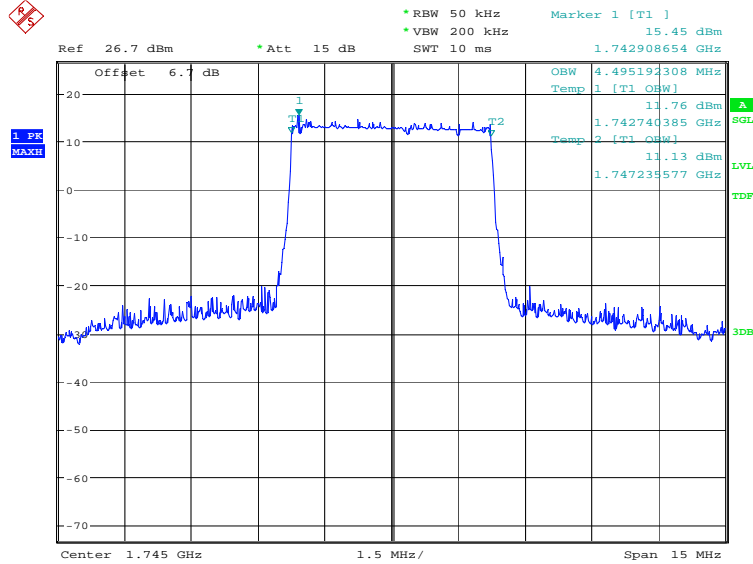

Date: 24.MAR.2021 14:09:52

LTE band 66@CA_12A-66A, 5MHz Bandwidth, 16QAM (99% BW)

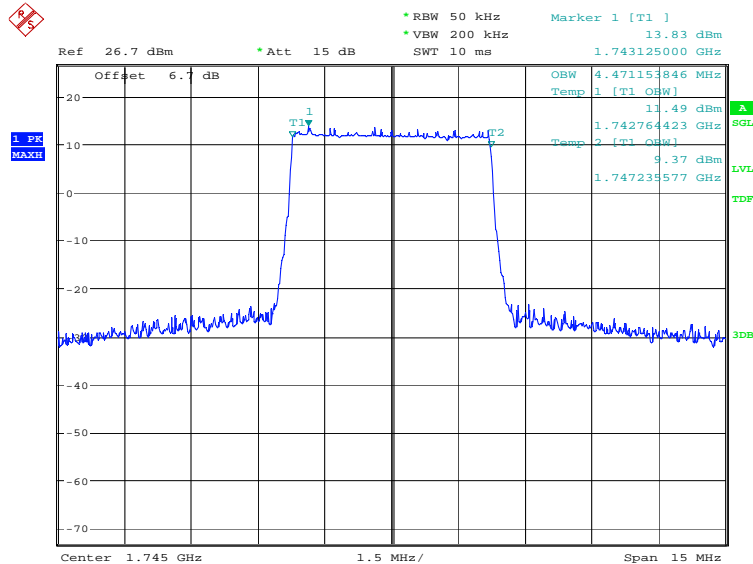


Date: 24.MAR.2021 14:10:31

LTE band 66@CA_12A-66A, 10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1745.0	QPSK	16QAM
	9038.46	8942.31

LTE band 66@CA_12A-66A, 10MHz Bandwidth, QPSK (99% BW)

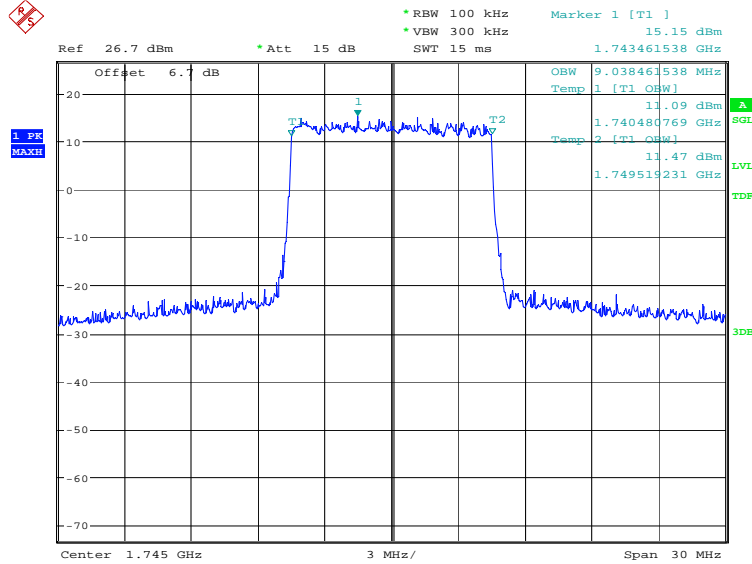

Date: 24.MAR.2021 14:11:59

LTE band 66@CA_12A-66A, 10MHz Bandwidth, 16QAM (99% BW)

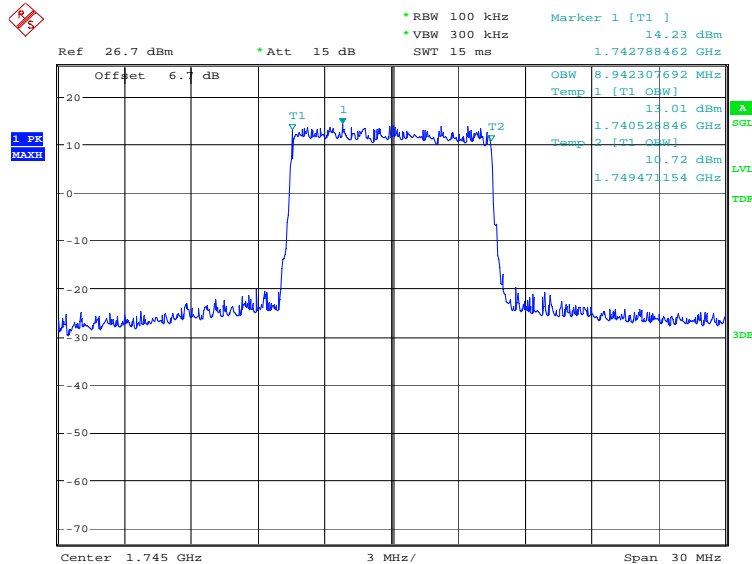


Date: 24.MAR.2021 14:12:39

LTE band 66@CA_12A-66A, 15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1745.0	QPSK	16QAM
	13485.58	13485.58

LTE band 66@CA_12A-66A, 15MHz Bandwidth, QPSK (99% BW)

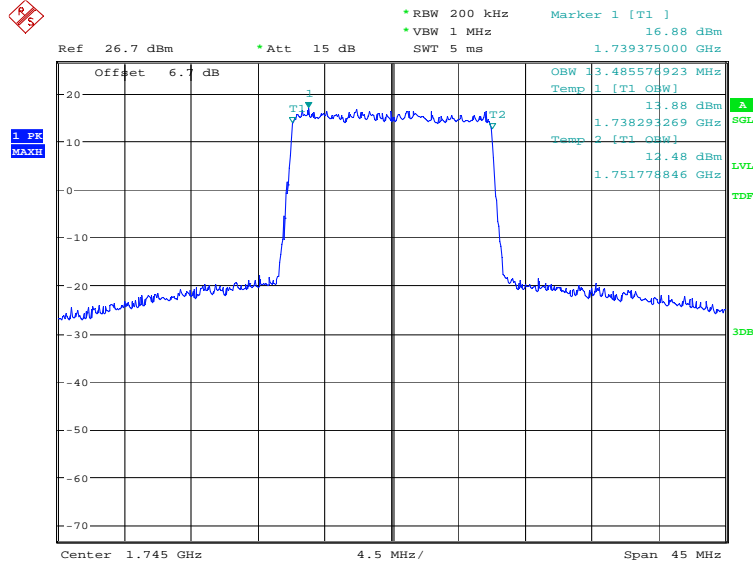

Date: 24.MAR.2021 14:14:07

LTE band 66@CA_12A-66A, 15MHz Bandwidth, 16QAM (99% BW)

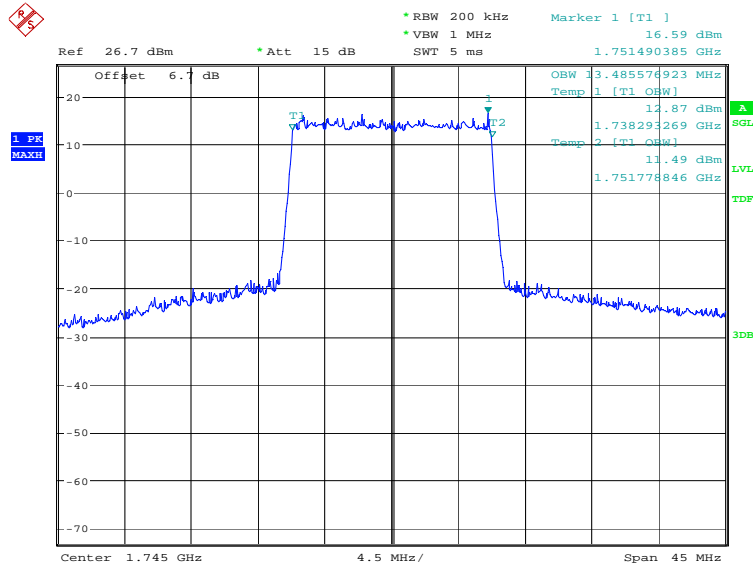


Date: 24.MAR.2021 14:14:46

LTE band 66@CA_12A-66A, 20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(kHz)	
1745.0	QPSK	16QAM
	17884.62	17884.62

LTE band 66@CA_12A-66A, 20MHz Bandwidth, QPSK (99% BW)

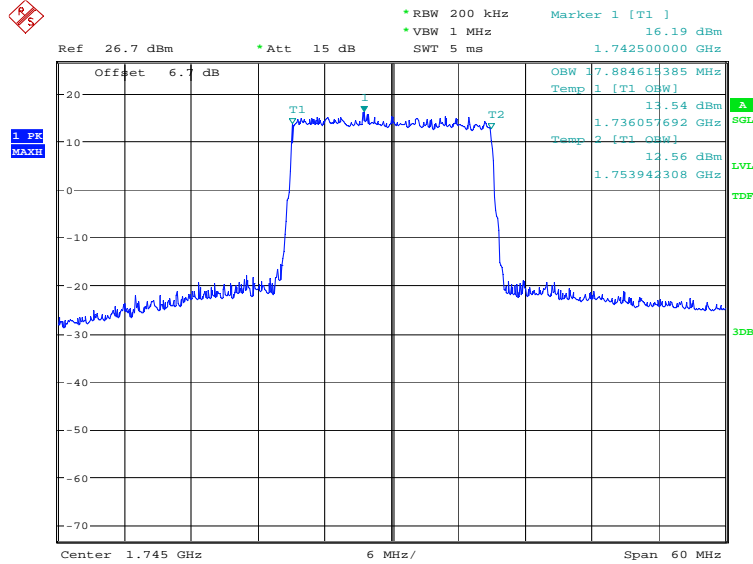

Date: 24.MAR.2021 14:16:15

LTE band 66@CA_12A-66A, 20MHz Bandwidth, 16QAM (99% BW)

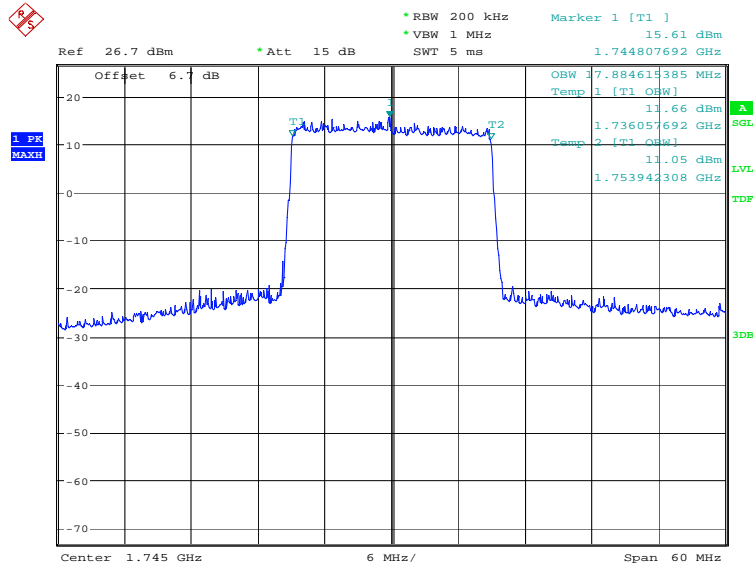


Date: 24.MAR.2021 14:16:54

LTE CA band 41 , 5MHz+20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(MHz)	
2593.0	QPSK	16QAM
	23477.56	23397.44

LTE CA band 41 , 5MHz+20MHz Bandwidth, QPSK (99% BW)

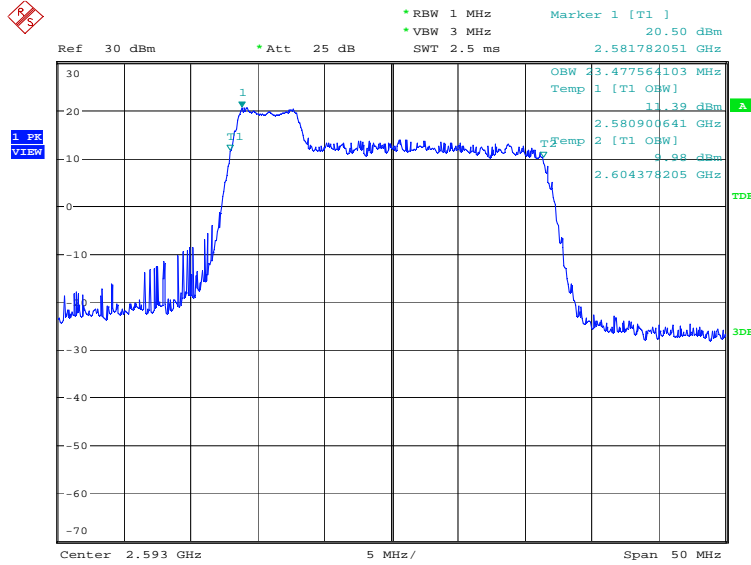

Date: 11.MAR.2021 14:21:30

LTE CA band 41 , 5MHz+20MHz Bandwidth,16QAM (99% BW)

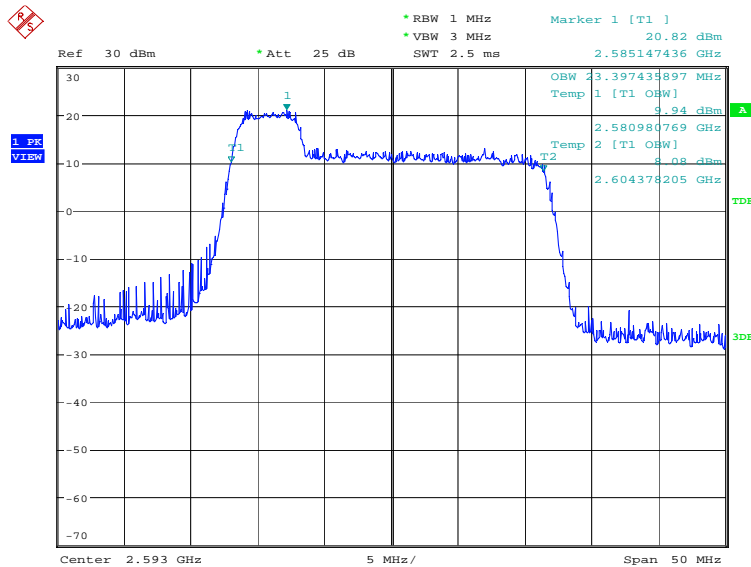


Date: 11.MAR.2021 14:22:50

LTE CA band 41 , 10MHz+15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	23557.69	23557.69

LTE CA band 41 , 10MHz+15MHz Bandwidth, QPSK (99% BW)

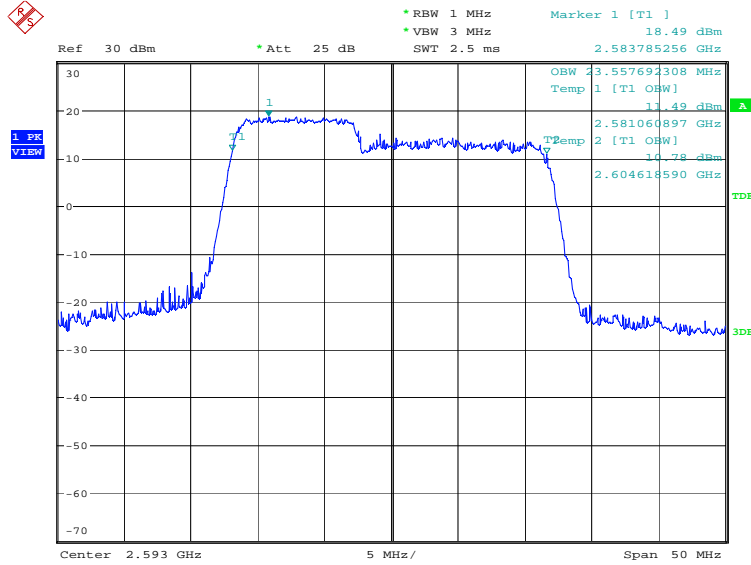

Date: 11.MAR.2021 14:31:11

LTE CA band 41 , 10MHz+15MHz Bandwidth,16QAM (99% BW)

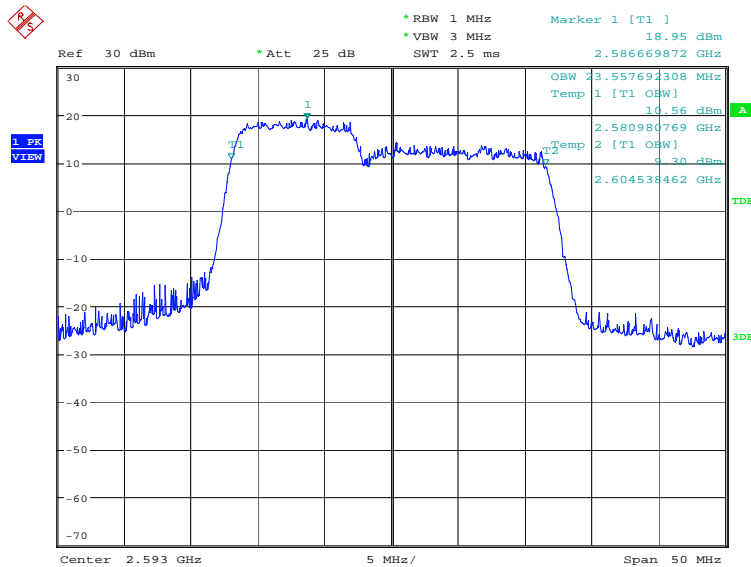


Date: 11.MAR.2021 14:33:45

LTE CA band 41 , 10MHz+20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
	QPSK	16QAM
2593.0	28044.87	28044.87

LTE CA band 41 , 10MHz+20MHz Bandwidth, QPSK (99% BW)

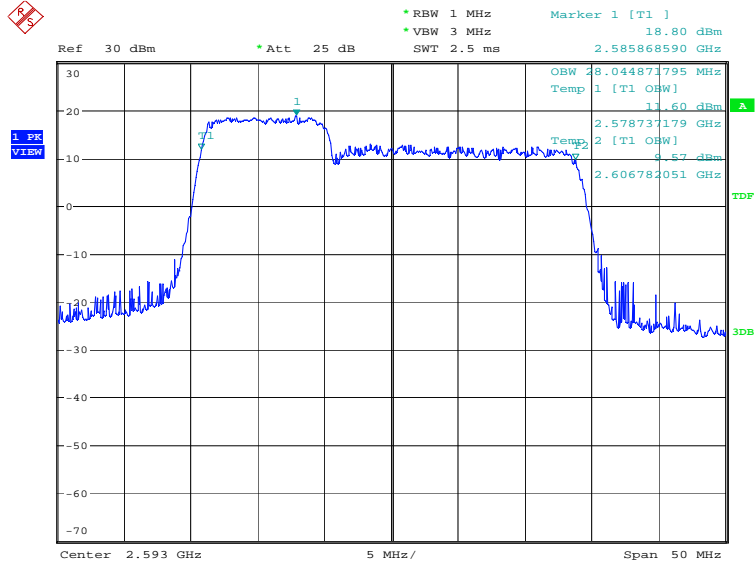

Date: 11.MAR.2021 14:47:32

LTE CA band 41 , 10MHz+20MHz Bandwidth,16QAM (99% BW)

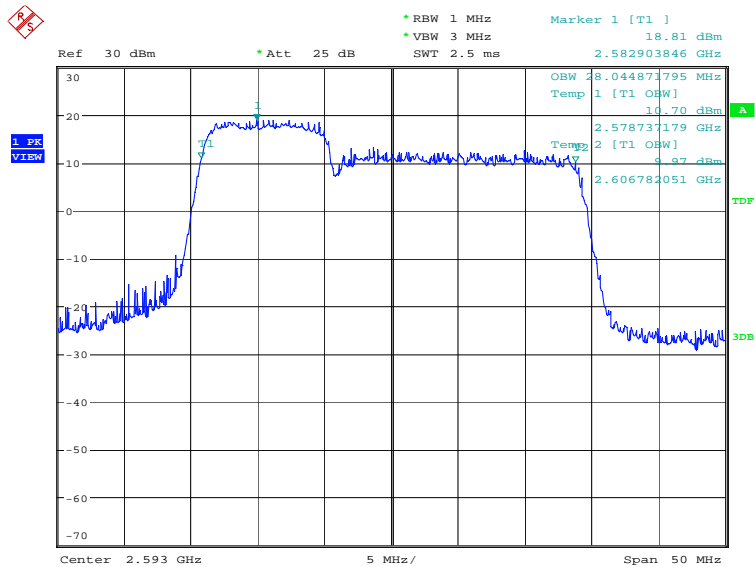


Date: 11.MAR.2021 14:48:55

LTE CA band 41 , 15MHz+10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	23557.69	23637.82

LTE CA band 41 , 15MHz+10MHz Bandwidth, QPSK (99% BW)

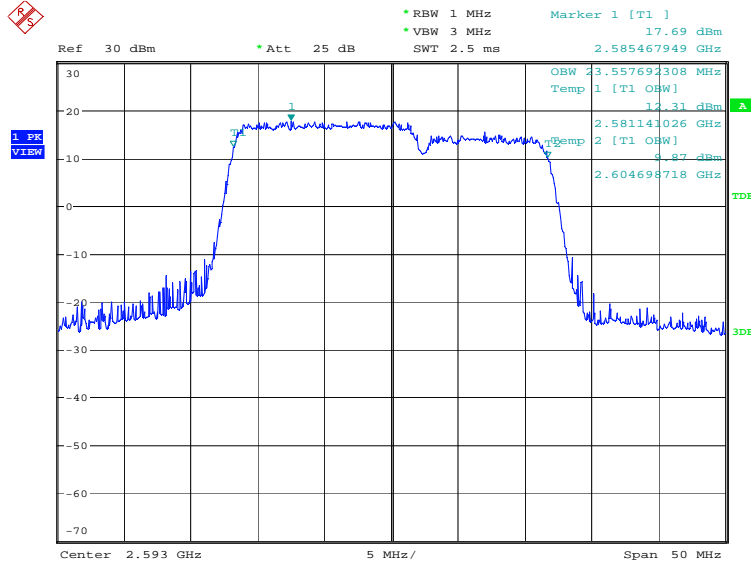

Date: 11.MAR.2021 14:37:31

LTE CA band 41 , 15MHz+10MHz Bandwidth,16QAM (99% BW)

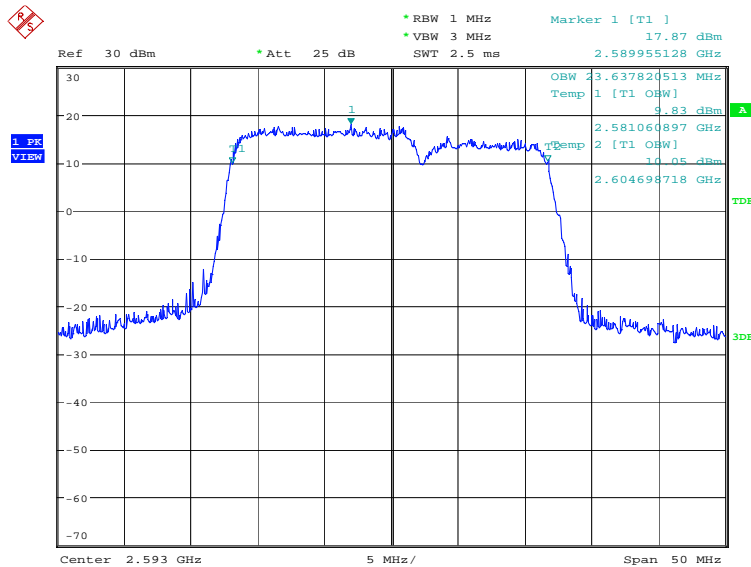


Date: 11.MAR.2021 14:38:51

LTE CA band 41 , 15MHz+15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	28685.90	28766.03

LTE CA band 41 , 15MHz+15MHz Bandwidth, QPSK (99% BW)

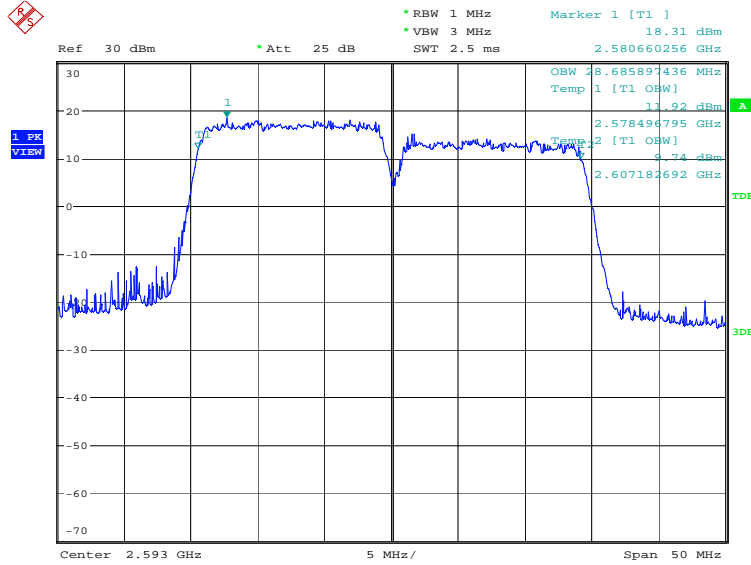

Date: 11.MAR.2021 14:51:26

LTE CA band 41 , 15MHz+15MHz Bandwidth,16QAM (99% BW)

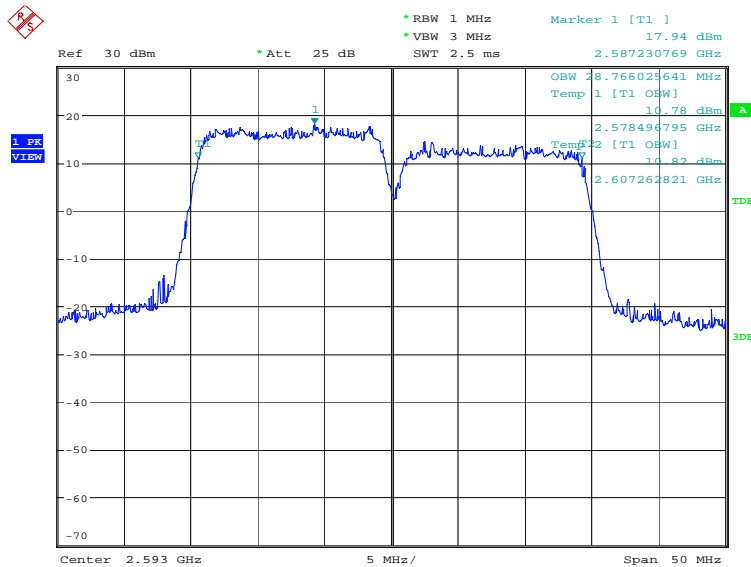


Date: 11.MAR.2021 14:52:36

LTE CA band 41 , 15MHz+20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	32772.44	32932.69

LTE CA band 41 , 15MHz+20MHz Bandwidth, QPSK (99% BW)

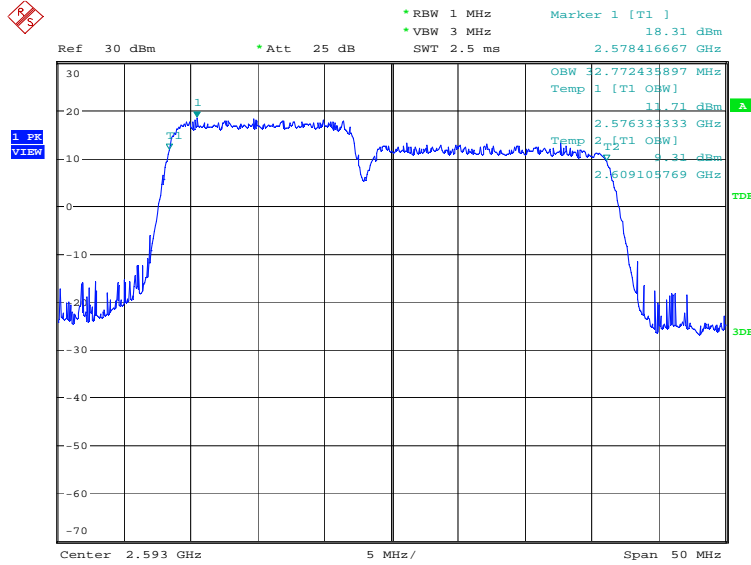

Date: 11.MAR.2021 14:55:53

LTE CA band 41 , 15MHz+20MHz Bandwidth,16QAM (99% BW)

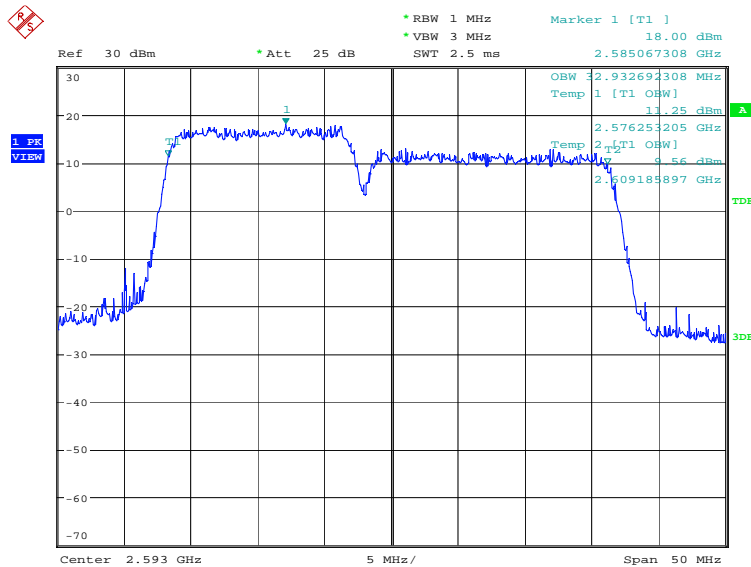


Date: 11.MAR.2021 14:58:09

LTE CA band 41 , 20MHz+5MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
	2593.0	QPSK
23477.56		23397.44

LTE CA band 41 , 20MHz+5MHz Bandwidth, QPSK (99% BW)

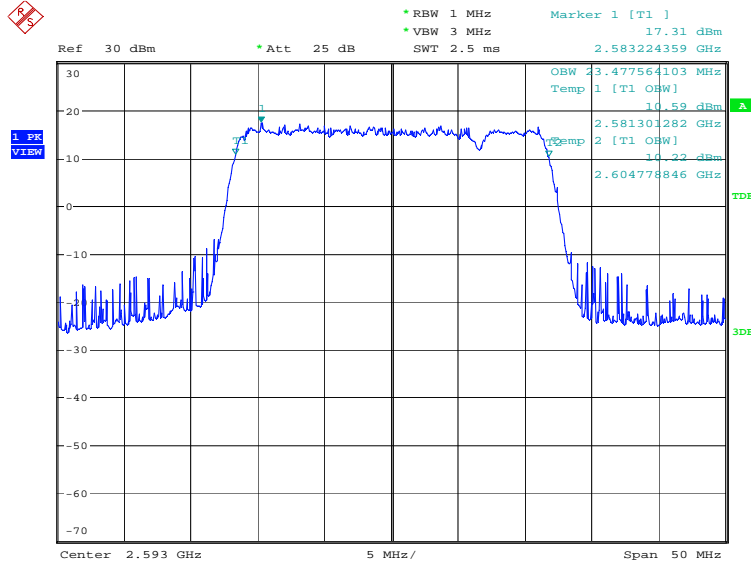

Date: 11.MAR.2021 14:25:28

LTE CA band 41 , 20MHz+5MHz Bandwidth,16QAM (99% BW)

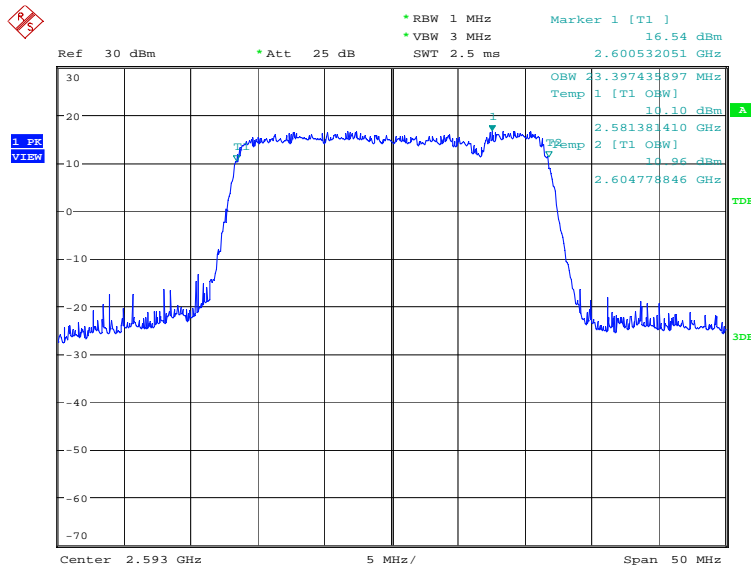


Date: 11.MAR.2021 14:27:54

LTE CA band 41 , 20MHz+10MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
2593.0	QPSK	16QAM
	28125.00	28044.87

LTE CA band 41 , 20MHz+10MHz Bandwidth, QPSK (99% BW)

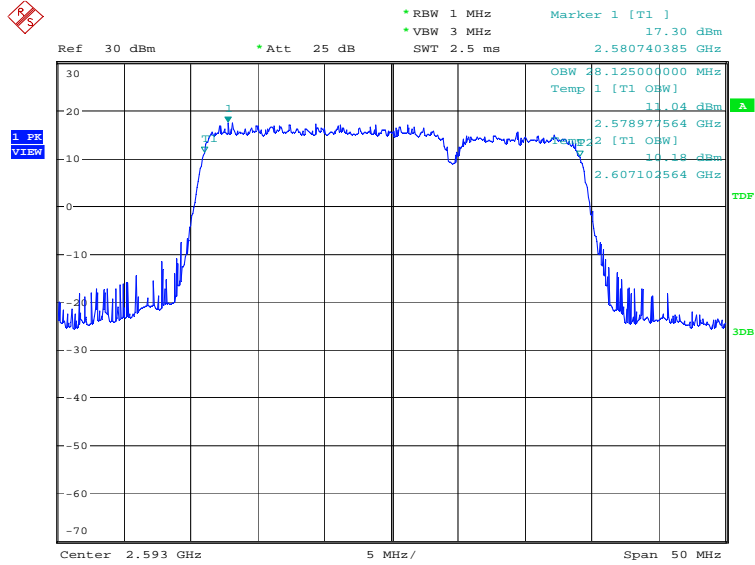

Date: 11.MAR.2021 15:17:02

LTE CA band 41 , 20MHz+10MHz Bandwidth,16QAM (99% BW)

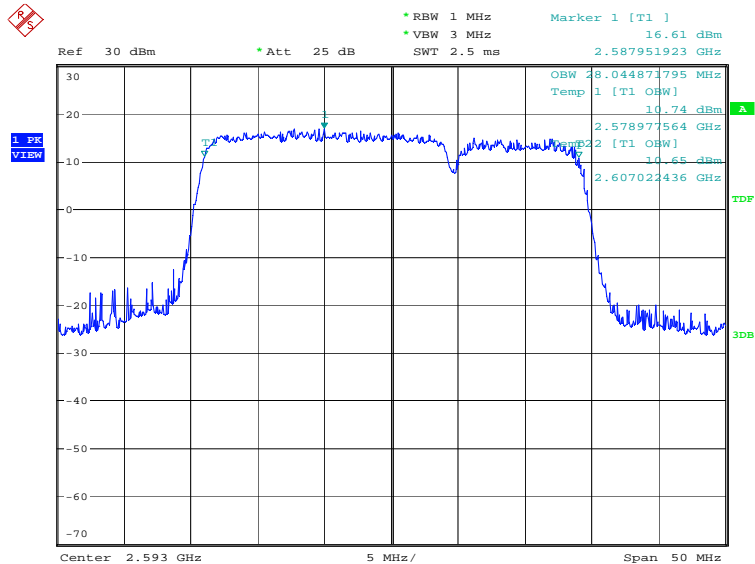


Date: 11.MAR.2021 15:18:29

LTE CA band 41 , 20MHz+15MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
	QPSK	16QAM
2593.0	32932.69	32852.56

LTE CA band 41 , 20MHz+15MHz Bandwidth, QPSK (99% BW)

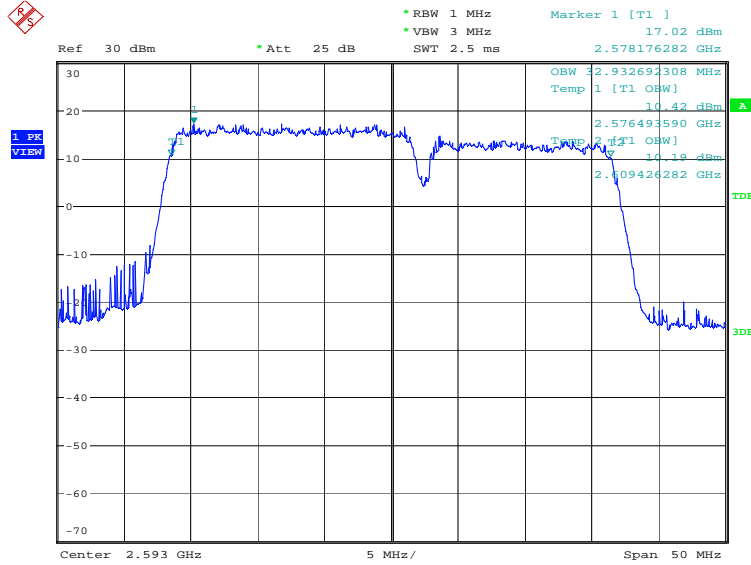

Date: 11.MAR.2021 15:01:37

LTE CA band 41 , 20MHz+15MHz Bandwidth,16QAM (99% BW)

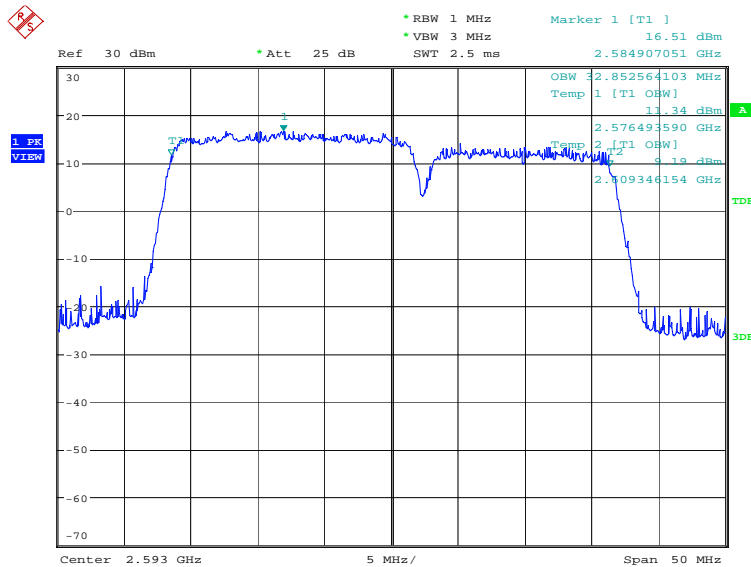


Date: 11.MAR.2021 15:03:23

LTE CA band 41 , 20MHz+20MHz (99%)


Frequency(MHz)	Occupied Bandwidth (99%)(KHz)	
	QPSK	16QAM
2593.0	37660.26	37660.26

LTE CA band 41 , 20MHz+20MHz Bandwidth, QPSK (99% BW)

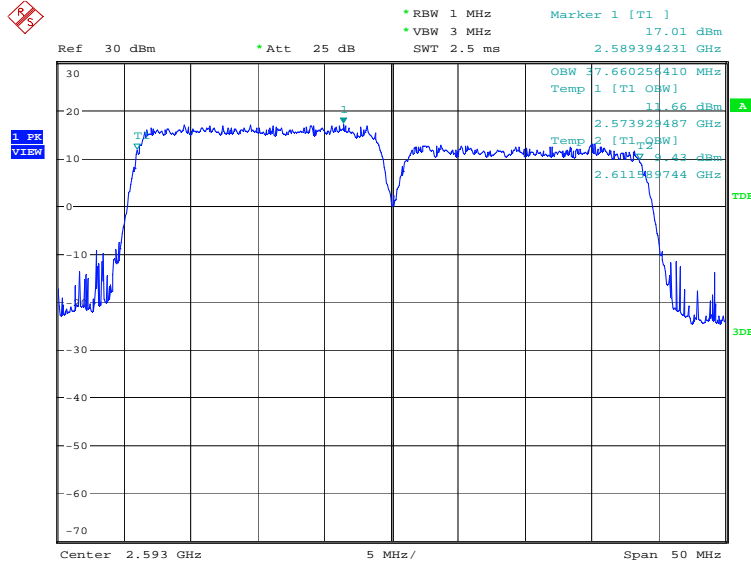

Date: 11.MAR.2021 15:06:30

LTE CA band 41 , 20MHz+20MHz Bandwidth,16QAM (99% BW)

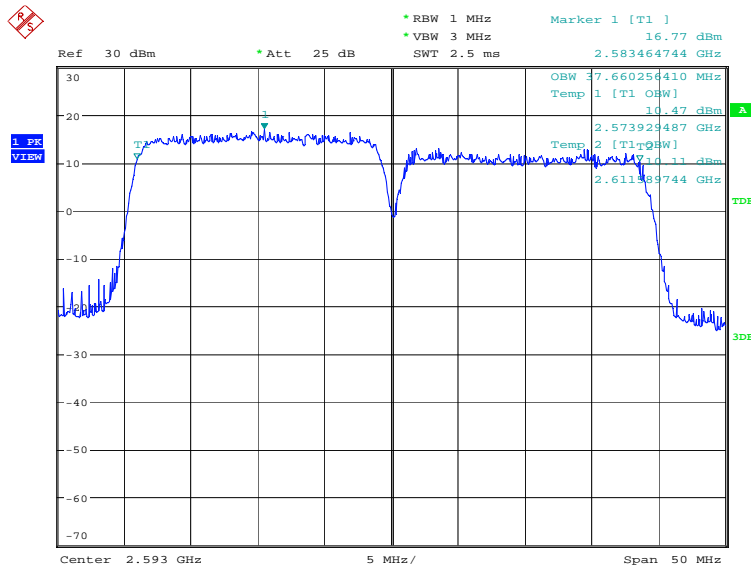

Date: 11.MAR.2021 15:08:25

A.5 Emission Bandwidth

The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power. Table below lists the measured -26dBc BW. Spectrum analyzer plots are included on the following pages.


The measurement method is from ANSI C63.26:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b) The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation.
- d) The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e) Set spectrum analyzer detection mode to peak, and the trace mode to max hold.

LTE band 2@CA_2A-12A, 5MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	4879.81	4879.81

LTE band 2@CA_2A-12A, 5MHz Bandwidth, QPSK (-26dBc BW)

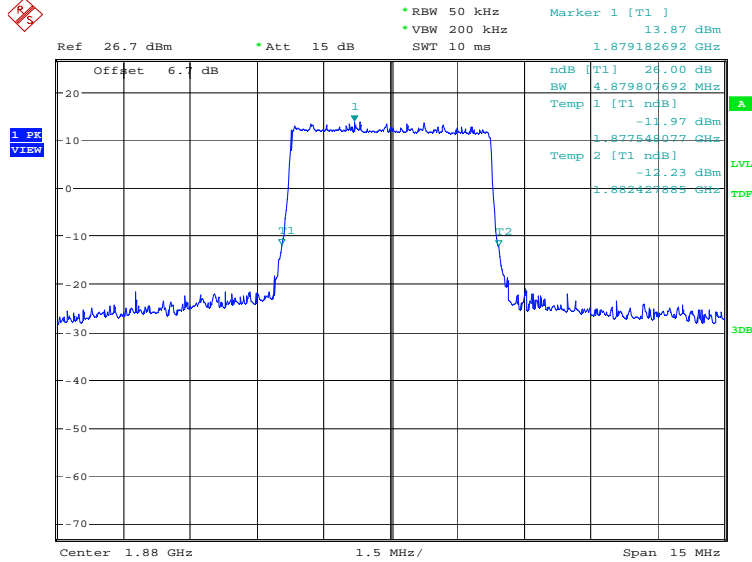

Date: 24.MAR.2021 13:25:01

LTE band 2@CA_2A-12A, 5MHz Bandwidth, 16QAM (-26dBc BW)

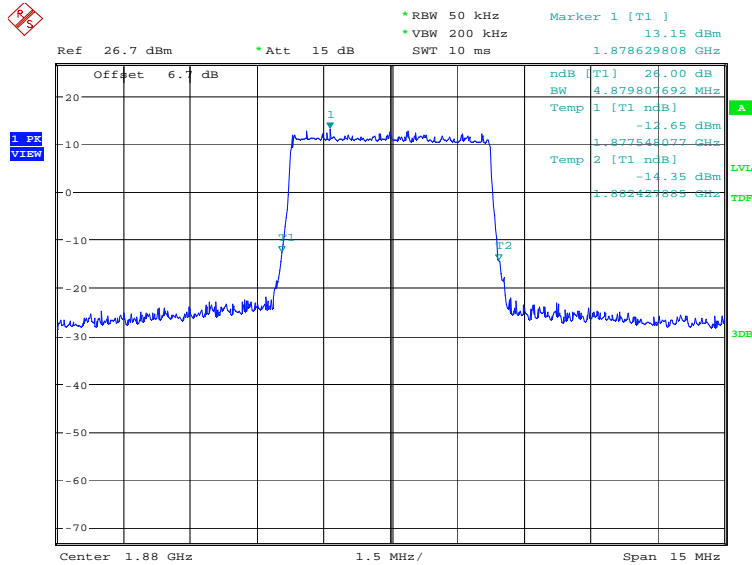


Date: 24.MAR.2021 13:25:40

LTE band 2@CA_2A-12A, 10MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	9663.46	9663.46

LTE band 2@CA_2A-12A, 10MHz Bandwidth, QPSK (-26dBc BW)

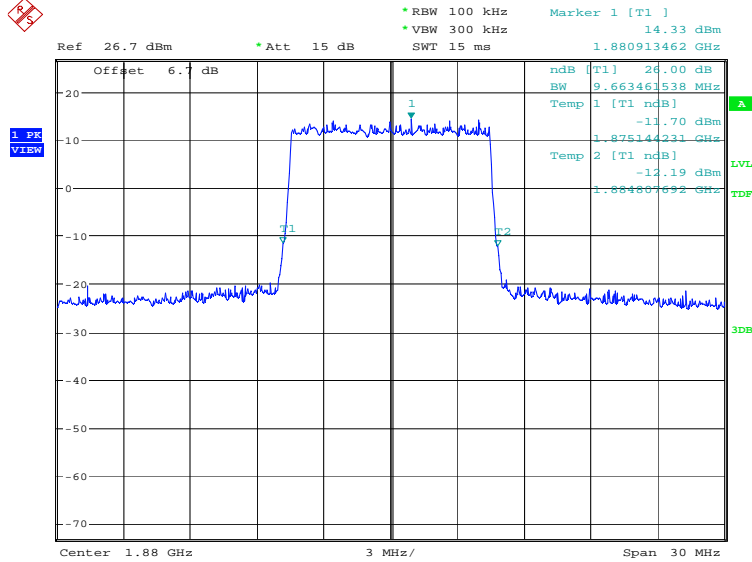

Date: 24.MAR.2021 13:27:09

LTE band 2@CA_2A-12A, 10MHz Bandwidth, 16QAM (-26dBc BW)

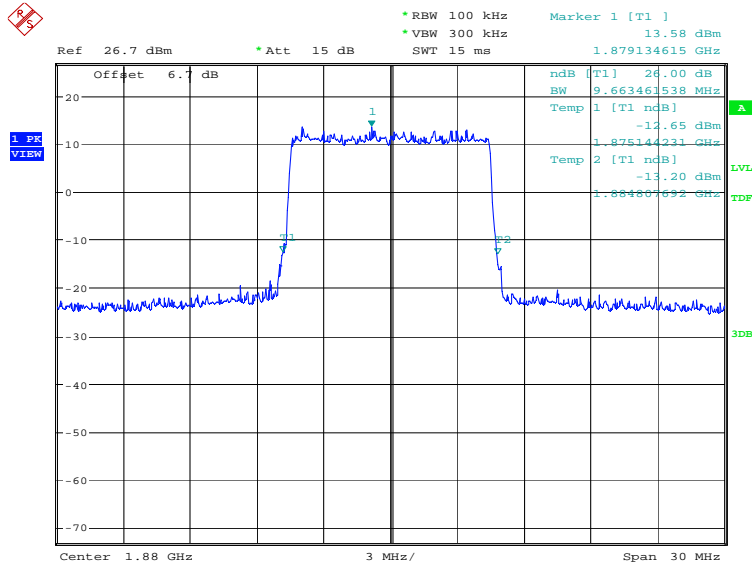


Date: 24.MAR.2021 13:27:49

LTE band 2@CA_2A-12A, 15MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
1880.0	QPSK	16QAM
	14639.42	14567.31

LTE band 2@CA_2A-12A, 15MHz Bandwidth, QPSK (-26dBc BW)

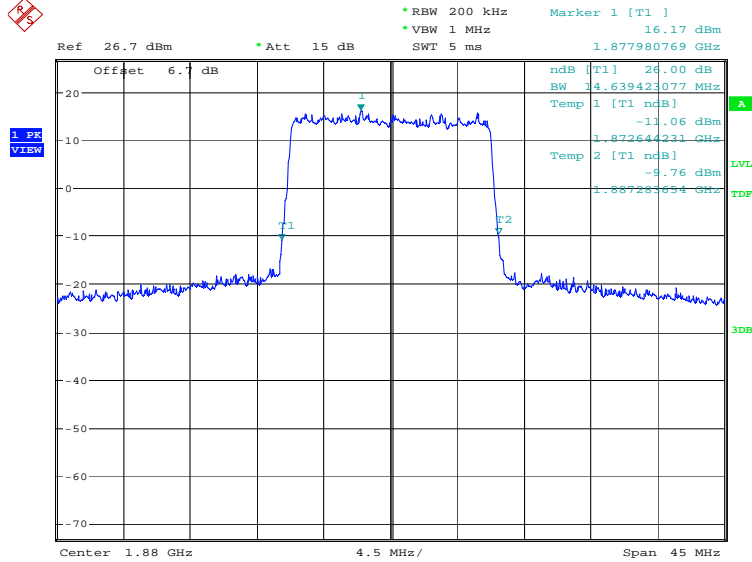

Date: 24.MAR.2021 13:29:17

LTE band 2@CA_2A-12A, 15MHz Bandwidth, 16QAM (-26dBc BW)

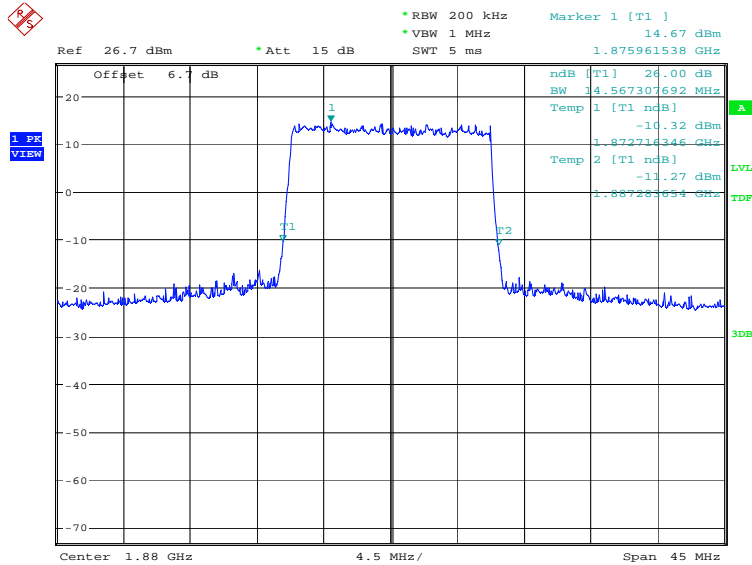


Date: 24.MAR.2021 13:29:57

LTE band 2@CA_2A-12A, 20MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
	1880.0	QPSK
	19134.62	19134.62

LTE band 2@CA_2A-12A, 20MHz Bandwidth, QPSK (-26dBc BW)

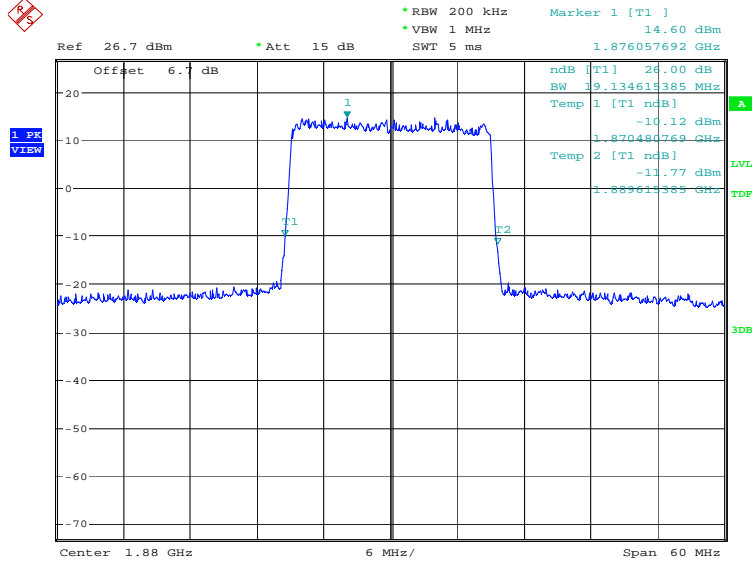

Date: 24.MAR.2021 13:31:26

LTE band 2@CA_2A-12A, 20MHz Bandwidth, 16QAM (-26dBc BW)

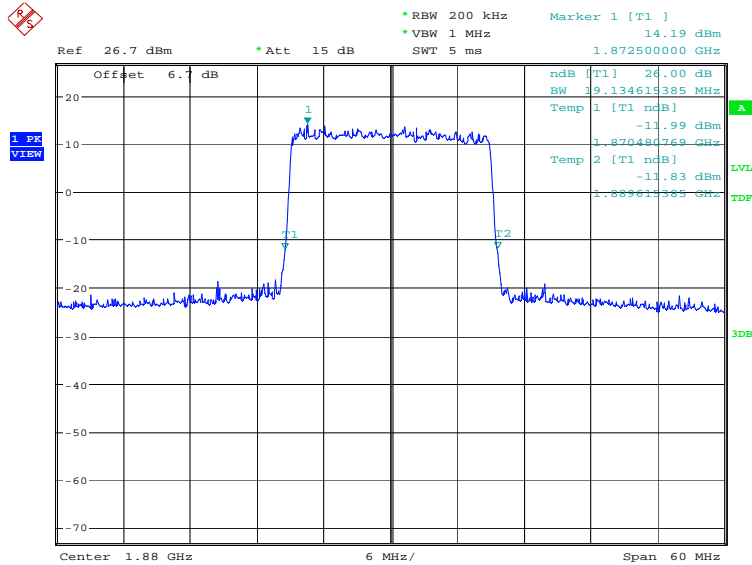


Date: 24.MAR.2021 13:32:05

LTE band 12@CA_2A-12A, 3MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	2884.62	2916.67

LTE band 12@CA_2A-12A, 3MHz Bandwidth, QPSK (-26dBc BW)

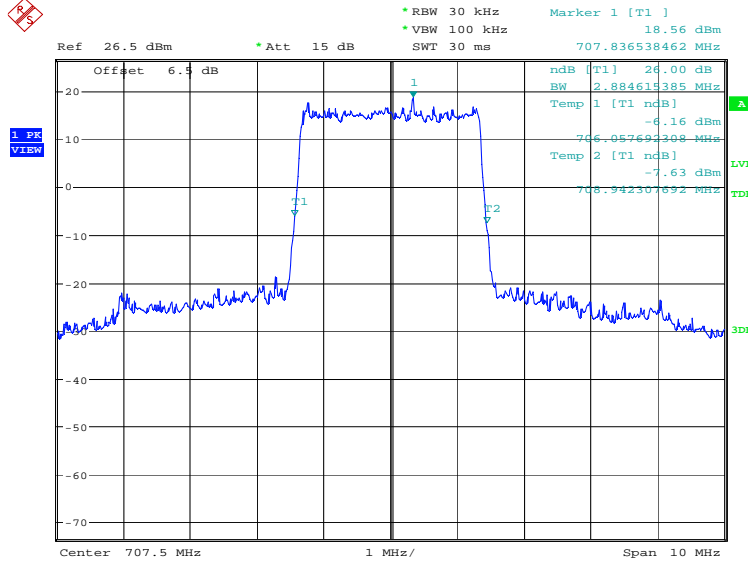

Date: 24.MAR.2021 10:11:41

LTE band 12@CA_2A-12A, 3MHz Bandwidth, 16QAM (-26dBc BW)

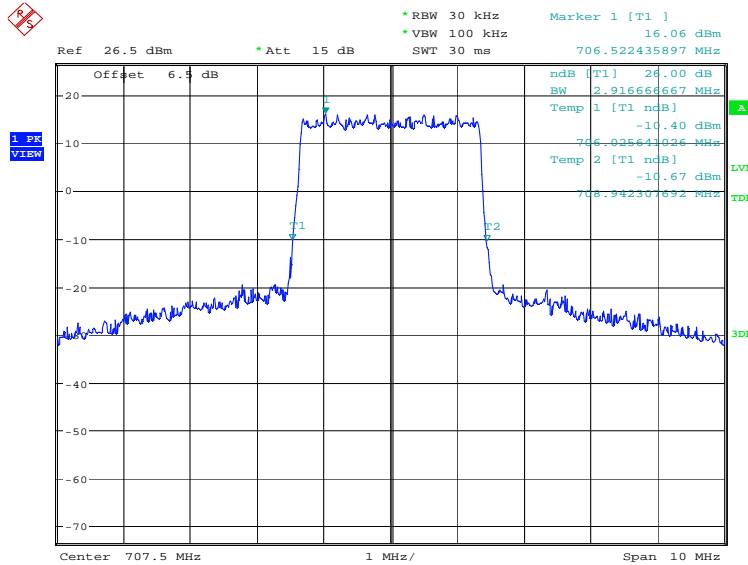


Date: 24.MAR.2021 10:12:21

LTE band 12@CA_2A-12A, 5MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	4879.81	4903.85

LTE band 12@CA_2A-12A, 5MHz Bandwidth, QPSK (-26dBc BW)

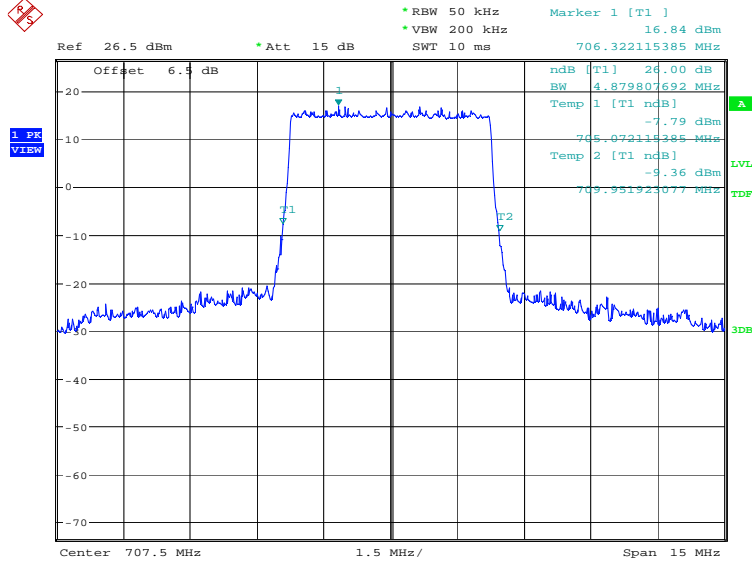

Date: 24.MAR.2021 10:13:50

LTE band 12@CA_2A-12A, 5MHz Bandwidth, 16QAM (-26dBc BW)

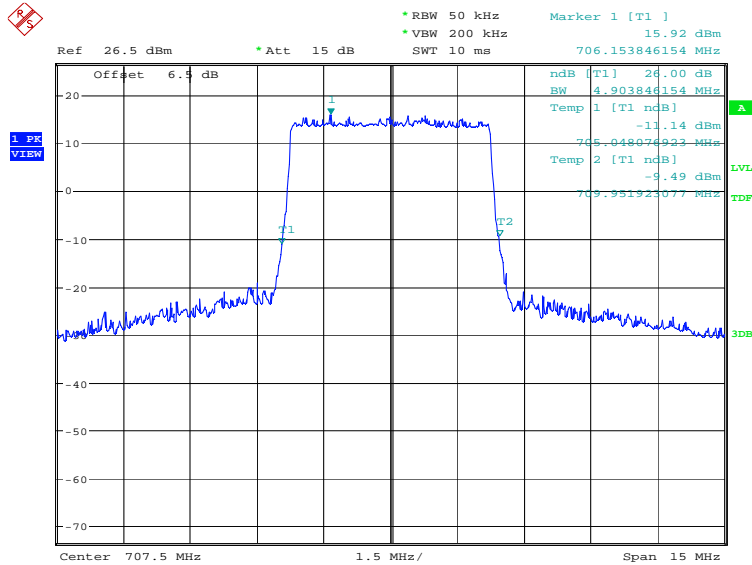


Date: 24.MAR.2021 10:14:30

LTE band 12@CA_2A-12A, 10MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	9663.46	9663.46

LTE band 12@CA_2A-12A, 10MHz Bandwidth, QPSK (-26dBc BW)

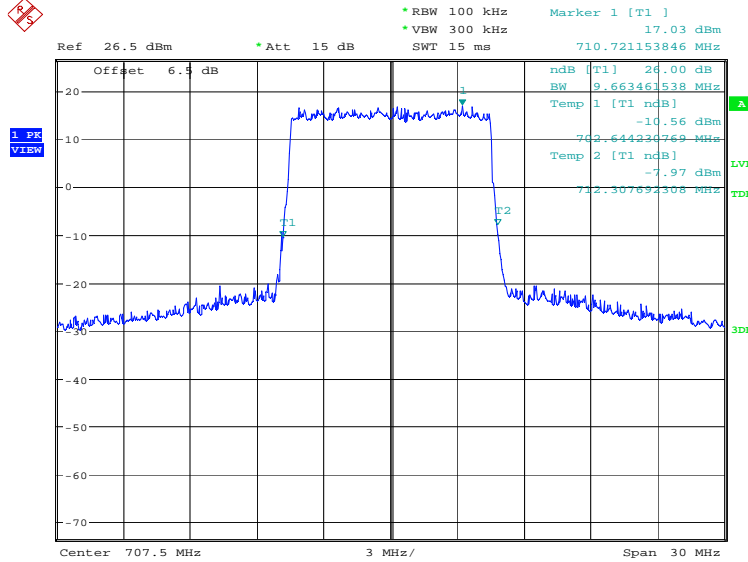

Date: 24.MAR.2021 10:15:59

LTE band 12@CA_2A-12A, 10MHz Bandwidth, 16QAM (-26dBc BW)

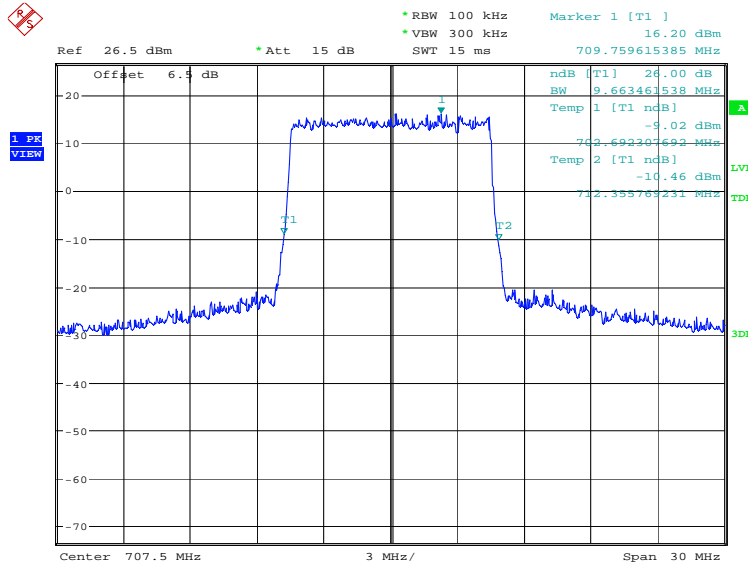


Date: 24.MAR.2021 10:16:38

LTE band 12@CA_12A-66A, 3MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	2900.64	2900.64

LTE band 12@CA_12A-66A, 3MHz Bandwidth, QPSK (-26dBc BW)

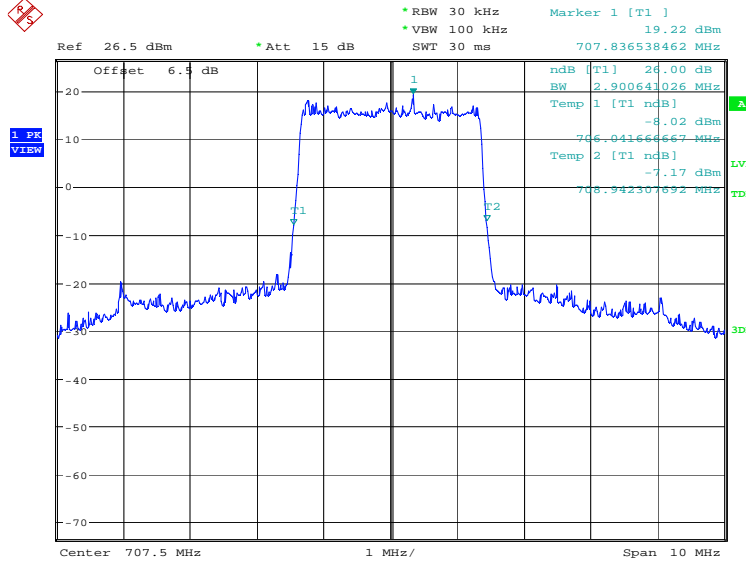

Date: 24.MAR.2021 14:44:28

LTE band 12@CA_12A-66A, 3MHz Bandwidth, 16QAM (-26dBc BW)

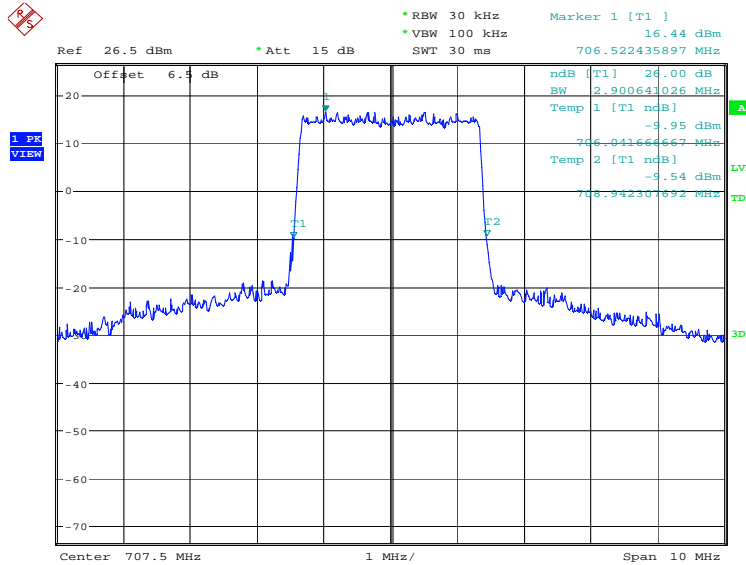


Date: 24.MAR.2021 14:45:07

LTE band 12@CA_12A-66A, 5MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	4855.77	4855.77

LTE band 12@CA_12A-66A, 5MHz Bandwidth, QPSK (-26dBc BW)

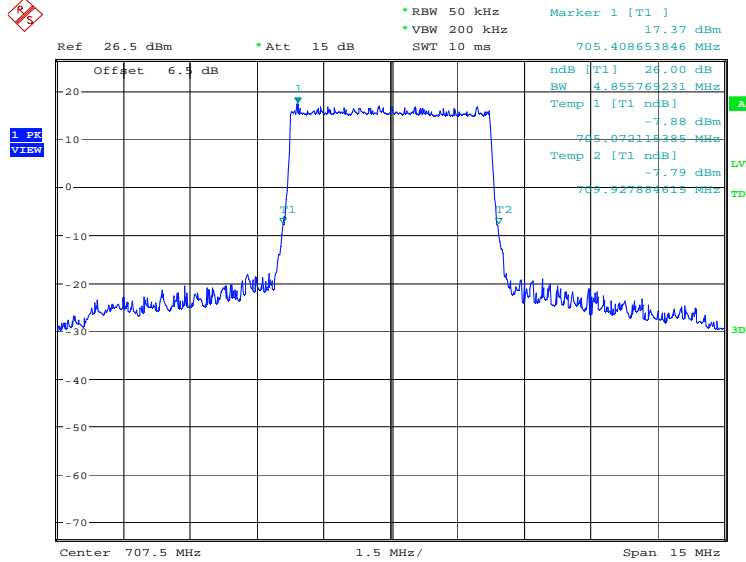

Date: 24.MAR.2021 14:46:35

LTE band 12@CA_12A-66A, 5MHz Bandwidth, 16QAM (-26dBc BW)

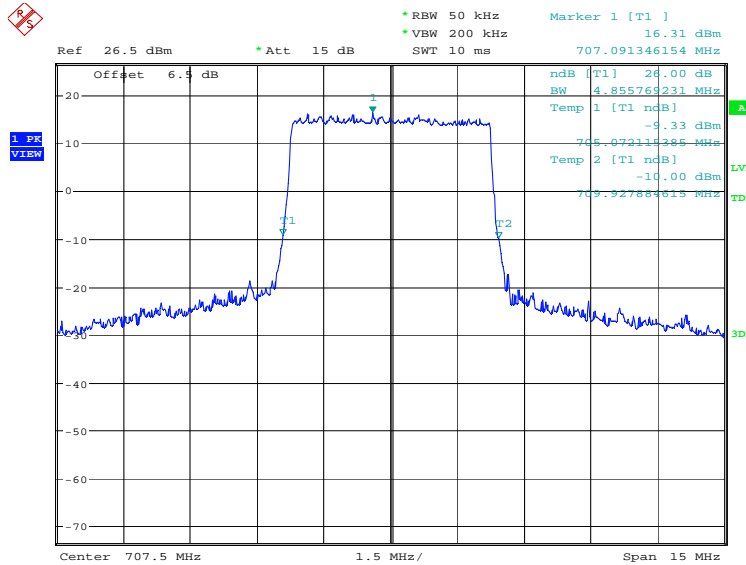


Date: 24.MAR.2021 14:47:14

LTE band 12@CA_12A-66A, 10MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
707.5	QPSK	16QAM
	9615.38	9663.46

LTE band 12@CA_12A-66A, 10MHz Bandwidth, QPSK (-26dBc BW)

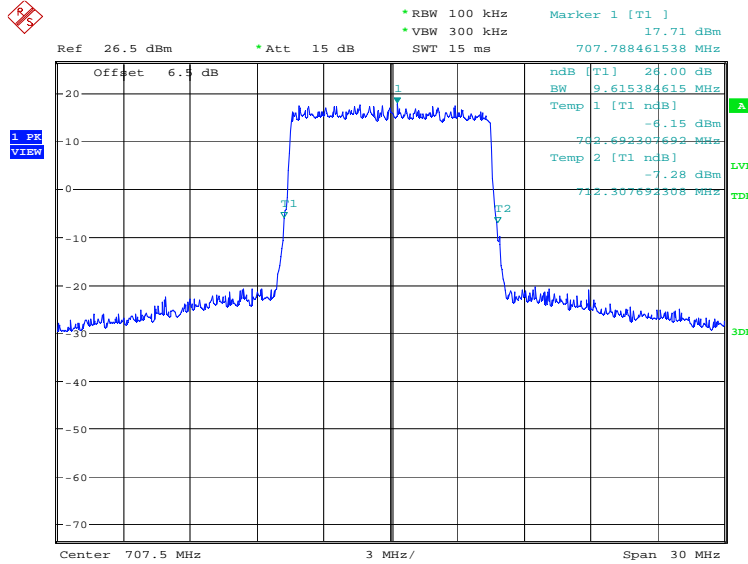

Date: 24.MAR.2021 14:48:43

LTE band 12@CA_12A-66A, 10MHz Bandwidth, 16QAM (-26dBc BW)

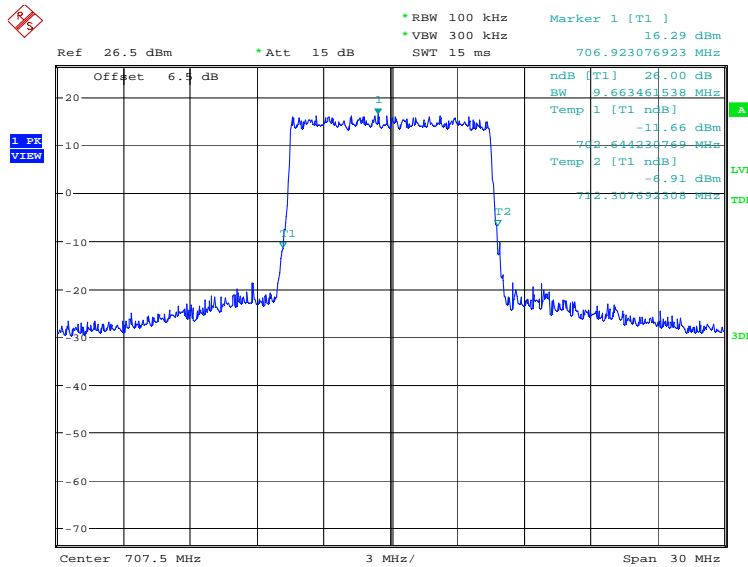


Date: 24.MAR.2021 14:49:22

LTE band 66@CA_12A-66A, 1.4MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
	1745.0	QPSK
	1274.04	1290.06

LTE band 66@CA_12A-66A, 1.4MHz Bandwidth, QPSK (-26dBc BW)

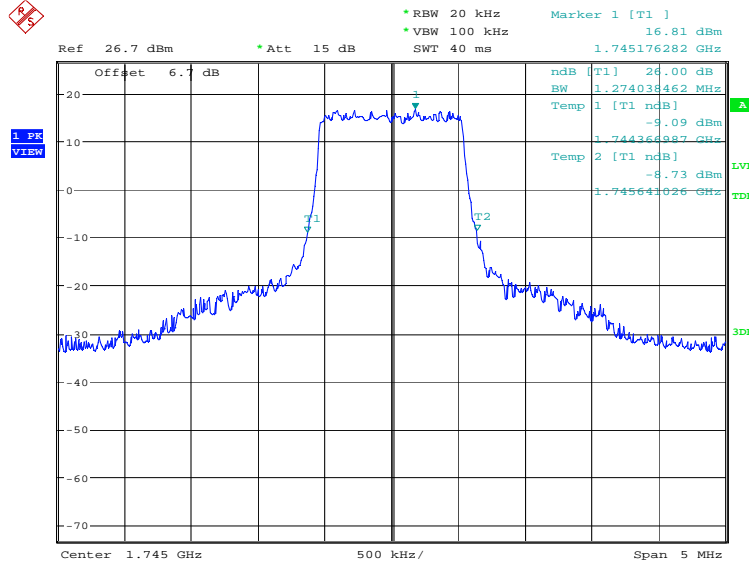

Date: 24.MAR.2021 14:18:08

LTE band 66@CA_12A-66A, 1.4MHz Bandwidth, 16QAM (-26dBc BW)

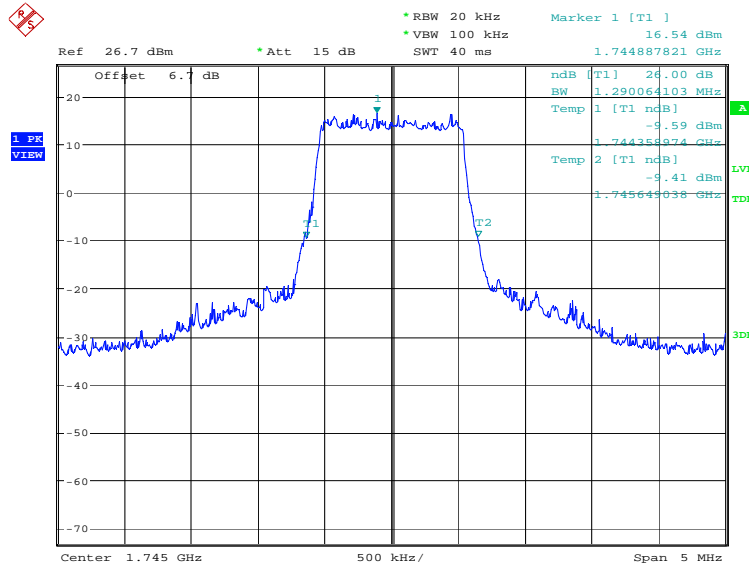


Date: 24.MAR.2021 14:18:47

LTE band 66@CA_12A-66A, 5MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
	1745.0	QPSK
4855.77		4831.73

LTE band 66@CA_12A-66A, 5MHz Bandwidth, QPSK (-26dBc BW)

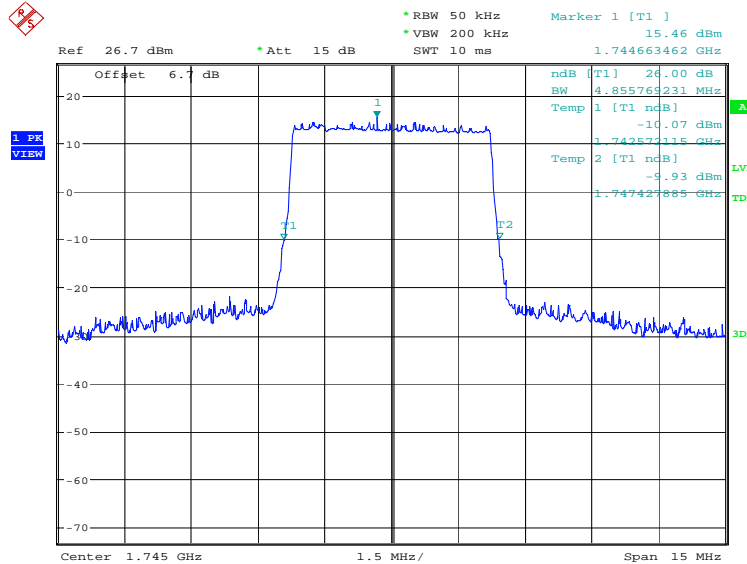

Date: 24.MAR.2021 14:20:15

LTE band 66@CA_12A-66A, 5MHz Bandwidth, 16QAM (-26dBc BW)

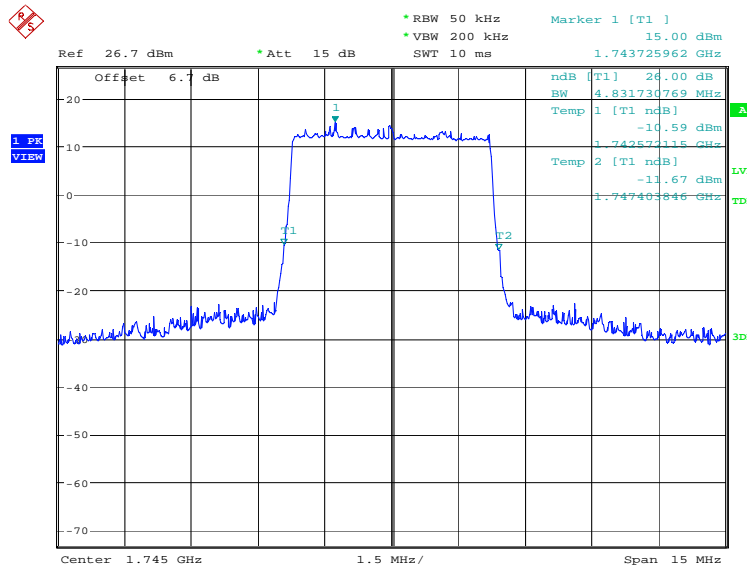


Date: 24.MAR.2021 14:20:54

LTE band 66@CA_12A-66A, 10MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
1745.0	QPSK	16QAM
	9567.31	9567.31

LTE band 66@CA_12A-66A, 10MHz Bandwidth, QPSK (-26dBc BW)

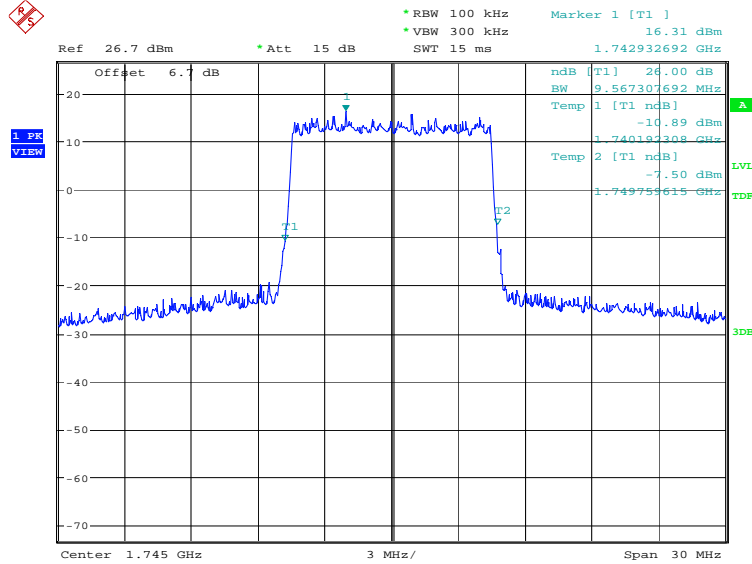

Date: 24.MAR.2021 14:22:23

LTE band 66@CA_12A-66A, 10MHz Bandwidth, 16QAM (-26dBc BW)

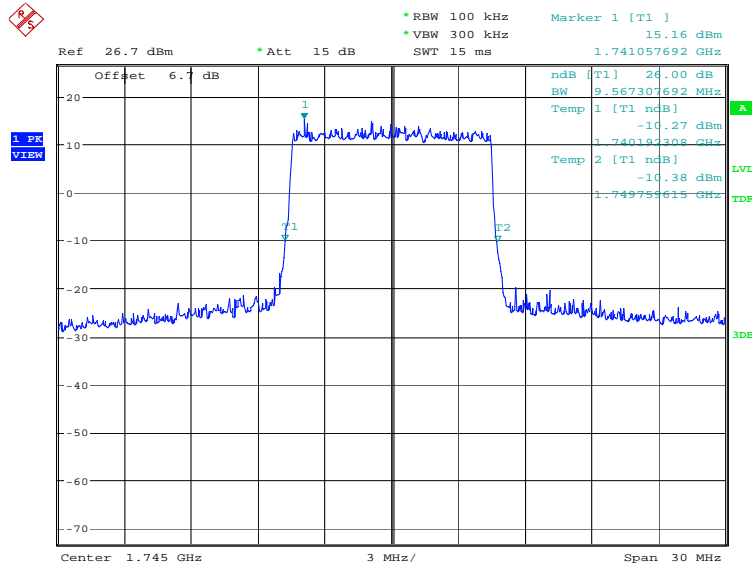


Date: 24.MAR.2021 14:23:02

LTE band 66@CA_12A-66A, 15MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
	1745.0	QPSK
	14639.42	14711.54

LTE band 66@CA_12A-66A, 15MHz Bandwidth, QPSK (-26dBc BW)

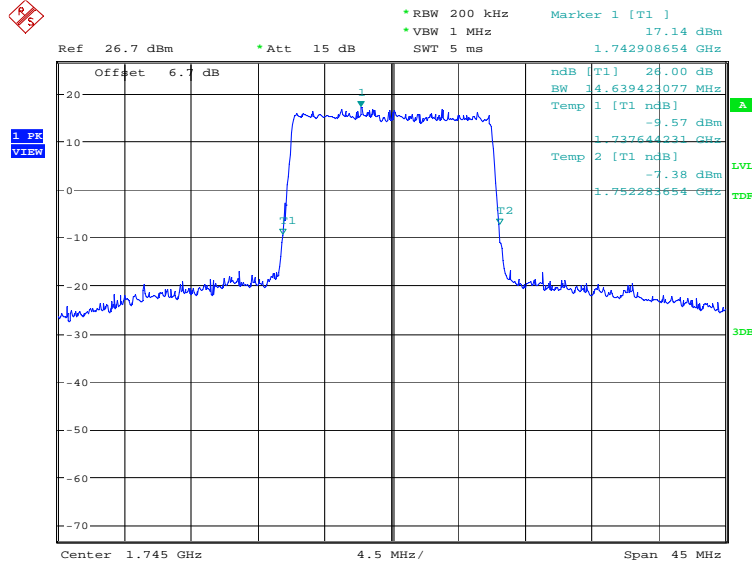

Date: 24.MAR.2021 14:24:30


LTE band 66@CA_12A-66A, 15MHz Bandwidth, 16QAM (-26dBc BW)

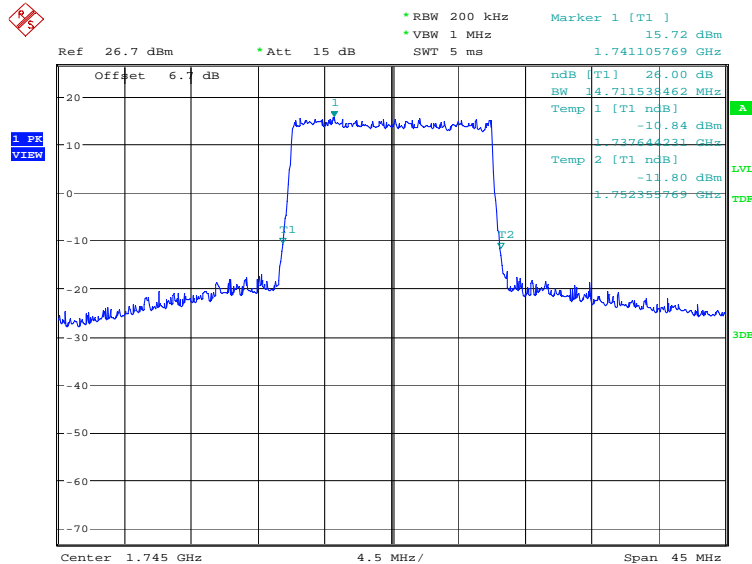


Date: 24.MAR.2021 14:25:09

LTE band 66@CA_12A-66A, 20MHz (-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(kHz)	
	1745.0	QPSK
	19230.77	19230.77

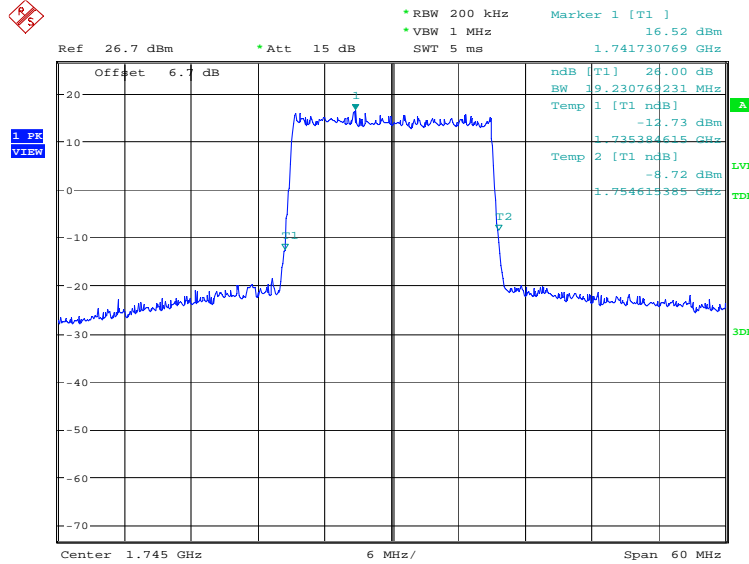LTE band 66@CA_12A-66A, 20MHz Bandwidth, QPSK (-26dBc BW)


Date: 24.MAR.2021 14:26:38

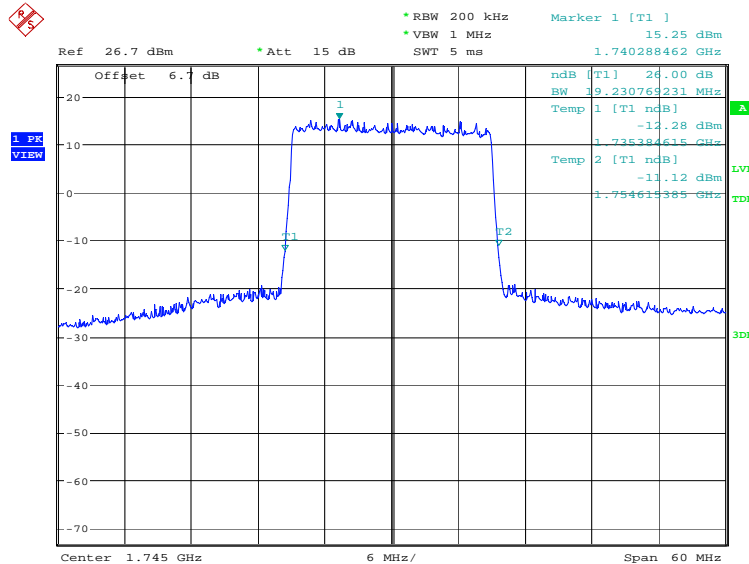
LTE band 66@CA_12A-66A, 20MHz Bandwidth, 16QAM (-26dBc BW)


Date: 24.MAR.2021 14:27:17

LTE CA band 41 , 5MHz+20MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
2593.0	QPSK	16QAM
	25721.15	25801.28

LTE CA band 41 , 5MHz+20MHz Bandwidth, QPSK (-26dBc BW)

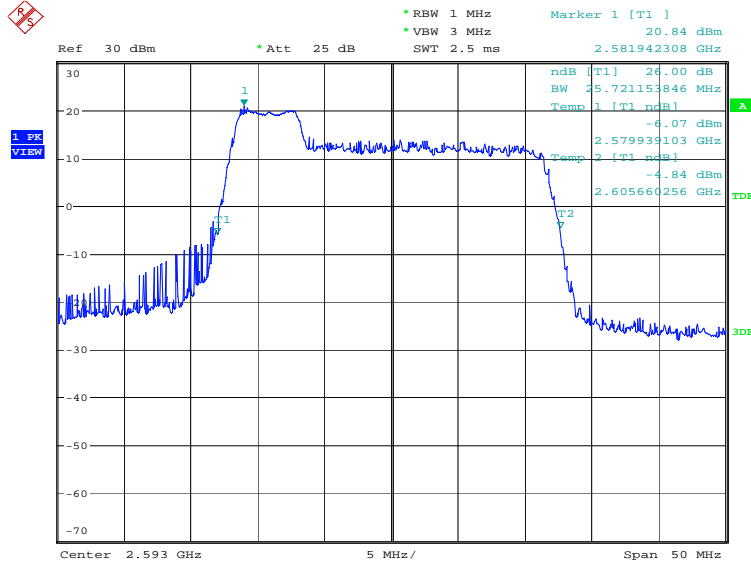

Date: 11.MAR.2021 14:20:49

LTE CA band 41 , 5MHz+20MHz Bandwidth,16QAM (-26dBc BW)

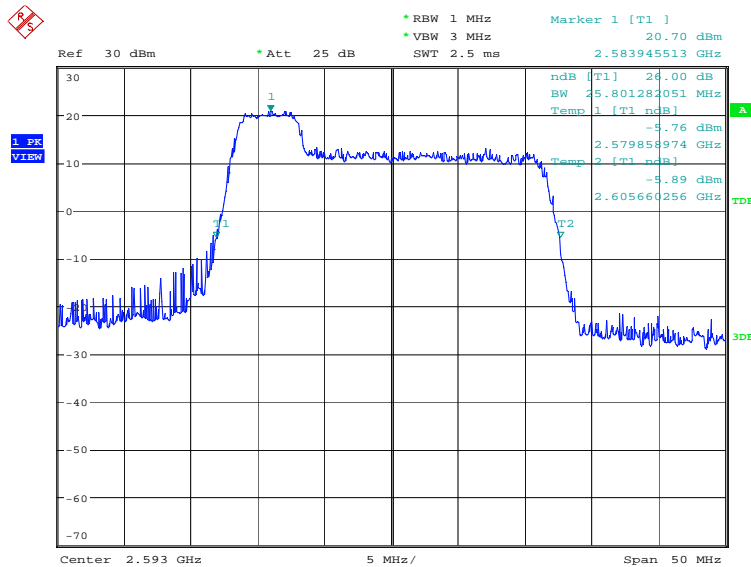


Date: 11.MAR.2021 14:23:08

LTE CA band 41 , 10MHz+20MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
2593.0	QPSK	16QAM
	30689.10	30528.85

LTE CA band 41 , 10MHz+20MHz Bandwidth, QPSK (-26dBc BW)

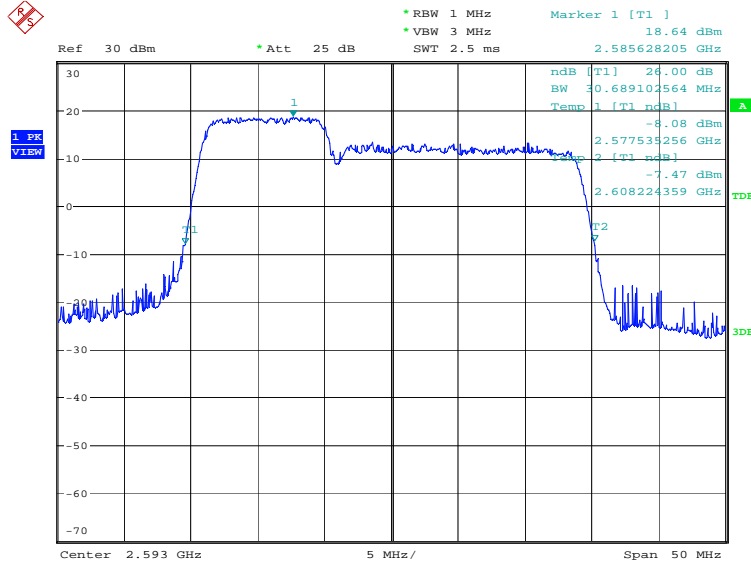

Date: 11.MAR.2021 14:47:47

LTE CA band 41 , 10MHz+20MHz Bandwidth,16QAM (-26dBc BW)

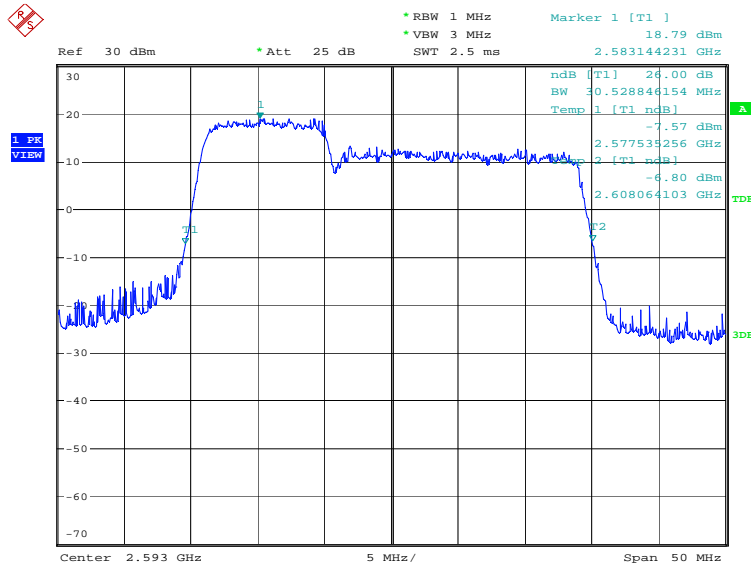


Date: 11.MAR.2021 14:49:10

LTE CA band 41 , 15MHz+10MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
2593.0	QPSK	16QAM
	26201.92	26201.92

LTE CA band 41 , 15MHz+10MHz Bandwidth, QPSK (-26dBc BW)

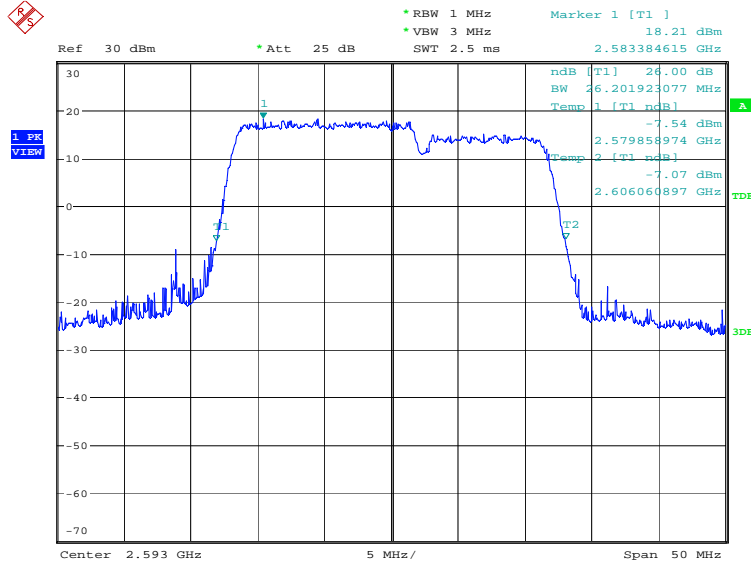

Date: 11.MAR.2021 14:37:52

LTE CA band 41 , 15MHz+10MHz Bandwidth,16QAM (-26dBc BW)

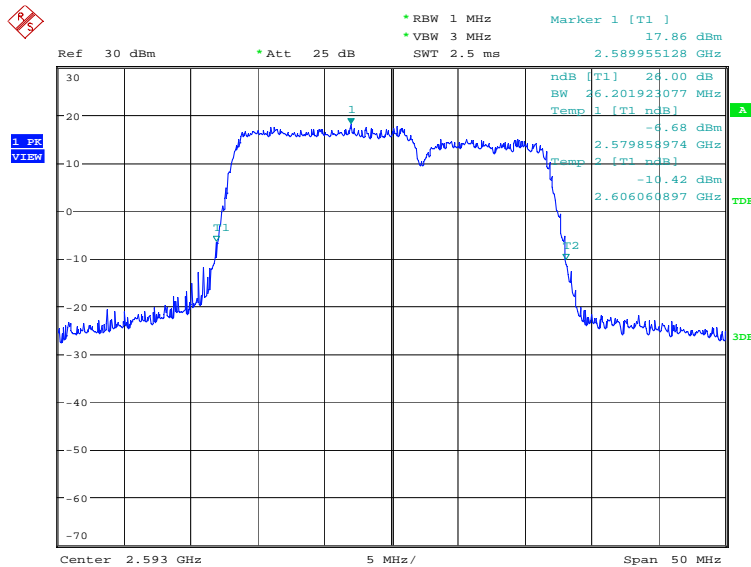


Date: 11.MAR.2021 14:39:07

LTE CA band 41 , 15MHz+15MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
2593.0	QPSK	16QAM
	31330.13	31330.13

LTE CA band 41 , 15MHz+15MHz Bandwidth, QPSK (-26dBc BW)

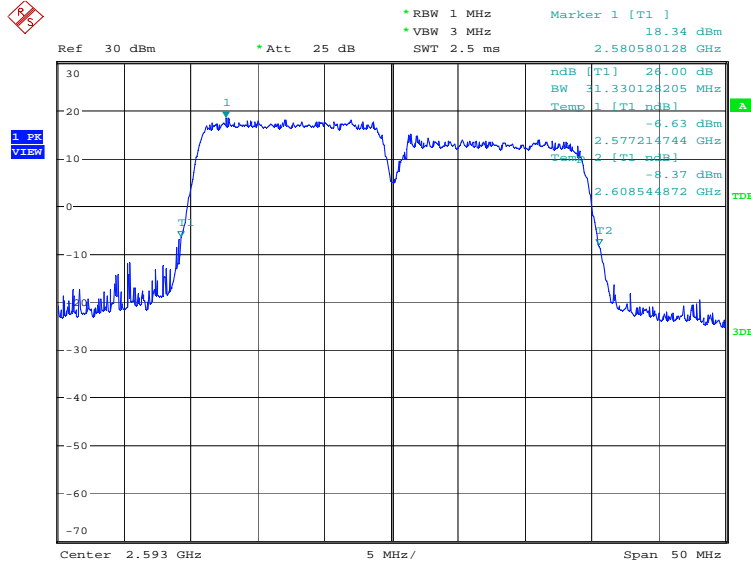

Date: 11.MAR.2021 14:51:44

LTE CA band 41 , 15MHz+15MHz Bandwidth,16QAM (-26dBc BW)

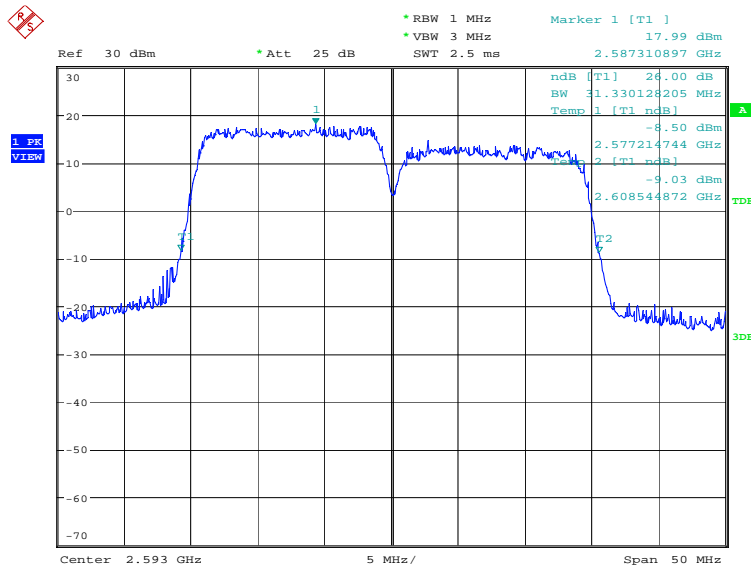


Date: 11.MAR.2021 14:52:51

LTE CA band 41 , 15MHz+20MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
2593.0	QPSK	16QAM
	35576.92	35576.92

LTE CA band 41 , 15MHz+20MHz Bandwidth, QPSK (-26dBc BW)

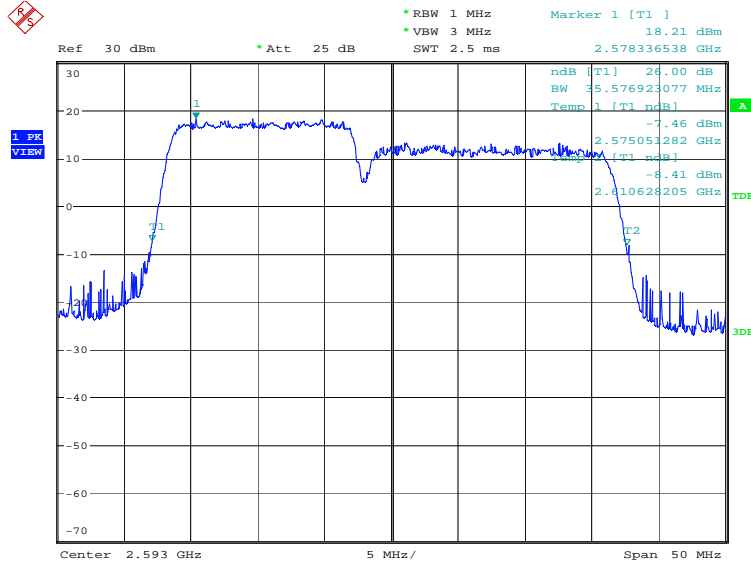

Date: 11.MAR.2021 14:56:08


LTE CA band 41 , 15MHz+20MHz Bandwidth,16QAM (-26dBc BW)

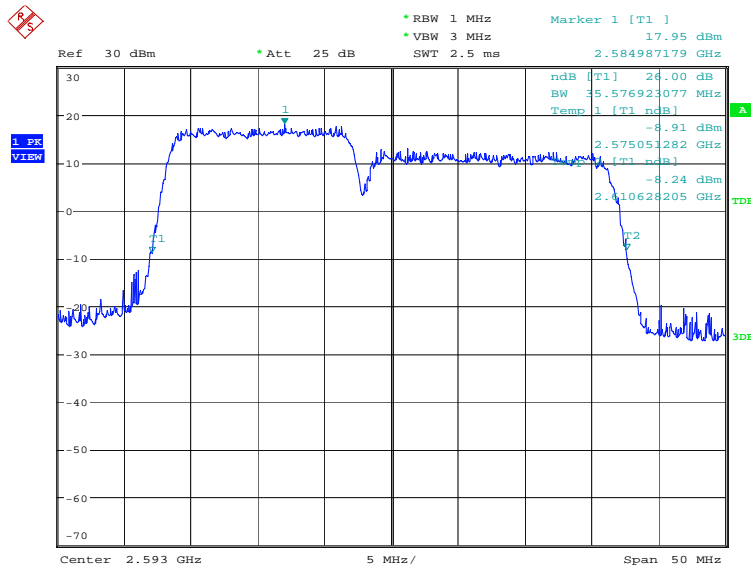


Date: 11.MAR.2021 14:58:26

LTE CA band 41 , 20MHz+5MHz (-26dBc)

Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
2593.0	QPSK	16QAM
	26121.79	26121.79

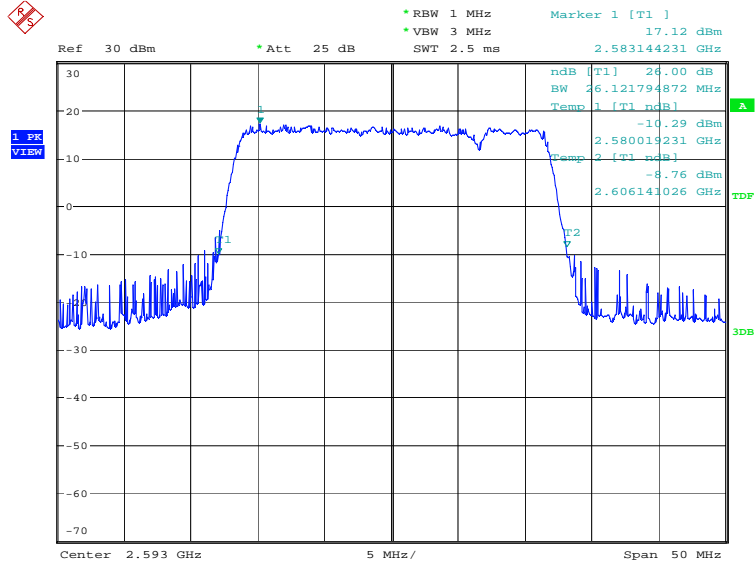LTE CA band 41 , 20MHz+5MHz Bandwidth, QPSK (-26dBc BW)


Date: 11.MAR.2021 14:26:10

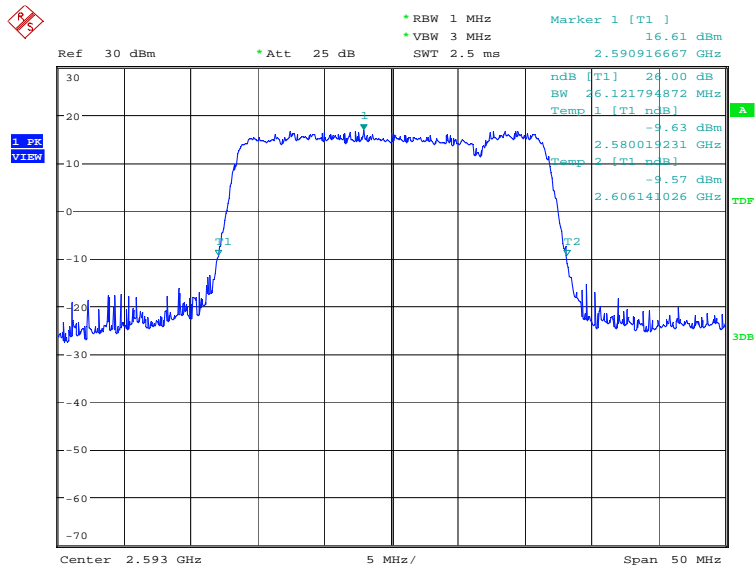
LTE CA band 41 , 20MHz+5MHz Bandwidth,16QAM (-26dBc BW)


Date: 11.MAR.2021 14:28:10

LTE CA band 41 , 20MHz+10MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
	2593.0	QPSK
	30849.36	30849.36

LTE CA band 41 , 20MHz+10MHz Bandwidth, QPSK (-26dBc BW)

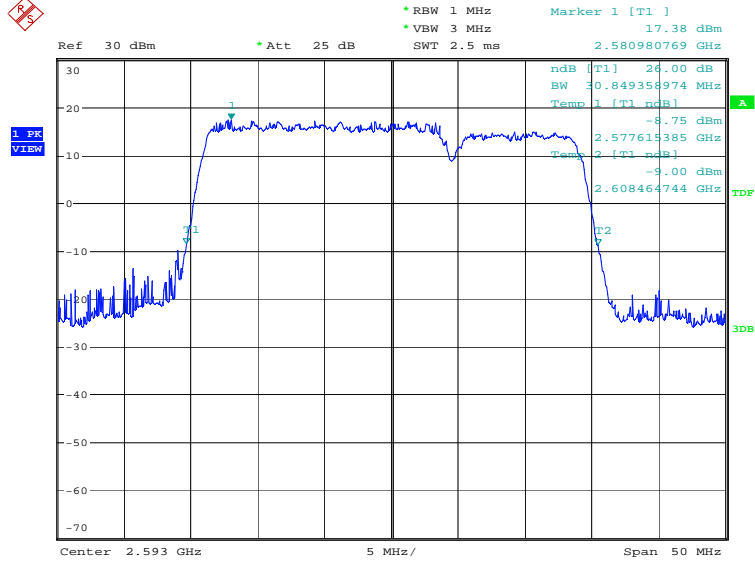

Date: 11.MAR.2021 15:17:22

LTE CA band 41 , 20MHz+10MHz Bandwidth,16QAM (-26dBc BW)

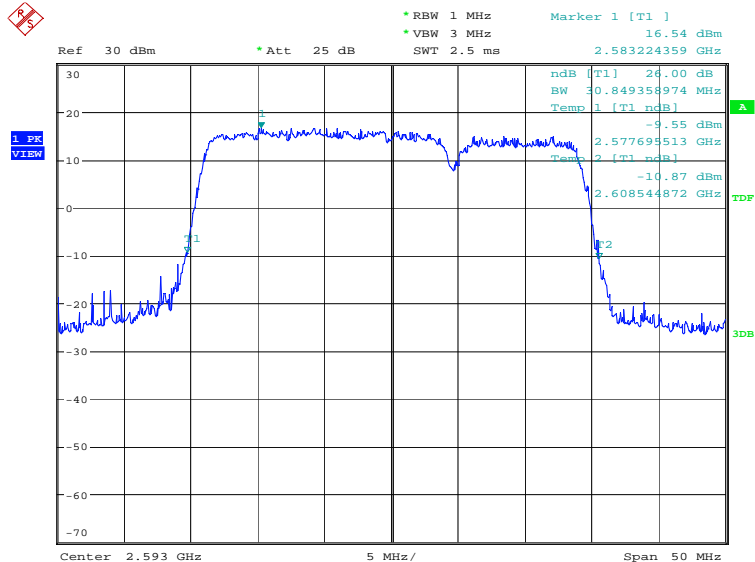


Date: 11.MAR.2021 15:18:45

LTE CA band 41 , 20MHz+15MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
2593.0	QPSK	16QAM
	35657.05	35657.05

LTE CA band 41 , 20MHz+15MHz Bandwidth, QPSK (-26dBc BW)

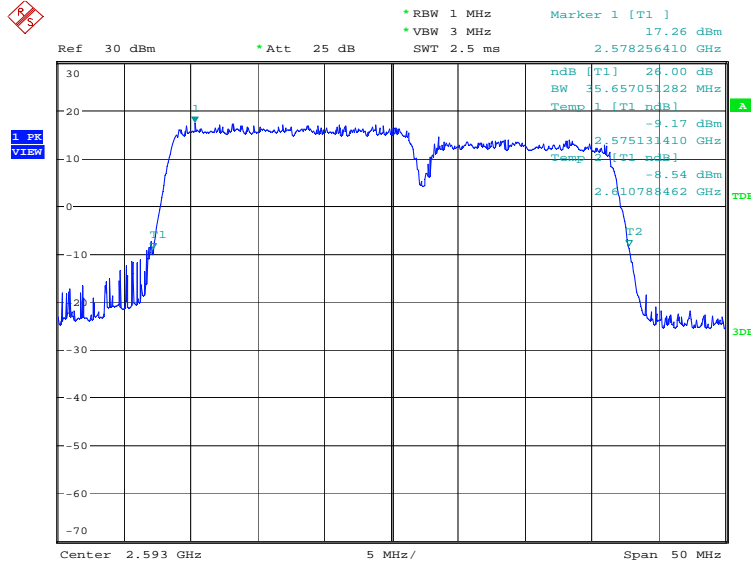

Date: 11.MAR.2021 15:01:54

LTE CA band 41 , 20MHz+15MHz Bandwidth,16QAM (-26dBc BW)

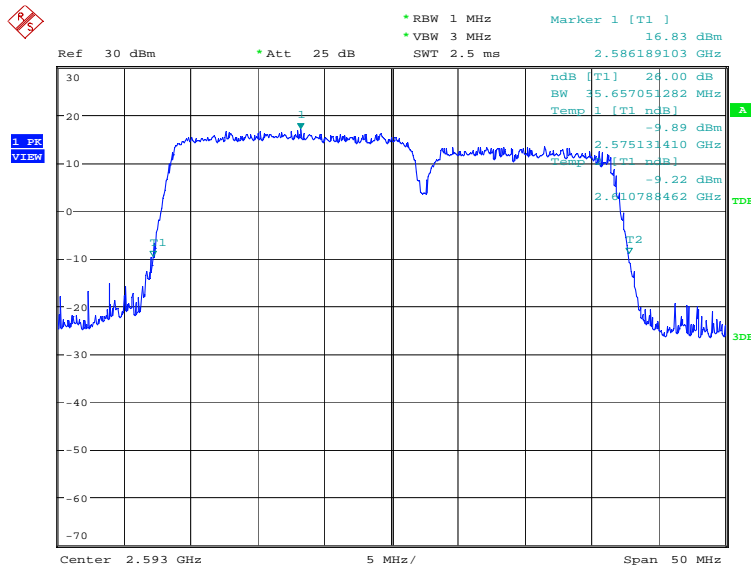


Date: 11.MAR.2021 15:03:38

LTE CA band 41 , 20MHz+20MHz (-26dBc)


Frequency(MHz)	Emission Bandwidth (-26dBc)(MHz)	
2593.0	QPSK	16QAM
	40544.87	40464.74

LTE CA band 41 , 20MHz+20MHz Bandwidth, QPSK (-26dBc BW)

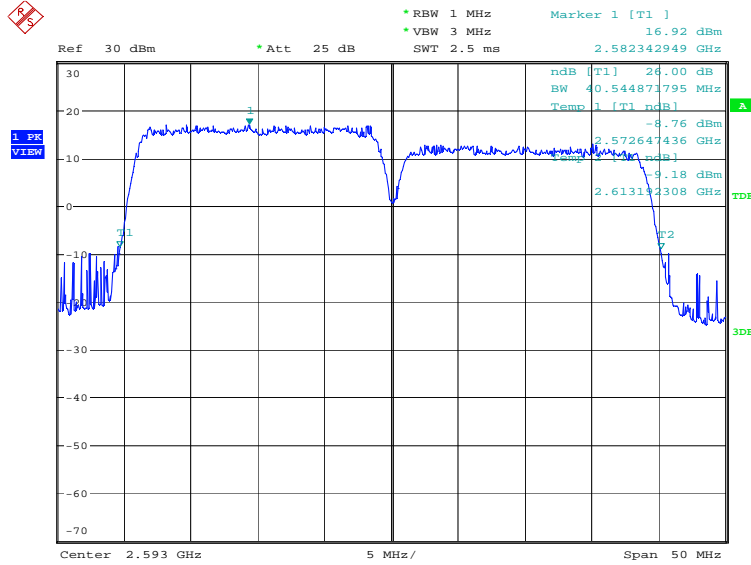

Date: 11.MAR.2021 15:07:29

LTE CA band 41 , 20MHz+20MHz Bandwidth,16QAM (-26dBc BW)

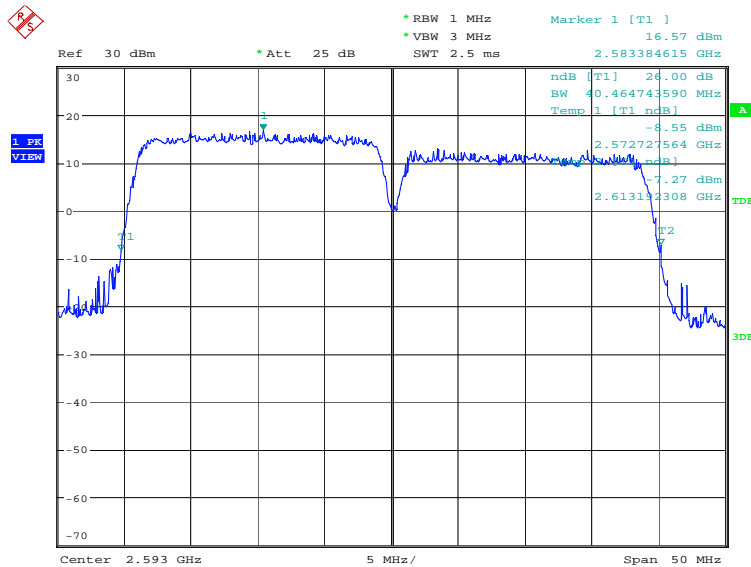

Date: 11.MAR.2021 15:08:40


A.6 Band Edge Compliance

A.6.1 Measurement limit

Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


Part 27.53(m) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

A.6.2 Measurement result
Only the worst case result is given below
LTE band 2@CA_2A-12A
OBW: 1RB-low_offset

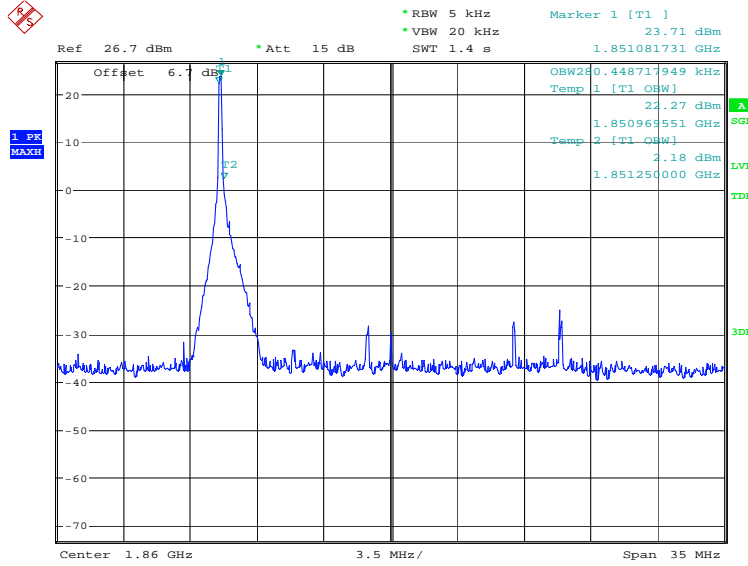


Date: 12.APR.2021 08:43:15

LOW BAND EDGE BLOCK-1RB-low_offset

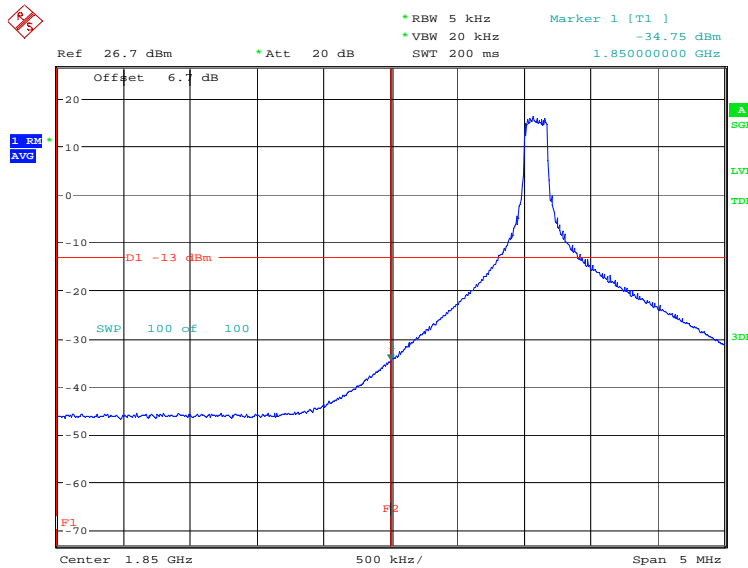


Date: 12.APR.2021 08:44:28

OBW: 1RB-high_offset

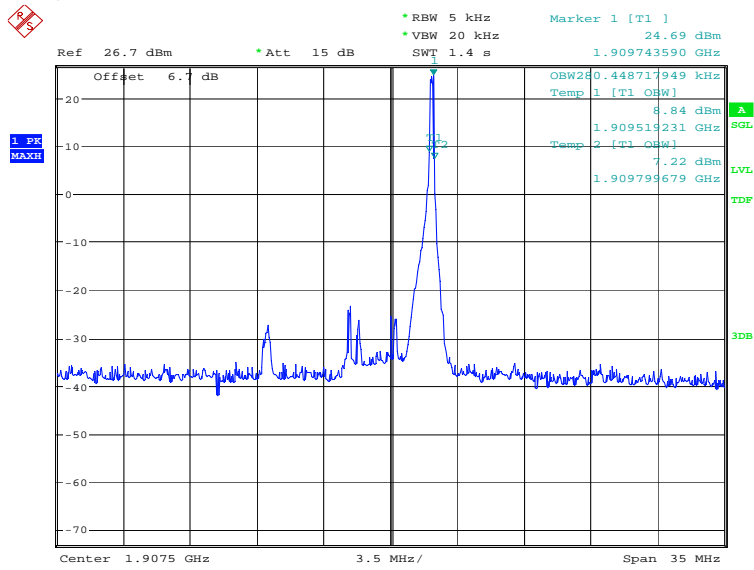


Date: 12.APR.2021 08:45:43

HIGH BAND EDGE BLOCK-1RB-high_offset

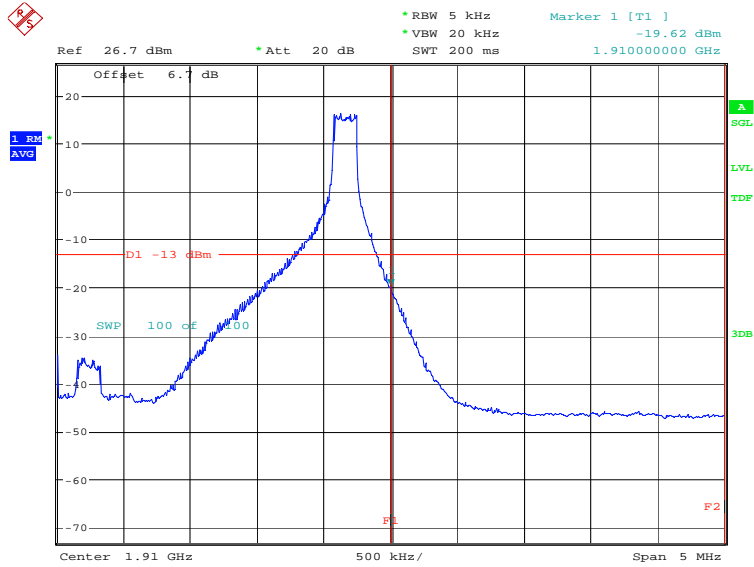


Date: 12.APR.2021 08:46:57

LOW BAND EDGE BLOCK-20MHz-100%RB

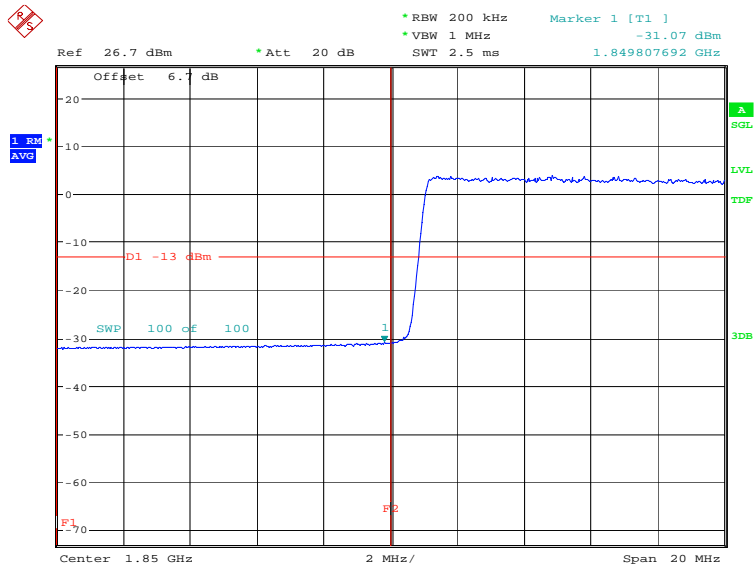


Date: 24.MAR.2021 15:26:51

HIGH BAND EDGE BLOCK-20MHz-100%RB

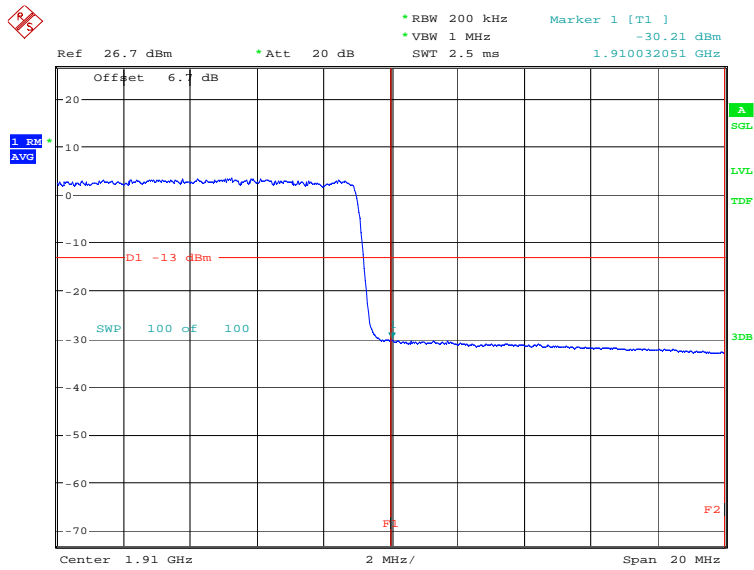


Date: 24.MAR.2021 15:28:56

LTE band 12@CA_2A-12A
OBW: 1RB-low_offset

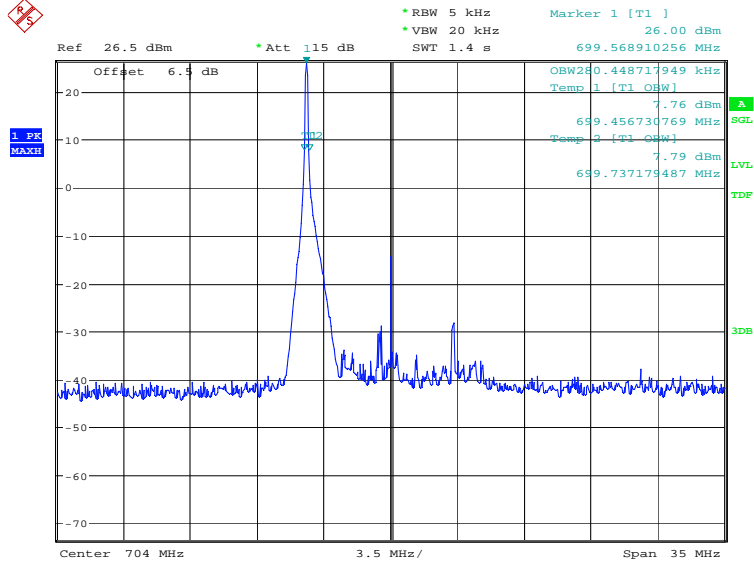


Date: 12.APR.2021 08:38:45

LOW BAND EDGE BLOCK-1RB-low_offset

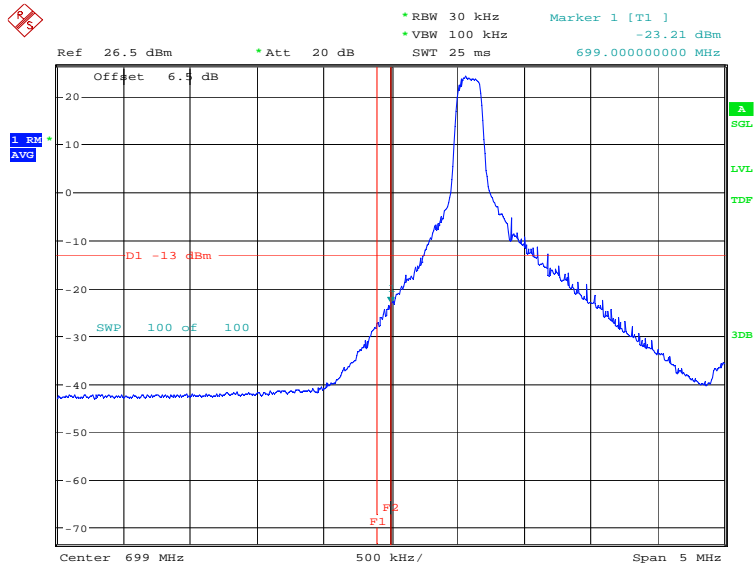


Date: 12.APR.2021 08:39:04

OBW: 1RB-high_offset

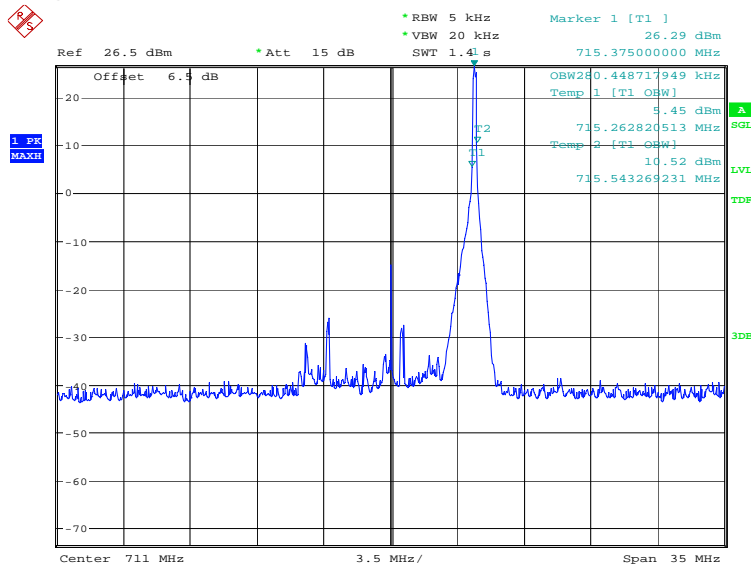


Date: 12.APR.2021 08:39:39

HIGH BAND EDGE BLOCK-1RB-high_offset

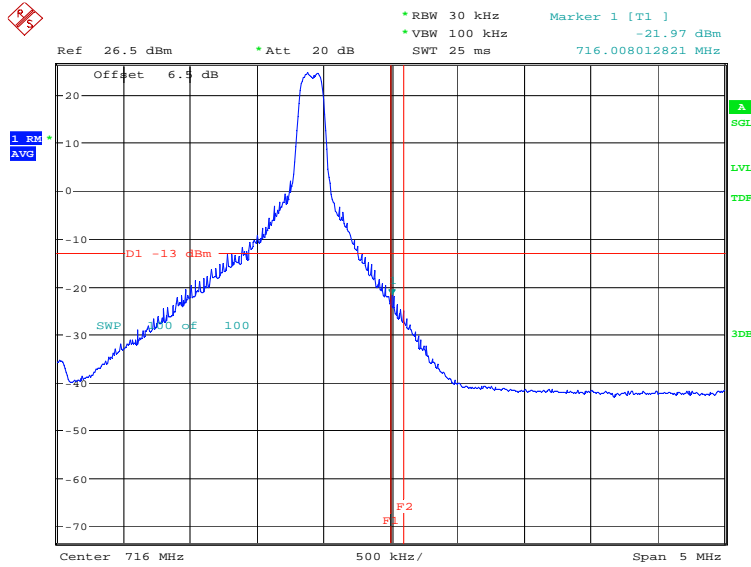


Date: 12.APR.2021 08:39:58

LOW BAND EDGE BLOCK-10MHz-100%RB

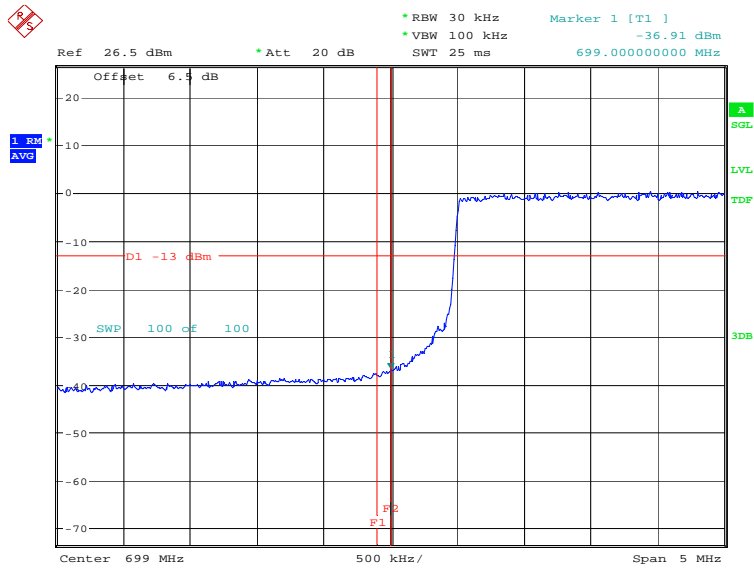


Date: 24.MAR.2021 10:20:24

HIGH BAND EDGE BLOCK-10MHz-100%RB

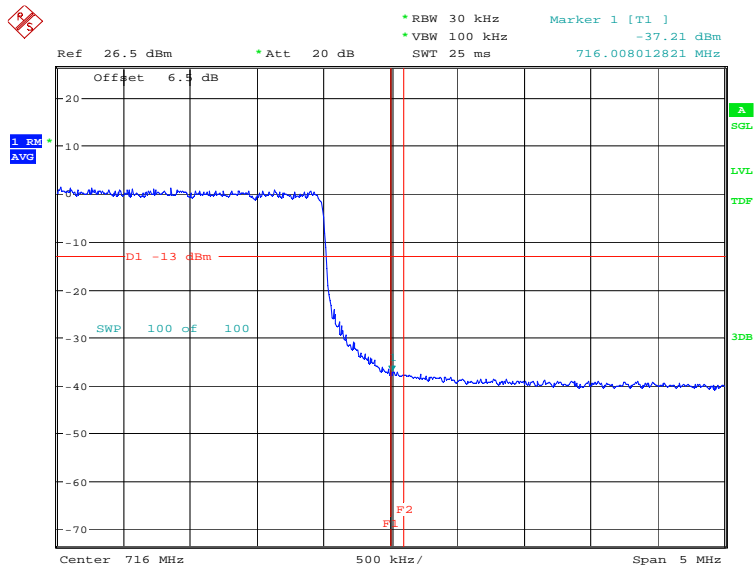


Date: 24.MAR.2021 10:21:45

OBW: 1RB-high_offset

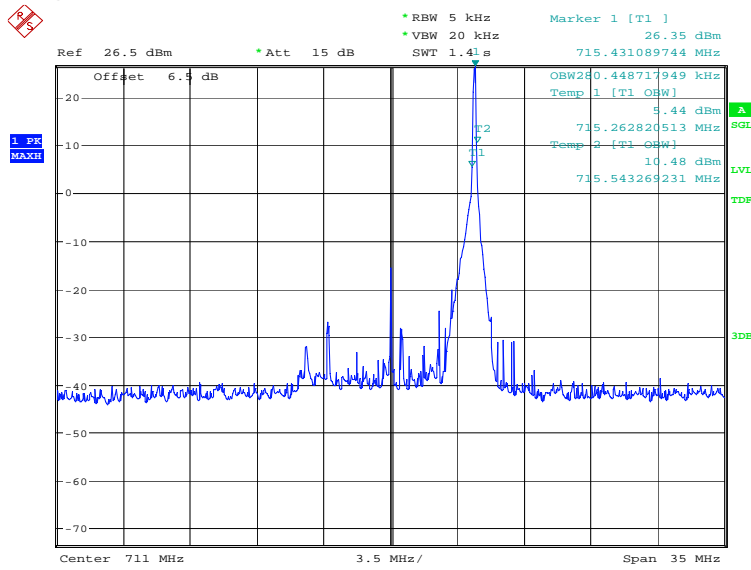


Date: 12.APR.2021 09:01:57

HIGH BAND EDGE BLOCK-1RB-high_offset

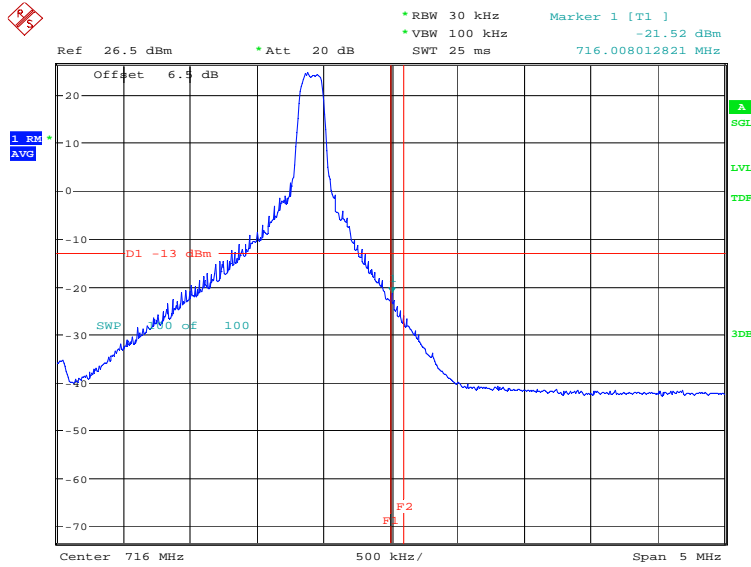


Date: 12.APR.2021 09:02:16

LOW BAND EDGE BLOCK-10MHz-100%RB

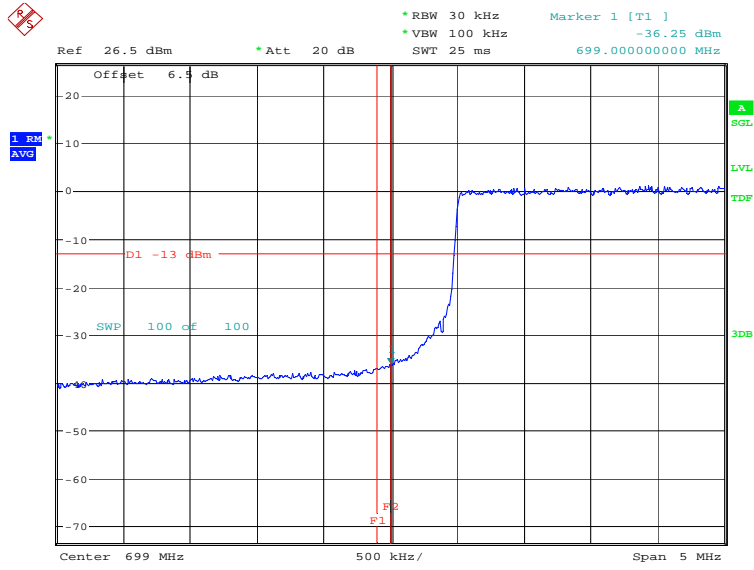


Date: 24.MAR.2021 14:50:24

HIGH BAND EDGE BLOCK-10MHz-100%RB

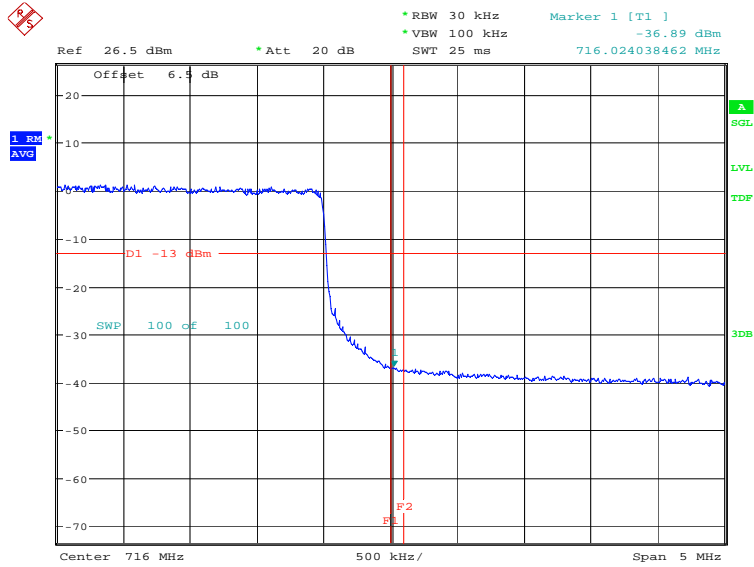


Date: 24.MAR.2021 14:51:43

LTE band 66@CA_12A-66A
OBW: 1RB-low_offset

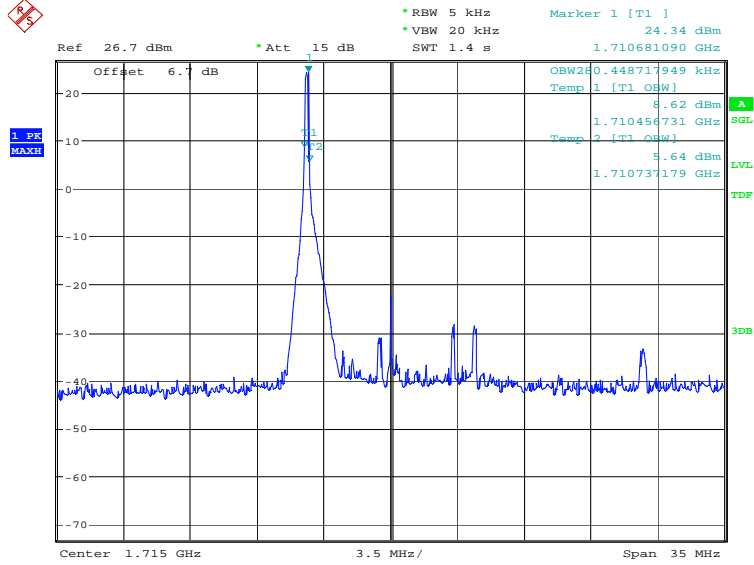


Date: 12.APR.2021 08:52:54

LOW BAND EDGE BLOCK-1RB-low_offset

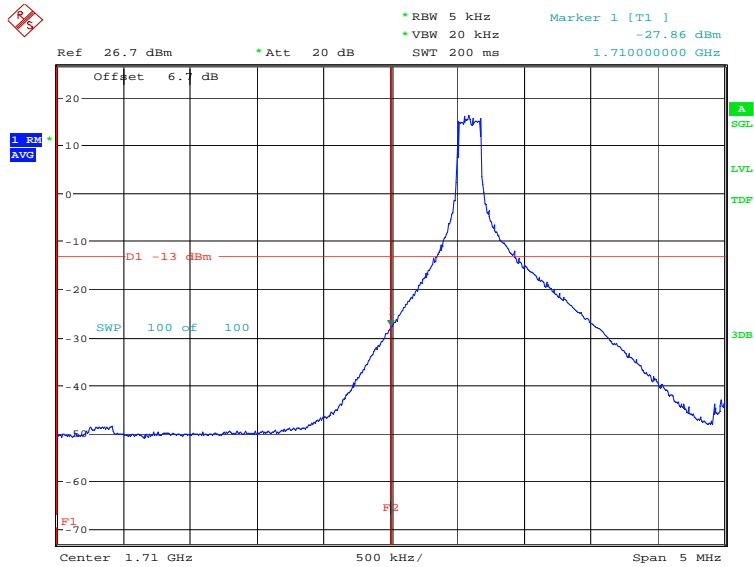


Date: 12.APR.2021 08:54:07

OBW: 1RB-high_offset

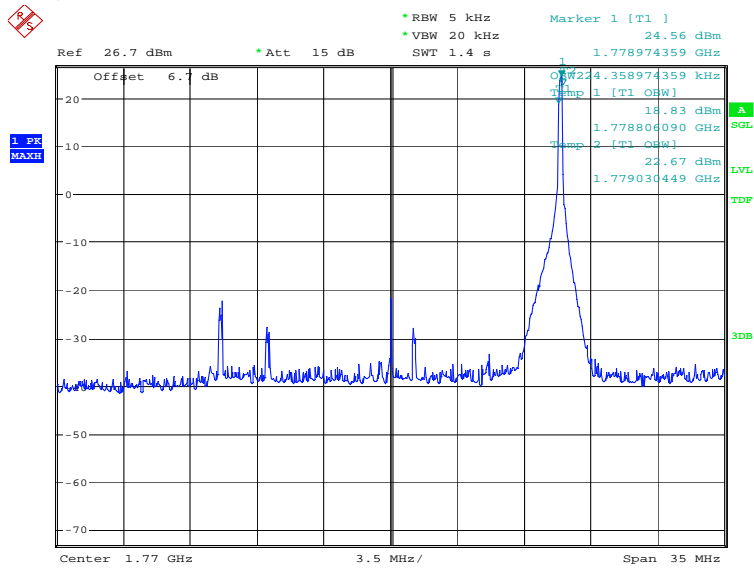


Date: 12.APR.2021 08:54:55

HIGH BAND EDGE BLOCK-1RB-high_offset

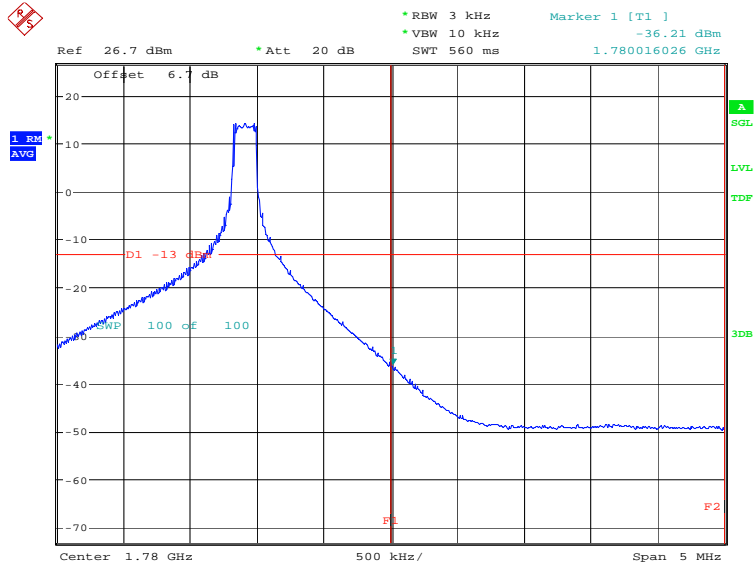


Date: 12.APR.2021 08:56:08

LOW BAND EDGE BLOCK-20MHz-100%RB

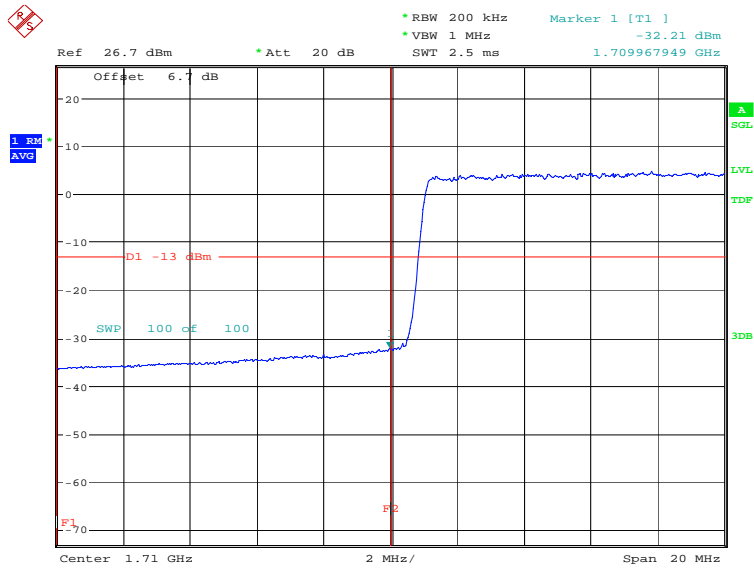

Date: 24.MAR.2021 14:28:19

HIGH BAND EDGE BLOCK-20MHz-100%RB

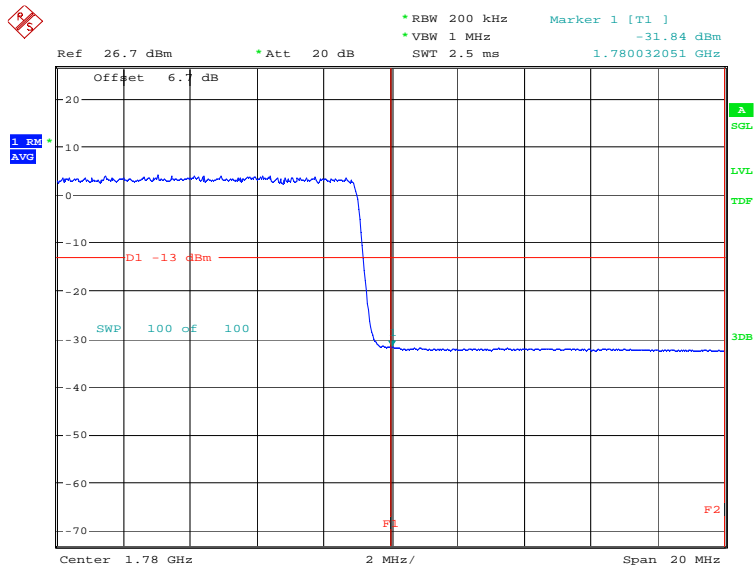


Date: 24.MAR.2021 14:29:38

LTE band 41_CA


Only the worst case result is given below

OBW: 1RB-low_offset

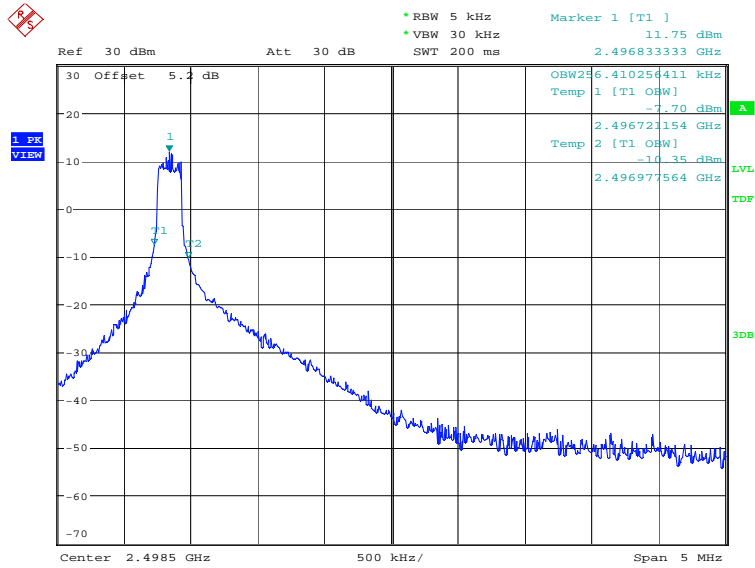


Date: 9.APR.2021 13:39:54


LOW BAND EDGE BLOCK-15MHz+15MHz-1RB-low_offset

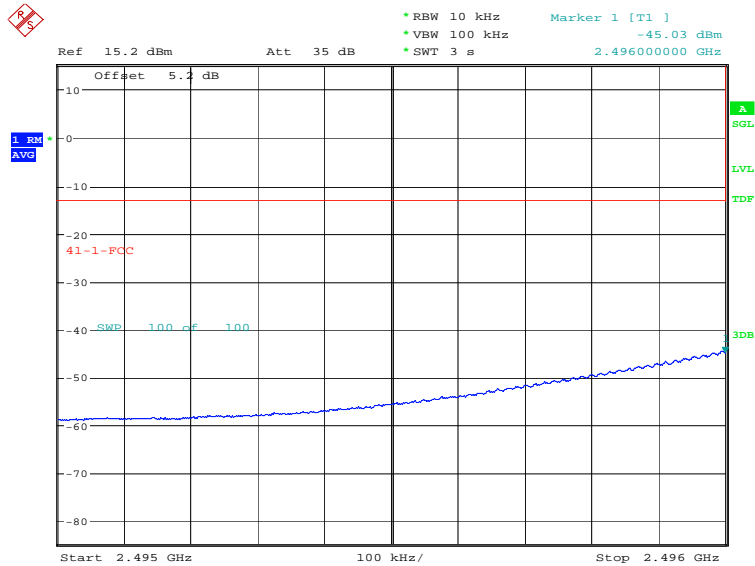

Date: 9.APR.2021 13:52:50

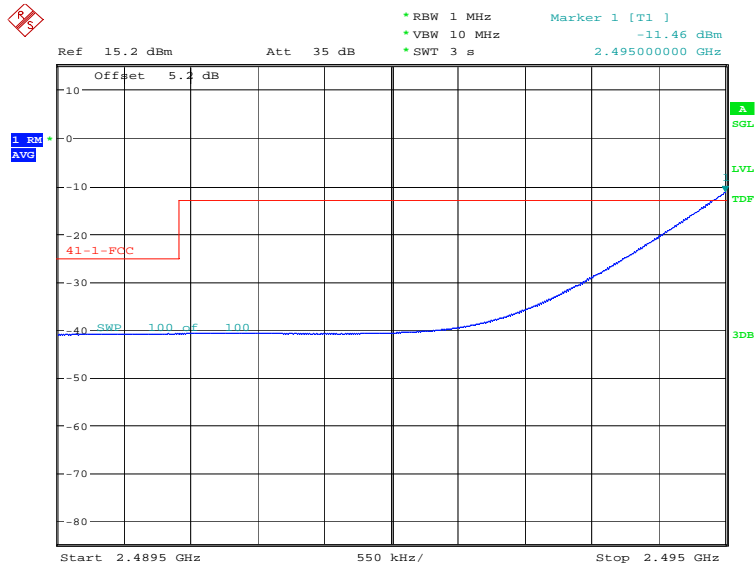


Date: 9.APR.2021 14:00:53

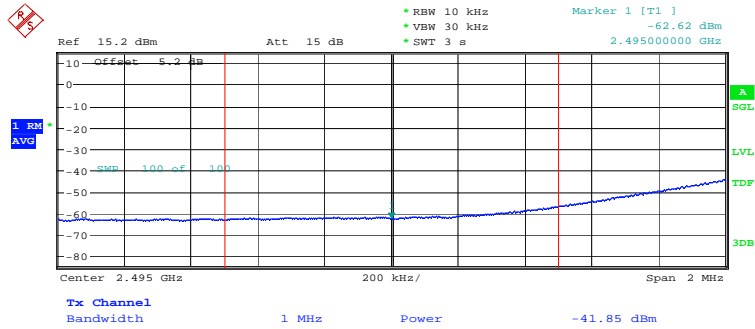


Date: 9.APR.2021 14:07:43

OBW: 1RB-high_offset

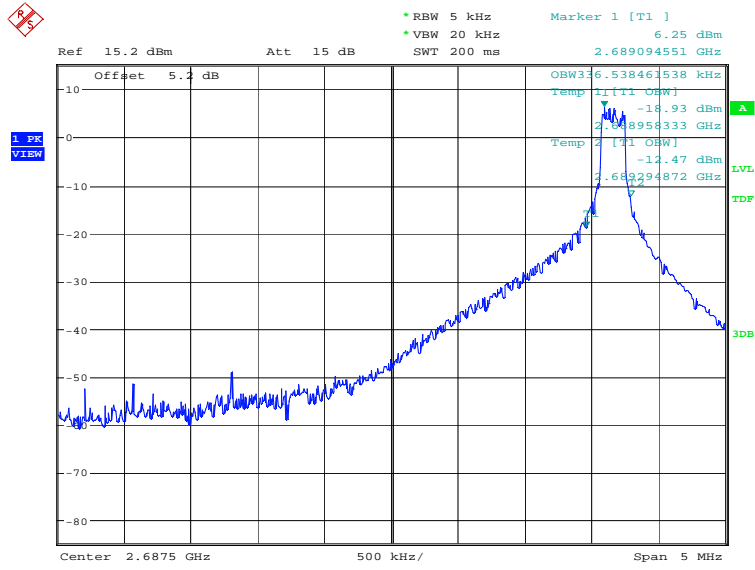


Date: 9.APR.2021 14:13:22

HIGH BAND EDGE BLOCK-15MHz+15MHz-1RB-high_offset

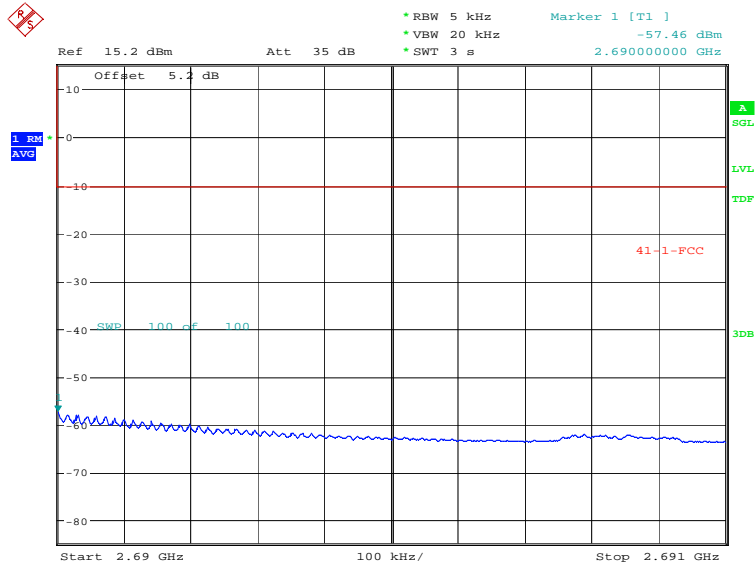


Date: 9.APR.2021 14:21:11

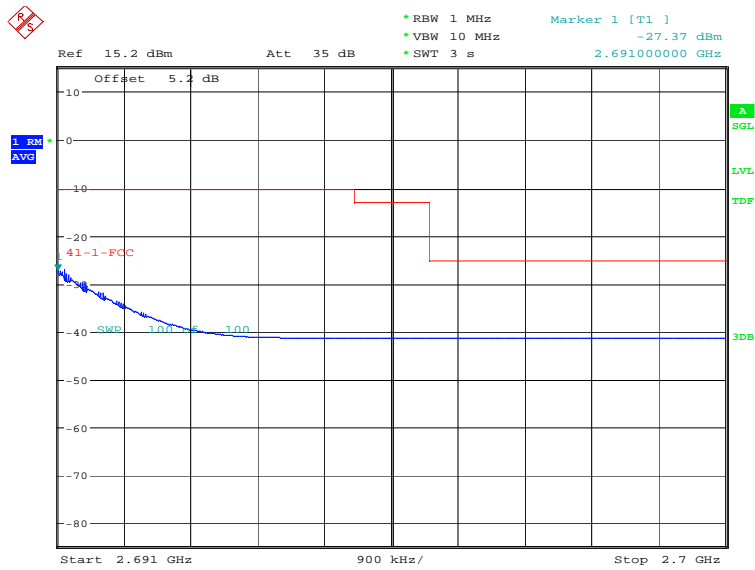


Date: 9.APR.2021 14:31:08

LOW BAND EDGE BLOCK-20MHz+20MHz-100%RB

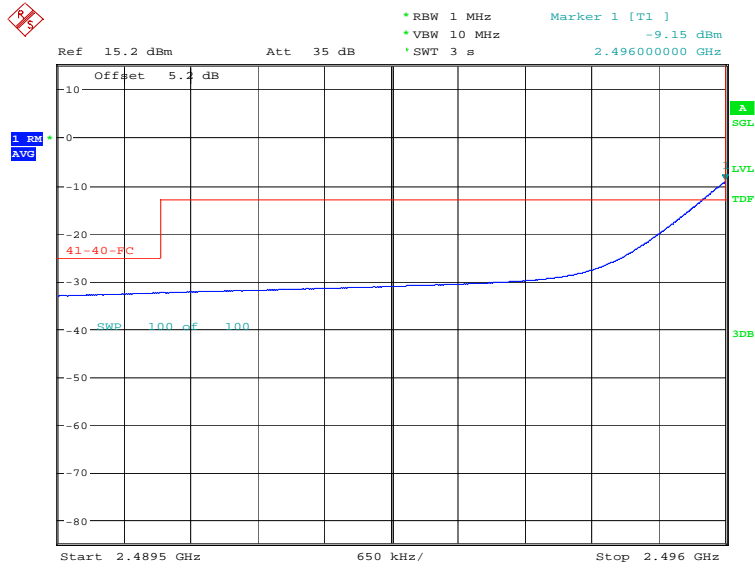


Date: 9.APR.2021 14:42:53

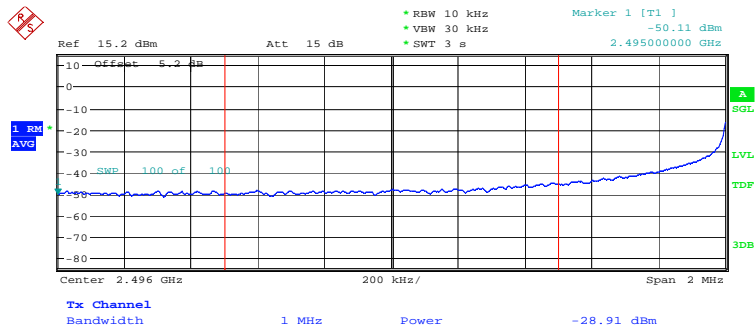

Date: 9.APR.2021 14:49:19

HIGH BAND EDGE BLOCK-20MHz+20MHz-100%RB

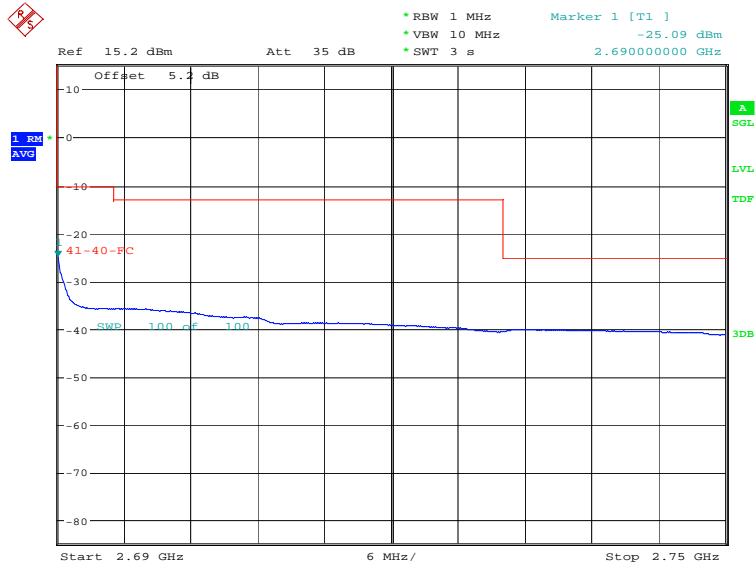

Date: 9.APR.2021 14:59:34

A.7 Conducted Spurious Emission

A.7.1 Measurement Method

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. In measuring unwanted emissions, the spectrum shall be investigated from 30 MHz or the lowest radio frequency signal generated in the equipment, whichever is lower, without going below 9 kHz, up to at least the frequency given below:
 - (a) If the equipment operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
 - (b) If the equipment operates at or above 10 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
2. Determine EUT transmit frequencies: below outlines the band edge frequencies pertinent to conducted emissions testing.
3. The number of sweep points of spectrum analyzer is set to 30001 which is greater than span/RBW.

A. 7.2 Measurement Limit

Part 24.238 and Part 27.53(h) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.


Part 27.53(m) specifies for mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

A. 7.3 Measurement result

Only the worst case result is given below

LTE band 2@CA_2A-12A: 30MHz – 19.1GHz


NOTE: peak above the limit line is the carrier frequency.

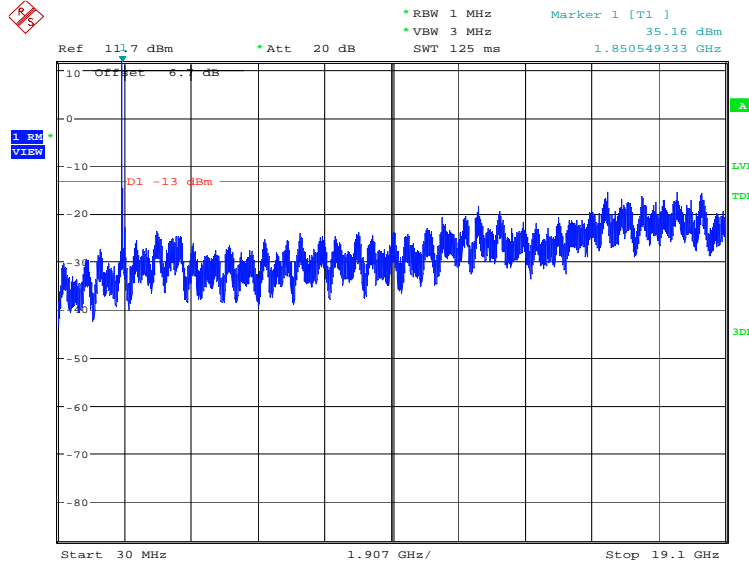

Date: 12.APR.2021 08:48:12

LTE band 12@CA_2A-12A: 30MHz – 7.16GHz


NOTE: peak above the limit line is the carrier frequency.

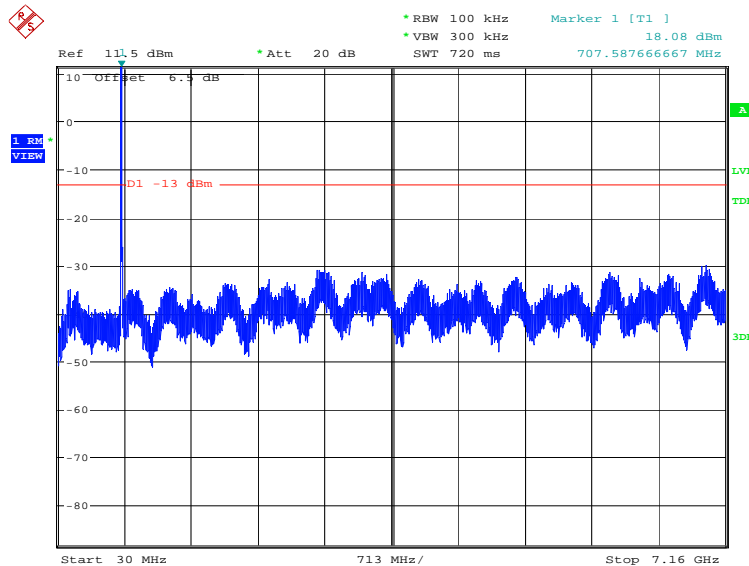

Date: 12.APR.2021 08:41:14

LTE band 12@CA_12A-66A: 30MHz – 7.16GHz


NOTE: peak above the limit line is the carrier frequency.

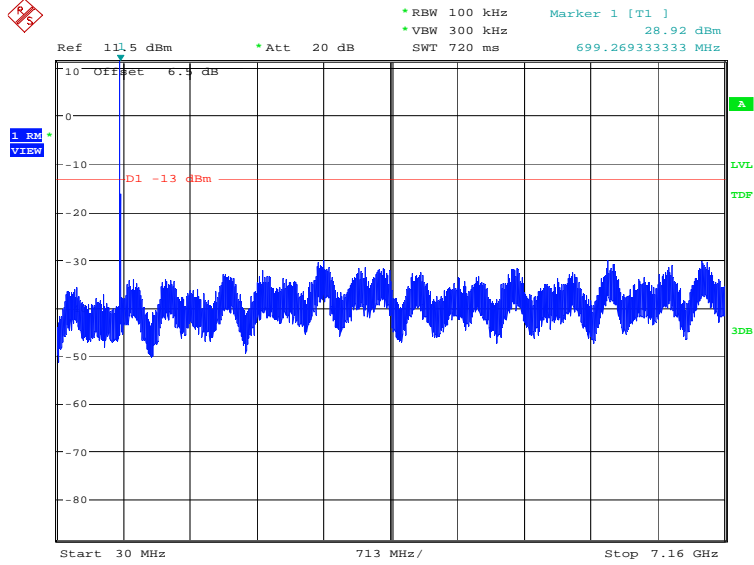

Date: 12.APR.2021 09:03:31

LTE band 66@CA_12A-66A: 30MHz – 17.8GHz


NOTE: peak above the limit line is the carrier frequency.

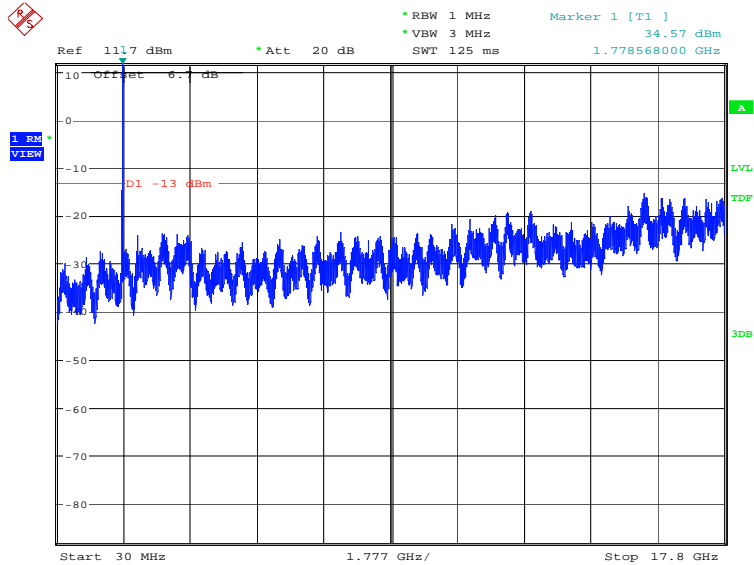

Date: 12.APR.2021 08:57:24

LTE band 41_CA

NOTE: peak above the limit line is the carrier frequency.

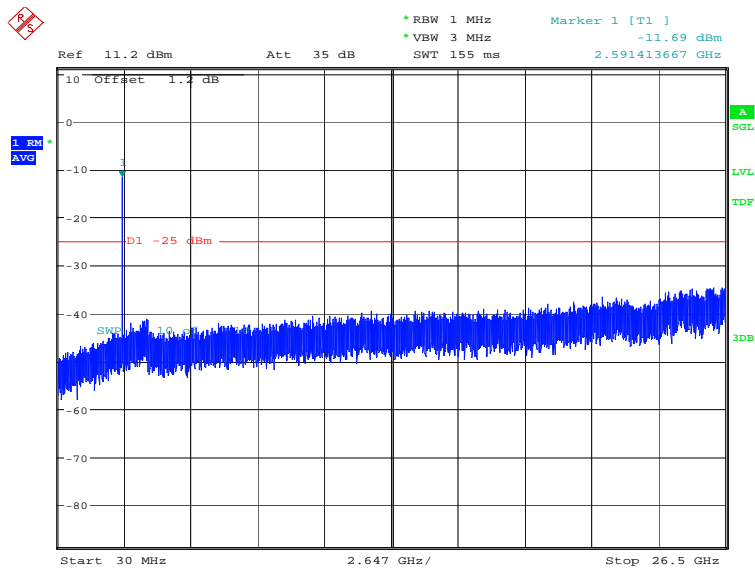

Date: 9.APR.2021 15:09:09

A.8 Peak-to-Average Power Ratio

The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Record the maximum PAPR level associated with a probability of 0.1%.

LTE band 2@CA_2A-12A, 20MHz

Frequency (MHz)	PAPR (dB)		
1880.0	QPSK	16QAM	64QAM
	7.05	7.12	7.34

LTE band 12@CA_12A-66A, 10MHz

Frequency (MHz)	PAPR (dB)		
707.5	QPSK	16QAM	64QAM
	5.67	6.47	6.51

LTE band 12@CA_12A-66A, 10MHz

Frequency (MHz)	PAPR (dB)		
707.5	QPSK	16QAM	64QAM
	5.71	6.38	6.54

LTE band 66@CA_12A-66A, 20MHz

Frequency (MHz)	PAPR (dB)		
1745.0	QPSK	16QAM	64QAM
	6.86	7.08	7.34

LTE band 41_CA, 20MHz+20MHz

Frequency (MHz)	PAPR (dB)		
2593.0	QPSK	16QAM	64QAM
	8.97	9.20	9.46

Annex B: Accreditation Certificate

<p>United States Department of Commerce National Institute of Standards and Technology</p>  	
<hr/> Certificate of Accreditation to ISO/IEC 17025:2017 <hr/>	
NVLAP LAB CODE: 600118-0	
Telecommunication Technology Labs, CAICT Beijing China	
<i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i>	
Electromagnetic Compatibility & Telecommunications	
<i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communique dated January 2009).</i>	
<hr/> 2020-09-29 through 2021-09-30 Effective Dates	 For the National Voluntary Laboratory Accreditation Program

END OF REPORT