



PRECISE TESTING

FCC TEST REPORT

FCC ID: 2APY8-VAPVBP

| | | |
|---|---|---|
| Product Name | : | MIXER AMPLIFIER |
| Model Name | : | VBP-240N, VBP-120N, VBP-360N, VAP-60N, VAP-120N, VAP-240N |
| Brand Name | : | CHANSTEK |
| Report No. | : | PTC18041124302E-FC01 |
| Prepared for | | |
| Foshan Chanstek Audio Co., LTD | | |
| Xiadong Chongkou Industrial Area, Nanhai District, Foshan, Guangdong Province, China | | |
| Prepared by | | |
| Dongguan Precise Testing & Certification Corp., Ltd. | | |
| Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China | | |
| | | |



1TEST RESULT CERTIFICATION

Applicant's name : Foshan Chanstek Audio Co., LTD
Address : Xiadong Chongkou Industrial Area, Nanhai District, Foshan, Guangdong Province, China
Manufacture's name : Foshan Chanstek Audio Co., LTD
Address : Xiadong Chongkou Industrial Area, Nanhai District, Foshan, Guangdong Province, China
Product name : MIXER AMPLIFIER
Model name : VBP-240N, VBP-120N, VBP-360N, VAP-60N, VAP-120N, VAP-240N
Standards : FCC CFR47 Part 15 Section 15.247
Test procedure : ANSI C63.10:2013
Test Date : June 08, 2018 to June 20, 2018
Date of Issue : June 20, 2018
Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Test Engineer:

Leo Yang / Engineer

Technical Manager:

Chris Du / Manager



Contents

| | Page |
|--|-----------|
| 1 TEST RESULT CERTIFICATION..... | 2 |
| 2 TEST SUMMARY..... | 5 |
| 3 TEST FACILITY..... | 6 |
| 4 GENERAL INFORMATION..... | 7 |
| 4.1 GENERAL DESCRIPTION OF E.U.T..... | 7 |
| 4.2 TEST MODE..... | 8 |
| 5 EQUIPMENT DURING TEST..... | 10 |
| 5.1 EQUIPMENTS LIST..... | 10 |
| 5.2 MEASUREMENT UNCERTAINTY..... | 12 |
| 5.3 DESCRIPTION OF SUPPORT UNITS..... | 13 |
| 6 CONDUCTED EMISSION..... | 14 |
| 6.1 E.U.T. OPERATION..... | 14 |
| 6.2 EUT SETUP..... | 14 |
| 6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)..... | 15 |
| 6.4 MEASUREMENT PROCEDURE:..... | 15 |
| 6.5 CONDUCTED EMISSION LIMIT..... | 15 |
| 6.6 MEASUREMENT DESCRIPTION..... | 15 |
| 6.7 CONDUCTED EMISSION TEST RESULT..... | 15 |
| 7 RADIATED SPURIOUS EMISSIONS..... | 18 |
| 7.1 EUT OPERATION..... | 18 |
| 7.2 TEST SETUP..... | 19 |
| 7.3 SPECTRUM ANALYZER SETUP..... | 20 |
| 7.4 TEST PROCEDURE..... | 21 |
| 7.5 SUMMARY OF TEST RESULTS..... | 22 |
| 8 BAND EDGE & CONDUCT SPURIOUS EMISSIONS..... | 27 |
| 8.1 REQUIREMENT..... | 27 |
| 8.2 TEST PROCEDURE..... | 27 |
| 8.3 TEST RESULTS..... | 29 |



| | |
|---|-----------|
| 9 20 DB BANDWIDTH MEASUREMENT..... | 44 |
| 9.1 TEST PROCEDURE..... | 44 |
| 9.2 TEST RESULT | 44 |
| 10 MAXIMUM PEAK OUTPUT POWER | 50 |
| 10.1 TEST PROCEDURE..... | 50 |
| 10.2 TEST RESULT | 50 |
| 11 HOPPING CHANNEL SEPARATION..... | 57 |
| 11.1 TEST PROCEDURE..... | 57 |
| 11.2 TEST RESULT | 58 |
| 12 NUMBER OF HOPPING FREQUENCY | 64 |
| 12.1 TEST PROCEDURE..... | 64 |
| 12.2 TEST RESULT | 64 |
| 13 DWELL TIME..... | 65 |
| 13.1 TEST PROCEDURE..... | 65 |
| 13.2 TEST RESULT | 65 |
| 14 ANTENNA REQUIREMENT..... | 68 |
| 14.1 ANTENNA REQUIREMENT | 68 |
| 14.2 RESULT | 68 |
| 15 TEST PHOTOS..... | 69 |
| 16 EUT PHOTOS..... | 71 |



2 Test Summary

| Test Items | Test Requirement | Result |
|-----------------------------|----------------------------------|--------|
| Radiated Spurious Emissions | 15.205(a) 15.209 15.247(d) | PASS |
| Band edge | 15.247(d) 15.205(a) | PASS |
| Conduct Emission | 15.207 | PASS |
| 20dB Bandwidth | 15.247(a)(1) | PASS |
| Maximum Peak Output Power | 15.247(b)(1) | PASS |
| Frequency Separation | 15.247(a)(1) | PASS |
| Number of Hopping Frequency | 15.247(a)(1)(iii) | PASS |
| Dwell time | 15.247(a)(1)(iii) | PASS |
| Antenna Requirement | 15.203 | PASS |



PRECISE TESTING

Report No.: PTC18041124302E-FC01

3 TEST FACILITY

Dongguan Precise Testing & Certification Corp., Ltd.

Address: Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China

FCC Registration Number: 790290

A2LA Certificate No.: 4408.01

IC Registration Number: 12191A-1

Test Lab: Shenzhen BCTC Testing Co., Ltd.

Address: BCTC Building & 1-2F, East of B Building, Pengzhou Industrial, Fuyuan 1st Road, Qiaotou Community, Fuyong Street, Bao'an District, Shenzhen, China

FCC Registered No.: 712850

Test items: Radiated Spurious Emission(18GHz to 25GHz)



4 General Information

4.1 General Description of E.U.T.

| | | |
|---------------------|---|---|
| Product Name | : | MIXER AMPLIFIER |
| Model Name | : | VBP-240N, VBP-120N, VBP-360N, VAP-60N, VAP-120N, VAP-240N (Note: The samples are the same except appearance and model number. So VBP-240N, was selected for full tested.) |
| Bluetooth Version | : | BT 2.1+EDR |
| Operating frequency | : | 2402-2480MHz |
| Numbers of Channel | : | 79 channels |
| Antenna Type | : | Internal PCB Antenna |
| Antenna Gain | : | 2 dBi |
| Type of Modulation | : | GFSK, $\pi/4$ -DQPSK, 8DPSK |
| Power supply | : | AC 120V or AC 240V, 50/60Hz |
| Hardware Version | : | V1.0 |
| Software Version | : | V1.0 |



4.2 Test Mode

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.



Channel List:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 0 | 2402 | 1 | 2403 | 2 | 2404 | 3 | 2405 |
| 4 | 2406 | 5 | 2407 | 6 | 2408 | 7 | 2409 |
| 8 | 2410 | 9 | 2411 | 10 | 2412 | 11 | 2413 |
| 12 | 2414 | 13 | 2415 | 14 | 2416 | 15 | 2417 |
| 16 | 2418 | 17 | 2419 | 18 | 2420 | 19 | 2421 |
| 20 | 2422 | 21 | 2423 | 22 | 2424 | 23 | 2425 |
| 24 | 2426 | 25 | 2427 | 26 | 2428 | 27 | 2429 |
| 28 | 2430 | 29 | 2431 | 30 | 2432 | 31 | 2433 |
| 32 | 2434 | 33 | 2435 | 34 | 2436 | 35 | 2437 |
| 36 | 2438 | 37 | 2439 | 38 | 2440 | 39 | 2441 |
| 40 | 2442 | 41 | 2443 | 42 | 2444 | 43 | 2445 |
| 44 | 2446 | 45 | 2447 | 46 | 2448 | 47 | 2449 |
| 48 | 2450 | 49 | 2451 | 50 | 2452 | 51 | 2453 |
| 52 | 2454 | 53 | 2455 | 54 | 2456 | 55 | 2457 |
| 56 | 2458 | 57 | 2459 | 58 | 2460 | 59 | 2461 |
| 60 | 2462 | 61 | 2463 | 62 | 2464 | 63 | 2465 |
| 64 | 2466 | 65 | 2467 | 66 | 2468 | 67 | 2469 |
| 68 | 2470 | 69 | 2471 | 70 | 2472 | 71 | 2473 |
| 72 | 2474 | 73 | 2475 | 74 | 2476 | 75 | 2477 |
| 76 | 2478 | 77 | 2479 | 78 | 2480 | - | - |

| Channel | Frequency(MHz) |
|---------|----------------|
| 0 | 2402 |
| 39 | 2441 |
| 78 | 2480 |



5 Equipment During Test

5.1 Equipments List

RF Conducted Test

| Name of Equipment | Manufacturer | Model | Serial No. | Characteristics | Calibration Due |
|---------------------|-----------------|--------|------------|-----------------|-----------------|
| MXG Signal Analyzer | Agilent | N9020A | MY56070279 | 10Hz-30GHz | Apr 07, 2019 |
| Coaxial Cable | CDS | 79254 | 46107086 | 10Hz-30GHz | Oct 09, 2018 |
| Antenna Connector | Florida RF Labs | N/A | RF01# | N/A | Aug. 26, 2018 |

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions(Test Frequency from 9KHz-18GHz)

| Name of Equipment | Manufacturer | Model | Serial No. | Characteristics | Calibration Due |
|------------------------------|---------------|------------|--------------|-----------------|-----------------|
| EMI Test Receiver | Rohde&Schwarz | ESCI | 101417 | 9KHz-3GHz | Sep. 03, 2018 |
| Loop Antenna | Schwarzbeck | FMZB 1519 | 012 | 9 KHz -30MHz | Aug 31, 2018 |
| Bilog Antenna | SCHWARZBECK | VULB9160 | 9160-3355 | 25MHz-2GHz | Aug 31, 2018 |
| Preamplifier (low frequency) | SCHWARZBECK | BBV 9475 | 9745-0013 | 1MHz-1GHz | Sep. 03, 2018 |
| Cable | Schwarzbeck | PLF-100 | 549489 | 9KHz-3GHz | Sep. 03, 2018 |
| Spectrum Analyzer | Agilent | E4407B | MY45109572 | 9KHz-40GHz | Oct. 13, 2018 |
| Horn Antenna | SCHWARZBECK | 9120D | 9120D-1246 | 1GHz-18GHz | Aug. 31, 2018 |
| Power Amplifier | LUNAR EM | LNA1G18-40 | J10100000081 | 1GHz-26.5GHz | Aug. 31, 2018 |
| Cable | H+S | CBL-26 | N/A | 1GHz-26.5GHz | Sep. 03, 2018 |



Radiated Emission (Test Frequency from 18GHz-25GHz)

| Name of Equipment | Manufacturer | Model | Serial No. | Characteristics | Calibration Due |
|--------------------------|---------------------|--------------|-------------------|------------------------|------------------------|
| Spectrum Analyzer | Agilent | E4407B | MY45109572 | 9KHz-26.5GHz | 2018.08.26 |
| Test Receiver | R&S | ESPI | 101396 | 9KHz-7GHz | 2018.08.26 |
| Horn Antenna | SCHWARZBECK | BBHA 9170 | 9170-181 | 14GHz-40GHz | 2018.09.02 |
| Amplifier | SCHWARZBECK | BBV 9721 | 9721-205 | 18GHz-40GHz | 2018.08.26 |
| RF Cable | R&S | R204 | R21X | 1GHz-40GHz | 2018.08.26 |

Conducted Emissions

| Name of Equipment | Manufacturer | Model | Serial No. | Characteristics | Calibration Due |
|--------------------------|---------------------|--------------|-------------------|------------------------|------------------------|
| EMI Test Receiver | Rohde&Schwarz | ESCI | 101417 | 9KHz-3GHz | Sep. 03, 2018 |
| Artificial Mains Network | Rohde&Schwarz | L2-16B | 000WX31025 | 9KHz-300MHz | Sep. 03, 2018 |
| Artificial Mains Network | Rohde&Schwarz | ENV216 | 101342 | 9KHz-300MHz | Sep. 03, 2018 |



5.2 Measurement Uncertainty

| Parameter | Uncertainty |
|---|--------------------------|
| RF output power, conducted | ±1.0dB |
| Power Spectral Density, conducted | ±2.2dB |
| Radio Frequency | ± 1 x 10 ⁻⁶ |
| Bandwidth | ± 1.5 x 10 ⁻⁶ |
| Time | ±2% |
| Duty Cycle | ±2% |
| Temperature | ±1°C |
| Humidity | ±5% |
| DC and low frequency voltages | ±3% |
| Conducted Emissions (150kHz~30MHz) | ±3.64dB |
| Radiated Emission(30MHz~1GHz) | ±5.03dB |
| Radiated Emission(1GHz~25GHz) | ±4.74dB |
| Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95% | |



PRECISE TESTING

Report No.: PTC18041124302E-FC01

5.3 Description of Support Units

| Equipment | Model No. | Series No. |
|-----------|-----------|------------|
| N/A | N/A | N/A |



6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
Test Method: : ANSI C63.10:2013
Test Result: : PASS
Frequency Range: : 150kHz to 30MHz
Class/Severity: : Class B
Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


6.1 E.U.T. Operation

Operating Environment :

Temperature: : 25.5 °C
Humidity: : 51 % RH
Atmospheric Pressure: : 101.2kPa
Test Voltage : AC 120V/60Hz, AC 240V/60Hz


6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

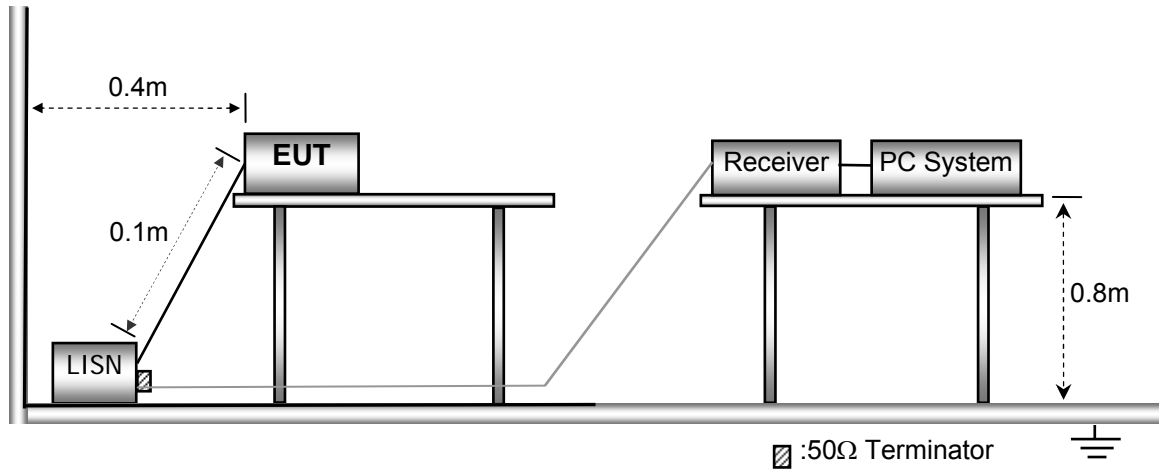



6.3 Test SET-UP (Block Diagram of Configuration)

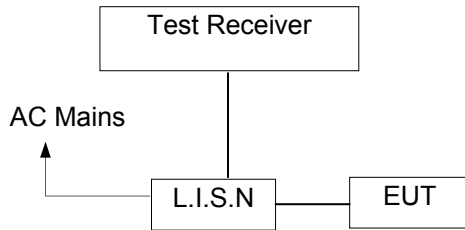

6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.1m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.5 Conducted Emission Limit

Conducted Emission

| Frequency(MHz) | Quasi-peak | Average |
|----------------|------------|---------|
| 0.15-0.5 | 66-56 | 56-46 |
| 0.5-5.0 | 56 | 46 |
| 5.0-30.0 | 60 | 50 |

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.6 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


6.7 Conducted Emission Test Result

Pass.

All the modulation modes were tested the data of the worst mode (AC 120V/60Hz, GFSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.



Line -120V/60Hz:

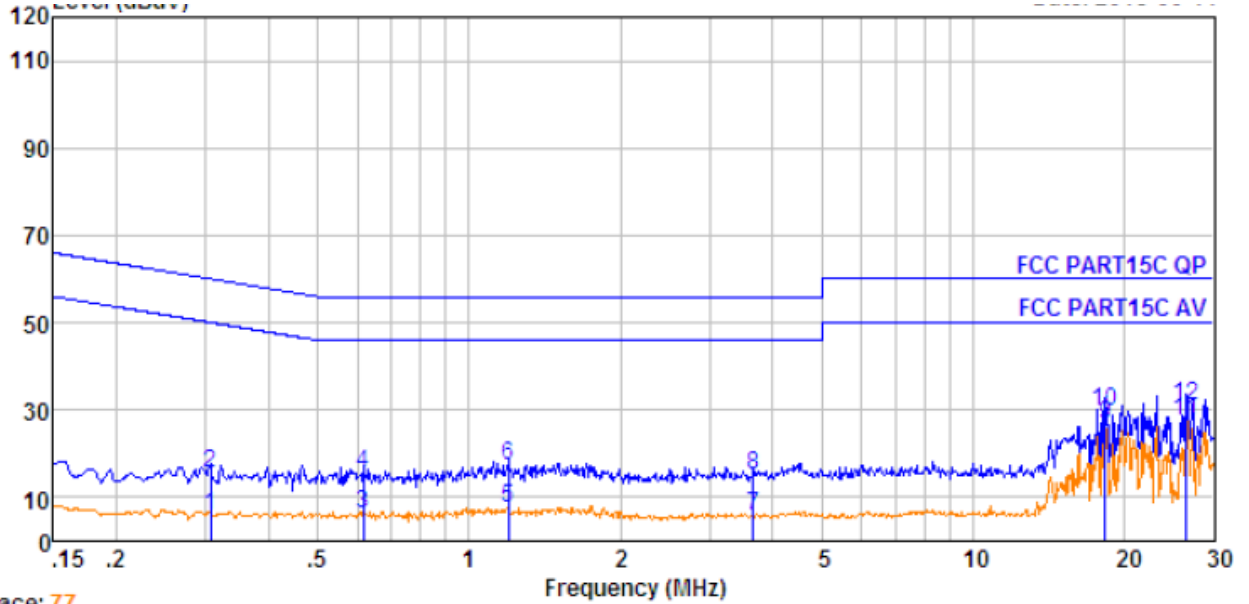


Trace: 77

| No. | Freq MHz | Cable Loss dB | AMN Factor dB | Receiver Reading dBuV | Emission Level dBuV | Limit dBuV | Over Limit dB | Remark |
|-----|----------|---------------|---------------|-----------------------|---------------------|------------|---------------|---------|
| 1. | 0.307 | 0.37 | 9.68 | -4.48 | 5.57 | 50.06 | -44.49 | Average |
| 2. | 0.307 | 0.37 | 9.68 | 5.65 | 15.70 | 60.06 | -44.36 | QP |
| 3. | 0.617 | 0.44 | 9.79 | -3.86 | 6.37 | 46.00 | -39.63 | Average |
| 4. | 0.617 | 0.44 | 9.79 | 5.40 | 15.63 | 56.00 | -40.37 | QP |
| 5. | 1.197 | 0.46 | 9.83 | -2.91 | 7.38 | 46.00 | -38.62 | Average |
| 6. | 1.197 | 0.46 | 9.83 | 6.84 | 17.13 | 56.00 | -38.87 | QP |
| 7. | 3.661 | 0.47 | 9.89 | -4.49 | 5.87 | 46.00 | -40.13 | Average |
| 8. | 3.661 | 0.47 | 9.89 | 4.65 | 15.01 | 56.00 | -40.99 | QP |
| 9. | 18.232 | 0.44 | 9.89 | 16.33 | 26.66 | 50.00 | -23.34 | Average |
| 10. | 18.232 | 0.44 | 9.89 | 19.27 | 29.60 | 60.00 | -30.40 | QP |
| 11. | 26.418 | 0.52 | 9.91 | 17.12 | 27.55 | 50.00 | -22.45 | Average |
| 12. | 26.418 | 0.52 | 9.91 | 20.71 | 31.14 | 60.00 | -28.86 | QP |



Neutral -120V/60Hz:

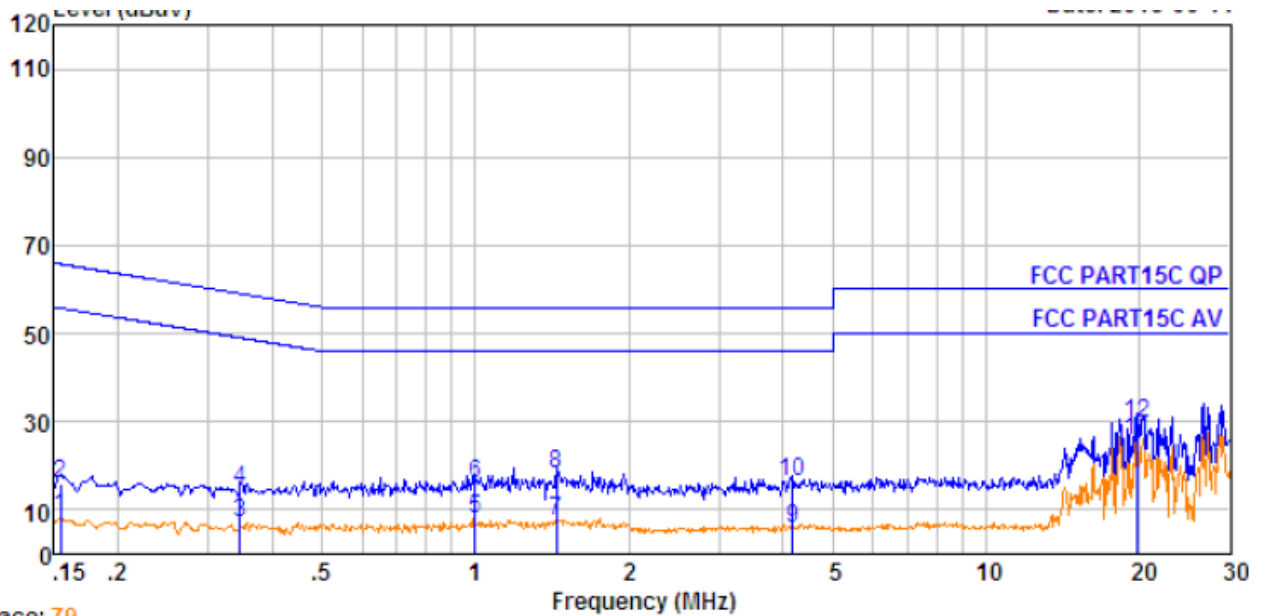

Trace: 79

| No. | Freq MHz | Cable Loss dB | AMN Factor dB | Receiver Reading dBuV | Emission Level dBuV | Limit dBuV | Over Limit dB | Remark |
|-----|----------|---------------|---------------|-----------------------|---------------------|------------|---------------|---------|
| 1. | 0.154 | 0.21 | 9.53 | -1.50 | 8.24 | 55.78 | -47.54 | Average |
| 2. | 0.154 | 0.21 | 9.53 | 6.39 | 16.13 | 65.78 | -49.65 | QP |
| 3. | 0.346 | 0.39 | 9.73 | -2.83 | 7.29 | 49.05 | -41.76 | Average |
| 4. | 0.346 | 0.39 | 9.73 | 4.36 | 14.48 | 59.05 | -44.57 | QP |
| 5. | 1.000 | 0.46 | 9.85 | -2.37 | 7.94 | 46.00 | -38.06 | Average |
| 6. | 1.000 | 0.46 | 9.85 | 5.68 | 15.99 | 56.00 | -40.01 | QP |
| 7. | 1.441 | 0.47 | 9.87 | -2.99 | 7.35 | 46.00 | -38.65 | Average |
| 8. | 1.441 | 0.47 | 9.87 | 7.68 | 18.02 | 56.00 | -37.98 | QP |
| 9. | 4.180 | 0.48 | 9.94 | -4.67 | 5.75 | 46.00 | -40.25 | Average |
| 10. | 4.180 | 0.48 | 9.94 | 5.85 | 16.27 | 56.00 | -39.73 | QP |
| 11. | 19.740 | 0.40 | 9.97 | 15.37 | 25.74 | 50.00 | -24.26 | Average |
| 12. | 19.740 | 0.40 | 9.97 | 19.14 | 29.51 | 60.00 | -30.49 | QP |



7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method : ANSI C63.10:2013
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

| Frequency (MHz) | Field Strength | | Field Strength Limit at 3m Measurement Dist | |
|-----------------|-----------------------|--------------|---|---------------------------------------|
| | uV/m | Distance (m) | uV/m | dBuV/m |
| 0.009 ~ 0.490 | $2400/F(\text{kHz})$ | 300 | $10000 * 2400/F(\text{kHz})$ | $20\log^{(2400/F(\text{kHz}))} + 80$ |
| 0.490 ~ 1.705 | $24000/F(\text{kHz})$ | 30 | $100 * 24000/F(\text{kHz})$ | $20\log^{(24000/F(\text{kHz}))} + 40$ |
| 1.705 ~ 30 | 30 | 30 | $100 * 30$ | $20\log^{(30)} + 40$ |
| 30 ~ 88 | 100 | 3 | 100 | $20\log^{(100)}$ |
| 88 ~ 216 | 150 | 3 | 150 | $20\log^{(150)}$ |
| 216 ~ 960 | 200 | 3 | 200 | $20\log^{(200)}$ |
| Above 960 | 500 | 3 | 500 | $20\log^{(500)}$ |

7.1 EUT Operation


Operating Environment :

Temperature : 23.5 °C
 Humidity : 51.1 % RH
 Atmospheric Pressure : 101.2kPa


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

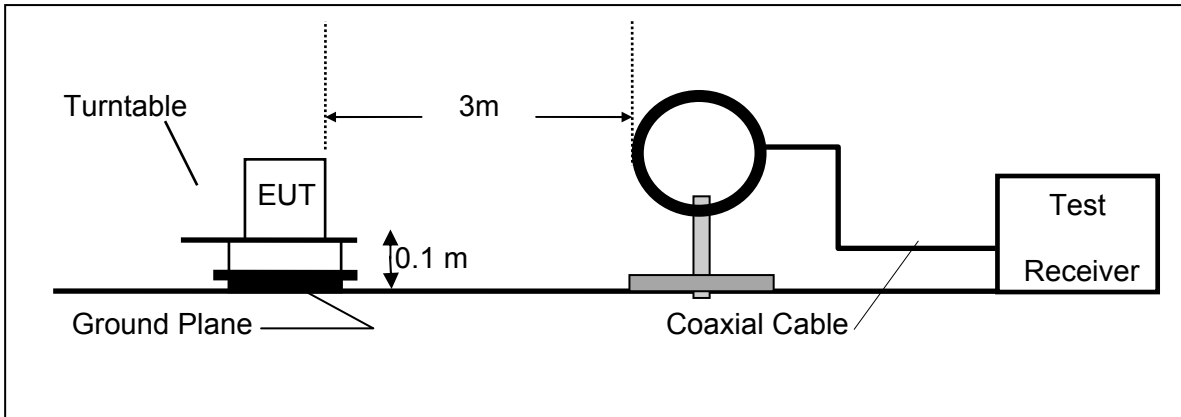

The test setup for emission measurement from 30 MHz to 1 GHz.

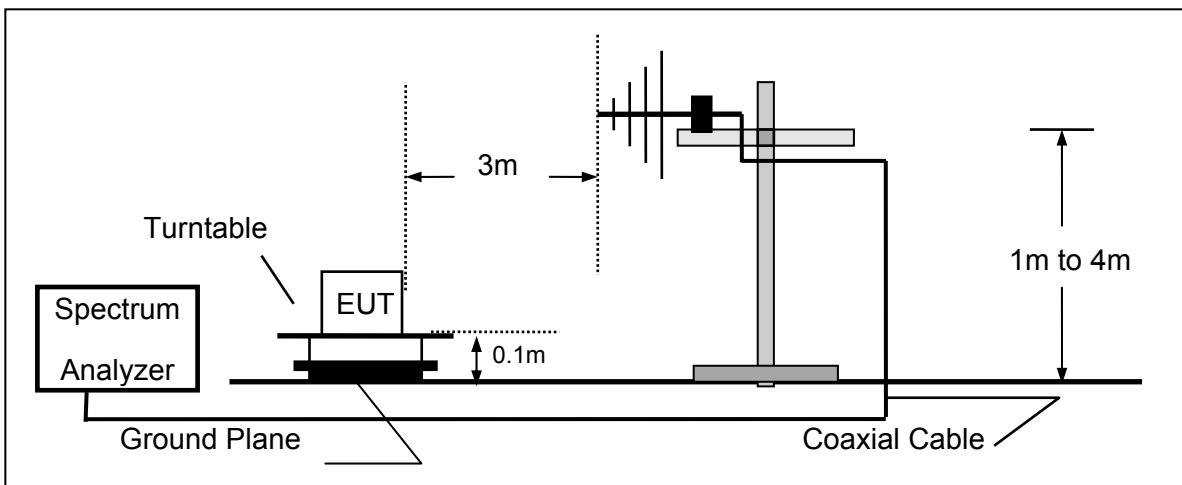

The test setup for emission measurement above 1 GHz.

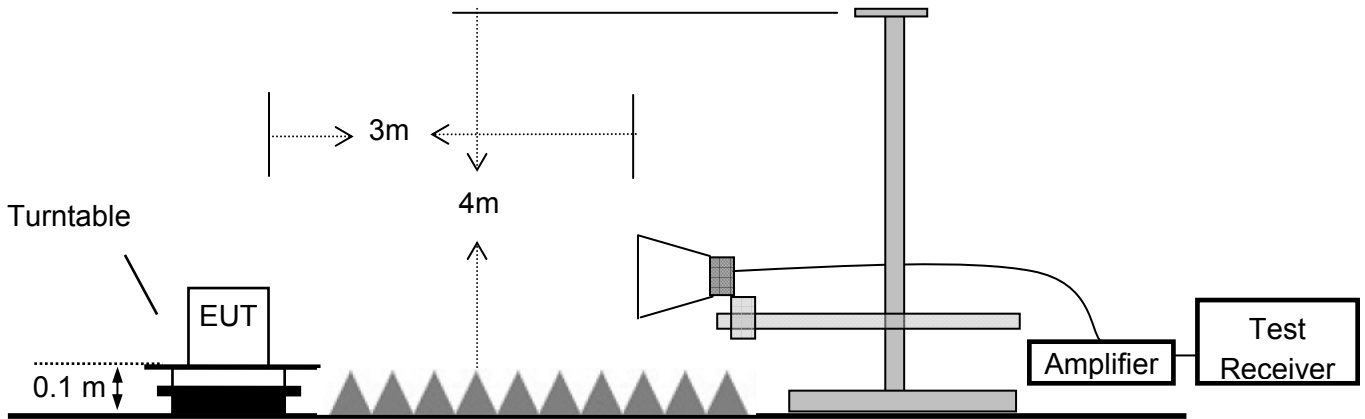

7.3 Spectrum Analyzer Setup

| Spectrum Parameter | Setting |
|---------------------------------------|--|
| Attenuation | Auto |
| Start Frequency | 1000 MHz |
| Stop Frequency | 10th carrier harmonic |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter | Setting |
|------------------------|----------------------------------|
| Attenuation | Auto |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |



7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.1m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 0.1m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



7.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

| Freq. (MHz) | Ant.Pol. H/V | Emission Level (dBuV/m) | Limit 3m (dBuV/m) | Over (dB) |
|----------------|-----------------|----------------------------|----------------------|--------------|
| -- | -- | -- | -- | >20 |

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor = $40\log(\text{Specific distance/ test distance})$ (dB);
Limit line=Specific limits(dBuV) + distance extrapolation factor.


Test Frequency: 30MHz ~ 1GHz

Please refer to the following test plots:

All the modulation modes were tested the data of the worst mode (AC 120V/60Hz, GFSK TX 2402MHz) are recorded in the following pages and the others modulation methods do not exceed the limits.




Test plot for Horizontal: GFSK(2402MHz)

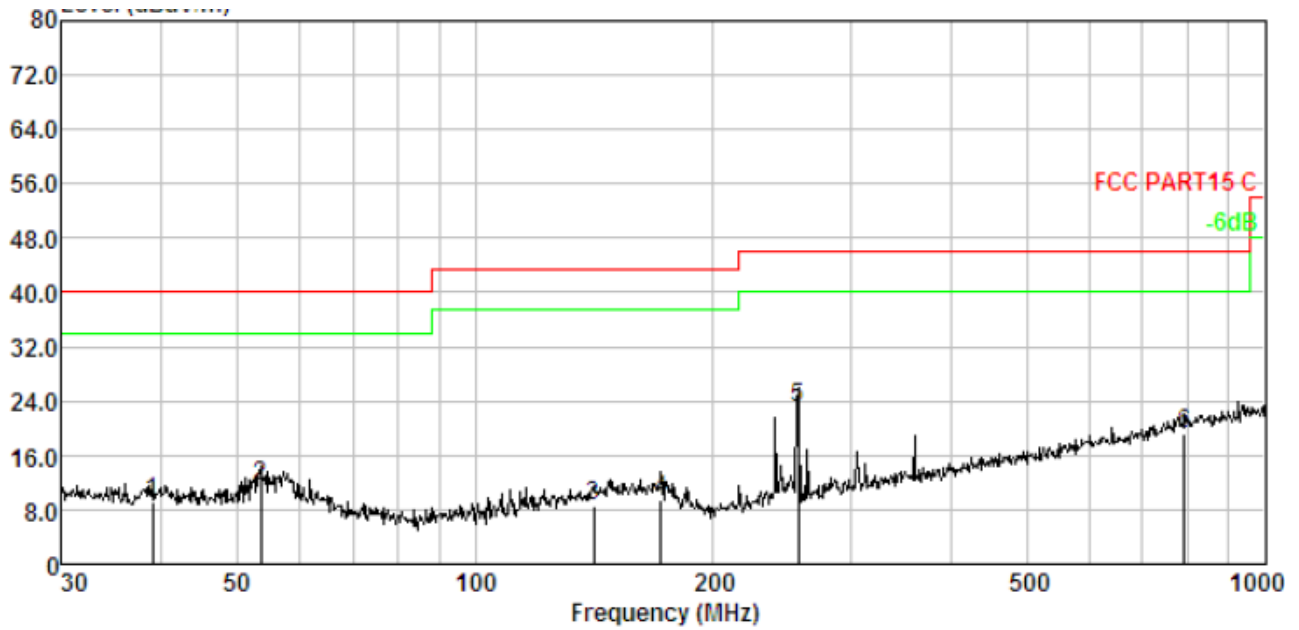

| No. | Freq MHz | Cable Loss dB | ANT Factor dB/m | Receiver Reading dBuV | Preamp Factor dB | Emission Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark |
|-----|----------|---------------|-----------------|-----------------------|------------------|-----------------------|--------------|---------------|--------|
| 1. | 39.024 | 1.29 | 13.63 | 24.17 | 30.06 | 9.03 | 40.00 | -30.97 | QP |
| 2. | 53.505 | 1.58 | 12.01 | 28.18 | 30.17 | 11.60 | 40.00 | -28.40 | QP |
| 3. | 141.330 | 2.46 | 13.43 | 23.13 | 30.51 | 8.51 | 43.50 | -34.99 | QP |
| 4. | 171.995 | 2.64 | 13.15 | 24.34 | 30.58 | 9.55 | 43.50 | -33.95 | QP |
| 5. | 256.521 | 3.00 | 12.06 | 38.60 | 30.72 | 22.94 | 46.00 | -23.06 | QP |
| 6. | 790.619 | 4.02 | 21.63 | 24.59 | 31.11 | 19.13 | 46.00 | -26.87 | QP |



Test plot for Vertical: GFSK(2402MHz)

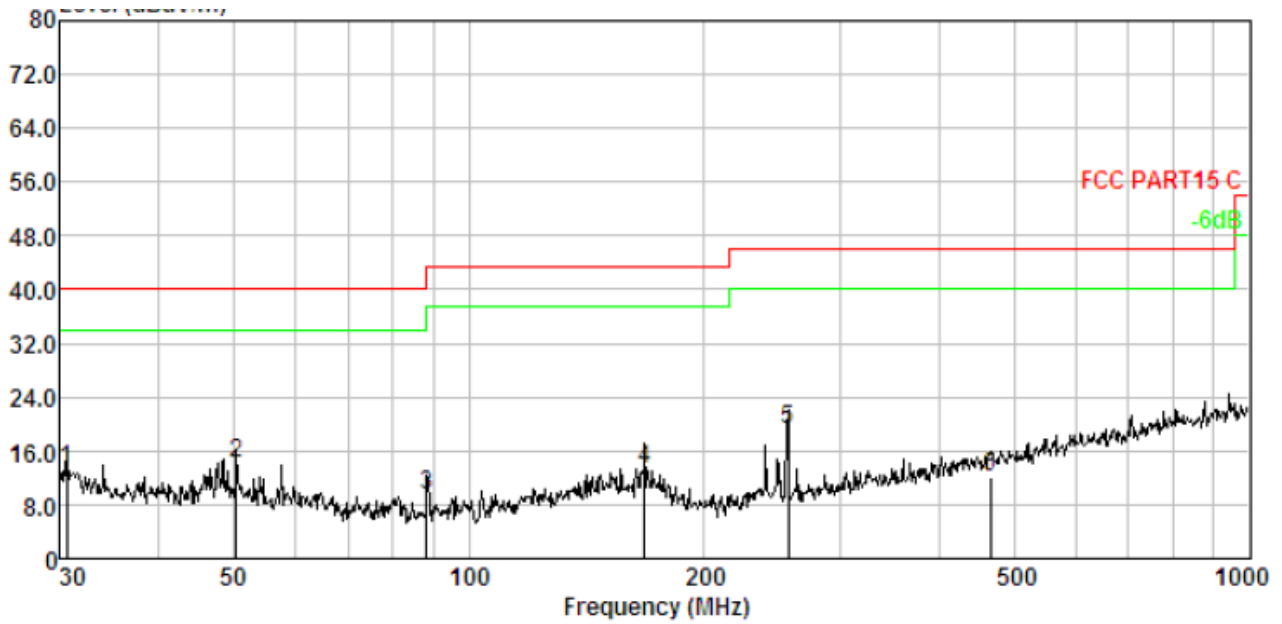

| No. | Freq MHz | Cable Loss dB | ANT Factor dB/m | Receiver Reading dBuV | Preamplifier Factor dB | Emission Level dBuV/m | Limit dBuV/m | Over Limit dB | Remark |
|-----|----------|---------------|-----------------|-----------------------|------------------------|-----------------------|--------------|---------------|--------|
| 1. | 30.531 | 1.07 | 13.24 | 28.94 | 29.98 | 13.27 | 40.00 | -26.73 | QP |
| 2. | 50.409 | 1.52 | 12.24 | 30.55 | 30.15 | 14.16 | 40.00 | -25.84 | QP |
| 3. | 88.342 | 2.03 | 9.10 | 28.55 | 30.35 | 9.33 | 43.50 | -34.17 | QP |
| 4. | 167.824 | 2.61 | 13.45 | 27.76 | 30.57 | 13.25 | 43.50 | -30.25 | QP |
| 5. | 256.521 | 3.00 | 12.06 | 34.80 | 30.72 | 19.14 | 46.00 | -26.86 | QP |
| 6. | 465.599 | 3.54 | 16.62 | 22.78 | 30.92 | 12.02 | 46.00 | -33.98 | QP |



Test Frequency 1GHz-18GHz

Low Channel (2402MHz) Worst case GFSK

| Frequency (MHz) | S.A Reading (dBuV) | Detector (PK/AV) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|--------------------|------------------|----------------|--------------------|-----------------|--------------------|-------------------------|----------------|-------------|
| 4804 | 29.15 | AV | V | 8.02 | 9.13 | 9.15 | 37.15 | 54 | -16.85 |
| 4804 | 30.22 | AV | H | 8.02 | 9.13 | 9.15 | 38.22 | 54 | -15.78 |
| 4804 | 31.48 | PK | V | 8.02 | 9.13 | 9.15 | 39.48 | 74 | -34.52 |
| 4804 | 32.57 | PK | H | 8.02 | 9.13 | 9.15 | 40.57 | 74 | -33.43 |
| 15428 | 30.17 | AV | V | 7.68 | 10.05 | 9.34 | 38.56 | 54 | -15.44 |
| 15428 | 31.29 | AV | H | 7.68 | 10.05 | 9.34 | 39.68 | 54 | -14.32 |
| 15428 | 32.47 | PK | V | 7.68 | 10.05 | 9.34 | 40.86 | 74 | -33.14 |
| 15428 | 33.24 | PK | H | 7.68 | 10.05 | 9.34 | 41.63 | 74 | -32.37 |

Middle Channel (2441MHz) Worst case π/4-DQPSK

| Frequency (MHz) | S.A Reading (dBuV) | Detector (PK/AV) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|--------------------|------------------|----------------|--------------------|-----------------|--------------------|-------------------------|----------------|-------------|
| 4882 | 30.45 | AV | V | 7.26 | 10.11 | 10.48 | 37.34 | 54 | -16.66 |
| 4882 | 32.26 | AV | H | 7.26 | 10.11 | 10.48 | 39.15 | 54 | -14.85 |
| 4882 | 33.1 | PK | V | 7.26 | 10.11 | 10.48 | 39.99 | 74 | -34.01 |
| 4882 | 35.92 | PK | H | 7.26 | 10.11 | 10.48 | 42.81 | 74 | -31.19 |
| 13259 | 29.46 | AV | V | 8.24 | 11.28 | 13.27 | 35.71 | 54 | -18.29 |
| 13259 | 30.61 | AV | H | 8.24 | 11.28 | 13.27 | 36.86 | 54 | -17.14 |
| 13259 | 33.57 | PK | V | 8.24 | 11.28 | 13.27 | 39.82 | 74 | -34.18 |
| 13259 | 35.69 | PK | H | 8.24 | 11.28 | 13.27 | 41.94 | 74 | -32.06 |

High Channel (2480MHz) Worst case π/4-DQPSK

| Frequency (MHz) | S.A Reading (dBuV) | Detector (PK/AV) | Polarity (H/V) | Ant. Factor (dB/m) | Cable Loss (dB) | Pre-Amp. Gain (dB) | Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|--------------------|------------------|----------------|--------------------|-----------------|--------------------|-------------------------|----------------|-------------|
| 4960 | 28.43 | AV | V | 8.32 | 10.27 | 9.48 | 37.54 | 54 | -16.46 |
| 4960 | 29.05 | AV | H | 8.32 | 10.27 | 9.48 | 38.16 | 54 | -15.84 |
| 4960 | 31.46 | PK | V | 8.32 | 10.27 | 9.48 | 40.57 | 74 | -33.43 |
| 4960 | 35.24 | PK | H | 8.32 | 10.27 | 9.48 | 44.35 | 74 | -29.65 |
| 16284 | 29.68 | AV | V | 9.11 | 11.22 | 12.74 | 37.27 | 54 | -16.73 |
| 16284 | 30.29 | AV | H | 9.11 | 11.22 | 12.74 | 37.88 | 54 | -16.12 |
| 16284 | 33.6 | PK | V | 9.11 | 11.22 | 12.74 | 41.19 | 74 | -32.81 |
| 16284 | 36.78 | PK | H | 9.11 | 11.22 | 12.74 | 44.37 | 74 | -29.63 |

Note: 1. The testing has been conformed to 10*2480MHz=24800MHz.

- 2. All other emissions more than 30dB below the limit.
- 3. Factor = Antenna Factor + Cable Loss – Pre-amplifier.
 Emission Level = Reading + Factor
 Margin=Emission Level-Limit



PRECISE TESTING

Report No.: PTC18041124302E-FC01

Test Frequency: From 18GHz to 25GHz

The measurements were more than 20dB below the limit and not reported.



8 BAND EDGE & CONDUCT SPURIOUS EMISSIONS

8.1 REQUIREMENT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

8.2 TEST PROCEDURE

For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

| EMI Test Receiver | Setting |
|-------------------|----------|
| Attenuation | Auto |
| RBW | 100KHz |
| VBW | 300KHz |
| Detector | Peak |
| Trace | Max hold |

For Radiated emission Test

The EUT was placed on a styrofoam table which is 1.5m above ground plane.

The measurement procedure at the band edges was simplified by performing the measurement in just one plot. Both, the in-band-emission and the unwanted emission were be encompassed by the span. After trace stabilization, the maximum peak was be determined by a peak detector and the value was marked by an appropriate limit line. The second limit line, which is 20dB below the first, marks the limit for the emissions in the unrestricted band. A maximum-peak-detector marks the highest emission in the unrestricted band next to the band edge.



The measurements were performed at the lower end of the 2.4GHz band.

Use the following spectrum analyzer settings:

For Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 1MHz, video bandwidth 3MHz:

| EMI Test Receiver | Setting |
|-------------------|----------|
| Attenuation | Auto |
| RBW | 1MHz |
| VBW | 3MHz |
| Detector | Peak |
| Trace | Max hold |

For Non-Restricted Band, When spectrum scanned above 1GHz setting resolution bandwidth 100KHz, video bandwidth 300KHz:

| EMI Test Receiver | Setting |
|-------------------|----------|
| Attenuation | Auto |
| RBW | 100KHz |
| VBW | 300KHz |
| Detector | Peak |
| Trace | Max hold |





8.3 TEST RESULTS

1. For Conducted Test



For Non-Hopping Mode:

GFSK

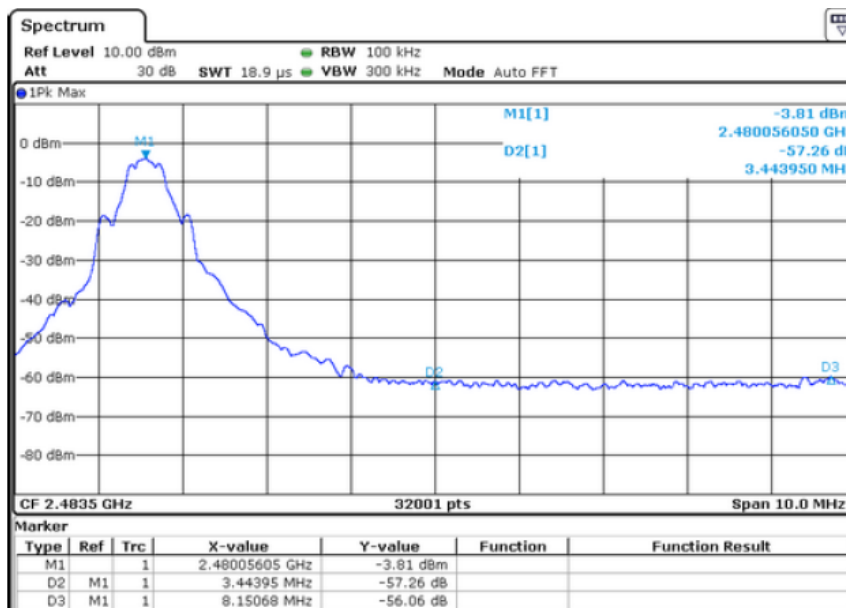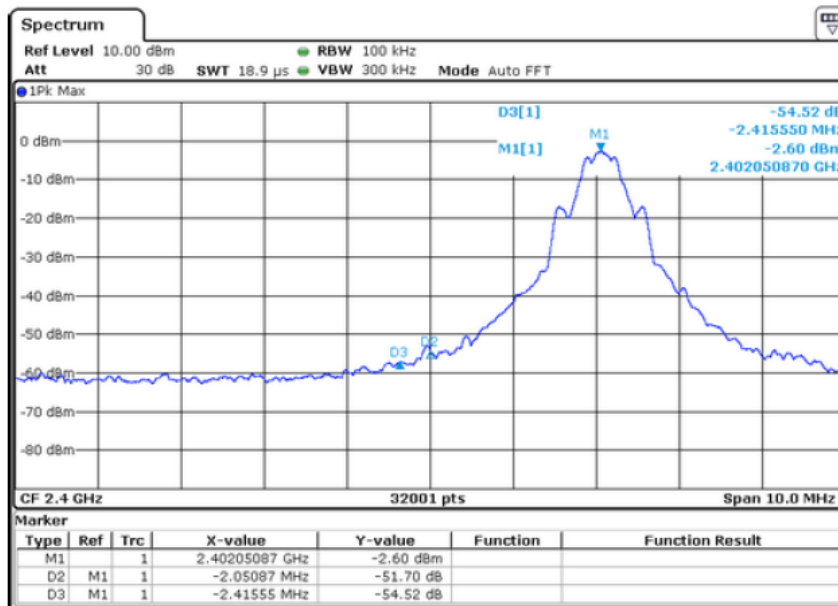





$\pi/4$ -DQPSK

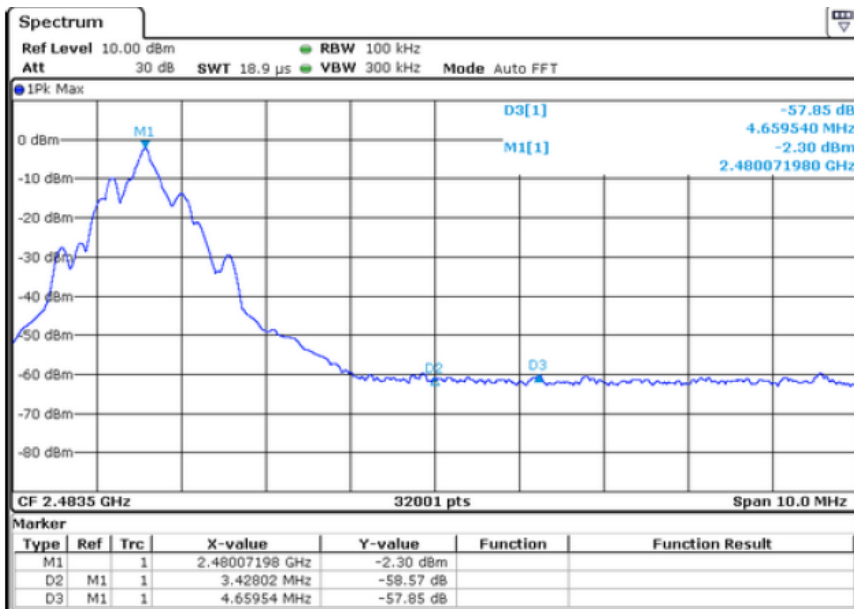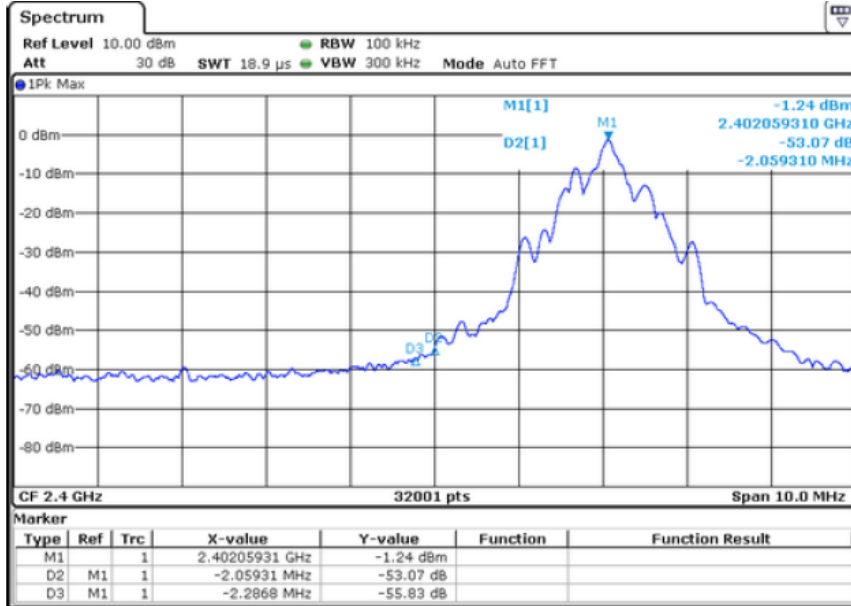





8DPSK

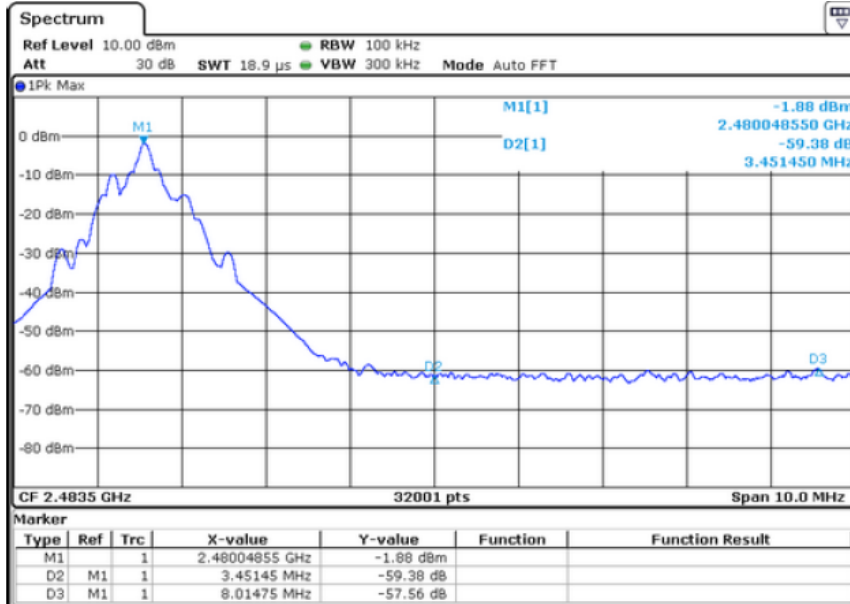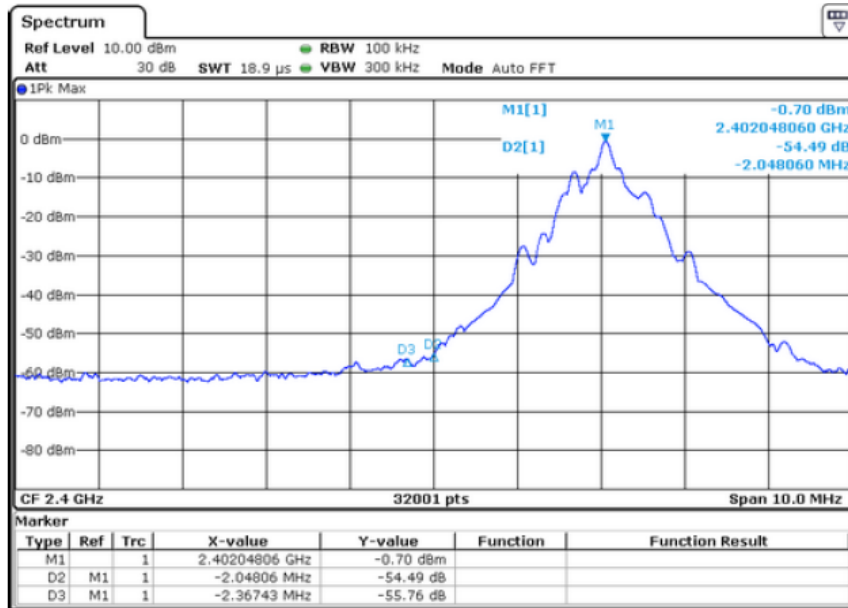





For Hopping Mode:

GFSK

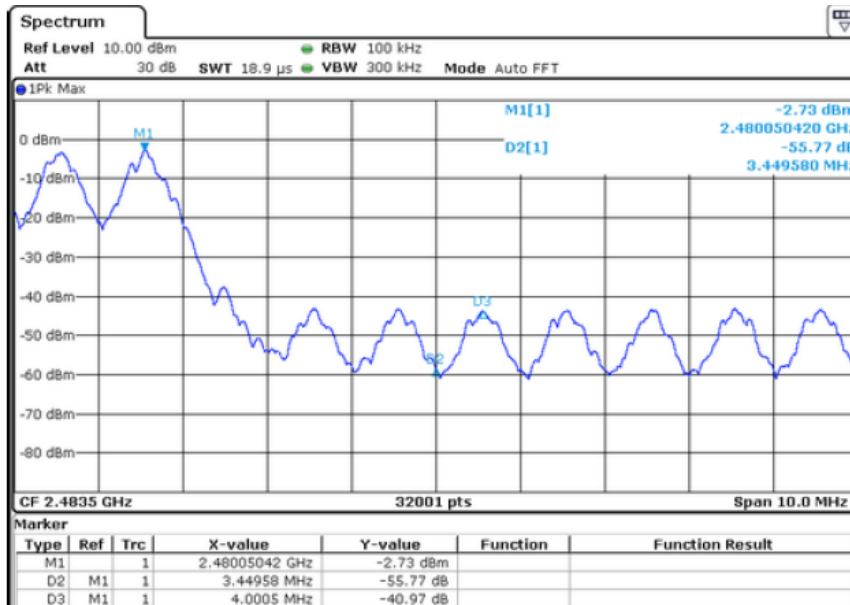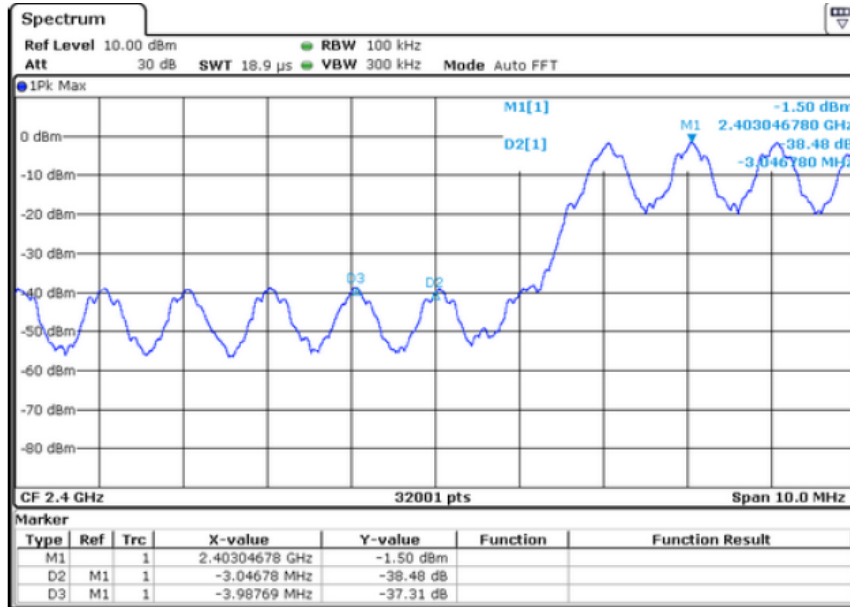





$\pi/4$ -DQPSK

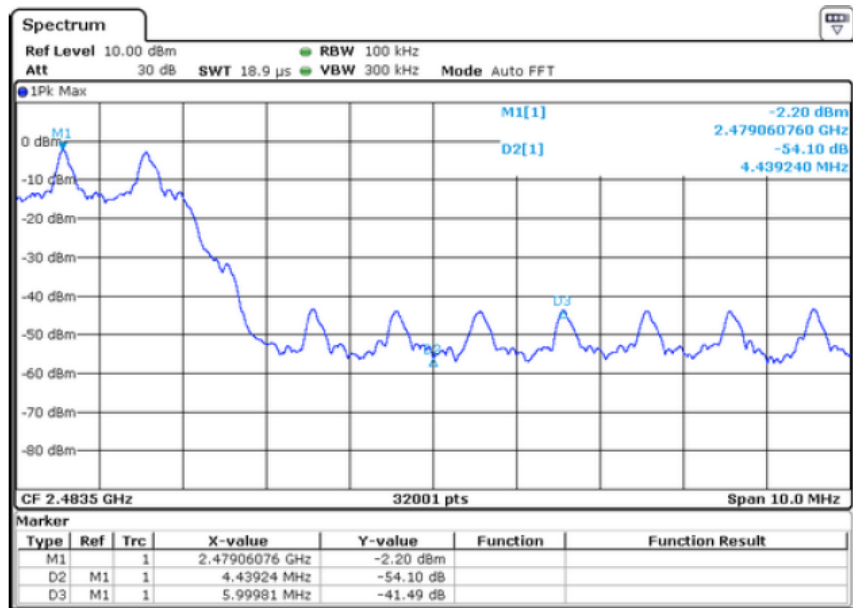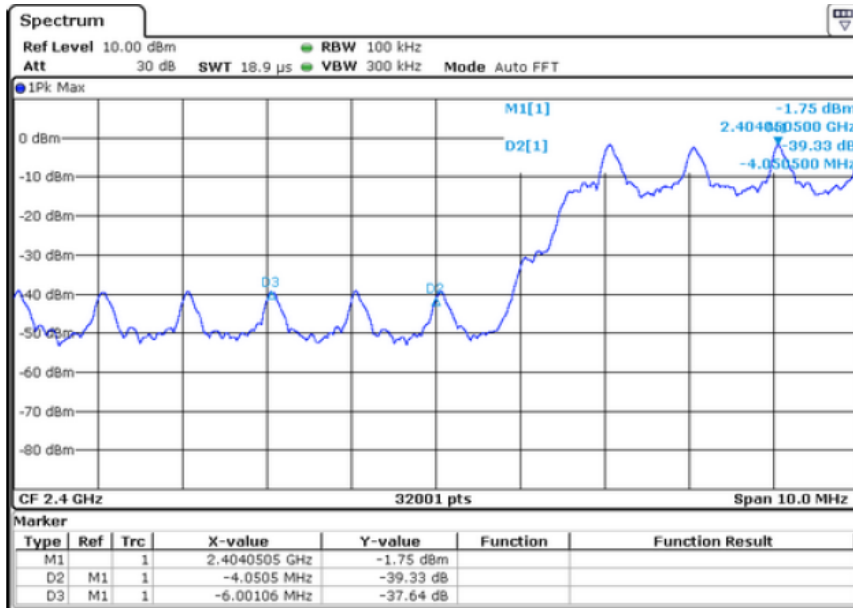



8DPSK

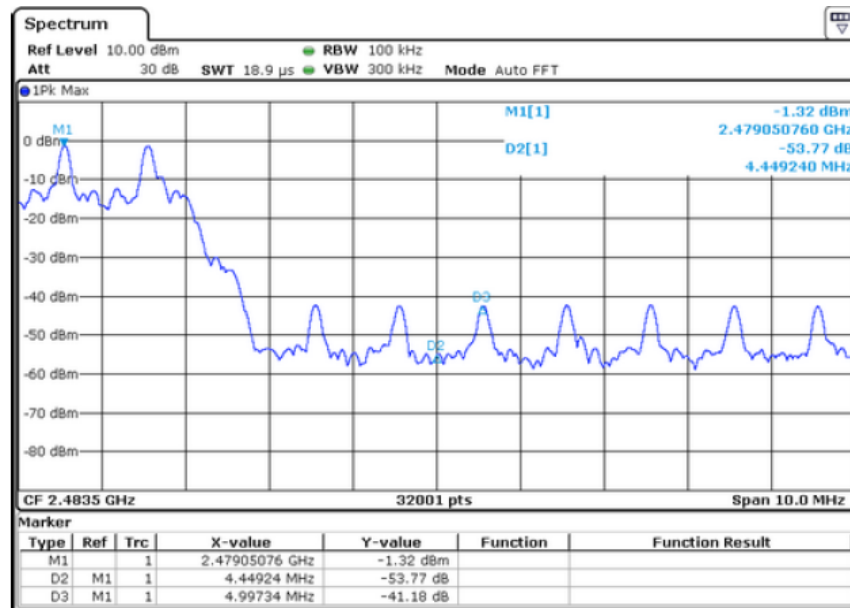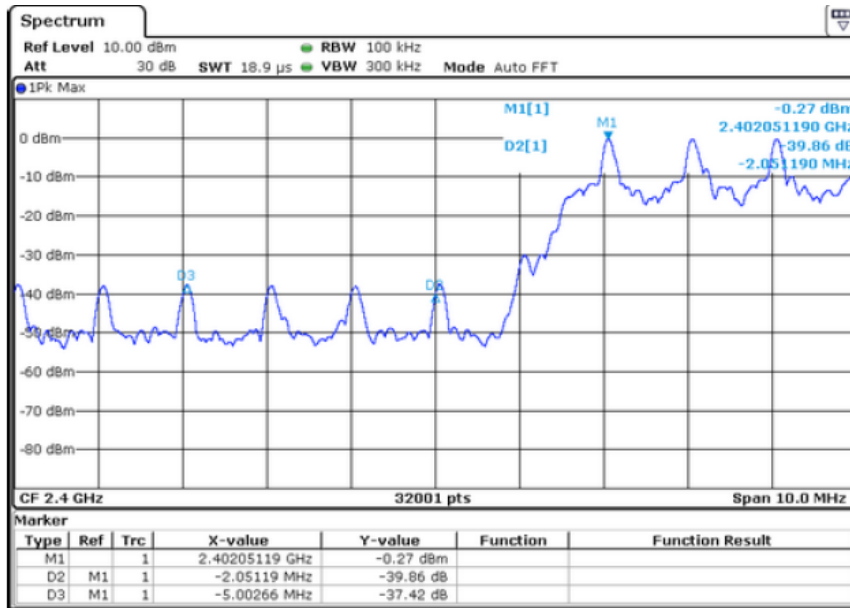






PRECISE TESTING

Report No.: PTC18041124302E-FC01


For Conduct spurious emissions



GFSK

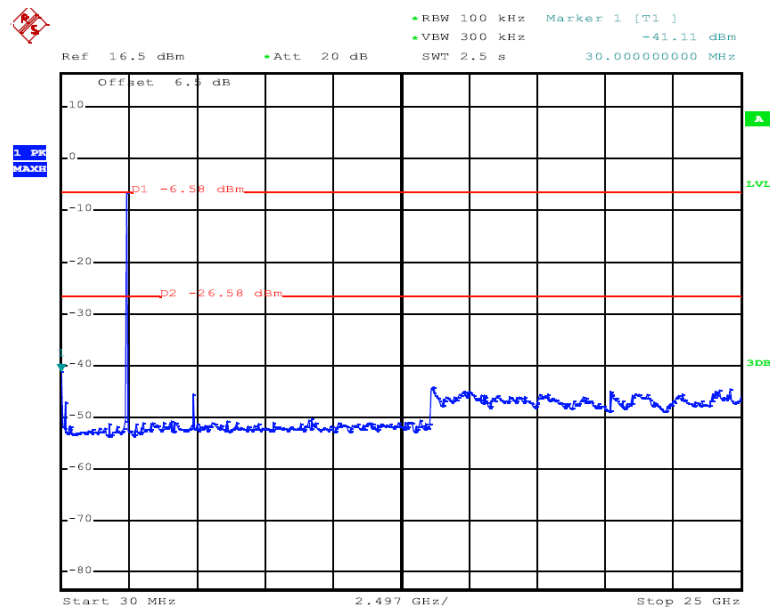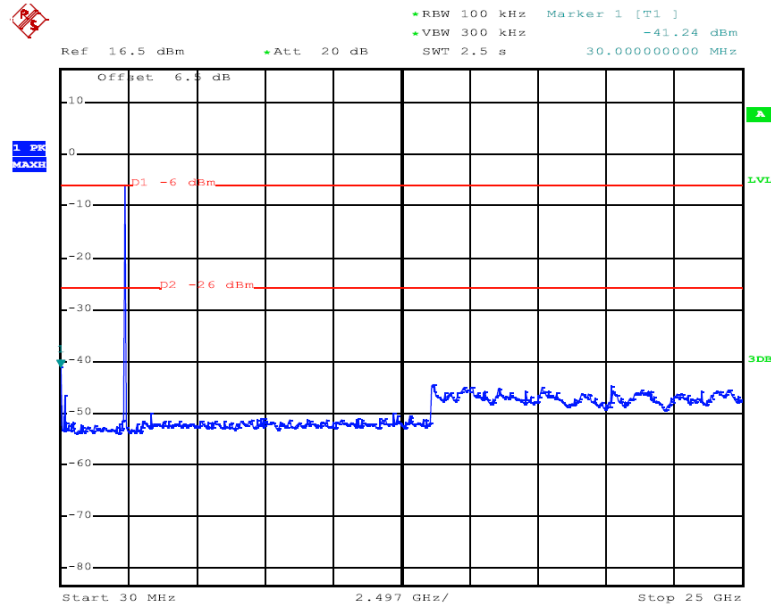

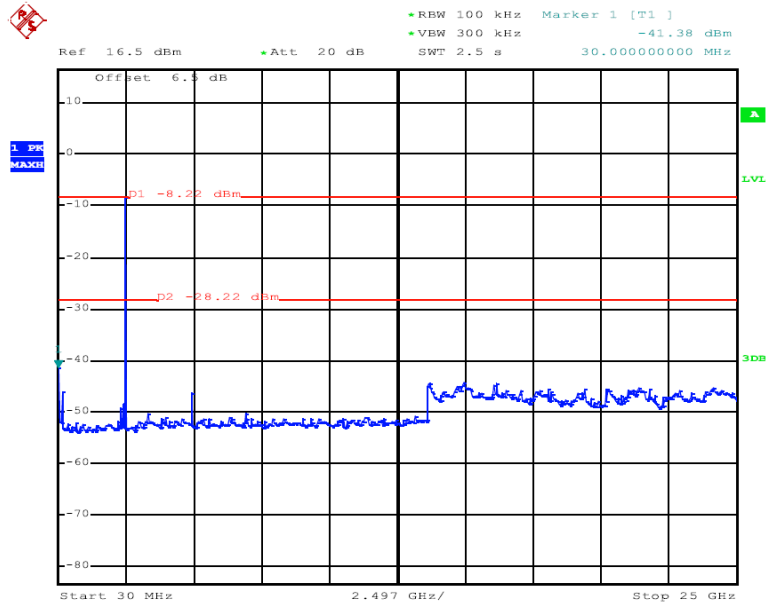



$\pi/4$ -DQPSK

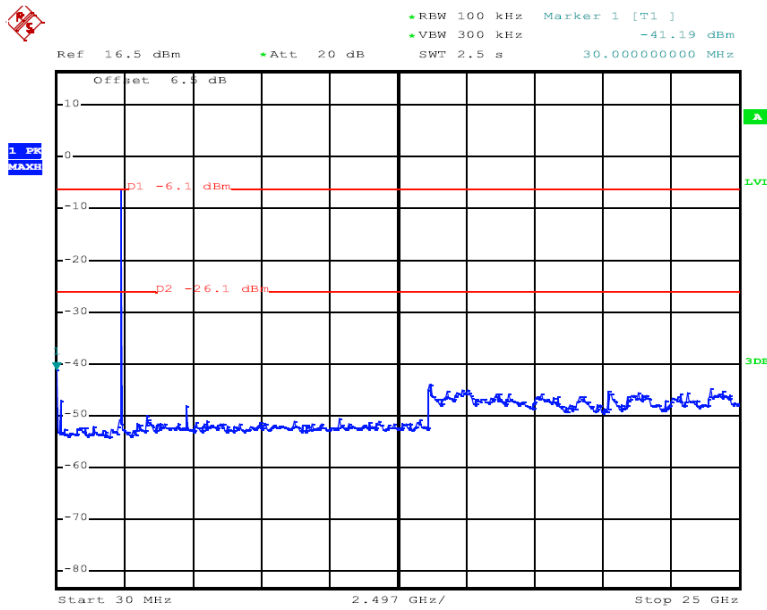

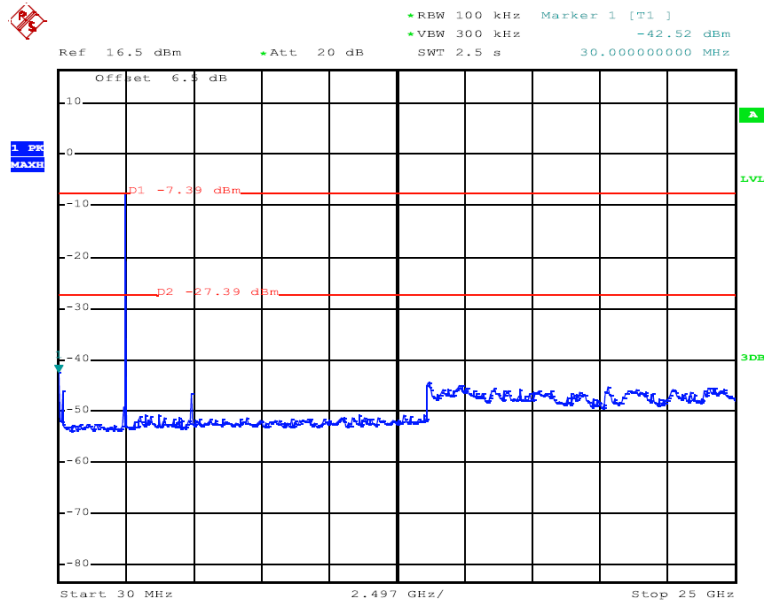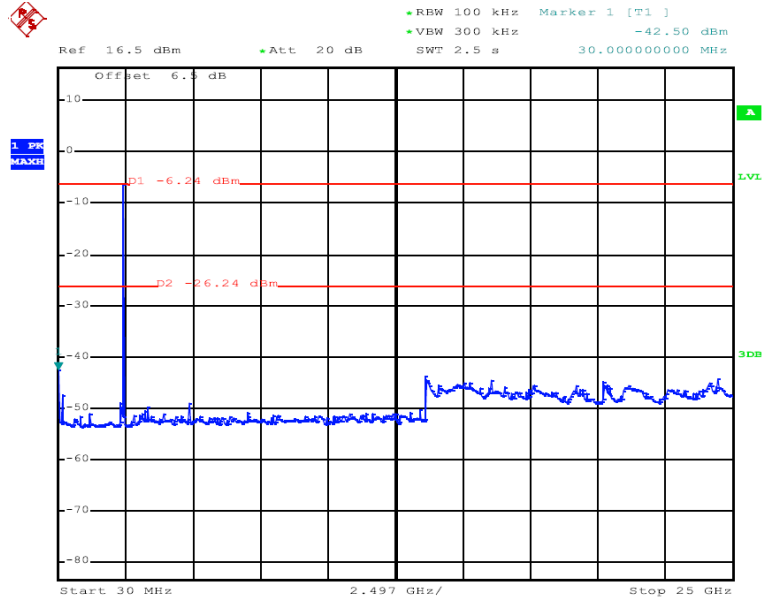




8DPSK

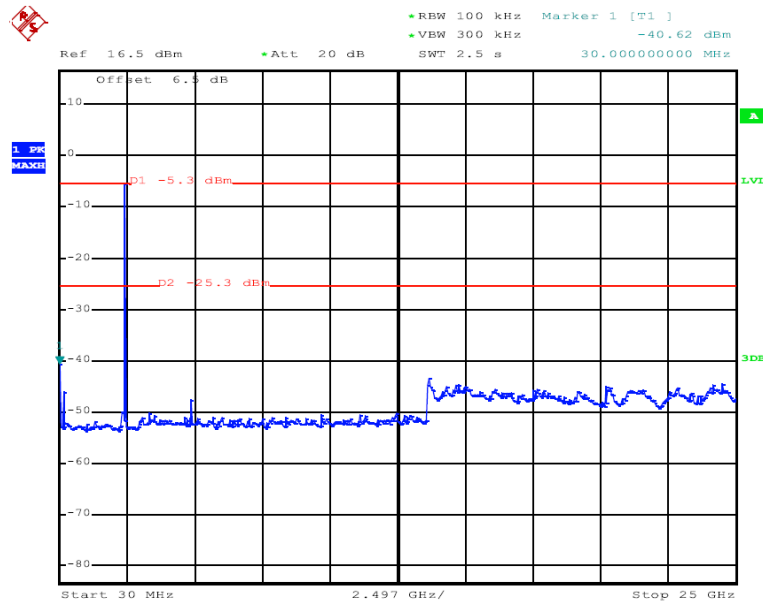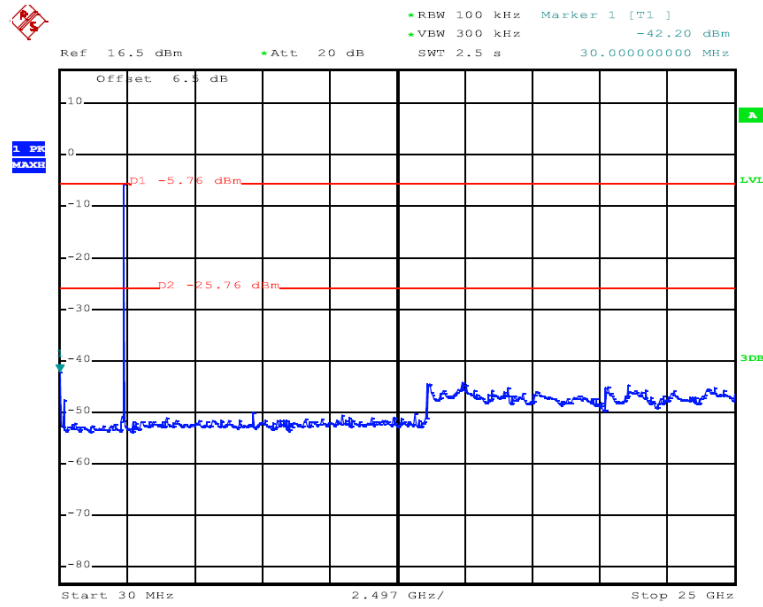



PRECISE TESTING

Report No.: PTC18041124302E-FC01

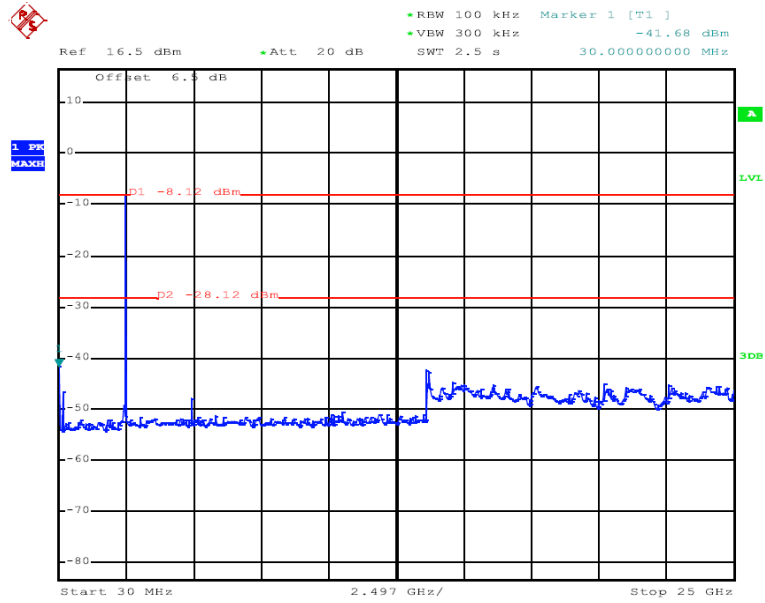




2. For Radiated Test

Worst Test Modulation: GFSK

For Non-Hopping Mode:

Horizontal

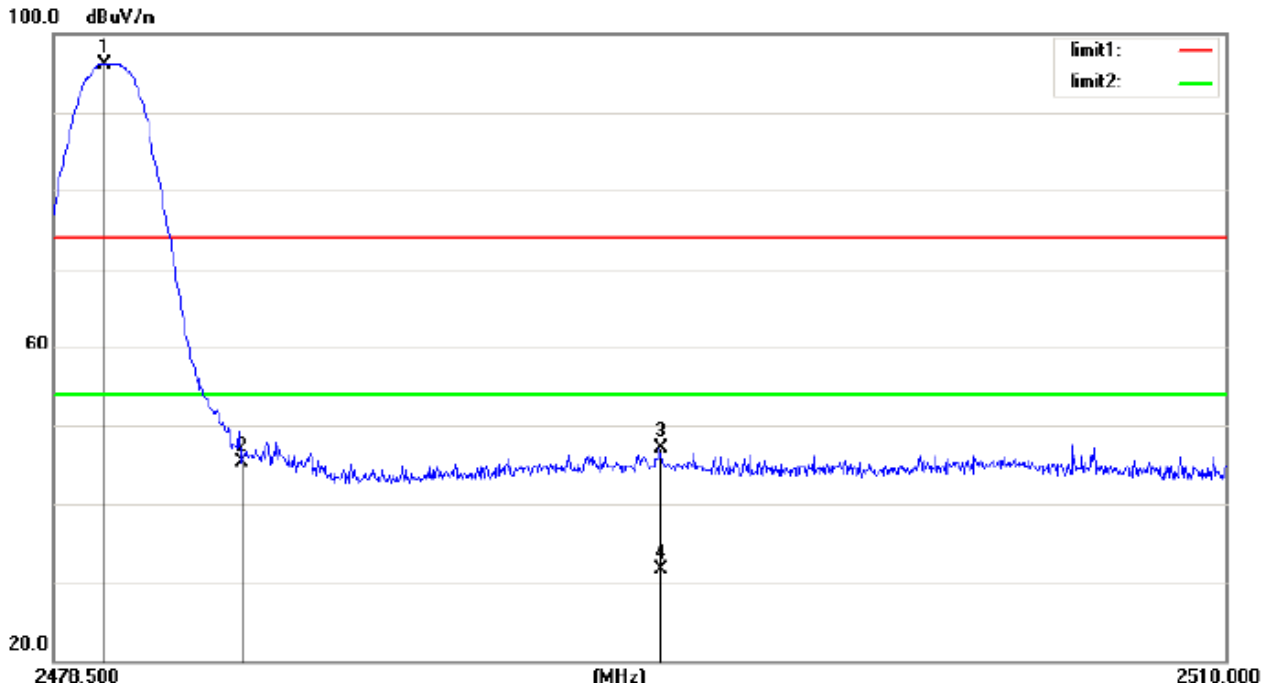


Mode:DSS(TX2480)

Note:

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Antenna Height | Table Degree | |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | cm | degree | Comment |
| 1 | * | 2479.823 | 101.39 | -5.20 | 96.19 | 74.00 | 22.19 | peak | 0 | |
| 2 | | 2483.500 | 50.54 | -5.18 | 45.36 | 74.00 | -28.64 | peak | 0 | |
| 3 | | 2494.754 | 52.20 | -5.10 | 47.10 | 74.00 | -26.90 | peak | 0 | |
| 4 | | 2494.754 | 36.55 | -5.10 | 31.45 | 54.00 | -22.55 | AVG | 0 | |



Vertical:

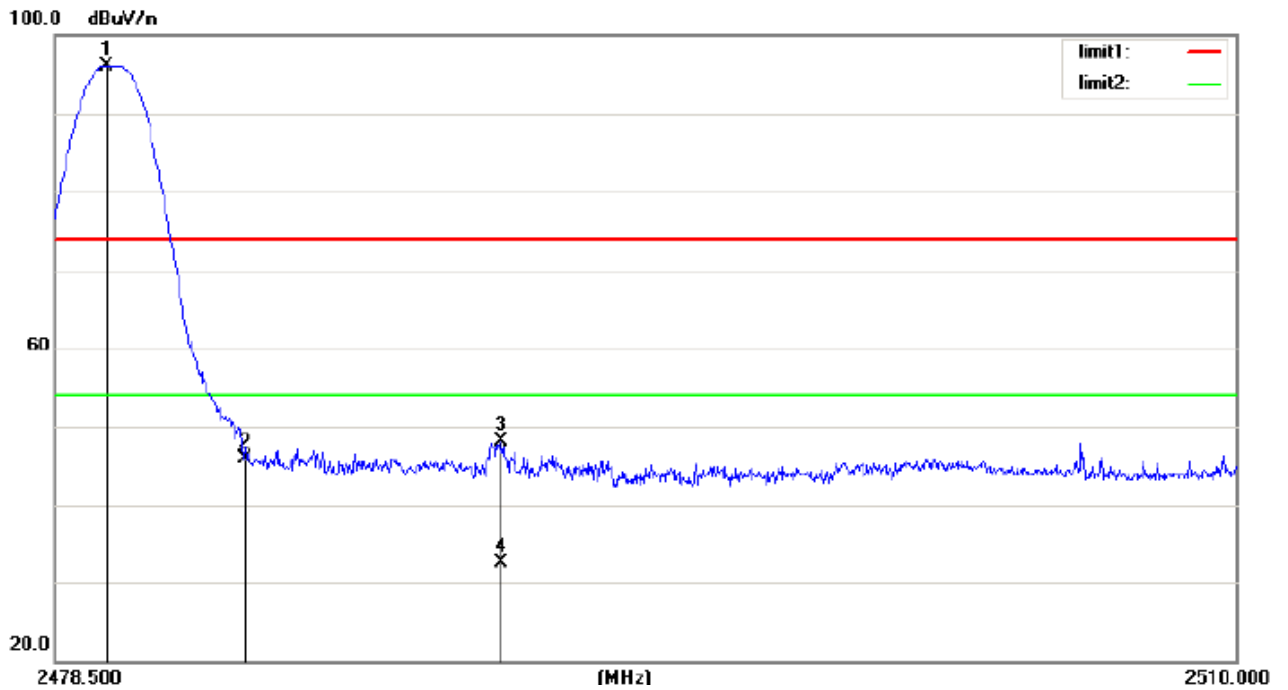


Mode:DSS(TX2480)

Note:

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Antenna Height cm | Table Degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|-------------------------|-----------------|---------|
| 1 | * | 2479.823 | 101.39 | -5.20 | 96.19 | 74.00 | 22.19 | peak | 0 | |
| 2 | | 2483.500 | 51.04 | -5.18 | 45.86 | 74.00 | -28.14 | peak | 0 | |
| 3 | | 2490.344 | 53.16 | -5.12 | 48.04 | 74.00 | -25.96 | peak | 0 | |
| 4 | | 2490.344 | 37.54 | -5.12 | 32.42 | 54.00 | -21.58 | AVG | 0 | |



Horizontal:

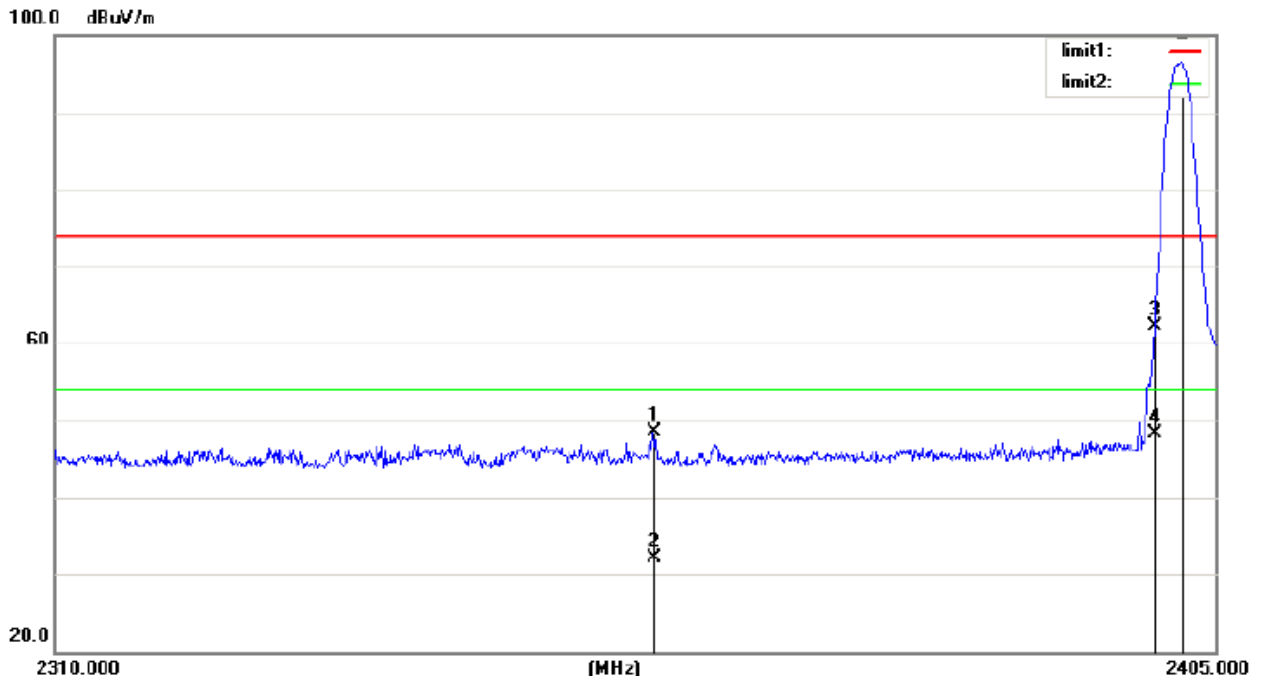


Mode: DSS(TX2402)

Note:

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Antenna Height | Table Degree | Comment |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | cm | degree | |
| 1 | | 2358.450 | 54.47 | -6.03 | 48.44 | 74.00 | -25.56 | peak | 0 | |
| 2 | | 2358.450 | 38.15 | -6.03 | 32.12 | 54.00 | -21.88 | AVG | 0 | |
| 3 | | 2400.000 | 68.07 | -5.75 | 62.32 | 74.00 | -11.68 | peak | 0 | |
| 4 | | 2400.000 | 54.00 | -5.75 | 48.25 | 54.00 | -5.75 | AVG | 0 | |
| 5 | * | 2402.245 | 102.15 | -5.73 | 96.42 | 74.00 | 22.42 | peak | 0 | |



Vertical:

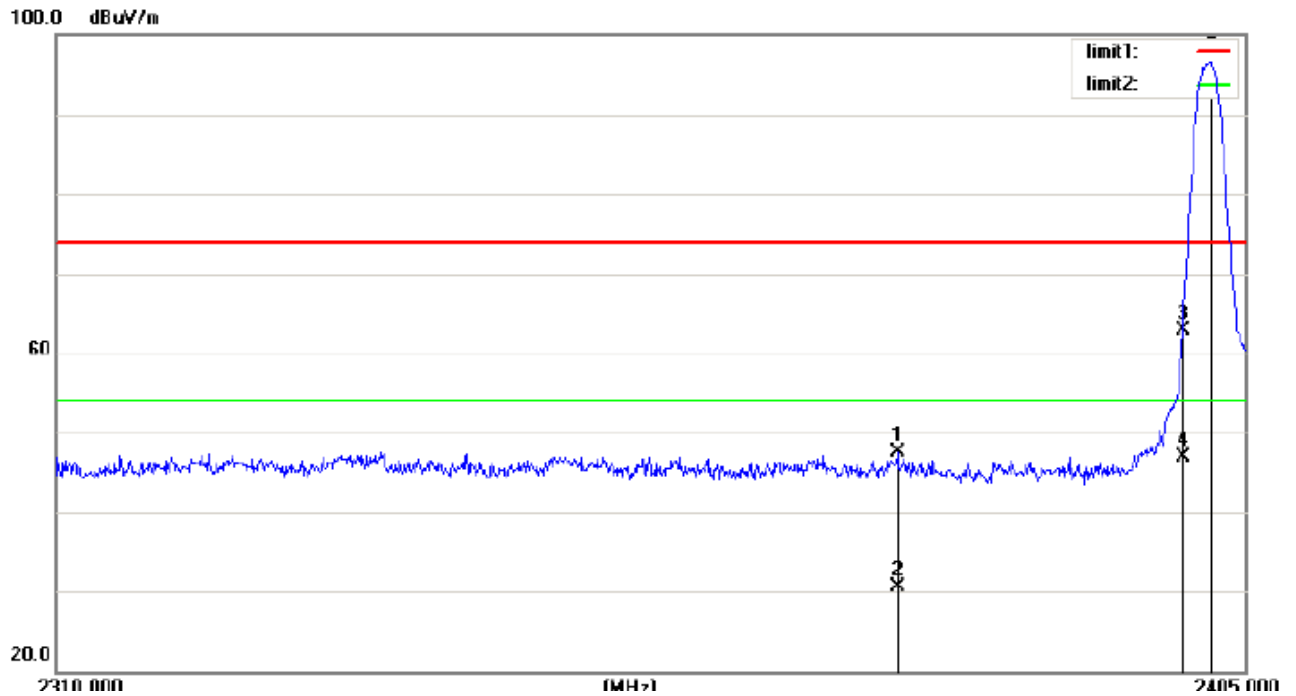

Mode: DSS(TX2402)

Note:

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Antenna Height | Table Degree | |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | cm | degree | Comment |
| 1 | | 2376.880 | 53.45 | -5.91 | 47.54 | 74.00 | -26.46 | peak | 0 | |
| 2 | | 2376.880 | 36.48 | -5.91 | 30.57 | 54.00 | -23.43 | AVG | 0 | |
| 3 | | 2400.000 | 68.68 | -5.75 | 62.93 | 74.00 | -11.07 | peak | 0 | |
| 4 | | 2400.000 | 52.69 | -5.75 | 46.94 | 54.00 | -7.06 | AVG | 0 | |
| 5 | * | 2402.245 | 102.23 | -5.73 | 96.50 | 74.00 | 22.50 | peak | 0 | |



9 20 dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013


9.1 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW =100kHz, VBW = 300kHz

9.2 Test Result

Test Mode: CH00 / CH39 / CH78 (GFSK/(1Mbps)Mode)

| Channel number | Channel frequency (MHz) | 20dB Down BW(kHz) |
|----------------|-------------------------|-------------------|
| 00 | 2402 | 1098 |
| 39 | 2441 | 1104 |
| 78 | 2480 | 1104 |

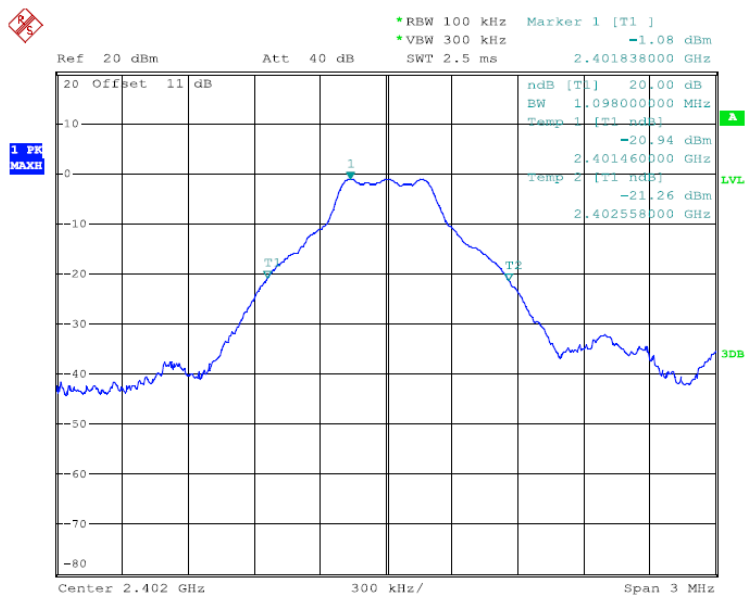


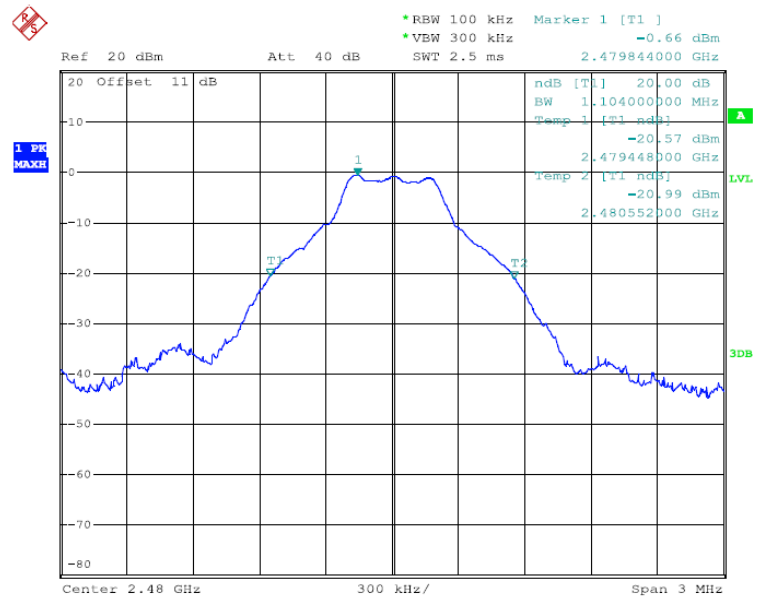
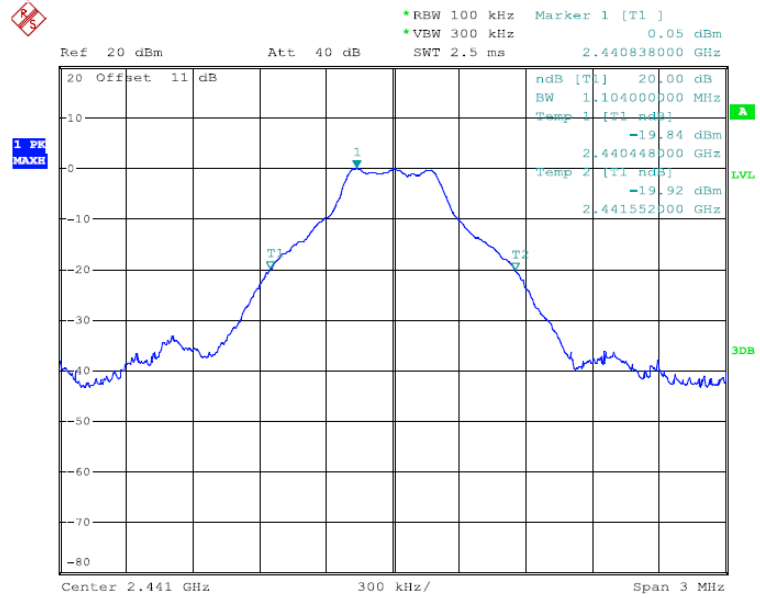




Test Mode: CH00 / CH39 / CH78 (Π/4-DQPSK /(2Mbps)Mode)

| Channel number | Channel frequency (MHz) | 20dB Down BW(kHz) |
|----------------|-------------------------|-------------------|
| 00 | 2402 | 1368 |
| 39 | 2441 | 1356 |
| 78 | 2480 | 1362 |

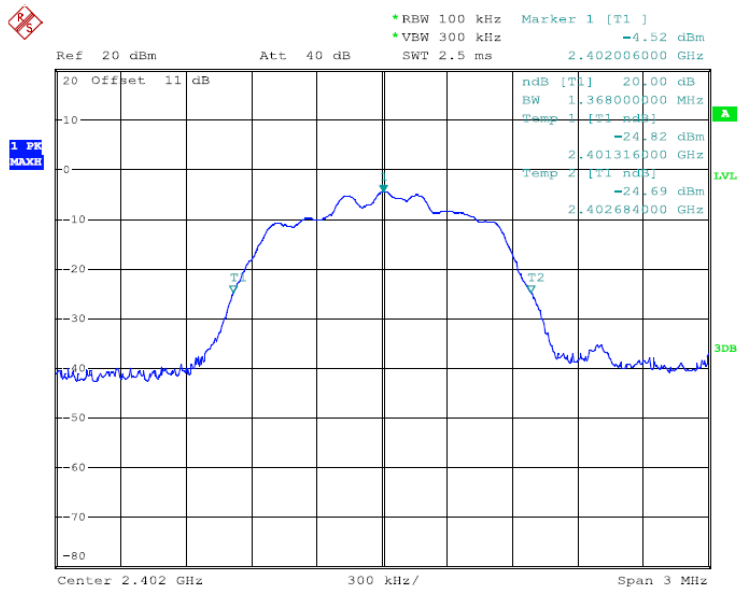


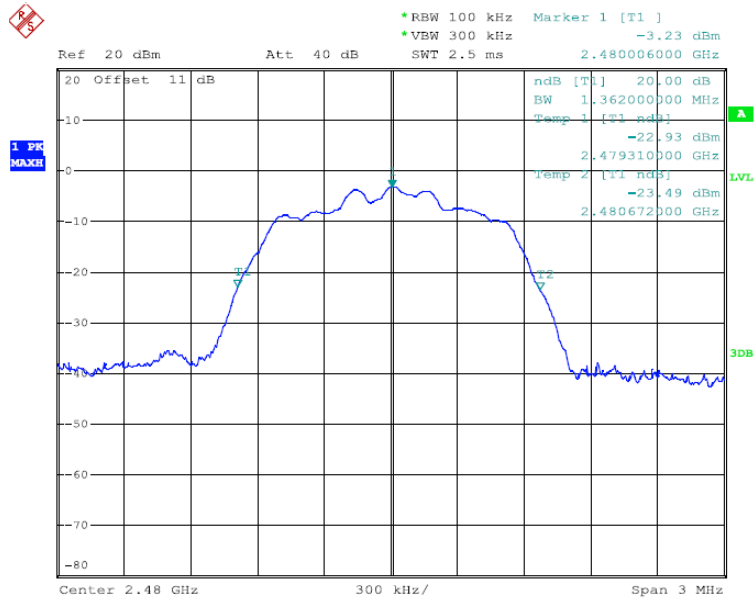
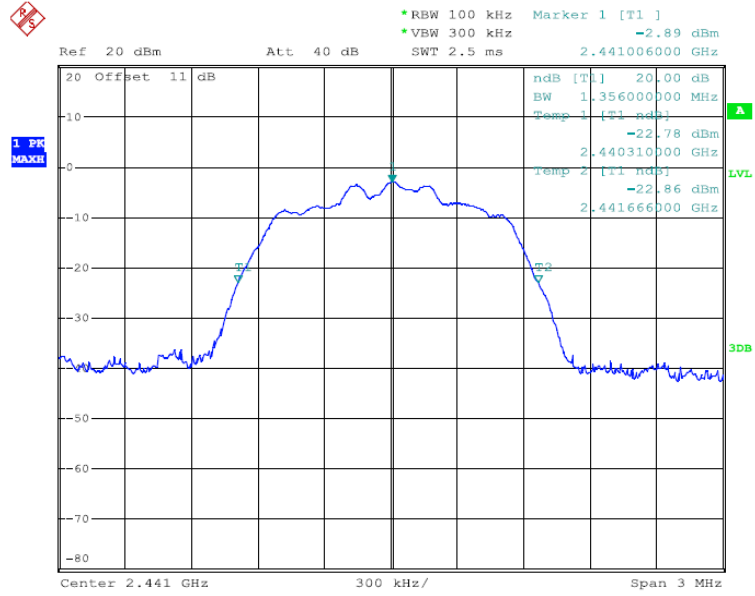




Test Mode: CH00 / CH39 / CH78 (8DPSK(3Mbps)Mode)

| Channel number | Channel frequency (MHz) | 20dB Down BW(kHz) |
|----------------|-------------------------|-------------------|
| 00 | 2402 | 1350 |
| 39 | 2441 | 1344 |
| 78 | 2480 | 1350 |

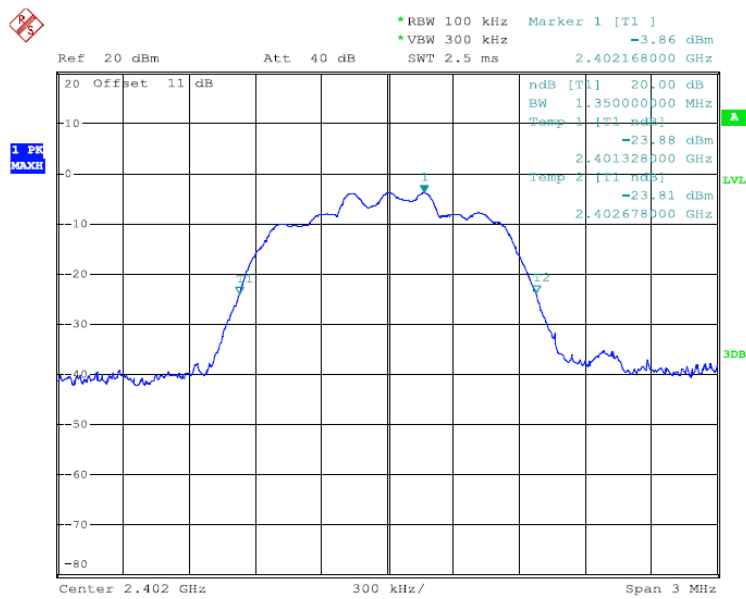

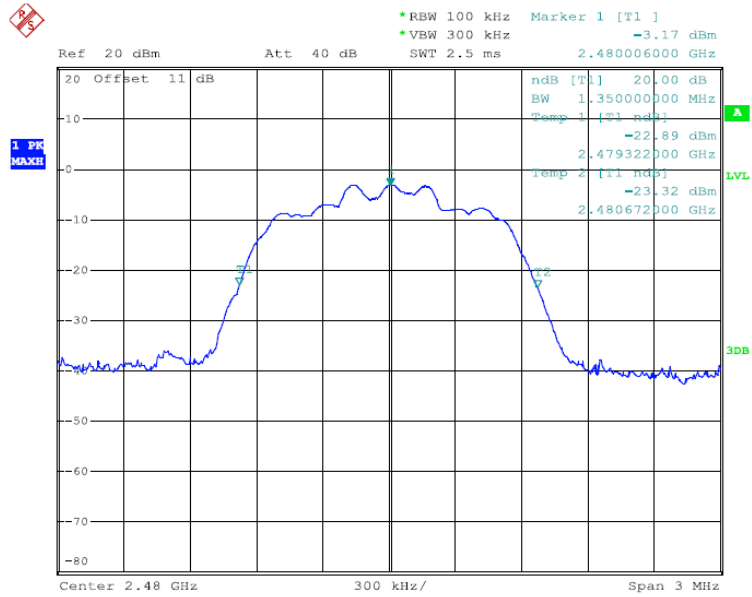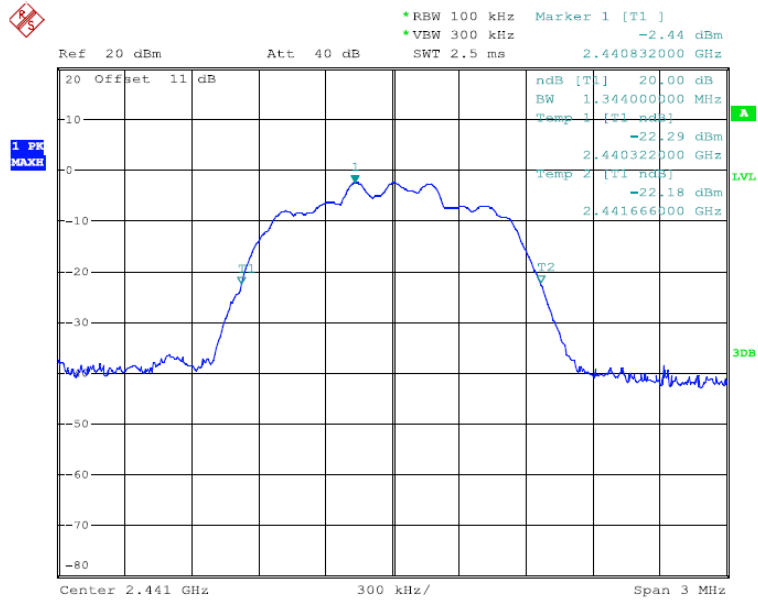



10 Maximum Peak Output Power

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.



Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.


10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.



10.2 Test Result


| GFSK(1Mbps) | | | | | |
|--------------|-----------|-----------------------------|-----------------------------|-------|-----------|
| Test Channel | Frequency | Conducted Output Peak Power | Conducted Output Peak Power | LIMIT | Pass/Fail |
| | (MHz) | (dBm) | (W) | (W) | |
| CH00 | 2402 | -0.59 | 0.0009 | 1 | Pass |
| CH39 | 2441 | 0.35 | 0.0011 | 1 | Pass |
| CH78 | 2480 | -0.34 | 0.0009 | 1 | Pass |

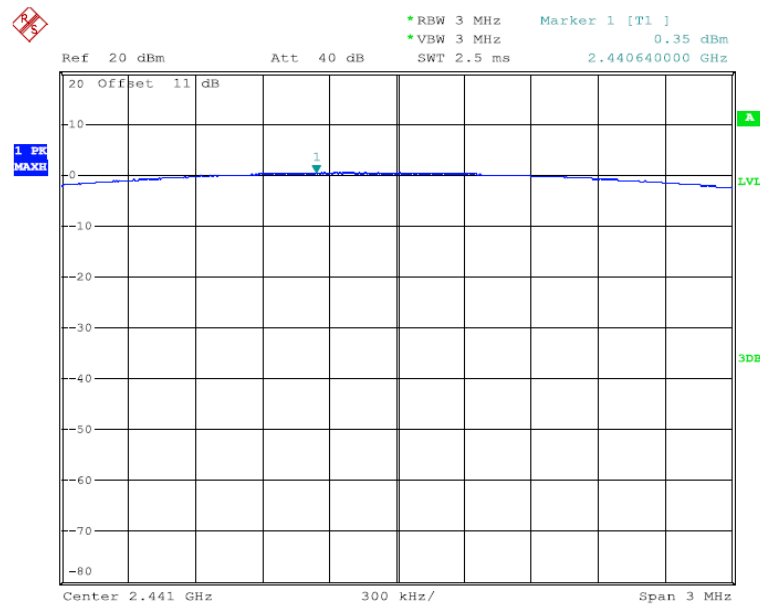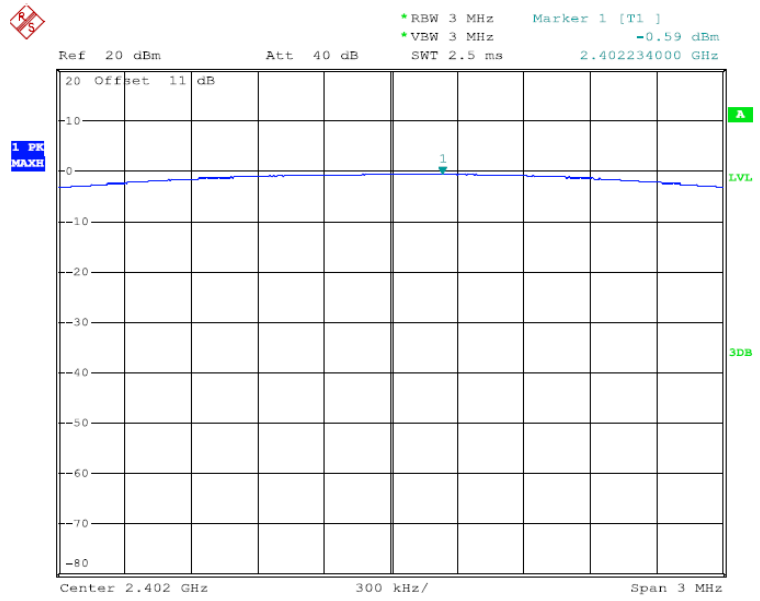


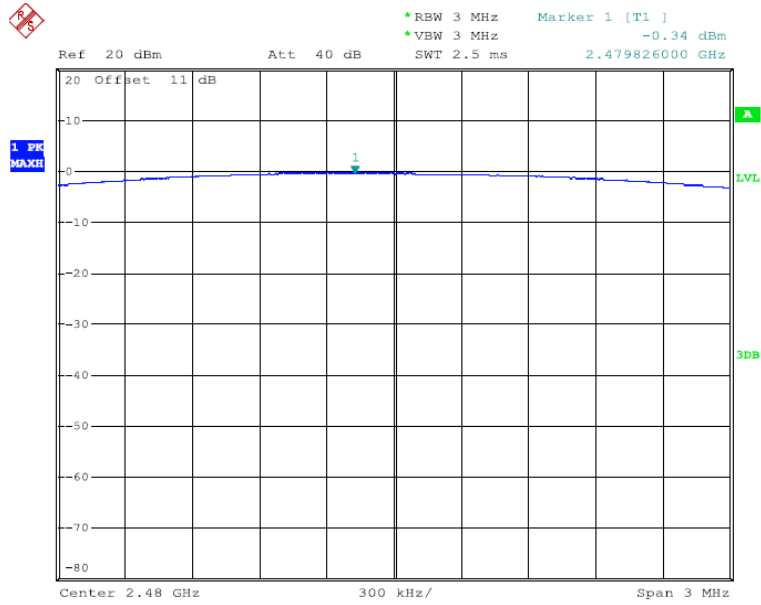



| π/4QPSK(2Mbps) | | | | | |
|----------------|-----------|-----------------------------|-----------------------------|-------|-----------|
| Test Channel | Frequency | Conducted Output Peak Power | Conducted Output Peak Power | LIMIT | Pass/Fail |
| | (MHz) | (dBm) | (W) | (W) | |
| CH00 | 2402 | -2.26 | 0.0006 | 0.125 | Pass |
| CH39 | 2441 | -1.68 | 0.0007 | 0.125 | Pass |
| CH78 | 2480 | -2.39 | 0.0006 | 0.125 | Pass |

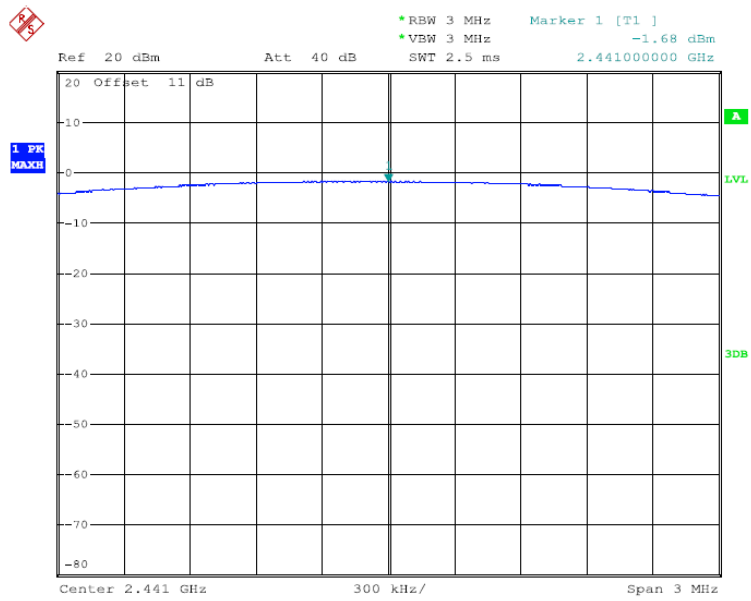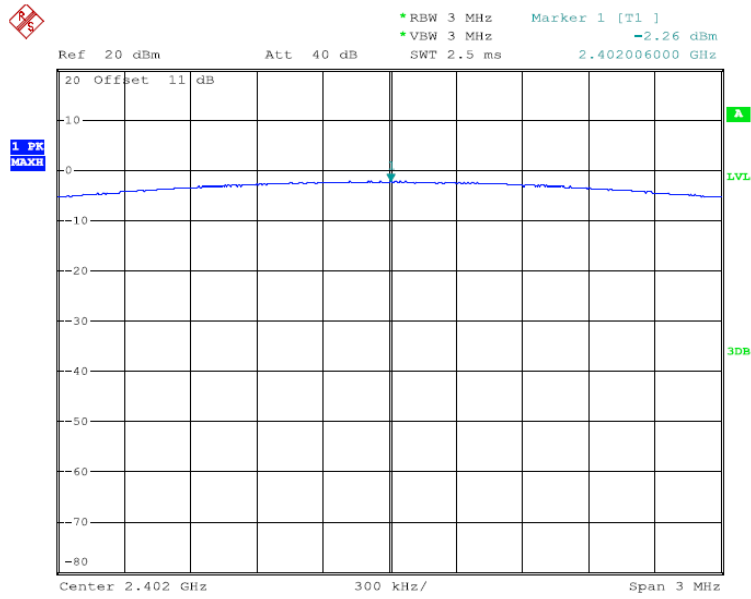

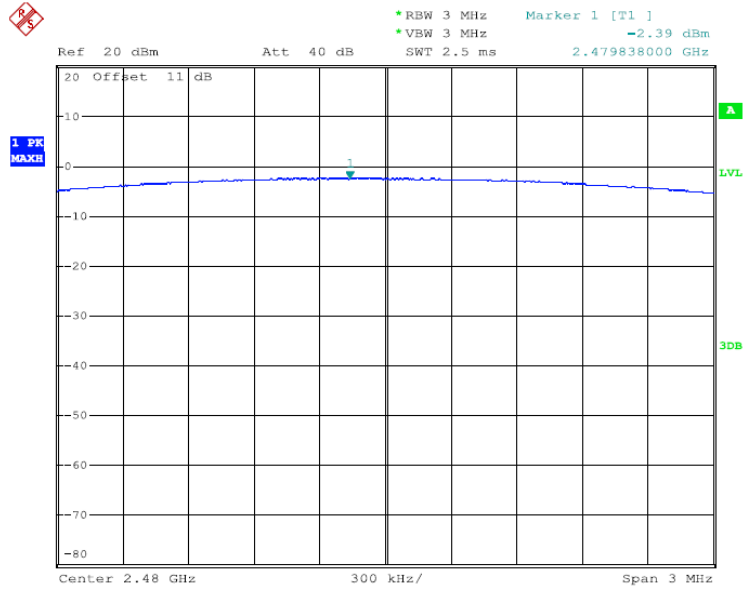

| 8DPSK(3Mbps) | | | | | |
|--------------|-----------|-----------------------------|-----------------------------|-------|-----------|
| Test Channel | Frequency | Conducted Output Peak Power | Conducted Output Peak Power | LIMIT | Pass/Fail |
| | (MHz) | (dBm) | (W) | (W) | |
| CH00 | 2402 | -2.26 | 0.0006 | 0.125 | Pass |
| CH39 | 2441 | -1.16 | 0.0008 | 0.125 | Pass |
| CH78 | 2480 | -1.88 | 0.0006 | 0.125 | Pass |

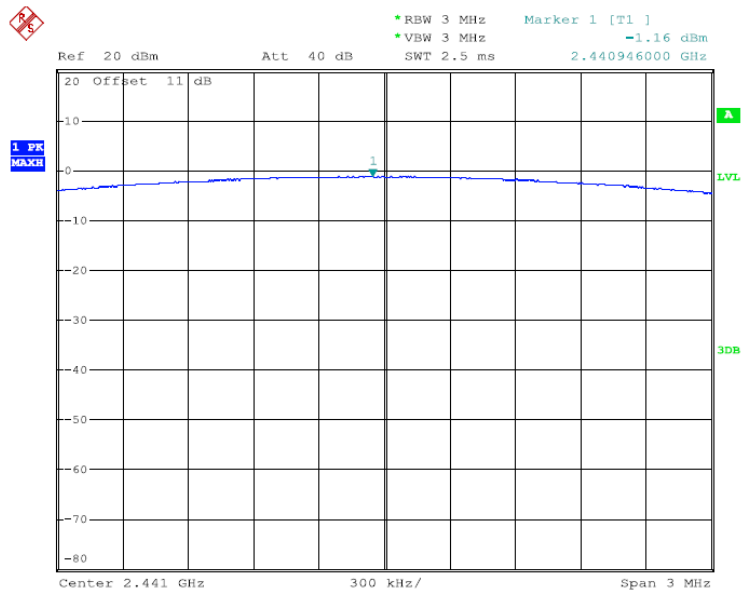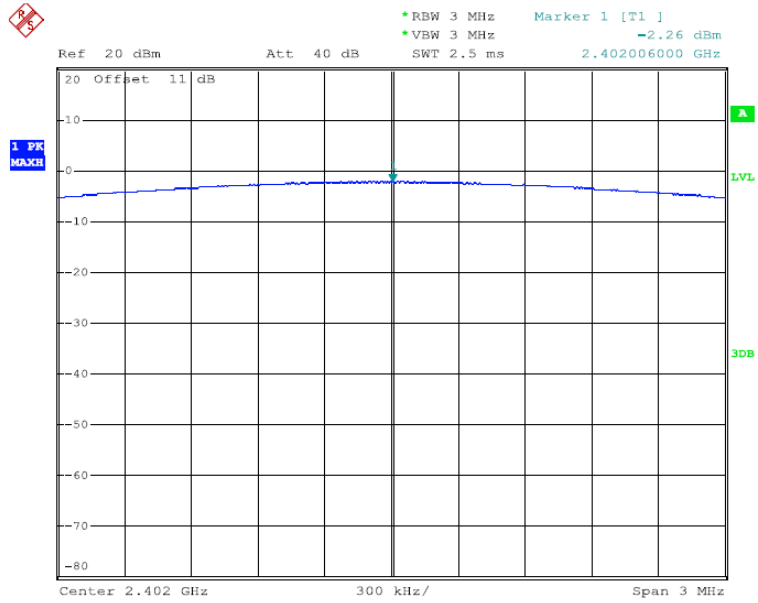

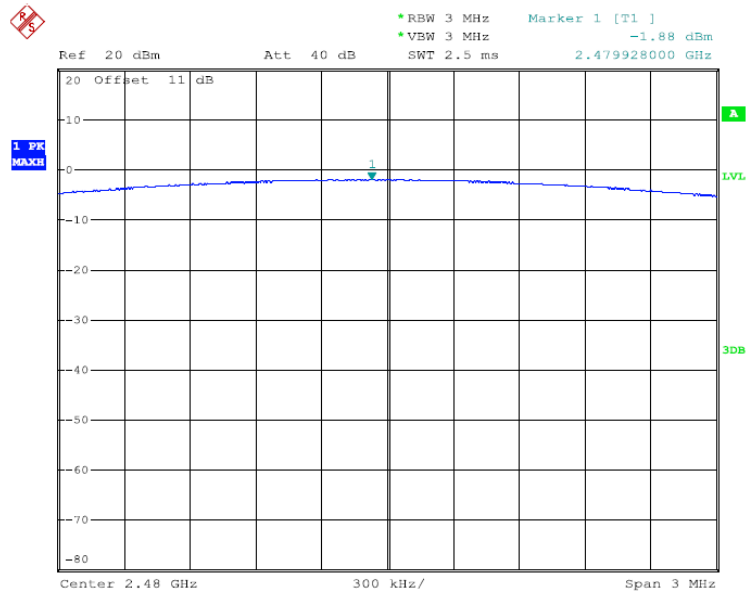



11 Hopping Channel Separation

| | |
|------------------|---|
| Test Requirement | : FCC CFR47 Part 15 Section 15.247 |
| Test Method | : ANSI C63.10:2013 |
| Test Limit | : Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W. |
| Test Mode | : Hopping |

11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz, Span = 3.0MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.





11.2 Test Result

| | |
|------------|---------------------------------------|
| Test Mode: | CH00 / CH39 / CH78 (GFSK(1Mbps) Mode) |
|------------|---------------------------------------|

| Channel number | Channel frequency (MHz) | Separation Read Value (kHz) | Separation Limit 2/3 20dB Down BW(kHz) |
|----------------|-------------------------|-----------------------------|--|
| 00 | 2402 | 1002 | >732 |
| 39 | 2441 | 1002 | >736 |
| 78 | 2480 | 1002 | >736 |

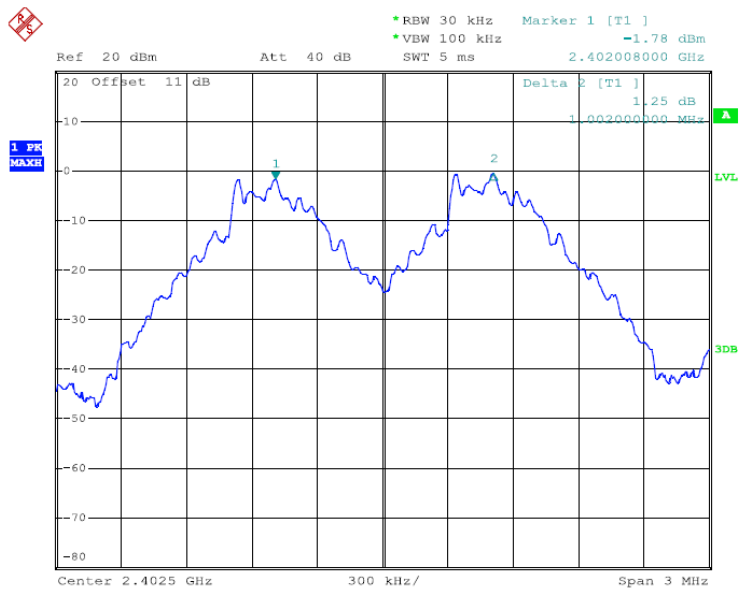


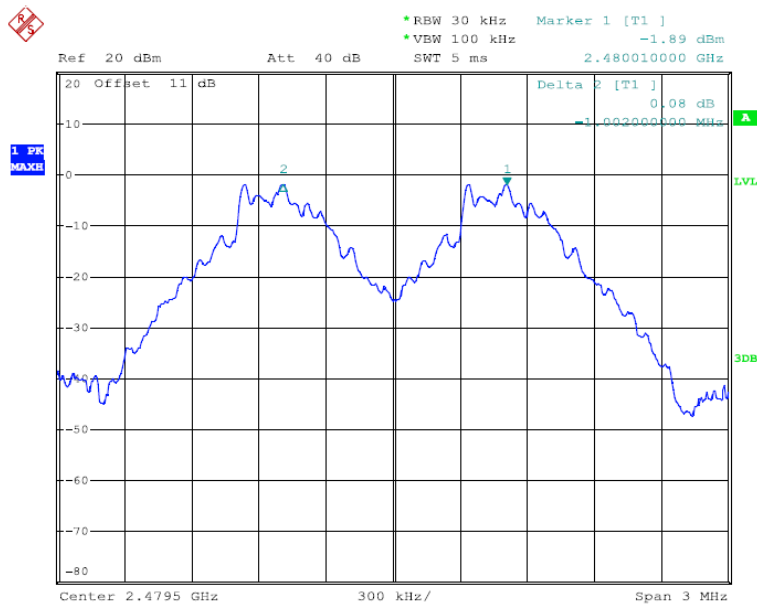
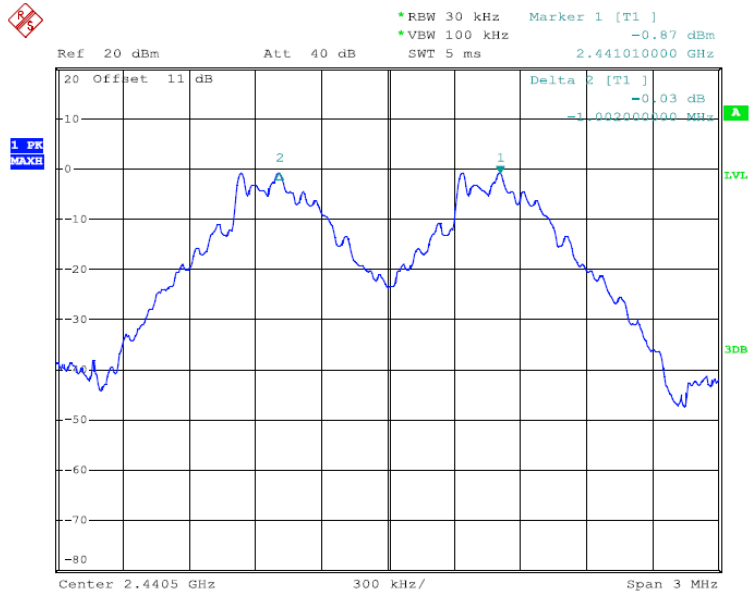




| | |
|------------|--|
| Test Mode: | CH00 / CH39 / CH78 ($\pi/4$ -DQPSK(2Mbps) Mode) |
|------------|--|

| Channel number | Channel frequency (MHz) | Separation Read Value (kHz) | Separation Limit 2/3 20dB Down BW(kHz) |
|----------------|-------------------------|-----------------------------|---|
| 00 | 2402 | 1002 | >912 |
| 39 | 2441 | 1008 | >904 |
| 78 | 2480 | 1002 | >908 |

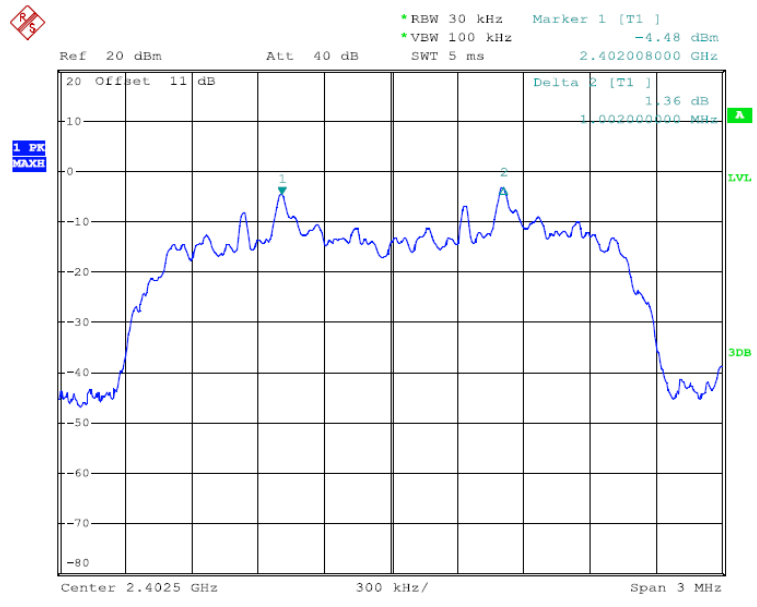


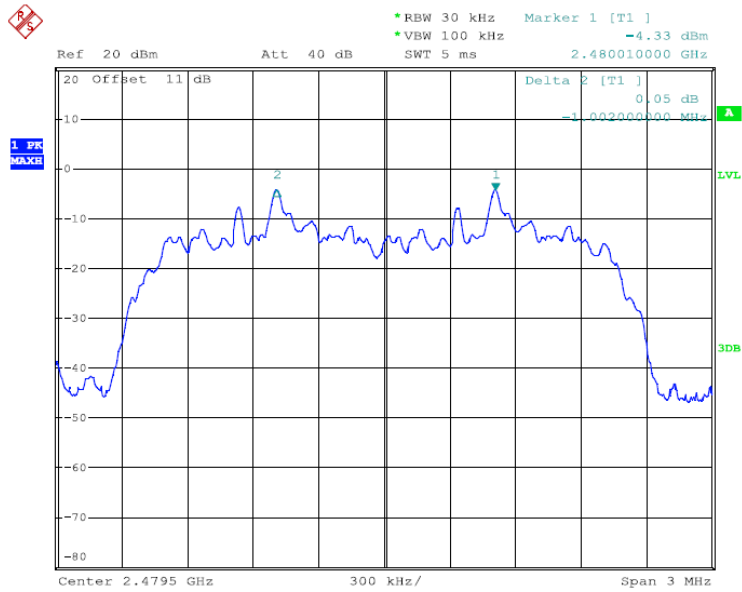
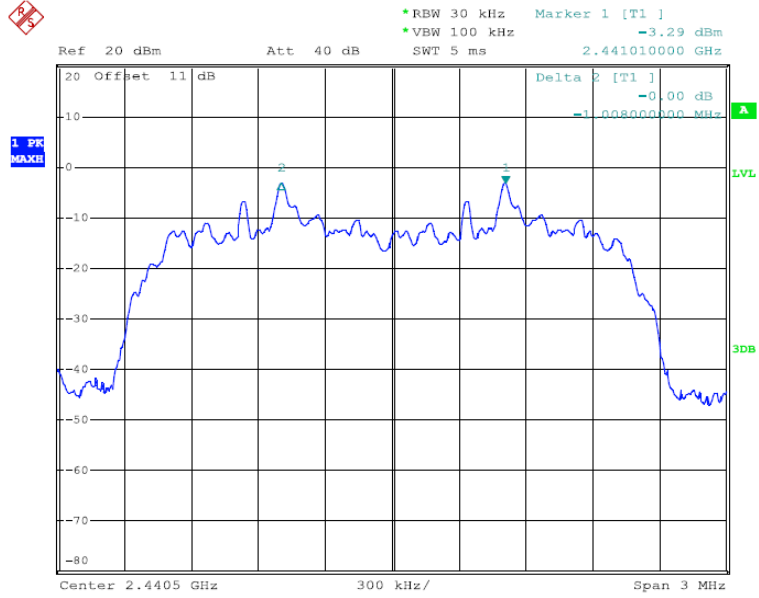




| | |
|------------|---------------------------------------|
| Test Mode: | CH00 / CH39 / CH78 (8DPSK(3Mbps)Mode) |
|------------|---------------------------------------|

| Channel number | Channel frequency (MHz) | Separation Read Value (kHz) | Separation Limit 2/3 20dB Down BW(kHz) |
|----------------|-------------------------|-----------------------------|--|
| 00 | 2402 | 1002 | >900 |
| 39 | 2441 | 1002 | >896 |
| 78 | 2480 | 1002 | >900 |

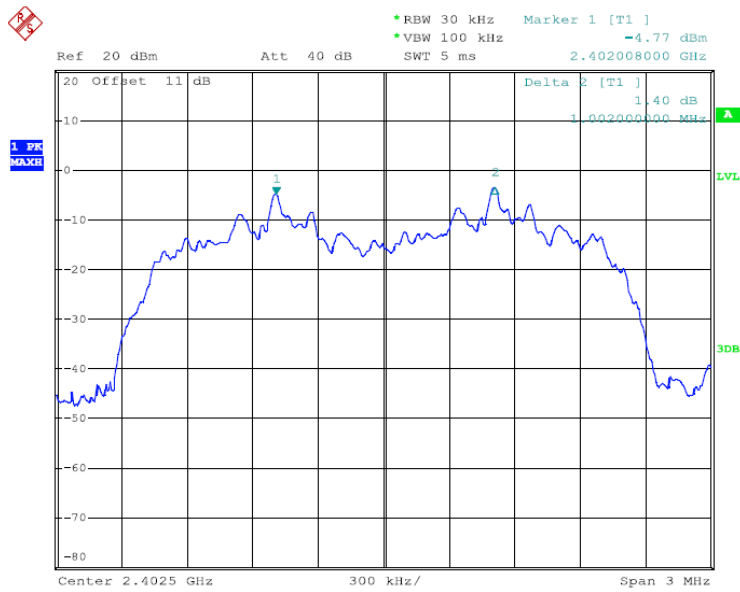

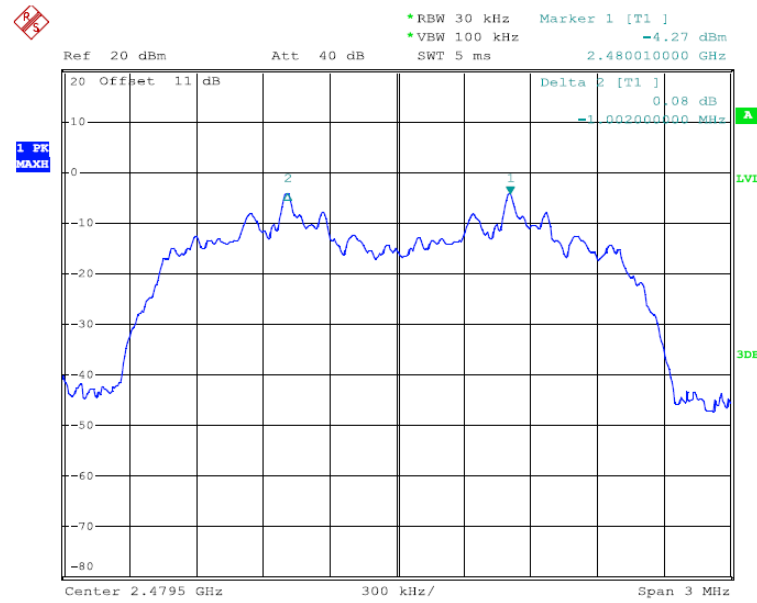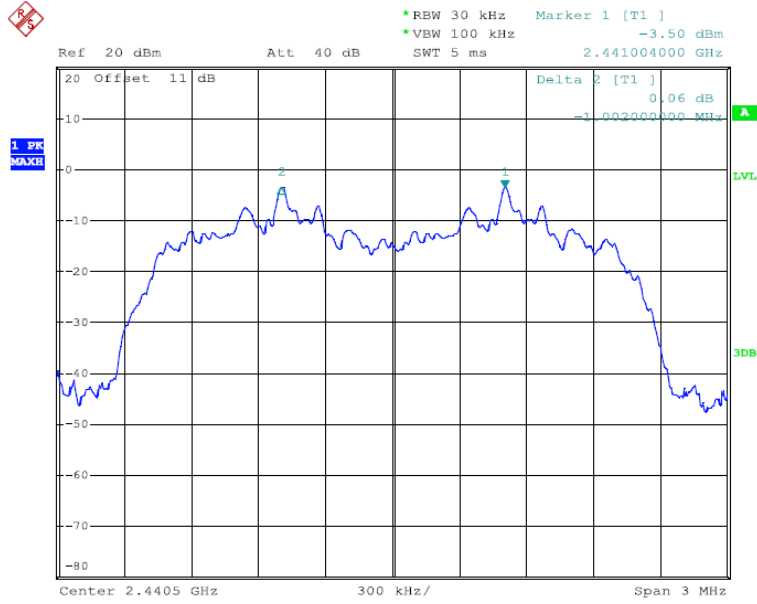



12 Number of Hopping Frequency


Test Requirement : FCC CFR47 Part 15 Section 15.247
 Test Method : ANSI C63.10:2013
 Test Limit : Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
 Test Mode : Hopping(GFSK)

12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW = 100KHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

12.2 Test Result

| Channel Number | Limit |
|----------------|-------|
| 79 | ≥15 |

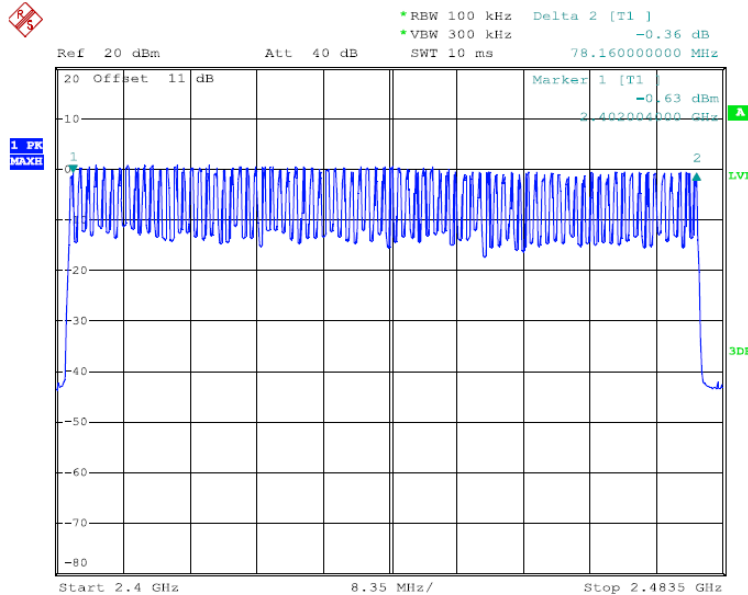



13 Dwell Time

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
- Test Mode : The worst case($\pi/4$ -DQPSK) was recorded



13.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.2 Test Result

| | |
|------------|---------------------------------------|
| Test Mode: | $\pi/4$ -DQPSK(2Mbps) –2DH1/2DH3/2DH5 |
|------------|---------------------------------------|


| Mode | Number of transmission in a 31.6(79 Hopping*0.4) | Length of transmissions time(msec) | Result (msec) | Limit (msec) |
|------|---|------------------------------------|---------------|--------------|
| 2DH1 | $1600/(2*79) \times 31.6 = 320$ | 0.455 | 145.60 | 400 |
| 2DH3 | $1600/(4*79) \times 31.6 = 160$ | 1.735 | 277.60 | 400 |
| 2DH5 | $1600/(6*79) \times 31.6 = 106.67$ | 2.965 | 316.27 | 400 |

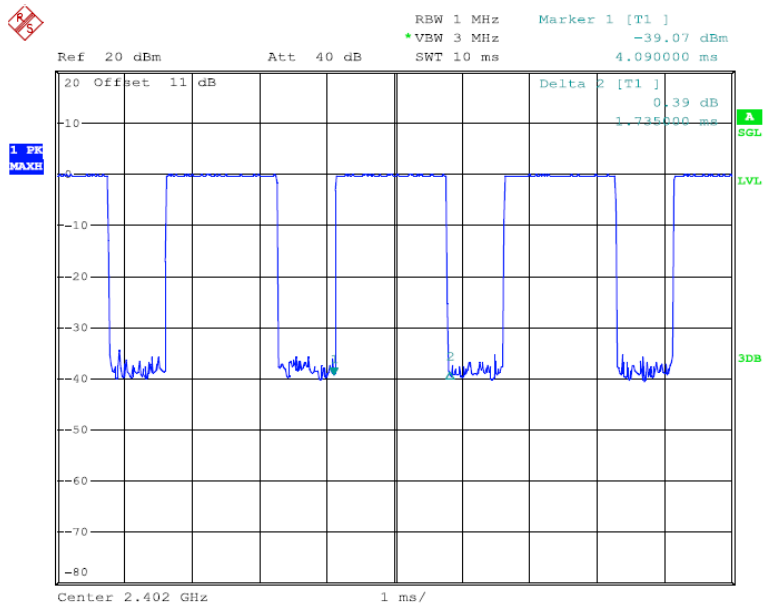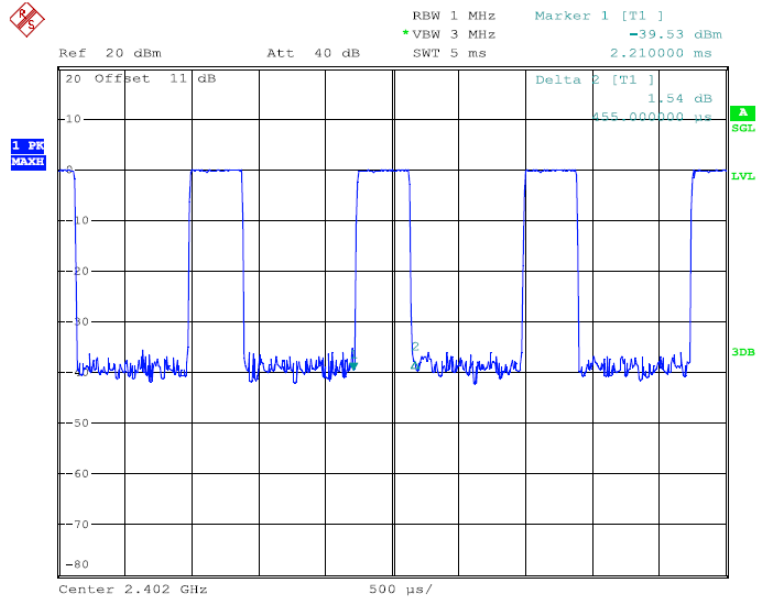



PRECISE TESTING

Report No.: PTC18041124302E-FC01

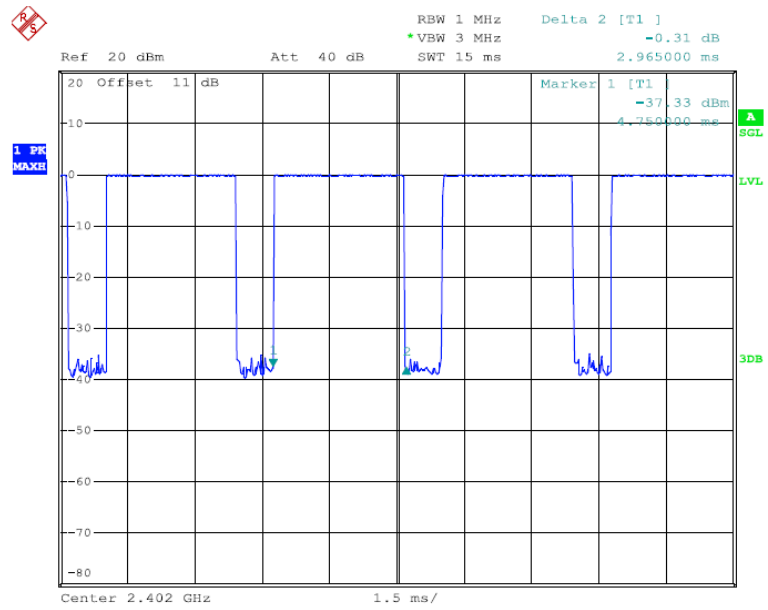



14 Antenna Requirement

14.1 Antenna Requirement

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

14.2 Result

The EUT'S antenna, permanent attached antenna, is Internal PCB Antenna. The antenna's gain is 2dBi and meets the requirement.




15 TEST PHOTOS

Conducted Emissions




Radiated Spurious Emissions
Test Frequency From 30MHz-1000MHz

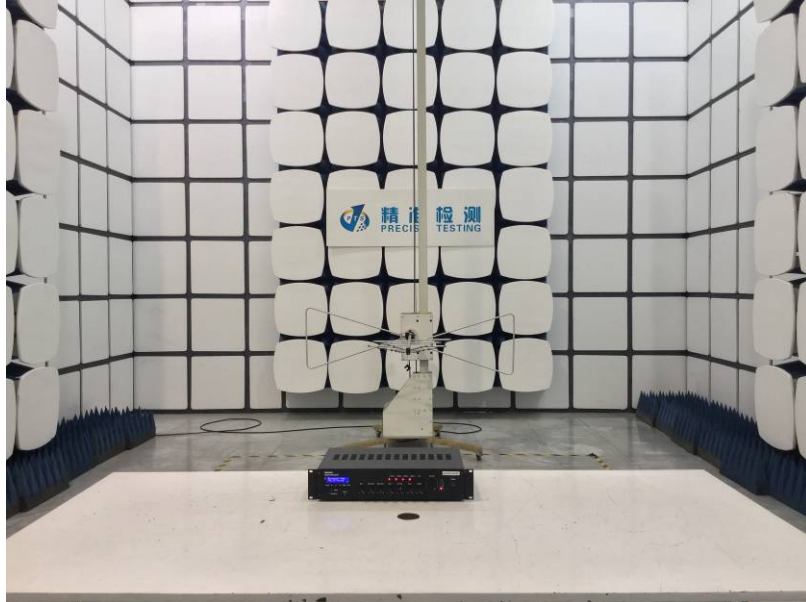




Test frequency from 1GHz-18GHz

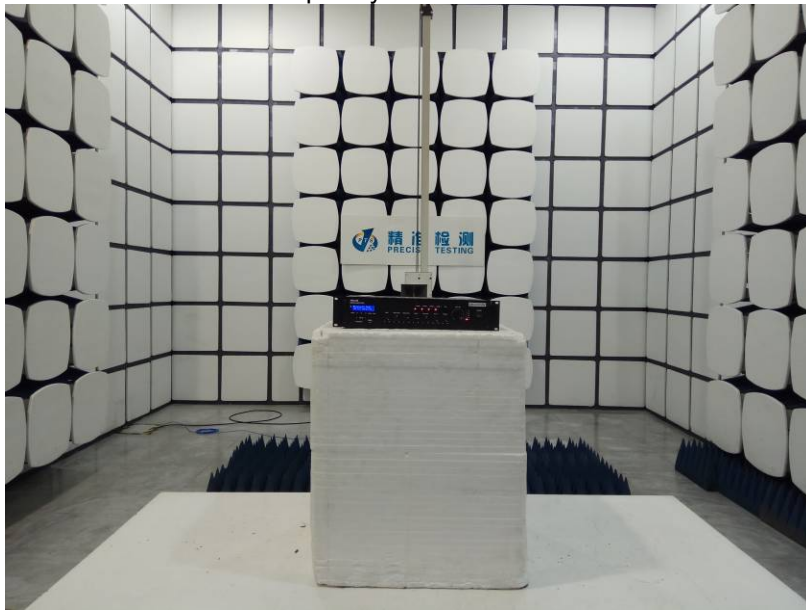

Test frequency from 18GHz-25GHz

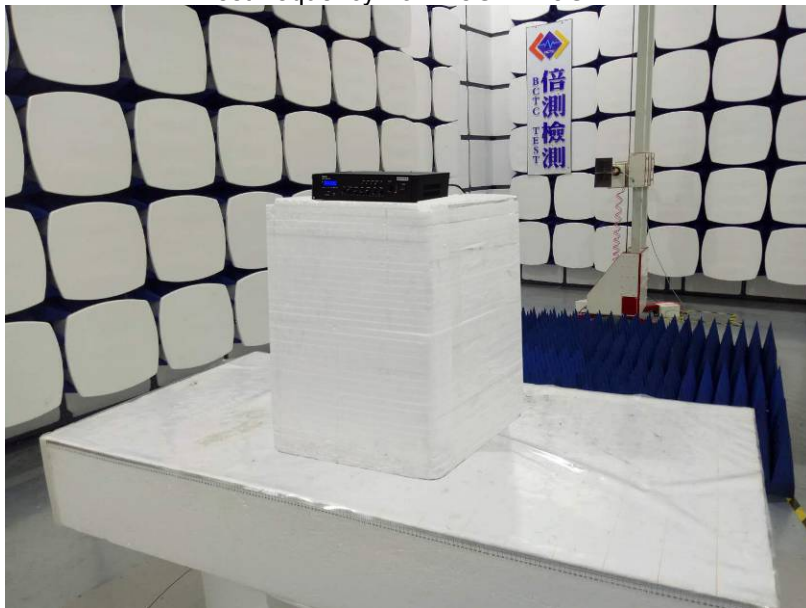




PRECISE TESTING

Report No.: PTC18041124302E-FC01

16 EUT PHOTOS

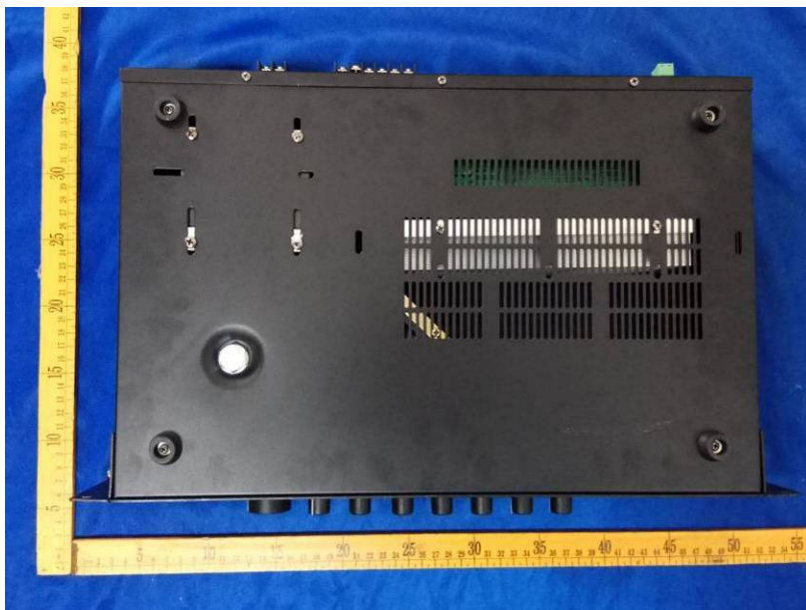















PRECISE TESTING



Report No.: PTC18041124302E-FC01



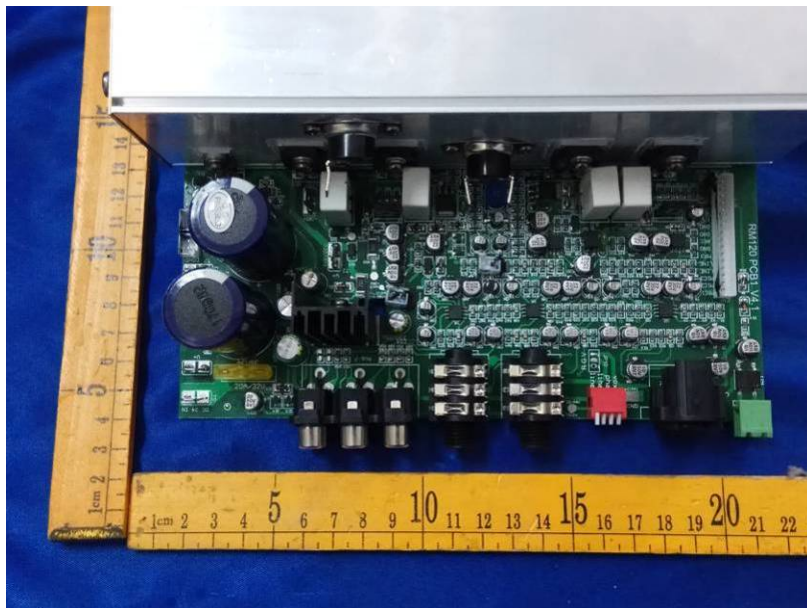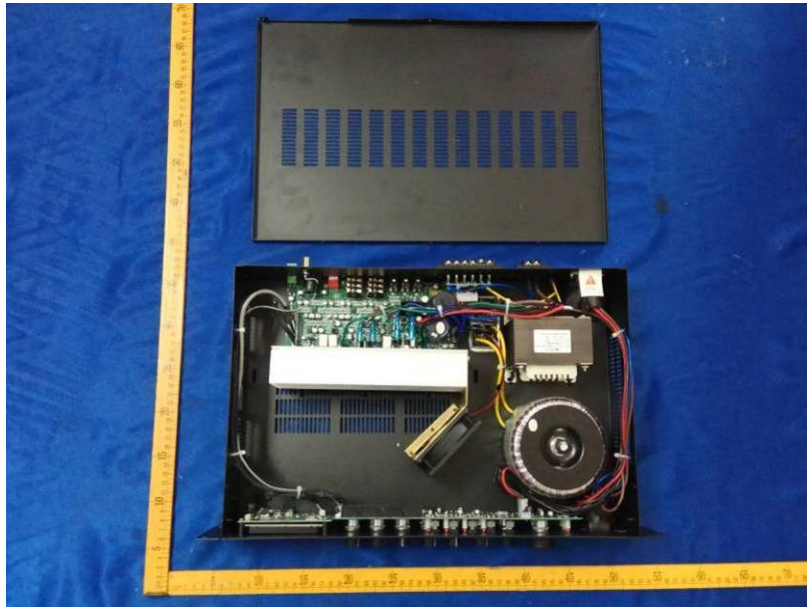

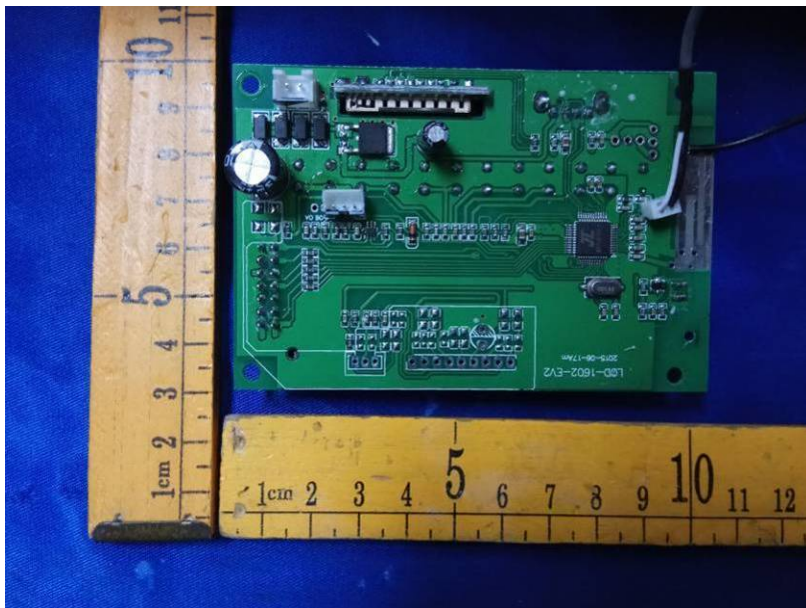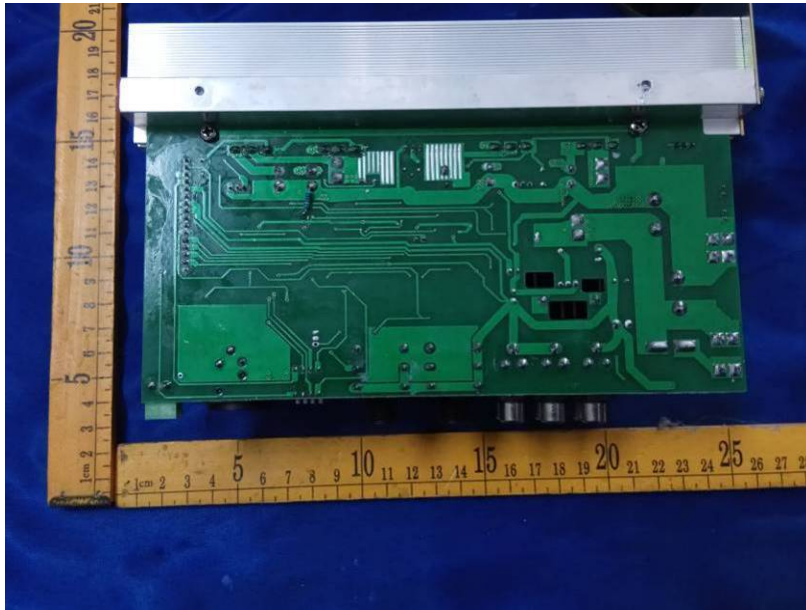

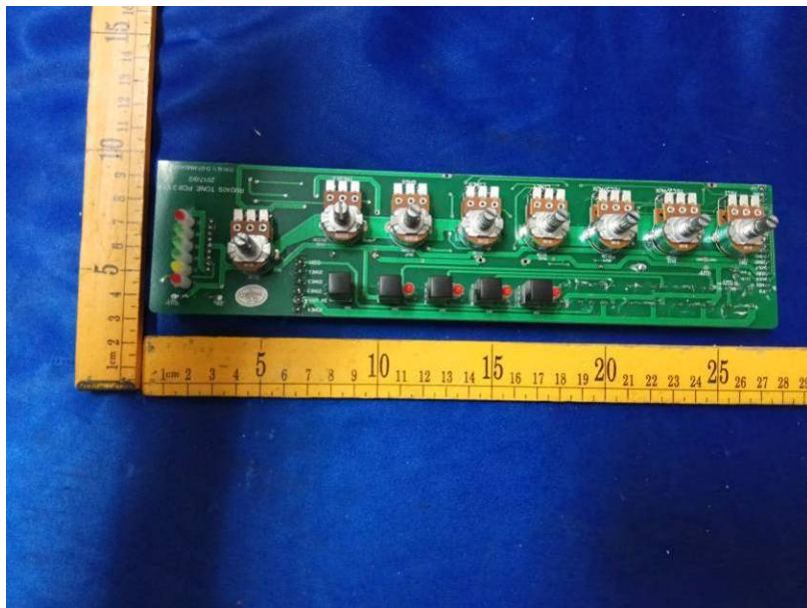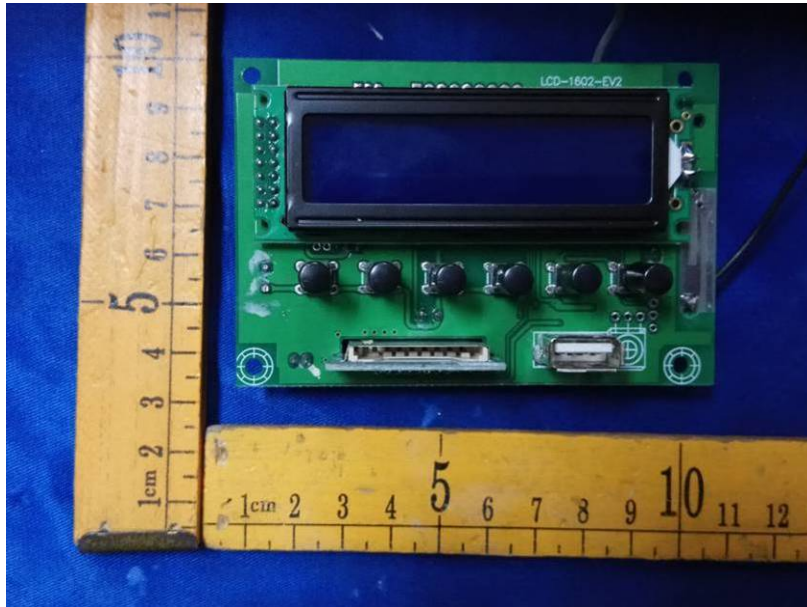

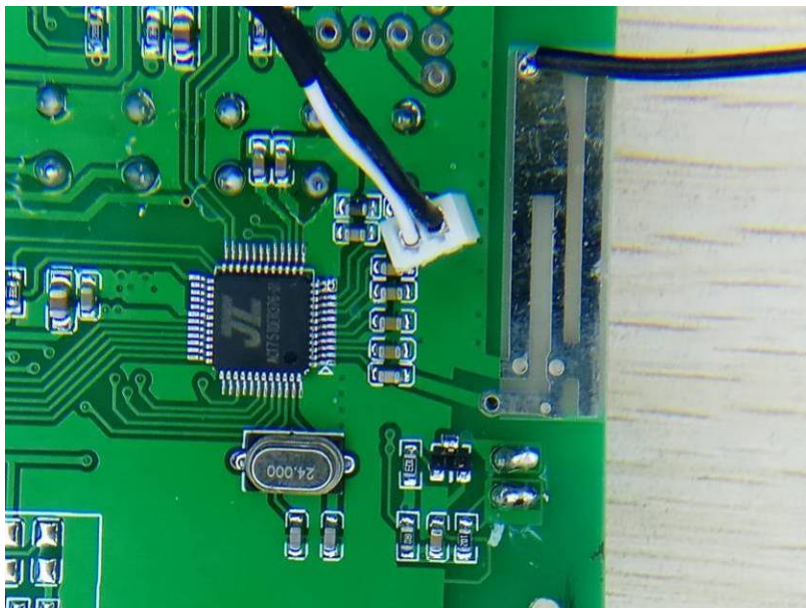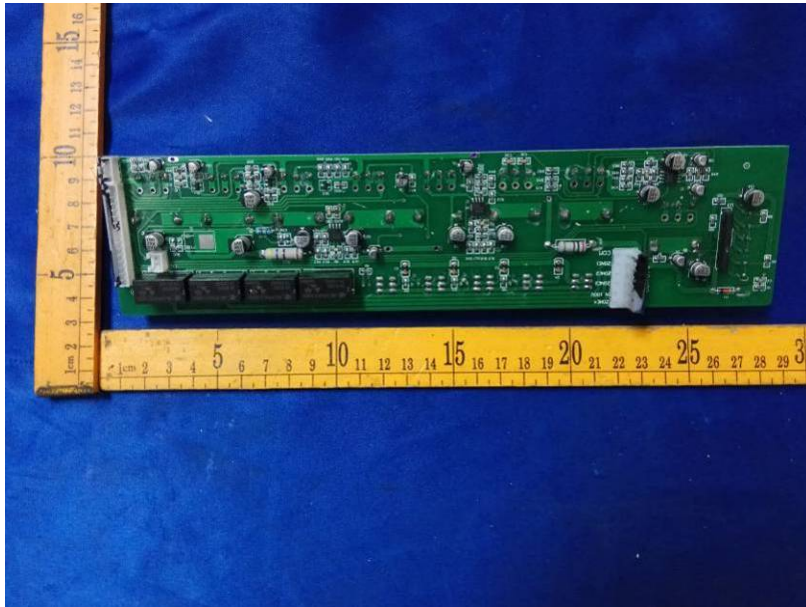



PRECISE TESTING

Report No.: PTC18041124302E-FC01



*******THE END REPORT*******