



Test Mode: TX / IEEE 802.11a / 5745MHz / (CH Low)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6780.000        | 31.70          | 7.34                     | 39.04           | 74.00          | -34.96      | V                  | peak   |
| 7068.000        | 32.18          | 7.83                     | 40.01           | 74.00          | -33.99      | V                  | peak   |
| 8040.000        | 31.86          | 9.63                     | 41.49           | 74.00          | -32.51      | V                  | peak   |
| 8376.000        | 32.01          | 9.44                     | 41.45           | 74.00          | -32.55      | V                  | peak   |
| 9336.000        | 30.89          | 10.07                    | 40.96           | 74.00          | -33.04      | V                  | peak   |
| 10392.000       | 30.93          | 13.20                    | 44.13           | 74.00          | -29.87      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 6744.000        | 31.35          | 7.29                     | 38.64           | 74.00          | -35.36      | H                  | Peak   |
| 7032.000        | 31.63          | 7.76                     | 39.39           | 74.00          | -34.61      | H                  | Peak   |
| 7692.000        | 31.79          | 9.05                     | 40.84           | 74.00          | -33.16      | H                  | Peak   |
| 8076.000        | 31.96          | 9.61                     | 41.57           | 74.00          | -32.43      | H                  | peak   |
| 9060.000        | 31.38          | 9.27                     | 40.65           | 74.00          | -33.35      | H                  | peak   |
| 9636.000        | 30.62          | 10.93                    | 41.55           | 74.00          | -32.45      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11a / 5785MHz /(CH Mid)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6852.000        | 33.11          | 7.46                     | 40.57           | 74.00          | -33.43      | V                  | peak   |
| 7968.000        | 32.17          | 9.59                     | 41.76           | 74.00          | -32.24      | V                  | peak   |
| 9024.000        | 32.24          | 9.17                     | 41.41           | 74.00          | -32.59      | V                  | peak   |
| 9888.000        | 30.92          | 11.66                    | 42.58           | 74.00          | -31.42      | V                  | peak   |
| 10200.000       | 30.75          | 12.60                    | 43.35           | 74.00          | -30.65      | V                  | peak   |
| 11136.000       | 31.63          | 15.02                    | 46.65           | 74.00          | -27.35      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7272.000        | 31.49          | 8.23                     | 39.72           | 74.00          | -34.28      | H                  | Peak   |
| 8016.000        | 32.08          | 9.64                     | 41.72           | 74.00          | -32.28      | H                  | Peak   |
| 8604.000        | 31.04          | 9.32                     | 40.36           | 74.00          | -33.64      | H                  | Peak   |
| 9960.000        | 30.54          | 11.86                    | 42.40           | 74.00          | -31.60      | H                  | peak   |
| 11088.000       | 30.31          | 15.04                    | 45.35           | 74.00          | -28.65      | H                  | peak   |
| 11328.000       | 30.59          | 14.94                    | 45.53           | 74.00          | -28.47      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $Margin (dB) = Remark\ result (dBuV/m) - Average\ limit (dBuV/m)$ .



Test Mode: TX / IEEE 802.11a / 5825MHz /(CH High)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7236.000        | 31.48          | 8.16                     | 39.64           | 74.00          | -34.36      | V                  | peak   |
| 8112.000        | 31.96          | 9.59                     | 41.55           | 74.00          | -32.45      | V                  | peak   |
| 9060.000        | 31.75          | 9.27                     | 41.02           | 74.00          | -32.98      | V                  | peak   |
| 9912.000        | 30.79          | 11.73                    | 42.52           | 74.00          | -31.48      | V                  | peak   |
| 10404.000       | 30.40          | 13.23                    | 43.63           | 74.00          | -30.37      | V                  | peak   |
| 11136.000       | 31.22          | 15.02                    | 46.24           | 74.00          | -27.76      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7476.000        | 30.90          | 8.63                     | 39.53           | 74.00          | -34.47      | H                  | Peak   |
| 8304.000        | 31.85          | 9.48                     | 41.33           | 74.00          | -32.67      | H                  | Peak   |
| 9000.000        | 31.30          | 9.10                     | 40.40           | 74.00          | -33.60      | H                  | Peak   |
| 9624.000        | 30.55          | 10.90                    | 41.45           | 74.00          | -32.55      | H                  | peak   |
| 10260.000       | 30.40          | 12.79                    | 43.19           | 74.00          | -30.81      | H                  | peak   |
| 11040.000       | 29.65          | 15.06                    | 44.71           | 74.00          | -29.29      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $Margin (dB) = Remark\ result (dBuV/m) - Average\ limit (dBuV/m)$ .



**Test Mode:** TX / IEEE 802.11n HT 20 MHz / 5180MHz  
/(CH Low)

**Tested by:** Saber Huang

**Ambient temperature:** 24°C      **Relative humidity:** 52% RH

**Date:** June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7692.000        | 32.16          | 9.05                     | 41.21           | 74.00          | -32.79      | V                  | peak   |
| 8052.000        | 32.25          | 9.62                     | 41.87           | 74.00          | -32.13      | V                  | peak   |
| 8952.000        | 31.43          | 9.13                     | 40.56           | 74.00          | -33.44      | V                  | peak   |
| 9432.000        | 31.76          | 10.34                    | 42.10           | 74.00          | -31.90      | V                  | peak   |
| 10908.000       | 30.22          | 14.79                    | 45.01           | 74.00          | -28.99      | V                  | peak   |
| 11172.000       | 31.58          | 15.00                    | 46.58           | 74.00          | -27.42      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7692.000        | 32.04          | 9.05                     | 41.09           | 74.00          | -32.91      | H                  | Peak   |
| 8220.000        | 32.20          | 9.53                     | 41.73           | 74.00          | -32.27      | H                  | Peak   |
| 8940.000        | 31.94          | 9.13                     | 41.07           | 74.00          | -32.93      | H                  | Peak   |
| 9756.000        | 30.79          | 11.28                    | 42.07           | 74.00          | -31.93      | H                  | peak   |
| 10092.000       | 31.34          | 12.27                    | 43.61           | 74.00          | -30.39      | H                  | peak   |
| 11148.000       | 31.42          | 15.01                    | 46.43           | 74.00          | -27.57      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range s
5. hown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
6. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
7. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Test Mode:** TX / IEEE 802.11n HT 20 MHz / 5200MHz  
/(CH Mid)

**Tested by:** Saber Huang

**Ambient temperature:** 24°C      **Relative humidity:** 52% RH

**Date:** June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7320.000        | 31.28          | 8.32                     | 39.60           | 74.00          | -34.40      | V                  | peak   |
| 7620.000        | 31.61          | 8.91                     | 40.52           | 74.00          | -33.48      | V                  | peak   |
| 8160.000        | 31.73          | 9.56                     | 41.29           | 74.00          | -32.71      | V                  | peak   |
| 8556.000        | 31.14          | 9.34                     | 40.48           | 74.00          | -33.52      | V                  | peak   |
| 9840.000        | 30.75          | 11.52                    | 42.27           | 74.00          | -31.73      | V                  | peak   |
| 10572.000       | 30.66          | 13.75                    | 44.41           | 74.00          | -29.59      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7512.000        | 31.86          | 8.70                     | 40.56           | 74.00          | -33.44      | H                  | Peak   |
| 8004.000        | 31.54          | 9.65                     | 41.19           | 74.00          | -32.81      | H                  | Peak   |
| 9276.000        | 30.24          | 9.89                     | 40.13           | 74.00          | -33.87      | H                  | Peak   |
| 9852.000        | 30.40          | 11.55                    | 41.95           | 74.00          | -32.05      | H                  | peak   |
| 10800.000       | 29.93          | 14.46                    | 44.39           | 74.00          | -29.61      | H                  | peak   |
| 11196.000       | 30.93          | 14.99                    | 45.92           | 74.00          | -28.08      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Test Mode:** TX / IEEE 802.11n HT 20 MHz / 5240MHz  
/(CH High)

**Tested by:** Saber Huang

**Ambient temperature:** 24°C      **Relative humidity:** 52% RH

**Date:** June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7188.000        | 31.25          | 8.07                     | 39.32           | 74.00          | -34.68      | V                  | peak   |
| 7500.000        | 31.58          | 8.68                     | 40.26           | 74.00          | -33.74      | V                  | peak   |
| 8124.000        | 31.83          | 9.58                     | 41.41           | 74.00          | -32.59      | V                  | peak   |
| 9468.000        | 30.80          | 10.45                    | 41.25           | 74.00          | -32.75      | V                  | peak   |
| 10164.000       | 30.20          | 12.49                    | 42.69           | 74.00          | -31.31      | V                  | peak   |
| 10704.000       | 30.22          | 14.16                    | 44.38           | 74.00          | -29.62      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7176.000        | 31.84          | 8.04                     | 39.88           | 74.00          | -34.12      | H                  | Peak   |
| 8196.000        | 31.54          | 9.54                     | 41.08           | 74.00          | -32.92      | H                  | Peak   |
| 8988.000        | 31.25          | 9.11                     | 40.36           | 74.00          | -33.64      | H                  | Peak   |
| 9360.000        | 31.14          | 10.14                    | 41.28           | 74.00          | -32.72      | H                  | peak   |
| 10284.000       | 30.31          | 12.86                    | 43.17           | 74.00          | -30.83      | H                  | peak   |
| 10668.000       | 29.51          | 14.05                    | 43.56           | 74.00          | -30.44      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $Margin (dB) = Remark\ result (dBuV/m) - Average\ limit (dBuV/m)$ .



**Test Mode:** TX / IEEE 802.11n HT 20 MHz / 5260MHz  
/(CH Low)

**Tested by:** Saber Huang

**Ambient temperature:** 24°C      **Relative humidity:** 52% RH

**Date:** June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6840.000        | 31.38          | 7.44                     | 38.82           | 74.00          | -35.18      | V                  | peak   |
| 7296.000        | 31.54          | 8.28                     | 39.82           | 74.00          | -34.18      | V                  | peak   |
| 7716.000        | 31.33          | 9.10                     | 40.43           | 74.00          | -33.57      | V                  | peak   |
| 8160.000        | 31.75          | 9.56                     | 41.31           | 74.00          | -32.69      | V                  | peak   |
| 9672.000        | 30.90          | 11.04                    | 41.94           | 74.00          | -32.06      | V                  | peak   |
| 10860.000       | 30.08          | 14.65                    | 44.73           | 74.00          | -29.27      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7080.000        | 31.37          | 7.86                     | 39.23           | 74.00          | -34.77      | H                  | Peak   |
| 7560.000        | 31.40          | 8.79                     | 40.19           | 74.00          | -33.81      | H                  | Peak   |
| 8184.000        | 31.85          | 9.55                     | 41.40           | 74.00          | -32.60      | H                  | Peak   |
| 9360.000        | 31.10          | 10.14                    | 41.24           | 74.00          | -32.76      | H                  | peak   |
| 10128.000       | 30.65          | 12.38                    | 43.03           | 74.00          | -30.97      | H                  | peak   |
| 10716.000       | 30.15          | 14.20                    | 44.35           | 74.00          | -29.65      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Test Mode:** TX / IEEE 802.11n HT 20 MHz / 5300MHz  
/(CH Mid)

**Tested by:** Saber Huang

**Ambient temperature:** 24°C      **Relative humidity:** 52% RH

**Date:** June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7248.000        | 31.86          | 8.18                     | 40.04           | 74.00          | -33.96      | V                  | peak   |
| 8076.000        | 31.72          | 9.61                     | 41.33           | 74.00          | -32.67      | V                  | peak   |
| 8244.000        | 31.38          | 9.52                     | 40.90           | 74.00          | -33.10      | V                  | peak   |
| 8952.000        | 31.29          | 9.13                     | 40.42           | 74.00          | -33.58      | V                  | peak   |
| 9912.000        | 30.41          | 11.73                    | 42.14           | 74.00          | -31.86      | V                  | peak   |
| 11136.000       | 30.89          | 15.02                    | 45.91           | 74.00          | -28.09      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7284.000        | 31.18          | 8.25                     | 39.43           | 74.00          | -34.57      | H                  | Peak   |
| 7632.000        | 31.98          | 8.93                     | 40.91           | 74.00          | -33.09      | H                  | Peak   |
| 8136.000        | 31.51          | 9.58                     | 41.09           | 74.00          | -32.91      | H                  | Peak   |
| 8592.000        | 30.49          | 9.32                     | 39.81           | 74.00          | -34.19      | H                  | peak   |
| 9024.000        | 31.26          | 9.17                     | 40.43           | 74.00          | -33.57      | H                  | peak   |
| 10020.000       | 30.19          | 12.04                    | 42.23           | 74.00          | -31.77      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





**Test Mode:** TX / IEEE 802.11n HT 20 MHz / 5320MHz  
/(CH High)

**Tested by:** Saber Huang

**Ambient temperature:** 24°C      **Relative humidity:** 52% RH

**Date:** June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7356.000        | 31.22          | 8.39                     | 39.61           | 74.00          | -34.39      | V                  | peak   |
| 8172.000        | 31.78          | 9.56                     | 41.34           | 74.00          | -32.66      | V                  | peak   |
| 9384.000        | 30.45          | 10.21                    | 40.66           | 74.00          | -33.34      | V                  | peak   |
| 9852.000        | 31.04          | 11.55                    | 42.59           | 74.00          | -31.41      | V                  | peak   |
| 10392.000       | 29.66          | 13.20                    | 42.86           | 74.00          | -31.14      | V                  | peak   |
| 11340.000       | 30.65          | 14.93                    | 45.58           | 74.00          | -28.42      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7068.000        | 31.25          | 7.83                     | 39.08           | 74.00          | -34.92      | H                  | Peak   |
| 7692.000        | 31.16          | 9.05                     | 40.21           | 74.00          | -33.79      | H                  | Peak   |
| 8040.000        | 31.15          | 9.63                     | 40.78           | 74.00          | -33.22      | H                  | Peak   |
| 9420.000        | 30.38          | 10.31                    | 40.69           | 74.00          | -33.31      | H                  | peak   |
| 10356.000       | 29.86          | 13.08                    | 42.94           | 74.00          | -31.06      | H                  | peak   |
| 10632.000       | 30.65          | 13.94                    | 44.59           | 74.00          | -29.41      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6.  $Margin (dB) = Remark\ result (dBuV/m) - Average\ limit (dBuV/m)$ .



Test Mode: TX / IEEE 802.11n HT 20 MHz / 5500MHz  
/(CH Low)

Tested by: Saber Huang

Ambient temperature: 24°C

Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7032.000        | 31.46          | 7.76                     | 39.22           | 74.00          | -34.78      | V                  | peak   |
| 7596.000        | 31.04          | 8.86                     | 39.90           | 74.00          | -34.10      | V                  | peak   |
| 8100.000        | 32.13          | 9.60                     | 41.73           | 74.00          | -32.27      | V                  | peak   |
| 9348.000        | 30.57          | 10.10                    | 40.67           | 74.00          | -33.33      | V                  | peak   |
| 10620.000       | 30.42          | 13.90                    | 44.32           | 74.00          | -29.68      | V                  | peak   |
| 11184.000       | 31.39          | 15.00                    | 46.39           | 74.00          | -27.61      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7068.000        | 31.43          | 7.83                     | 39.26           | 74.00          | -34.74      | H                  | Peak   |
| 7620.000        | 31.17          | 8.91                     | 40.08           | 74.00          | -33.92      | H                  | Peak   |
| 7956.000        | 31.32          | 9.56                     | 40.88           | 74.00          | -33.12      | H                  | Peak   |
| 8940.000        | 31.60          | 9.13                     | 40.73           | 74.00          | -33.27      | H                  | peak   |
| 9432.000        | 30.92          | 10.34                    | 41.26           | 74.00          | -32.74      | H                  | peak   |
| 10596.000       | 30.12          | 13.83                    | 43.95           | 74.00          | -30.05      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT 20 MHz / 5580MHz  
/(CH Mid)

Tested by: Saber Huang

Ambient temperature: 24°C

Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6852.000        | 31.93          | 7.46                     | 39.39           | 74.00          | -34.61      | V                  | peak   |
| 7596.000        | 31.07          | 8.86                     | 39.93           | 74.00          | -34.07      | V                  | peak   |
| 7992.000        | 31.78          | 9.63                     | 41.41           | 74.00          | -32.59      | V                  | peak   |
| 8808.000        | 31.19          | 9.21                     | 40.40           | 74.00          | -33.60      | V                  | peak   |
| 10512.000       | 30.06          | 13.57                    | 43.63           | 74.00          | -30.37      | V                  | peak   |
| 11232.000       | 30.50          | 14.98                    | 45.48           | 74.00          | -28.52      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7728.000        | 31.38          | 9.12                     | 40.50           | 74.00          | -33.50      | H                  | Peak   |
| 8100.000        | 31.36          | 9.60                     | 40.96           | 74.00          | -33.04      | H                  | Peak   |
| 8628.000        | 30.92          | 9.30                     | 40.22           | 74.00          | -33.78      | H                  | Peak   |
| 9720.000        | 30.33          | 11.17                    | 41.50           | 74.00          | -32.50      | H                  | peak   |
| 10428.000       | 29.79          | 13.31                    | 43.10           | 74.00          | -30.90      | H                  | peak   |
| 11208.000       | 31.49          | 14.99                    | 46.48           | 74.00          | -27.52      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT 20 MHz / 5700MHz  
/(CH High)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6636.000        | 31.69          | 7.11                     | 38.80           | 74.00          | -35.20      | V                  | peak   |
| 7320.000        | 31.43          | 8.32                     | 39.75           | 74.00          | -34.25      | V                  | peak   |
| 8004.000        | 32.25          | 9.65                     | 41.90           | 74.00          | -32.10      | V                  | peak   |
| 8628.000        | 31.03          | 9.30                     | 40.33           | 74.00          | -33.67      | V                  | peak   |
| 9600.000        | 30.06          | 10.83                    | 40.89           | 74.00          | -33.11      | V                  | peak   |
| 10716.000       | 30.42          | 14.20                    | 44.62           | 74.00          | -29.38      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7200.000        | 31.76          | 8.09                     | 39.85           | 74.00          | -34.15      | H                  | Peak   |
| 7656.000        | 31.45          | 8.98                     | 40.43           | 74.00          | -33.57      | H                  | Peak   |
| 8412.000        | 31.77          | 9.42                     | 41.19           | 74.00          | -32.81      | H                  | Peak   |
| 9372.000        | 30.84          | 10.17                    | 41.01           | 74.00          | -32.99      | H                  | peak   |
| 9852.000        | 30.72          | 11.55                    | 42.27           | 74.00          | -31.73      | H                  | peak   |
| 10248.000       | 29.80          | 12.75                    | 42.55           | 74.00          | -31.45      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT 20 MHz / 5745MHz  
/(CH Low)

Tested by: Saber Huang

Ambient temperature: 24°C

Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6324.000        | 31.66          | 6.60                     | 38.26           | 74.00          | -35.74      | V                  | peak   |
| 7320.000        | 31.92          | 8.32                     | 40.24           | 74.00          | -33.76      | V                  | peak   |
| 7956.000        | 31.53          | 9.56                     | 41.09           | 74.00          | -32.91      | V                  | peak   |
| 8436.000        | 30.85          | 9.41                     | 40.26           | 74.00          | -33.74      | V                  | peak   |
| 9420.000        | 30.72          | 10.31                    | 41.03           | 74.00          | -32.97      | V                  | peak   |
| 10452.000       | 29.63          | 13.38                    | 43.01           | 74.00          | -30.99      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 6576.000        | 31.85          | 7.01                     | 38.86           | 74.00          | -35.14      | H                  | Peak   |
| 7212.000        | 31.57          | 8.11                     | 39.68           | 74.00          | -34.32      | H                  | Peak   |
| 7584.000        | 30.91          | 8.84                     | 39.75           | 74.00          | -34.25      | H                  | Peak   |
| 8124.000        | 31.51          | 9.58                     | 41.09           | 74.00          | -32.91      | H                  | peak   |
| 8460.000        | 31.30          | 9.40                     | 40.70           | 74.00          | -33.30      | H                  | peak   |
| 9912.000        | 30.18          | 11.73                    | 41.91           | 74.00          | -32.09      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT 20 MHz / 5785MHz  
 /(CH Mid)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7272.000        | 30.92          | 8.23                     | 39.15           | 74.00          | -34.85      | V                  | peak   |
| 7884.000        | 31.92          | 9.42                     | 41.34           | 74.00          | -32.66      | V                  | peak   |
| 8100.000        | 31.92          | 9.60                     | 41.52           | 74.00          | -32.48      | V                  | peak   |
| 8628.000        | 30.94          | 9.30                     | 40.24           | 74.00          | -33.76      | V                  | peak   |
| 10080.000       | 30.06          | 12.23                    | 42.29           | 74.00          | -31.71      | V                  | peak   |
| 11100.000       | 30.37          | 15.04                    | 45.41           | 74.00          | -28.59      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 6984.000        | 31.98          | 7.67                     | 39.65           | 74.00          | -34.35      | H                  | Peak   |
| 7476.000        | 31.62          | 8.63                     | 40.25           | 74.00          | -33.75      | H                  | Peak   |
| 8100.000        | 32.24          | 9.60                     | 41.84           | 74.00          | -32.16      | H                  | Peak   |
| 8532.000        | 30.73          | 9.36                     | 40.09           | 74.00          | -33.91      | H                  | peak   |
| 9552.000        | 30.29          | 10.69                    | 40.98           | 74.00          | -33.02      | H                  | peak   |
| 10560.000       | 29.86          | 13.72                    | 43.58           | 74.00          | -30.42      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT 20 MHz / 5825MHz  
/(CH High)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6828.000        | 31.61          | 7.42                     | 39.03           | 74.00          | -34.97      | V                  | peak   |
| 7500.000        | 31.38          | 8.68                     | 40.06           | 74.00          | -33.94      | V                  | peak   |
| 8280.000        | 31.20          | 9.50                     | 40.70           | 74.00          | -33.30      | V                  | peak   |
| 9312.000        | 30.63          | 10.00                    | 40.63           | 74.00          | -33.37      | V                  | peak   |
| 9900.000        | 30.69          | 11.69                    | 42.38           | 74.00          | -31.62      | V                  | peak   |
| 10692.000       | 29.92          | 14.13                    | 44.05           | 74.00          | -29.95      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7008.000        | 31.53          | 7.72                     | 39.25           | 74.00          | -34.75      | H                  | Peak   |
| 7968.000        | 31.36          | 9.59                     | 40.95           | 74.00          | -33.05      | H                  | Peak   |
| 8448.000        | 31.09          | 9.40                     | 40.49           | 74.00          | -33.51      | H                  | Peak   |
| 9372.000        | 30.37          | 10.17                    | 40.54           | 74.00          | -33.46      | H                  | peak   |
| 10716.000       | 30.23          | 14.20                    | 44.43           | 74.00          | -29.57      | H                  | peak   |
| 11136.000       | 31.98          | 15.02                    | 47.00           | 74.00          | -27.00      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT 40 MHz / 5190MHz  
 //(CH Low)

Tested by: Saber Huang

Ambient temperature: 24°C

Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6492.000        | 32.94          | 6.88                     | 39.82           | 74.00          | -34.18      | V                  | peak   |
| 7464.000        | 32.01          | 8.60                     | 40.61           | 74.00          | -33.39      | V                  | peak   |
| 7968.000        | 32.10          | 9.59                     | 41.69           | 74.00          | -32.31      | V                  | peak   |
| 9420.000        | 31.29          | 10.31                    | 41.60           | 74.00          | -32.40      | V                  | peak   |
| 10056.000       | 31.06          | 12.15                    | 43.21           | 74.00          | -30.79      | V                  | peak   |
| 11172.000       | 31.60          | 15.00                    | 46.60           | 74.00          | -27.40      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7092.000        | 32.01          | 7.88                     | 39.89           | 74.00          | -34.11      | H                  | Peak   |
| 7740.000        | 31.93          | 9.14                     | 41.07           | 74.00          | -32.93      | H                  | Peak   |
| 8088.000        | 32.62          | 9.60                     | 42.22           | 74.00          | -31.78      | H                  | Peak   |
| 8448.000        | 31.75          | 9.40                     | 41.15           | 74.00          | -32.85      | H                  | peak   |
| 9456.000        | 31.33          | 10.41                    | 41.74           | 74.00          | -32.26      | H                  | peak   |
| 10512.000       | 30.63          | 13.57                    | 44.20           | 74.00          | -29.80      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Test Mode: TX / IEEE 802.11n HT 40 MHz / 5230MHz  
/(CH High)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7164.000        | 31.73          | 8.02                     | 39.75           | 74.00          | -34.25      | V                  | peak   |
| 7944.000        | 31.40          | 9.54                     | 40.94           | 74.00          | -33.06      | V                  | peak   |
| 8400.000        | 30.94          | 9.43                     | 40.37           | 74.00          | -33.63      | V                  | peak   |
| 9300.000        | 30.70          | 9.96                     | 40.66           | 74.00          | -33.34      | V                  | peak   |
| 10620.000       | 29.69          | 13.90                    | 43.59           | 74.00          | -30.41      | V                  | peak   |
| 10872.000       | 29.60          | 14.68                    | 44.28           | 74.00          | -29.72      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 6492.000        | 32.05          | 6.88                     | 38.93           | 74.00          | -35.07      | H                  | Peak   |
| 7428.000        | 31.41          | 8.53                     | 39.94           | 74.00          | -34.06      | H                  | Peak   |
| 8424.000        | 30.58          | 9.42                     | 40.00           | 74.00          | -34.00      | H                  | Peak   |
| 9648.000        | 30.89          | 10.97                    | 41.86           | 74.00          | -32.14      | H                  | peak   |
| 11052.000       | 29.49          | 15.06                    | 44.55           | 74.00          | -29.45      | H                  | peak   |
| 11136.000       | 31.20          | 15.02                    | 46.22           | 74.00          | -27.78      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Test Mode:** TX / IEEE 802.11n HT 40 MHz / 5270MHz  
 //(CH Low)

**Tested by:** Saber Huang

**Ambient temperature:** 24°C

**Relative humidity:** 52% RH

**Date:** June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7188.000        | 31.53          | 8.07                     | 39.60           | 74.00          | -34.40      | V                  | peak   |
| 8196.000        | 31.74          | 9.54                     | 41.28           | 74.00          | -32.72      | V                  | peak   |
| 9348.000        | 30.29          | 10.10                    | 40.39           | 74.00          | -33.61      | V                  | peak   |
| 10152.000       | 29.85          | 12.45                    | 42.30           | 74.00          | -31.70      | V                  | peak   |
| 10308.000       | 29.77          | 12.93                    | 42.70           | 74.00          | -31.30      | V                  | peak   |
| 11136.000       | 31.26          | 15.02                    | 46.28           | 74.00          | -27.72      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7176.000        | 31.02          | 8.04                     | 39.06           | 74.00          | -34.94      | H                  | Peak   |
| 7728.000        | 31.52          | 9.12                     | 40.64           | 74.00          | -33.36      | H                  | Peak   |
| 8124.000        | 32.45          | 9.58                     | 42.03           | 74.00          | -31.97      | H                  | Peak   |
| 9060.000        | 30.84          | 9.27                     | 40.11           | 74.00          | -33.89      | H                  | peak   |
| 9912.000        | 30.62          | 11.73                    | 42.35           | 74.00          | -31.65      | H                  | peak   |
| 10536.000       | 30.28          | 13.64                    | 43.92           | 74.00          | -30.08      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT 40 MHz / 5310MHz  
/(CH High)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6552.000        | 31.32          | 6.97                     | 38.29           | 74.00          | -35.71      | V                  | peak   |
| 7176.000        | 31.63          | 8.04                     | 39.67           | 74.00          | -34.33      | V                  | peak   |
| 7956.000        | 31.41          | 9.56                     | 40.97           | 74.00          | -33.03      | V                  | peak   |
| 8064.000        | 31.76          | 9.61                     | 41.37           | 74.00          | -32.63      | V                  | peak   |
| 9768.000        | 30.17          | 11.31                    | 41.48           | 74.00          | -32.52      | V                  | peak   |
| 10776.000       | 29.68          | 14.39                    | 44.07           | 74.00          | -29.93      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 6996.000        | 31.33          | 7.69                     | 39.02           | 74.00          | -34.98      | H                  | Peak   |
| 8004.000        | 31.22          | 9.65                     | 40.87           | 74.00          | -33.13      | H                  | Peak   |
| 8976.000        | 30.74          | 9.11                     | 39.85           | 74.00          | -34.15      | H                  | Peak   |
| 9804.000        | 30.26          | 11.42                    | 41.68           | 74.00          | -32.32      | H                  | peak   |
| 10740.000       | 30.26          | 14.27                    | 44.53           | 74.00          | -29.47      | H                  | peak   |
| 11520.000       | 30.43          | 14.85                    | 45.28           | 74.00          | -28.72      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT 40 MHz / 5510MHz  
 /(CH Low)

Tested by: Saber Huang

Ambient temperature: 24°C

Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6936.000        | 31.78          | 7.60                     | 39.38           | 74.00          | -34.62      | V                  | peak   |
| 7644.000        | 31.21          | 8.96                     | 40.17           | 74.00          | -33.83      | V                  | peak   |
| 8412.000        | 30.96          | 9.42                     | 40.38           | 74.00          | -33.62      | V                  | peak   |
| 9432.000        | 30.74          | 10.34                    | 41.08           | 74.00          | -32.92      | V                  | peak   |
| 10248.000       | 30.03          | 12.75                    | 42.78           | 74.00          | -31.22      | V                  | peak   |
| 10584.000       | 30.53          | 13.79                    | 44.32           | 74.00          | -29.68      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7356.000        | 31.80          | 8.39                     | 40.19           | 74.00          | -33.81      | H                  | Peak   |
| 7848.000        | 31.22          | 9.35                     | 40.57           | 74.00          | -33.43      | H                  | Peak   |
| 8160.000        | 31.40          | 9.56                     | 40.96           | 74.00          | -33.04      | H                  | Peak   |
| 9528.000        | 29.73          | 10.62                    | 40.35           | 74.00          | -33.65      | H                  | peak   |
| 10116.000       | 30.04          | 12.34                    | 42.38           | 74.00          | -31.62      | H                  | peak   |
| 11136.000       | 30.99          | 15.02                    | 46.01           | 74.00          | -27.99      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT 40 MHz / 5550MHz  
/(CH Mid)

Tested by: Saber Huang

Ambient temperature: 24°C

Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7476.000        | 31.54          | 8.63                     | 40.17           | 74.00          | -33.83      | V                  | peak   |
| 7932.000        | 31.40          | 9.52                     | 40.92           | 74.00          | -33.08      | V                  | peak   |
| 8412.000        | 31.33          | 9.42                     | 40.75           | 74.00          | -33.25      | V                  | peak   |
| 9384.000        | 30.80          | 10.21                    | 41.01           | 74.00          | -32.99      | V                  | peak   |
| 10092.000       | 29.73          | 12.27                    | 42.00           | 74.00          | -32.00      | V                  | peak   |
| 10368.000       | 30.32          | 13.12                    | 43.44           | 74.00          | -30.56      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7752.000        | 30.93          | 9.17                     | 40.10           | 74.00          | -33.90      | H                  | Peak   |
| 8364.000        | 31.66          | 9.45                     | 41.11           | 74.00          | -32.89      | H                  | Peak   |
| 9036.000        | 31.90          | 9.20                     | 41.10           | 74.00          | -32.90      | H                  | Peak   |
| 9840.000        | 30.19          | 11.52                    | 41.71           | 74.00          | -32.29      | H                  | peak   |
| 10452.000       | 29.66          | 13.38                    | 43.04           | 74.00          | -30.96      | H                  | peak   |
| 11148.000       | 30.90          | 15.01                    | 45.91           | 74.00          | -28.09      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT 40 MHz / 5670MHz  
/(CH High)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6804.000        | 31.71          | 7.38                     | 39.09           | 74.00          | -34.91      | V                  | peak   |
| 7248.000        | 31.47          | 8.18                     | 39.65           | 74.00          | -34.35      | V                  | peak   |
| 7956.000        | 31.39          | 9.56                     | 40.95           | 74.00          | -33.05      | V                  | peak   |
| 8124.000        | 31.61          | 9.58                     | 41.19           | 74.00          | -32.81      | V                  | peak   |
| 9396.000        | 31.42          | 10.24                    | 41.66           | 74.00          | -32.34      | V                  | peak   |
| 10380.000       | 30.13          | 13.16                    | 43.29           | 74.00          | -30.71      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7092.000        | 31.49          | 7.88                     | 39.37           | 74.00          | -34.63      | H                  | Peak   |
| 7560.000        | 31.43          | 8.79                     | 40.22           | 74.00          | -33.78      | H                  | Peak   |
| 8316.000        | 31.48          | 9.48                     | 40.96           | 74.00          | -33.04      | H                  | Peak   |
| 9348.000        | 30.68          | 10.10                    | 40.78           | 74.00          | -33.22      | H                  | peak   |
| 9900.000        | 30.30          | 11.69                    | 41.99           | 74.00          | -32.01      | H                  | peak   |
| 11148.000       | 30.69          | 15.01                    | 45.70           | 74.00          | -28.30      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



**Test Mode:** TX / IEEE 802.11n HT 40 MHz / 5755MHz  
 //(CH Low)

**Tested by:** Saber Huang

**Ambient temperature:** 24°C

**Relative humidity:** 52% RH

**Date:** June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6828.000        | 31.29          | 7.42                     | 38.71           | 74.00          | -35.29      | V                  | peak   |
| 7200.000        | 31.68          | 8.09                     | 39.77           | 74.00          | -34.23      | V                  | peak   |
| 7632.000        | 31.82          | 8.93                     | 40.75           | 74.00          | -33.25      | V                  | peak   |
| 8436.000        | 31.21          | 9.41                     | 40.62           | 74.00          | -33.38      | V                  | peak   |
| 9384.000        | 31.08          | 10.21                    | 41.29           | 74.00          | -32.71      | V                  | peak   |
| 10920.000       | 29.35          | 14.83                    | 44.18           | 74.00          | -29.82      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7644.000        | 32.05          | 8.96                     | 41.01           | 74.00          | -32.99      | H                  | Peak   |
| 8340.000        | 31.34          | 9.46                     | 40.80           | 74.00          | -33.20      | H                  | Peak   |
| 9024.000        | 31.45          | 9.17                     | 40.62           | 74.00          | -33.38      | H                  | Peak   |
| 9828.000        | 30.51          | 11.48                    | 41.99           | 74.00          | -32.01      | H                  | peak   |
| 10680.000       | 30.58          | 14.09                    | 44.67           | 74.00          | -29.33      | H                  | peak   |
| 11832.000       | 30.37          | 14.71                    | 45.08           | 74.00          | -28.92      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11n HT 40 MHz / 5795MHz  
/(CH High)

Tested by: Saber Huang

Ambient temperature: 24°C      Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6828.000        | 32.03          | 7.42                     | 39.45           | 74.00          | -34.55      | V                  | peak   |
| 8100.000        | 31.82          | 9.60                     | 41.42           | 74.00          | -32.58      | V                  | peak   |
| 8412.000        | 31.47          | 9.42                     | 40.89           | 74.00          | -33.11      | V                  | peak   |
| 9360.000        | 30.51          | 10.14                    | 40.65           | 74.00          | -33.35      | V                  | peak   |
| 10596.000       | 30.04          | 13.83                    | 43.87           | 74.00          | -30.13      | V                  | peak   |
| 11304.000       | 30.49          | 14.95                    | 45.44           | 74.00          | -28.56      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 6660.000        | 31.60          | 7.15                     | 38.75           | 74.00          | -35.25      | H                  | Peak   |
| 7524.000        | 31.55          | 8.72                     | 40.27           | 74.00          | -33.73      | H                  | Peak   |
| 8400.000        | 31.45          | 9.43                     | 40.88           | 74.00          | -33.12      | H                  | Peak   |
| 9168.000        | 31.13          | 9.58                     | 40.71           | 74.00          | -33.29      | H                  | peak   |
| 10188.000       | 30.24          | 12.56                    | 42.80           | 74.00          | -31.20      | H                  | peak   |
| 11496.000       | 30.51          | 14.86                    | 45.37           | 74.00          | -28.63      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).





Test Mode: TX / IEEE 802. 11ac 80 / 5210MHz /(CH Low)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 6780.000        | 33.13          | 7.34                     | 40.47           | 74.00          | -33.53      | V                  | peak   |
| 7452.000        | 31.38          | 8.58                     | 39.96           | 74.00          | -34.04      | V                  | peak   |
| 8148.000        | 31.79          | 9.57                     | 41.36           | 74.00          | -32.64      | V                  | peak   |
| 8364.000        | 32.13          | 9.45                     | 41.58           | 74.00          | -32.42      | V                  | peak   |
| 9012.000        | 31.86          | 9.13                     | 40.99           | 74.00          | -33.01      | V                  | peak   |
| 10224.000       | 30.45          | 12.67                    | 43.12           | 74.00          | -30.88      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7104.000        | 32.07          | 7.90                     | 39.97           | 74.00          | -34.03      | H                  | Peak   |
| 7776.000        | 31.61          | 9.21                     | 40.82           | 74.00          | -33.18      | H                  | Peak   |
| 8652.000        | 31.36          | 9.29                     | 40.65           | 74.00          | -33.35      | H                  | Peak   |
| 9576.000        | 30.44          | 10.76                    | 41.20           | 74.00          | -32.80      | H                  | peak   |
| 10428.000       | 30.19          | 13.31                    | 43.50           | 74.00          | -30.50      | H                  | peak   |
| 10656.000       | 30.74          | 14.01                    | 44.75           | 74.00          | -29.25      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802. 11ac 80 / 5290MHz /(CH High)

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7356.000        | 31.21          | 8.39                     | 39.60           | 74.00          | -34.40      | V                  | peak   |
| 7824.000        | 32.13          | 9.31                     | 41.44           | 74.00          | -32.56      | V                  | peak   |
| 9000.000        | 31.65          | 9.10                     | 40.75           | 74.00          | -33.25      | V                  | peak   |
| 9936.000        | 30.38          | 11.80                    | 42.18           | 74.00          | -31.82      | V                  | peak   |
| 11124.000       | 30.01          | 15.03                    | 45.04           | 74.00          | -28.96      | V                  | peak   |
| 12096.000       | 29.86          | 14.96                    | 44.82           | 74.00          | -29.18      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7176.000        | 32.04          | 8.04                     | 40.08           | 74.00          | -33.92      | H                  | Peak   |
| 8040.000        | 31.85          | 9.63                     | 41.48           | 74.00          | -32.52      | H                  | Peak   |
| 9000.000        | 32.28          | 9.10                     | 41.38           | 74.00          | -32.62      | H                  | Peak   |
| 9468.000        | 30.51          | 10.45                    | 40.96           | 74.00          | -33.04      | H                  | peak   |
| 10056.000       | 30.42          | 12.15                    | 42.57           | 74.00          | -31.43      | H                  | peak   |
| 10824.000       | 30.00          | 14.53                    | 44.53           | 74.00          | -29.47      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802. 11ac 80 / 5530MHz

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7176.000        | 31.96          | 8.04                     | 40.00           | 74.00          | -34.00      | V                  | peak   |
| 7704.000        | 31.48          | 9.07                     | 40.55           | 74.00          | -33.45      | V                  | peak   |
| 8376.000        | 31.38          | 9.44                     | 40.82           | 74.00          | -33.18      | V                  | peak   |
| 8868.000        | 30.88          | 9.17                     | 40.05           | 74.00          | -33.95      | V                  | peak   |
| 9672.000        | 29.98          | 11.04                    | 41.02           | 74.00          | -32.98      | V                  | peak   |
| 10320.000       | 29.40          | 12.97                    | 42.37           | 74.00          | -31.63      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 7092.000        | 31.64          | 7.88                     | 39.52           | 74.00          | -34.48      | H                  | Peak   |
| 7644.000        | 31.66          | 8.96                     | 40.62           | 74.00          | -33.38      | H                  | Peak   |
| 8196.000        | 31.25          | 9.54                     | 40.79           | 74.00          | -33.21      | H                  | Peak   |
| 9420.000        | 30.22          | 10.31                    | 40.53           | 74.00          | -33.47      | H                  | peak   |
| 10596.000       | 29.73          | 13.83                    | 43.56           | 74.00          | -30.44      | H                  | peak   |
| 11304.000       | 30.57          | 14.95                    | 45.52           | 74.00          | -28.48      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).



Test Mode: TX / IEEE 802.11ac 80 / 5775MHz

Tested by: Saber Huang

Ambient temperature: 24°C Relative humidity: 52% RH

Date: June 5, 2018

| Frequency (MHz) | Reading (dBuV) | Correction Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Antenna Pole (V/H) | Remark |
|-----------------|----------------|--------------------------|-----------------|----------------|-------------|--------------------|--------|
| 7140.000        | 31.60          | 7.97                     | 39.57           | 74.00          | -34.43      | V                  | peak   |
| 7716.000        | 31.45          | 9.10                     | 40.55           | 74.00          | -33.45      | V                  | peak   |
| 8424.000        | 31.22          | 9.42                     | 40.64           | 74.00          | -33.36      | V                  | peak   |
| 9384.000        | 30.56          | 10.21                    | 40.77           | 74.00          | -33.23      | V                  | peak   |
| 10332.000       | 29.74          | 13.01                    | 42.75           | 74.00          | -31.25      | V                  | peak   |
| 10632.000       | 29.94          | 13.94                    | 43.88           | 74.00          | -30.12      | V                  | peak   |
|                 |                |                          |                 |                |             |                    |        |
| 6828.000        | 31.49          | 7.42                     | 38.91           | 74.00          | -35.09      | H                  | Peak   |
| 7404.000        | 30.60          | 8.49                     | 39.09           | 74.00          | -34.91      | H                  | Peak   |
| 8124.000        | 31.49          | 9.58                     | 41.07           | 74.00          | -32.93      | H                  | Peak   |
| 9084.000        | 30.66          | 9.34                     | 40.00           | 74.00          | -34.00      | H                  | peak   |
| 10104.000       | 30.34          | 12.30                    | 42.64           | 74.00          | -31.36      | H                  | peak   |
| 10308.000       | 29.83          | 12.93                    | 42.76           | 74.00          | -31.24      | H                  | peak   |

**Remark:**

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.
3. Average test would be performed if the peak result were greater than the average limit.
4. Data of measurement within this frequency range shown " --- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
5. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with " N/A " remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
6. Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).




## 6.8 CONDUCTED UNDESIRABLE EMISSION

### 6.8.1 LIMIT

According to 15.407(b),

- (1) For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz.
- (2) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (3) The provisions of §15.205 apply to intentional radiators operating under this section.

### 6.8.2 TEST CONFIGURATION



### 6.8.3 TEST PROCEDURE

Conducted RF measurements of the transmitter output were made to confirm that the EUT antenna port conducted emissions meet the specified limit and to identify any spurious signals that require further investigation or measurements on the radiated emissions site.

The transmitter output is connected to the spectrum analyzer. The resolution bandwidth is set to 1MHz. The video bandwidth is set to 3MHz. Peak detection measurements are compared to the average EIRP limit, adjusted for the maximum antenna gain. If necessary, additional average detection measurements are made.


Measurements are made over the 30 MHz to 40 GHz range with the transmitter set to the lowest, middle, and highest channels.




6.8.4 TEST RESULTS

No non-compliance noted


Test Plot

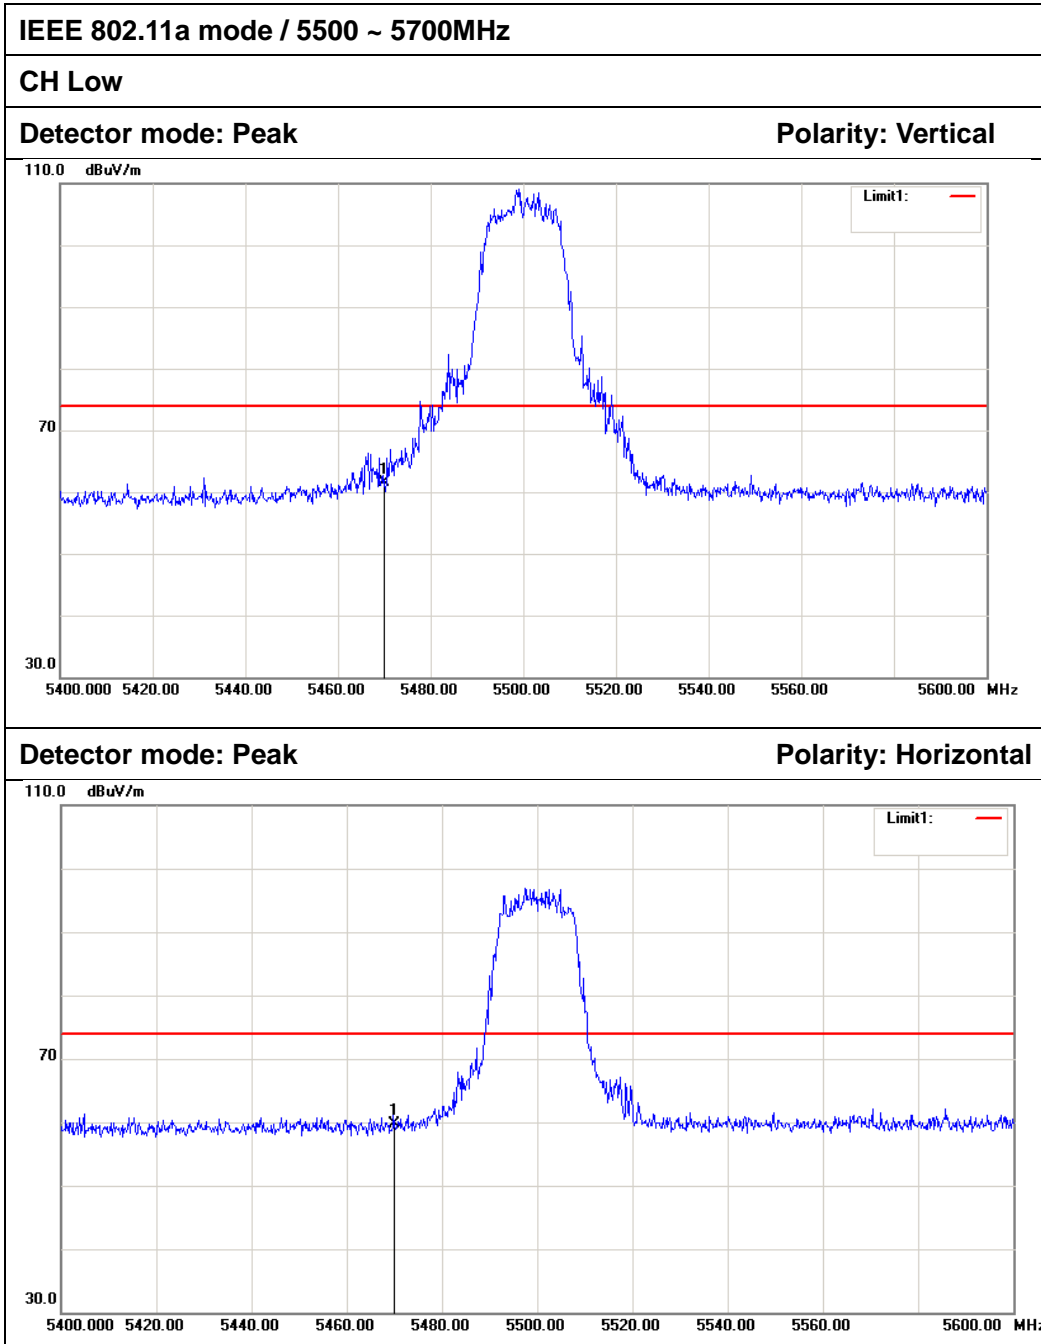

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5470.000        | 55.75          | 5.82          | 61.57           | 74.00          | -12.43      | Peak   | Vertical      |
| 2   | 5470.000        | 53.82          | 5.82          | 59.64           | 74.00          | -14.36      | Peak   | Horizontal    |

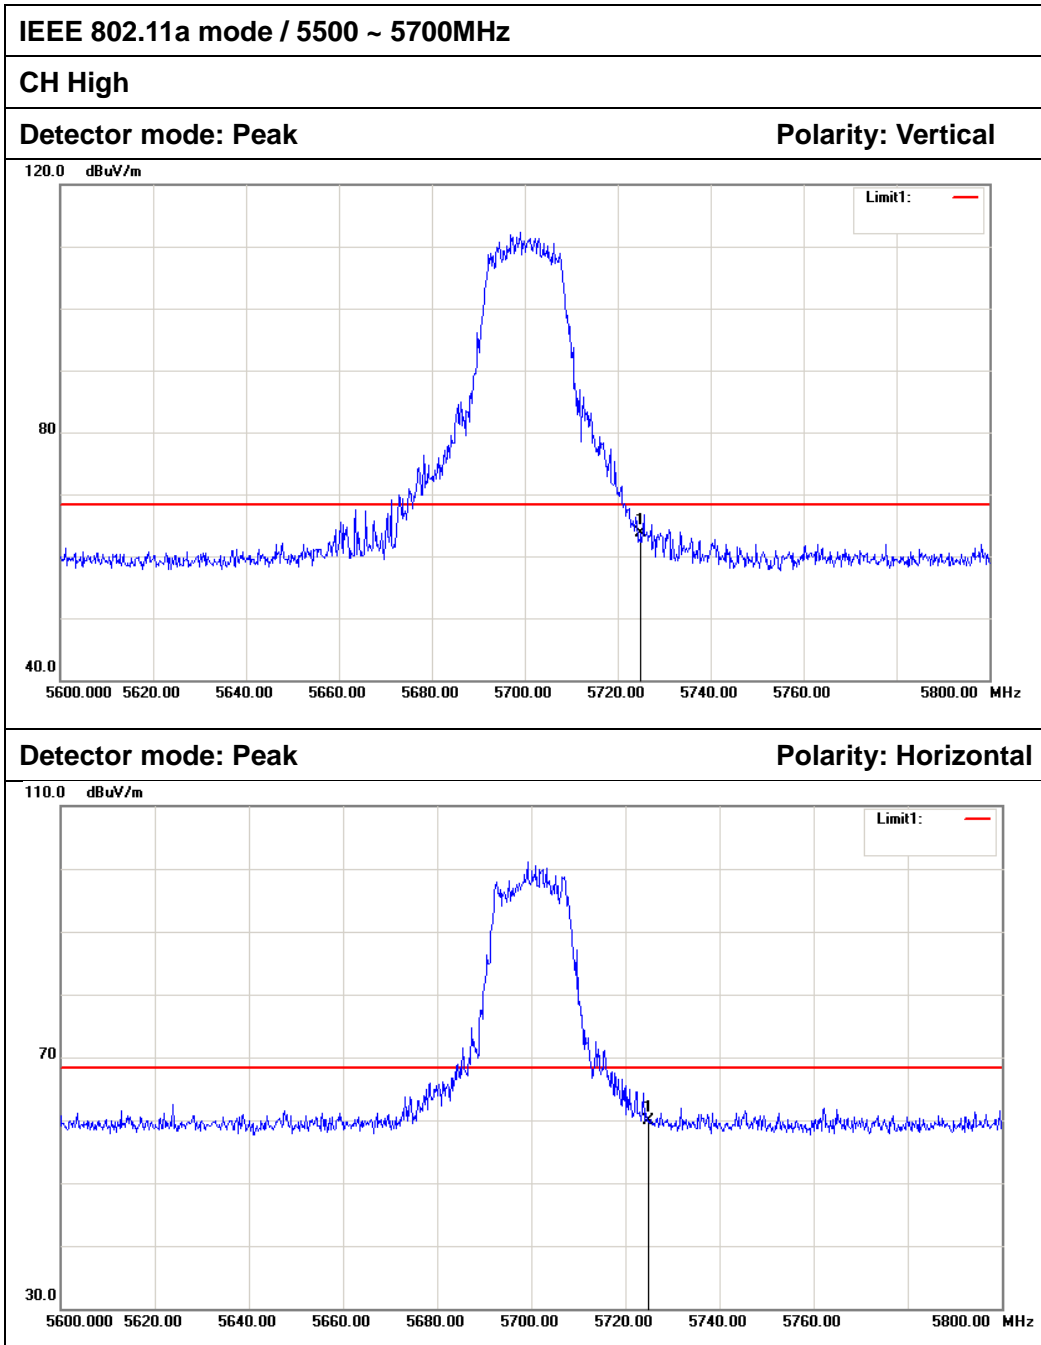


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5725.000        | 57.75          | 5.96          | 63.71           | 68.20          | -4.49       | Peak   | Vertical      |
| 2   | 5725.000        | 53.88          | 5.96          | 59.84           | 68.20          | -8.36       | Peak   | Horizontal    |

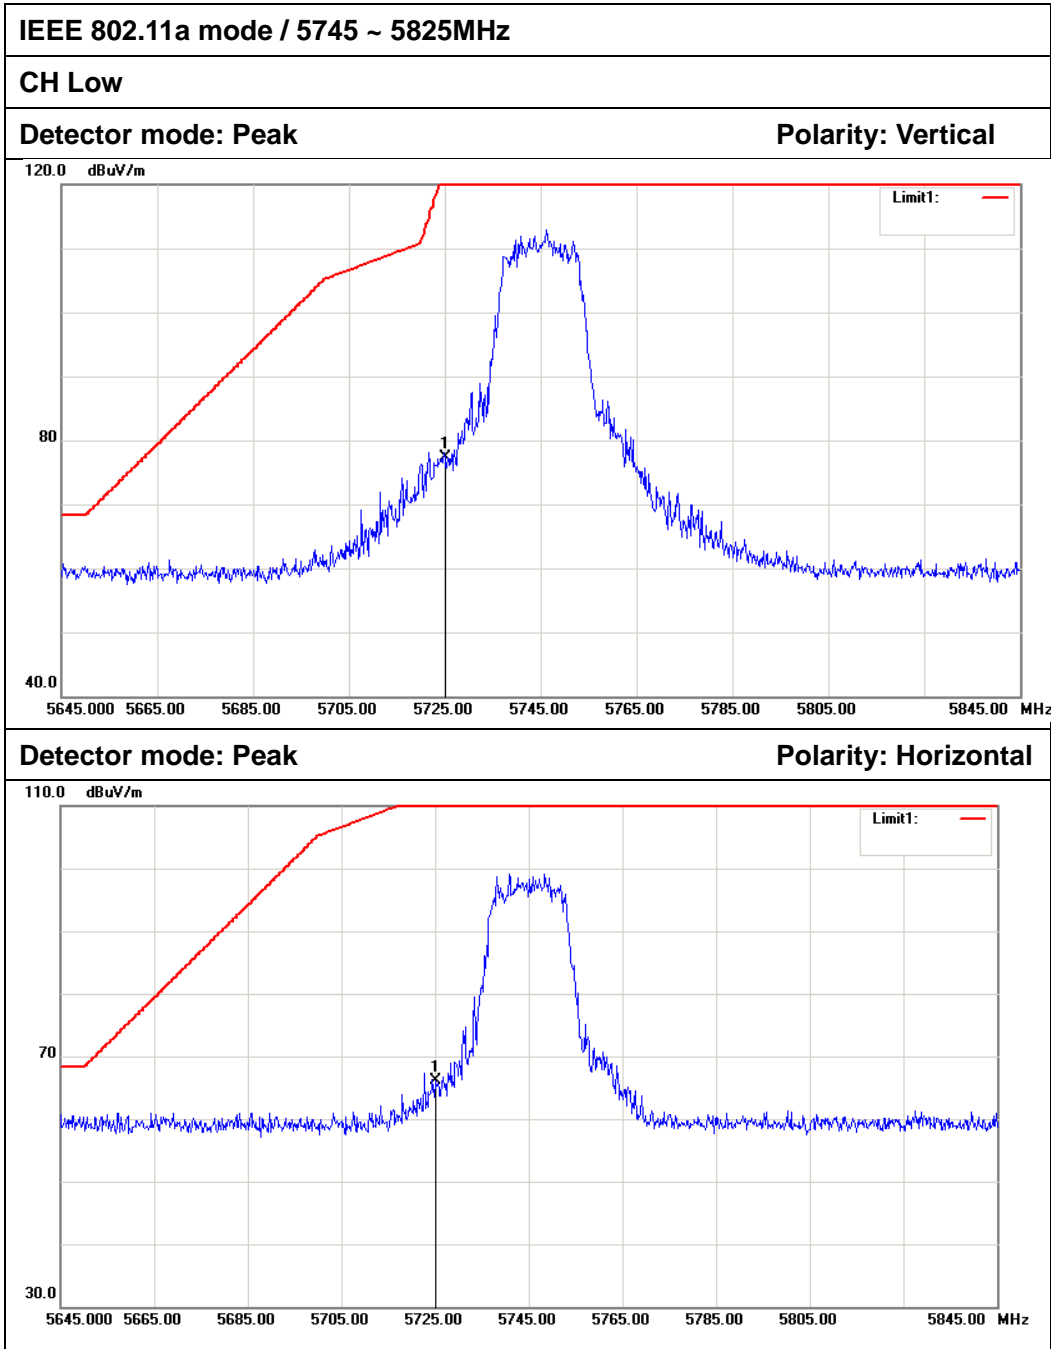


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5725.000        | 71.41          | 5.96          | 77.37           | 122.20         | -44.83      | Peak   | Vertical      |
| 2   | 5725.000        | 60.08          | 5.96          | 66.04           | 122.20         | -56.16      | Peak   | Horizontal    |




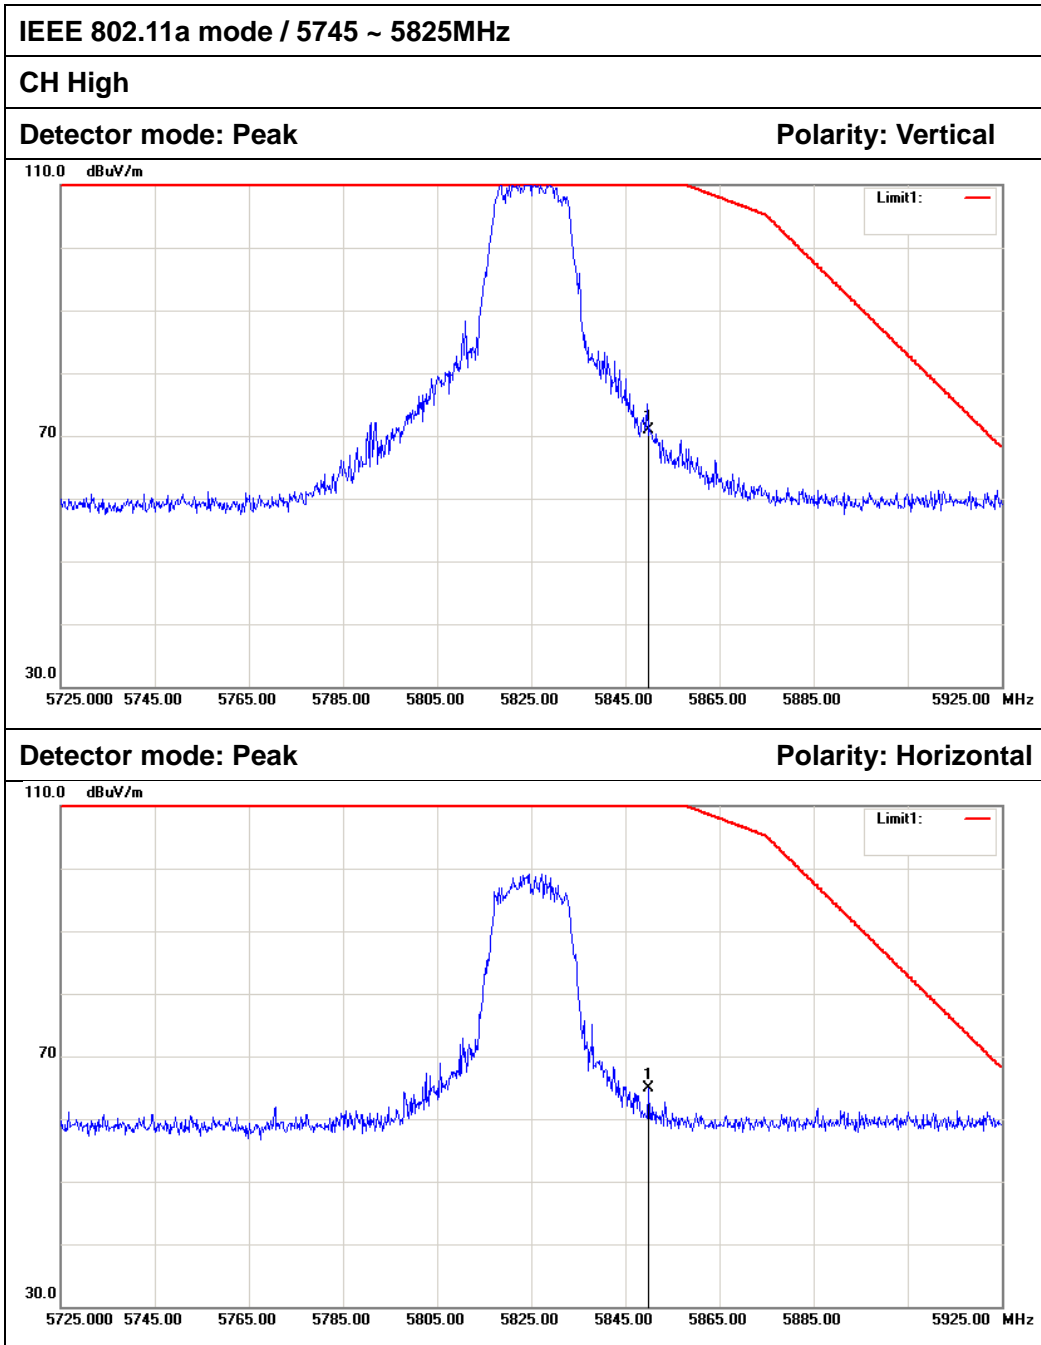


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5850.000        | 64.91          | 6.02          | 70.93           | 122.20         | -51.27      | Peak   | Vertical      |
| 2   | 5850.000        | 58.88          | 6.02          | 64.90           | 122.20         | -57.30      | Peak   | Horizontal    |

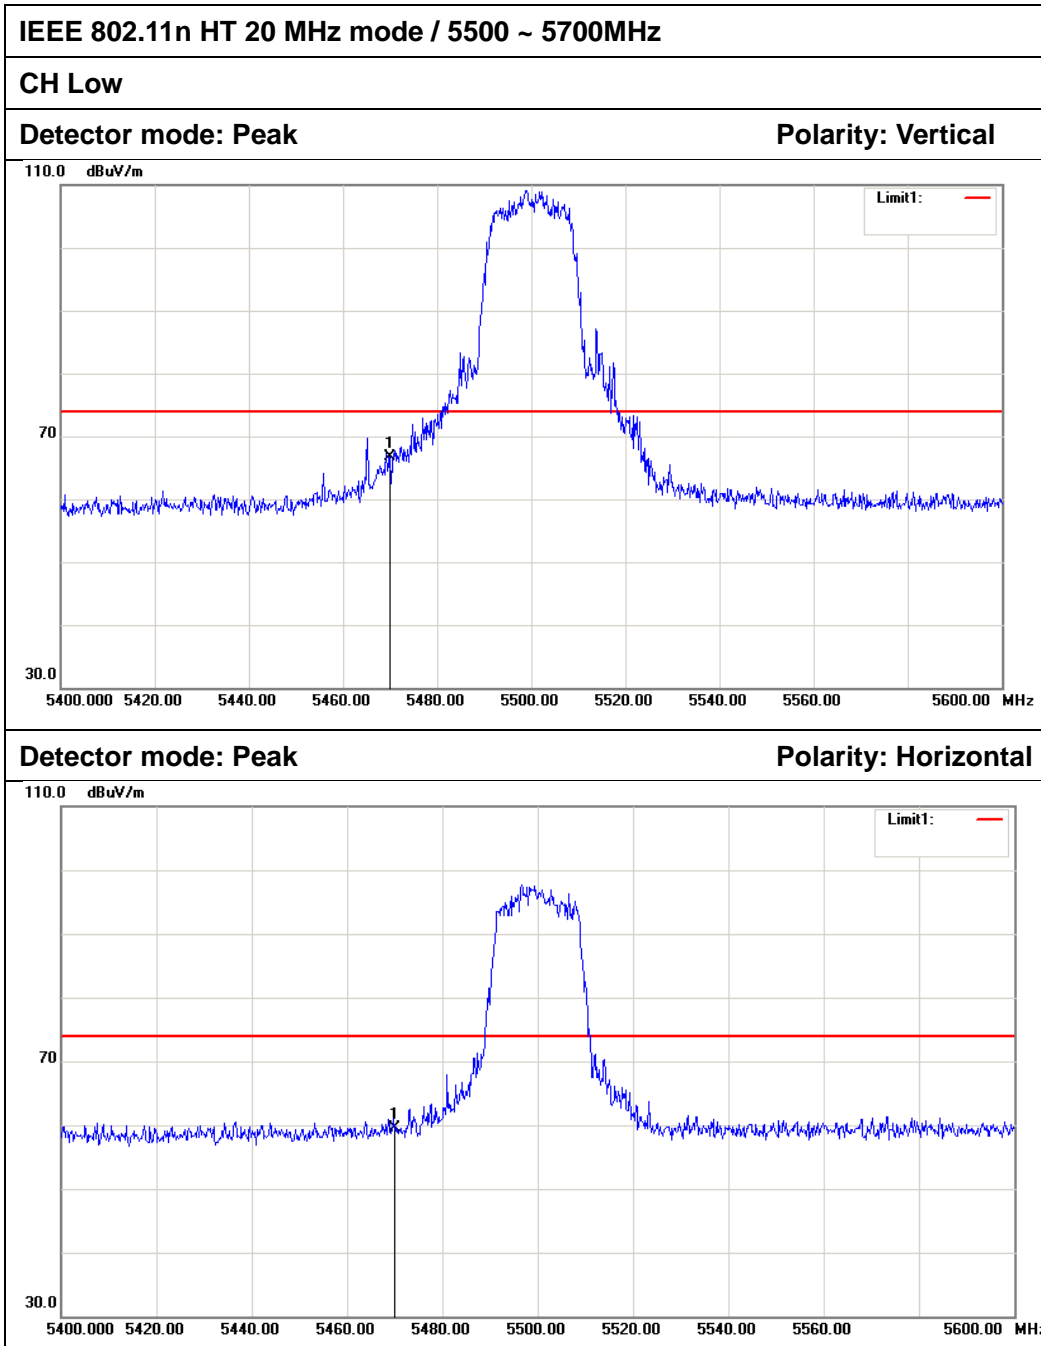


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5470.000        | 60.93          | 5.82          | 66.75           | 74.00          | -7.25       | Peak   | Vertical      |
| 2   | 5470.000        | 53.75          | 5.82          | 59.57           | 74.00          | -14.43      | Peak   | Horizontal    |

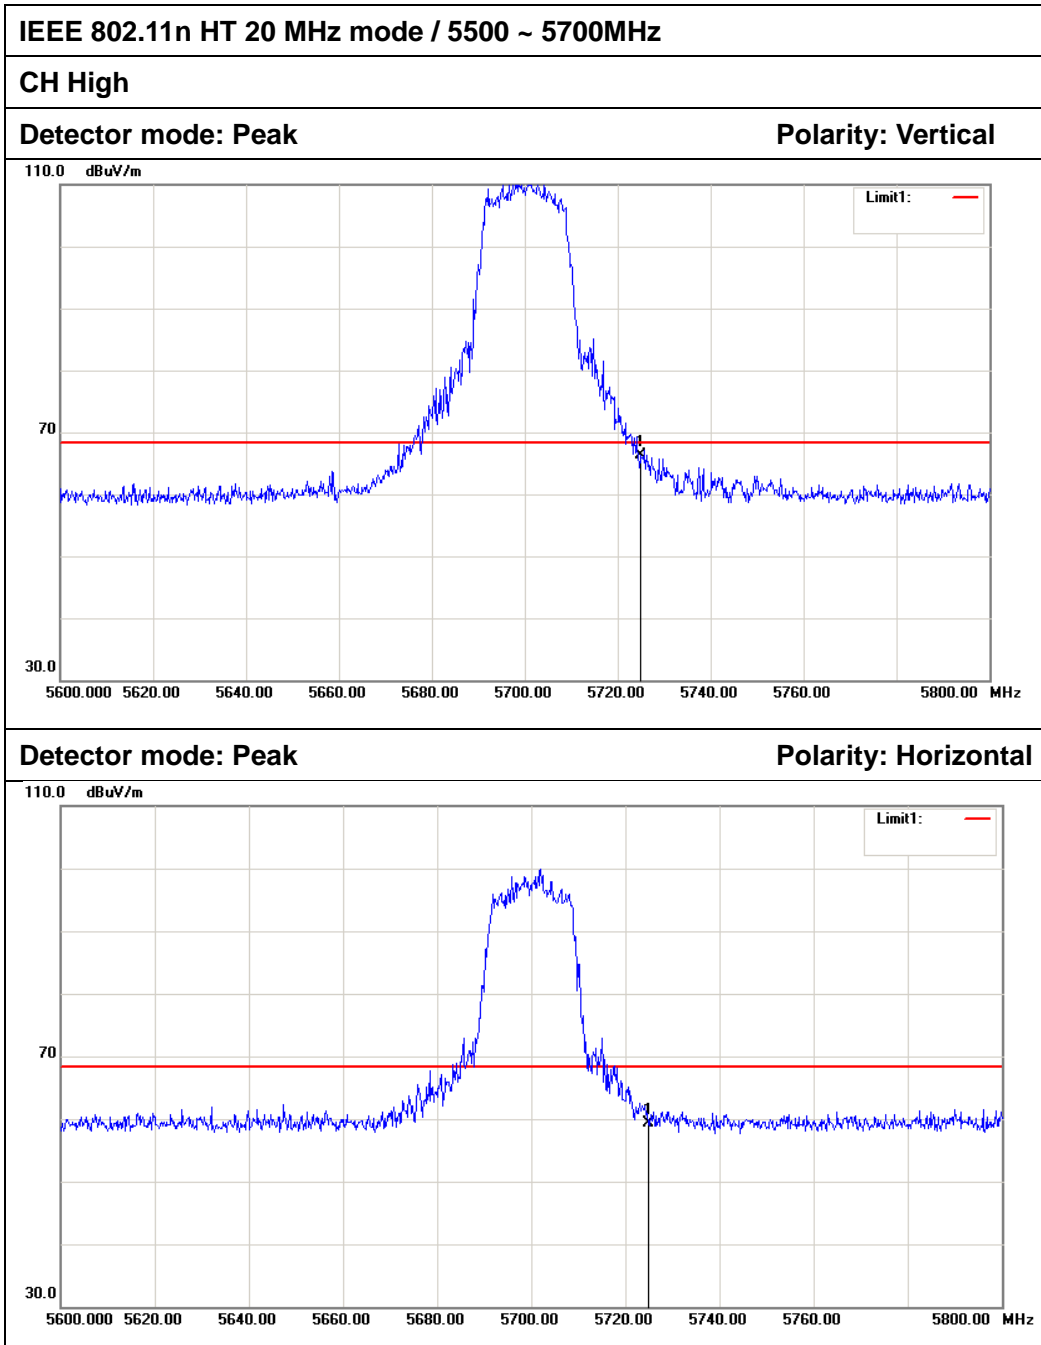


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5725.000        | 60.33          | 5.96          | 66.29           | 68.20          | -1.91       | Peak   | Vertical      |
| 2   | 5725.000        | 53.30          | 5.96          | 59.26           | 68.20          | -8.94       | Peak   | Horizontal    |

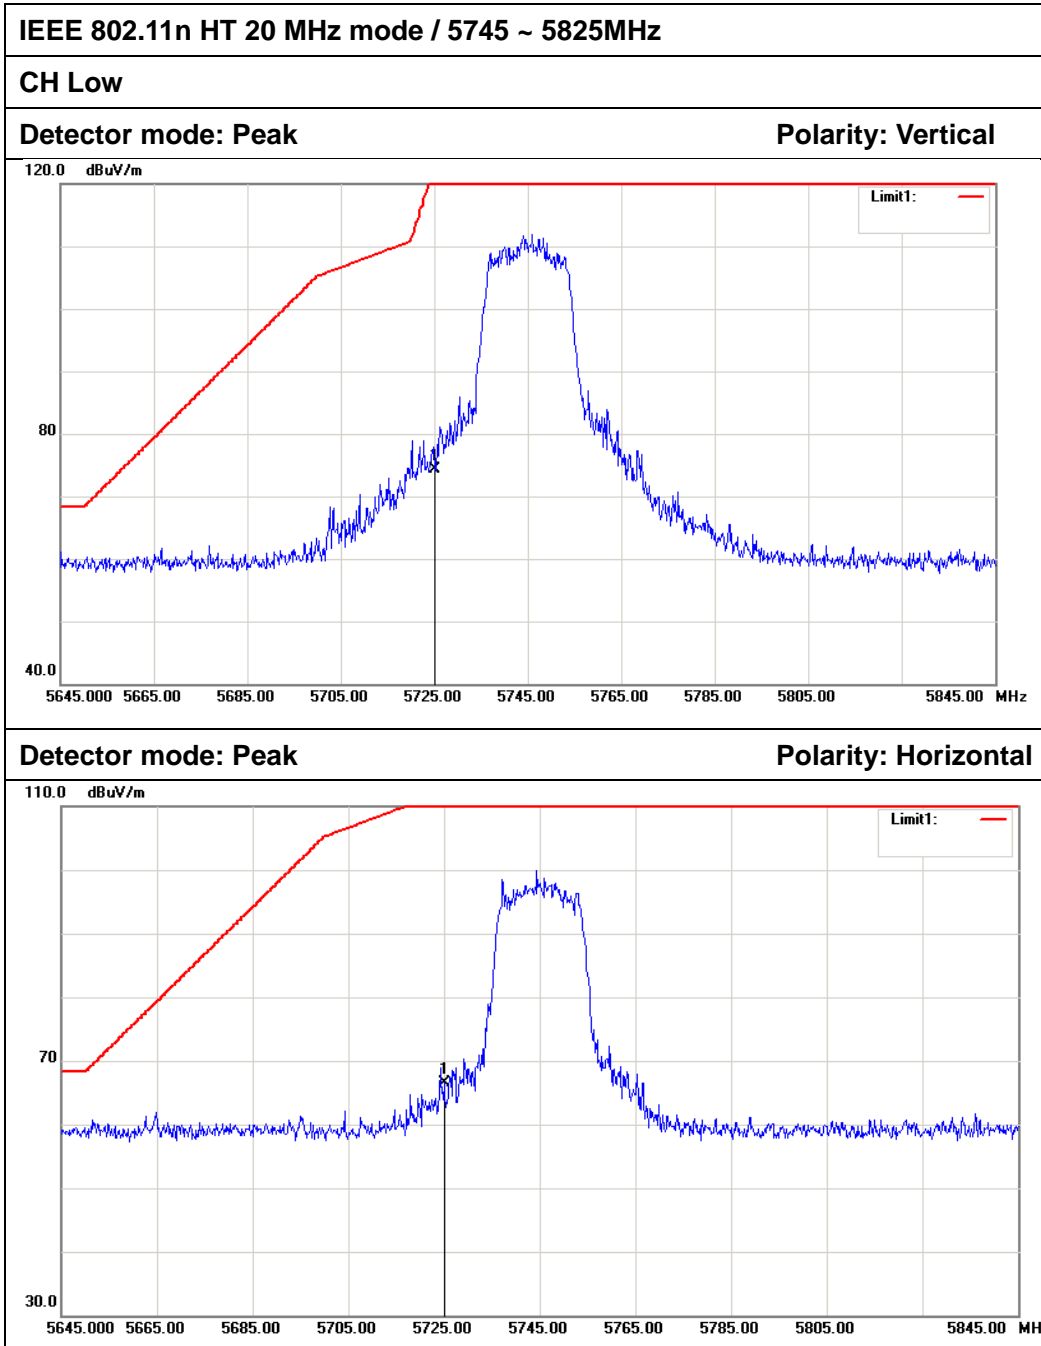


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5725.000        | 68.31          | 5.96          | 74.27           | 122.20         | -47.93      | Peak   | Vertical      |
| 2   | 5725.000        | 60.52          | 5.96          | 66.48           | 122.20         | -55.72      | Peak   | Horizontal    |

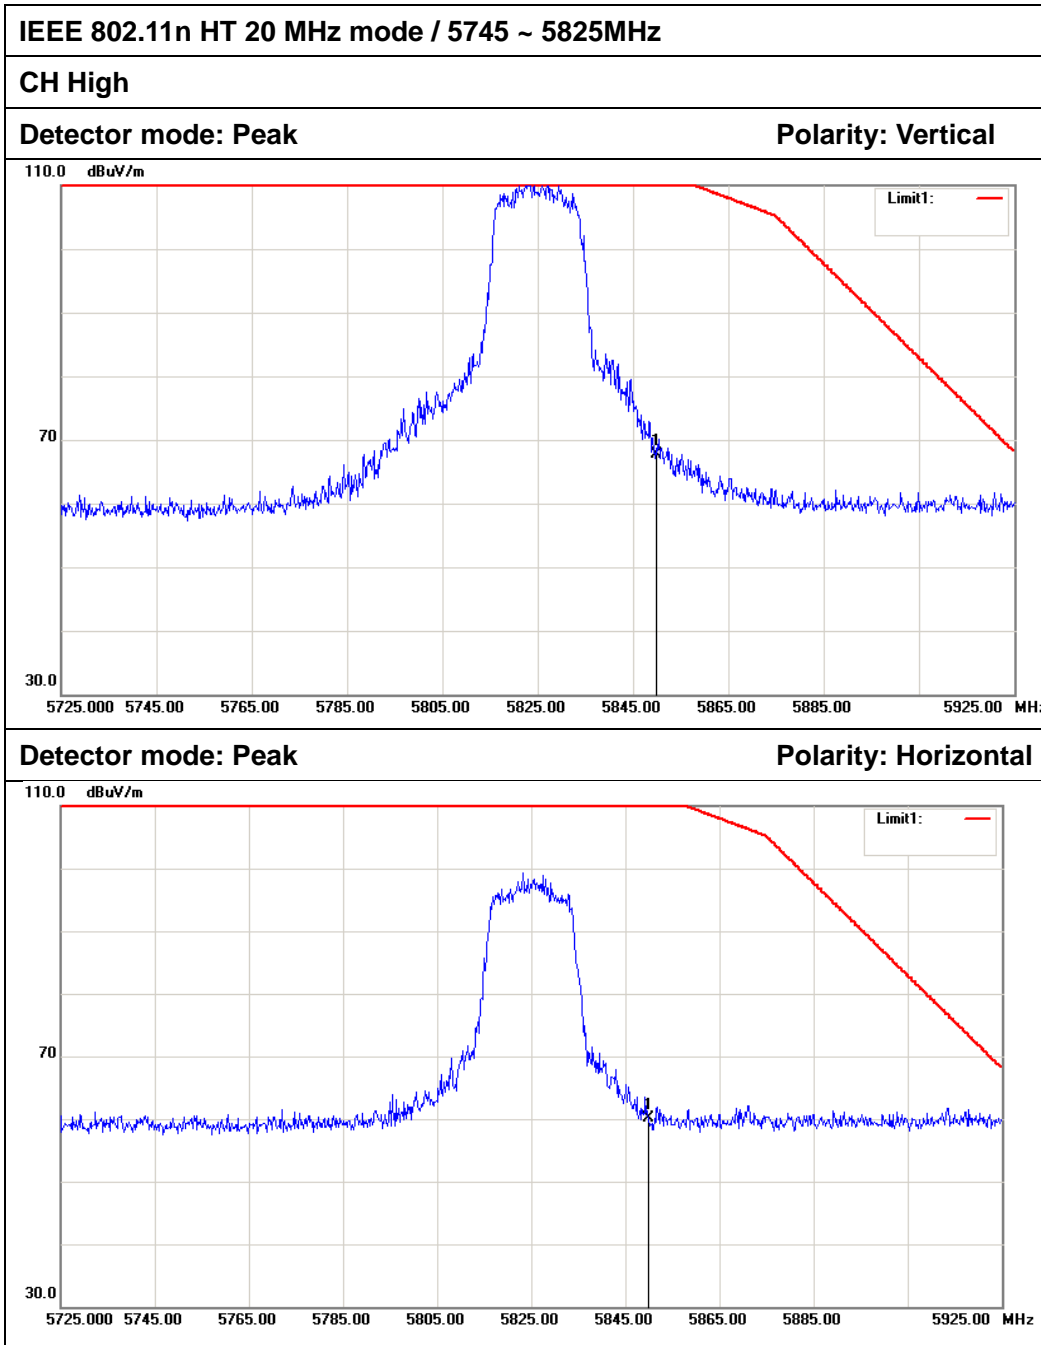


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5850.000        | 61.63          | 6.02          | 67.65           | 122.20         | -54.55      | Peak   | Vertical      |
| 2   | 5850.000        | 54.01          | 6.02          | 60.03           | 122.20         | -62.17      | Peak   | Horizontal    |

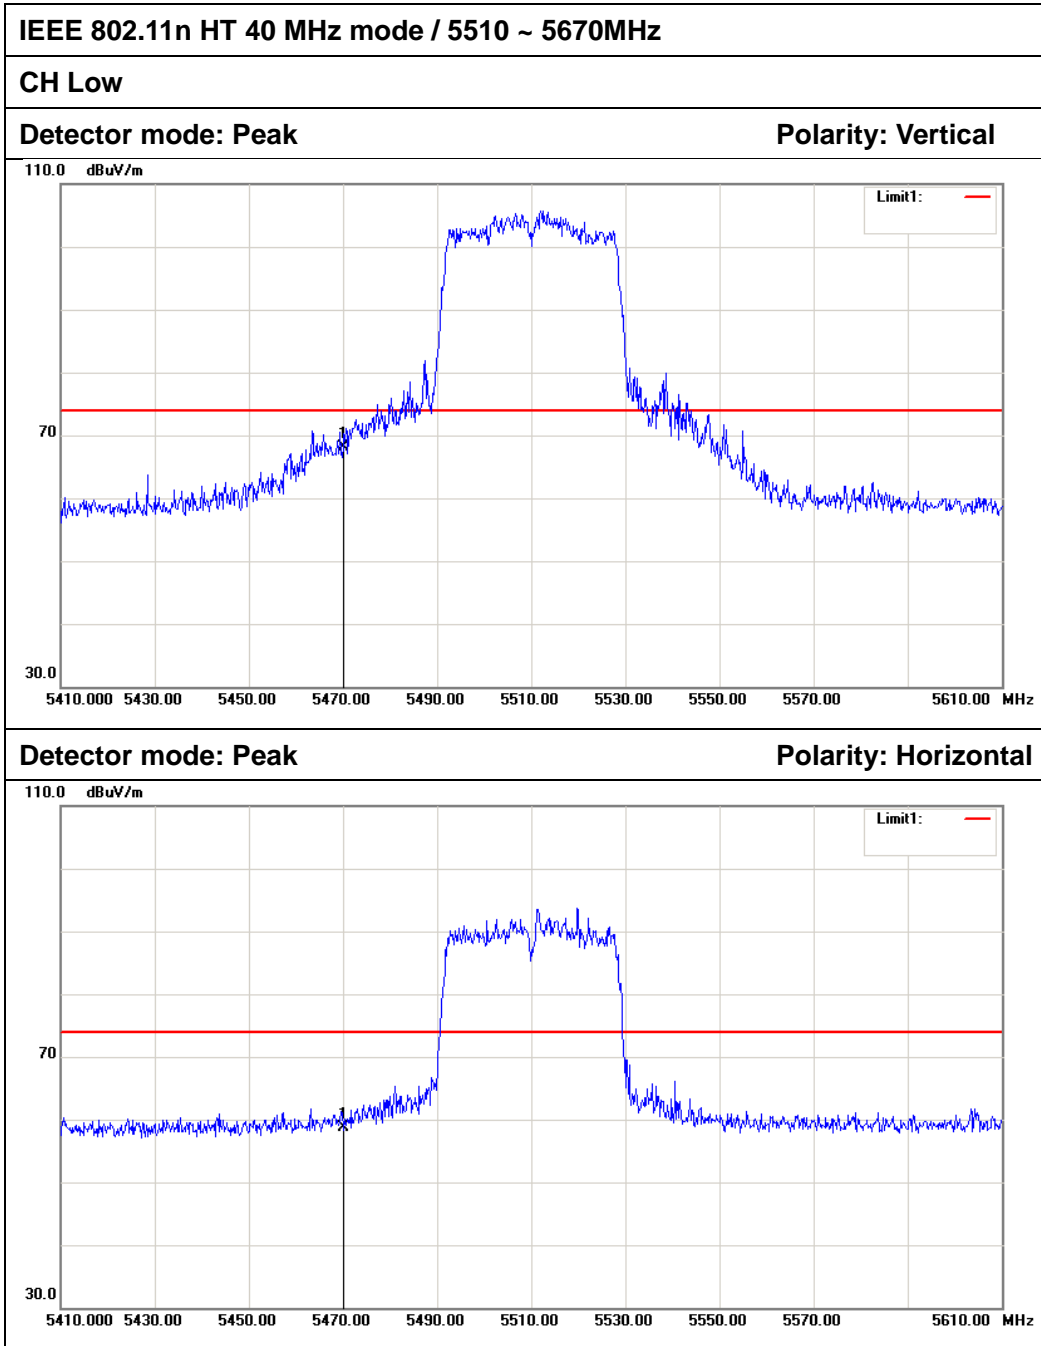

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5470.000        | 62.29          | 5.82          | 68.11           | 74.00          | -5.89       | Peak   | Vertical      |
| 2   | 5470.000        | 52.93          | 5.82          | 58.75           | 74.00          | -15.25      | Peak   | Horizontal    |

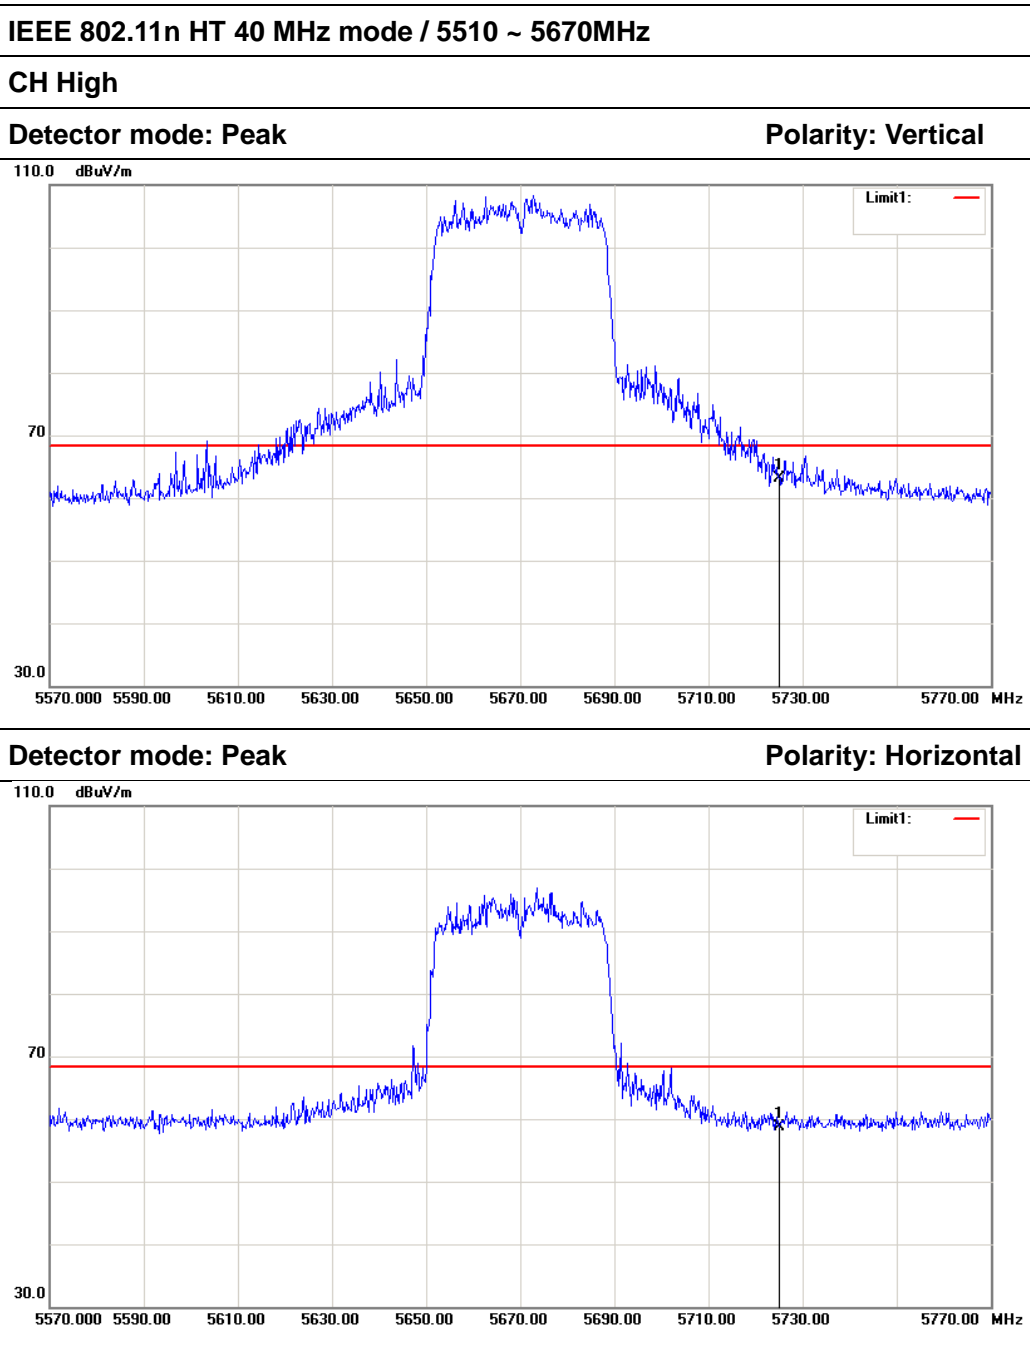


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5725.000        | 57.19          | 5.96          | 63.15           | 68.20          | -5.05       | Peak   | Vertical      |
| 2   | 5725.000        | 52.72          | 5.96          | 58.68           | 68.20          | -9.52       | Peak   | Horizontal    |

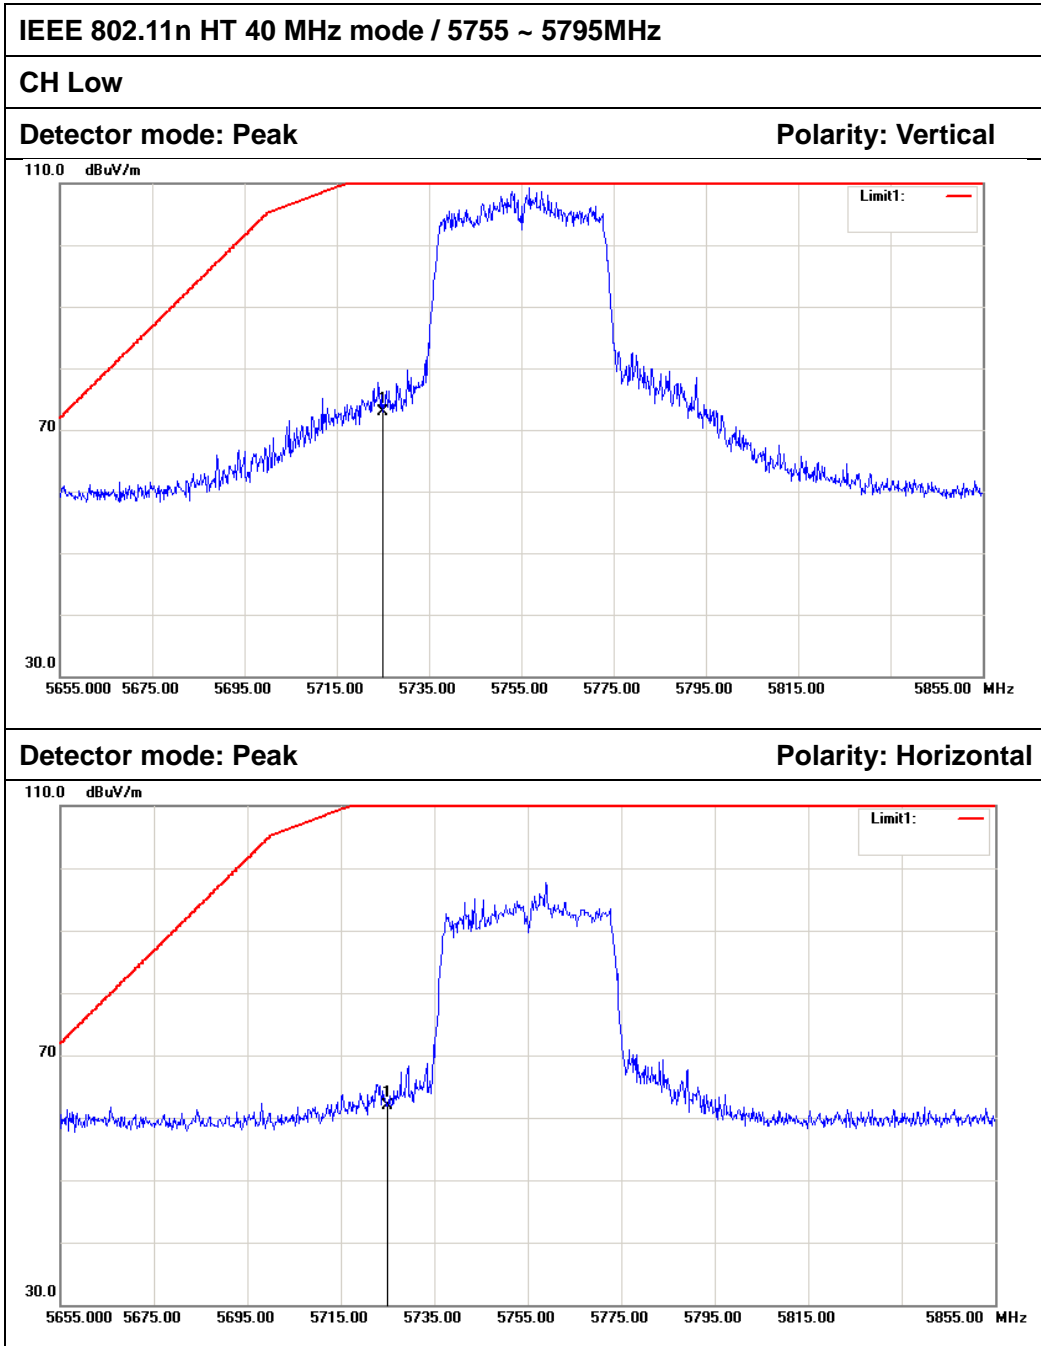


| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5725.000        | 66.99          | 5.96          | 72.95           | 122.20         | -49.25      | Peak   | Vertical      |
| 2   | 5725.000        | 56.03          | 5.96          | 61.99           | 122.20         | -60.21      | Peak   | Horizontal    |




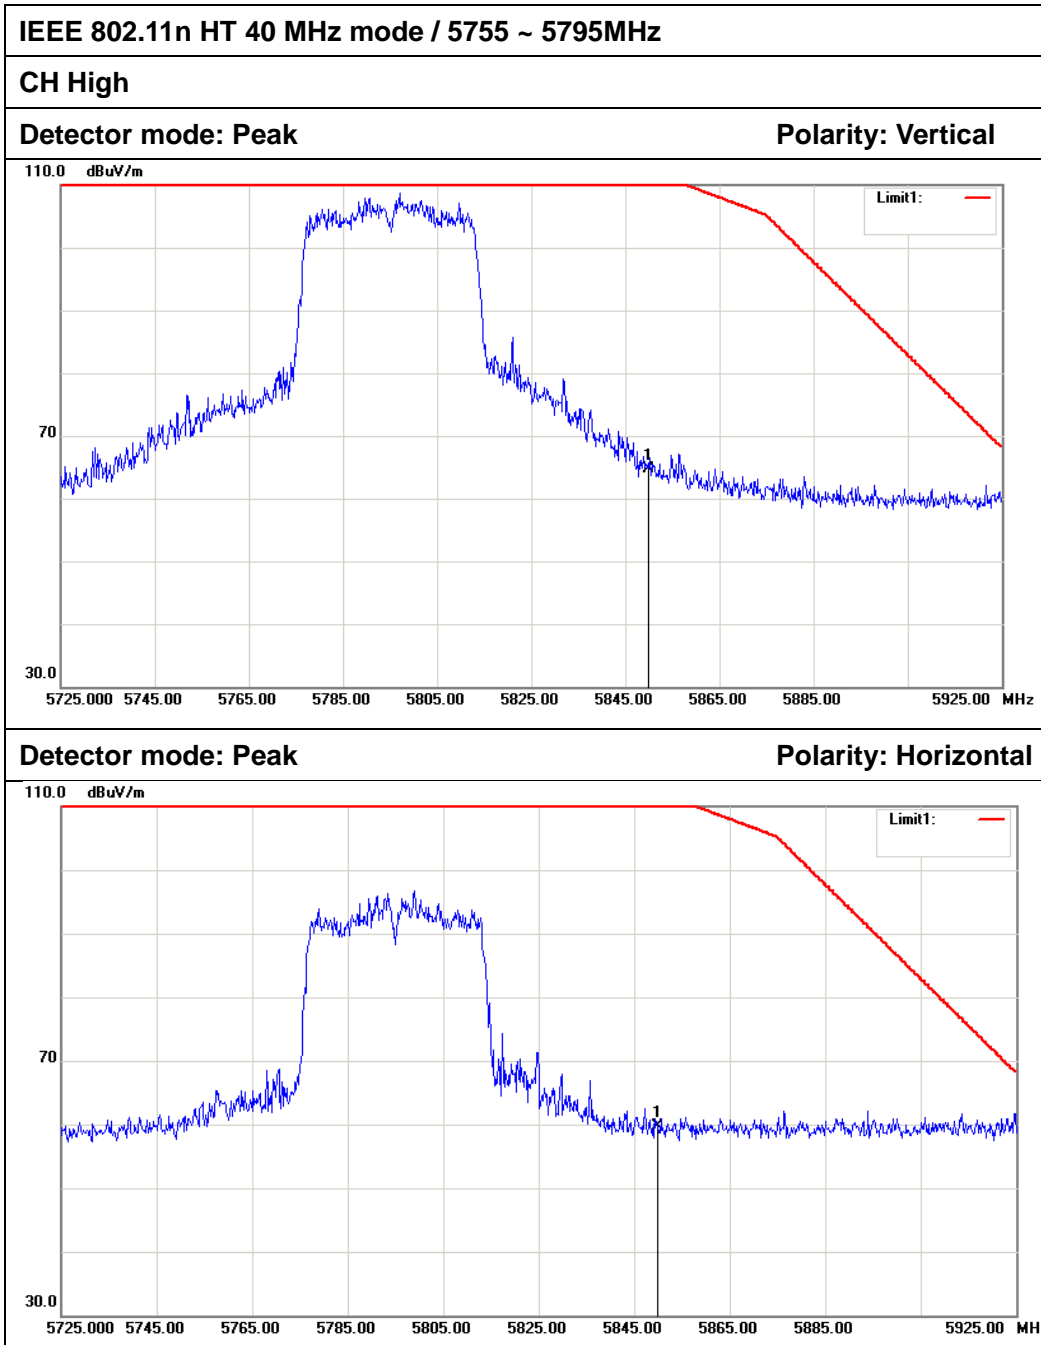

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5850.000        | 58.63          | 6.02          | 64.65           | 122.20         | -57.55      | Peak   | Vertical      |
| 2   | 5850.000        | 53.64          | 6.02          | 59.66           | 122.20         | -62.54      | Peak   | Horizontal    |

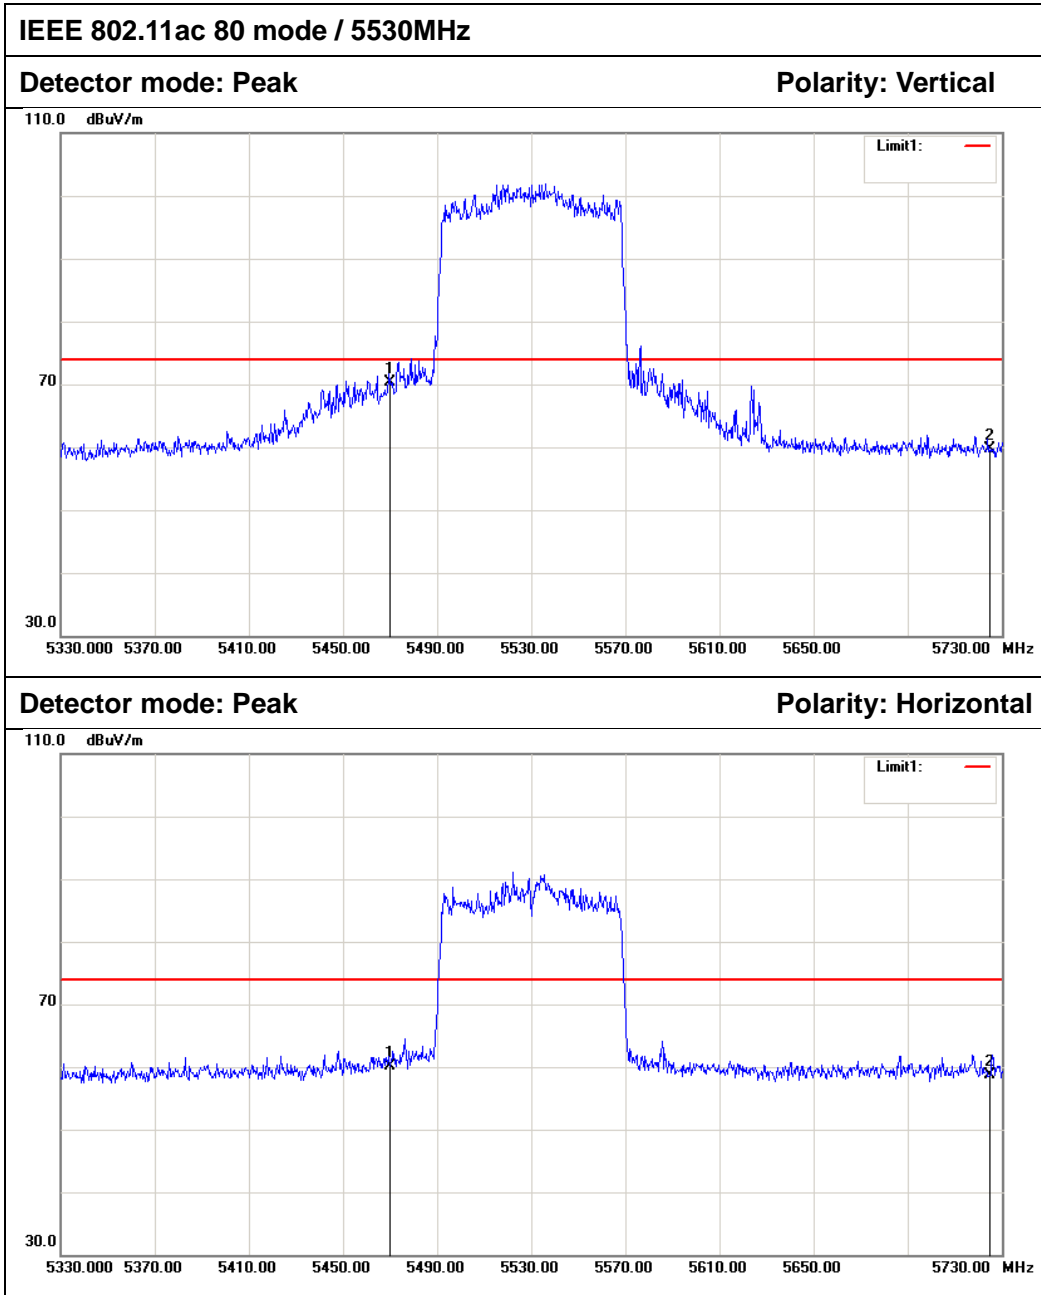

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5470.000        | 64.43          | 5.82          | 70.25           | 74.00          | -3.75       | Peak   | Vertical      |
| 2   | 5725.000        | 53.67          | 5.96          | 59.63           | 74.00          | -14.37      | Peak   | Vertical      |
| 1   | 5470.000        | 54.37          | 5.82          | 60.19           | 74.00          | -13.81      | Peak   | Horizontal    |
| 2   | 5725.000        | 52.72          | 5.96          | 58.68           | 74.00          | -15.32      | Peak   | Horizontal    |

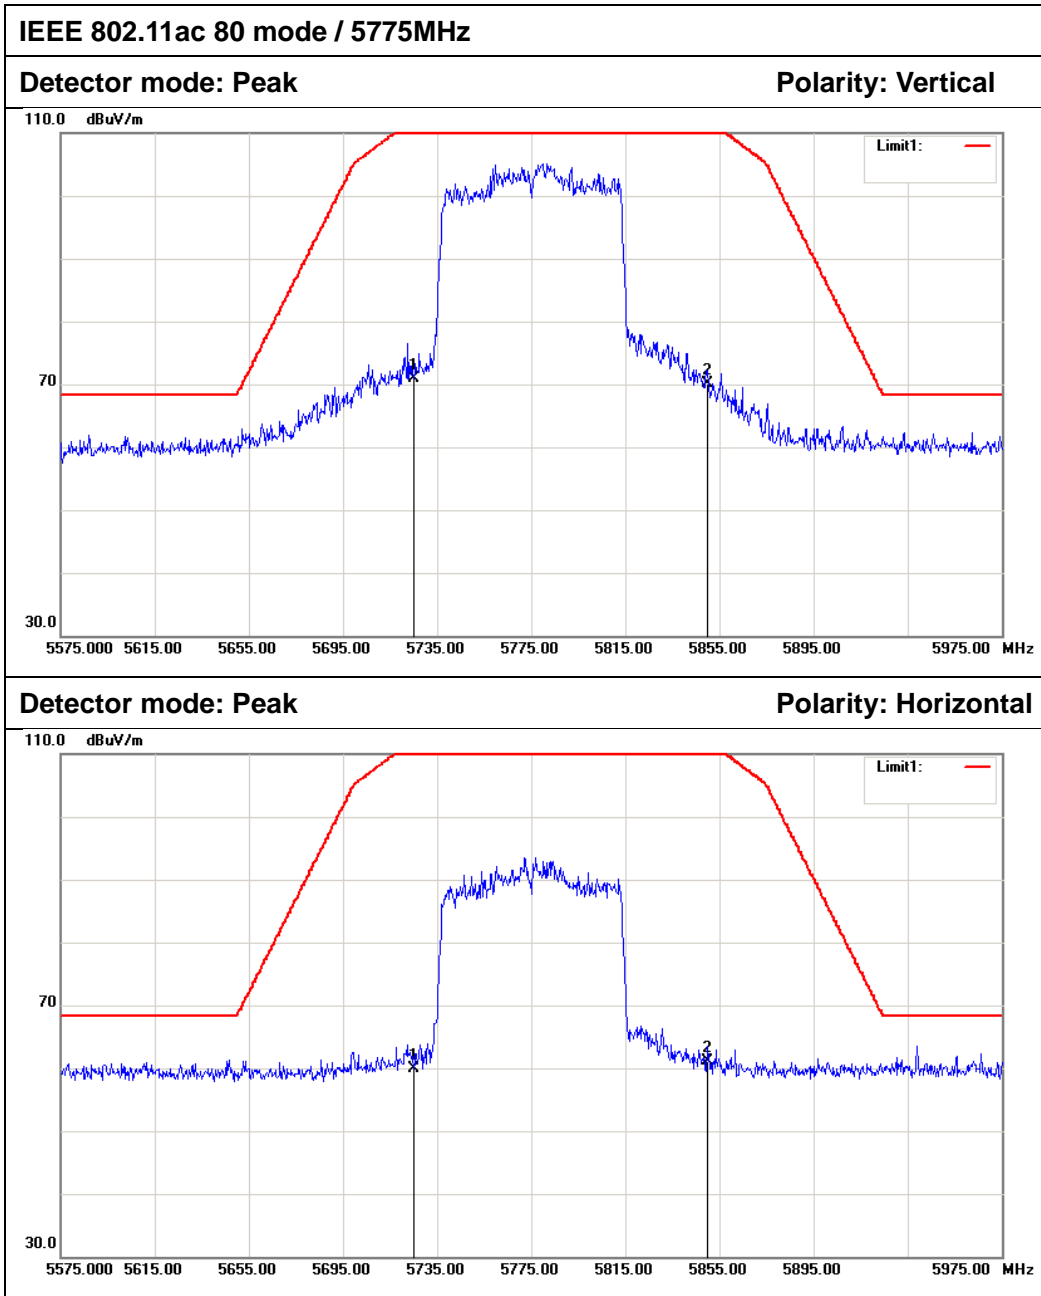

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Result (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Remark | Antenna Polar |
|-----|-----------------|----------------|---------------|-----------------|----------------|-------------|--------|---------------|
| 1   | 5725.000        | 65.03          | 5.96          | 70.99           | 122.20         | -51.21      | Peak   | Vertical      |
| 2   | 5850.000        | 64.13          | 6.02          | 70.15           | 122.20         | -52.05      | Peak   | Vertical      |
| 1   | 5725.000        | 54.02          | 5.96          | 59.98           | 122.20         | -62.22      | Peak   | Horizontal    |
| 2   | 5850.000        | 55.18          | 6.02          | 61.20           | 122.20         | -61.00      | Peak   | Horizontal    |



## 6.9 POWERLINE CONDUCTED EMISSIONS


### 6.9.1 LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency Range (MHz) | Limits (dB $\mu$ V) |           |
|-----------------------|---------------------|-----------|
|                       | Quasi-peak          | Average   |
| 0.15 to 0.50          | 66 to 56*           | 56 to 46* |
| 0.50 to 5             | 56                  | 46        |
| 5 to 30               | 60                  | 50        |

\* Decreases with the logarithm of the frequency.

### 6.9.2 TEST CONFIGURATION

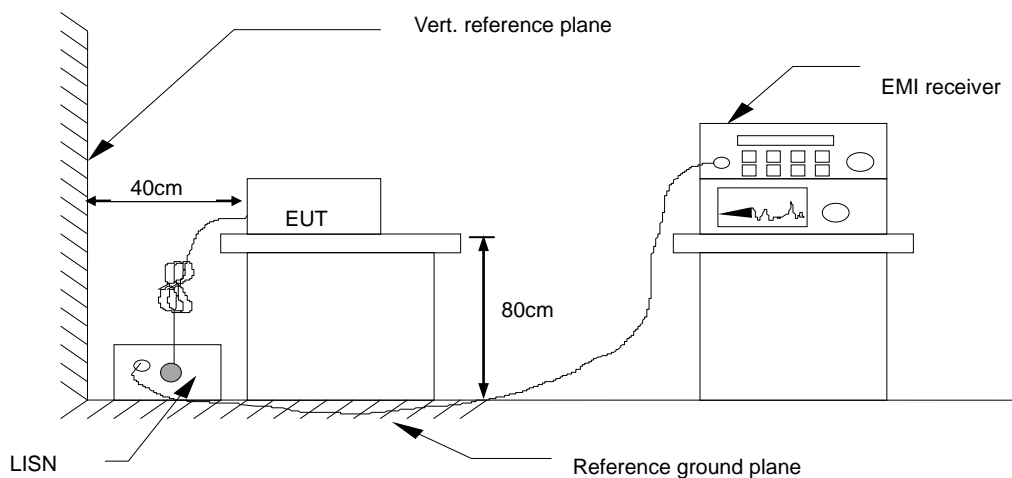



### 6.9.3 TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

### 6.9.4 DATA SAMPLE


| Frequency (MHz) | QuasiPeak Reading (dBuV) | Average Reading (dBuV) | Correction Factor (dB) | QuasiPeak Result (dBuV) | Average Result (dBuV) | QuasiPeak Limit (dBuV) | Average Limit (dBuV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| X.XXXX          | 32.69                    | 25.65                  | 11.52                  | 44.21                   | 37.17                 | 65.78                  | 55.79                | -21.57                | -18.62              | Pass               |

Factor = Insertion loss of LISN + Cable Loss  
Result = Quasi-peak Reading/ Average Reading + Factor  
Limit = Limit stated in standard  
Margin = Result (dBuV) – Limit (dBuV)



6.9.5 TEST RESULTS

|                                 |              |                     |              |
|---------------------------------|--------------|---------------------|--------------|
| <b>Model No.</b>                | MUV1         | <b>RBW,VBW</b>      | 9 kHz        |
| <b>Environmental Conditions</b> | 22°C, 45% RH | <b>Test Mode</b>    | Mode 1       |
| <b>Tested by</b>                | Luja Huang   | <b>Line</b>         | L1           |
| <b>Test Date</b>                | May 30, 2018 | <b>Test Voltage</b> | AC 120V/60Hz |

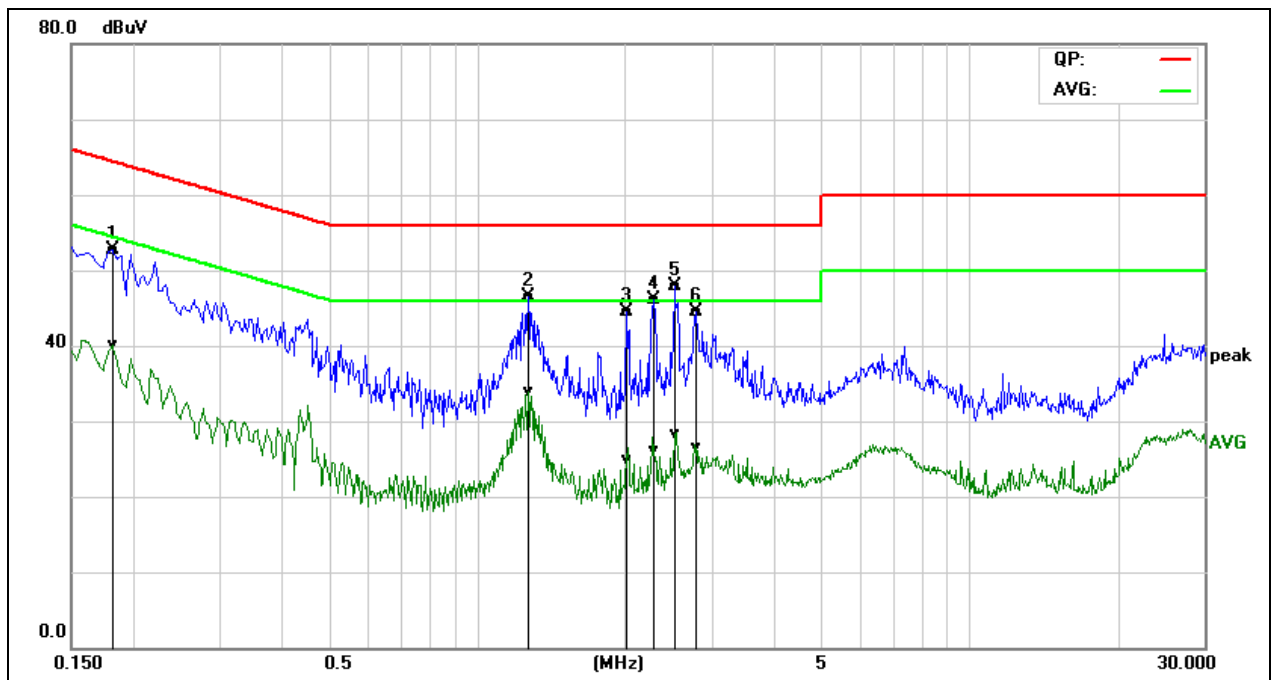


| Frequency (MHz) | QuasiPeak Reading (dBuV) | Average Reading (dBuV) | Correction Factor (dB) | QuasiPeak Result (dBuV) | Average Result (dBuV) | QuasiPeak Limit (dBuV) | Average Limit (dBuV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| 0.1819          | 33.10                    | 20.42                  | 19.63                  | 52.73                   | 40.05                 | 64.39                  | 54.40                | -11.66                | -14.35              | Pass               |
| 1.2740          | 26.98                    | 14.23                  | 19.60                  | 46.58                   | 33.83                 | 56.00                  | 46.00                | -9.42                 | -12.17              | Pass               |
| 2.0220          | 24.69                    | 5.25                   | 19.72                  | 44.41                   | 24.97                 | 56.00                  | 46.00                | -11.59                | -21.03              | Pass               |
| 2.2940          | 26.39                    | 6.38                   | 19.72                  | 46.11                   | 26.10                 | 56.00                  | 46.00                | -9.89                 | -19.90              | Pass               |
| 2.5260          | 28.12                    | 8.65                   | 19.72                  | 47.84                   | 28.37                 | 56.00                  | 46.00                | -8.16                 | -17.63              | Pass               |
| 2.7940          | 24.79                    | 6.69                   | 19.72                  | 44.51                   | 26.41                 | 56.00                  | 46.00                | -11.49                | -19.59              | Pass               |

REMARKS: L1 = Line One (Live Line)



|                                 |              |                     |              |
|---------------------------------|--------------|---------------------|--------------|
| <b>Model No.</b>                | MUV1         | <b>RBW,VBW</b>      | 9 kHz        |
| <b>Environmental Conditions</b> | 22°C, 45% RH | <b>Test Mode</b>    | Mode 1       |
| <b>Tested by</b>                | Luja Huang   | <b>Line</b>         | L2           |
| <b>Test Date</b>                | May 30, 2018 | <b>Test Voltage</b> | AC 120V/60Hz |

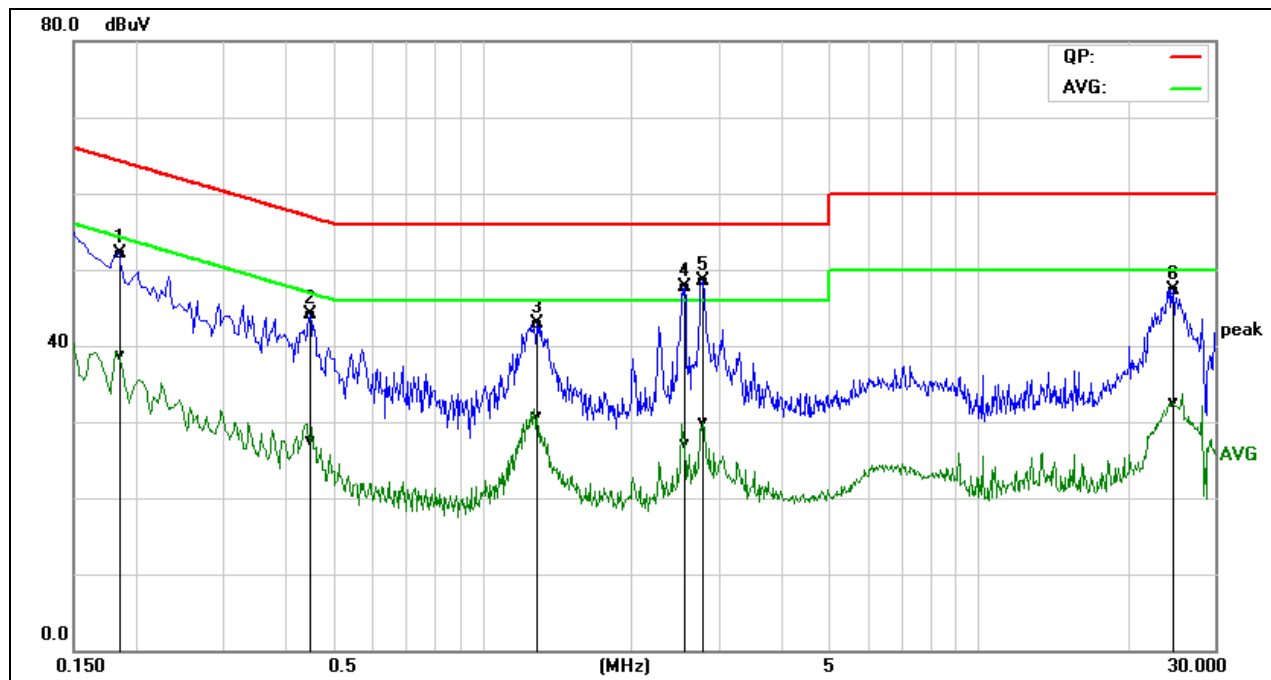


| Frequency (MHz) | QuasiPeak Reading (dBuV) | Average Reading (dBuV) | Correction Factor (dB) | QuasiPeak Result (dBuV) | Average Result (dBuV) | QuasiPeak Limit (dBuV) | Average Limit (dBuV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| 0.1860          | 32.59                    | 19.13                  | 19.53                  | 52.12                   | 38.66                 | 64.21                  | 54.21                | -12.09                | -15.55              | Pass               |
| 0.4500          | 24.64                    | 8.06                   | 19.53                  | 44.17                   | 27.59                 | 56.87                  | 46.88                | -12.70                | -19.29              | Pass               |
| 1.2940          | 23.33                    | 11.09                  | 19.60                  | 42.93                   | 30.69                 | 56.00                  | 46.00                | -13.07                | -15.31              | Pass               |
| 2.5540          | 27.95                    | 7.46                   | 19.74                  | 47.69                   | 27.20                 | 56.00                  | 46.00                | -8.31                 | -18.80              | Pass               |
| 2.7860          | 28.80                    | 10.24                  | 19.75                  | 48.55                   | 29.99                 | 56.00                  | 46.00                | -7.45                 | -16.01              | Pass               |
| 24.7460         | 26.69                    | 11.90                  | 20.62                  | 47.31                   | 32.52                 | 60.00                  | 50.00                | -12.69                | -17.48              | Pass               |

**REMARKS:** L2 = Line Two (Neutral Line)



|                                 |              |                     |              |
|---------------------------------|--------------|---------------------|--------------|
| <b>Model No.</b>                | MUV1         | <b>RBW,VBW</b>      | 9 kHz        |
| <b>Environmental Conditions</b> | 22°C, 45% RH | <b>Test Mode</b>    | Mode 2       |
| <b>Tested by</b>                | Luja Huang   | <b>Line</b>         | L1           |
| <b>Test Date</b>                | May 30, 2018 | <b>Test Voltage</b> | AC 240V/50Hz |

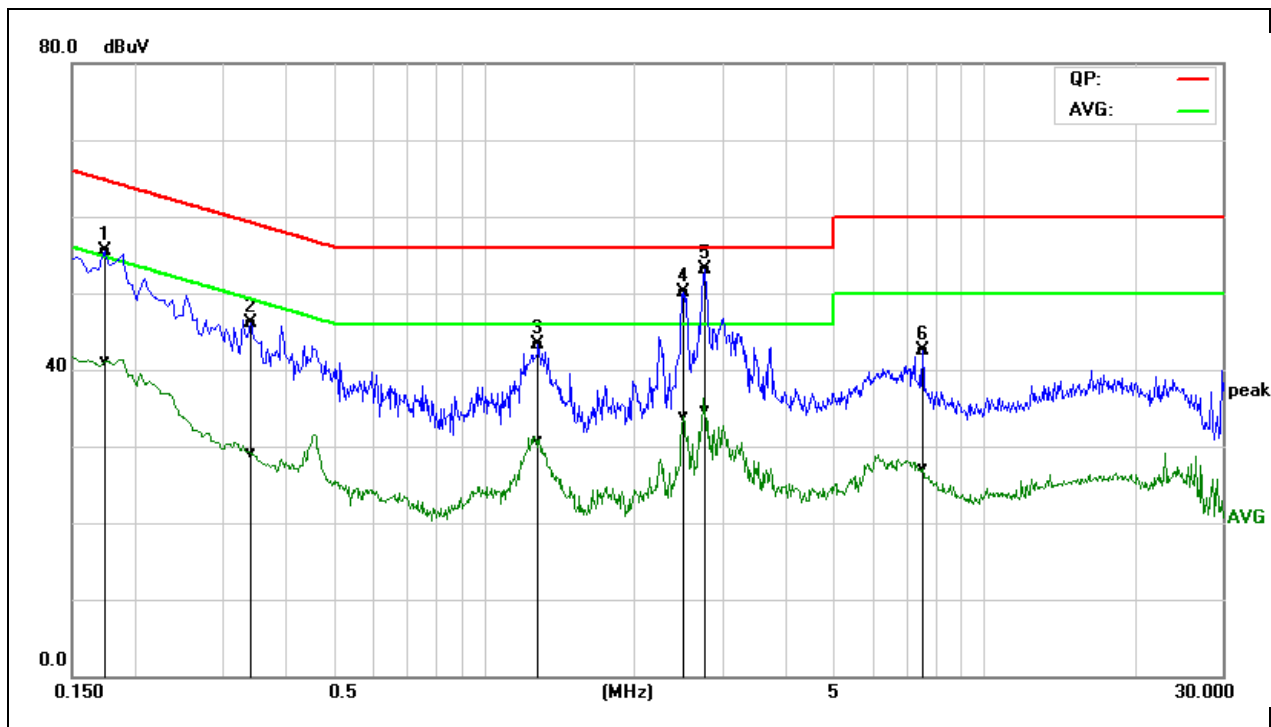


| Frequency (MHz) | QuasiPeak Reading (dBuV) | Average Reading (dBuV) | Correction Factor (dB) | QuasiPeak Result (dBuV) | Average Result (dBuV) | QuasiPeak Limit (dBuV) | Average Limit (dBuV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| 0.1740          | 35.86                    | 21.38                  | 19.63                  | 55.49                   | 41.01                 | 64.76                  | 54.77                | -9.27                 | -13.76              | Pass               |
| 0.3420          | 26.54                    | 9.55                   | 19.59                  | 46.13                   | 29.14                 | 59.15                  | 49.15                | -13.02                | -20.01              | Pass               |
| 1.2860          | 23.65                    | 11.01                  | 19.60                  | 43.25                   | 30.61                 | 56.00                  | 46.00                | -12.75                | -15.39              | Pass               |
| 2.5059          | 30.46                    | 14.15                  | 19.72                  | 50.18                   | 33.87                 | 56.00                  | 46.00                | -5.82                 | -12.13              | Pass               |
| 2.7780          | 33.38                    | 15.07                  | 19.72                  | 53.10                   | 34.79                 | 56.00                  | 46.00                | -2.90                 | -11.21              | Pass               |
| 7.5620          | 22.53                    | 7.15                   | 19.89                  | 42.42                   | 27.04                 | 60.00                  | 50.00                | -17.58                | -22.96              | Pass               |

**REMARKS:** L1 = Line One (Live Line)





|                                 |              |                     |              |
|---------------------------------|--------------|---------------------|--------------|
| <b>Model No.</b>                | MUV1         | <b>RBW,VBW</b>      | 9 kHz        |
| <b>Environmental Conditions</b> | 22°C, 45% RH | <b>Test Mode</b>    | Mode 2       |
| <b>Tested by</b>                | Luja Huang   | <b>Line</b>         | L2           |
| <b>Test Date</b>                | May 30, 2018 | <b>Test Voltage</b> | AC 240V/50Hz |

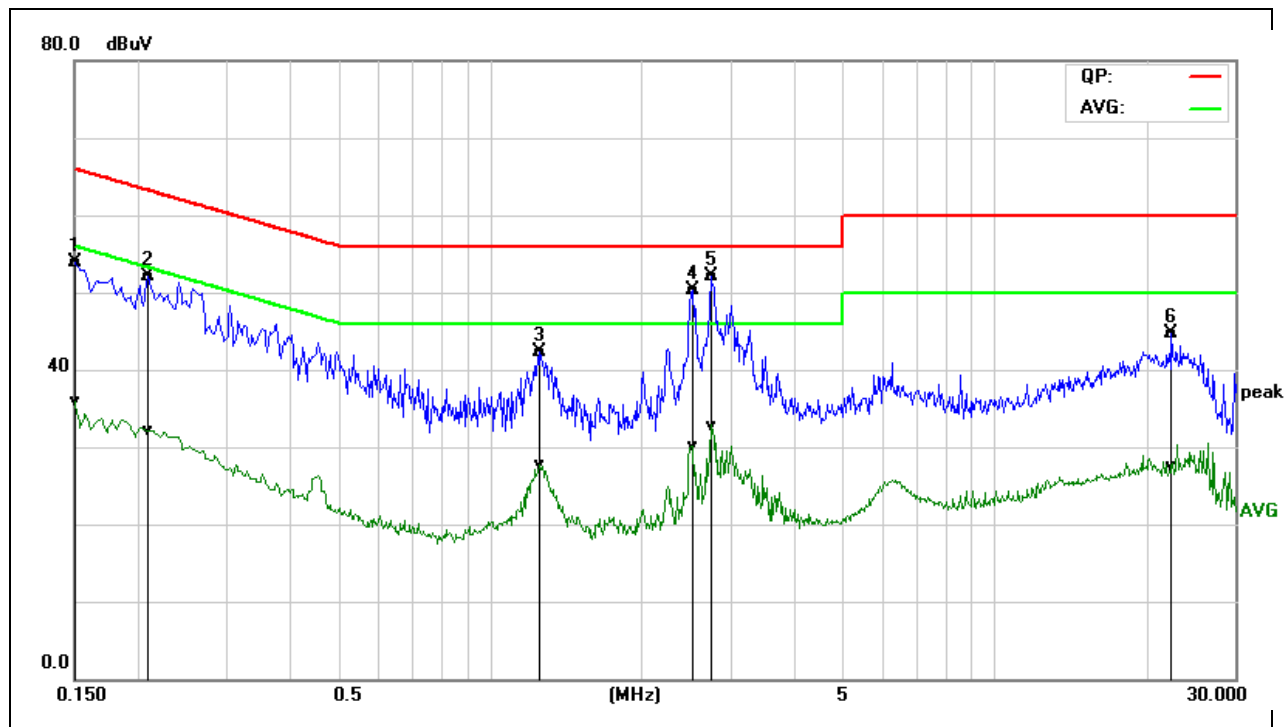

| Frequency (MHz) | QuasiPeak Reading (dBuV) | Average Reading (dBuV) | Correction Factor (dB) | QuasiPeak Result (dBuV) | Average Result (dBuV) | QuasiPeak Limit (dBuV) | Average Limit (dBuV) | QuasiPeak Margin (dB) | Average Margin (dB) | Remark (Pass/Fail) |
|-----------------|--------------------------|------------------------|------------------------|-------------------------|-----------------------|------------------------|----------------------|-----------------------|---------------------|--------------------|
| 0.1500          | 34.34                    | 16.47                  | 19.52                  | 53.86                   | 35.99                 | 65.99                  | 56.00                | -12.13                | -20.01              | Pass               |
| 0.2100          | 32.53                    | 12.53                  | 19.54                  | 52.07                   | 32.07                 | 63.20                  | 53.21                | -11.13                | -21.14              | Pass               |
| 1.2579          | 22.66                    | 8.10                   | 19.60                  | 42.26                   | 27.70                 | 56.00                  | 46.00                | -13.74                | -18.30              | Pass               |
| 2.5180          | 30.61                    | 10.42                  | 19.74                  | 50.35                   | 30.16                 | 56.00                  | 46.00                | -5.65                 | -15.84              | Pass               |
| 2.7460          | 32.46                    | 12.99                  | 19.74                  | 52.20                   | 32.73                 | 56.00                  | 46.00                | -3.80                 | -13.27              | Pass               |
| 22.4540         | 24.37                    | 7.04                   | 20.43                  | 44.80                   | 27.47                 | 60.00                  | 50.00                | -15.20                | -22.53              | Pass               |

REMARKS: L2 = Line Two (Neutral Line)




## 6.10 FREQUENCY STABILITY

### 6.10.1 LIMIT

According to §15.407(g), manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the operational description.

### 6.10.2 TEST CONFIGURATION

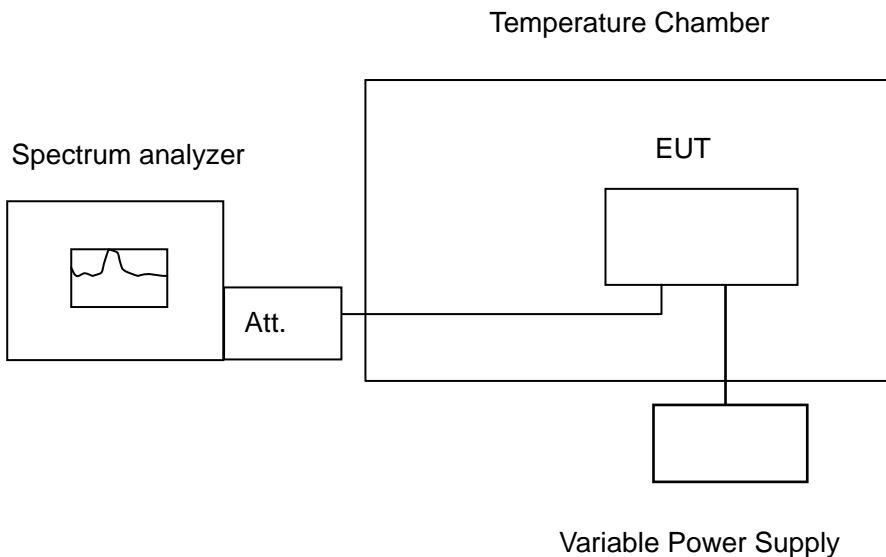

**Remark:** Measurement setup for testing on Antenna connector

### 6.10.3 TEST PROCEDURE

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -20°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

### 6.10.4 TEST RESULTS

*No non-compliance noted.*



Test Data

IEEE 802.11a MHz mode / 5180 ~ 5240MHz (Low)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5179.981109              | 5150-5250   | PASS        |
| 40                           | 120        | 5179.950786              | 5150-5250   | PASS        |
| 30                           | 120        | 5179.993686              | 5150-5250   | PASS        |
| 20                           | 120        | 5179.952000              | 5150-5250   | PASS        |
| 10                           | 120        | 5179.953744              | 5150-5250   | PASS        |
| 0                            | 120        | 5179.969100              | 5150-5250   | PASS        |
| -10                          | 120        | 5179.978942              | 5150-5250   | PASS        |
| -20                          | 120        | 5179.961262              | 5150-5250   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5179.999694              | 5150-5250   | PASS        |
|                              | 120        | 5179.952000              | 5150-5250   | PASS        |
|                              | 132        | 5179.972105              | 5150-5250   | PASS        |

IEEE 802.11a mode / 5180 ~ 5240MHz (High)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5239.949581              | 5150-5250   | PASS        |
| 40                           | 120        | 5239.952040              | 5150-5250   | PASS        |
| 30                           | 120        | 5239.957493              | 5150-5250   | PASS        |
| 20                           | 120        | 5239.951800              | 5150-5250   | PASS        |
| 10                           | 120        | 5239.950764              | 5150-5250   | PASS        |
| 0                            | 120        | 5239.994998              | 5150-5250   | PASS        |
| -10                          | 120        | 5239.995415              | 5150-5250   | PASS        |
| -20                          | 120        | 5239.977818              | 5150-5250   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5239.975642              | 5150-5250   | PASS        |
|                              | 120        | 5239.951800              | 5150-5250   | PASS        |
|                              | 132        | 5239.994171              | 5150-5250   | PASS        |



IEEE 802.11a mode / 5260 ~ 5320MHz (Low)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5259.953350              | 5250-5350   | PASS        |
| 40                           | 120        | 5259.976807              | 5250-5350   | PASS        |
| 30                           | 120        | 5259.976570              | 5250-5350   | PASS        |
| 20                           | 120        | 5259.952000              | 5250-5350   | PASS        |
| 10                           | 120        | 5259.957306              | 5250-5350   | PASS        |
| 0                            | 120        | 5259.982862              | 5250-5350   | PASS        |
| -10                          | 120        | 5259.985990              | 5250-5350   | PASS        |
| -20                          | 120        | 5259.967045              | 5250-5350   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5259.977736              | 5250-5350   | PASS        |
|                              | 120        | 5259.952000              | 5250-5350   | PASS        |
|                              | 132        | 5259.956720              | 5250-5350   | PASS        |

IEEE 802.11a mode / 5260 ~ 5320MHz (High)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5319.980621              | 5250-5350   | PASS        |
| 40                           | 120        | 5319.955763              | 5250-5350   | PASS        |
| 30                           | 120        | 5319.977421              | 5250-5350   | PASS        |
| 20                           | 120        | 5319.951600              | 5250-5350   | PASS        |
| 10                           | 120        | 5319.967834              | 5250-5350   | PASS        |
| 0                            | 120        | 5319.986094              | 5250-5350   | PASS        |
| -10                          | 120        | 5319.985564              | 5250-5350   | PASS        |
| -20                          | 120        | 5319.965594              | 5250-5350   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5319.985339              | 5250-5350   | PASS        |
|                              | 120        | 5319.951600              | 5250-5350   | PASS        |
|                              | 132        | 5319.973630              | 5250-5350   | PASS        |



IEEE 802.11a mode / 5500 ~ 5700MHz (Low)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5499.996547              | 5475-5725   | PASS        |
| 40                           | 120        | 5499.990135              | 5475-5725   | PASS        |
| 30                           | 120        | 5499.971657              | 5475-5725   | PASS        |
| 20                           | 120        | 5499.950000              | 5475-5725   | PASS        |
| 10                           | 120        | 5499.972451              | 5475-5725   | PASS        |
| 0                            | 120        | 5499.959718              | 5475-5725   | PASS        |
| -10                          | 120        | 5499.987054              | 5475-5725   | PASS        |
| -20                          | 120        | 5499.993379              | 5475-5725   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5499.964891              | 5475-5725   | PASS        |
|                              | 120        | 5499.950000              | 5475-5725   | PASS        |
|                              | 132        | 5499.952051              | 5475-5725   | PASS        |

IEEE 802.11a MHz mode / 5500 ~ 5700MHz (High)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5699.981819              | 5475-5725   | PASS        |
| 40                           | 120        | 5699.953554              | 5475-5725   | PASS        |
| 30                           | 120        | 5699.961234              | 5475-5725   | PASS        |
| 20                           | 120        | 5699.948200              | 5475-5725   | PASS        |
| 10                           | 120        | 5699.981832              | 5475-5725   | PASS        |
| 0                            | 120        | 5699.971415              | 5475-5725   | PASS        |
| -10                          | 120        | 5699.952559              | 5475-5725   | PASS        |
| -20                          | 120        | 5699.976604              | 5475-5725   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5699.996313              | 5475-5725   | PASS        |
|                              | 120        | 5699.948200              | 5475-5725   | PASS        |
|                              | 132        | 5699.971380              | 5475-5725   | PASS        |



IEEE 802.11a mode / 5745 ~ 5825MHz (Low)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5744.983563              | 5725-5850   | PASS        |
| 40                           | 120        | 5744.998064              | 5725-5850   | PASS        |
| 30                           | 120        | 5744.975034              | 5725-5850   | PASS        |
| 20                           | 120        | 5744.947800              | 5725-5850   | PASS        |
| 10                           | 120        | 5744.963338              | 5725-5850   | PASS        |
| 0                            | 120        | 5744.999038              | 5725-5850   | PASS        |
| -10                          | 120        | 5744.976736              | 5725-5850   | PASS        |
| -20                          | 120        | 5744.978761              | 5725-5850   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5744.960500              | 5725-5850   | PASS        |
|                              | 120        | 5744.947800              | 5725-5850   | PASS        |
|                              | 132        | 5744.987366              | 5725-5850   | PASS        |

IEEE 802.11a MHz mode / 5745 ~ 5825MHz (High)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5824.955049              | 5725-5850   | PASS        |
| 40                           | 120        | 5824.978997              | 5725-5850   | PASS        |
| 30                           | 120        | 5824.981649              | 5725-5850   | PASS        |
| 20                           | 120        | 5825.003517              | 5725-5850   | PASS        |
| 10                           | 120        | 5824.997570              | 5725-5850   | PASS        |
| 0                            | 120        | 5824.949103              | 5725-5850   | PASS        |
| -10                          | 120        | 5824.950934              | 5725-5850   | PASS        |
| -20                          | 120        | 5824.987925              | 5725-5850   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5824.978136              | 5725-5850   | PASS        |
|                              | 120        | 5824.946800              | 5725-5850   | PASS        |
|                              | 132        | 5824.968962              | 5725-5850   | PASS        |



**IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz (Low)**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5179.949293              | 5150-5250   | PASS        |
| 40                           | 120        | 5179.961563              | 5150-5250   | PASS        |
| 30                           | 120        | 5179.950995              | 5150-5250   | PASS        |
| 20                           | 120        | 5179.952000              | 5150-5250   | PASS        |
| 10                           | 120        | 5179.993077              | 5150-5250   | PASS        |
| 0                            | 120        | 5179.993019              | 5150-5250   | PASS        |
| -10                          | 120        | 5179.997340              | 5150-5250   | PASS        |
| -20                          | 120        | 5179.976422              | 5150-5250   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5179.990541              | 5150-5250   | PASS        |
|                              | 120        | 5179.952000              | 5150-5250   | PASS        |
|                              | 132        | 5179.983222              | 5150-5250   | PASS        |

**IEEE 802.11n HT 20 MHz mode / 5180 ~ 5240MHz (High)**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5239.995424              | 5150-5250   | PASS        |
| 40                           | 120        | 5239.959577              | 5150-5250   | PASS        |
| 30                           | 120        | 5239.968743              | 5150-5250   | PASS        |
| 20                           | 120        | 5239.951800              | 5150-5250   | PASS        |
| 10                           | 120        | 5239.950492              | 5150-5250   | PASS        |
| 0                            | 120        | 5239.981373              | 5150-5250   | PASS        |
| -10                          | 120        | 5239.960615              | 5150-5250   | PASS        |
| -20                          | 120        | 5239.974601              | 5150-5250   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5239.951860              | 5150-5250   | PASS        |
|                              | 120        | 5239.951800              | 5150-5250   | PASS        |
|                              | 132        | 5239.963230              | 5150-5250   | PASS        |



**IEEE 802.11n HT 20 MHz mode / 5260 ~ 5320MHz (Low)**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5259.999941              | 5250-5350   | PASS        |
| 40                           | 120        | 5259.954733              | 5250-5350   | PASS        |
| 30                           | 120        | 5259.991389              | 5250-5350   | PASS        |
| 20                           | 120        | 5259.952000              | 5250-5350   | PASS        |
| 10                           | 120        | 5259.979187              | 5250-5350   | PASS        |
| 0                            | 120        | 5259.954508              | 5250-5350   | PASS        |
| -10                          | 120        | 5259.953125              | 5250-5350   | PASS        |
| -20                          | 120        | 5259.959824              | 5250-5350   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5259.985241              | 5250-5350   | PASS        |
|                              | 120        | 5259.952000              | 5250-5350   | PASS        |
|                              | 132        | 5259.973903              | 5250-5350   | PASS        |

**IEEE 802.11a mode / 5260 ~ 5320MHz (High)**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5319.993548              | 5250-5350   | PASS        |
| 40                           | 120        | 5319.964534              | 5250-5350   | PASS        |
| 30                           | 120        | 5319.984035              | 5250-5350   | PASS        |
| 20                           | 120        | 5319.951600              | 5250-5350   | PASS        |
| 10                           | 120        | 5319.992431              | 5250-5350   | PASS        |
| 0                            | 120        | 5319.975581              | 5250-5350   | PASS        |
| -10                          | 120        | 5319.955554              | 5250-5350   | PASS        |
| -20                          | 120        | 5319.964151              | 5250-5350   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5319.988831              | 5250-5350   | PASS        |
|                              | 120        | 5319.951600              | 5250-5350   | PASS        |
|                              | 132        | 5319.982820              | 5250-5350   | PASS        |





**IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz (Low)**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5499.955632              | 5475-5725   | PASS        |
| 40                           | 120        | 5499.952823              | 5475-5725   | PASS        |
| 30                           | 120        | 5499.993117              | 5475-5725   | PASS        |
| 20                           | 120        | 5499.950000              | 5475-5725   | PASS        |
| 10                           | 120        | 5499.982156              | 5475-5725   | PASS        |
| 0                            | 120        | 5499.957261              | 5475-5725   | PASS        |
| -10                          | 120        | 5499.999241              | 5475-5725   | PASS        |
| -20                          | 120        | 5499.955330              | 5475-5725   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5499.994849              | 5475-5725   | PASS        |
|                              | 120        | 5499.950000              | 5475-5725   | PASS        |
|                              | 132        | 5499.952181              | 5475-5725   | PASS        |

**IEEE 802.11n HT 20 MHz mode / 5500 ~ 5700MHz (High)**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5699.994736              | 5475-5725   | PASS        |
| 40                           | 120        | 5699.989220              | 5475-5725   | PASS        |
| 30                           | 120        | 5699.980146              | 5475-5725   | PASS        |
| 20                           | 120        | 5699.948200              | 5475-5725   | PASS        |
| 10                           | 120        | 5699.993171              | 5475-5725   | PASS        |
| 0                            | 120        | 5699.982304              | 5475-5725   | PASS        |
| -10                          | 120        | 5699.980390              | 5475-5725   | PASS        |
| -20                          | 120        | 5699.956675              | 5475-5725   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5699.977121              | 5475-5725   | PASS        |
|                              | 120        | 5699.948200              | 5475-5725   | PASS        |
|                              | 132        | 5699.951084              | 5475-5725   | PASS        |



**IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz (Low)**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5744.958915              | 5725-5850   | PASS        |
| 40                           | 120        | 5744.974672              | 5725-5850   | PASS        |
| 30                           | 120        | 5744.999083              | 5725-5850   | PASS        |
| 20                           | 120        | 5744.947800              | 5725-5850   | PASS        |
| 10                           | 120        | 5744.965135              | 5725-5850   | PASS        |
| 0                            | 120        | 5744.968803              | 5725-5850   | PASS        |
| -10                          | 120        | 5744.975651              | 5725-5850   | PASS        |
| -20                          | 120        | 5744.980214              | 5725-5850   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5744.967461              | 5725-5850   | PASS        |
|                              | 120        | 5744.947800              | 5725-5850   | PASS        |
|                              | 132        | 5744.994434              | 5725-5850   | PASS        |

**IEEE 802.11n HT 20 MHz mode / 5745 ~ 5825MHz (High)**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5824.953442              | 5725-5850   | PASS        |
| 40                           | 120        | 5824.985545              | 5725-5850   | PASS        |
| 30                           | 120        | 5824.989568              | 5725-5850   | PASS        |
| 20                           | 120        | 5824.946800              | 5725-5850   | PASS        |
| 10                           | 120        | 5824.993234              | 5725-5850   | PASS        |
| 0                            | 120        | 5824.951765              | 5725-5850   | PASS        |
| -10                          | 120        | 5824.996909              | 5725-5850   | PASS        |
| -20                          | 120        | 5824.953777              | 5725-5850   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5824.959155              | 5725-5850   | PASS        |
|                              | 120        | 5824.946800              | 5725-5850   | PASS        |
|                              | 132        | 5824.992460              | 5725-5850   | PASS        |



**IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz (Low)**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5189.950711              | 5150-5250   | PASS        |
| 40                           | 120        | 5189.995187              | 5150-5250   | PASS        |
| 30                           | 120        | 5189.975628              | 5150-5250   | PASS        |
| 20                           | 120        | 5189.952000              | 5150-5250   | PASS        |
| 10                           | 120        | 5189.988226              | 5150-5250   | PASS        |
| 0                            | 120        | 5189.961277              | 5150-5250   | PASS        |
| -10                          | 120        | 5189.955656              | 5150-5250   | PASS        |
| -20                          | 120        | 5189.985992              | 5150-5250   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5189.971178              | 5150-5250   | PASS        |
|                              | 120        | 5189.952000              | 5150-5250   | PASS        |
|                              | 132        | 5189.969611              | 5150-5250   | PASS        |

**IEEE 802.11n HT 40 MHz mode / 5190 ~ 5230MHz (High)**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5229.969606              | 5150-5250   | PASS        |
| 40                           | 120        | 5229.955553              | 5150-5250   | PASS        |
| 30                           | 120        | 5229.985646              | 5150-5250   | PASS        |
| 20                           | 120        | 5229.953000              | 5150-5250   | PASS        |
| 10                           | 120        | 5229.994253              | 5150-5250   | PASS        |
| 0                            | 120        | 5229.974241              | 5150-5250   | PASS        |
| -10                          | 120        | 5229.978056              | 5150-5250   | PASS        |
| -20                          | 120        | 5229.992188              | 5150-5250   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5229.956256              | 5150-5250   | PASS        |
|                              | 120        | 5229.953000              | 5150-5250   | PASS        |
|                              | 132        | 5229.986224              | 5150-5250   | PASS        |



IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz (Low)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5269.994495              | 5250-5350   | PASS        |
| 40                           | 120        | 5269.957482              | 5250-5350   | PASS        |
| 30                           | 120        | 5269.985651              | 5250-5350   | PASS        |
| 20                           | 120        | 5269.955500              | 5250-5350   | PASS        |
| 10                           | 120        | 5269.960352              | 5250-5350   | PASS        |
| 0                            | 120        | 5269.964810              | 5250-5350   | PASS        |
| -10                          | 120        | 5269.997859              | 5250-5350   | PASS        |
| -20                          | 120        | 5269.997535              | 5250-5350   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5269.997331              | 5250-5350   | PASS        |
|                              | 120        | 5269.955500              | 5250-5350   | PASS        |
|                              | 132        | 5269.970299              | 5250-5350   | PASS        |

IEEE 802.11n HT 40 MHz mode / 5270 ~ 5310MHz (High)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5309.978849              | 5250-5350   | PASS        |
| 40                           | 120        | 5309.988266              | 5250-5350   | PASS        |
| 30                           | 120        | 5309.979603              | 5250-5350   | PASS        |
| 20                           | 120        | 5309.956000              | 5250-5350   | PASS        |
| 10                           | 120        | 5309.987278              | 5250-5350   | PASS        |
| 0                            | 120        | 5309.958534              | 5250-5350   | PASS        |
| -10                          | 120        | 5309.963917              | 5250-5350   | PASS        |
| -20                          | 120        | 5309.970237              | 5250-5350   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5309.951859              | 5250-5350   | PASS        |
|                              | 120        | 5309.956000              | 5250-5350   | PASS        |
|                              | 132        | 5309.989729              | 5250-5350   | PASS        |



IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz (Low)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5509.963071              | 5475-5725   | PASS        |
| 40                           | 120        | 5509.977074              | 5475-5725   | PASS        |
| 30                           | 120        | 5509.980402              | 5475-5725   | PASS        |
| 20                           | 120        | 5509.956200              | 5475-5725   | PASS        |
| 10                           | 120        | 5509.969339              | 5475-5725   | PASS        |
| 0                            | 120        | 5509.958327              | 5475-5725   | PASS        |
| -10                          | 120        | 5509.992852              | 5475-5725   | PASS        |
| -20                          | 120        | 5509.969612              | 5475-5725   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5509.995046              | 5475-5725   | PASS        |
|                              | 120        | 5509.956200              | 5475-5725   | PASS        |
|                              | 132        | 5509.969048              | 5475-5725   | PASS        |

IEEE 802.11n HT 40 MHz mode / 5510 ~ 5670MHz (High)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5669.973141              | 5475-5725   | PASS        |
| 40                           | 120        | 5669.997933              | 5475-5725   | PASS        |
| 30                           | 120        | 5669.966259              | 5475-5725   | PASS        |
| 20                           | 120        | 5669.956600              | 5475-5725   | PASS        |
| 10                           | 120        | 5669.980452              | 5475-5725   | PASS        |
| 0                            | 120        | 5669.974464              | 5475-5725   | PASS        |
| -10                          | 120        | 5669.968991              | 5475-5725   | PASS        |
| -20                          | 120        | 5669.980810              | 5475-5725   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5669.966406              | 5475-5725   | PASS        |
|                              | 120        | 5669.956600              | 5475-5725   | PASS        |
|                              | 132        | 5669.961075              | 5475-5725   | PASS        |



**IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz (Low)**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5754.972206              | 5725-5850   | PASS        |
| 40                           | 120        | 5754.966398              | 5725-5850   | PASS        |
| 30                           | 120        | 5754.989040              | 5725-5850   | PASS        |
| 20                           | 120        | 5754.955800              | 5725-5850   | PASS        |
| 10                           | 120        | 5754.951659              | 5725-5850   | PASS        |
| 0                            | 120        | 5754.958361              | 5725-5850   | PASS        |
| -10                          | 120        | 5754.989707              | 5725-5850   | PASS        |
| -20                          | 120        | 5754.959507              | 5725-5850   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5754.976966              | 5725-5850   | PASS        |
|                              | 120        | 5754.955800              | 5725-5850   | PASS        |
|                              | 132        | 5754.957959              | 5725-5850   | PASS        |

**IEEE 802.11n HT 40 MHz mode / 5755 ~ 5795MHz (High)**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5794.979328              | 5725-5850   | PASS        |
| 40                           | 120        | 5794.967051              | 5725-5850   | PASS        |
| 30                           | 120        | 5794.966166              | 5725-5850   | PASS        |
| 20                           | 120        | 5794.956800              | 5725-5850   | PASS        |
| 10                           | 120        | 5794.956150              | 5725-5850   | PASS        |
| 0                            | 120        | 5794.988967              | 5725-5850   | PASS        |
| -10                          | 120        | 5794.968933              | 5725-5850   | PASS        |
| -20                          | 120        | 5794.998389              | 5725-5850   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5794.965356              | 5725-5850   | PASS        |
|                              | 120        | 5794.956800              | 5725-5850   | PASS        |
|                              | 132        | 5794.966253              | 5725-5850   | PASS        |



**IEEE 802.11ac 80 mode / 5210MHz**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5209.982025              | 5150-5250   | PASS        |
| 40                           | 120        | 5209.976018              | 5150-5250   | PASS        |
| 30                           | 120        | 5209.980030              | 5150-5250   | PASS        |
| 20                           | 120        | 5209.956000              | 5150-5250   | PASS        |
| 10                           | 120        | 5209.991678              | 5150-5250   | PASS        |
| 0                            | 120        | 5209.974203              | 5150-5250   | PASS        |
| -10                          | 120        | 5209.995887              | 5150-5250   | PASS        |
| -20                          | 120        | 5209.994573              | 5150-5250   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5209.974955              | 5150-5250   | PASS        |
|                              | 120        | 5209.956000              | 5150-5250   | PASS        |
|                              | 132        | 5209.963695              | 5150-5250   | PASS        |

**IEEE 802.11ac 80 mode / 5290MHz**

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5289.968409              | 5250-5350   | PASS        |
| 40                           | 120        | 5289.984307              | 5250-5350   | PASS        |
| 30                           | 120        | 5289.974273              | 5250-5350   | PASS        |
| 20                           | 120        | 5289.955400              | 5250-5350   | PASS        |
| 10                           | 120        | 5289.999940              | 5250-5350   | PASS        |
| 0                            | 120        | 5289.981993              | 5250-5350   | PASS        |
| -10                          | 120        | 5289.961156              | 5250-5350   | PASS        |
| -20                          | 120        | 5289.998917              | 5250-5350   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5289.980001              | 5250-5350   | PASS        |
|                              | 120        | 5289.955400              | 5250-5350   | PASS        |
|                              | 132        | 5289.951563              | 5250-5350   | PASS        |



IEEE 802.11ac 80 mode / 5530MHz (Low)

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5529.955975              | 5475-5725   | PASS        |
| 40                           | 120        | 5529.973552              | 5475-5725   | PASS        |
| 30                           | 120        | 5529.988785              | 5475-5725   | PASS        |
| 20                           | 120        | 5529.957100              | 5475-5725   | PASS        |
| 10                           | 120        | 5529.983932              | 5475-5725   | PASS        |
| 0                            | 120        | 5529.984510              | 5475-5725   | PASS        |
| -10                          | 120        | 5529.950641              | 5475-5725   | PASS        |
| -20                          | 120        | 5529.954164              | 5475-5725   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5529.949886              | 5475-5725   | PASS        |
|                              | 120        | 5529.957100              | 5475-5725   | PASS        |
|                              | 132        | 5529.993742              | 5475-5725   | PASS        |

IEEE 802.11ac 80 mode / 5775MHz

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 50                           | 120        | 5774.950101              | 5725-5850   | PASS        |
| 40                           | 120        | 5774.959275              | 5725-5850   | PASS        |
| 30                           | 120        | 5774.961033              | 5725-5850   | PASS        |
| 20                           | 120        | 5774.957000              | 5725-5850   | PASS        |
| 10                           | 120        | 5774.963946              | 5725-5850   | PASS        |
| 0                            | 120        | 5774.977066              | 5725-5850   | PASS        |
| -10                          | 120        | 5774.982565              | 5725-5850   | PASS        |
| -20                          | 120        | 5774.974475              | 5725-5850   | PASS        |

| Environment Temperature (°C) | Volage (V) | Measured Frequency (MHz) | limit Range | Test Result |
|------------------------------|------------|--------------------------|-------------|-------------|
| 20                           | 108        | 5774.988520              | 5725-5850   | PASS        |
|                              | 120        | 5774.957000              | 5725-5850   | PASS        |
|                              | 132        | 5774.961976              | 5725-5850   | PASS        |