



Report No.: FCC1912247-01 File Reference No.: 2019-12-26

Applicant: Leader Premiums Limited

Product: UL Listed 10000 mAh Wireless Power Bank

Model No.: AB0150

Trademark: N/A

Test Standards: FCC Part 15 Subpart C

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.4&FCC Part 15 Subpart C,

for the evaluation of electromagnetic compatibility

Approved By

# Jack Chung

Jack Chung

Manager

Dated: December 26, 2019

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

## SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No: FCC1912247-01 Page 2 of 37

Date: 2019-12-26



## **Special Statement:**

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-LAB Code: L2292**

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

## FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

## Industry Canada (IC) —Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

#### **A2LA** (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 37

Report No: FCC1912247-01

Date: 2019-12-26



## **Test Report Conclusion**

## Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details.	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	5
3.0	Technical Details	6
3.1	Summary of Test Results	6
3.2	Test Standards.	6
4.0	EUT Modification.	6
5.0	Power Line Conducted Emission Test.	7
5.1	Schematics of the Test.	7
5.2	Test Method and Test Procedure.	7
5.3	Configuration of the EUT	7
5.4	EUT Operating Condition.	8
5.5	Conducted Emission Limit.	8
5.6	Test Result.	8
6.0	Radiated Emission test.	12
5.1	Test Method and Test Procedure.	12
5.2	Configuration of the EUT	13
5.3	EUT Operation Condition.	13
5.4	Radiated Emission Limit.	13
5.5	Test Result.	14
7.0	20dB Bandwidth Test.	18
8.0	Antenna Requirement.	20
9.0	FCC Label	21
10.0	Photo of Testing	22

Date: 2019-12-26



#### 1.0 General Details

#### 1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: +86 755 83448688 Fax: +86 755 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

#### 1.2 Applicant Details

Applicant: Leader Premiums Limited

Address: ROOM 901, HENGFU MANSION, NO.858, FUMINGROAD, NINGBO, CHINA

Telephone: 15869519263

Fax: --

#### 1.3 Description of EUT

Product: UL Listed 10000 mAh Wireless Power Bank

Manufacturer: Leader Premiums Limited

Address: ROOM 901, HENGFU MANSION, NO.858, FUMINGROAD, NINGBO,

**CHINA** 

Brand Name: N/A
Model Number: AB0150
Additional Model Name N/A
Additional Trade Name N/A

Rating: Rating: Micro Input: DC 5V/2A or 9V/2A; Type-C, Input: DC5V/3A or 9V/2A;

Golden finger Input: DC5V/2A; Type-C Output 1: DC 5V/3A.

DC9V/2A,12V/1.5A; USB-A Output 2: DC5V/2.4A, 9V/2A, 12V/1.5A;

Wireless output: 5V/1A, 9V/1.1A;

Note: for wireless charging, only the data for output 9V/1.1A was reported,

and it was the worst case

Battery: 37.00Wh, DC3.7V,10000mAh

Operation Frequency: See below table

Channel	Frequency (MHz)						
01	0.1115	06	0.140	11	0.165	16	0.190

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1912247-01 Page 5 of 37

Date: 2019-12-26



02	0.120	07	0.145	12	0.170	17	0.195
03	0.125	08	0.150	13	0.175	18	0.200
04	0.130	09	0.155	14	0.180	19	0.205
05	0.135	10	0.160	15	0.185		
Teas channel		Freque	ency (MHz)				
Tous onumer							

Modulation Type: MSK

Antenna Designation Inductive Loop Antenna with Gain 0dBi

0.175 MHz

## 1.4 Submitted Sample

CH13

2 Samples

#### 1.5 Test Duration

2019-12-24 to 2019-12-26

### 1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 9kHz-30MHz Uncertainty =4.3dB

Radiated Emissions below 30MHz-1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 37 Report No: FCC1912247-01

Date: 2019-12-26



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2019-06-21	2020-06-20
LISN	R&S	EZH3-Z5	100294	2019-06-21	2020-06-20
LISN	R&S	EZH3-Z5	100253	2019-06-21	2020-06-20
Ultra Broadband ANT	R&S	HL562	100157	2019-06-21	2020-06-20
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2018-06-25	2021-06-24
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2021-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2019-06-21	2020-06-20
EMI Test Receiver	RS	ESH3	860904/006	2019-06-21	2020-06-20
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2019-06-21	2020-06-20
Spectrum	HP/Agilent	E4407B	MY50441392	2019-06-21	2020-06-20
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2019-06-21	2020-06-20
RF Cable	Zhengdi	7m		2019-06-21	2020-06-20
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2019-06-21	2020-06-20
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Report No: FCC1912247-01 Page 7 of 37

Date: 2019-12-26



#### 3.0 Technical Details

## 3.1 Summary of test results

## The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.203	Antenna	PASS	Compliant
	requirements		
FCC Part 15, Paragraph 15.207	Conducted	PASS	Compliant
	Emission Test		
ECC Post 15 Possons II 15 200 (a) (6)	General	DACC	C1it
FCC Part 15, Paragraph 15.209 (a) (f)	Requirement	PASS	Compliant
FCC Part 15, Paragraph 15.215	20dB	PASS	Compliant
	Bandwidth		
	Testing		

#### 3.2 Test Standards

FCC Part 15 Subpart C , ANSI C63.4 :2014 and ANSI C63.10 :2013

## 4.0 EUT Modification


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2019-12-26



#### 5. Power Line Conducted Emission Test

#### 5.1 Schematics of the test




**EUT: Equipment Under Test** 

#### 5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

## Block diagram of Test setup

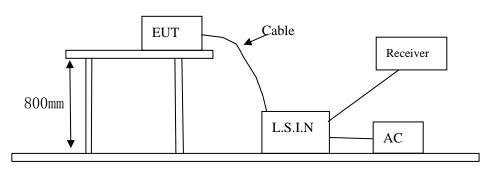

#### 5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.4-2014. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

#### A. EUT

Device	Manufacturer	Model	FCC ID
UL Listed 10000			
mAh Wireless Power	Leader Premiums Limited	AB0150	2AAPY-AB0150
Bank			

#### B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No: FCC1912247-01 Page 9 of 37

Date: 2019-12-26



### C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	Chenyang	UP0920	Input: 100-240V~, 50-60Hz, 0.5A;
			Output: DC5V or DC9V, 2A

## 5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10 -2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

## 5.5 Power line conducted Emission Limit according to Paragraph 15.207

			0 0	•		
Frequency		Class A Lim	its (dB μ V)	Class B Limits (dB $\mu$ V)		
	(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
	$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
	$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
	5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. \*Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

### 5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz. (The average detector is necessary when the Quasi-peak emission level beyond the average Limit.)

Date: 2019-12-26




## A: Conducted Emission on Live Terminal (150kHz to 30MHz)

## **EUT Operating Environment**

Temperature: 25°C Humidity:75%RH Atmospheric Pressure: 101 kPa

**EUT set Condition : Keep Transmitting and Charging-According to Micro-USB Port** 

**Results: Pass** 

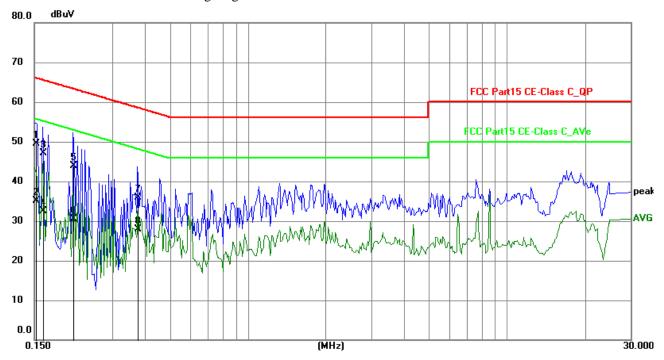

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1516	39.74	9.78	49.52	65.91	-16.39	QP	Р
2	0.1516	25.31	9.78	35.09	55.91	-20.82	AVG	Р
3	0.1617	37.34	9.78	47.12	65.38	-18.26	QP	Р
4	0.1617	22.63	9.78	32.41	55.38	-22.97	AVG	Р
5	0.2124	34.22	9.75	43.97	63.11	-19.14	QP	Р
6	0.2124	20.78	9.75	30.53	53.11	-22.58	AVG	Р
7	0.3762	26.11	9.76	35.87	58.36	-22.49	QP	Р
8	0.3762	18.18	9.76	27.94	48.36	-20.42	AVG	Р

Date: 2019-12-26




## B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

## **EUT Operating Environment**

Temperature: 25°C Humidity:75%RH Atmospheric Pressure: 101 kPa

**EUT set Condition : Keep Transmitting and Charging- According to Micro-USB Port** 

Results: Pass

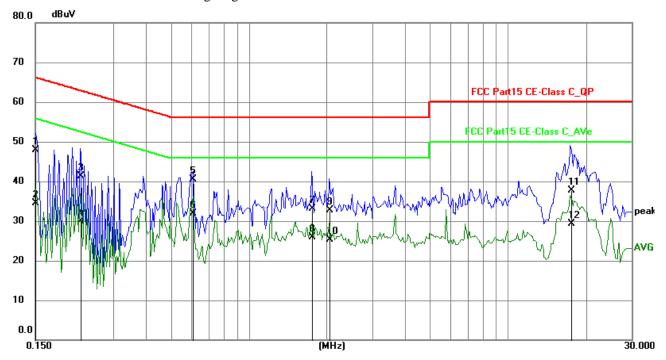

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1500	38.07	9.79	47.86	66.00	-18.14	QP	Р
2	0.1500	24.74	9.79	34.53	56.00	-21.47	AVG	Р
3	0.2241	31.57	9.75	41.32	62.67	-21.35	QP	Р
4	0.2241	20.19	9.75	29.94	52.67	-22.73	AVG	Р
5	0.6102	30.68	9.78	40.46	56.00	-15.54	QP	Р
6	0.6102	22.08	9.78	31.86	46.00	-14.14	AVG	Р
7	1.7451	23.37	9.80	33.17	56.00	-22.83	QP	Р
8	1.7451	16.07	9.80	25.87	46.00	-20.13	AVG	Р
9	2.0454	22.88	9.80	32.68	56.00	-23.32	QP	Р
10	2.0454	15.49	9.80	25.29	46.00	-20.71	AVG	Р
11	17.4750	27.27	10.53	37.80	60.00	-22.20	QP	Р
12	17.4750	18.85	10.53	29.38	50.00	-20.62	AVG	Р

Date: 2019-12-26




## C: Conducted Emission on Live Terminal (150kHz to 30MHz)

## **EUT Operating Environment**

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa **EUT set Condition: Keep Transmitting and Charging- According to Base** 

**Results: PASS** 

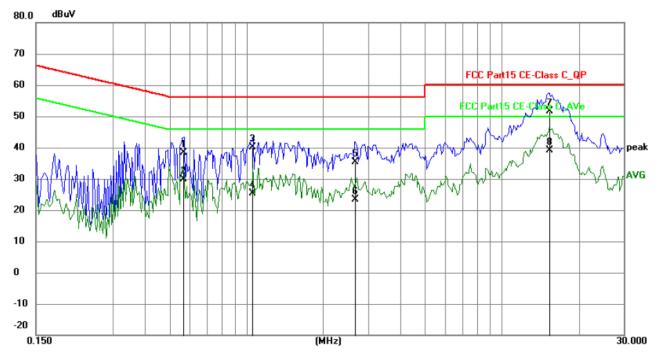

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.5670	28.69	9.77	38.46	56.00	-17.54	QP	Р
2	0.5670	20.08	9.77	29.85	46.00	-16.15	AVG	Р
3	1.0541	30.39	9.79	40.18	56.00	-15.82	QP	Р
4	1.0541	15.54	9.79	25.33	46.00	-20.67	AVG	Р
5	2.6641	25.48	9.83	35.31	56.00	-20.69	QP	Р
6	2.6641	13.52	9.83	23.35	46.00	-22.65	AVG	Р
7	15.3883	41.22	10.40	51.62	60.00	-8.38	QP	Р
8	15.3883	28.64	10.40	39.04	50.00	-10.96	AVG	Р

Date: 2019-12-26




## D: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

## **EUT Operating Environment**

Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 kPa **EUT set Condition: Keep Transmitting and Charging- According to Base** 

**Results: Pass** 

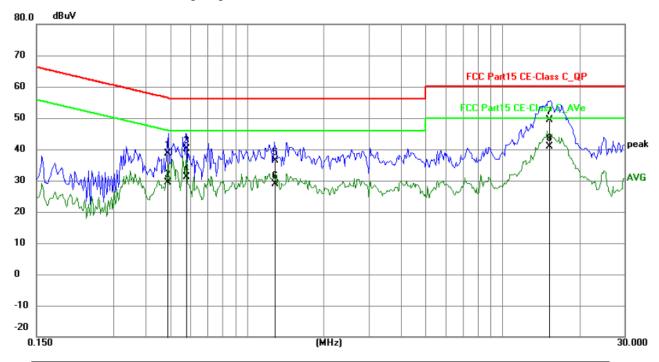

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.4889	28.96	9.77	38.73	56.19	-17.46	QP	Р
2	0.4889	19.68	9.77	29.45	46.19	-16.74	AVG	Р
3	0.5792	30.30	9.77	40.07	56.00	-15.93	QP	Р
4	0.5792	21.47	9.77	31.24	46.00	-14.76	AVG	Р
5	1.2824	26.58	9.79	36.37	56.00	-19.63	QP	Р
6	1.2824	19.00	9.79	28.79	46.00	-17.21	AVG	Р
7	15.3070	39.07	10.40	49.47	60.00	-10.53	QP	Р
8	15.3070	30.41	10.40	40.81	50.00	-9.19	AVG	Р

Report No: FCC1912247-01 Page 14 of 37

Date: 2019-12-26




#### 6 Radiated Emission Test

6.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at TIMEWAY EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 9 kHz to 1 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with RBW=120 kHz/VBW=300 kHz; All readings from 9 kHz to 30 MHz are quasi-peak values with RBW=10 kHz/VBW=30 kHz. For the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission test in these three bands are based on measurements employing an average detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

## **Block diagram of Test setup**


#### 9kHz-30MHz

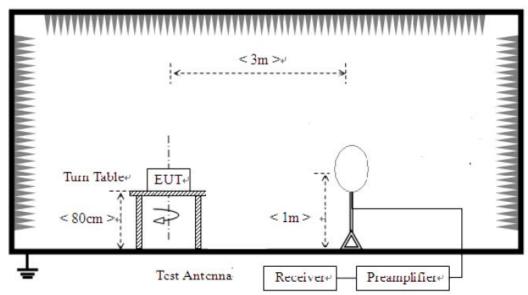

Date: 2019-12-26



#### 30MHz-1000MHz

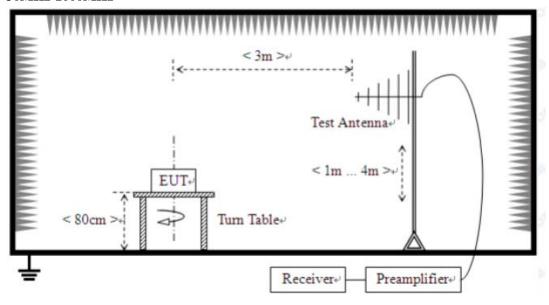

## 6.2 Configuration of The EUT Same as section 5.3 of this report

## 6.3 EUT Operating Condition Same as section 5.4 of this report.

#### 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

## B. Frequencies in restricted band are compiled to limit on Paragraph 15.209. Limits for frequency below 30MHz

Frequency Range (MHz)	Distance (m)	Field strength (V/m)
0.009-0.490	300	24000/F(kHz)
0.490-1.705	30	2400/F(kHz)
1.705-30	30	30

Date: 2019-12-26



Page 16 of 37

### Limits for frequency above 30MHz

Frequency Range (MHz)	Distance (m)	Field strength (dB $\mu$ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage  $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

#### 6.5 Test result

Report No: FCC1912247-01 Page 17 of 37

Date: 2019-12-26




#### Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

#### 9 kHz~30 MHz

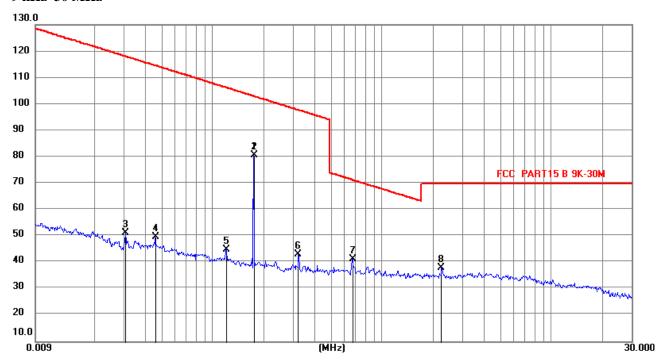

No.	Frequency (MHz)	Reading (dBuVm)	Factor (dB)	Level (dBuVm)	Limit (dBuVm)	Margin (dB)	Detector	P/F
1	0.1751	70.95	9.77	80.72	102.68	-21.96	peak	Р
2	0.1751	62.19	9.77	71.96	102.68	-30.72	AVG	Р
3	0.0304	41.13	10.17	51.30	117.81	-66.51	peak	Р
4	0.0460	39.94	9.87	49.81	114.23	-64.42	peak	Р
5	0.1213	35.03	9.81	44.84	105.86	-61.02	peak	Р
6	0.3205	33.37	9.76	43.13	97.47	-54.34	peak	Р
7	0.6685	31.71	9.78	41.49	71.11	-29.62	peak	Р
8	2.2550	28.36	9.81	38.17	69.51	-31.34	peak	Р

Report No: FCC1912247-01 Page 18 of 37


Date: 2019-12-26



## A. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

**Results:** Pass

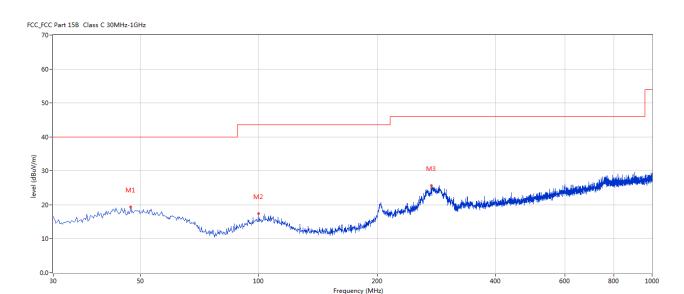

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	47.213	19.34	-11.41	40.0	-20.66	Peak	82.00	100	Н	Pass
2	99.823	17.46	-13.56	43.5	-26.04	Peak	350.00	100	Н	Pass
3	274.621	25.69	-11.64	46.0	-20.31	Peak	182.00	100	Н	Pass

Report No: FCC1912247-01 Page 19 of 37

Date: 2019-12-26




#### **B.** General Radiated Emission Data

### Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Transmitting

**Results:** Pass

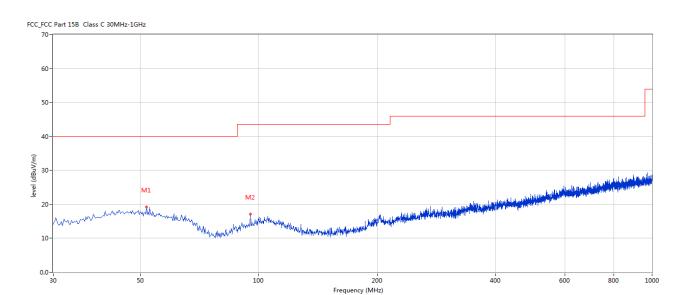

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
1	51.820	19.19	-11.42	40.0	-20.81	Peak	58.00	100	٧	Pass
2	95.216	17.09	-14.25	43.5	-26.41	Peak	281.00	100	٧	Pass

Report No: FCC1912247-01 Page 20 of 37

Date: 2019-12-26



## 7.0 20dB Bandwidth Testing

#### 7.1 Test Procedure

With the EUT's antenna attached, the EUT's 20dB Bandwidth was received by the test antenna which was connected to the spectrum analyzer with the START and STOP frequencies set to the EUT's operation band.

#### 7.3 Test Data

Frequency (MHz)	20dB Bandwidth Emission (kHz)	Limit (kHz)	Result
0.175	3.38		Pass


Refer to attached plots:

Report No: FCC1912247-01 Page 21 of 37

Date: 2019-12-26



#### 20dB Bandwidth

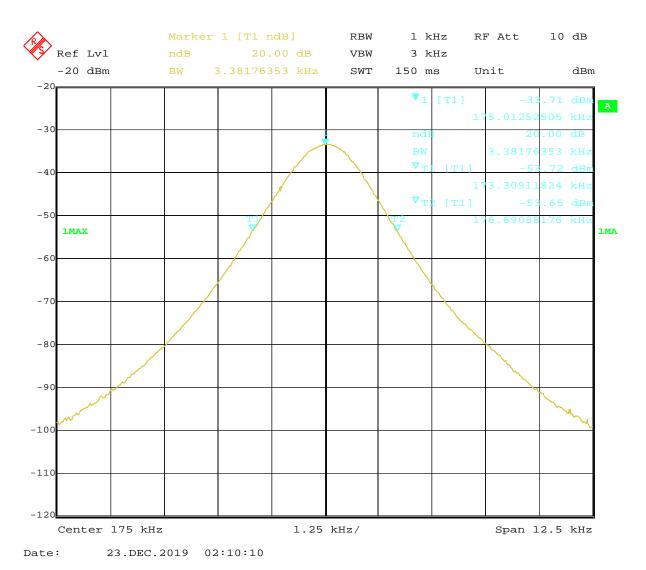

Date: 2019-12-26



Page 22 of 37

## 8.0 Antenna Requirement

### 8.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

#### 8.2 Antenna Connected constructions

The antenna is Inductive Loop Antenna. The antenna gain is 0dBi. So it meets the requirement of 15.203

Report No: FCC1912247-01 Page 23 of 37

Date: 2019-12-26




#### 9.0 FCC ID Label

#### FCC ID: 2APYY-AB0150

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

#### **Mark Location:**

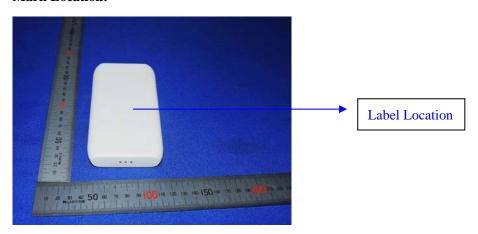


Report No: FCC1912247-01 Page 24 of 37

Date: 2019-12-26



#### 10.0. Photo of testing


#### 10.1 Conducted test View

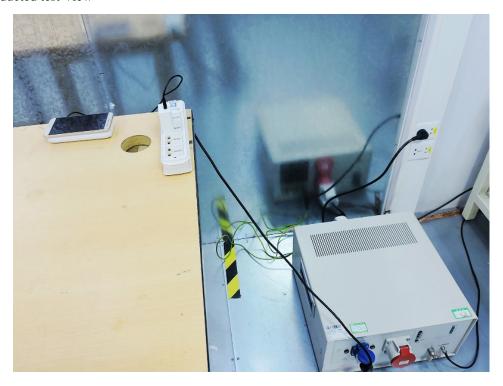


Date: 2019-12-26



#### 10.2 Radiated emission test view

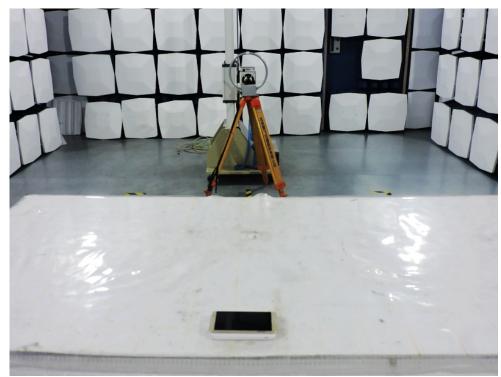

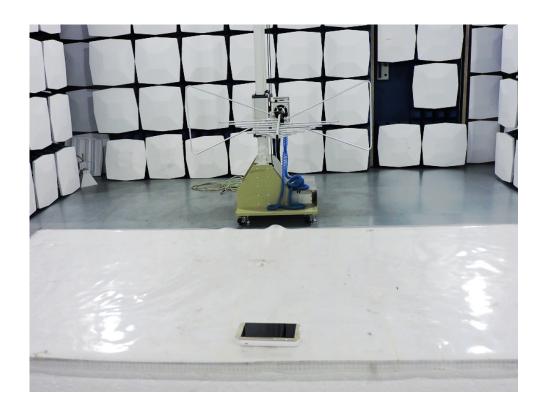

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-12-26



#### Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-12-26



#### Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-12-26



#### Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-12-26



#### Photo for the EUT





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 30 of 37


Report No: FCC1912247-01

Date: 2019-12-26



## Photo for the EUT

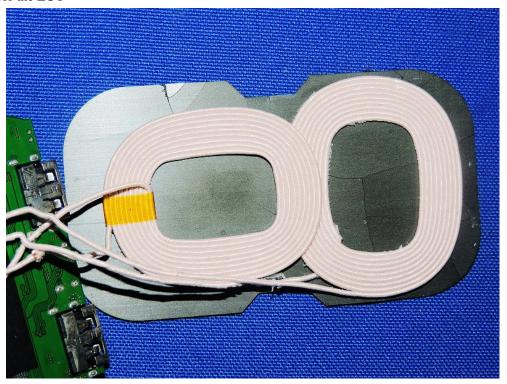

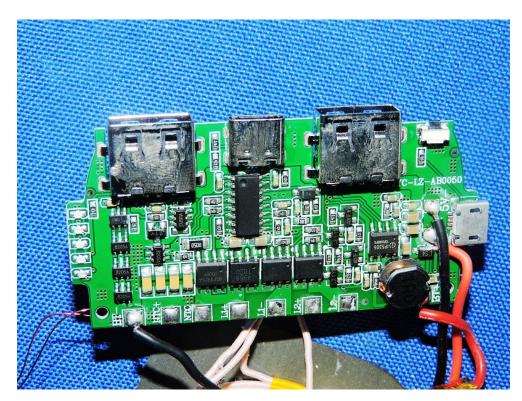

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.