



Report No.: FCC 1904025-02 File reference No.: 2019-04-19

Applicant: Leader Premiums LTD

Product: Bluetooth Speaker

Model No.: AE0068

Trademark: N/A

Test Standards: FCC Part 15.247

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: April 19, 2019

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1904025-02 Page 2 of 46

Date: 2019-04-19



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAL-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAL/AC01:2002 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Page 3 of 46

Report No.: FCC1904025-02

Date: 2019-04-19



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards.	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT.	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test.	12
5.1	Test Method and Test Procedure.	12
6.2	Configuration of the EUT.	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit.	13
7.0	6dB Bandwidth Measurement Bandwidth.	24
8.0	Maximum Peak Output Power.	29
9.0	Power Spectral Density Measurement.	31
10.0	Out of Band Measurement.	36
11.0	Antenna Requirement.	43
12.0	FCC ID Label.	44
13.0	Photo of Test Setup and EUT View.	45

Report No.: FCC1904025-02

Date: 2019-04-19



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number: 744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Leader Premiums LTD

Address: 9/F., Hengfu Mansion, NO.858. Fuming Road, Ningbo, China

Telephone: -Fax: --

1.3 Description of EUT

Product: Bluetooth Speaker

Manufacturer: Leader Premiums LTD

Address: 9/F., Hengfu Mansion, NO.858. Fuming Road, Ningbo, China

Brand Name: N/A
Additional Brand Name: N/A
Model Number: AE0068
Additional Model Number: N/A

Type of Modulation GFSK (Bluetooth BLE)

Frequency range 2402-2480MHz Frequency Selection By software

Channel Number 40

Input Voltage: DC5V, 2A

Power Adapter N/A

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1904025-02 Page 5 of 46

Date: 2019-04-19



2019-04-04 to 2019-04-19

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB
Radiated Emissions below 1GHz Uncertainty =4.7dB
Radiated Emissions above 1GHz Uncertainty =6.0dB
Conducted Power Uncertainty =6.0dB
Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

The sample tested by

Print Name: Terry Tang

Page 6 of 46

Report No.: FCC1904025-02

Date: 2019-04-19



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2018-06-22	2019-06-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2018-06-22	2019-06-21
Ultra Broadband ANT	R&S	HL562	100157	2018-06-18	2019-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2018-06-22	2019-06-21
Loop Antenna	EMCO	6507	00078608	2018-06-25	2019-06-24
Spectrum	R&S	FSIQ26	100292	2018-06-22	2019-06-21
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2018-06-25	2019-06-24
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-08-24	2019-08-23
Power meter	Anritsu	ML2487A	6K00003613	2018-08-22	2019-08-21
Power sensor	Anritsu	MA2491A	32263	2018-08-22	2019-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2019-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2018-06-22	2019-06-21
EMI Test Receiver	RS	ESH3	860904/006	2018-06-22	2019-06-21
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2018-06-22	2019-06-21
Spectrum	HP/Agilent	E4407B	MY50441392	2018-03-27	2019-03-26
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2018-05-24	2019-05-23
RF Cable	Zhengdi	7m		2018-03-17	2019-03-16
RF Switch	EM	EMSW18	060391	2018-06-22	2019-06-21
Pre-Amplifier	Schwarebeck	BBV9743	#218	2018-06-22	2019-06-21
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2018-08-05	2019-08-04
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Report No.: FCC1904025-02

Date: 2019-04-19



3.0 **Technical Details**

3.1 **Summary of test results**

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.107 & 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of a Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
FCC Part 15, Paragraph 15.109,15.205 & 15.209	Transmitter Radiated Emission Limit: Table 15.209	PASS	Complies
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit: Table 15.209	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

EUT Modification 4.0

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: FCC1904025-02

Date: 2019-04-19



5.Power Line Conducted Emission Test

5.1 Schematics of the test

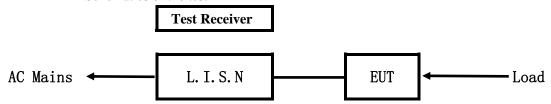


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15 MHz to 30MHz was investigated. The LISN used was 50 ohm/50 uH as specified by section 5.1 of ANSI C63.10 -2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

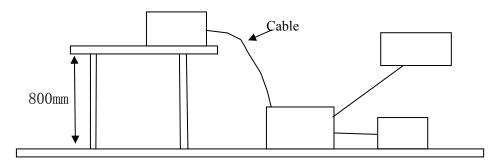

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
Bluetooth Speak	ter Leader Premiums LTD	AE0068	2APYY-AE0068

B. Internal Device

Device	Manufacturer	Model	Rating

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: FCC1904025-02 Page 9 of 46

Date: 2019-04-19



C. Peripherals

Device	Manufacturer	Model	Rating

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207 and 15.107

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB µ V)		
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level	
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*	
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0	
5.00 ~ 30.00	73.0	60.0	60.0	50.0	

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1904025-02

Date: 2019-04-19



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

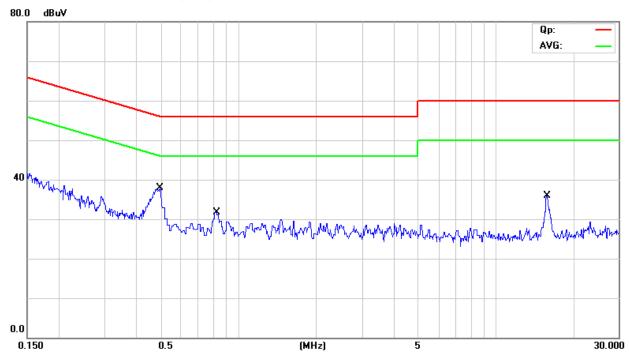

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.4896	24.00	9.77	33.77	56.17	-22.40	QP	
2		0.4896	-0.60	9.77	9.17	46.17	-37.00	AVG	
3		15.7714	18.30	10.43	28.73	60.00	-31.27	QP	
4		15.7714	-11.00	10.43	-0.57	50.00	-50.57	AVG	
5		0.8175	15.50	9.78	25.28	56.00	-30.72	QP	
6		0.8175	-8.10	9.78	1.68	46.00	-44.32	AVG	

Date: 2019-04-19



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

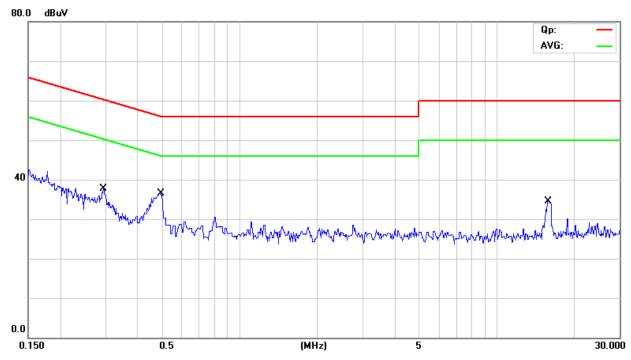

No.	No. Mk. Freq.		Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.2940	25.30	9.76	35.06	60.41	-25.35	QP	
2		0.2940	-8.60	9.76	1.16	50.41	-49.25	AVG	
3	*	0.4954	22.30	9.77	32.07	56.08	-24.01	QP	
4		0.4954	-0.70	9.77	9.07	46.08	-37.01	AVG	
5		15.6905	18.30	10.42	28.72	60.00	-31.28	QP	
6		15.6905	-11.30	10.42	-0.88	50.00	-50.88	AVG	

Report No.: FCC1904025-02


Date: 2019-04-19



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No.744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

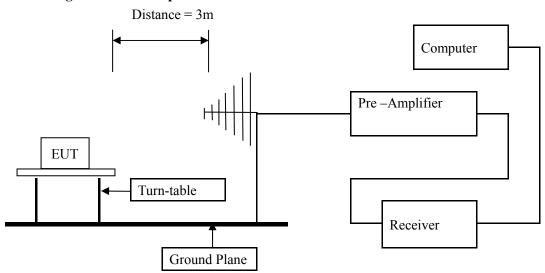

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

Report No.: FCC1904025-02 Page 13 of 46

Date: 2019-04-19



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT

Report No.: FCC1904025-02

Date: 2019-04-19



Test result General Radiated Emission Data and Harmonics Radiated Emission Data


Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting

Results: Pass

Test Figure:

FCC_FCC Part 15B Class B 30MHz-1GHz

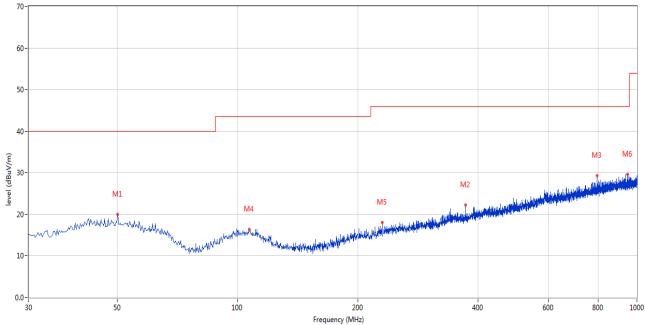

No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	50.122	19.97	-11.38	40.0	-20.03	Peak	21.00	100	Н	Pass
2	372.567	22.22	-9.47	46.0	-23.78	Peak	162.00	200	Н	Pass
3	795.381	29.26	-3.20	46.0	-16.74	Peak	55.00	100	Н	Pass
4	106.853	16.30	-13.38	43.5	-27.20	Peak	168.00	100	Н	Pass
5	230.012	17.97	-12.67	46.0	-28.03	Peak	360.00	200	Н	Pass
6	947.876	29.62	-1.52	46.0	-16.38	Peak	360.00	200	Н	Pass

Page 15 of 46

Report No.: FCC1904025-02

Date: 2019-04-19




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: Pass

Test Figure:

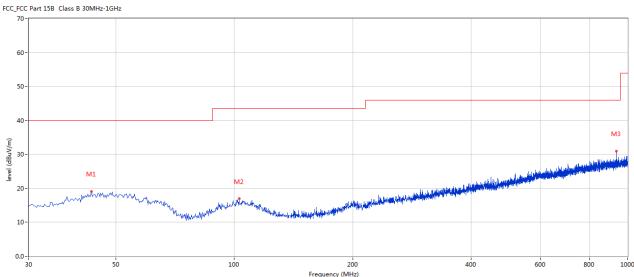

No.	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	43.334	19.13	-11.49	40.0	-20.87	Peak	360.00	200	V	Pass
2	102.974	16.96	-13.38	43.5	-26.54	Peak	57.00	200	V	Pass
3	937.451	30.98	-1.78	46.0	-15.02	Peak	136.00	200	V	Pass

Report No.: FCC1904025-02

Date: 2019-04-19



Operation Mode: Transmitting under Low Channel (2402MHz)

	0	, ,	
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4804		H/V	74(Peak)/ 54(AV)
7206		H/V	74(P ak)/ 54(AV)
9608		H/V	74(Peak)/ 54(AV)
12010		H/V	74(Peak)/ 54(AV)
14412		H/V	74(Peak)/ 54(AV)
16814		H/V	74(Peak)/ 54(AV)
19216		H/V	74(Peak)/ 54(AV)
21618		H/V	74(Peak)/ 54(AV)
24020		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Operation Mode: Transmitting g under Middle Channel (2440MHz)

Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \u03b4 V/m)
4880		H/V	74(Peak)/ 54(AV)
7320		H/V	74(Peak)/ 54(AV)
9760		H/V	74(Peak)/ 54(AV)
12200		H/V	74(Peak)/ 54(AV)
14640		H/V	74(Peak)/ 54(AV)
17080		H/V	74(Peak)/ 54(AV)
19520		H/V	74(Peak)/ 54(AV)
21960		H/V	74(Peak)/ 54(AV)
24400		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Page 17 of 46 Report No.: FCC1904025-02

Date: 2019-04-19



Operation Mode: Transmitting under High Channel (2480MHz)

	0 0		
Frequency (MHz)	Level@3m (dB \u03b4 V/m)	Antenna Polarity	Limit@3m (dB \(\mu \)V/m)
4960		H/V	74(Peak)/ 54(AV)
7440		H/V	74(Peak)/ 54(AV)
9920		H/V	74(Peak)/ 54(AV)
12400		H/V	74(Peak)/ 54(AV)
14880		H/V	74(Peak)/ 54(AV)
17360		H/V	74(Peak)/ 54(AV)
19840		H/V	74(Peak)/ 54(AV)
22320		H/V	74(Peak)/ 54(AV)
24800		H/V	74(Peak)/ 54(AV)

Note: 1. Level = Reading + AF + Cable - Preamp + Filter - Dist, Margin = Level - Limit

2. Remark "---" means that the emissions level is too low to be measured

Page 18 of 46

Report No.: FCC1904025-02


Date: 2019-04-19



Please refer to the following test plots for details:

Low Channel: Vertical

FCC Part 15B Class B 1GHz-18GHz - 2

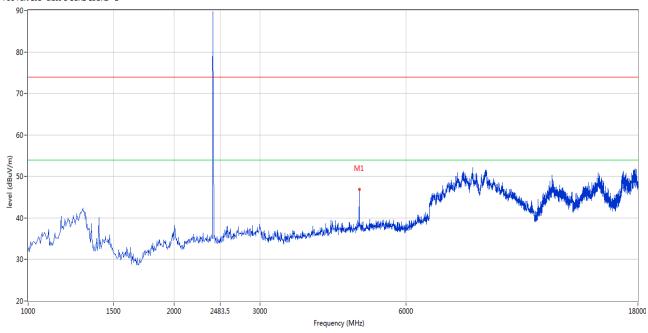


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
1	4802.799	46.95	3.12	74.0	-27.05	Peak	85.00	100	V	Pass

Report No.: FCC1904025-02 Page 19 of 46

Date: 2019-04-19



Low Channel: Horizontal

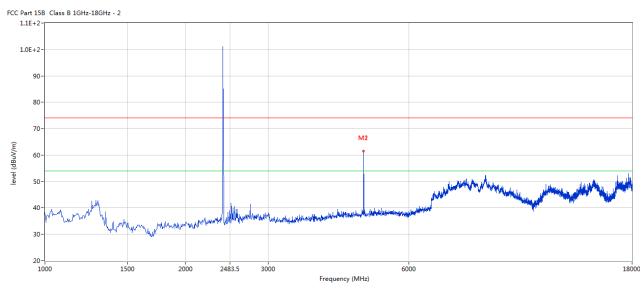


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4802.799	61.60	3.12	74.0	-12.40	Peak	225.00	100	Н	Pass
2	4802.799	45.71	3.12	54.0	-8.29	AV	225.00	100	Н	Pass

Report No.: FCC1904025-02 Page 20 of 46

Date: 2019-04-19



Middle Channel: Vertical

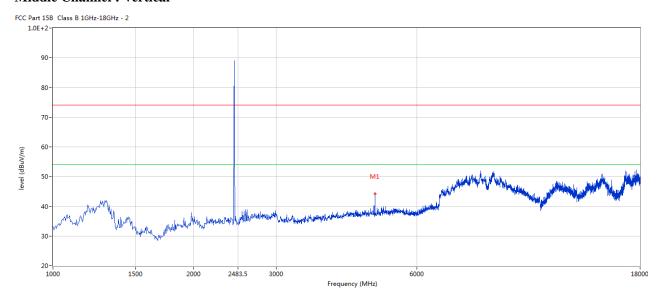


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4879.280	44.22	3.20	74.0	-29.78	Peak	90.00	100	V	Pass

Report No.: FCC1904025-02 Page 21 of 46

Date: 2019-04-19



Middle Channel: Horizontal

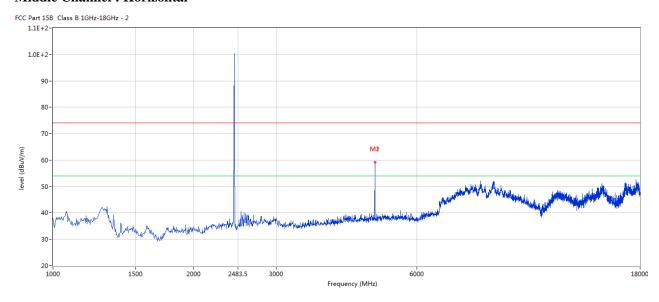


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4879.280	59.28	3.20	74.0	-14.72	Peak	231.00	100	Н	Pass
2	4879.280	43.23	3.20	54.0	-10.77	AV	231.00	100	Н	Pass

Report No.: FCC1904025-02 Page 22 of 46

Date: 2019-04-19



High Channel: Vertical

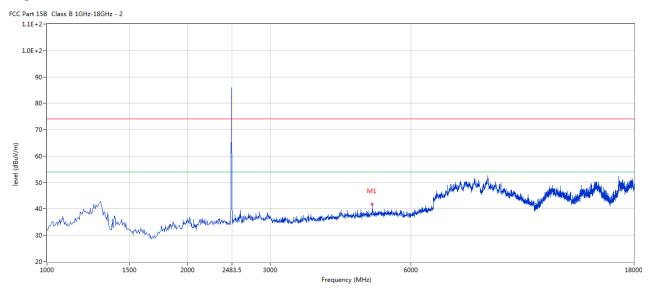

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4960.010	41.91	3.36	74.0	-32.09	Peak	92.00	100	V	Pass


Page 23 of 46

Report No.: FCC1904025-02

Date: 2019-04-19



High Channel: Horizontal

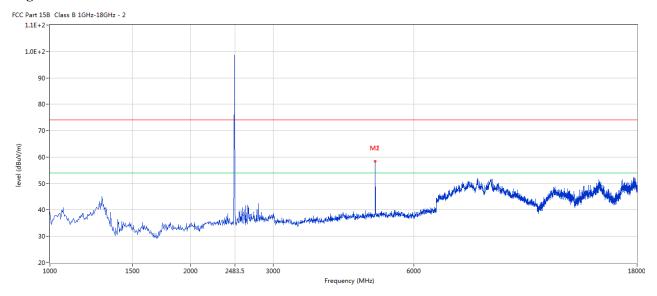

No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)		
))	(dB)					
1	4960.010	58.45	3.36	74.0	-15.55	Peak	222.00	100	Н	Pass
2	4960.010	42.69	3.36	54.0	-11.31	AV	222.00	100	Н	Pass

Note: for the radiated emissions above 18G, it is the floor noise.

Page 24 of 46


Report No.: FCC1904025-02

Date: 2019-04-19



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 25 of 46 Report No.: FCC1904025-02

Date: 2019-04-19



6dB BW

EUT		Bluetoo	th Speaker	Mod	lel		AE0068
Mode		Keep Tr	ansmitting	Input Vo	oltage		DC3.7V
Temperat	Temperature 24		deg. C,		Humidity		56% RH
Channel	Channel Frequency (MHz)		6 dB Bandwidth (kHz)		Minimum Limit (kHz)		Pass/ Fail
Low	2402		721		0.5		Pass
Middle	2440 72		721			0.5	Pass
High	2480	480 721				0.5	Pass

Page 26 of 46


Report No.: FCC1904025-02

Date: 2019-04-19



Test Figure:

1. Condition: Low Channel

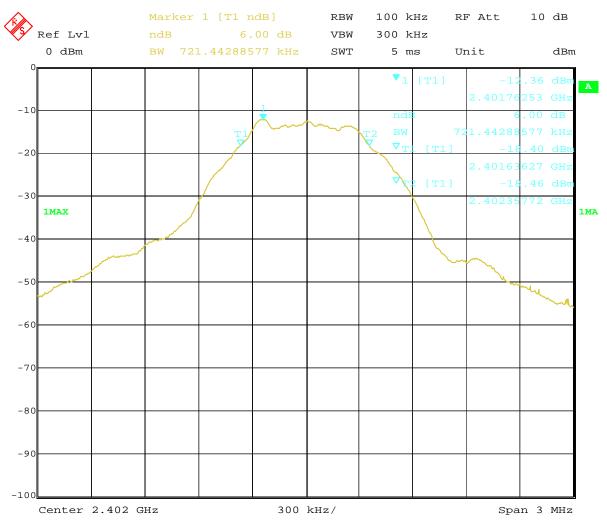


Date: 15.APR.2019 17:30:39

Report No.: FCC1904025-02 Page 27 of 46

Date: 2019-04-19



2. Condition: Middle Channel

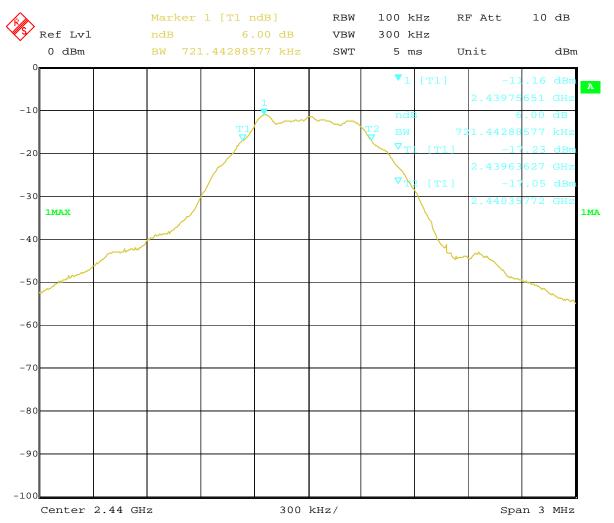


Date: 15.APR.2019 17:34:51

Report No.: FCC1904025-02 Page 28 of 46

Date: 2019-04-19



3. High Channel

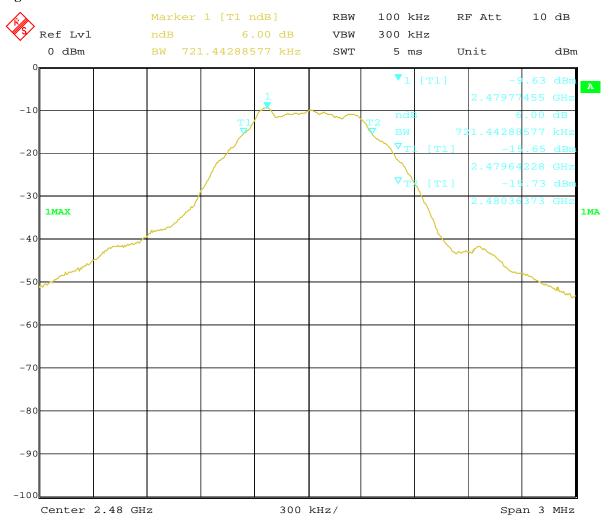

Date: 15.APR.2019 17:36:47


Report No.: FCC1904025-02 Page 29 of 46

Date: 2019-04-19



8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: the Peak power were measured.

Report No.: FCC1904025-02 Page 30 of 46

Date: 2019-04-19



8.4Test Results

EUT		Bluetoo	th Speaker	Model	AE	0068
Mode		Keep Ti	ransmitting	Input Voltage	DC	3.7V
Temperatu	nperature 24		deg. C, Humidity		56% RH	
Channel	Cł	nannel Frequency	Max. Power O	output (dBm)	Peak Power Limit	Pass/ Fail
Chamer		(MHz)	Pea	ık	(dBm)	
Low		2402	-10.	80	30	Pass
Middle		2440	-9.5	57	30	Pass
High		2480		17	30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

Page 31 of 46


Report No.: FCC1904025-02

Date: 2019-04-19



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be ≤ 8 dBm.

Report No.: FCC1904025-02 Page 32 of 46

Date: 2019-04-19



9.4Test Result

EUT		В	luetooth Spe	aker	Mode	el		AE0068
Mode		K	eep Transmit	tting	Input Vol	ltage		DC3.7V
Temperat	ure		24 deg. C,		ity		56% RH	
Channel	Peak Power Reading (dBm)		Cable Loss (dB)		Final Power Spectral Density (dBm)		mum nit m)	Pass/ Fail
Low	-1	8.98	0.2	-13	8.78	8	3	Pass
Middle	-1	7.73	0.2	-1	7.53	8	3	Pass
High	-1	6.44	0.2	-10	6.24	8	}	Pass

Note: The result basic equation calculation as follow:

Peak Power Output = Peak Power Reading + Cable loss

Page 33 of 46


Report No.: FCC1904025-02

Date: 2019-04-19



Test Figure:

1. Condition: Low Channel

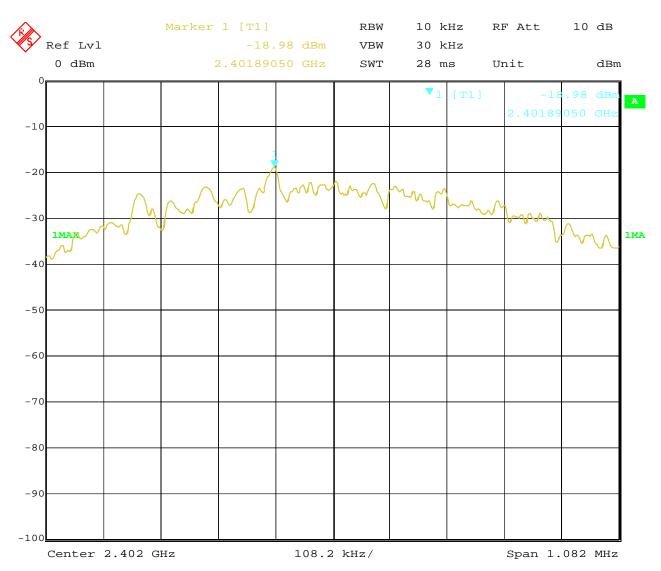

Date: 15.APR.2019 17:43:51


Page 34 of 46

Report No.: FCC1904025-02

Date: 2019-04-19



2. Condition: Middle Channel

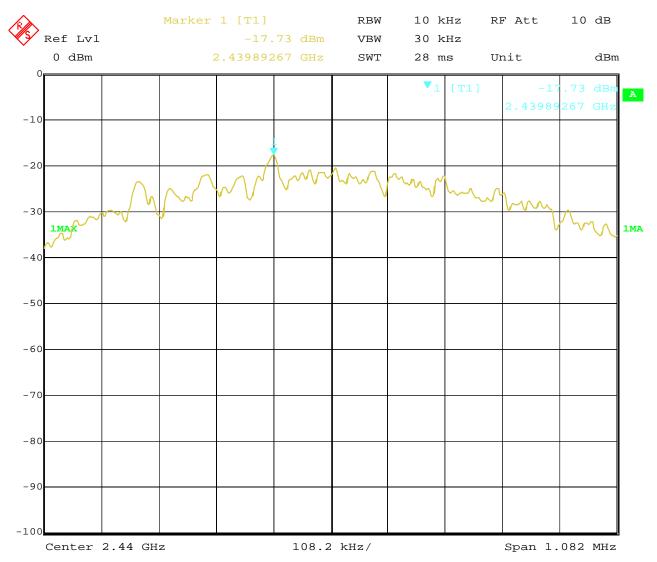

Date: 15.APR.2019 17:45:32


Page 35 of 46

Report No.: FCC1904025-02

Date: 2019-04-19



3. High Channel

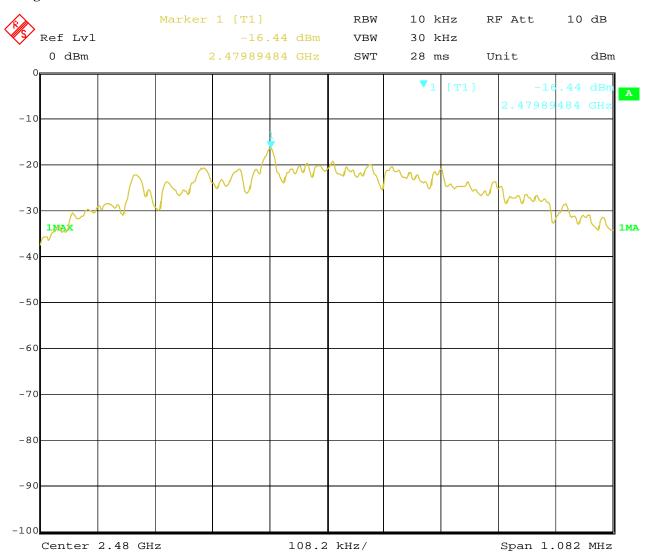

Date: 15.APR.2019 17:48:24


Page 36 of 46

Report No.: FCC1904025-02

Date: 2019-04-19



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of Radiated emission test. (Peak values with RBW=1MHz, VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector)

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

Page 37 of 46

Report No.: FCC1904025-02


Date: 2019-04-19



10.4 Band-edge Measurement

EUT	Bluetooth Speaker	Model	AE0068
Mode	Keep Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

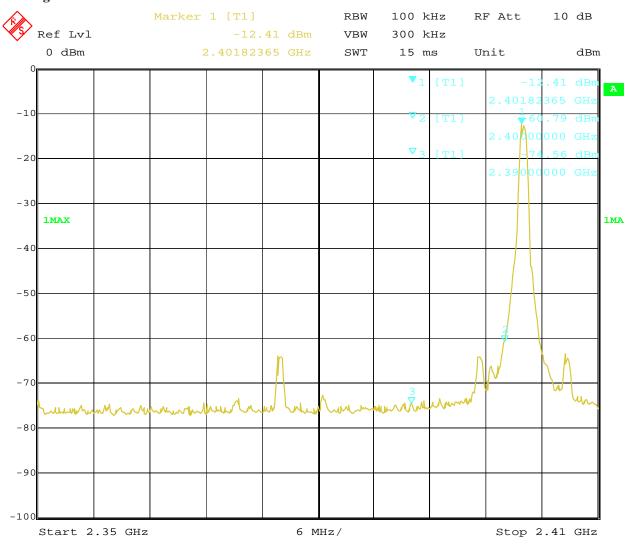

Date: 15.APR.2019 17:55:29

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 38 of 46

Report No.: FCC1904025-02


Date: 2019-04-19



10.4 Band-edge Measurement

EUT	Bluetooth Speaker	Model	AE0068
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

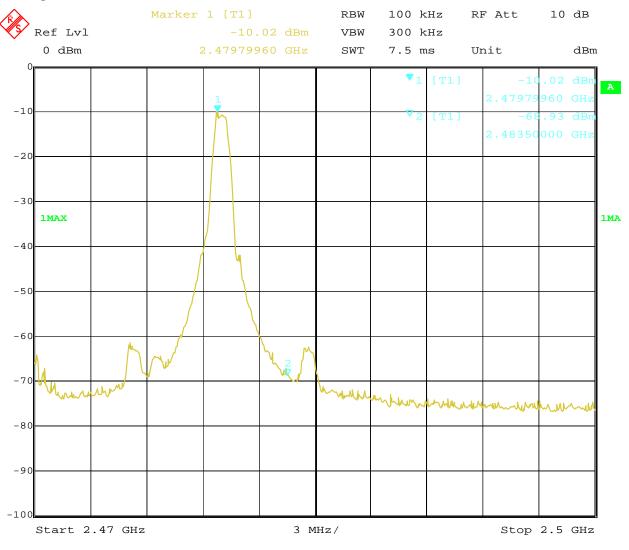

Date: 15.APR.2019 17:53:34

Note: The Max. FS in Restrict Band are measured in conventional method.

Page 39 of 46 Report No.: FCC1904025-02

Date: 2019-04-19



Pastrict Rand Massurament

EUT Bluetooth Speaker							Model			AE006	58		
Mode Keep Transmitting					nitting		Input Volta	ige	DC3.7V				
-	Гетр	erature		24 deg. (C,		Humidit	y		56% R	Н		
,	Test	Result:		Pass									
		Class B 1GHz-18GHz - 2						<u> </u>					
1.	1E+2-												
1.	DE+2-												
	90-									A			
										/ \			
	80-									/ \			
(m)	70-												
level (dBuV/m)	60-												
eve											- Wil		
	50-										70		
	40-	- Control of the state of the s											
	20	2350											
	30- 2350	ı				Frequency					2410		
No).	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict		
	-	(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit	23.33.31		(cm)				
		(/)	(/)	(dB)			(2)				
1		2390	39.04	-3.53	74.0	-34.96	Peak	88.00	100	Н	Pass		

Report No.: FCC1904025-02 Page 40 of 46

Date: 2019-04-19



10.4 Doctrict Dand Massurament

	E	UT	Blı	ietooth Sp	peaker		Model		AE0068				
Mode		Ke	ep Transn	nitting	Input Voltage		DC3.7V						
Т	emp	erature		24 deg. (C,		Humidity			56% RH			
]	Test I	Result:		Pass									
		ass B 1GHz-18GHz - 2											
1.1	E+2-												
1.0	E+2-												
	90-									A/N			
										/			
	80-									/			
Œ	70-												
level (dBuV/m)	60-									/ \			
eve	_								/				
	50-										Addi.		
	40-								<i>V</i>		W.		
	-	مهداه فأدرعها المحاصوات	ted light depth of the section		Aideales Sales Aireanni Airea	والدراء ومرافعا والإنافا والمأول	والمطاور والمناور والمراجع المراجع الم		adaya da salarar		Making		
	2350					Frequency (MHz)				2410		
						,, (-						
No.		Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict		
		cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit		(3)	(cm)				
))	(dB)							
		1		1	1 "	1	1	1	1	1	1		

Report No.: FCC1904025-02 Page 41 of 46

Date: 2019-04-19



10.4 Pactrict Rand Massurament

	I	EUT	Blı	uetooth Sp	eaker		Model			AE00	68	
	N	Mode	Ke	ep Transn	nitting		Input Voltage			DC3.7V		
,	Tem	perature		24 deg. (C,		Humidi	ty	56% RH			
	Test	Result:		Pass								
		Class B 1GHz-18GHz - 2				•			•			
1.	.1E+2-											
1.	.0E+2-				$\overline{}$							
	90-											
level (dBuV/m)	80-											
	70-											
					\							
eve	60-											
	50-											
	40-		L. Linder									
	,	The state of the s	T								handari da	
	30-¦ 247	70				2483.5					2500	
						Frequency	(MHz)					
		Τ_	T	Ι	T	Г	T	I -	I	T		
No	0.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict	
		(MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)			
))	(dB)	1					
1		2483.5	60.43	-3.57	74.0	-13.57	Peak	38.00	100	Н	Pass	
2		2483.5	45.21	-3.57	54.0	-8.79	AV	38.00	100	Н	Pass	

Report No.: FCC1904025-02 Page 42 of 46

Date: 2019-04-19



10.4 Restrict Band Measurement

	EU	JT	Blı	uetooth Sp	peaker		Model			AE006	58	
	Mode Keep Transmitting						Keep Transmitting Input Voltage					
,	Гетре	erature		24 deg. (C,		Humidity	y	56% RH			
	Test F	Result:		Pass								
		ass B 1GHz-18GHz - 2										
1.	.1E+2-											
1.	.0E+2-											
	90-											
	80-	80										
(m/ _V	70-											
level (dBuV/m)	60-			_/								
<u> </u>	50-			/								
	30-			,		weth his						
	40-	والمراجع المراجع المرا	OR THE STREET			. 441 11.1	Maria Maria Maria	عيرأبيا أأدو الإواجاء الرامز الإدوا		a nation in a casalillas	at many and the state state are	
	30-	id told the official should be be the second	MAN PRIVILLE AND ADDRESS OF THE PERSON ADDRESS OF THE PERSON AND ADDRESS OF THE PERSON ADDRESS OF THE PERSON AND ADDRESS OF THE PERSON AND ADDRESS OF THE PERSON ADDRESS OF THE PERSON AND ADDRESS OF TH				Uniterated to the state of the	·	Takala magasa tarapatan taka dalah ma	notice the second of the second		
	2470					2483.5 Frequency	(MHz)				2500	
_												
No).	Frequen	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict	
		cy (MHz)	(dBuV/m	(dB)	(dBuV/m	Limit			(cm)			
))	(dB)						
1		2483.5	50.01	-3.57	74.0	-23.99	Peak	114.00	100	V	Pass	

Report No.: FCC1904025-02

Date: 2019-04-19



Page 43 of 46

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

PCB antenna used. The gain of the antennas is 0dBi.

Report No.: FCC1904025-02 Page 44 of 46

Date: 2019-04-19




12.0 FCC ID Label

FCCID: 2APYY-AE0068

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

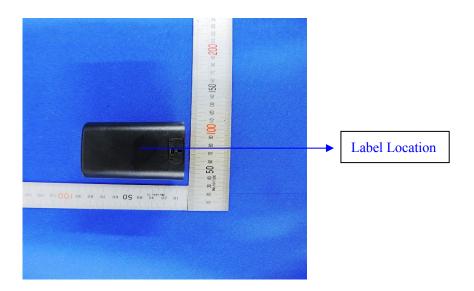

Page 45 of 46


Report No.: FCC1904025-02

Date: 2019-04-19



13.0 Photo of testing

Conducted Emission Test Setup:

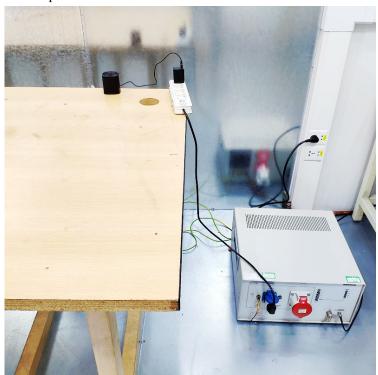


Report No.: FCC1904025-02

Date: 2019-04-19



Radiated Emission Test Setup:

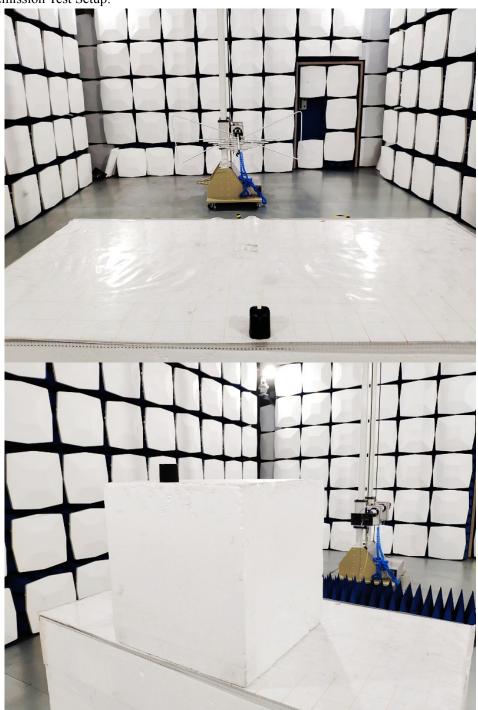

Photographs - EUT

Please see test report EMC1904025-01

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.