



Report No.: FCC 1912128
File Reference No.: 2019-12-24

Applicant: Leader Premiums Limited

Product: Bluetooth Speaker

Model No.: AE0127

Trademark: N/A

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for

the evaluation of electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: December 24, 2019

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: FCC1912128 Page 2 of 80

Date: 2019-12-24



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 80

Report No.: FCC1912128

Date: 2019-12-24



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	4
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results.	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
5.1	Schematics of the Test.	8
5.2	Test Method and Test Procedure.	8
5.3	Configuration of the EUT	8
5.4	EUT Operating Condition.	9
5.5	Conducted Emission Limit.	9
5.6	Test Result.	9
6.0	Radiated Emission test	12
6.1	Test Method and Test Procedure	12
6.2	Configuration of the EUT	12
6.3	EUT Operation Condition.	12
6.4	Radiated Emission Limit	13
7.0	20dB Bandwidth	23
8.0	Maximum Output Power	35
9.0	Carrier Frequency Separation.	38
10.0	Number of Hopping Channel	42
11.0	Time of Occupancy (Dwell Time)	46
12.0	Out of Band Measurement.	53
13.0	Antenna Requirement.	70
14.0	FCC ID Label	71
15.0	Photo of Test Setup and EUT View.	72

Report No.: FCC1912128 Page 4 of 80

Date: 2019-12-24



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Leader Premiums Limited

Address: 9/F., Hengfu Mansion, NO.858, Fuming Road, Ningbo, China

Telephone: 0086-574-87723018

Fax: --

1.3 Description of EUT

Product: Bluetooth Speaker

Manufacturer: Leader Premiums Limited

Address: 9/F., Hengfu Mansion, NO.858, Fuming Road, Ningbo, China

Brand Name: N/A
Model Number: AE0127
Additional Model Number: N/A

Type of Modulation GFSK, 月/4DQPSK, 8DPSK for Bluetooth

Frequency range 2402-2480MHz for Bluetooth

Channel Spacing 1MHz for Bluetooth

Frequency Selection By software

Channel Number 79 channel for Bluetooth

Antenna: PCB antenna used. The gain of the antennas is 0.58dBi
Rating: Input: DC 5V or Built-in DC3.7V, 450mAh Li-ion battery

1.4 Submitted Sample: 1 Samples

1.5 Test Duration

2019-12-12 to 2019-12-24

1.6 Test Uncertainty

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 5 of 80 Report No.: FCC1912128

Date: 2019-12-24



Conducted Emissions Uncertainty = 3.6dB Radiated Emissions below 1GHz Uncertainty =4.7dB Radiated Emissions above 1GHz Uncertainty =6.0dB Conducted Power Uncertainty = 6.0dB Occupied Channel Bandwidth Uncertainty =5%

1.7 Test Engineer

Terry Tang The sample tested by

Print Name: Terry Tang

Page 6 of 80

Report No.: FCC1912128

Date: 2019-12-24



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	ESPI Test Receiver R&S		100379	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2019-06-21	2020-06-20
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2019-06-21	2020-06-20
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2019-06-21	2020-06-20
Loop Antenna	EMCO	6507	00078608	2020-06-20	2020-06-20
Spectrum	R&S	FSIQ26	100292	2019-06-21	2020-06-20
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2019-06-21	2020-06-20
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2019-08-22	2020-08-21
Power sensor	Anritsu	MA2491A	32263	2019-08-22	2020-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2019-06-21	2020-06-20
EMI Test Receiver	RS	ESH3	860904/006	2019-06-21	2020-06-20
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2019-06-21	2020-06-20
Spectrum	HP/Agilent	E4407B	MY50441392	2019-06-21	2020-06-20
Spectrum	RS	FSP	1164.4391.38	2019-01-20	2020-01-19
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2019-06-21	2020-06-20
RF Cable	Zhengdi	7m		2019-06-21	2020-06-20
RF Switch	EM	EMSW18	060391	2019-06-21	2020-06-20
Pre-Amplifier	Schwarebeck	BBV9743	#218	2019-06-21	2020-06-20
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2019-06-21	2020-06-20
LISN	SCHAFFNER	NNB42	00012	2019-01-08	2020-01-07

Report No.: FCC1912128 Page 7 of 80

Date: 2019-12-24



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested according to the following specifications:

Requirement	CFR 47 Section	Result	Notes
Antenna Requirement	15.203, 15.247(b)(4)	PASS	Complies
Maximum Peak Out Power	15.247 (b)(1), (4)	PASS	Complies
Carrier Frequency Separation	15.247(a)(1)	PASS	Complies
20dB Channel Bandwidth	15.247 (a)(1)	PASS	Complies
Number of Hopping Channels	15.247(a)(iii), 15.247(b)(1)	PASS	Complies
Time of Occupancy (Dwell Time)	15.247(a)(iii)	PASS	Complies
Spurious Emission, Band Edge, and Restricted bands	15.247(d),15.205(a), 15.209 (a),15.109	PASS	Complies
Conducted Emissions	15.207(a), 15.107	PASS	Complies
RF Exposure	15.247(i), 1.1307(b)(1)	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.

Page 8 of 80


Report No.: FCC1912128

Date: 2019-12-24



5. Power Line Conducted Emission Test

5.1 Schematics of the test

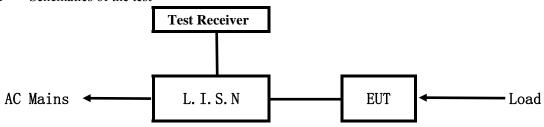


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~60Hz Block diagram of Test setup

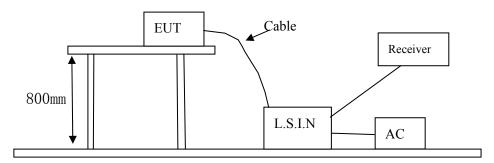

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

Report No.: FCC1912128 Page 9 of 80

Date: 2019-12-24



A. EUT

Device	Manufacturer	Model	FCC ID
Bluetooth Speaker	Leader Premiums Limited	AE0127	2APYY-AE0127

B. Internal Device

Device	Manufacturer	Model	Rating

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	h.TV	S012BE80500200	Input: 100-240V~, 50/60Hz, 0.5A;
			Output: DC5V, 2A

5.4 **EUT Operating Condition**

Operating condition is according to ANSI C63.10-2013.

- Α Setup the EUT and simulators as shown on follow
- В Enable AF signal and confirm EUT active to normal condition

Power line conducted Emission Limit according to Paragraph 15.107, 15.207 5.5

Frequency	Class A Lim	its (dB µ V)	Class B Limits (dB \(\mu \)			
(MHz)	Quasi-peak Level	Average Level	Quasi-peak Level	Average Level		
$0.15 \sim 0.50$	79.0	66.0	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	73.0	60.0	56.0	46.0		
5.00 ~ 30.00	73.0	60.0	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 **Test Results**

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Report No.: FCC1912128

Date: 2019-12-24



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

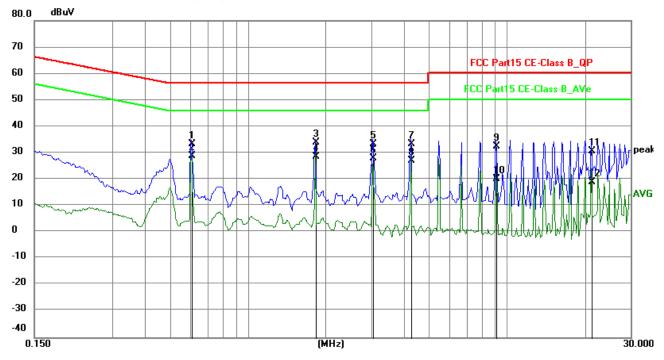

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.6063	33.49	0.00	33.49	56.00	-22.51	QP	Р
2	0.6063	28.99	0.00	28.99	46.00	-17.01	AVG	Р
3	1.8192	33.83	0.00	33.83	56.00	-22.17	QP	Р
4	1.8192	28.63	0.00	28.63	46.00	-17.37	AVG	Р
5	3.0350	33.31	0.00	33.31	56.00	-22.69	QP	Р
6	3.0350	27.84	0.00	27.84	46.00	-18.16	AVG	Р
7	4.2480	33.42	0.00	33.42	56.00	-22.58	QP	Р
8	4.2480	27.03	0.00	27.03	46.00	-18.97	AVG	Р
9	9.1035	32.38	0.00	32.38	60.00	-27.62	QP	Р
10	9.1035	20.13	0.00	20.13	50.00	-29.87	AVG	Р
11	21.2325	30.60	0.00	30.60	60.00	-29.40	QP	Р
12	21.2325	18.92	0.00	18.92	50.00	-31.08	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Date: 2019-12-24

Report No.: FCC1912128



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Humidity: 65%RH Atmospheric Pressure: 101 KPa Temperature: 26°C

EUT set Condition: Keep Bluetooth Transmitting

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

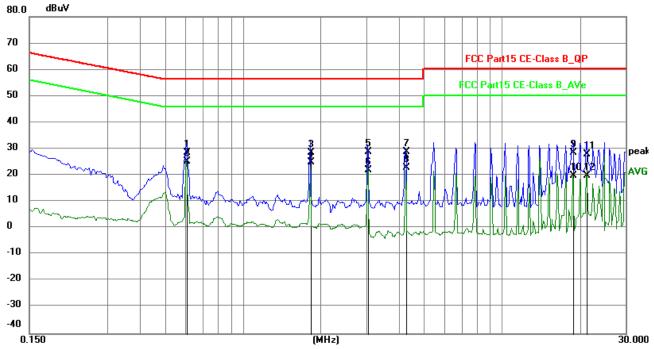

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.6063	28.69	0.00	28.69	56.00	-27.31	QP	Р
2	0.6063	25.25	0.00	25.25	46.00	-20.75	AVG	Р
3	1.8192	28.69	0.00	28.69	56.00	-27.31	QP	Р
4	1.8192	24.93	0.00	24.93	46.00	-21.07	AVG	Р
5	3.0350	28.88	0.00	28.88	56.00	-27.12	QP	Р
6	3.0350	21.96	0.00	21.96	46.00	-24.04	AVG	Р
7	4.2480	28.87	0.00	28.87	56.00	-27.13	QP	Р
8	4.2480	22.89	0.00	22.89	46.00	-23.11	AVG	Р
9	18.8106	28.61	0.00	28.61	60.00	-31.39	QP	Р
10	18.8106	19.97	0.00	19.97	50.00	-30.03	AVG	Р
11	21.2403	27.91	0.00	27.91	60.00	-32.09	QP	Р
12	21.2403	19.74	0.00	19.74	50.00	-30.26	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Report No.: FCC1912128 Page 12 of 80


Date: 2019-12-24



6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. For measurement above 1GHz, peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

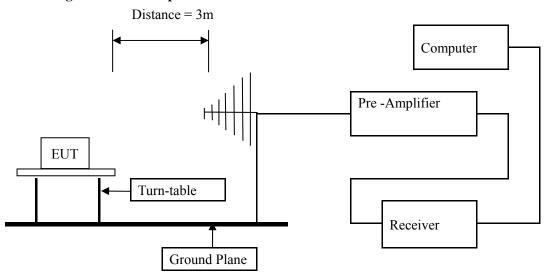

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.

The report refers only to the sample tested and does not apply to the bulk.

Report No.: FCC1912128 Page 13 of 80

Date: 2019-12-24



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Frequencies in restricted band are complied to limit on Paragraph 15.209 and 15.109 and RSS-210

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. 8DPSK was the worse case because it has highest output power
- 5. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 6. Battery fully charged

Report No.: FCC1912128

Date: 2019-12-24



Page 14 of 80

Test result

General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal/Vertical (30MHz----1000MHz)

EUT set Condition: Keep Bluetooth Transmitting


Results: Pass Report No.: FCC1912128 Page 15 of 80


Date: 2019-12-24



Test Figure:

H



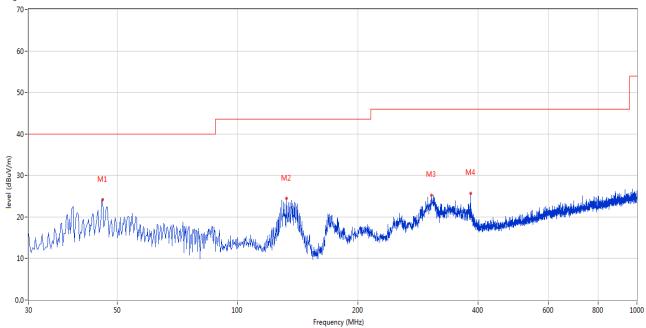


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	46.001	24.18	-11.40	40.0	-15.82	Peak	360.00	100	Н	Pass
2	132.794	24.48	-17.01	43.5	-19.02	Peak	1.00	200	Н	Pass
3	305.896	25.31	-10.93	46.0	-20.69	Peak	233.00	100	Н	Pass
4	383.962	25.73	-9.16	46.0	-20.27	Peak	173.00	100	Н	Pass

Page 16 of 80 Report No.: FCC1912128

Date: 2019-12-24



Test Figure:

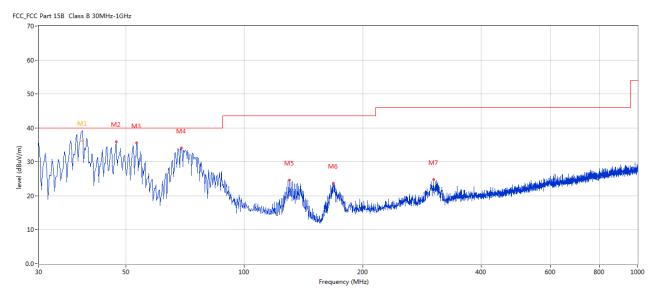

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	38.750	37.53	-12.63	40.0	-2.47	Peak	31.00	100	V	Pass
1*	38.750	36.19	-12.63	40.0	-3.81	QP	31.00	100	V	Pass
2	47.213	35.96	-11.41	40.0	-4.04	Peak	263.00	100	V	Pass
3	53.274	35.56	-11.51	40.0	-4.44	Peak	323.00	100	V	Pass
4	69.275	34.07	-15.38	40.0	-5.93	Peak	0.00	200	V	Pass
5	130.370	24.62	-16.75	43.5	-18.88	Peak	21.00	100	V	Pass
6	168.433	23.73	-16.13	43.5	-19.77	Peak	360.00	100	V	Pass
7	303.229	24.72	-10.98	46.0	-21.28	Peak	217.00	200	V	Pass

Report No.: FCC1912128 Page 17 of 80


Date: 2019-12-24



Test Figures above 1GHz:

Please refer to the following test plots for details:

Low Channel: Vertical

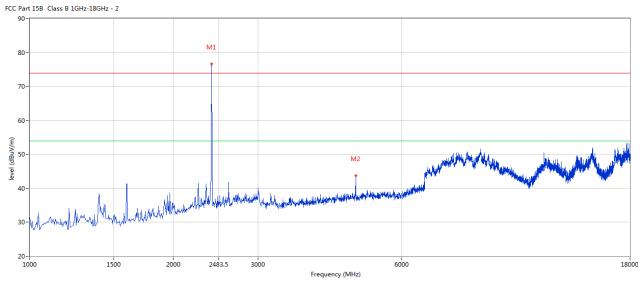

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height (cm)	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)					
2	4802.799	43.76	3.12	54.0	-10.24	Peak	360.00	100	V	Pass


Page 18 of 80 Report No.: FCC1912128

Date: 2019-12-24



Low Channel: Horizontal

FCC_FCC Part 15B Class B 1GHz-18GHz - 2

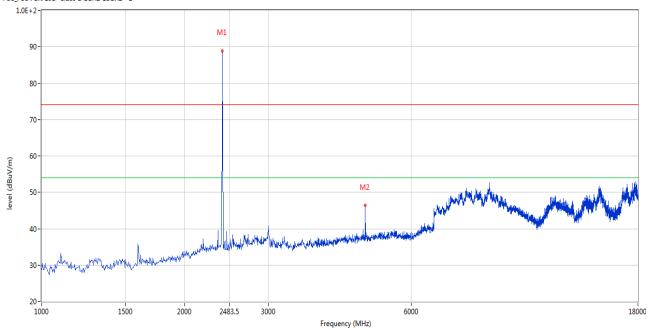


No.	Frequency	Results	Factor (dB)	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)		(dBuV/m)	(dB)		(o)	(cm)		
2	4802.799	46.44	3.12	54.0	-7.56	Peak	270.00	100	Н	Pass

Page 19 of 80 Report No.: FCC1912128

Date: 2019-12-24



Middle Channel: Horizontal

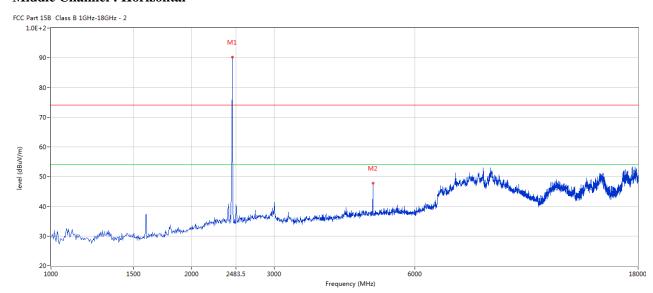

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	4883.529	47.79	3.20	54.0	-6.21	Peak	139.00	100	Н	Pass


Page 20 of 80 Report No.: FCC1912128

Date: 2019-12-24



Middle Channel: Vertical

FCC_FCC Part 15B Class B 1GHz-18GHz - 2

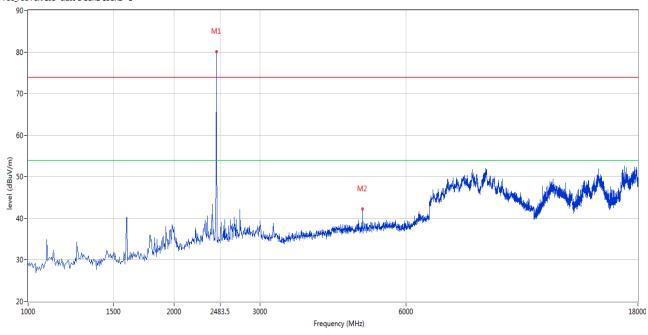


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	4883.529	42.18	3.20	54.0	-11.82	Peak	360.00	100	V	Pass

Page 21 of 80 Report No.: FCC1912128

Date: 2019-12-24



High Channel: Horizontal

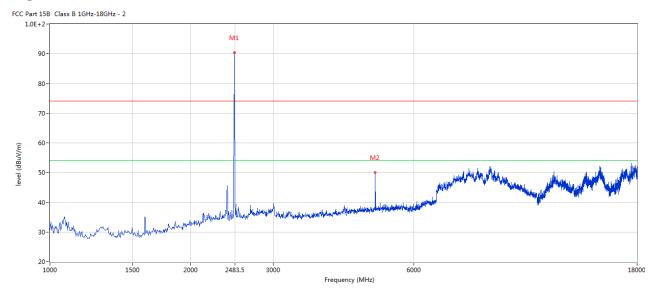


No.	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)		
2	4960.010	49.98	3.36	54.0	-4.02	Peak	119.00	100	Н	Pass

Report No.: FCC1912128 Page 22 of 80

Date: 2019-12-24



High Channel: Vertical

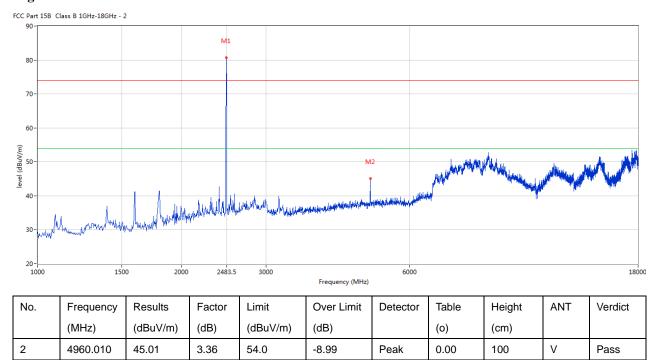

Note: 1. Level = Reading + AF + Cable - Preamp

- 2. For the radiated emissions above 18G, it is the floor noise.
- 3. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Report No.: FCC1912128 Page 23 of 80

Date: 2019-12-24



7.0 20dB Bandwidth Measurement

7.1 Regulation

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

7.2 Limits of 20dB Bandwidth Measurement

N/A

7.3 Test Procedure.

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span =3MHz, RBW =30 kHz, VBW=100 kHz, Sweep = auto Detector function = peak, Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results. 6. Repeat above procedures until all frequencies measured were complete.

7.4 Test Result

Type of Modulation: GFSK

Type of Modulation, OTSIX									
EUT	Blı	uetooth Speaker	Model	AE0127					
Mode	Ke	ep Transmitting	Input Voltage	DC3.7V					
Temperat	ure	24 deg. C,	Humidity	56% RH					
Channel	Channel Frequency (MHz)			Pass/ Fail					
Low	2402	885		Pass					
Middle	2441	885		Pass					
High	2480	2480 885		Pass					

Page 24 of 80


Report No.: FCC1912128

Date: 2019-12-24



Test Figure:

1. Condition: Low Channel

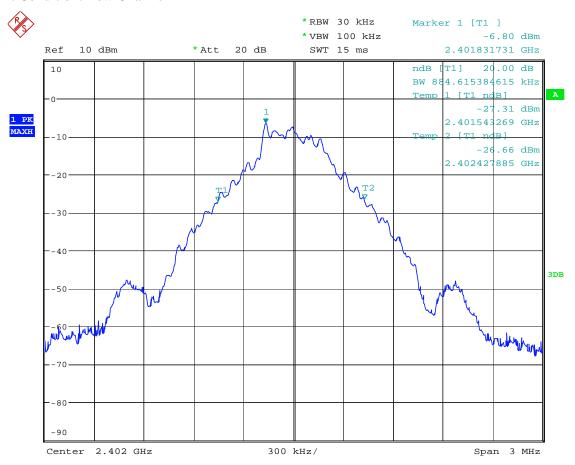

Date: 23.DEC.2019 13:45:50


Page 25 of 80

Report No.: FCC1912128

Date: 2019-12-24



2. Condition: Middle Channel

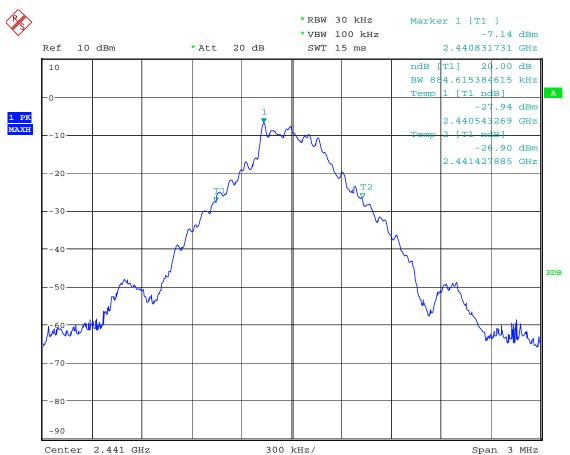


Date: 23.DEC.2019 13:47:28

Report No.: FCC1912128 Page 26 of 80

Date: 2019-12-24



3. High Channel

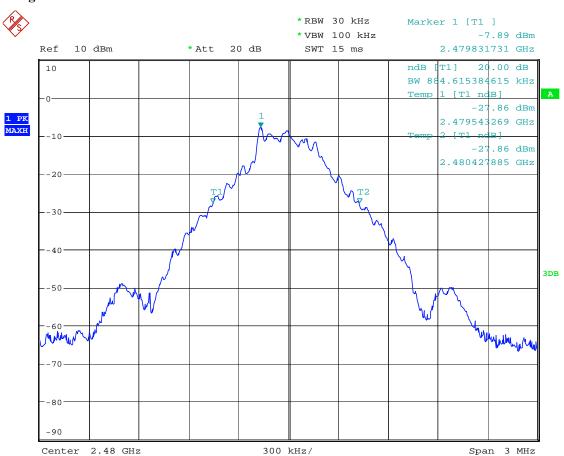

Date: 23.DEC.2019 14:38:29

Report No.: FCC1912128

Date: 2019-12-24



Page 27 of 80

Test Result

Type of Modulation: JI/4DQPSK

EUT	В	luetooth Speaker	Model	AE0127
Mode	K	eep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)			Pass/ Fail
Low	2402	1258		Pass
Middle	2441	2441 1258		Pass
High	2480 1258			Pass

Page 28 of 80


Report No.: FCC1912128

Date: 2019-12-24



Test Figure:

1. Condition: Low Channel

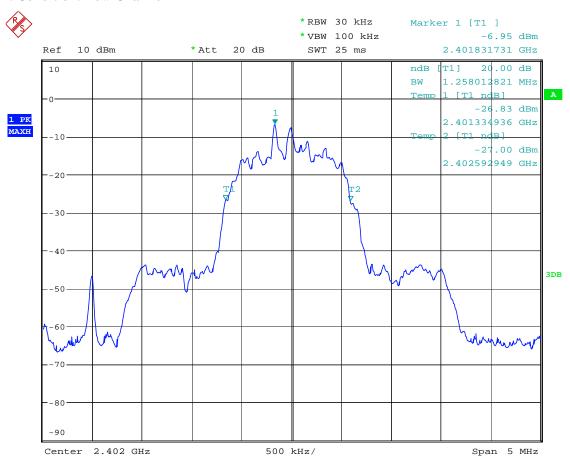


Date: 24.DEC.2019 17:41:47

Report No.: FCC1912128 Page 29 of 80

Date: 2019-12-24



2. Condition: Middle Channel

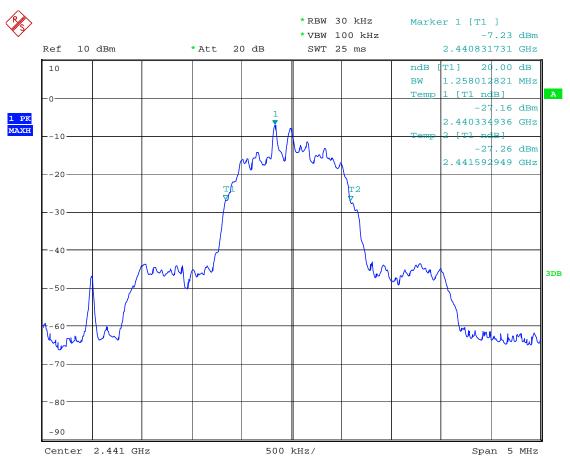


Date: 24.DEC.2019 17:38:50

Report No.: FCC1912128 Page 30 of 80

Date: 2019-12-24



3. High Channel

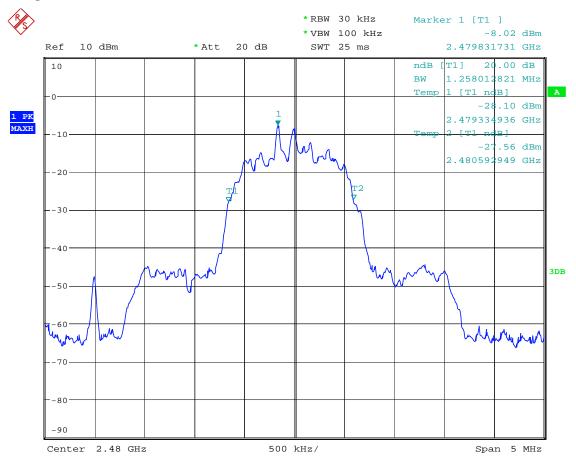

Date: 24.DEC.2019 17:37:35

Page 31 of 80 Report No.: FCC1912128

Date: 2019-12-24



Test Result

Type of Modulation: 8DPSK

EUT	Bl	uetooth Speaker	Model	AE0127
Mode	Ko	eep Transmitting	Input Voltage	DC3.7V
Temperat	ure	24 deg. C,	Humidity	56% RH
Channel	Channel Frequency (MHz)	20 dB Bandwidth (kHz)	Maximum Limit (kHz)	Pass/ Fail
Low	2402	1274		Pass
Middle	2441	1274		Pass
High	2480 1274			Pass

Page 32 of 80


Report No.: FCC1912128

Date: 2019-12-24



Test Figure:

1. Condition: Low Channel

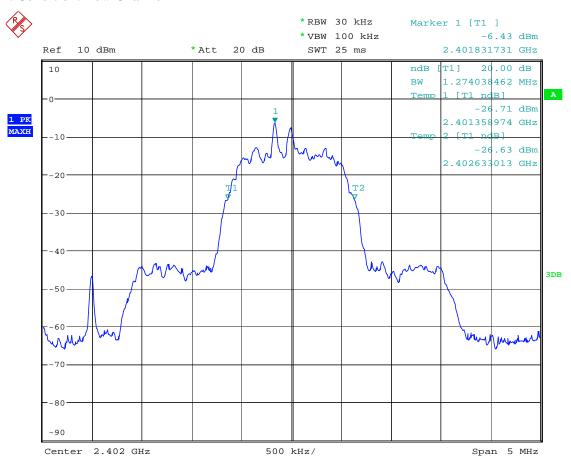

Date: 24.DEC.2019 17:40:54


Page 33 of 80

Report No.: FCC1912128

Date: 2019-12-24



2. Condition: Middle Channel

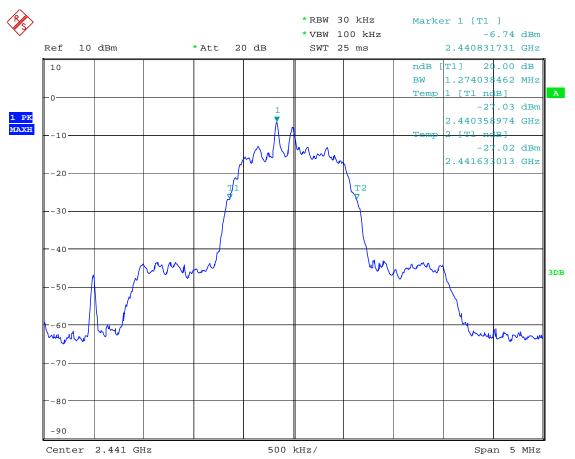


Date: 24.DEC.2019 17:39:55

Report No.: FCC1912128 Page 34 of 80

Date: 2019-12-24



3. High Channel

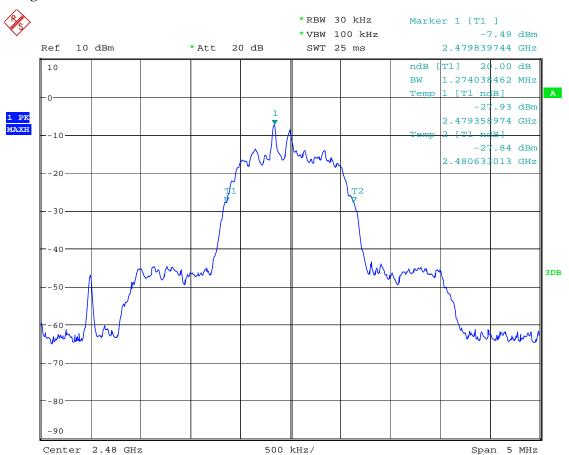

Date: 24.DEC.2019 17:36:28

Report No.: FCC1912128

Date: 2019-12-24



Page 35 of 80

8. Maximum Output Power

8.1 Regulation

According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5MHz band:0.125 watts. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

- 1. Check the calibration of the measuring instrument (spectrum analyzer) using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel; RBW > the 20 dB bandwidth of the emission being measured; VBW = RBW=3MHz; Sweep = 60s; Detector function = PK; Trace = max hold
- 3. Measure the highest amplitude appearing on spectral display and record the level to calculate results.
- 4. Repeat above procedures until all frequencies measured were complete.

Report No.: FCC1912128 Page 36 of 80

Date: 2019-12-24



8.4Test Results

Type of Modulation: GFSK

EUT	В	Bluetooth Speaker			AE0127
Mode	K	Keep Transmitting			120V~
Temperature	е	24 deg. C,			56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm)		Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-4.05		30	Pass
Middle	2441	2441 -4.40		30	Pass
High	2480	-5.12	-5.12		Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Type of Modulation: Л/4DQPSK

EUT		Blı	uetooth Speaker	l	Model	AE0127
Mode		Keep Transmitting			Voltage	120V~
Temperature		24 deg. C,			idity	56% RH
Channel	Channel Frequency		Max. Power Output (dBm)		Peak Power	Pass/ Fail
Chamier		(MHz)	Peak		Limit (dBm)	
Low		2402	-3.55		30	Pass
Middle	2441 -3.95		-3.95		30	Pass
High 2480		2480	-4.55		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES, reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2019-12-24



Page 37 of 80

Type of Modulation: 8DPSK

EUT	Blu	Bluetooth Speaker		Model	AE0127
Mode	Ke	ep Transmitting	Input Voltage		120V~
Temperature	e	24 deg. C, Hu		umidity	56% RH
Channel	Channel Frequency (MHz)	Max. Power Output (dBm) Peak		Peak Power Limit (dBm)	Pass/ Fail
Low	2402	-3.31		30	Pass
Middle	2441	-3.57		30	Pass
High	2480	-4.32		30	Pass

Note: 1. the result basic equation calculation as follow:

Max. Power Output = Power Reading + Cable loss + Attenuator

- 2. The worse case was recorded
- 3. The Peak power was measured

Date: 2019-12-24



Page 38 of 80

9. Carrier Frequency Separation

9.1 Regulation

According to §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

9.2 Limits of Carrier Frequency Separation

The Maximum Power Spectral Density Measurement is 25kHz or two-thirds of the 20dB bandwidth of the hopping Channel which is great.

9.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = wide enough to capture the peaks of two adjacent channels: Resolution (or IF) Bandwidth (RBW) \geq 1% of the span; Video (or Average) Bandwidth (VBW) \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Measure the separation between the peaks of the adjacent channels using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.

Page 39 of 80 Report No.: FCC1912128

Date: 2019-12-24




9.4Test Result

Type of Modulation: GFSK

EUT	Bluetooth Speaker		Model		AE0127
Mode	Hopping On In		Input Voltage		DC3.7V
Temperature	24 deg. C,	, Humidity			56% RH
Carrier Frequency Separation		Limit			Pass/ Fail
1.002MHz		≥ 25 kHz or 2/3 of the 20 dB bandwidth		Pass	

Test Plots

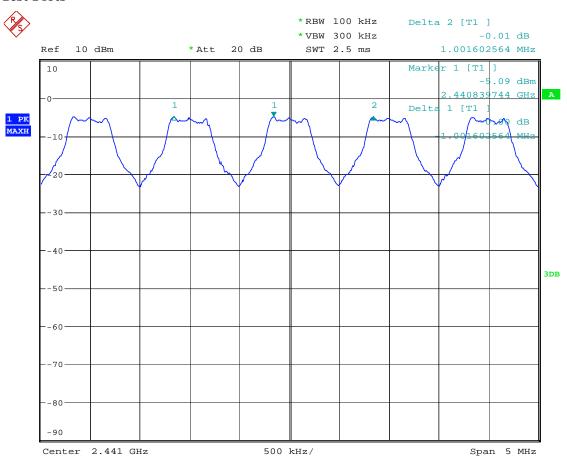

Date: 23.DEC.2019 15:14:14

Report No.: FCC1912128 Page 40 of 80


Date: 2019-12-24



Type of Modulation: Л/4DQPSK

EUT	Bluetooth Speaker		Model		AE0127
Mode	Hopping On I		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation			Limit		Pass/ Fail
1.002MHz		≥ 25 kHz or 2/3 of 20 dB bandwidth		vidth	Pass

Test Plots

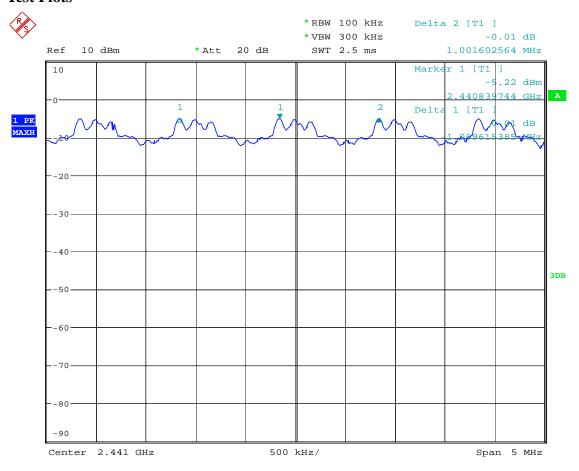

Date: 23.DEC.2019 17:44:54

Report No.: FCC1912128 Page 41 of 80


Date: 2019-12-24



Type of Modulation: 8DPSK

EUT	Bluetooth Speaker		Model		AE0127
Mode	Hopping On II		Input Voltage		DC3.7V
Temperature	24 deg. C,		Humidity	56% RH	
Carrier Frequency Separation		Limit			Pass/ Fail
1.002MHz		≥ 25 kHz or 2/3 of 20 dB bandwidth		vidth	Pass

Test Plots

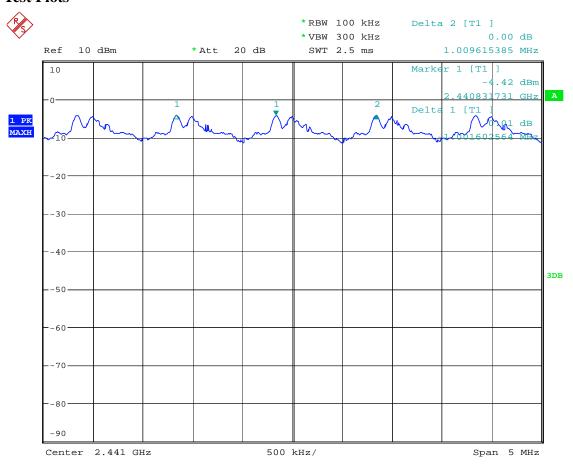

Date: 24.DEC.2019 11:22:22

Date: 2019-12-24



Page 42 of 80

10. Number of Hopping Channels

10.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used. According to §15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

10.2 Limits of Number of Hopping Channels

The frequency hopping systems in the 2400-2483.5MHz band shall use at least 15 channels.

10.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = the frequency band of operation; RBW=100 kHz, VBW=300 kHz; Sweep = auto; Detector function = peak; Trace = max hold
- 3. Record the number of hopping channels.

Page 43 of 80

Report No.: FCC1912128

Date: 2019-12-24




10.4Test Result

Type of Modulation: GFSK

EUT	Bluetooth Speaker		Model	AE0127	
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature	24 deg. C,		Humidity	56% RH	
Operating Frequency		Number of hopping channels		Limit	Pass/ Fail
2402-2480MHz		79		≥ 15	Pass

Test Plot

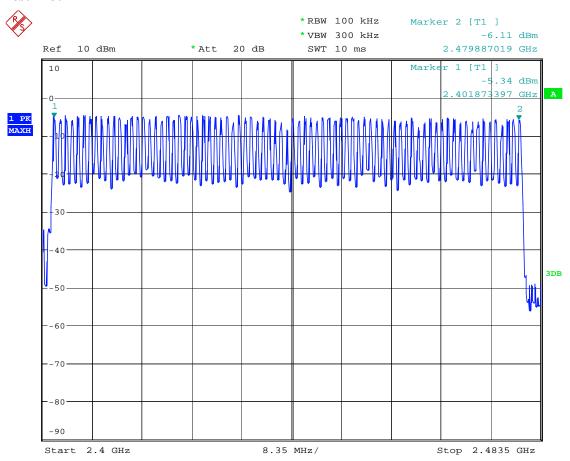

Date: 23.DEC.2019 14:53:15

Page 44 of 80

Report No.: FCC1912128


Date: 2019-12-24



Type of Modulation: $\sqrt{1/4}$ DQPSK

EUT	Bluetooth Speaker		Model		AE0127
Mode	Hopping On		Input Voltage	DC3.7V	
Temperature		24 deg. C,	Humidity		56% RH
Operating Frequency		Number of hopping channels	Limit		Pass/ Fail
2402-2480MHz		79	≥ 15		Pass

Test Plot

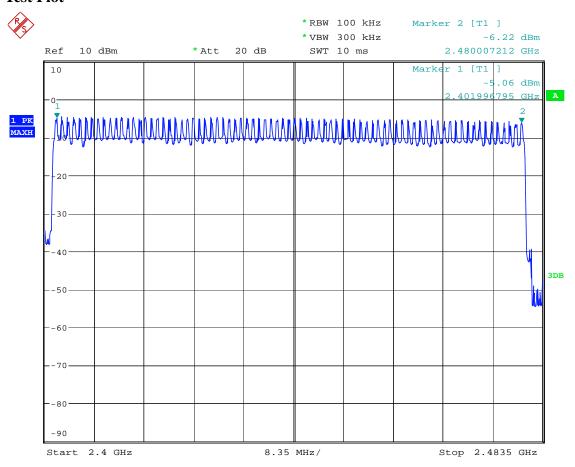

Date: 23.DEC.2019 17:17:37

Page 45 of 80 Report No.: FCC1912128


Date: 2019-12-24



Type of Modulation: 8DPSK

EUT	Bluetooth Speaker		M	odel		AE0127
Mode	Hopping On		Input	Voltage		DC3.7V
Temperature		24 deg. C,		dity	56% RH	
Operating Frequency		Number of hopping channels		Liı	mit	Pass/ Fail
2402-2480MHz		79		≥ 15		Pass

Test Plot

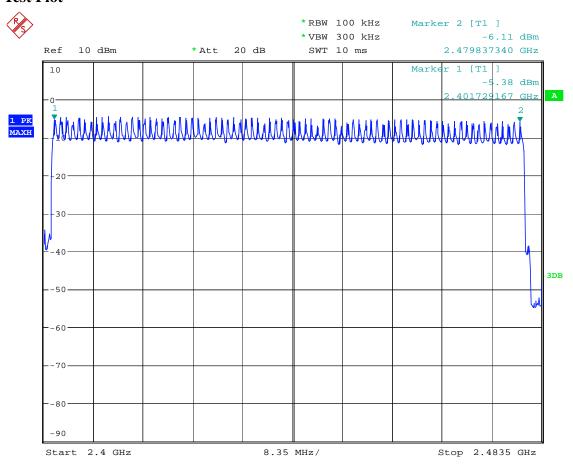

Date: 23.DEC.2019 17:41:54

Date: 2019-12-24



Page 46 of 80

11. Time of Occupancy (Dwell Time)

11.1 Regulation

According to §15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

11.2 Limits of Carrier Frequency Separation

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed

11.3 Test Procedure

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Set the spectrum analyzer as follows: Span = zero span, centered on a hopping channel; RBW = 1 MHz; VBW \geq RBW; Sweep = as necessary to capture the entire dwell time per hopping channel; Detector function = peak; Trace = max hold
- 3. Measure the dwell time using the marker-delta function.
- 4. Repeat above procedures until all frequencies measured were complete.
- 5. Repeat this test for different modes of operation (e.g., data rate, modulation format, etc.), if applicable.

Date: 2019-12-24



Page 47 of 80

11.4 Test Result

Type of Modulation: GFSK

EUT	Bluetoo	Bluetooth Speaker		AE0127			
Mode	Keep Tr	Keep Transmitting		DC3.7V			
Temperatur	re 24 c	leg. C,	Humidity		56% RH		
Channel	Reading	Hoping	g Rate	Actual	Limit		
	DH5						
Middle	2.965ms	266.66	7 hop/s	0.316s	0.4s		

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: DH5 was the worst case.

Page 48 of 80


Report No.: FCC1912128

Date: 2019-12-24



Test Plots:

DH5

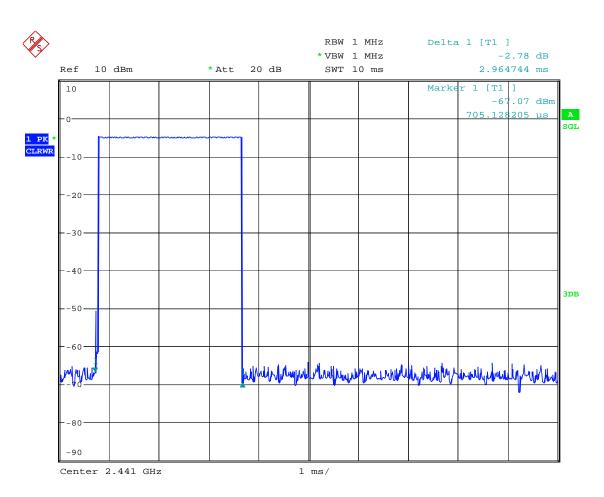

Date: 23.DEC.2019 16:24:15

Date: 2019-12-24



Page 49 of 80

Test Result

Type of Modulation: JI/4DQPSK

EUT	Bluetoo	Bluetooth Speaker		AE0127			
Mode	Keep Tr	Keep Transmitting		DC3.7V			
Temperatur	re 24 c	leg. C,	Humidity	56% RH			
Channel	Reading	Hoping	g Rate	Actual	Limit		
	DH5						
Middle	2.981ms	266.66	7 hop/s	0.318s	0.4s		

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 2DH5 was the worst case.

Page 50 of 80


Report No.: FCC1912128

Date: 2019-12-24



Test Plots:

2DH5

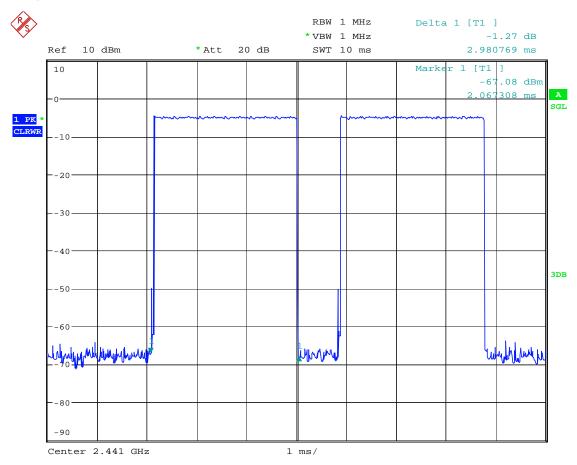

Date: 23.DEC.2019 16:39:19

Report No.: FCC1912128 Page 51 of 80

Date: 2019-12-24



Type of Modulation: 8DPSK

EUT	Bluetoo	Bluetooth Speaker		AE0127		
Mode	Keep Tr	Keep Transmitting		DC3.7V		
Temperatur	e 24 d	leg. C,	C, Humidity		56% RH	
Channel	Reading	Hoping	g Rate	Actual	Limit	
DH5						
Middle	2.981ms	266.66	7 hop/s	0.318s	0.4s	

Actual = Reading \times (Hopping rate / Number of channels) \times Test period, Test period = 0.4 [seconds / channel] \times 79 [channel] = 31.6 [seconds] NOTE: The EUT makes worst case 1600 hops per second or 1 time slot has a length of 625 μ s with 79 channels.

A DH5 Packet needs 5 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 266.667 hops per second with 79 channels.

A DH3 Packet needs 3 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 400 hops per second with 79 channels.

A DH1 Packet needs 1 time slot for transmitting and 1 time slot for receiving. Then the EUT makes worst case 800 hops per second with 79 channels.

Note: 3DH5 was the worst case.

Page 52 of 80


Report No.: FCC1912128

Date: 2019-12-24



Test Plots:

3DH5

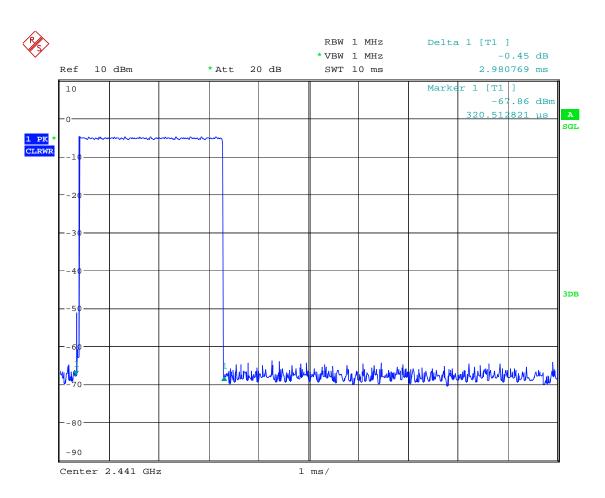

Date: 23.DEC.2019 16:39:54


Date: 2019-12-24



Page 53 of 80

12 Out of Band Measurement

12.1 Test Setup



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

12.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

12.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test. Peak values with RBW=VBW=1MHz and PK detector.

For bandage test, the spectrum set as follows: RBW=100 kHz, VBW=300 kHz. A conducted measurement used

Note: 1. For band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule. 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.

Report No.: FCC1912128 Page 54 of 80

Date: 2019-12-24




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Bluetooth Speaker	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

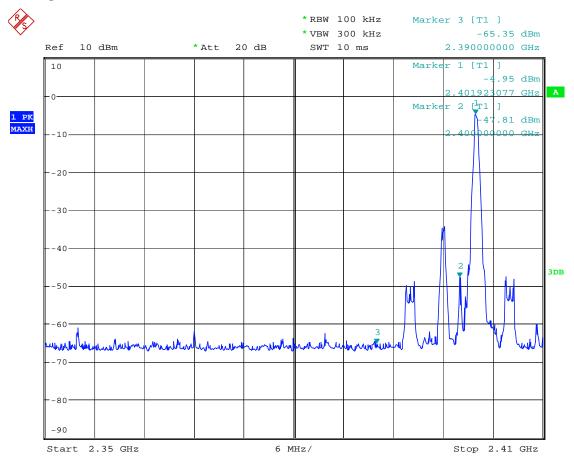

Date: 23.DEC.2019 14:05:50

Report No.: FCC1912128 Page 55 of 80

Date: 2019-12-24




Type of Modulation: GFSK

Band Edge Test Result 12.4

Product:	Bluetooth Speaker	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

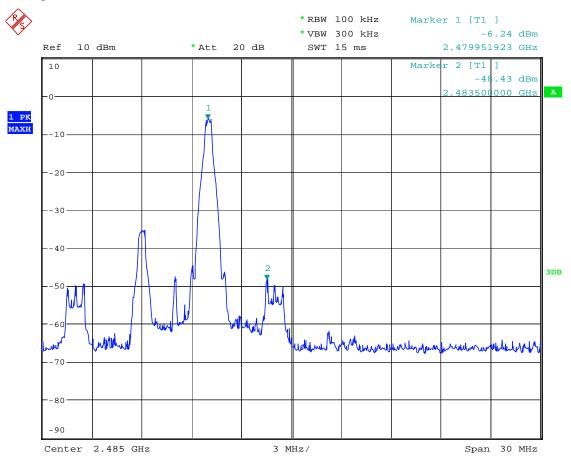

Date: 23.DEC.2019 14:26:21

Page 56 of 80 Report No.: FCC1912128

Date: 2019-12-24




Type of Modulation: GFSK

Band Edge Test Result

Product:	Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

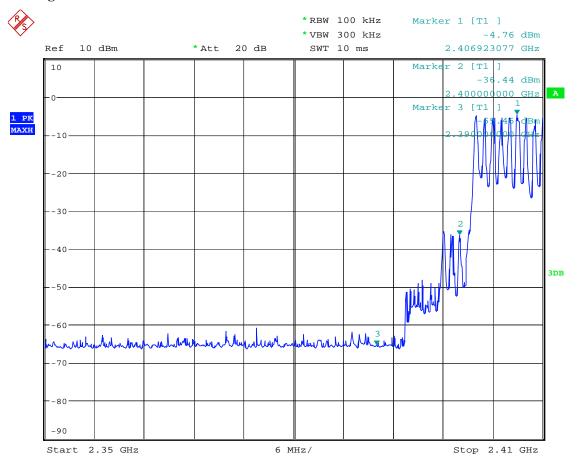

Date: 23.DEC.2019 14:43:39

Report No.: FCC1912128 Page 57 of 80

Date: 2019-12-24



Type of Modulation: GFSK

Band Edge Test Result

Product:	Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:



Date: 23.DEC.2019 14:25:05

Page 58 of 80

Report No.: FCC1912128

Date: 2019-12-24




Type of Modulation: $\sqrt{J/4DQPSK}$

12.4 Out of Band Test Result

Product:	Bluetooth Speaker	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

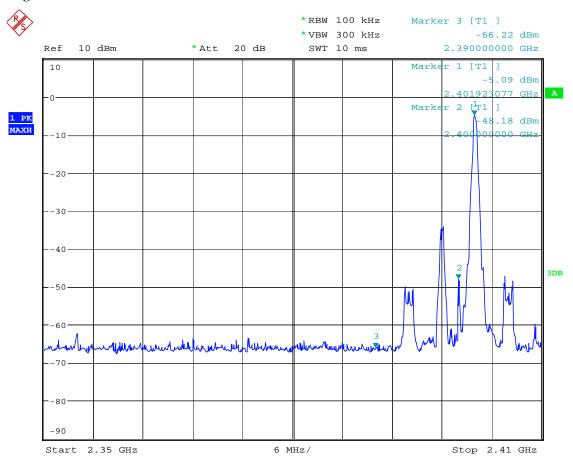

Date: 23.DEC.2019 14:12:21

Page 59 of 80

Report No.: FCC1912128

Date: 2019-12-24




Type of Modulation: $\sqrt{1/4}$ DQPSK

Band Edge Test Result 12.4

Product:	Bluetooth Speaker	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

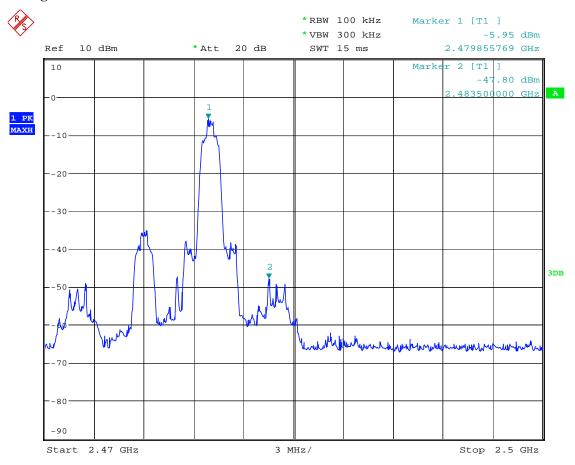

Date: 23.DEC.2019 14:27:54

Page 60 of 80 Report No.: FCC1912128

Date: 2019-12-24




Type of Modulation: Л/4DQPSK

Out of Band Test Result

Product:	Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

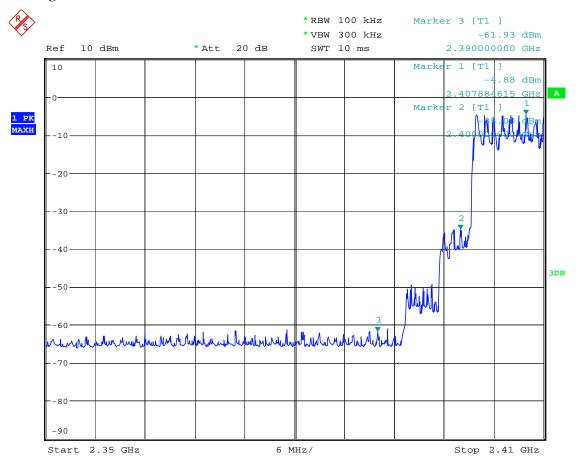

Date: 23.DEC.2019 16:58:15

Page 61 of 80

Date: 2019-12-24




Type of Modulation: $\sqrt{1/4}$ DQPSK

Out of Band Test Result

Report No.: FCC1912128

Product:	Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

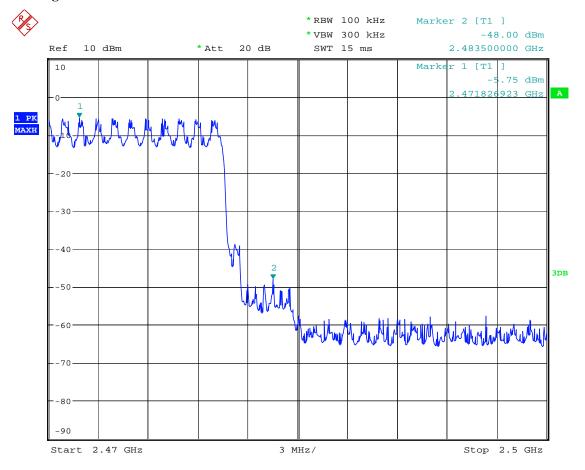

Date: 23.DEC.2019 16:51:55

Report No.: FCC1912128 Page 62 of 80

Date: 2019-12-24




Type of Modulation: 8DPSK

12.4 Band Edge Test Result

Product:	Bluetooth Speaker	Test Mode:	Low Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

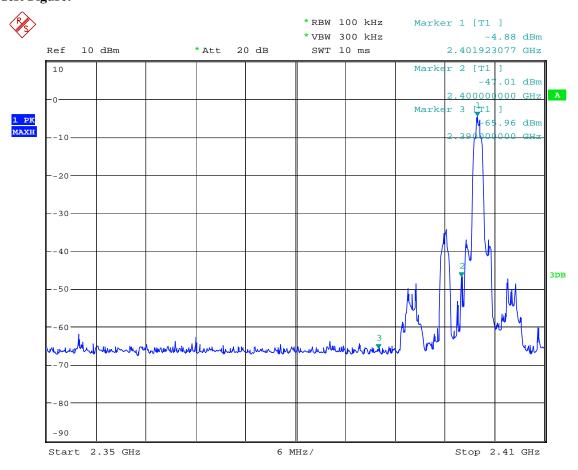

Date: 23.DEC.2019 14:08:31

Report No.: FCC1912128 Page 63 of 80

Date: 2019-12-24




Type of Modulation: 8DPSK

Band Edge Test Result 12.4

Product:	Bluetooth Speaker	Test Mode:	High Channel
Mode	Keeping Transmitting	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

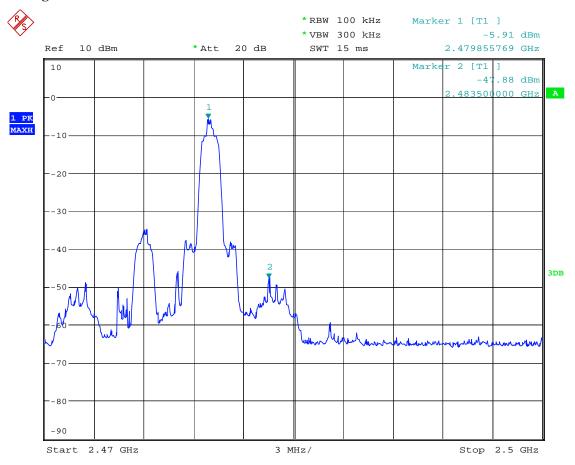

Date: 23.DEC.2019 14:36:32

Report No.: FCC1912128 Page 64 of 80

Date: 2019-12-24




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

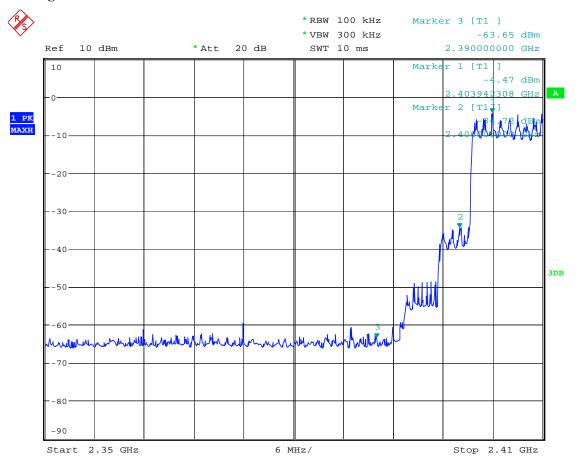

Date: 24.DEC.2019 11:14:09

Page 65 of 80 Report No.: FCC1912128

Date: 2019-12-24




Type of Modulation: 8DPSK

Band Edge Test Result

Product:	Bluetooth Speaker	Test Mode:	Hopping mode
Mode	Hopping On	Input Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

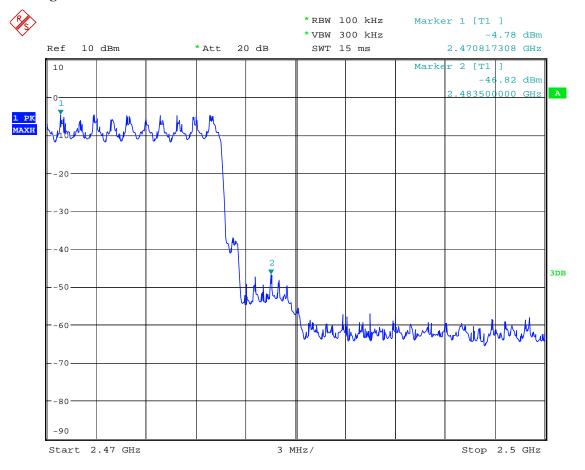

Date: 24.DEC.2019 11:09:28

Page 66 of 80 Report No.: FCC1912128

Date: 2019-12-24



12.4 Restrict Band Measurement

	E	EUT	Blı	uetooth S	peaker		Model			AE012	7
	M	lode	Ke	Keep Transmitting Input Voltage		ige	DC3.7V		V		
-	Гетр	perature		24 deg.	C,		Humidity	y		56% RI	Н
	Test	Result:		Pass		M	odulation '	Гуре		8DPSk	(Worse cas
		Class B 1GHz-18GHz - 2	2								
1.	0E+2-										
	90-									<u></u>	
									/		
	80-									$\overline{}$	
	70-									$\overline{}$	
	/0-										
	60-								\neg	\longrightarrow	
	-								/ V	$\overline{}$	
	50-									· · · · · · · · · · · · · · · · · · ·	7
	40-										<u></u>
		ومرون ويوال المتحولات	فاستناد استان اللفاق	المحارا أأوام أوارا والأورا				"			N. W. Park
	30-	teri i de destili e dilibumenti i in de	Acres to the call have seen	and a second of the second of the		A CONTRACTOR OF THE CONTRACTOR	· to specified a				2410
		,				Frequency (M	1Hz)				2410
	2500				I	Over	Detector	Table (o)	Height	ANT	Verdict
No		Frequency	Results	Factor	Limit	Over	_ 0.00.0.		- 3	,	verdict
No		Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Limit (dB)			(cm)	7	Verdict

Page 67 of 80 Report No.: FCC1912128

Date: 2019-12-24



12.4 Pactrict Rand Massurament

	EUT	Bl	uetooth Spea	aker	Mod	lel		AE	E0127	
	Mode	Ke	eep Transmit	ting	Input V	oltage		DC	C3.7V	
Teı	mperature		24 deg. C,		Humi	dity		56%	% RH	
Те	st Result:		Pass		Modulatio	on Type		8D	PSK (worse case
	art 15B Class B 1GHz-1	8GHz - 2								
90-										
80-									\	
\vdash									+	
70-										
60-									\rightarrow	
- 1								My /	-	
50-								TWO STATES		
50-			. di i	1	. 14 . 1.			₩		
50-										A.
								**		N _{AM} IAN
40-		N. May						**		*
40-					Frequency (MHz)		WWW.			2410
30- 2360	Frequency	Results	Factor (dB)	Limit	Frequency (MHz) Over Limit	Detector	Table	Height	ANT	2410 Verdict
40-		Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	T	Detector	Table (o)	Height (cm)	ANT	

Page 68 of 80 Report No.: FCC1912128

Date: 2019-12-24



12.4 Restrict Band Measurement

	E	UT	Blı	ietooth S	peaker		Model			AE0	127	
Mode Temperature		ode	Keep Transmitting 24 deg. C,				Input Voltage Humidity			DC3.7V 56% RH		
		erature										
-	Test I	Result:		Pass		N	Iodulation	Туре		8DP	SK (worse ca	
	rt 15B Cl	lass B 1GHz-18GHz - 2	2									
	90-											
(111/400) 1949	60-	- January				Married Marrie						
	30-2470					2483.5 Frequency (M	5 Frequency (MHz)					
No).	Frequency	Results	Factor	Limit	Over	Detector	Table (o)	Height	ANT	Verdict	
		(MHz)	(dBuV/m)	(dB)	(dBuV/m)	Limit (dB)			(cm)			
1**	,	2483.444	37.47	-3.57	54.0	-16.53	AV	118.00	100	Н	Pass	
ı		2483.444	56.21	-3.57	74.0	-17.79	Peak	118.00	100	Н	Pass	

Report No.: FCC1912128 Page 69 of 80

Date: 2019-12-24



12.4 Restrict Band Measurement

EUT	Γ	В	luetooth	Speaker		Model			AE012	27	
Mode	le	K	eep Tran	smitting		Input Volta	ige		DC3.7	V	
Tempera	ature		24 deg	g. C,		Humidity	y		56% R	Н	
Test Res	sult:	Pass			M	Modulation Type			8DPSK(worse cas		
C_FCC Part 15B C	Class B 1GHz-1	8GHz - 2									
70-											
60- 850- 40-	how how have				The state of the s						
40-	her had										
40-	Marin Ma				2483,5 Frequency (N	lHz)				2500	
30 - 20 - 2470	equency Hz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)		IHz) Detector	Table (o)	Height (cm)	ANT	2500 Verdict	

Note: 1. For Restricted band test, only the worst case was reported.

2. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.

Date: 2019-12-24



Page 70 of 80

13.0 Antenna Requirement

13.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

13.2 Antenna Connected constructions

PCB antenna used. The gain of the antennas is 0.58dBi.

Report No.: FCC1912128 Page 71 of 80

Date: 2019-12-24




14.0 FCC ID Label

FCC ID: 2APYY-AE0127

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

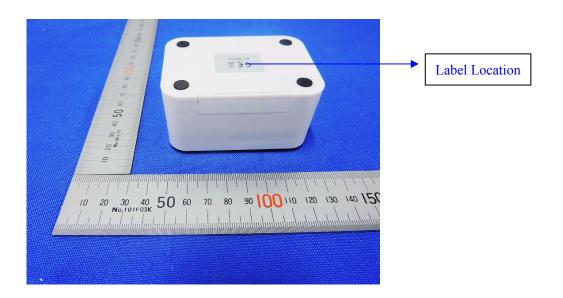


Page 72 of 80 Report No.: FCC1912128

Date: 2019-12-24



15.0 Photo of testing

Conducted Emission Test Setup:

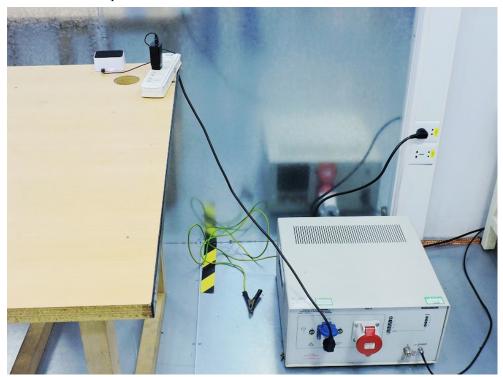


Page 73 of 80

Report No.: FCC1912128

Date: 2019-12-24



Radiated Emission Test Setup:

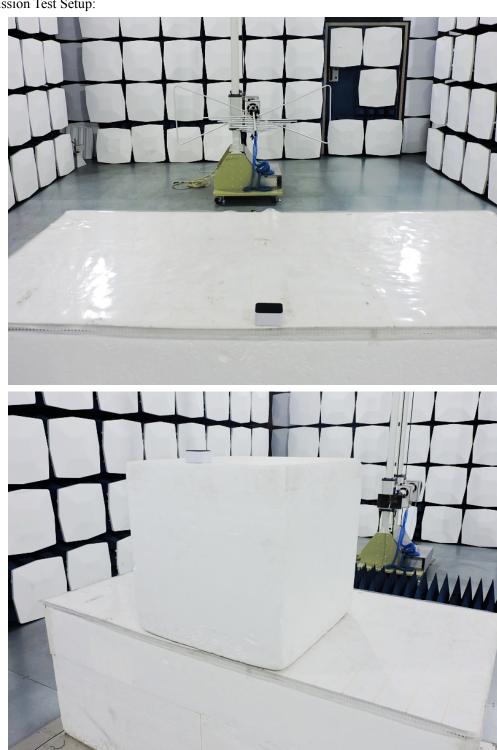


Date: 2019-12-24



Photographs – EUT

Outside view

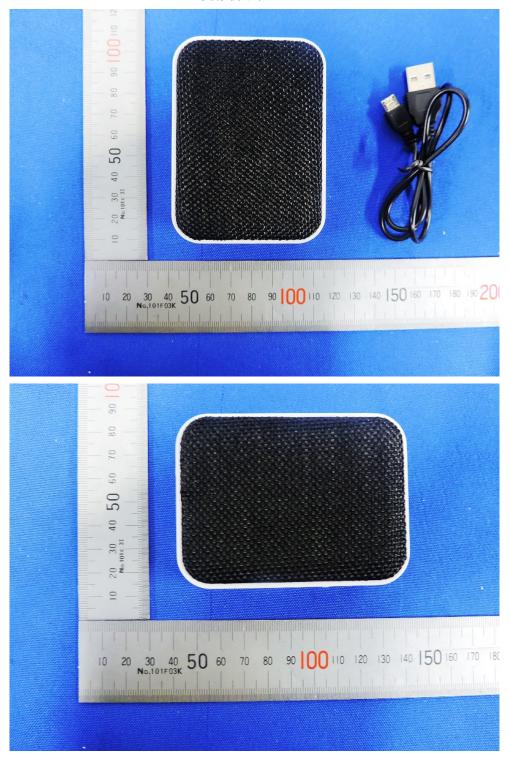

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to


Page 75 of 80

Report No.: FCC1912128

Date: 2019-12-24



Outside view

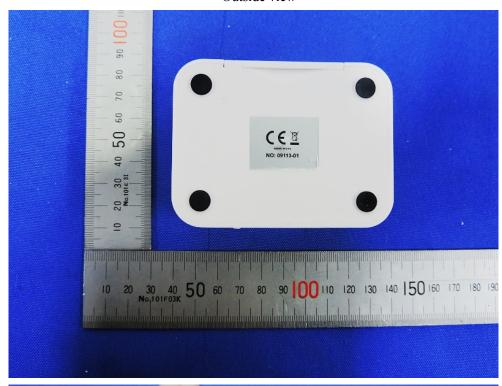




Page 76 of 80

Report No.: FCC1912128

Date: 2019-12-24



Outside view

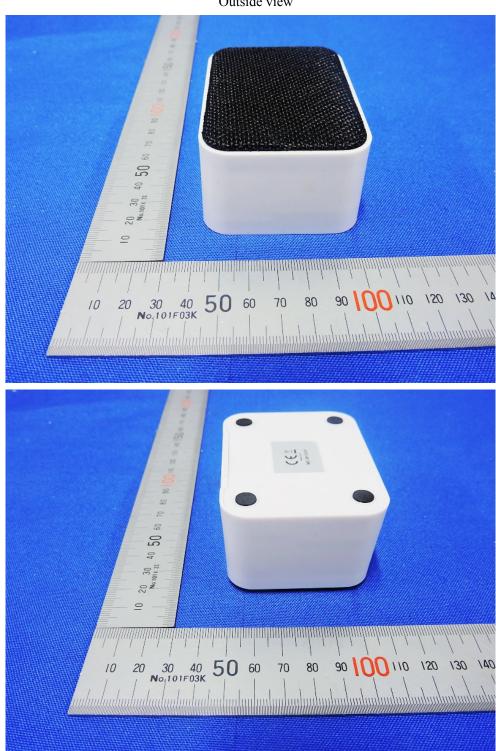

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

Page 77 of 80 Report No.: FCC1912128

Date: 2019-12-24



Outside view



Page 78 of 80

Report No.: FCC1912128

Date: 2019-12-24



Inside view





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 79 of 80


Report No.: FCC1912128

Date: 2019-12-24



Inside view

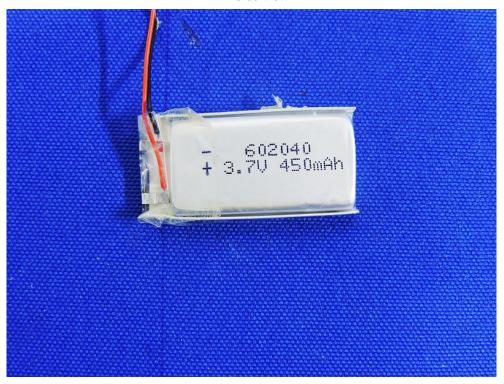

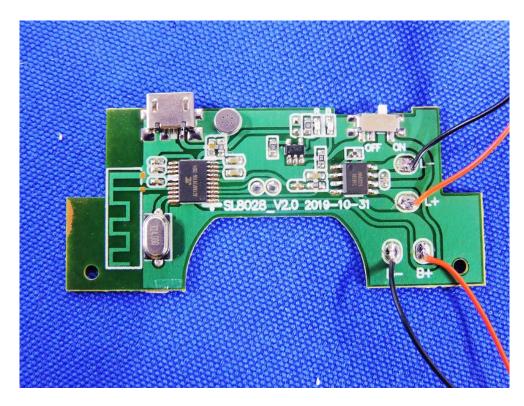

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 80 of 80


Report No.: FCC1912128

Date: 2019-12-24



Inside view

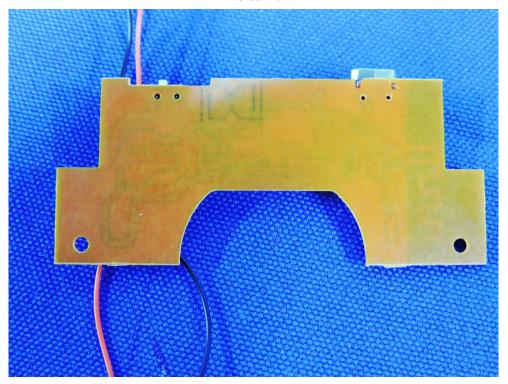

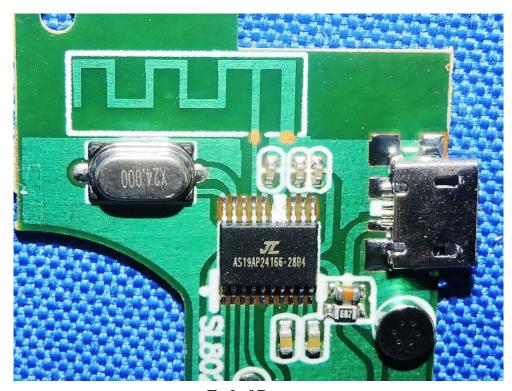

-- End of Report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.