



Report No.: TW2104165E File reference No.: 2021-04-19

Applicant: LEADER PREMIUMS LTD.

Product: Speaker

Model No.: AE0187

Brand Name: N/A

Test Standards: FCC Part 15.249

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10 &FCC Part 15 Subpart C, Paragraph 15.249 regulations for the evaluation of

electromagnetic compatibility

Approved By

Jack Chung

Jack Chung

Manager

Dated: April 19, 2021

Results appearing herein relate only to the sample tested The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2104165E Page 2 of 45

Date: 2021-04-19



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number: 5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Report No.: TW2104165E

Date: 2021-04-19



Test Report Conclusion

Content 1.0 General Details 4 4 1.1 Test Lab Details.... 1.2 Applicant Details.... 4 1.3 Description of EUT 1.4 Submitted Sample.... 4 Test Duration. 1.5 5 1.6 5 Test Uncertainty. 1.7 Test By..... 5 List of Measurement Equipment..... 2.0 6 3.0 7 Technical Details..... 3.1 Summary of Test Results.... 7 3.2 7 Test Standards.... 4.0 EUT Modification. 7 Power Line Conducted Emission Test. 5.0 Schematics of the Test..... 5.1 8 5.2 Test Method and Test Procedure. Configuration of the EUT..... 5.3 8 5.4 EUT Operating Condition. Conducted Emission Limit. 9 5.5 5.6 Test Result. 6.0 Radiated Emission test.... 12 Test Method and Test Procedure. 6.1 12 6.2 Configuration of the EUT..... 12 6.3 EUT Operation Condition.... 12 Radiated Emission Limit. 6.4 13 Test Result..... 6.5 14 7.0 Band Edge 23 7.1 Test Method and Test Procedure. 23 7.2 Radiated Test Setup. 23 7.3 Configuration of the EUT..... 23 7.4 EUT Operating Condition.... 23 7.5 Band Edge Limit..... 23 7.6 Band Edge Test Result. 24 8.0 Antenna Requirement..... 28 20dB bandwidth measurement.... 9.0 29 10.0 FCC ID Label. 38 Photo of Test Setup and EUT View. 11.0

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2104165E Page 4 of 45

Date: 2021-04-19



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 744189 For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: LEADER PREMIUMS LTD.

Address: 9/F., Hengfu Mansion, NO.858. Fuming Road, Ningbo, China

Telephone: -Fax: --

1.3 Description of EUT

Product: Speaker

Manufacturer: LEADER PREMIUMS LTD.

Address: 9/F., Hengfu Mansion, NO.858. Fuming Road, Ningbo, China

Brand Name: N/A
Model Number: AE0187
Additional Model Name N/A

Hardware Version: Bluetooth speaker-AE0187

Software Version: leader.2021.03

Serial No.: AE0187

Rating: DC5V, 1A or Built-in DC3.7V, 200mAh Li-ion battery

Modulation Type: GFSK, Pi/4D-QPSK, 8DPSK (Bluetooth)

Operation Frequency: 2402-2480MHz

Channel Separate: 1MHz Channel Number: 79

Antenna Designation PCB antenna with gain 2.0dBi Max (Get from the antenna specification

provided by the applicant)

1.4 Submitted Sample: 1 Sample

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2104165E Page 5 of 45

Date: 2021-04-19



1.5 Test Duration

2021-04-12 to 2021-04-19

1.6 Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

Conducted Emissions Uncertainty =3.6dB

Note: The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Page 6 of 45

Report No.: TW2104165E

Date: 2021-04-19



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2020-06-23	2021-06-22
LISN	R&S	EZH3-Z5	100294	2020-06-23	2021-06-22
LISN	R&S	EZH3-Z5	100253	2020-06-23	2021-06-22
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2020-06-23	2021-06-22
Loop Antenna	EMCO	6507	00078608	2018-06-25	2021-06-24
Spectrum	R&S	FSIQ26	100292	2020-06-23	2021-06-22
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2020-06-23	2021-06-22
Horn Antenna	R&S	BBHA 9120D	9120D-631	2018-07-09	2021-07-08
Power meter	Anritsu	ML2487A	6K00003613	2020-06-23	2021-06-22
Power sensor	Anritsu	MA2491A	32263	2020-06-23	2021-06-22
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2018-07-04	2021-07-03
9*6*6 Anechoic			N/A	2020-07-06	2021-07-05
EMI Test Receiver	RS	ESVB	826156/011	2020-06-23	2021-06-22
EMI Test Receiver	RS	ESH3	860904/006	2020-06-23	2021-06-22
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2020-06-23	2021-06-22
Spectrum	HP/Agilent	E4407B	MY50441392	2020-06-23	2021-06-22
Spectrum	RS	FSP	1164.4391.38	2021-01-16	2022-01-15
RF Cable	Zhengdi	ZT26-NJ-NJ-8 M/FA		2020-06-23	2021-06-22
RF Cable	Zhengdi	7m		2020-06-23	2021-06-22
RF Switch	EM	EMSW18	060391	2020-06-23	2021-06-22
Pre-Amplifier	Schwarebeck	BBV9743	#218	2020-06-23	2021-06-22
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2020-06-23	2021-06-22
LISN	SCHAFFNER	NNB42	00012	2020-01-07	2021-01-06

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2104165E Page 7 of 45

Date: 2021-04-19



3.0 Technical Details

3.1 Summary of test results

The EUT has been tested according to the following specifications:

Standard	Test Type	Result	Notes
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(a) & 15.249(b) Limit	Field Strength of Fundamental	PASS	Complies
FCC Part 15, Paragraph 15.209	Radiated Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.249(d) Limit	Band Edge Test	PASS	Complies

3.2 Test Standards

FCC Part 15 Subpart C, Paragraph 15.249, ANSI C63.4:2014 and ANSI C63.10:2013

4.0 EUT Modification

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES


Report No.: TW2104165E

Date: 2021-04-19



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10 –2013.

Block diagram of Test setup

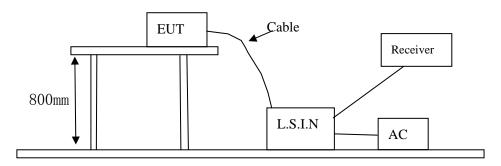

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
Speaker	LEADER PREMIUMS LTD.	AE0187	2APYY-AE0187

Report No.: TW2104165E Page 9 of 45

Date: 2021-04-19



B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
Power Supply	KEYU	KA23-0502000DEU	Input: 100-240V~, 50/60Hz, 0.35A;
			Output: DC5V, 2A

5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (dB μ V)			
(MHz)	Quasi-peak Level	Average Lev 1		
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*		
$0.50 \sim 5.00$	56.0	46.0		
5.00 ~ 30.00	60.0	50.0		

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The tighter limit shall apply at the transition frequencies

5.6 Test Results:

Pass

The report refers only to the sample tested and does not apply to the bulk.

Date: 2021-04-19



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa


EUT set Condition: Charging and Communication by BT

Model: AE0187

Equipment Level: Class B

Results: PASS

Please refer to following diagram for individual

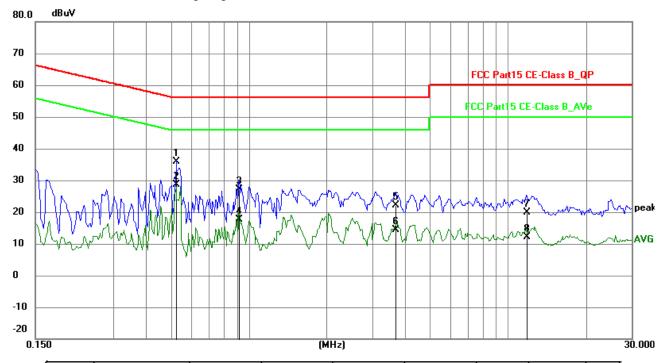

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.5243	26.11	9.77	35.88	56.00	-20.12	QP	Р
2	0.5243	18.85	9.77	28.62	46.00	-17.38	AVG	Р
3	0.9183	17.23	9.79	27.02	56.00	-28.98	QP	Р
4	0.9183	7.75	9.79	17.54	46.00	-28.46	AVG	Р
5	3.6903	12.18	9.87	22.05	56.00	-33.95	QP	Р
6	3.6903	4.42	9.87	14.29	46.00	-31.71	AVG	Р
7	11.7594	9.59	10.24	19.83	60.00	-40.17	QP	Р
8	11.7594	2.01	10.24	12.25	50.00	-37.75	AVG	Р

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2104165E

Date: 2021-04-19



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment

Temperature: 25°C Humidity: 65%RH Atmospheric Pressure: 101 kPa


EUT set Condition: Charging and Communication by BT

Model: AE0187

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

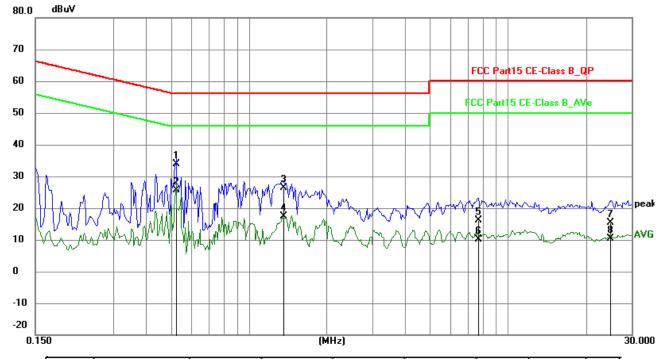

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.5243	24.21	9.77	33.98	56.00	-22.02	QP	Р
2	0.5243	15.95	9.77	25.72	46.00	-20.28	AVG	Р
3	1.3550	16.67	9.79	26.46	56.00	-29.54	QP	Р
4	1.3550	7.48	9.79	17.27	46.00	-28.73	AVG	Р
5	7.6839	6.20	10.04	16.24	60.00	-43.76	QP	Р
6	7.6839	0.17	10.04	10.21	50.00	-39.79	AVG	Р
7	24.8712	4.43	10.98	15.41	60.00	-44.59	QP	Р
8	24.8712	-0.59	10.98	10.39	50.00	-39.61	AVG	Р

Report No.: TW2104165E Page 12 of 45

Date: 2021-04-19




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz. All readings are above 1 GHz, peak values with a resolution bandwidth of 1 MHz (Note: for Fundamental frequency radiated emission measurement, RBW=3MHz, VBW=10MHz). Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

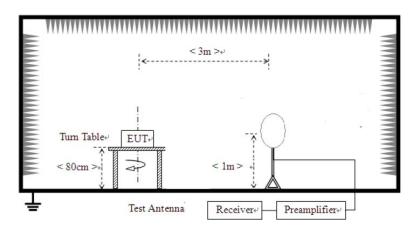


Page 13 of 45

Report No.: TW2104165E


Date: 2021-04-19



For radiated emissions from 30MHz to1GHz

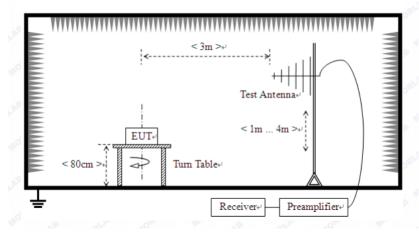

For radiated emissions above 1GHz

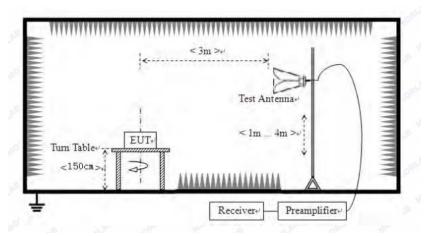

- 6.2 Configuration of The EUT

 Same as section 5.3 of this report
- 6.3 EUT Operating Condition

 Same as section 5.4 of this report.

Report No.: TW2104165E Page 14 of 45

Date: 2021-04-19



6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

A FCC Part 15 Subpart C Paragraph 15.249(a) Limit

Fundamental Frequency	Field Strength of Fundamental (3m)			Field S	trength of Harmo	nics (3m)
(MHz)	mV/m	dBuV/m		uV/m	dBu	V/m
2400-2483.5	50	94 (Average)	114 (Peak)	500	54 (Average)	74 (Peak)

Note:

- 1. RF Field Strength (dBuV) = 20 log RF Voltage (uV)
- 2.Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- 3. The emission limit in this paragraph is based on measurement instrumentation employing an average detector.

B. Frequencies in restricted band are complied to limit on Paragraph 15.209.

Frequency Range (MHz)	Distance (m)	Field strength (dB µ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage $(dBuV) = 20 \log RF \text{ Voltage } (uV)$
- 2. In the Above Table, the tighter limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. All scanning using PK detector. And the final emission level was get using QP detector for frequency range from 30-1000MHz.As to 1G-25G, the final emission level got using PK. For fundamental measurement, PK detector used.
- 6. Battery full charged during tests.
- 7. The three modulation modes of GFSK, Pi/4D-QPSK, and 8DPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Report No.: TW2104165E Page 15 of 45

Date: 2021-04-19




6.5 Test result

A Fundamental & Harmonics Radiated Emission Data

Please refer to the following test plots for details: Low Channel-2402MHz

Horizontal

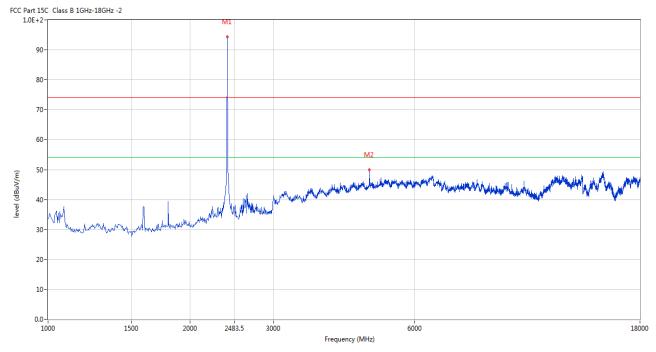


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402.500	94.38	-3.57	114.0	-19.62	Peak	146.00	100	Horizontal	Pass
1*	2402.500	85.96	-3.57	94.0	-8.04	AV	146.00	100	Horizontal	Pass
2	4803.750	49.82	3.13	74.0	-24.18	Peak	328.00	100	Horizontal	Pass

Report No.: TW2104165E Page 16 of 45

Date: 2021-04-19



Vertical

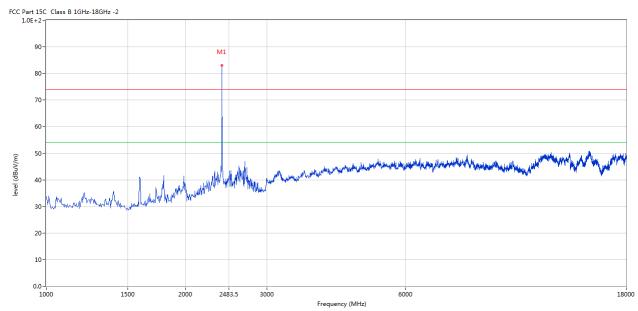

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2402.500	83.11	-3.57	114.0	-30.89	Peak	54.00	100	Vertical	Pass


Report No.: TW2104165E Page 17 of 45

Date: 2021-04-19



Please refer to the following test plots for details: Middle Channel-2441MHz

Horizontal

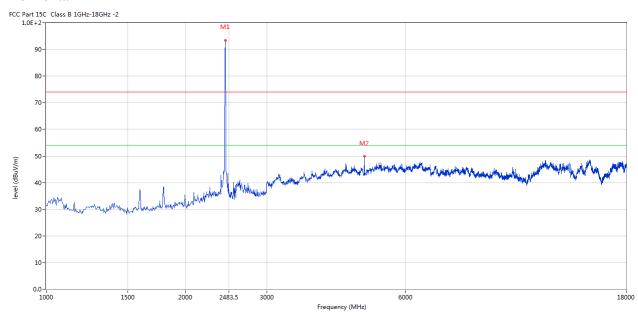


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2440.750	93.41	-3.57	114.0	-20.59	Peak	133.00	100	Horizontal	Pass
1*	2440.750	84.63	-3.57	94.0	-9.37	AV	133.00	100	Horizontal	Pass
2	4880.250	49.95	3.20	74.0	-24.05	Peak	127.00	100	Horizontal	Pass

Report No.: TW2104165E Page 18 of 45

Date: 2021-04-19



Vertical

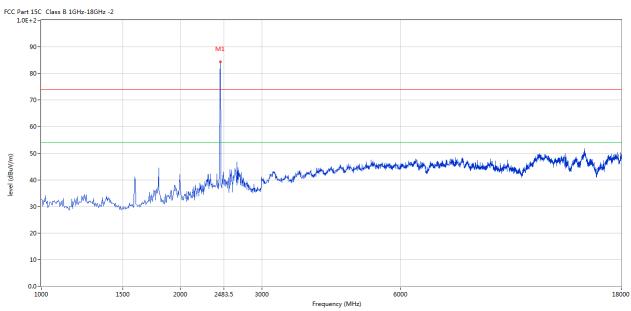

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2440.750	84.34	-3.57	114.0	-29.66	Peak	204.00	100	Vertical	Pass


Report No.: TW2104165E Page 19 of 45

Date: 2021-04-19



Please refer to the following test plots for details: High Channel-2480MHz

Horizontal

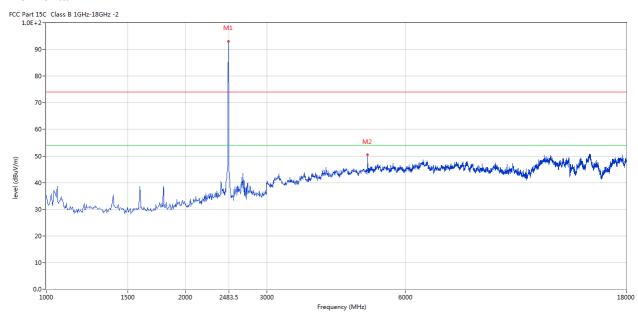


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2479.750	93.07	-3.57	114.0	-20.93	Peak	135.00	100	Horizontal	Pass
1*	2479.750	84.39	-3.57	94.0	-9.61	AV	135.00	100	Horizontal	Pass
2	4961.000	50.40	3.36	74.0	-23.60	Peak	126.00	100	Horizontal	Pass

Report No.: TW2104165E Page 20 of 45

Date: 2021-04-19



Vertical

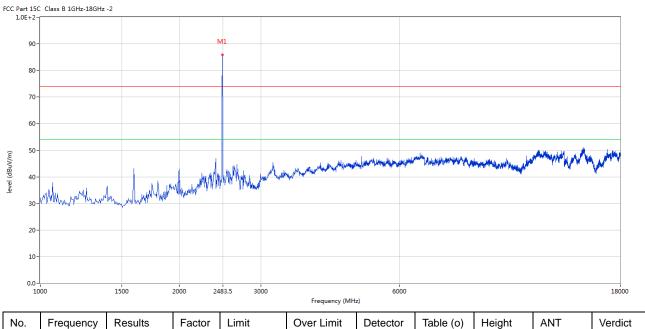

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	2479.750	85.95	-3.57	114.0	-28.05	Peak	88.00	100	Vertical	Pass

Note: (2) Emission Level = Reading Level + Antenna Factor + Cable Loss-Amplifier

- (3) Margin=Emission-Limits
- (4) According to section 15.35(b), the peak limit is 20dB higher than the average limit
- (5) For test purpose, keep EUT continuous transmitting
- (5) For emission above 18GHz and Below 30MHz, It is only the floor noise. No necessary to take down.
- (6) the measured PK value less than the AV limit.

Report No.: TW2104165E Page 21 of 45

Date: 2021-04-19




B. General Radiated Emission Data Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

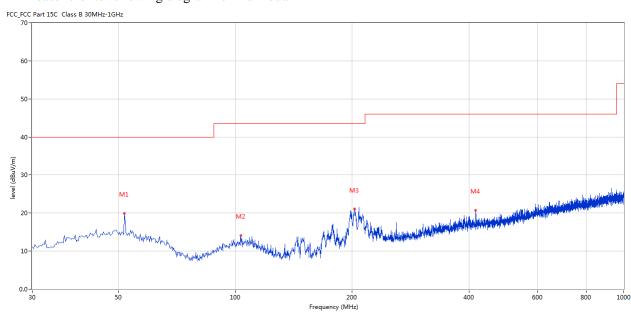

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	51.820	19.88	-11.42	40.0	-20.12	Peak	157.00	100	Horizontal	Pass
2	103.217	14.07	-13.37	43.5	-29.43	Peak	35.00	100	Horizontal	Pass
3	202.859	21.03	-13.42	43.5	-22.47	Peak	3.00	100	Horizontal	Pass
4	415.479	20.74	-8.29	46.0	-25.26	Peak	199.00	100	Horizontal	Pass

Report No.: TW2104165E Page 22 of 45

Date: 2021-04-19




Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: Keep Tx transmitting

Results: Pass

Please refer to following diagram for individual

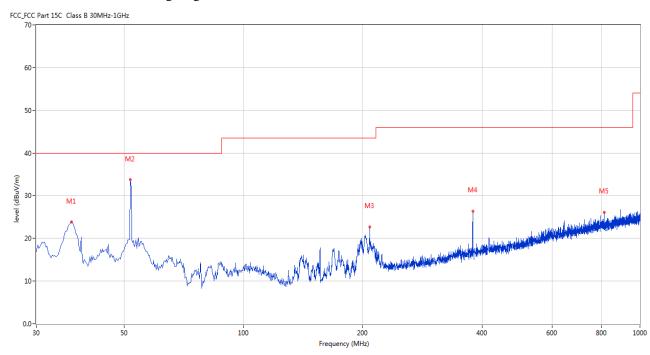

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	36.788	23.80	-13.31	40.0	-16.20	Peak	265.00	100	Vertical	Pass
2	51.820	33.69	-11.42	40.0	-6.31	Peak	115.00	100	Vertical	Pass
3	207.951	22.73	-13.69	43.5	-20.77	Peak	33.00	100	Vertical	Pass
4	378.628	26.39	-9.29	46.0	-19.61	Peak	355.00	200	Vertical	Pass
5	813.079	26.05	-2.95	46.0	-19.95	Peak	293.00	100	Vertical	Pass

Date: 2021-04-19




7. Band Edge

7.1 Test Method and test Procedure:

- (1) The EUT was tested according to ANSI C63.10–2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) Set Spectrum as RBW=1MHz, VBW=3MHz and Peak detector used for PK value. RBW=1MHz, VBW=10Hz and Peak detector used for AV value.
- (3) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (4) The antenna polarization: Vertical polarization and Horizontal polarization.

7. 2 Radiated Test Setup

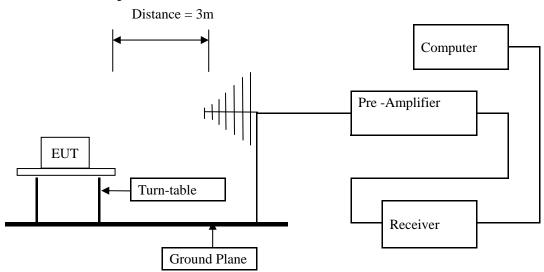

For the actual test configuration, please refer to the related items – Photos of Testing

7.3 Configuration of The EUT

Same as section 5.3 of this report

7.4 EUT Operating Condition

Same as section 5.4 of this report.

7.5 Band Edge Limit

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No.: TW2104165E Page 24 of 45

Date: 2021-04-19



7.6 Test Result

Product:	Speaker	Polarity	Horizontal
Mode	Keeping Transmitting	Test Voltage	DC3.7V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass		

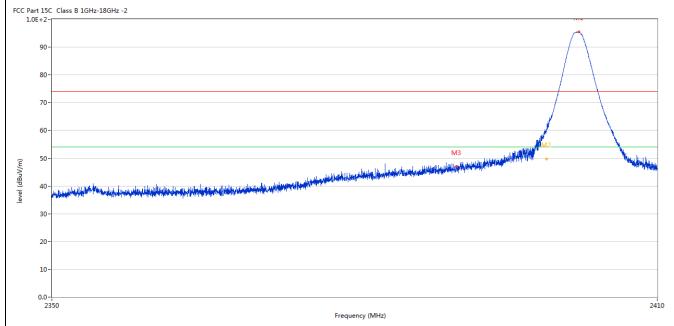

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	2399.935	58.37	-3.57	74.0	-15.63	Peak	134.00	100	Horizontal	Pass
2**	2399.935	49.65	-3.57	54.0	-4.35	AV	134.00	100	Horizontal	Pass
3	2389.960	47.05	-3.53	74.0	-26.95	Peak	328.00	100	Horizontal	Pass

Report No.: TW2104165E Page 25 of 45

Date: 2021-04-19

2389.945

47.63

-3.53

74.0



Pre	oduct:		S	Speaker		Detect	tor	,	Vertical	
N	Mode		Keeping	g Transmitti	ng	Test Vol	tage]	DC3.7V	
Tem	perature		24	4 deg. C,		Humid	ity	5	56% RH	
Test	t Result:			Pass						
Part 15C 1.0E+2-	Class B 1GHz-18GHz	-2								
									M1	
90-									\wedge	
80-									$/ \setminus$	
70-										
								/		
								- 1	1	
60-										
50-								1 L Ukadina sa 1 -		
	والمرادية والمرادية المرادية المرادية	والمتعارض	المرابع المالية في بأريق ورا		t king dinang papal di balang sa saka		MANA	A CONTRACTOR OF THE PARTY OF TH		hadadiyada
			Hadding to Administration of the second		h de la			-		******draddgate
	hajpinduakon orisidad	of the description when the shift description to	Hadding to Andrew Spirity of an		h de la	istant proportion of the		Market Market State Control of the C		**************************************
50 - 40 -	tal all address to the	of the state of th	Kapadi, Adda Adda Adda Adda Adda Adda Adda Add		hall some over the sound	in the latest desired to the latest desired				^A mudinaddigaet fu
50- 40- 30- 20-	designatural designatura designatura designatura designatura designatura designatura designatura designatura d	of the distribution was brilly distribu	Handrah di			ishara kaliba dharibadha				^{Ay} madanddigaetha
50 - 40 -		of the Land of the Second Seco	Papatol distribution		h diperior productive panel			2		thadadiga dip
50- 40- 30- 20-	50	original de la constante de la	Handard Address Street		h de stande en productiva de la consta	inter to be the second of the				
50 - 40 - 30 - 20 - 10 -	50	eriki darih pi danin sadanif danih	Parkatel Address		Frequency (MHz			•		
50- 40- 30- 20- 10- 0.0- 235	50 Frequency	Results	Factor	Limit	ecities annita e rua del ak ann		Table (o)	Height	ANT	2410
50- 40- 30- 20- 10- 0.0- 235		Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Frequency (MHz)	Table (o)	Height (cm)		2410
50 - 40 - 30 - 20 - 10 -	Frequency				Frequency (MHz)	Table (o)			2410

-26.37

Peak

30.00

100

Vertical

Pass

Report No.: TW2104165E Page 26 of 45

Date: 2021-04-19

2**

2483.448

51.09

-3.57

54.0



]	Product:		S	Speaker		Polarit	ty		Horizontal	
	Mode		Keeping	g Transmitti	ng	Test Volt	tage		DC3.7V	
Te	emperature		24	4 deg. C,		Humid	ity		56% RH	
Te	est Result:			Pass						
CC Part 1	15C Class B 1GHz-18GHz	2								
8	30 -									
6	50 -		Murach							
	50	ALIA MANAGANA	Jugar Paris Carlos Carl		M2	di katal pirangun sa alabish	Administration of Appropriate Sept	rianiareasidophanggana	الإنجار المعرف فلا المعرف المعرف المعرف المعرف المعرف المعرف المعرفة المعرفة المعرفة المعرفة المعرفة المعرفة ا	and the second
(m/vidab) level	50-	dalik da da da ka	physical and the second		M2	di Aprilia prigore por projekty do	Administratives of the continues and	rine de retuis distingues	الإنجار المكر مأط المخر مأم المحرور والإنجاز المراجع المراجع والمراجع المراجع المراجع المراجع المراجع المراجع ا	handa da ana ana ana ana ana ana ana ana
(W/Angp) 4	50- 10-	ikilifi di di diperintakan			M3	dikasi sipiensiyan dendekiyda	Hakarina de esta frigues de la Bak	riaritratus philosoppia	rijail, kito, bili dab da da ana ang tipa jib	ingelijk opter sangage
(W/nngp) Javal 3	50- 10-	dalik i dalik d			M2	diteriariem publiche	thanisariet filosophistol	ole de neue displançamen	YENANALAMBANANANANANANANANANANANANANANANANANANA	inalifate-surple
(w/ngp) laval 3	50	da like kalanda			M2	de la primer presidente de la primer de la pr	Moderne de de de la propieta de la p	riardinabangana	rijod, kika i-likida i-lak isana unga fangi i-	nadobapa sagan
(W/nngp) Javal 3 2 2 1	50	da la			2483.5 Frequency (MHz		Marierius (d. 1) ilyan disebb	ming-through glassy and	rijeni, kita, a distaba dista jana garipa (ala pi d	2500
(w/Ango) 4 3 2 1	50 - 10 - 10 - 10 - 10 - 10 - 10 - 10 -	Results	Factor	Limit	2483.5		Table (o)	Height	ANT	2500
(m/nngp) awa 3 2 2 1	50		Factor (dB)	Limit (dBuV/m)	2483.5 Frequency (MHz)				

-2.91

ΑV

151.00

100

Pass

Horizontal

Report No.: TW2104165E Page 27 of 45

Date: 2021-04-19



F	Product:		S	Speaker		Detecto	or		Vertical	
	Mode		Keeping	g Transmitti	ng	Test Volt	age]	DC3.7V	
Tei	mperature		24	l deg. C,		Humidi	ity	56% RH		
Те	est Result:			Pass						
C Part 1:	.5C Class B 1GHz-18GHz 2-	-2								
90	0-									
80	0-									
70	0-									
			,	\						
60	0-		-/-							
	o-	and the state of t			No. of the last of	المراجع والمساعد المراجع المقار	alkada at Anna Ishamadi (hi	diamental and the second	al hataning a sambolika	المالية المستوادية
	o-	a de la girle de la constituir de la const			The state of the s	ndet krometerskrijder of believe	ilyanaharikan (L)	AND	Hoppisch and Andrea Hope	Haadqad Ayd A
	o-	and the state of t			The state of the s	and because the public of the later	ulyanadiyasidari (k.)	dilandra di deservizio di mandada		hipaniyad bayda
. 50		and the state of t			Maria Ma	nded by some days by substitute of the substitut	olypiaadopaidus (kylin	gildendelfterskeitelfreu byde	illyddighiaethau y digwydd y d	kitaniya biqalib
40		nder der die gestelle der der der der der der der der der de			The same of the sa	nde limme keeler plake de ligter	ilarian diplomatali	philippide de de de la companya de l	dephisologist and adapte	istendiral kiydiği
50 40 30 20					The state of the s	nded beroom beider gelichte der beider gel	ularina di padinimalia di	gilden general de la proposition de la		hisandhad faqila
30 20 10					2483.5 Frequency (MH:		iladaadi padamala	pillepid diserial recolodo	illedightershipped in desiral light	2500
30 20 10		Results	Factor	Limit		z) Detector	Table (o)	Height	ANT	2500 Verdict
50 40 30 20	0-	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Frequency (MH:	1	Table (o)		ALERO COMPANY OF THE PROPERTY	1

Note: 1. The PK emission level less than the AV limit. No necessary to record the AV emission level.

- 2. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 3. The three modulation modes of GFSK, Pi/4D-QPSK, and 8DPSK were tested. And only the worst case was recorded in the test report. GFSK was the worst case.

Report No.: TW2104165E Page 28 of 45

Date: 2021-04-19



8.0 Antenna Requirement

Applicable Standard

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

This product has a PCB antenna. The antenna gain is 2.0dBi Max. It fulfills the requirement of this section. Test Result: Pass

Report No.: TW2104165E Page 29 of 45



FSK Modulation				1	1		1				
Product:		Speaker			To	est Mode:		Keep transmitting			
Mode	Keepi	ng Transn	nitting		Test Voltage		DC3.7V				
Temperature		24 deg. C, Pass				Humidity		56% RH			
Test Result:						Detector		PK			
0dB Bandwidth		781.56kHz	Z						•		
Ref Lvl 10 dBm	ndB	1 [T1 r 20. 1.563126	.00 dB	VI	BW BW WT	30 ki 100 ki 8.5 m	Hz	F Att	20 dE		
10					<u> </u>					1	
0			3			V 1	[T1]	-1 2.40200	.08 dE 301 GH		
			\sim	$\backslash \bigwedge$		ndB BW		20 31.56312	.00 dB 625 kH		
-10					\	∇_{T1}	[T1]	-20	90 dE		
-20		Ţλ	~		\	$ackslash_{\mathrm{T2}} lackslash_{\mathrm{T2}}$	[T1]	2.40161	.18 dE	m	
1MAX								2.40239	980 GH	1	
		,					کړ .				
-40							4	\sim			
-50	V						,∧,	V	~~~	Ly	
-60											
-70											
-80											
-90									n 3 MH		

Page 30 of 45

Report No.: TW2104165E



Product:			Speaker			T	est Mode:		Keep tra	nsmitting	
Mode		Keepin	g Transmi	tting		Te	est Voltage		DC3.7V		
Temperature		2.	4 deg. C,]	Humidity		56% RH PK		
Test Result:			Pass				Detector				
OdB Bandwidth	781.56kHz										
	Marker 1 [T1 ndB]					BW	30 kF	ız Ri	F Att	20 dB	
Ref Lvl		ndB		00 dB		BW	100 kF			1-	
10 dBm		BW 781	.563126	525 kHz	Sī	ИT	8.5 ms	5 Ui	nit	dBm	1
							▼ 1	[T1]	-1	.52 dBm	Α
0					L				2.44100	301 GHz	
				\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\			ndB BW	78	20 1.56312	.00 dB 625 kHz	
1.0					V		o o o o o o o o o o o o o o o o o o o	/c	-21	625 kHz	
-10					\w	/			2.44061	824 GHz	
			Tl	J •		V	$\setminus_{\mathrm{T2}} \nabla_{\mathrm{T2}}$	[T1]	-21	.65 dBm	
-20 1MAX			\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\				V.		2.44139	980 GHz	1M2
			كرسر				7				
-30		^	/					٦			
		\sim						4			
-40		7						7			
	\sim							ς,	~~		
-50 thu		\bigvee						$\overline{}$	han		
										Why	
-60										V -	
-70											
-80											
-90											
Center 2	.441 GH	Iz		300	kHz/				Spa	n 3 MHz	

Page 31 of 45

Report No.: TW2104165E



Product:		,	Speaker			T	est Mode:		Keep tra	ansmitting	
Mode		Keepin	g Transmi	tting		Te	est Voltage		DC	23.7V	
Temperature		2	4 deg. C,			Humidity		56% RH			
Test Result:	Pass					Detector			PK		
20dB Bandwidth	787.58kHz										
Ŕ	Marker 1 [T1 ndB]				R	BW	30 kH	Iz RI	F Att	20 dB	
Ref Lvl		ndB		00 dB	V	BW	100 kH				
10 dBm		BW 787	7.575150	30 kHz	S	WT	8.5 ms	s U1	nit	dBm	1
10							v ₁	[T1]	-2	3.30 dBm	A
				1					2.47999	699 GHz	
0				^ /			ndB		20	0.00 dB	
					$\setminus \wedge$		BW ▼⊤1	78 [T1]	7.57515	030 kHz	
-10					× \	1	- 1		2.47961		
			/	\mathcal{N}		J	$\nabla_{\mathrm{T}2}$	[T1]	-22	.40 dBm	
-20			→				T2		2.48039	980 GHz	
1MAX			<i>~</i> J				~				1M2
-30			/				\mathcal{M}				
		\sim						Ly.			
-40								__	~ ^		
-50								<u>\</u>	~\		
www.	ا	•						W	hy	whom of	
-60										- W	
-70											
-80		_							_		
- 00											
-90 Center 2	49 CII-	,		300	kHz/				C n c	an 3 MHz	

Report No.: TW2104165E Page 32 of 45



Product:	Speaker					Γ	est Mode:		Keep transmitting		
Mode		Keepii	ng Transmi	tting		T	est Voltage		DC3.7V 56% RH		
Temperature		2	24 deg. C,]	Humidity				
Test Result:	Pass						Detector		PK		
OdB Bandwidth	1.214MHz										
r)	Marker 1 [T1 ndB]					RBW	30 k	Hz Rl	7 Att	20 dB	
Ref Lvl		ndB		00 dB		/BW	100 k				
10 dBm		BW	1.214428	886 MHz	5	SWT	8.5 m	s Uı	nit	dBm	1 -
							v ₁	[T1]	-1	.23 dBm	A
				_1					2.40199	699 GHz	
0				^ /			ndB		20	.00 dB	
					\ ~		$ ho$ BW $ ho_{ m T1}$	[T1]	1.21442 -21	.10 dBm	
-10			\w\			3	~~~		2.40137		
		т					\dagger \frac{1}{\dagger}	[T1]	-21	.39 dBm	
-20								4	2.40259	218 GHz	1M2
-30											
-40	\mathcal{M}	~							~ ^		
-50	V							,	A MAG	hand but	
-60											
-70											
-80											
-90 Center 2.	.402 GH	łz		300	kHz/	,			Spa	ın 3 MHz	

Report No.: TW2104165E Page 33 of 45



Product: Mode Temperature		(Speaker									
		*				Γ	est Mode:		Keep tra	nsmitting		
Temperature		Keepin	g Transmi	tting		To	est Voltage	e	DC	3.7V		
		24	4 deg. C,]	Humidity		56% RH			
Test Result:			Pass				Detector		F	PK		
20dB Bandwidth	1.214MHz											
F	Marker 1 [T1 ndB] R				RBW	30 k	Hz R	F Att	20 dB			
Ref Lvl		ndB		00 dB		VBW	100 k					
10 dBm		BW 1	.214428	886 MHz		SWT	8.5 m	ıs Uı	nit	dBm		
							\blacktriangledown_1	[T1]	-1	.63 dBm	A	
0				1					2.44099	699 GHz		
				^ /	\		ndI BW	8	20 1.21442	.00 dB		
1.0					\		o V _T :	[[T1]	-21	886 MHz		
-10			~~^	~ \		\\\^	m/>		2.44037	776 GHz		
		Tr i	$\sqrt{}$				$\triangle f^{T_{i}}$	[2 [T1]	-21	.95 dBm		
-20		Ž					,	Ň	2.44159	218 GHz	1MA	
								٦				
-30												
								\				
-40		^										
	NN	\mathcal{M}						\	\wedge			
-50	~							(VW	My ,		
www.									•	Carrier In		
-60												
-70												
-80												
-90												
Center 2.	441 GH	Iz		300	kHz,	/			Spa	n 3 MHz		
Date: 16.	APR.20	021 18	:12:18									

Page 34 of 45

Report No.: TW2104165E



Product:			Speaker		-					Keep transmitting		
Mode		Keepin	g Transmi	tting		Te	est Voltage		DC3.7V			
Temperature		2	4 deg. C,]	Humidity	56% RH				
Test Result:	·		Pass			Detector			PK			
dB Bandwidth	1.214MHz											
	Marker 1 [T1 ndB]					RBW	30 kH	z RI	7 Att	20 dB		
Ref Lvl		ndB		00 dB		/BW	100 kH					
10 dBm		BW I	1.214428	886 MHz	S	SWT	8.5 ms	Uı	nit	dBm	1	
							V 1	[T1]	-2	3.36 dBm	A	
0									2.47999	699 GHz		
				^ /			ndB BW		20 1.21442	0.00 dB 2886 MHz		
-10							∇_{T1}	[T1]	-22	3.12 dBm		
10			~~~		\ \\ \	\\\	/ h		2.47937	776 GHz		
-20		T.						[T1]	-22	.42 dBm		
1MAX							1	7	2.48059	218 GHz	1M	
-30												
-40	M	M						M				
-50	Low							,	· ·	W. Market		
-60												
-70												
-80												
-90 Center 2	.48 GHz	z		300	kHz/	,			Spa	an 3 MHz		

Page 35 of 45

Report No.: TW2104165E



8QPSK Modul	lation											
Product:		Ş	Speaker			Γ	est Mode:		Keep tra	ansmitting		
Mode		Keepin	g Transmi	tting		To	est Voltage		DC3.7V			
Temperature		2	4 deg. C,]	Humidity		56% RH			
Test Result:			Pass				Detector]	PK		
20dB Bandwidth		1.	214MHz									
R)	Marker 1 [T1 ndB]				BW	30 k	Hz R	F Att	20 dB			
Ref Lvl		ndB		00 dB		BW	100 k					
10 dBm		BW 1	1.214428	886 MHz	S	TW	8.5 m	ıs Uı	nit	dBm		
							v ₁	[T1]	-3	1.23 dBm	A	
0									2.40200	301 GHz		
				^ /			ndI	8	20	0.00 dB		
					\ _		BW ▼ _{T1}	(T1)	1.21442	2886 MHz 1.06 dBm		
-10			\sim	~ \	\	~~	m_		2.40137	7776 GHz		
		т	\checkmark				\dagger \frac{1}{\pi}	[T1]	-21			
-20		7)	<u> </u>	2.40259	9218 GHz	1MA	
								٦			IMA	
-30												
-40	\wedge	W						M	M .			
-50	\ \\\'									my		
-60												
-70												
-80												
-90 Center 2	.402 GI	Hz		300	kHz/				Spa	an 3 MHz		
Date: 16	6.APR.2	021 18	:21:47									

Page 36 of 45

Report No.: TW2104165E



Product:	Speaker		Test Mode:	DC3.7V 56% RH PK		
Mode	Keeping Transmi	tting	Test Voltage			
Temperature	24 deg. C,		Humidity			
Test Result:	Pass		Detector			
20dB Bandwidth	1.214MHz					
Ŕ	Marker 1 [T1 n	ndB] F	RBW 30 kHz	RF Att	20 dB	
Ref Lvl			7BW 100 kHz			
10 dBm	BW 1.214428	886 MHz S	SWT 8.5 ms	Unit	dBm	
10			▼ 1 [r1] -1	.52 dBm	
				2.44099	699 GHz	
0		^ /	ndB	20	.00 dB	
		/\ / \	BW VT1	1.21442	886 MHz	
-10	~~~	7 7 ~	My o'T	[T1] -21 2.44037	.41 dBm 776 GHz	
			V _V 2	[T1] -21	.80 dBm	
-20	T 1~		1/2	2.44159	218 GHz	
-30			ζ,		1M2	
-30						
-40	M					
-50 Mun						
-60						
-70						
-80						
-90	1 CUT	300 kHz/		C	an 3 MHz	

Report No.: TW2104165E Page 37 of 45



Product:			Speaker			Test Mode:			Keep transmitting		
Mode		Keepir	ng Transmi	tting		Te	est Voltage		DC3.7V		
Temperature			24 deg. C,]	Humidity	56% RH			
Test Result:			Pass			Detector			PK		
dB Bandwidth	1.214MHz										
r)	Marker 1 [T1 ndB]					.BW	30 kH	z RI	7 Att	20 dB	
Ref Lvl		ndB		00 dB	V	BW	100 kH				
10 dBm		BW	1.214428	886 MHz	S	WT	8.5 ms	Uı	nit	dBm	l
10							v ₁	[T1]	-2	.30 dBm	A
									2.48000	301 GHz	
0				^	(ndB		20	.00 dB	
				\	\		BW V _{T1}	[T1]	1.21442	886 MHz .17 dBm	
-10			^^^	77	\sim	\mathcal{L}	My 1	[11]	2.47937	776 GHz	
							A. 2. 3.	[T1]	-22	.50 dBm	
-20		7					4		2.48059	218 GHz	1M2
IMAX		7					\	٦			1111
-30											
-40	$\wedge \wedge$	W						V	<u> </u>		
-50 Mul	سما									han h	
-60											
-70											
-80											
-90											
Center 2	.48 GH:	z		300	kHz/				Spa	n 3 MHz	•

Report No.: TW2104165E Page 38 of 45

Date: 2021-04-19




10.0 FCC ID Label

FCC ID: 2APYY-AE0187

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

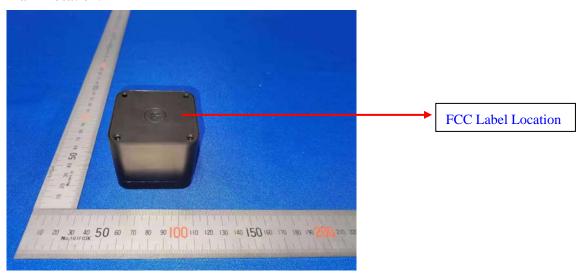


Page 39 of 45 Report No.: TW2104165E

Date: 2021-04-19



11.0 Photo of testing

11.1 Conducted test View--

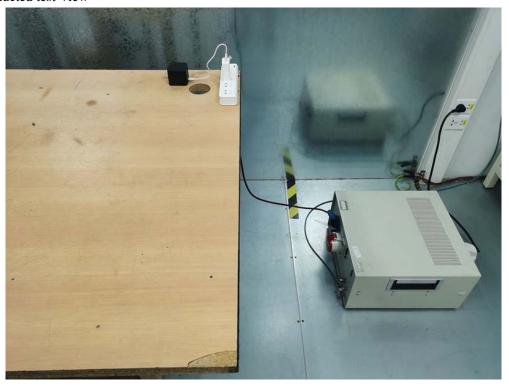


Page 40 of 45

Report No.: TW2104165E

Date: 2021-04-19



Radiated emission test view

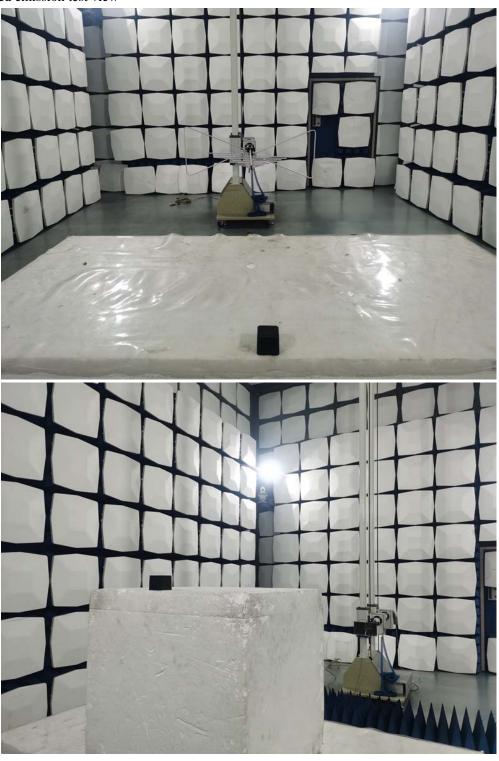

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No.: TW2104165E

Date: 2021-04-19



11.2 Photographs – EUT

Outside View

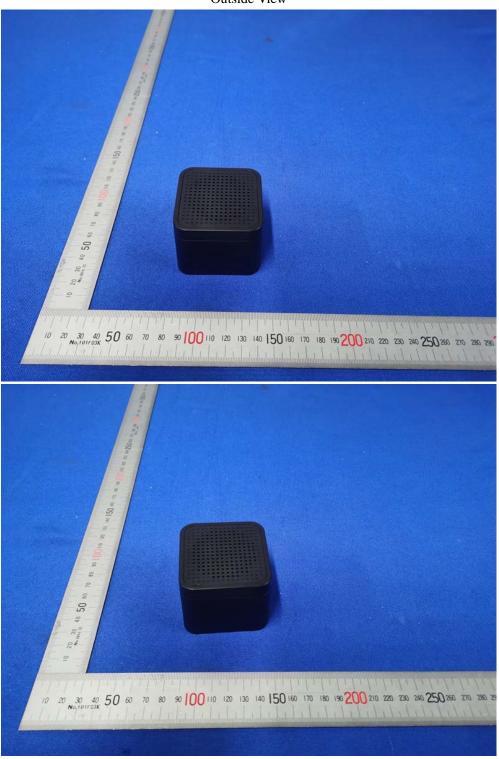

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Report No.: TW2104165E

Date: 2021-04-19



Photographs - EUT



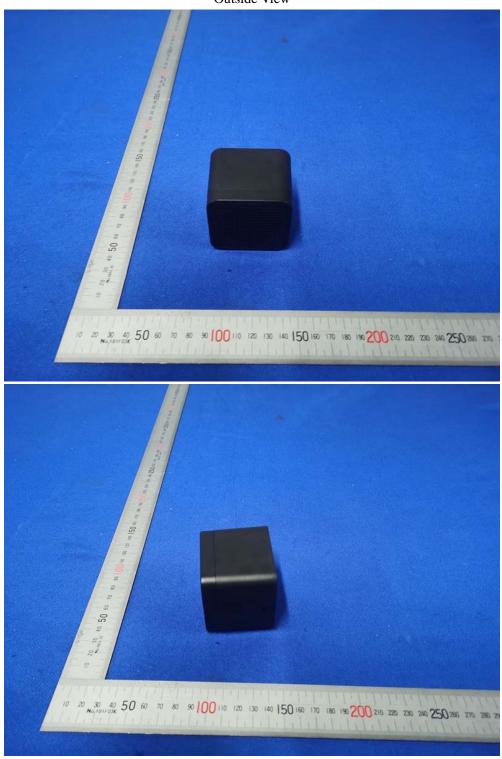

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 43 of 45

Report No.: TW2104165E

Date: 2021-04-19





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 44 of 45

Report No.: TW2104165E

Date: 2021-04-19



Inside view

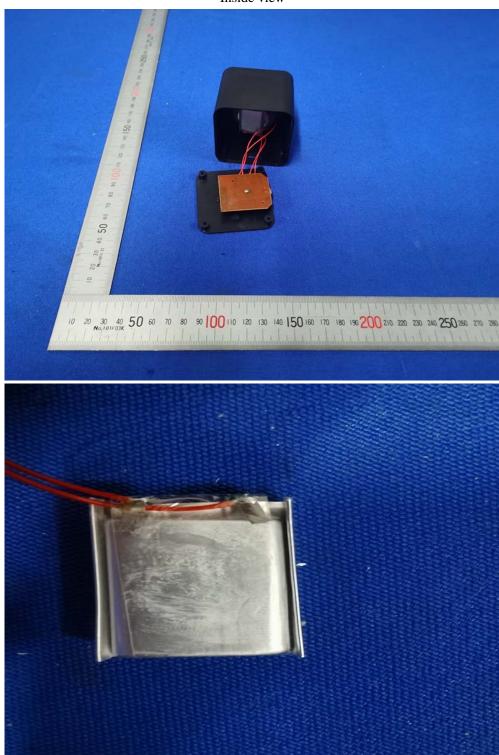

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.


Page 45 of 45

Report No.: TW2104165E

Date: 2021-04-19



Inside view

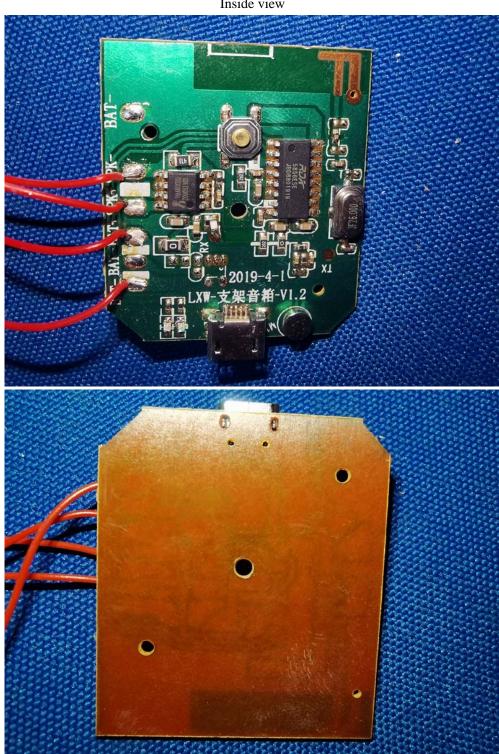

-- End of the report--

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES.

will not, without the consent of the client enter into any

discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.