



# TEST Report

**Applicant:** Shenzhen FuShiKe Electronic Co., Ltd

**Address of Applicant:** 3/F, No.8, Xihu South Street, Xintian, Guanlan Street, Longhua District, Shenzhen, China 518110

**Manufacturer :** Shenzhen FuShiKe Electronic Co., Ltd

**Address of Manufacturer :** 3/F, No.8, Xihu South Street, Xintian, Guanlan Street, Longhua District, Shenzhen, China 518110

**Equipment Under Test (EUT)**

Product Name: Bluetooth headset

Model No.: K22

Series model: N/A

Trade Mark: N/A

FCC ID: 2APZE-K22

**Applicable standards:** FCC CFR Title 47 Part 15 Subpart C Section 15.247

**Date of sample receipt:** Jun.30,2023

**Date of Test:** Jun.30,2023~Jul.08,2023

**Date of report issued:** Jul.08,2023

**Test Result :** PASS \*

\* In the configuration tested, the EUT complied with the standards specified above.



### 1. Version

Version No.	Date	Description
00	Jul.08,2023	Original

**Tested/ Prepared By** Heber He **Date:** Jul.08,2023  
**Project Engineer**

**Check By:** Bruce Zhu **Date:** Jul.08,2023  
**Reviewer**

**Approved By :** Kevin Yang **Date:** Jul.08,2023  
**Authorized Signature**





## 2. Contents

Page

<b>1. VERSION</b> .....	<b>2</b>
<b>2. CONTENTS</b> .....	<b>3</b>
<b>3. TEST SUMMARY</b> .....	<b>4</b>
<b>4. GENERAL INFORMATION</b> .....	<b>5</b>
4.1. GENERAL DESCRIPTION OF EUT .....	5
4.2. TEST MODE .....	7
4.3. DESCRIPTION OF SUPPORT UNITS .....	7
4.4. DEVIATION FROM STANDARDS .....	7
4.5. ABNORMALITIES FROM STANDARD CONDITIONS.....	7
4.6. TEST FACILITY .....	7
4.7. TEST LOCATION.....	7
4.8. ADDITIONAL INSTRUCTIONS .....	7
<b>5. TEST INSTRUMENTS LIST</b> .....	<b>8</b>
<b>6. TEST RESULTS AND MEASUREMENT DATA</b> .....	<b>9</b>
6.1. CONDUCTED EMISSIONS .....	9
6.2. CONDUCTED PEAK OUTPUT POWER .....	12
6.3. 20DB EMISSION BANDWIDTH .....	13
6.4. FREQUENCIES SEPARATION .....	17
6.5. HOPPING CHANNEL NUMBER.....	19
6.6. DWELL TIME .....	21
6.7. BAND EDGE.....	26
6.7.1. <i>Conducted Emission Method</i> .....	26
6.7.2. <i>Radiated Emission Method</i> .....	30
6.8. SPURIOUS EMISSION.....	32
6.8.1. <i>Conducted Emission Method</i> .....	32
6.8.2. <i>Radiated Emission Method</i> .....	37
6.9. ANTENNA REQUIREMENT.....	45
<b>7. TEST SETUP PHOTO</b> .....	<b>46</b>
<b>8. EUT CONSTRUCTIONAL DETAILS</b> .....	<b>46</b>



### 3. Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (a)(1)(iii)	Pass
Dwell Time	15.247 (a)(1)(iii)	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

*Remarks:*

1. *Pass: The EUT complies with the essential requirements in the standard.*
2. *Test according to ANSI C63.10:2013*

#### Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	3.45 dB	(1)
Radiated Emission	1~6GHz	3.54 dB	(1)
Radiated Emission	6~40GHz	5.38 dB	(1)
Conducted Disturbance	0.15~30MHz	2.66 dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.



## 4. General Information

### 4.1. General Description of EUT

Product Name:	Bluetooth headset
Model No.:	K22
Series model:	N/A
Test sample(s) ID:	HTT202306548-1(Engineer sample) HTT202306548-2(Normal sample)
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, $\pi/4$ -DQPSK, 8-DPSK
Antenna Type:	Chip Antenna
Antenna gain:	1.56 dBi
Power Supply:	DC 3.7V Form Battery and DC 5V From External Circuit



Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz



#### 4.2. Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
<i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i>	

#### 4.3. Description of Support Units

None.
-------

#### 4.4. Deviation from Standards

None.
-------

#### 4.5. Abnormalities from Standard Conditions

None.
-------

#### 4.6. Test Facility

<p>The test facility is recognized, certified, or accredited by the following organizations:</p> <p><b>FCC-Registration No.: 779513 Designation Number: CN1319</b> Shenzhen HTT Technology Co.,Ltd. has been accredited on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.</p> <p><b>A2LA-Lab Cert. No.: 6435.01</b> Shenzhen HTT Technology Co.,Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.</p> <p>The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.10 and CISPR 16-1-4:2010.</p>
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

#### 4.7. Test Location

All tests were performed at:
Shenzhen HTT Technology Co.,Ltd. 1F, Building B, Huafeng International Robotics Industrial Park, Hangcheng Road,Nanchang Community, Xixiang Street, Bao'an District, Shenzhen, Guangdong, China Tel: 0755-23595200 Fax: 0755-23595201

#### 4.8. Additional Instructions

Test Software	Special AT test command provided by manufacturer to Keep the EUT in continuously transmitting mode and hopping mode
Power level setup	Default




### 5. Test Instruments list

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	Shenzhen C.R.T technology co., LTD	9*6*6	HTT-E028	Aug. 10 2021	Aug. 09 2024
2	Control Room	Shenzhen C.R.T technology co., LTD	4.8*3.5*3.0	HTT-E030	Aug. 10 2021	Aug. 09 2024
3	EMI Test Receiver	Rohde&Schwar	ESCI7	HTT-E022	Apr. 26 2023	Apr. 25 2024
4	Spectrum Analyzer	Rohde&Schwar	FSP	HTT-E037	Apr. 26 2023	Apr. 25 2024
5	Coaxial Cable	ZDecl	ZT26-NJ-NJ-0.6M	HTT-E018	Apr. 26 2023	Apr. 25 2024
6	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-2M	HTT-E019	Apr. 26 2023	Apr. 25 2024
7	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-0.6M	HTT-E020	Apr. 26 2023	Apr. 25 2024
8	Coaxial Cable	ZDecl	ZT26-NJ-SMAJ-8.5M	HTT-E021	Apr. 26 2023	Apr. 25 2024
9	Composite logarithmic antenna	Schwarzbeck	VULB 9168	HTT-E017	May. 21 2023	May. 20 2024
10	Horn Antenna	Schwarzbeck	BBHA9120D	HTT-E016	May. 20 2023	May. 19 2024
11	Loop Antenna	Zhinan	ZN30900C	HTT-E039	Apr. 26 2023	Apr. 25 2024
12	Horn Antenna	Beijing Hangwei Dayang	OBH100400	HTT-E040	Apr. 26 2023	Apr. 25 2024
13	low frequency Amplifier	Sonoma Instrument	310	HTT-E015	Apr. 26 2023	Apr. 25 2024
14	high-frequency Amplifier	HP	8449B	HTT-E014	Apr. 26 2023	Apr. 25 2024
15	Variable frequency power supply	Shenzhen Anbiao Instrument Co., Ltd	ANB-10VA	HTT-082	Apr. 26 2023	Apr. 25 2024
16	EMI Test Receiver	Rohde & Schwarz	ESCS30	HTT-E004	Apr. 26 2023	Apr. 25 2024
17	Artificial Mains	Rohde & Schwarz	ESH3-Z5	HTT-E006	May. 23 2023	May. 22 2024
18	Artificial Mains	Rohde & Schwarz	ENV-216	HTT-E038	May. 23 2023	May. 22 2024
19	Cable Line	Robinson	Z302S-NJ-BNCJ-1.5M	HTT-E001	Apr. 26 2023	Apr. 25 2024
20	Attenuator	Robinson	6810.17A	HTT-E007	Apr. 26 2023	Apr. 25 2024
21	Variable frequency power supply	Shenzhen Yanghong Electric Co., Ltd	YF-650 (5KVA)	HTT-E032	Apr. 26 2023	Apr. 25 2024
22	Control Room	Shenzhen C.R.T technology co., LTD	8*4*3.5	HTT-E029	Aug. 10 2021	Aug. 09 2024
23	DC power supply	Agilent	E3632A	HTT-E023	Apr. 26 2023	Apr. 25 2024
24	EMI Test Receiver	Agilent	N9020A	HTT-E024	Apr. 26 2023	Apr. 25 2024
25	Analog signal generator	Agilent	N5181A	HTT-E025	Apr. 26 2023	Apr. 25 2024
26	Vector signal generator	Agilent	N5182A	HTT-E026	Apr. 26 2023	Apr. 25 2024
27	Power sensor	Keysight	U2021XA	HTT-E027	Apr. 26 2023	Apr. 25 2024
28	Temperature and humidity meter	Shenzhen Anbiao Instrument Co., Ltd	TH10R	HTT-074	Apr. 28 2023	Apr. 27 2024
29	Radiated Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
30	Conducted Emission Test Software	Farad	EZ-EMC	N/A	N/A	N/A
31	RF Test Software	panshanrf	TST	N/A	N/A	N/A



## 6. Test results and Measurement Data

### 6.1. Conducted Emissions

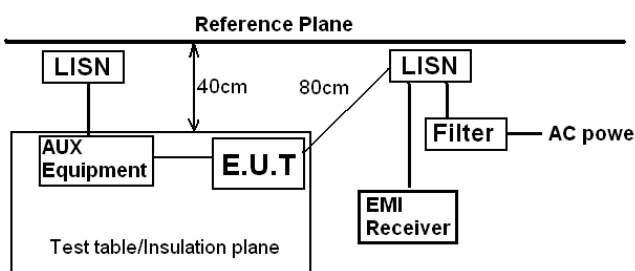
Test Requirement:	FCC Part15 C Section 15.207					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	150KHz to 30MHz					
Class / Severity:	Class B					
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto					
Limit:	Frequency range (MHz)		Limit (dBuV)			
			Quasi-peak		Average	
	0.15-0.5		66 to 56*		56 to 46*	
	0.5-5		56		46	
5-30		60		50		
* Decreases with the logarithm of the frequency.						
Test setup:	 <p><i>Remark</i>        E.U.T: Equipment Under Test        LISN: Line Impedance Stabilization Network        Test table height=0.8m</p>					
Test procedure:	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.</li> </ol>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Test voltage:	AC 120V, 60Hz					
Test results:	Pass					

Remark: Both high and low voltages have been tested to show only the worst low voltage test data.



Measurement data:

Line:

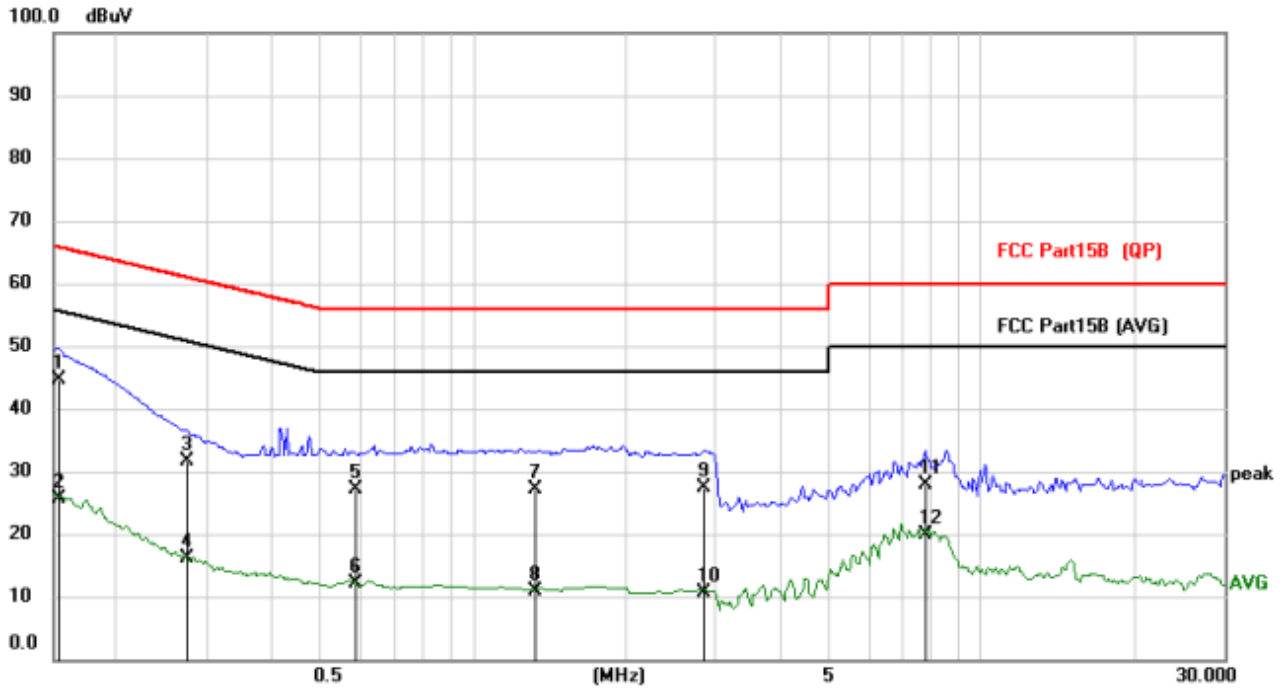


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.1539	34.19	10.37	44.56	65.79	-21.23	QP
2		0.1539	15.20	10.37	25.57	55.79	-30.22	AVG
3		0.2748	21.17	10.40	31.57	60.97	-29.40	QP
4		0.2748	5.85	10.40	16.25	50.97	-34.72	AVG
5		0.5885	16.46	10.58	27.04	56.00	-28.96	QP
6		0.5885	1.48	10.58	12.06	46.00	-33.94	AVG
7		1.3278	16.28	10.88	27.16	56.00	-28.84	QP
8		1.3278	0.04	10.88	10.92	46.00	-35.08	AVG
9		2.8488	16.44	10.84	27.28	56.00	-28.72	QP
10		2.8488	-0.16	10.84	10.68	46.00	-35.32	AVG
11		7.7424	16.53	11.45	27.98	60.00	-32.02	QP
12		7.7424	8.37	11.45	19.82	50.00	-30.18	AVG



**Neutral:**

100.0 dBuV

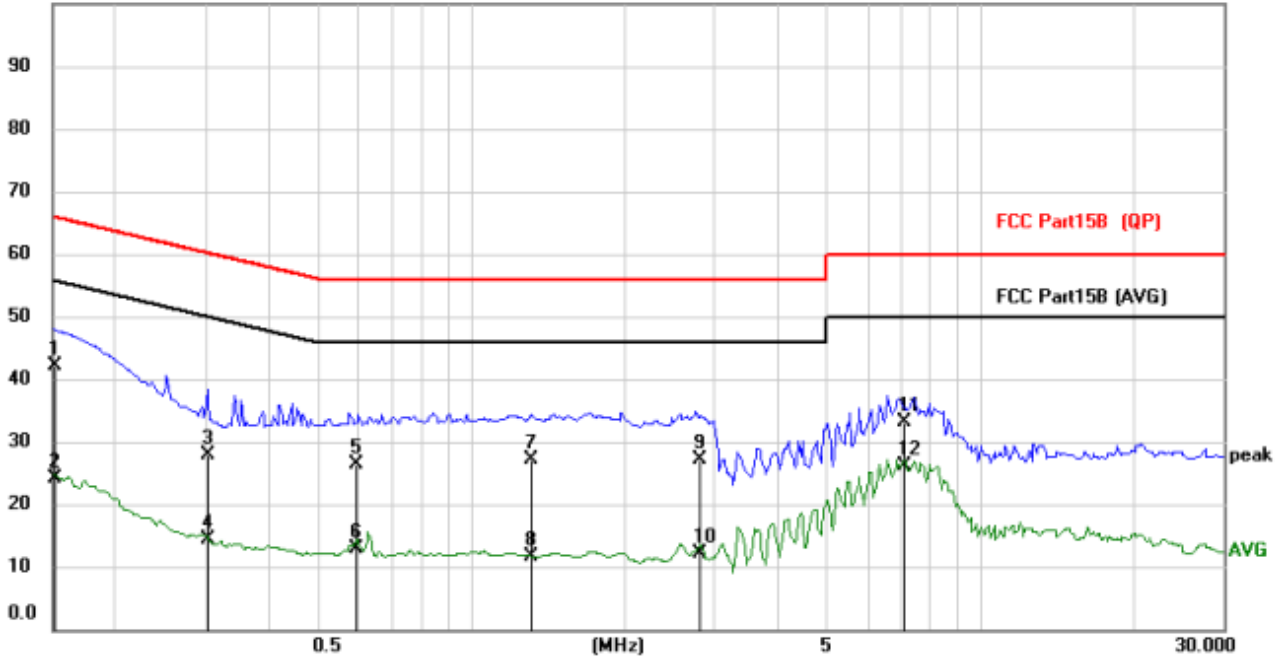


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.1516	31.97	10.27	42.24	65.91	-23.67	QP
2		0.1516	13.88	10.27	24.15	55.91	-31.76	AVG
3		0.3034	17.63	10.25	27.88	60.15	-32.27	QP
4		0.3034	4.20	10.25	14.45	50.15	-35.70	AVG
5		0.5946	15.99	10.49	26.48	56.00	-29.52	QP
6		0.5946	2.31	10.49	12.80	46.00	-33.20	AVG
7		1.3098	16.44	10.81	27.25	56.00	-28.75	QP
8		1.3098	0.91	10.81	11.72	46.00	-34.28	AVG
9		2.8176	16.20	10.84	27.04	56.00	-28.96	QP
10		2.8176	1.18	10.84	12.02	46.00	-33.98	AVG
11		7.0911	22.11	10.95	33.06	60.00	-26.94	QP
12		7.0911	15.26	10.95	26.21	50.00	-23.79	AVG

*Notes:*

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Los


## 6.2. Conducted Peak Output Power

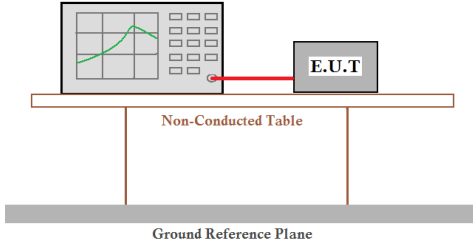Test Requirement:	FCC Part15 C Section 15.247 (b)(3)				
Test Method:	ANSI C63.10:2013				
Limit:	30dBm(for GFSK),20.97dBm(for EDR)				
Test setup:	<p>Power sensor and Spectrum analyzer</p> 				
Test Instruments:	Refer to section 6.0 for details				
Test mode:	Refer to section 5.2 for details				
Test results:	Pass				
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.: 1012mbar

### Measurement Data

Mode	Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
GFSK	Lowest	-4.10	30.00	Pass
	Middle	-4.40		
	Highest	-4.65		
$\pi/4$ -DQPSK	Lowest	-3.36	20.97	Pass
	Middle	-3.70		
	Highest	-3.81		
8-DPSK	Lowest	-3.06	20.97	Pass
	Middle	-3.38		
	Highest	-3.47		

### 6.3. 20dB Emission Bandwidth

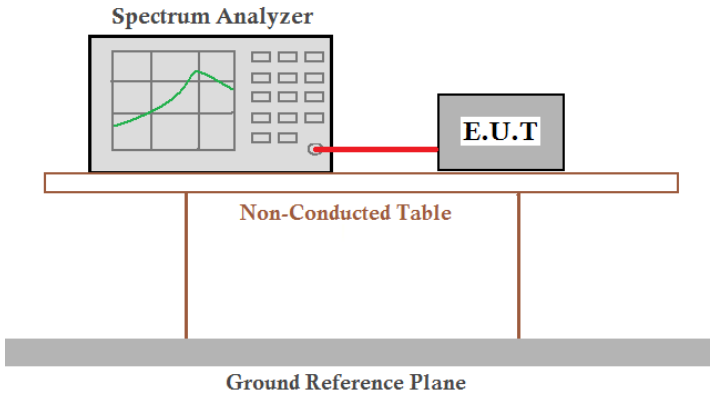Test Requirement:	FCC Part15 C Section 15.247 (a)(2)					
Test Method:	ANSI C63.10:2013					
Limit:	N/A					
Test setup:						
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar


### Measurement Data

Mode	Test channel	20dB Emission Bandwidth (MHz)	Result
GFSK	Lowest	1.041	Pass
	Middle	1.037	
	Highest	1.039	
$\pi/4$ -DQPSK	Lowest	1.324	Pass
	Middle	1.335	
	Highest	1.347	
8-DPSK	Lowest	1.317	Pass
	Middle	1.314	
	Highest	1.311	




Test plot as follows:


Test mode:	GFSK mode
------------	-----------

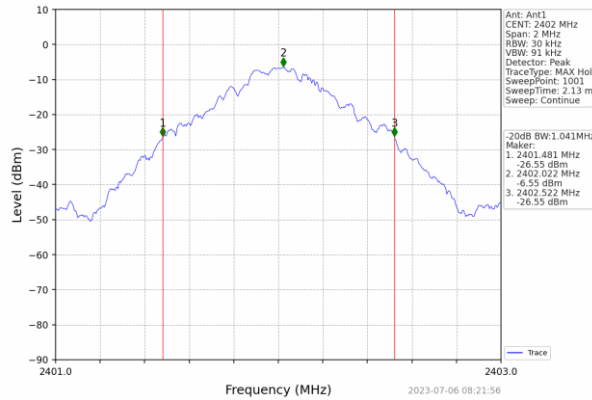

Lowest channel

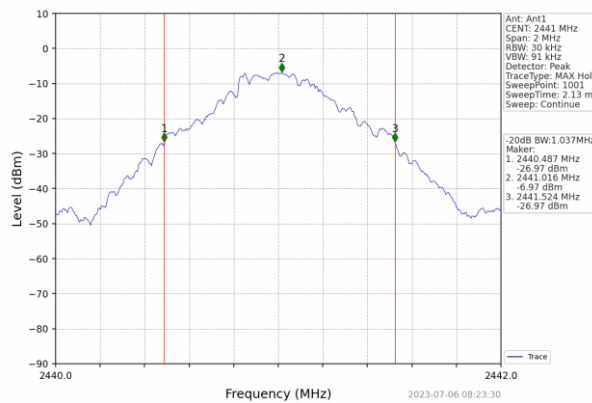


Middle channel

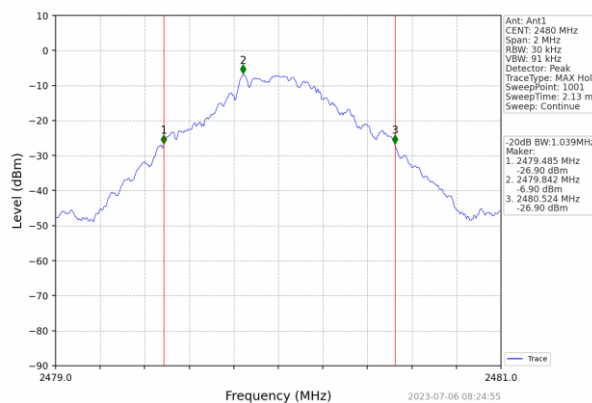


Highest channel




Test mode:  $\pi/4$ -DQPSK mode

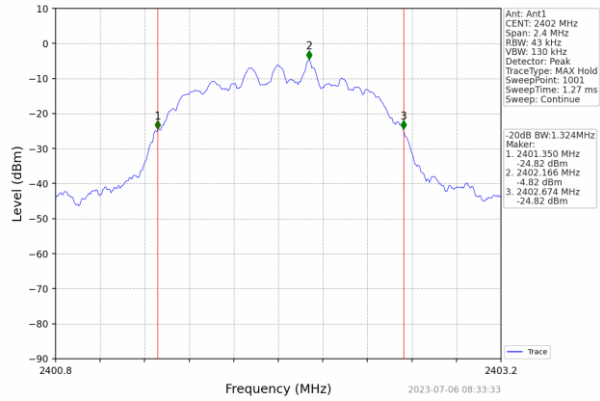

Lowest channel

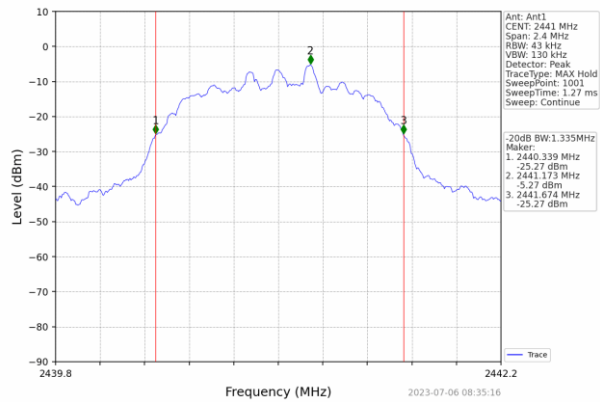


Middle channel

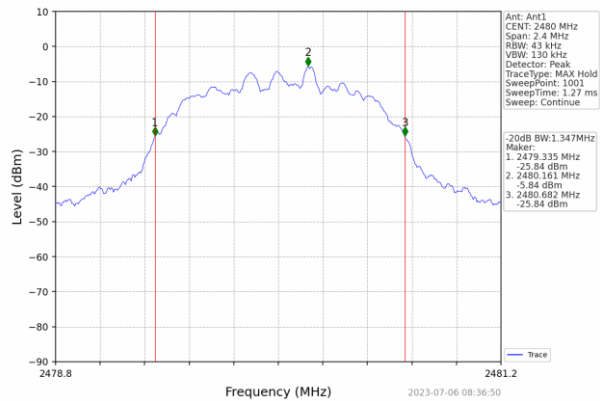


Highest channel




Test mode: 8-DPSK mode

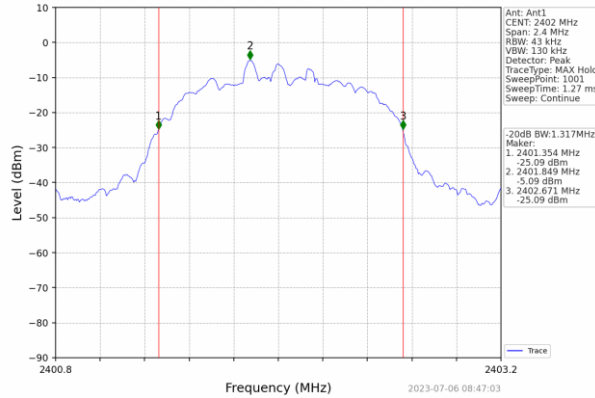

Lowest channel

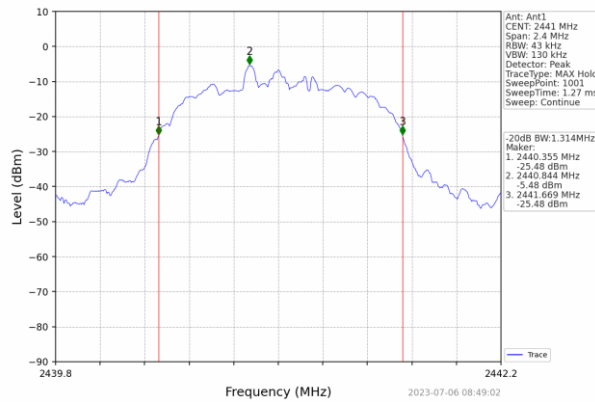


Middle channel

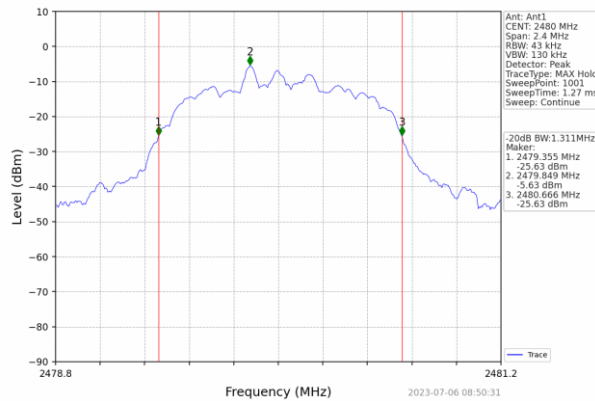

Highest channel



### 6.4. Frequencies Separation

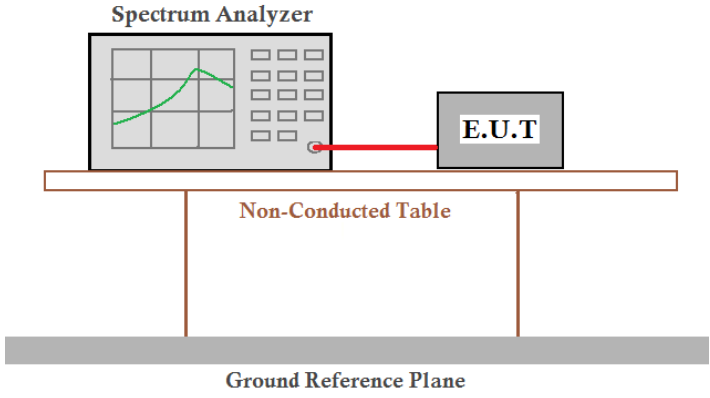Test Requirement:	FCC Part15 C Section 15.247 (a)(1)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=100KHz, VBW=300KHz, detector=Peak					
Limit:	GFSK: 20dB bandwidth $\pi/4$ -DQPSK : 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater)					
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

#### Measurement Data


Mode	Test channel	Frequencies Separation (MHz)	Limit (kHz)	Result
GFSK	Middle	0.970	25KHz or 2/3*20dB bandwidth	Pass
$\pi/4$ -DQPSK	Middle	1.020	25KHz or 2/3*20dB bandwidth	Pass
8-DPSK	Middle	0.986	25KHz or 2/3*20dB bandwidth	Pass

Remark: We have tested all mode at high, middle and low channel, and recorded worst case at middle




**Test plot as follows:**


Modulation mode:	GFSK
------------------	------

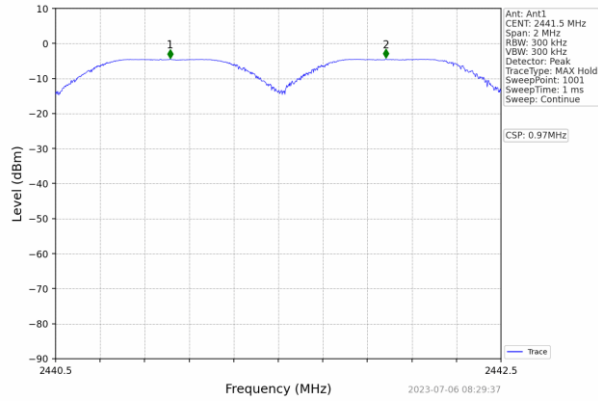


Test mode:	$\pi/4$ -DQPSK
------------	----------------

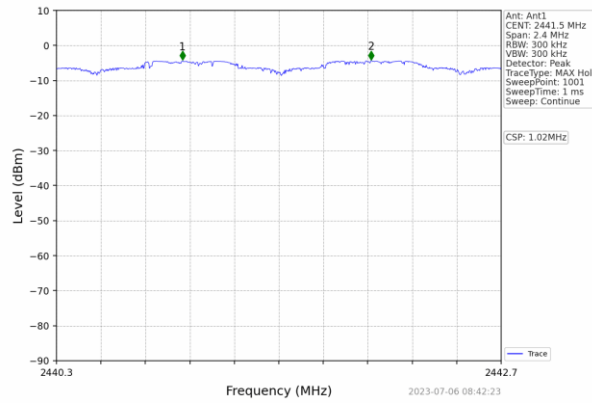

Modulation mode:	8-DPSK
------------------	--------

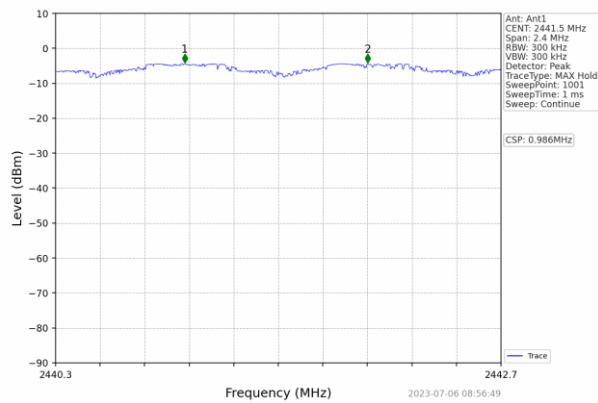

### 6.5. Hopping Channel Number

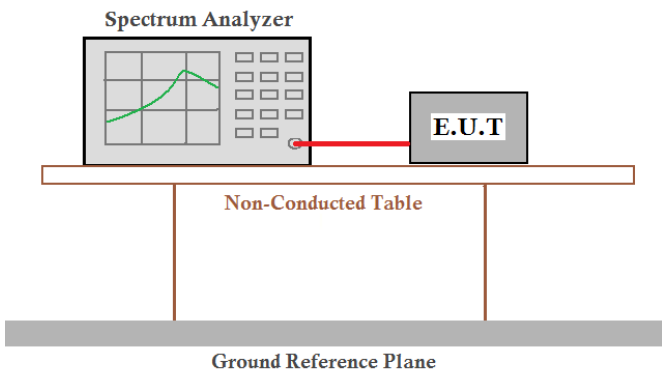Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak					
Limit:	15 channels					
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar


#### Measurement Data:

Mode	Hopping channel numbers	Limit	Result
GFSK	79	≥15	Pass
$\pi/4$ -DQPSK	79		Pass
8-DPSK	79		Pass




Test plot as follows:


Test mode:	GFSK
------------	------

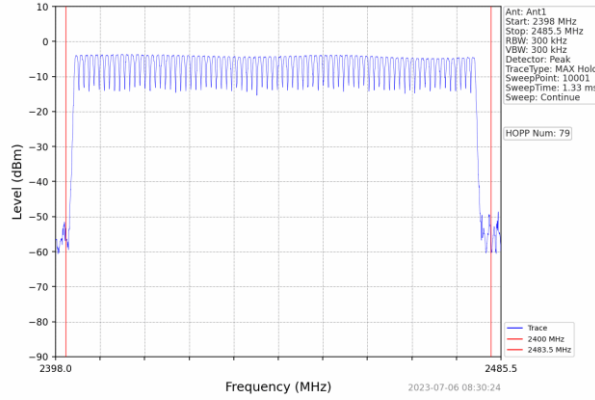


Test mode:	$\pi/4$ -DQPSK
------------	----------------

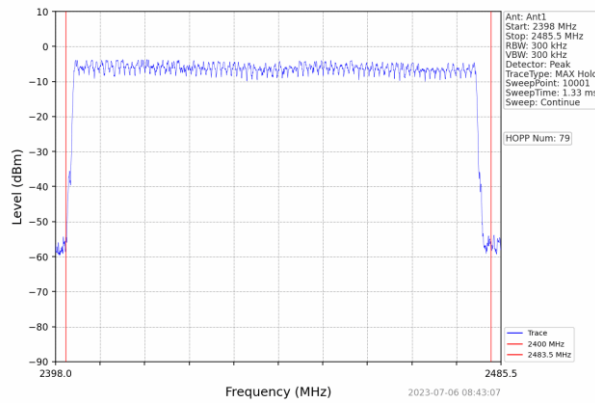

Test mode:	8-DPSK
------------	--------

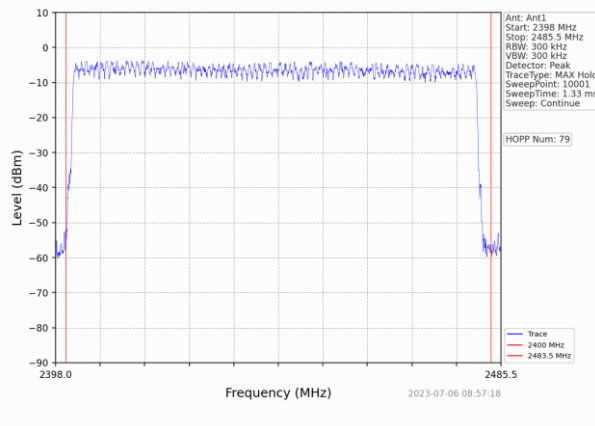

### 6.6. Dwell Time

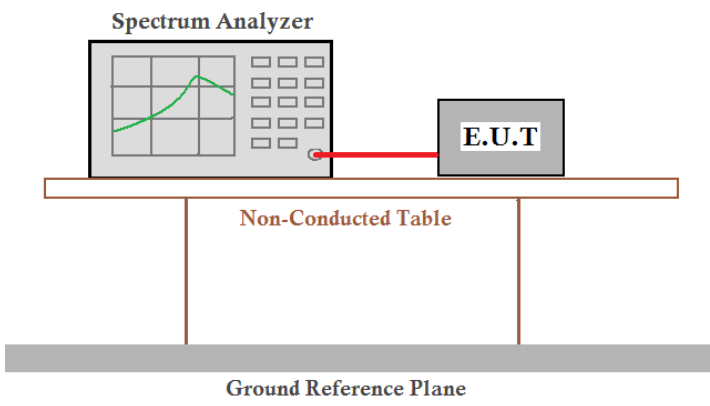Test Requirement:	FCC Part15 C Section 15.247 (a)(1)(iii)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak					
Limit:	0.4 Second					
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

**Measurement Data****GFSK mode:**

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	DH1	0.380	118.940	400	Pass
Hopping	DH3	1.636	255.216	400	Pass
Hopping	DH5	2.890	326.570	400	Pass

Note:We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.

Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for DH1, 2-DH1, 3-DH1

Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for DH3, 2-DH3, 3-DH3

Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for DH5, 2-DH5, 3-DH5

 **$\pi/4$ -DQPSK mode:**

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	2DH1	0.390	122.460	400	Pass
Hopping	2DH3	1.642	243.016	400	Pass
Hopping	2DH5	2.890	306.340	400	Pass

Note:We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.

Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for DH1, 2-DH1, 3-DH1

Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for DH3, 2-DH3, 3-DH3

Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for DH5, 2-DH5, 3-DH5

**8-DPSK mode:**

Frequency	Packet	Pulse time (ms)	Dwell time(ms)	Limit(ms)	Result
Hopping	3DH1	0.398	124.574	400	Pass
Hopping	3DH3	1.640	252.560	400	Pass
Hopping	3DH5	2.898	278.208	400	Pass

Note:We have tested all mode at high,middle and low channel,and recoreded worst case at middle channel.

Dwell time=Pulse time (ms) × (1600 ÷ 2 ÷ 79) ×31.6 Second for DH1, 2-DH1, 3-DH1


Dwell time=Pulse time (ms) × (1600 ÷ 4 ÷ 79) ×31.6 Second for DH3, 2-DH3, 3-DH3

Dwell time=Pulse time (ms) × (1600 ÷ 6 ÷ 79) ×31.6 Second for DH5, 2-DH5, 3-DH5




Test plot as follows:


**GFSK mode**

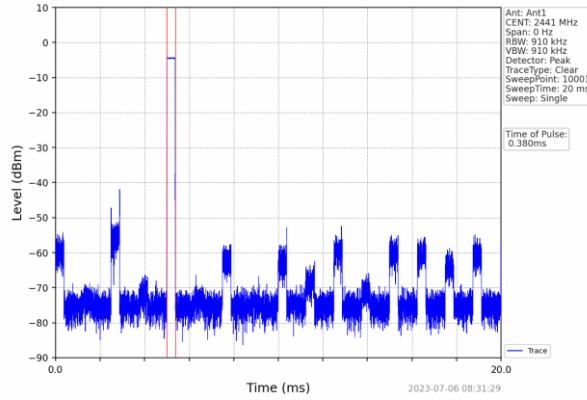

DH1

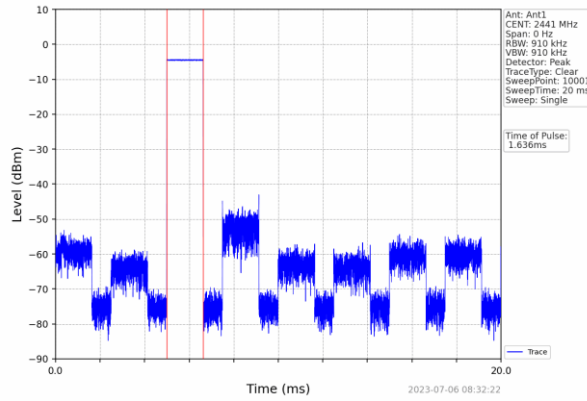


DH3

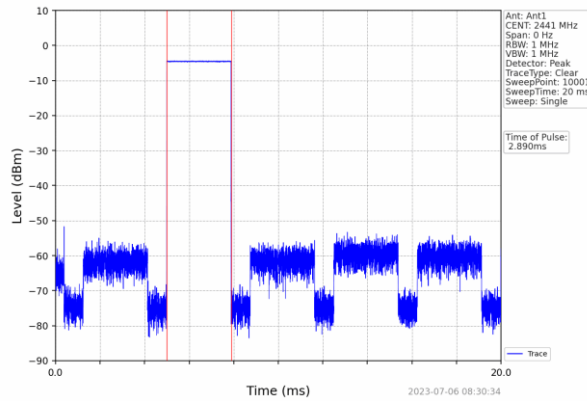


DH5




**$\pi/4$ -DQPSK mode**

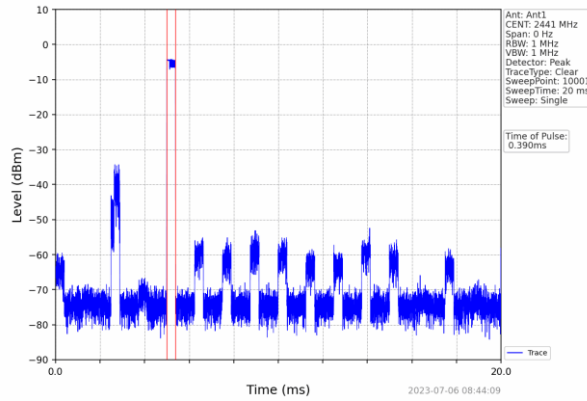

2DH1

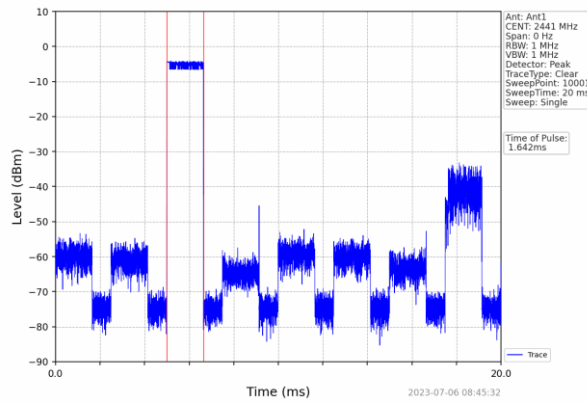

2DH3

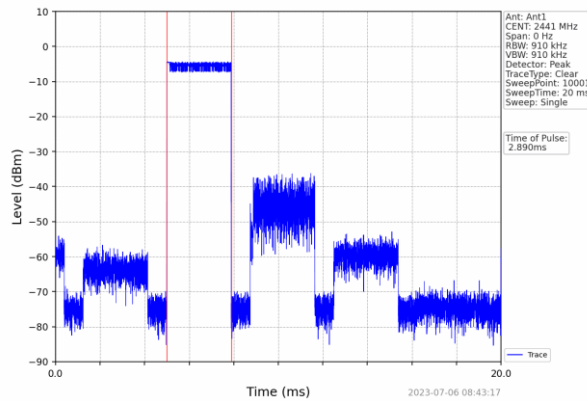


2DH5







8-DPSK mode

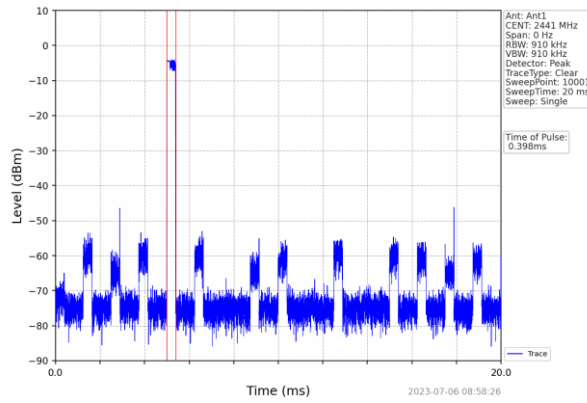

3DH1

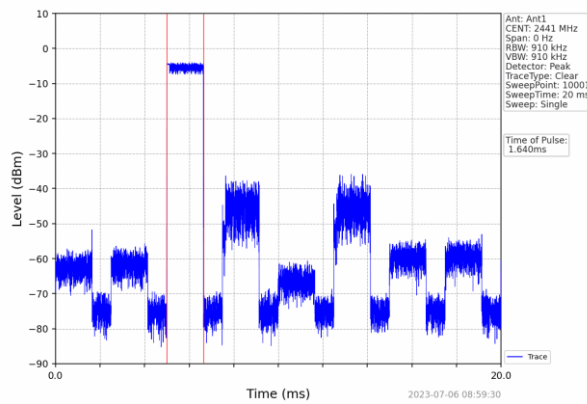


3DH3

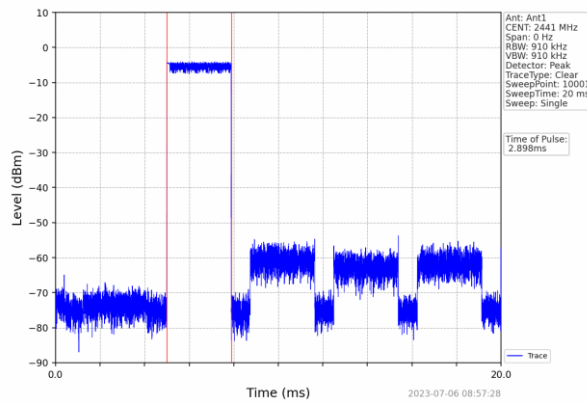

3DH5

## 6.7. Band Edge

### 6.7.1. Conducted Emission Method

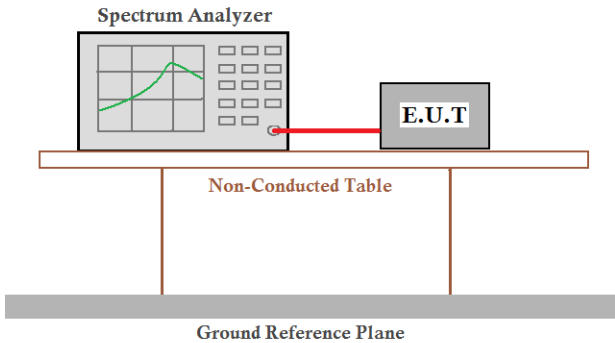
Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.10:2013					
Receiver setup:	RBW=100kHz, VBW=300kHz, Detector=Peak					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar






**$\pi/4$ -DQPSK Mode:**

Test channel	Lowest channel
--------------	----------------

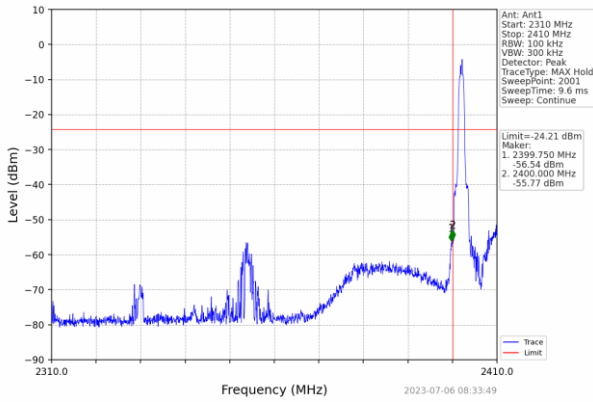


No-hopping mode

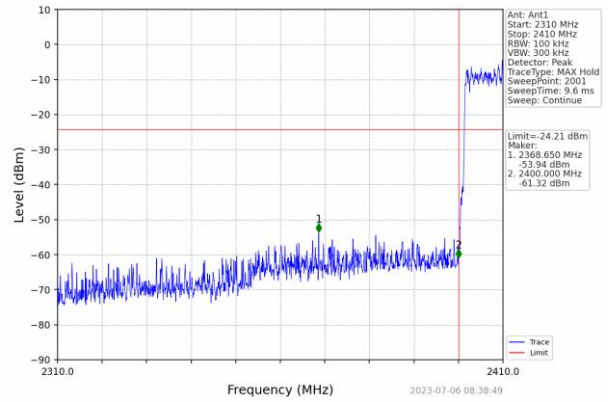


Hopping mode

Test channel:	Highest channel
---------------	-----------------

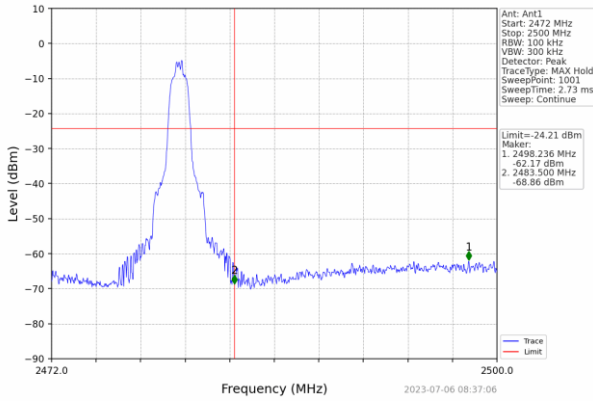

No-hopping mode

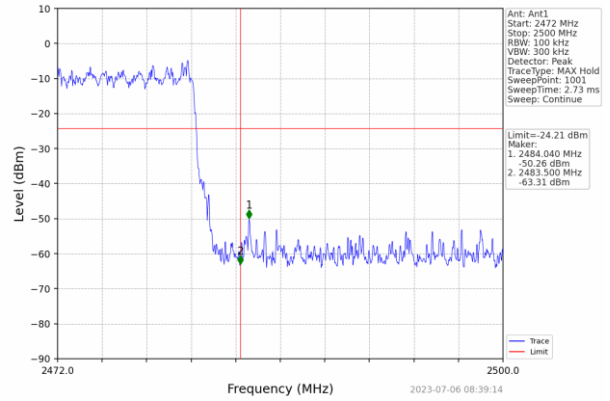


Hopping mode




8-DPSK Mode:

Test channel:	Lowest channel
---------------	----------------

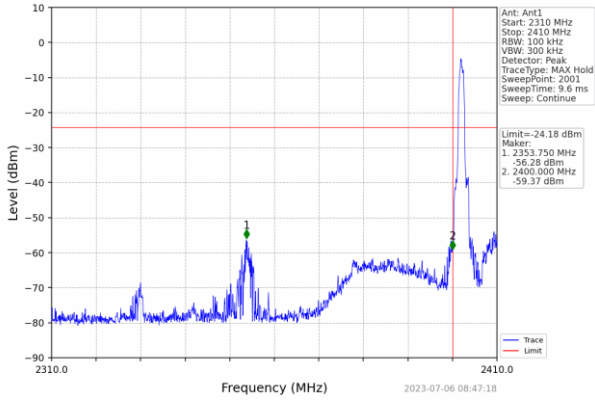


No-hopping mode

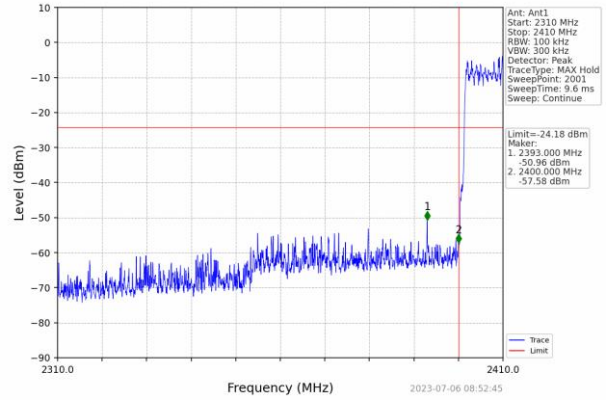


Hopping mode

Test channel:	Highest channel
---------------	-----------------

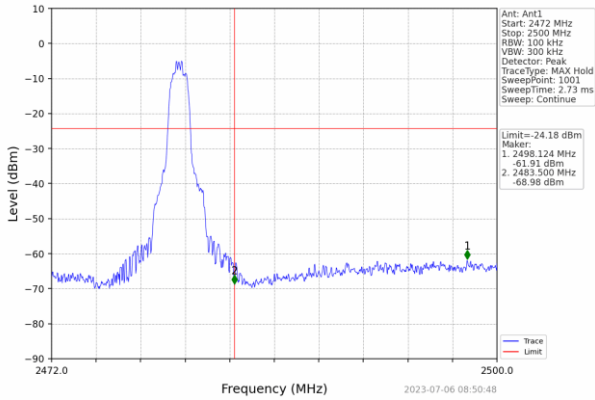


No-hopping mode

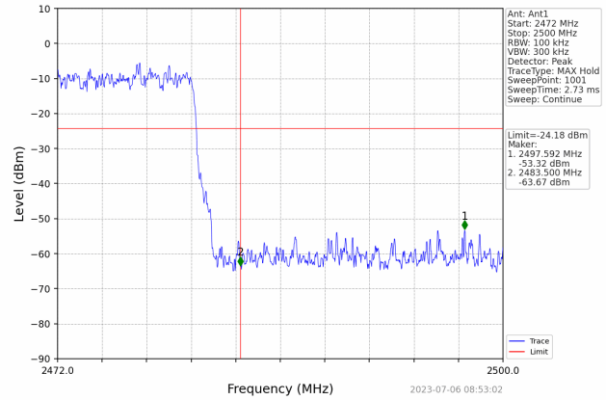

Hopping mode

**6.7.2. Radiated Emission Method**

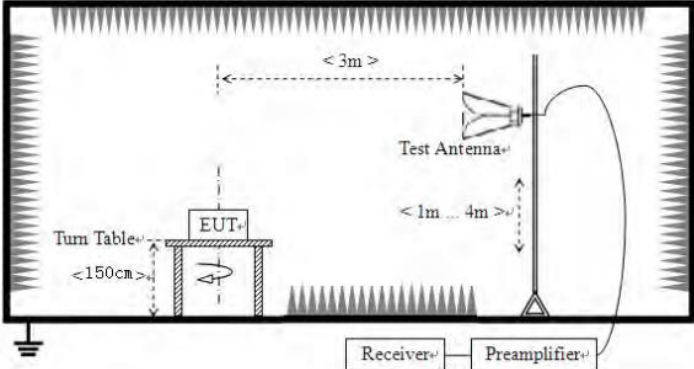Test Requirement:	FCC Part15 C Section 15.209 and 15.205					
Test Method:	ANSI C63.10:2013					
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.					
Test site:	Measurement Distance: 3m					
Receiver setup:	Frequency	Detector	RBW	VBW	Remark	
	Above 1GHz	Peak	1MHz	3MHz	Peak Value	
		Peak	1MHz	10Hz	Average Value	
Limit:	Frequency		Limit (dBuV/m @3m)		Remark	
	Above 1GHz		54.00		Average Value	
			74.00		Peak Value	
Test setup:						
Test Procedure:	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar

**Measurement Data**

Remark: GFSK, Pi/4 DQPSK,8-DPSK all have been tested, only worse case GFSK is reported.

Operation Mode: GFSK TX Low channel(2402MHz)

**Horizontal (Worst case)**

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	60.28	26.20	5.72	33.30	58.90	74.00	-15.10	peak
2390	45.85	26.20	5.72	33.30	44.47	54.00	-9.53	AVG

**Vertical:**

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2390	59.08	26.20	5.72	33.30	57.70	74.00	-16.30	peak
2390	46.37	26.20	5.72	33.30	44.99	54.00	-9.01	AVG

Operation Mode: GFSK TX High channel (2480MHz)

**Horizontal (Worst case)**


Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.5	55.84	28.60	6.97	32.70	58.71	74.00	-15.29	peak
2483.5	41.69	28.60	6.97	32.70	44.56	54.00	-9.44	AVG

**Vertical:**

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
2483.5	54.18	28.60	6.97	32.70	57.05	74.00	-16.95	peak
2483.5	43.25	28.60	6.97	32.70	46.12	54.00	-7.88	AVG

## 6.8. Spurious Emission


### 6.8.1. Conducted Emission Method

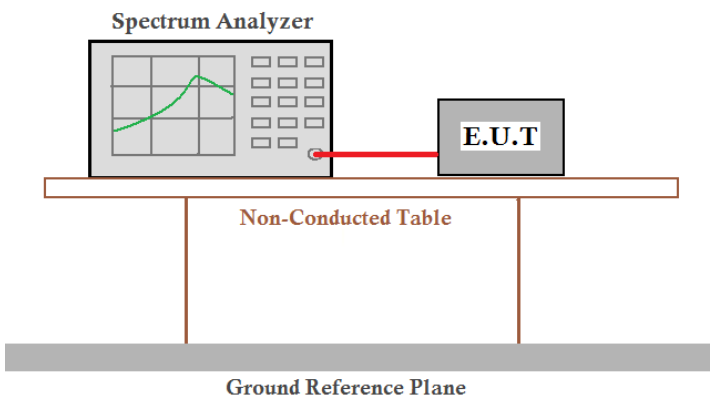Test Requirement:	FCC Part15 C Section 15.247 (d)					
Test Method:	ANSI C63.10:2013					
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.					
Test setup:	 <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by two legs. Below the table is a Ground Reference Plane.</p>					
Test Instruments:	Refer to section 6.0 for details					
Test mode:	Refer to section 5.2 for details					
Test results:	Pass					
Test environment:	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar







### Reference

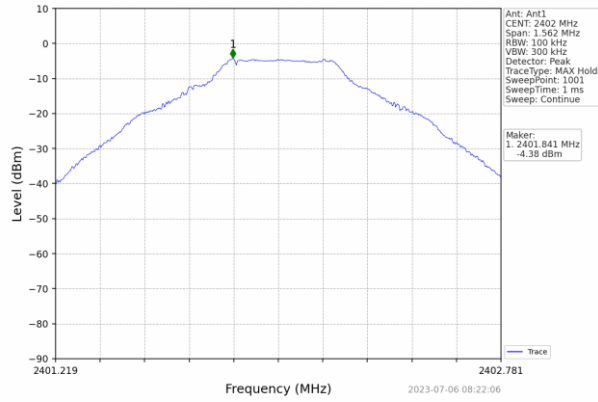

### GFSK

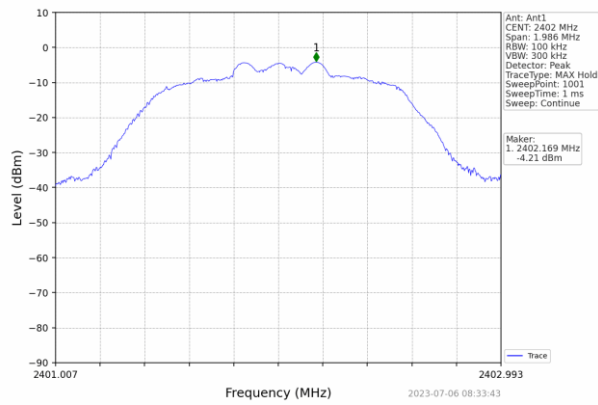


### $\pi/4$ DQPSK

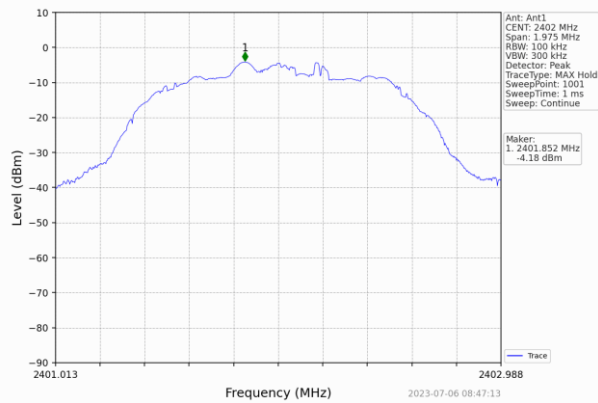


### 8-DPSK




### GFSK

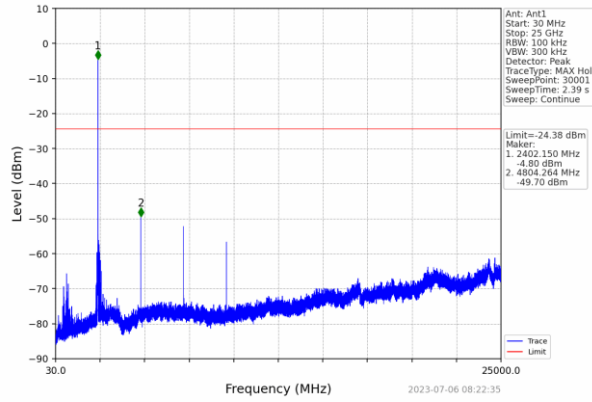

### CH00

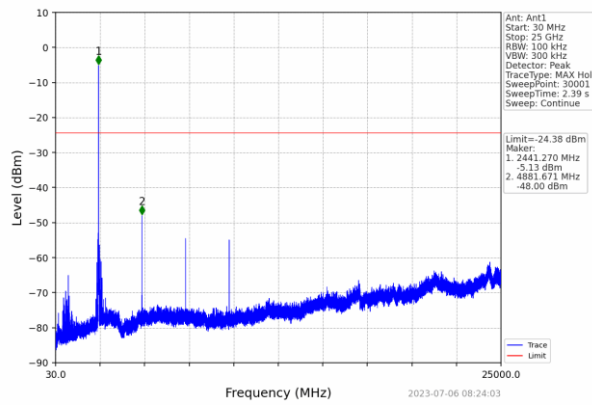


### CH39

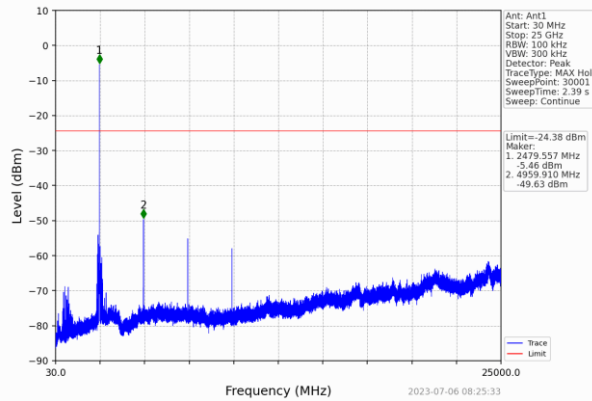


### CH78




### $\pi/4$ DQPSK

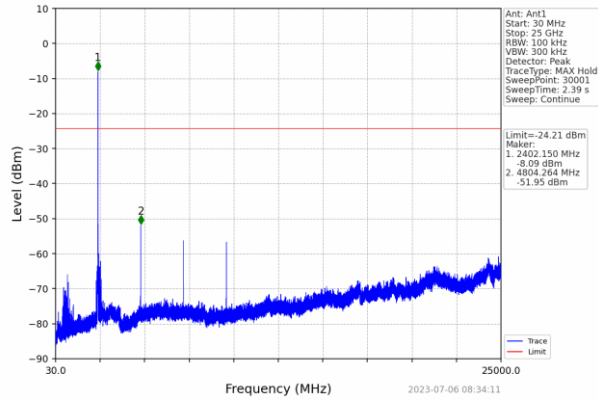

### CH00

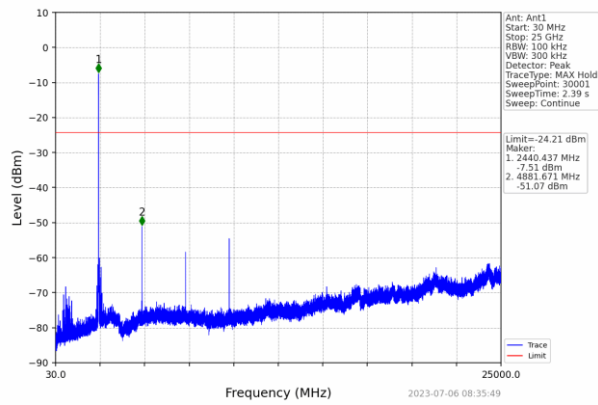


### CH39

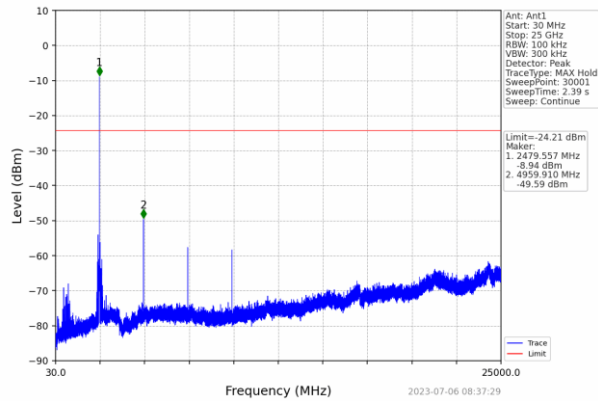


### CH78




### 8-DPSK

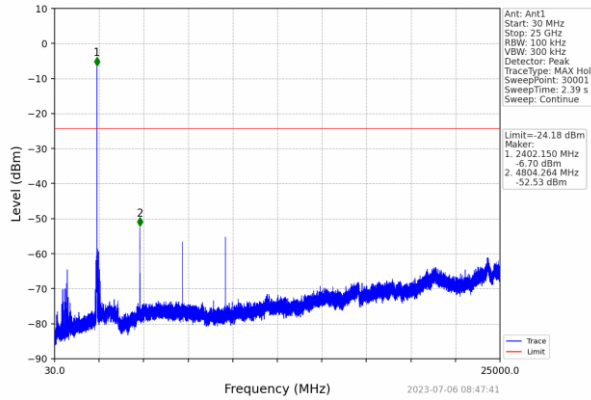

### CH00

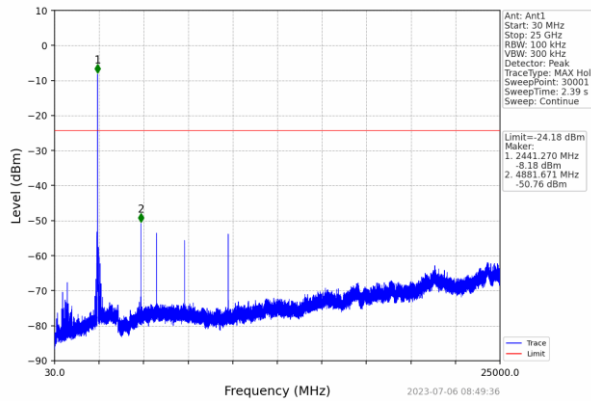




### CH39

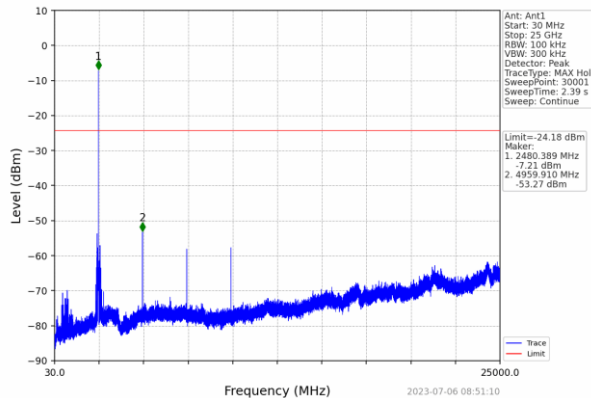

### CH78

**6.8.2. Radiated Emission Method**

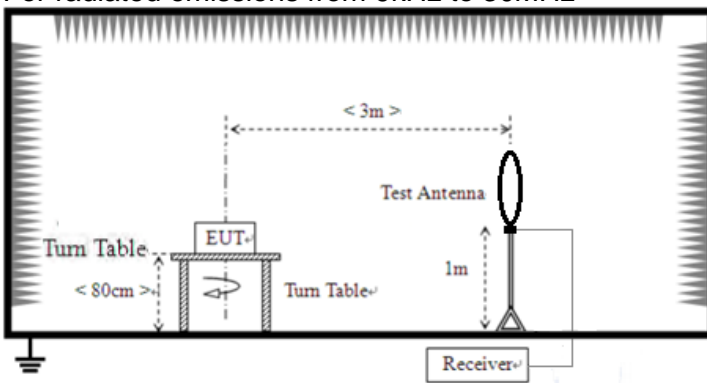Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Limit:	Frequency	Limit (uV/m)	Value	Measurement Distance	
	0.009MHz-0.490MHz	2400/F(KHz)	QP	300m	
	0.490MHz-1.705MHz	24000/F(KHz)	QP	30m	
	1.705MHz-30MHz	30	QP	30m	
	30MHz-88MHz	100	QP	3m	
	88MHz-216MHz	150	QP		
	216MHz-960MHz	200	QP		
	960MHz-1GHz	500	QP		
	Above 1GHz	500	Average		
		5000	Peak		
Test setup:	<p>For radiated emissions from 9kHz to 30MHz</p>  <p>The diagram illustrates the test setup for radiated emissions. It shows a Turn Table with a diameter of less than 80cm, upon which the Equipment Under Test (EUT) is placed. A Test Antenna is positioned at a distance of less than 3m from the EUT. The antenna is mounted on a stand that is 1m high. A Receiver is connected to the antenna. The entire setup is on a ground plane.</p>				

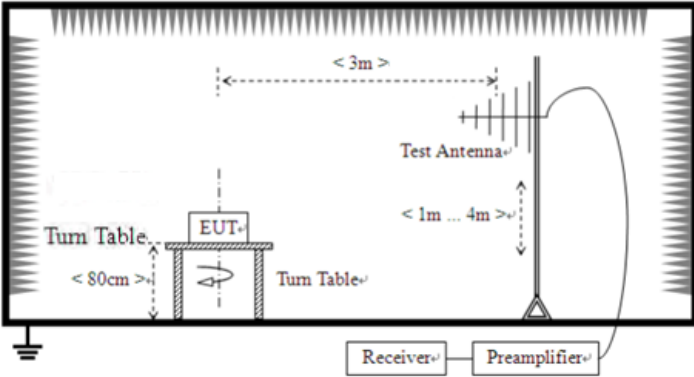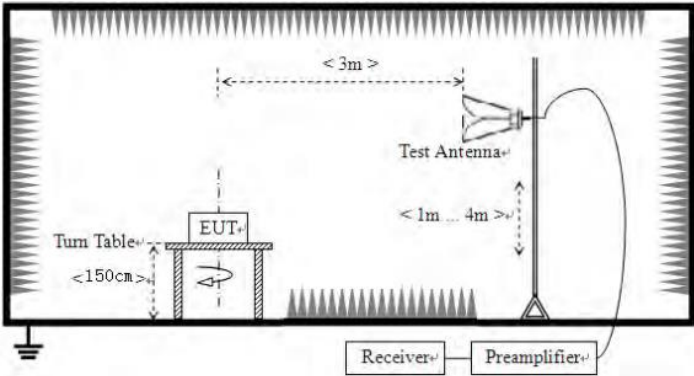	<p>For radiated emissions from 30MHz to 1GHz</p>  <p>For radiated emissions above 1GHz</p> 						
<p>Test Procedure:</p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>						
<p>Test Instruments:</p>	<p>Refer to section 6.0 for details</p>						
<p>Test mode:</p>	<p>Refer to section 5.2 for details</p>						
<p>Test environment:</p>	<table border="1"> <tr> <td>Temp.:</td> <td>25 °C</td> <td>Humid.:</td> <td>52%</td> <td>Press.:</td> <td>1012mbar</td> </tr> </table>	Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar
Temp.:	25 °C	Humid.:	52%	Press.:	1012mbar		



Report No.: HTT202306548F01

Test voltage:	AC 120V, 60Hz
Test results:	Pass

**Measurement data:**

*Remarks:*


- 1. During the test, pre-scan the GFSK,  $\pi/4$ -DQPSK, 8-DPSK modulation, and found the GFSK modulation which it is worse case.*
- 2. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

■ **9kHz~30MHz**


The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.



For 30MHz-1GHz

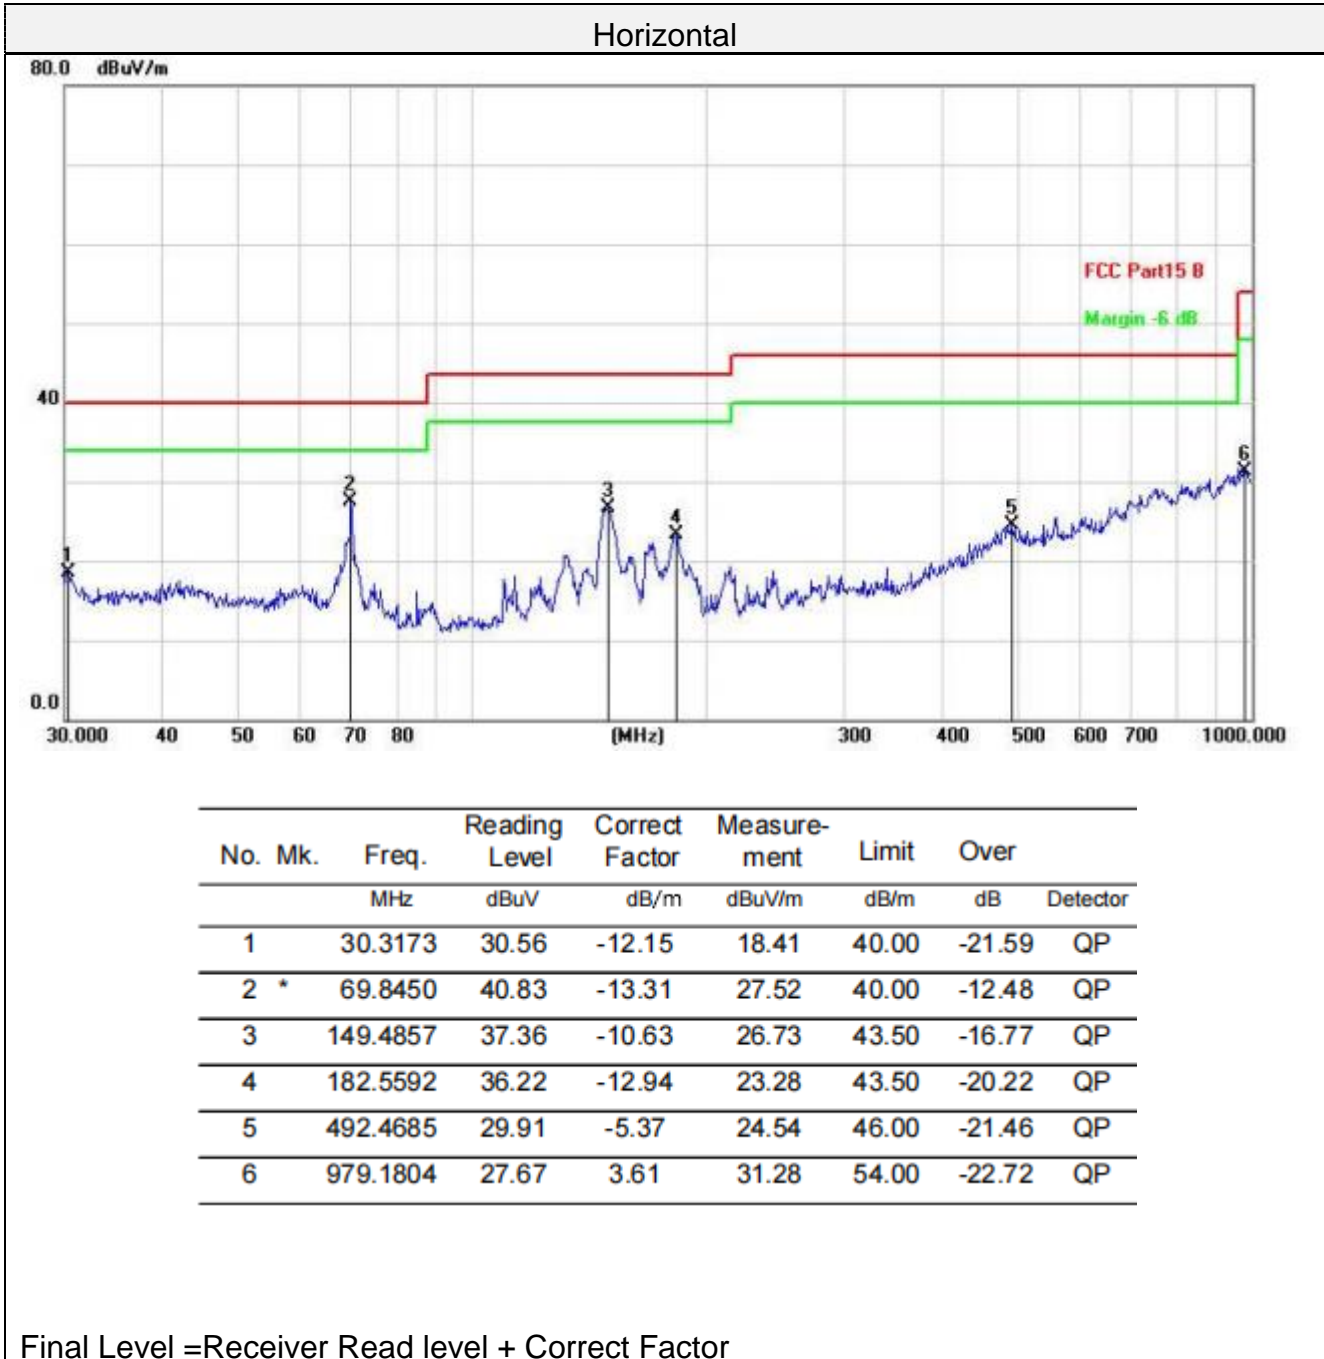



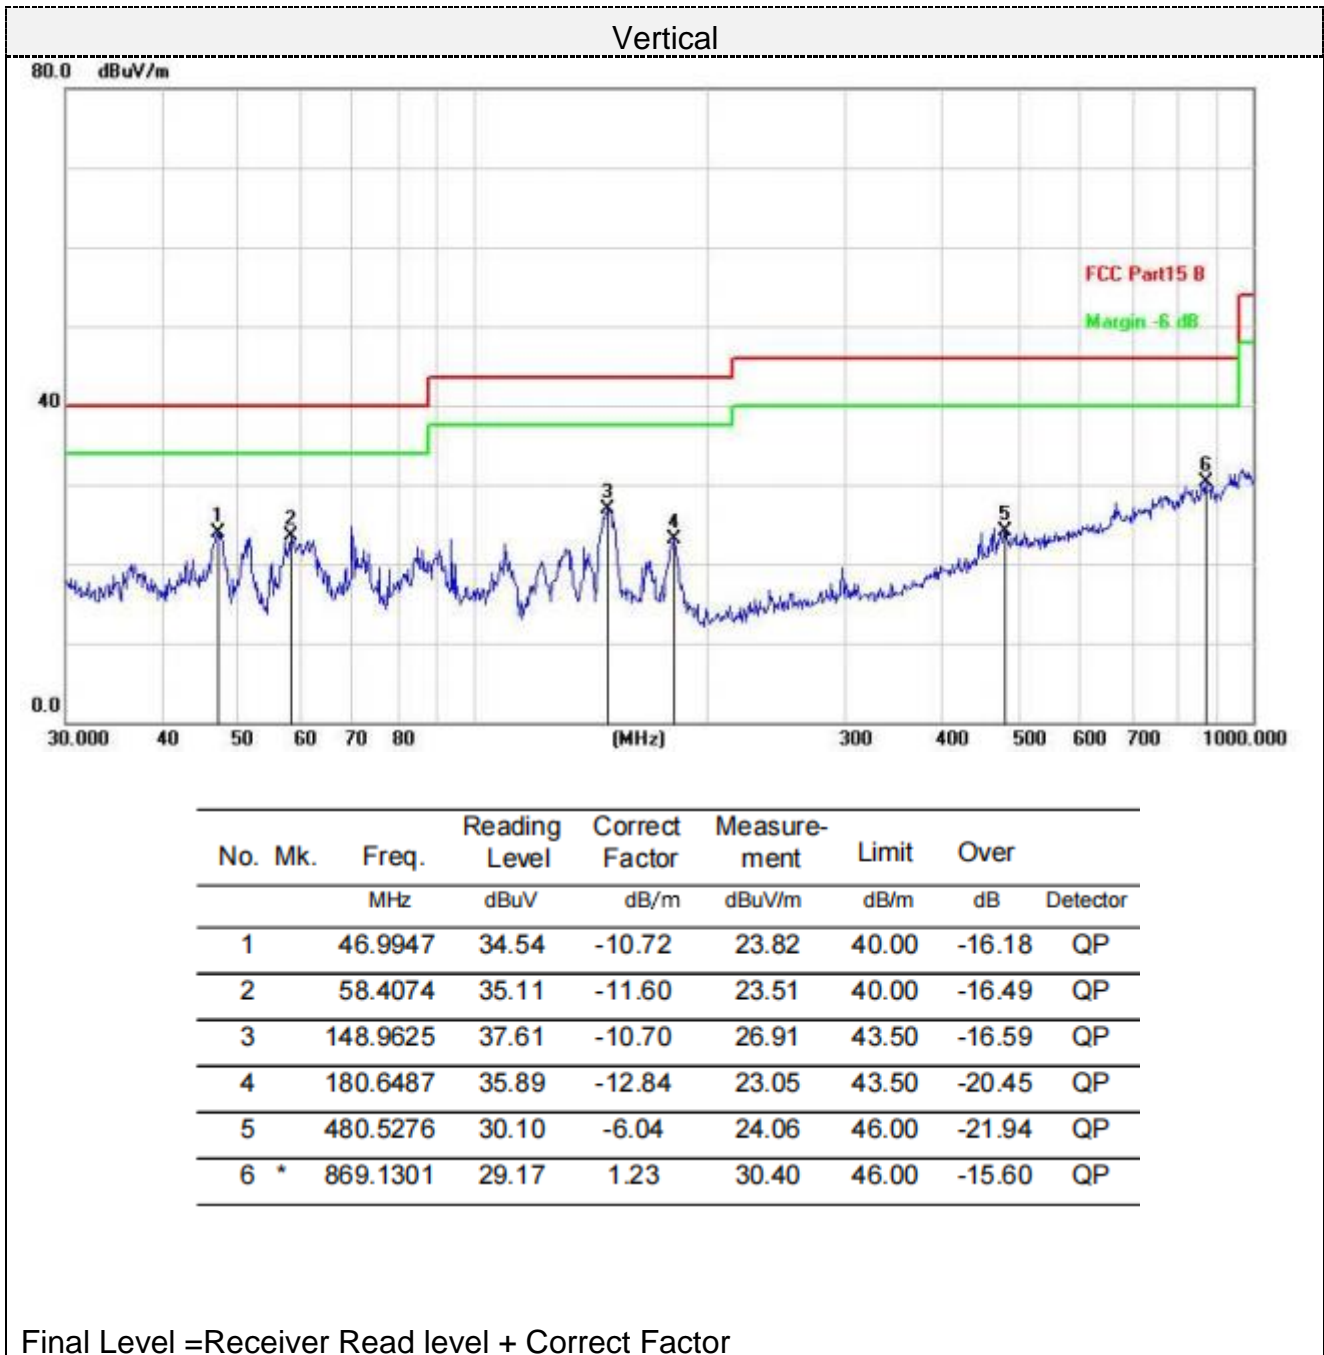

**For 1GHz to 25GHz**

Remark: For test above 1GHz GFSK, Pi/4 DQPSK and 8-DPSK were test at Low, Middle, and High channel; only the worst result of GFSK was reported as below:

**CH Low (2402MHz)****Horizontal:**

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4804	51.58	31.40	8.18	31.50	59.66	74.00	-14.34	peak
4804	37.45	31.40	8.18	31.50	45.53	54.00	-8.47	AVG
7206	46.23	35.80	10.83	31.40	61.46	74.00	-12.54	peak
7206	31.55	35.80	10.83	31.40	46.78	54.00	-7.22	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**Vertical:**

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4804	51.96	31.40	8.18	31.50	60.04	74.00	-13.96	peak
4804	36.85	31.40	8.18	31.50	44.93	54.00	-9.07	AVG
7206	45.16	35.80	10.83	31.40	60.39	74.00	-13.61	peak
7206	29.88	35.80	10.83	31.40	45.11	54.00	-8.89	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



### CH Middle (2441MHz)

#### Horizontal:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882	50.78	31.40	9.17	32.10	59.25	74.00	-14.75	peak
4882	36.96	31.40	9.17	32.10	45.43	54.00	-8.57	AVG
7323	44.51	35.80	10.83	31.40	59.74	74.00	-14.26	peak
7323	29.80	35.80	10.83	31.40	45.03	54.00	-8.97	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

#### Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4882	52.37	31.40	9.17	32.10	60.84	74.00	-13.16	peak
4882	37.45	31.40	9.17	32.10	45.92	54.00	-8.08	AVG
7323	43.16	35.80	10.83	31.40	58.39	74.00	-15.61	peak
7323	29.07	35.80	10.83	31.40	44.30	54.00	-9.70	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



### CH High (2480MHz)

#### Horizontal:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	52.14	31.40	9.17	32.10	60.61	74.00	-13.39	peak
4960	38.41	31.40	9.17	32.10	46.88	54.00	-7.12	AVG
7440	45.60	35.80	10.83	31.40	60.83	74.00	-13.17	peak
7440	29.31	35.80	10.83	31.40	44.54	54.00	-9.46	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

#### Vertical:

Frequency	Meter Reading	Antenna Factor	Cable Loss	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB/m)	(dB)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4960	51.11	31.40	9.17	32.10	59.58	74.00	-14.42	peak
4960	37.45	31.40	9.17	32.10	45.92	54.00	-8.08	AVG
7440	42.93	35.80	10.83	31.40	58.16	74.00	-15.84	peak
7440	28.67	35.80	10.83	31.40	43.90	54.00	-10.10	AVG
---	---			---	---	---	---	---
---	---			---	---	---	---	---

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**Remark:**

(1) Data of measurement within this frequency range shown “--- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(2) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed.



## 6.9. Antenna Requirement

### **Standard Applicable**

#### **For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

### **Antenna Connected Construction**

The maximum gain of antenna was 1.56 dBi.

Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Shenzhen HTT Technology Co., Ltd. does not assume any responsibility.



## 7. Test Setup Photo

Reference to the **appendix I** for details.

## 8. EUT Constructional Details

Reference to the **appendix II** for details.

-----End-----