
Project PRJ0050267

**Swimmersive Co. dba Zygo
Zygo2T**

**Wireless Certification Report
Wireless Microphone (VHF) Section**

Prepared for:

Swimmersive
16854 Mooncrest Dr
Encino, CA 91436

By

Nemko USA, Inc.
1601 North A.W. Grimes Blvd., Suite B
Round Rock, Texas 78665

21 August 2024

Written by

Veer Patel
Wireless Engineer



Revision History

Revision Number	Description	Date
Draft 01	Draft for review.	7/10/2024
Final01	Release to agency	8/2/2024
Final02	Updated mask and output power test results	8/21/2024

Errata:

Table of Contents

Revision History.....	1
Compliance Certificate.....	4
1.0 Introduction.....	5
1.1 Scope.....	5
1.2 EUT Description	5
1.3 EUT Operation.....	5
1.4 Modifications to Equipment.....	5
1.5 Test Site.....	5
1.6 Radiated Measurements	6
1.7 Applicable Documents and Clauses	6
2.0 Fundamental Power.....	7
2.1 Test Procedure.....	7
2.2 Test Criteria.....	7
2.3 Test Results, Peak Power	7
2.3.1 Normal Conditions	Error! Bookmark not defined.
2.3.2 Extreme Conditions.....	Error! Bookmark not defined.
3.0 Frequency Stability	9
3.1 Test Procedure.....	9
3.2 Test Criteria.....	9
3.3 Test Results	9
4.0 Necessary Bandwidth Mask.....	10
4.1 Test Procedure.....	10
4.2 Test Criteria.....	10
4.3 Test Results	10
4.3.1 Step 1: Zero Span Power, Modulated.....	10
4.3.2 Step 2: Mask, Average	11
4.3.3 Step 3: Mask, Max Hold.....	Error! Bookmark not defined.
5.0 Radiated Spurious Emissions.....	13
5.1 Test Criteria.....	13
5.1 Test Results	13
5.2 Low Channel	13
6.0 Equipment.....	25
6.1 Radiated Emissions	25
6.2 Fundamental Power, Bandwidth, Duty Cycle, Mask, Conducted Spurious	25
7.0 Measurement Bandwidths.....	26
Appendix: Policy, Rationale, and Evaluation of EMC Measurement Uncertainty	27
End of Report	27

NOTICE:

(1) This Report must not be used to claim product endorsement, by ANAB, ilac-MRA, NIST, the FCC or any other Agency. This report also does not warrant certification by ANAB or NIST.

(2) This report shall not be reproduced except in full, without the written approval of Nemko USA, Inc.

(3) The significance of this report is dependent on the representative character of the test sample submitted for evaluation and the results apply only in reference to the sample tested. The manufacturer must continuously implement the changes shown herein to attain and maintain the required degree of compliance.



Compliance Certificate

FCC MRA Designation Number: US3166
ANAB Accreditation Number: AT-3165.01

Applicant	Device & Test Identification	
Swimmersive Co. dba Zygo 16854 Mooncrest Dr Encino, CA 91436 Certificate Date: 8/21/2024	FCC ID: 2APZQ- ZYG02T Industry Canada ID: 23961- ZYG02T Model(s): Zyg02T Laboratory Project ID: PRJ0050267	

The device named above was tested utilizing the following documents and found to be in compliance with the required criteria:

Requirement	Reference	Detail
FCC 47 CFR Part 15 C	15.236	47 CFR § 15.236 - Operation of wireless microphones in the bands 54-72 MHz, 76-88 MHz, <u>174-216 MHz</u> , 470-608 MHz and 614-698 MHz. [And by reference ETSI EN 300 422-1 V1.4.2 (2011-08)]
FCC 47 CFR Part 15 C	15.236	Radiated emission limits; general requirements.
FCC 47 CFR Part 15 C	15.205	Restricted Bands of Operation
KDB 558074 D01	D01	DTS Measurement Guidance v05r02
KDB 412172	D01	Guidelines for Determining the ERP and EIRP of an RF Transmitting System
OET Bulletin 65*	Edition 97-01, and Supplement C, Ed. 01-01	Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields
RSS-210	Issue 10 Am 1	Annex G - Low-Power Radio Apparatus Operating in the Television Bands
RSS-Gen	Issue 5 Am 1	General Requirements and Information for the Certification of Radio Apparatus
RSS-102	Issue 5	Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)

*MPE is reported separately from this document. **Corresponding RSS references are listed in the body of the report.

I, Larry Finn, for Nemko USA, Inc., being familiar with the above requirements and test procedures have reviewed the test setup, measured data, and this report. I believe them to be true and accurate.

Larry Finn
Laboratory Manager

This report has been reviewed and accepted by the Applicant. The undersigned is responsible for ensuring that this device will continue to comply with the requirements listed above.

Representative of Applicant

1.0 Introduction

1.1 Scope

This report describes the extent to which the equipment under test (EUT) conformed to the intentional radiator requirements of the United States and Canada.

Nemko USA, Inc. follows the guidelines of National Institute of Standards and Technology (NIST) for all uncertainty calculations, estimates, and expressions thereof for electromagnetic compatibility testing.

1.2 EUT Description

Table 1.2.1: Equipment Under Test		
Manufacturer / Model	Serial #	Description
Swimmersive Model: Zyg02T	none	TX PCBA prototype w/W.FL VHF RF connector and battery leads.

Table 1.2.2: Support Equipment		
Manufacturer / Model	Serial #	Description
None		

This device is a hand-held remote wireless microphone use in training aquatic athletes by sending the coach's instructions, or other recorded audio, over the air (VHF) to headset receivers worn by the athletes.

This report concerns the wireless microphone transmitter in the base station unit.

The Bluetooth transmitter (subject to FCC 15.247) as contained in the EUT is reported separately.

This device is powered by an internal 3.7 V Li-Ion battery that is recharged on a cradle then via cable to a USB power source.

1.3 EUT Operation

The EUT was exercised in a manner consistent with normal operations. Antenna connectors were added to the test samples only to allow conducted measurements.

1.4 Modifications to Equipment

None.

1.5 Test Site

Measurements were made at the Nemko USA, Inc. semi-anechoic facility (FCC US3166, IC 3036B-1) in Round Rock, Texas. The site is registered with the FCC under Section 2.948 and Industry Canada per RSS-GEN, and is subsequently confirmed by laboratory accreditation (ANAB). The test site is located at 1601 North A.W. Grimes Boulevard, Suite B, Round Rock, Texas, 78665. CAB Identifier: US 0123.

1.6 Radiated Measurements

Table 1.6 1 Measurement Corrections	
Parameter	From Sums Of
Radiated Field Strength	Raw Measured Level + Antenna Factor + Cable Losses – Amplifier Gain
Conducted Antenna Port	Raw Measured Level + Attenuator Factor + Cable Losses
Conducted Mains Port	Raw Measured Level + LISN Factor + Cable/Filter/Limiter Losses

Additionally, measurement distance extrapolation factors (such as 1/d above 30 MHz) are applied and documented where used.

1.7 Applicable Documents and Clauses

Table 1.7.1: Applicable Documents	
Document	Title
47 CFR	Part 15 – Radio Frequency Devices Subpart C - Intentional Radiators
RSS-210 Issue 9 Annex G	Low-Power Radio Apparatus Operating in the Television Bands
ETSI EN 300 422-1 V1.4.2 (2011-08)	Electromagnetic compatibility and Radio spectrum Matters (ERM); Wireless microphones in the 25 MHz to 3 GHz frequency range; Part 1: Technical characteristics and methods of measurement European Standard
RSS-Gen Issue 5	General Requirements and Information for the Certification of Radio Apparatus
ANSI C63.10:2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

2.0 Fundamental Power

2.1 Test Procedure

Peak power is measured using the conducted method at the antenna port.

2.2 Test Criteria

47 CFR (USA) // IC (Canada)		
Section Reference	Parameter	Date
15.236 // RSS-210 Annex G.3.1	EIRP Fundamental Power 50 mW -50% to +20% of declared power	08/20/2024

2.3 Test Results, Peak Power

Measured in 1 MHz RBW, 1 MHz VBW.

Table 2.3.2 EIRP Power


Declared: 30 mW

Limits: +20% = 36 mW, -50% = 15 mW

Frequency MHz	Highest Measured Conducted Antenna Port Power dBm	Antenna Gain dBi	EIRP Power dBm	EIRP Power dBm (mW)
175.00	18.861	-4.99	13.871	24.38
194.500	11.328	3.5	14.828	30.39
209.5	10.785	3.48	14.265	26.7

The EUT satisfied the requirement.

2.3.1 Output Power

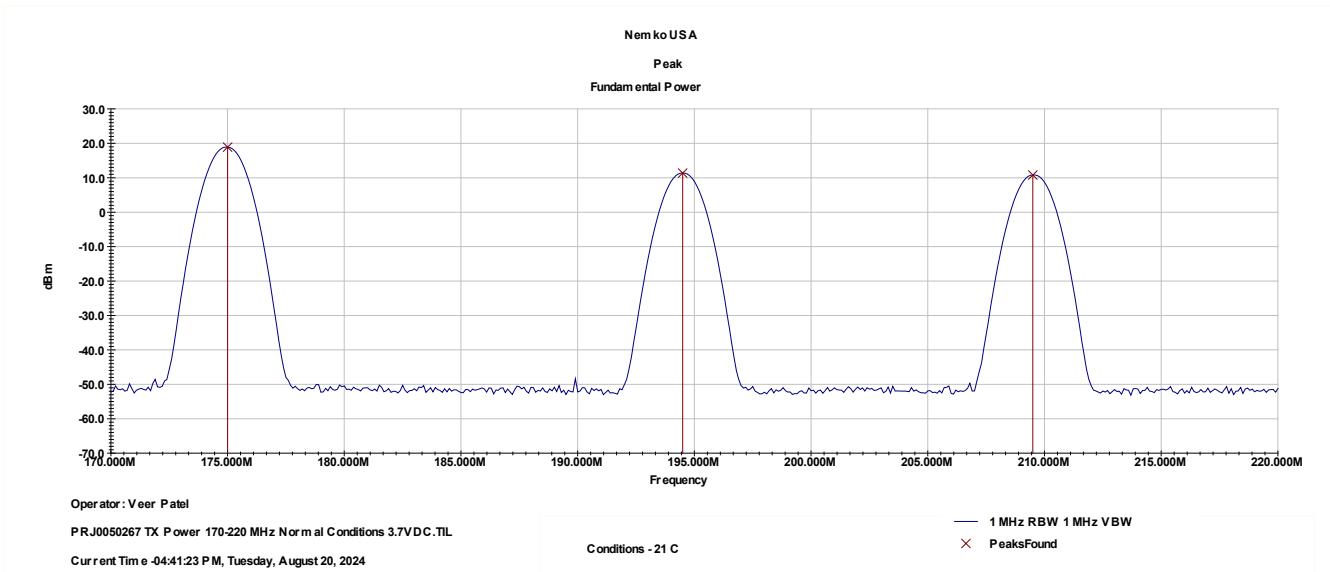

3.0 Frequency Stability

3.1 Test Procedure

Frequency is measured with EUT acclimated to temperature and operating voltage extremes.

3.2 Test Criteria

47 CFR (USA) // IC (Canada)		
Section Reference	Parameter	Date
15.236 // RSS-210 Annex G.3.1	Frequency Stability +/- 0.005% or +/- 8.77 kHz	6 May 2024

3.3 Test Results

The EUT satisfied the requirements.

**Table 3.3.1 Frequency Stability in MHz
Measured in 100 Hz RBW**

Temperature	Voltage	Bottom Channel 175.5	Middle Channel 194.000	Top Channel 214.5
-20 C	3.3 V	175.4973969	193.997059	214.496717
-20 C	3.7 V	175.497273	193.996958	214.49657
20 C	3.7 V	175.4955	193.995	214.496
50 C	3.7 V	175.495720	193.995410	214.494851
50 C	3.3 V	175.495744	193.995280	214.494851
Maximum Frequency Error (MHz):		0.0045	0.0050	0.0051

4.0 Necessary Bandwidth Mask

4.1 Test Procedure

Bandwidth is measured by conducted means. A recording of the results is included.

4.2 Test Criteria

47 CFR (USA) // IC (Canada)		
Section Reference	Parameter	Date(s)
15.236 // RSS-210 Annex G.3.1	Necessary BW Mask	08/21/2024

4.3 Test Results



The EUT was characterized against the necessary bandwidth mask.


4.3.1 Step 1: Zero Span Power, Modulated

Table 4.3.1 Power in Zero Span with Modulation 20 Video Averages, Sweep Time 2 seconds, RBW/VBW 1 MHz		
Bottom Channel dBm	Middle Channel dBm	Top Channel dBm
19.9	11.54	10.96

Mask data presented below. The EUT satisfied the requirements.

4.3.2 Step 2,3 : Mask, Max Hold

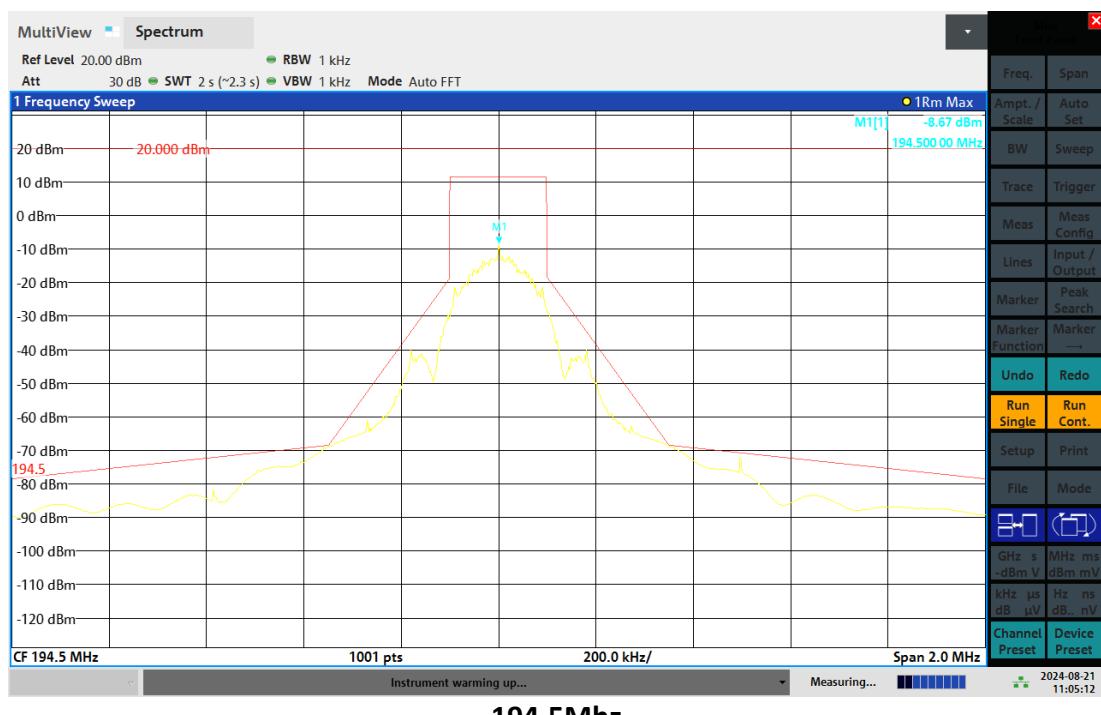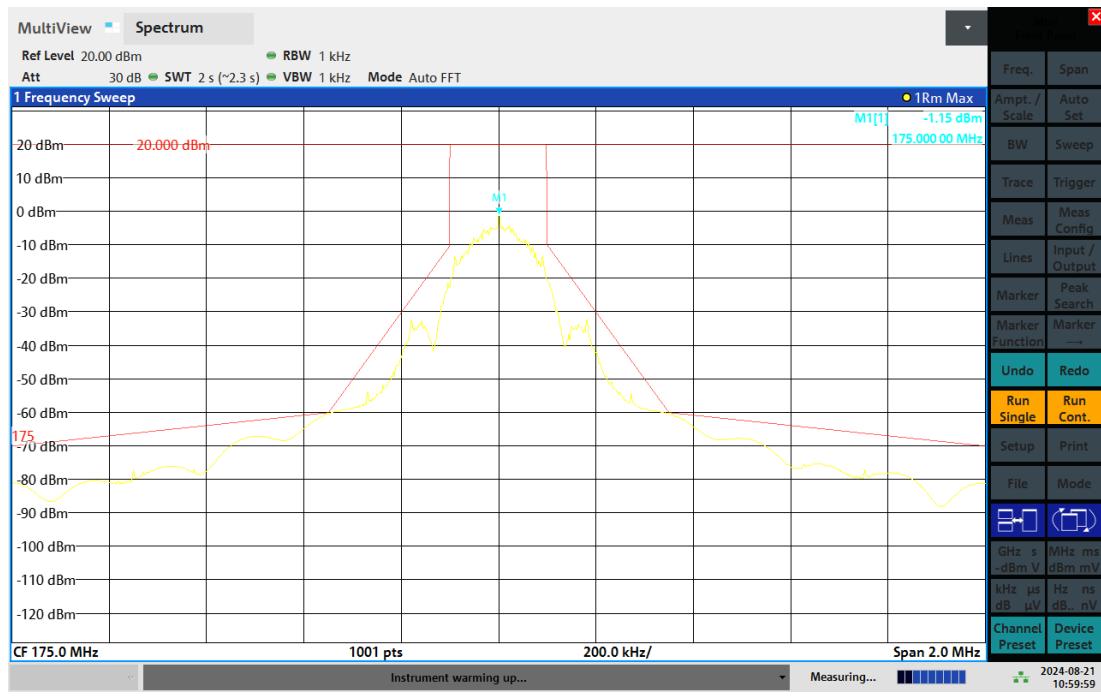

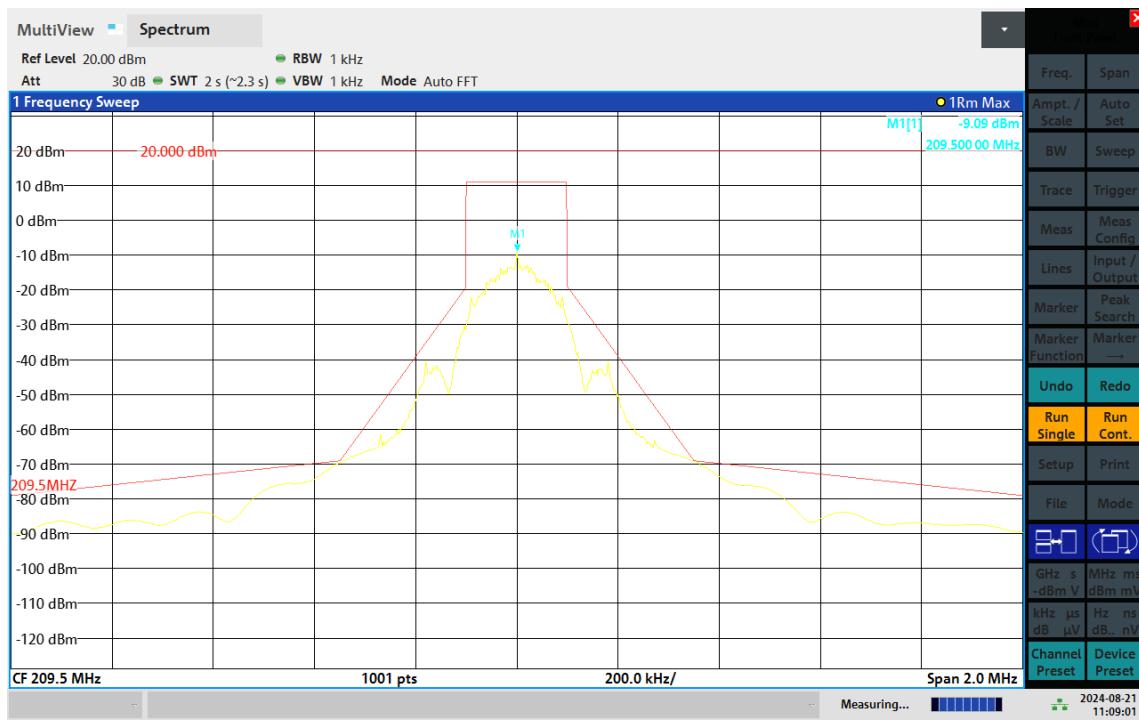

5.0 Radiated Spurious Emissions


5.1 Test Criteria

47 CFR (USA) // IC (Canada)		
Section Reference	Parameter	Date(s)
15.236 // RSS-210 Annex G.3.1	Radiated Spurious Emissions	05/06/2024

5.1 Test Results


5.2 Low Channel

30MHz - 1GHz Vertical Polarity Measured Emissions Data

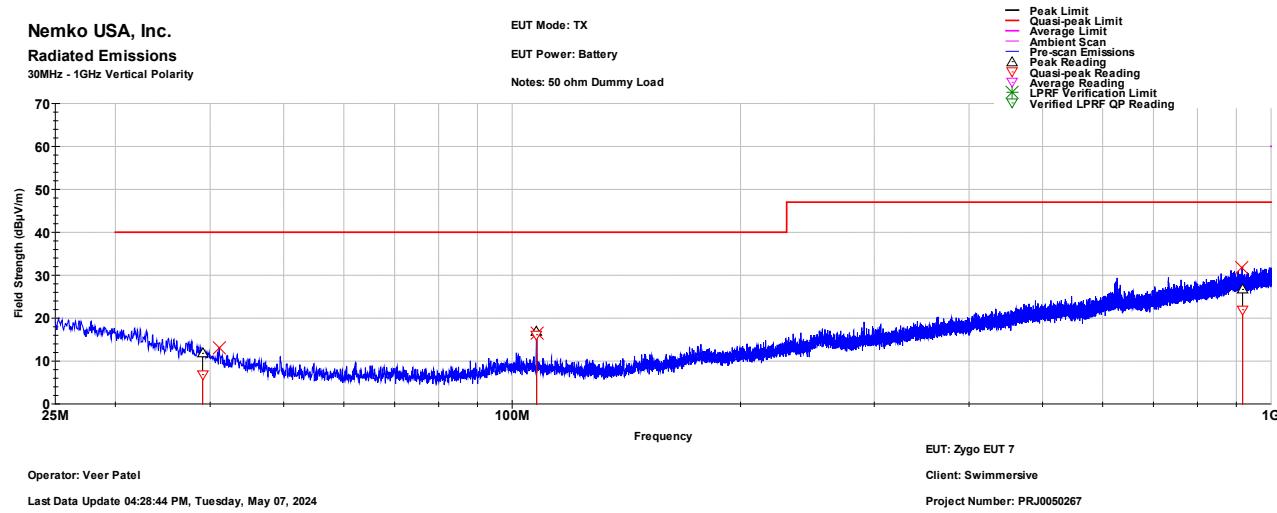


Frequency (MHz)	EUT Direction (Degrees)	Antenna Height (cm)	Quasi-peak Reading (dB μ V)	Quasi-peak Limit (dB μ V)	Quasi-peak Margin (dB)	Quasi-peak Results	Peak Reading (dB μ V)
39.094	113.000	139.000	6.859	40.000	-33.141	PASS	11.785
107.697	123.000	234.000	16.122	40.000	-23.878	PASS	16.804
917.231	23.000	111.000	21.942	47.000	-25.058	PASS	26.678

30MHz - 1GHz Horizontal Polarity Measured Emissions Data

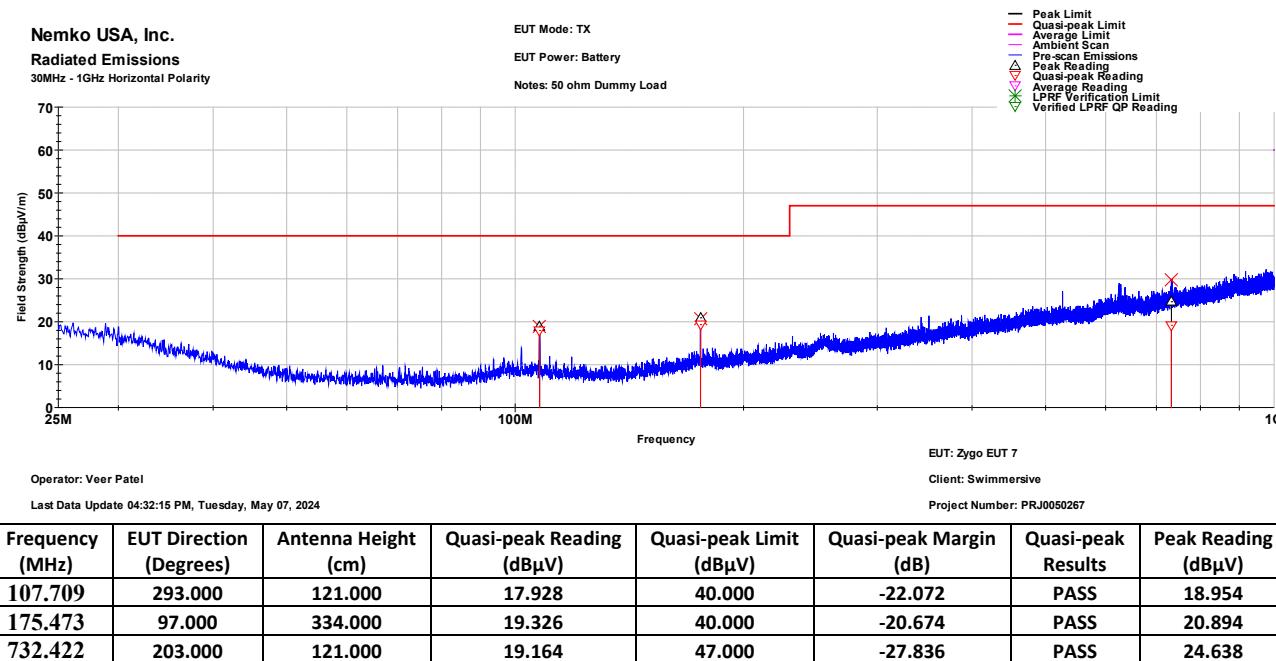

1GHz - 4GHz Vertical Polarity Measured Emissions Data:

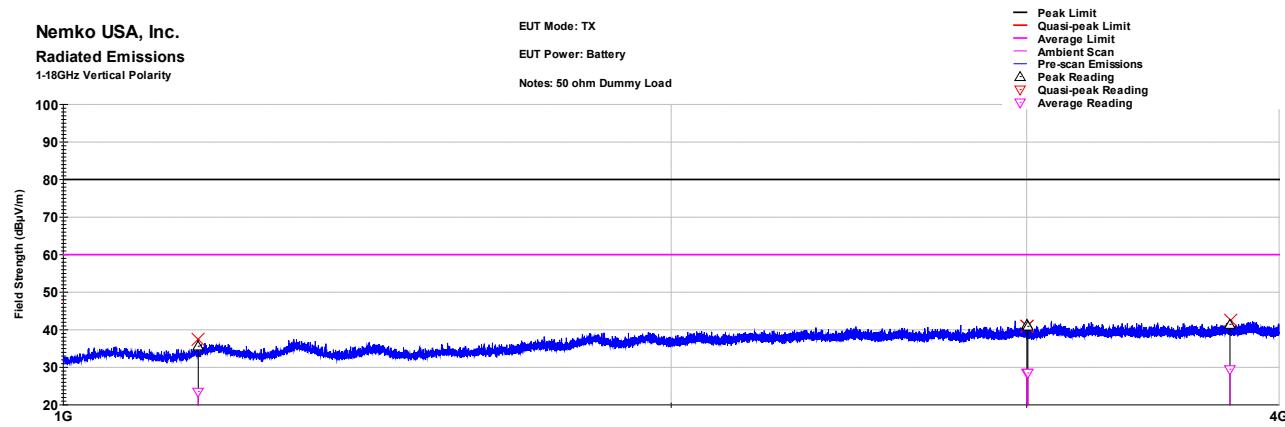

Operator: Veer Patel

Last Data Update 10:45:16 AM, Wednesday, May 08, 2024


EUT: Zyg EUT 7

Client: Swimmersive

Project Number: PRJ0050267

Frequency (MHz)	EUT Direction (Degrees)	Antenna Height (cm)	Peak Reading (dB μ V)	Peak Limit (dB μ V)	Peak Margin (dB)	Peak Results	Average Reading (dB μ V)	Average Limit (dB μ V)	Average Margin (dB)	Average Results
1166.44	165	100	35.598	80.000	-44.402	PASS	23.517	60.000	-36.483	PASS
3000.99	49	235	41.323	80.000	-38.677	PASS	28.565	60.000	-31.435	PASS
3003.78	65	255	40.911	80.000	-39.089	PASS	28.511	60.000	-31.489	PASS
3782.45	239	296	41.423	80.000	-38.577	PASS	29.454	60.000	-30.546	PASS

1GHz - 4GHz Horizontal Polarity Measured Emissions Data

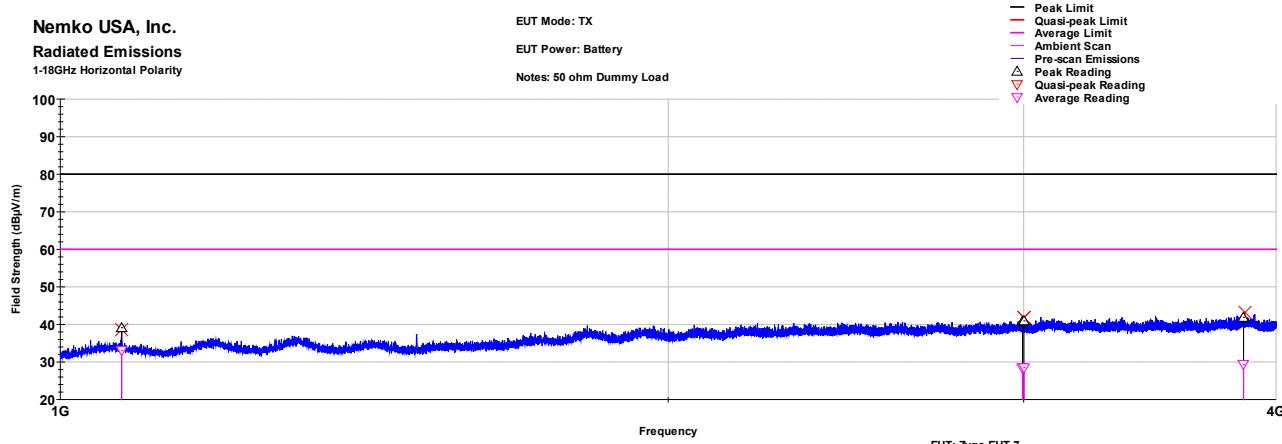

Operator: Veer Patel


Last Data Update 10:53:52 AM, Wednesday, May 08, 2024

EUT: Zyg EUT 7

Client: Swimmersive


Project Number: PRJ0050267

Frequency (MHz)	EUT Direction (Degrees)	Antenna Height (cm)	Peak Reading (dB μ V)	Peak Limit (dB μ V)	Peak Margin (dB)	Peak Results	Average Reading (dB μ V)	Average Limit (dB μ V)	Average Margin (dB)	Average Results
1072.46	178	144	39.105	80.000	-40.895	PASS	33.022	60.000	-26.978	PASS
2996.00	0	124	40.623	80.000	-39.377	PASS	28.549	60.000	-31.451	PASS
3000.39	330	205	40.923	80.000	-39.077	PASS	28.556	60.000	-31.444	PASS
3854.44	359	215	41.882	80.000	-38.118	PASS	29.297	60.000	-30.703	PASS

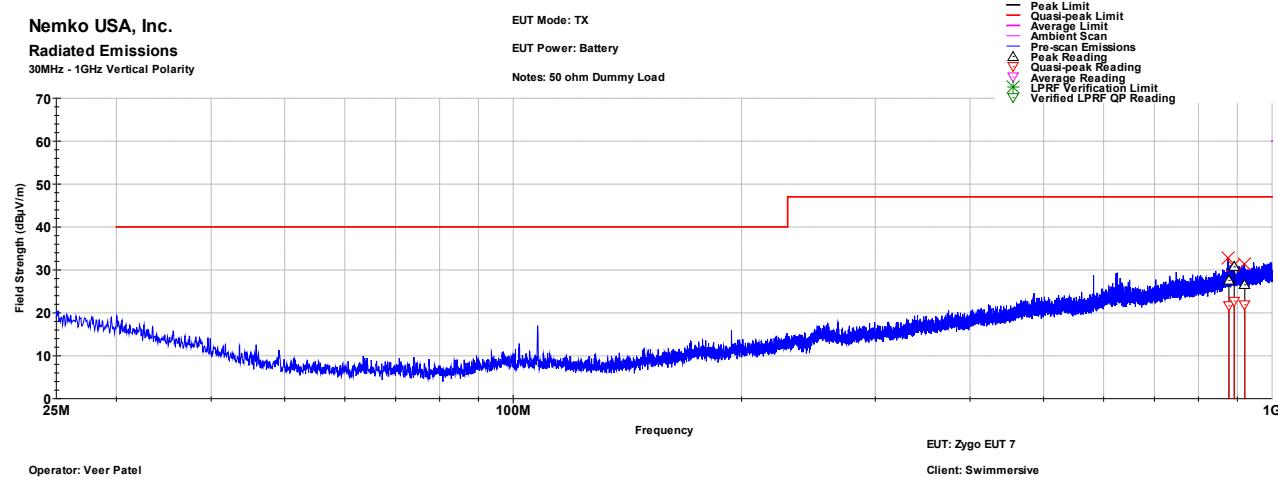
Mid Channel**30MHz - 1GHz Vertical Polarity Measured Emissions Data**

Frequency (MHz)	EUT Direction (Degrees)	Antenna Height (cm)	Quasi-peak Reading (dBµV)	Quasi-peak Limit (dBµV)	Quasi-peak Margin (dB)	Quasi-peak Results	Peak Reading (dBµV)
877.316	338.000	250.000	21.626	47.000	-25.374	PASS	27.553
891.807	67.000	250.000	22.729	47.000	-24.271	PASS	30.708
920.570	327.000	100.000	21.876	47.000	-25.124	PASS	26.544

30MHz - 1GHz Horizontal Polarity Measured Emissions Data

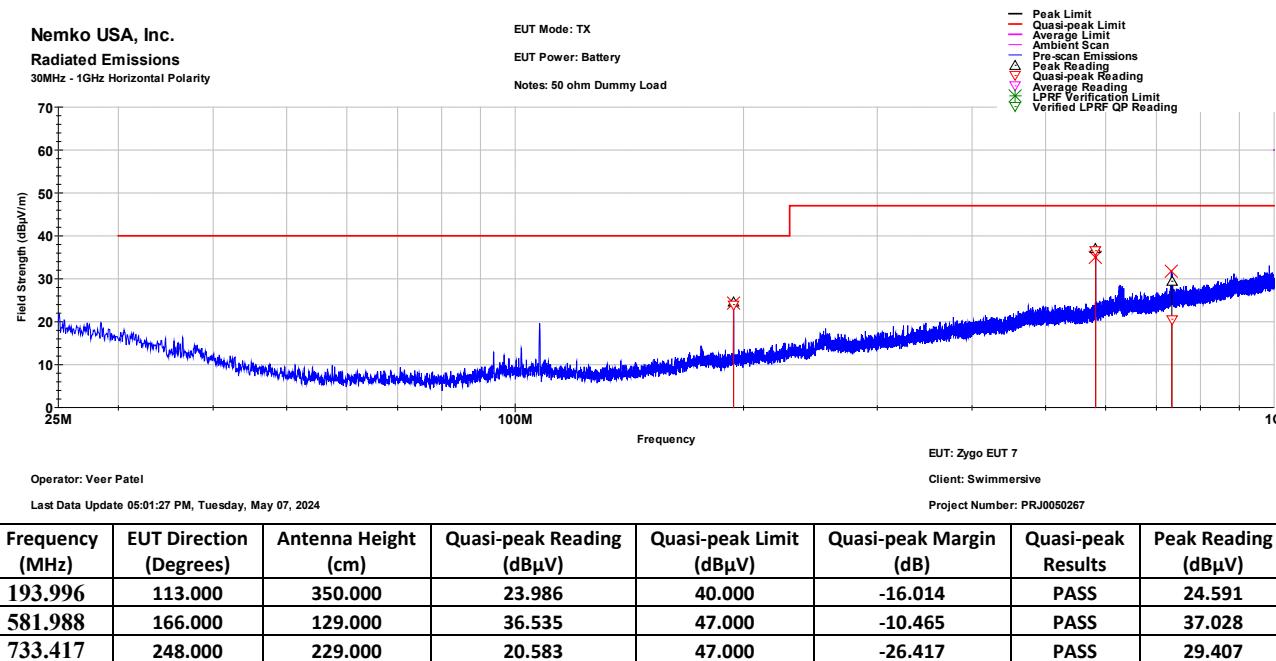

1GHz - 4GHz Vertical Polarity Measured Emissions Data:

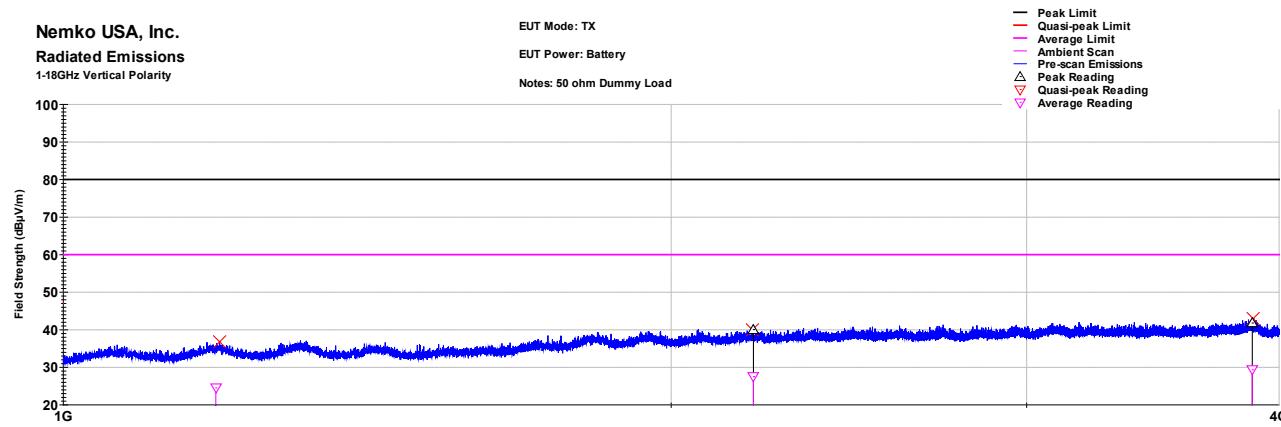

Operator: Veer Patel

Last Data Update 10:17:37 AM, Wednesday, May 08, 2024


EUT: Zyg EUT 7

Client: Swimmersive

Project Number: PRJ0050267

Frequency (MHz)	EUT Direction (Degrees)	Antenna Height (cm)	Peak Reading (dB μ V)	Peak Limit (dB μ V)	Peak Margin (dB)	Peak Results	Average Reading (dB μ V)	Average Limit (dB μ V)	Average Margin (dB)	Average Results
1190.00	11	205	-905.245	80.000	-985.245	PASS	24.526	60.000	-35.474	PASS
2196.78	32	368	40.039	80.000	-39.961	PASS	27.513	60.000	-32.487	PASS
3879.93	0	116	41.783	80.000	-38.217	PASS	29.343	60.000	-30.657	PASS

1GHz - 4GHz Horizontal Polarity Measured Emissions Data

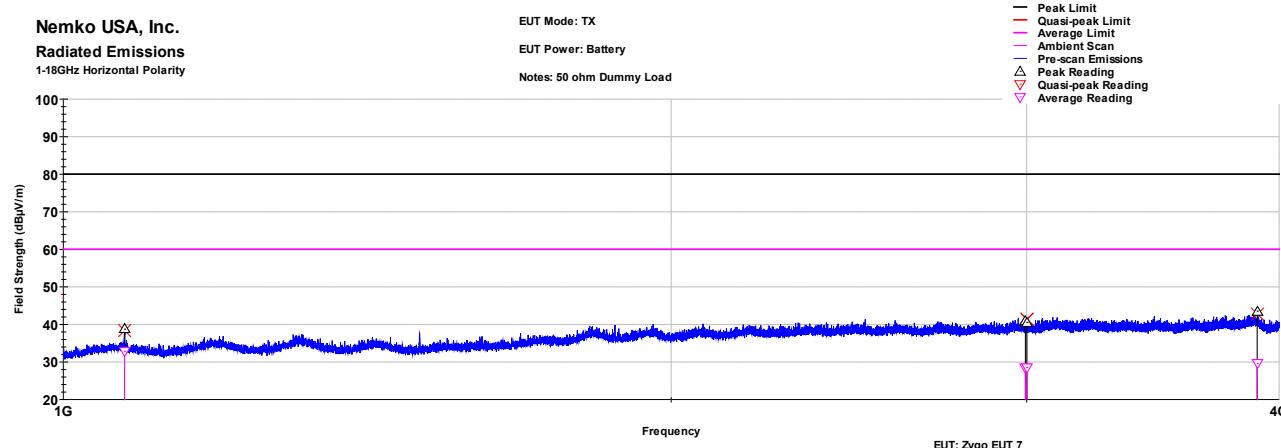

Operator: Veer Patel

Last Data Update 10:25:54 AM, Wednesday, May 08, 2024

EUT: Zyg EUT 7


Client: Swimmersive

Project Number: PRJ0050267

Frequency (MHz)	EUT Direction (Degrees)	Antenna Height (cm)	Peak Reading (dB μ V)	Peak Limit (dB μ V)	Peak Margin (dB)	Peak Results	Average Reading (dB μ V)	Average Limit (dB μ V)	Average Margin (dB)	Average Results
1072.42	181	266	38.707	80.000	-41.293	PASS	32.845	60.000	-27.155	PASS
2995.46	203	379	40.854	80.000	-39.146	PASS	28.555	60.000	-31.445	PASS
3000.73	186	348	40.503	80.000	-39.497	PASS	28.545	60.000	-31.455	PASS
3901.62	95	255	43.527	80.000	-36.473	PASS	29.566	60.000	-30.434	PASS

Top Channel

30MHz - 1GHz Vertical Polarity Measured Emissions Data

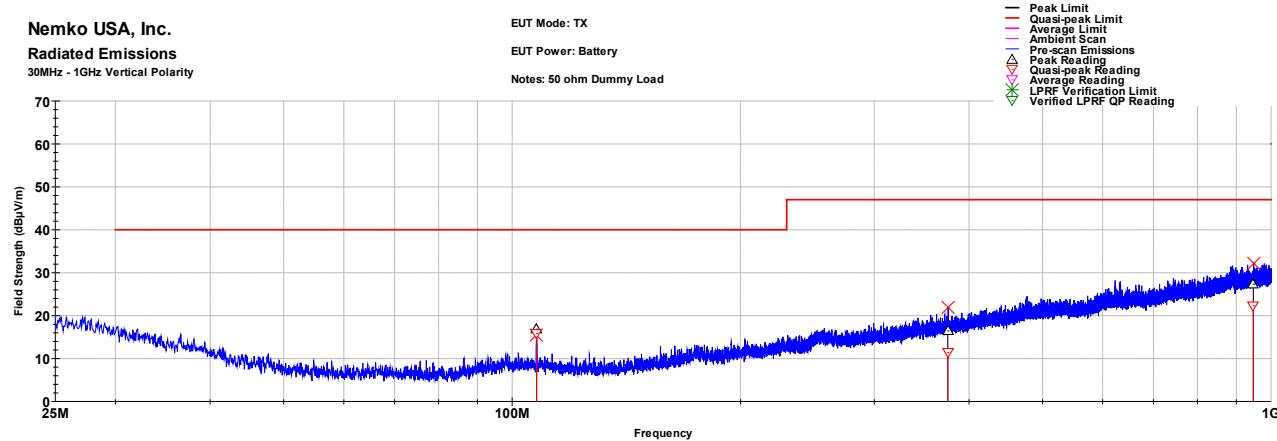

Operator: Veer Patel

Last Data Update 08:52:18 AM, Wednesday, May 08, 2024


EUT: Zyg EUT 7

Client: Swimmersive

Project Number: PRJ0050267

Frequency (MHz)	EUT Direction (Degrees)	Antenna Height (cm)	Quasi-peak Reading (dB μ V)	Quasi-peak Limit (dB μ V)	Quasi-peak Margin (dB)	Quasi-peak Results	Peak Reading (dB μ V)
107.699	33.000	271.000	15.806	40.000	-24.194	PASS	16.827
374.978	157.000	350.000	11.371	47.000	-35.629	PASS	16.419
947.796	292.000	350.000	22.295	47.000	-24.705	PASS	27.314

30MHz - 1GHz Horizontal Polarity Measured Emissions Data

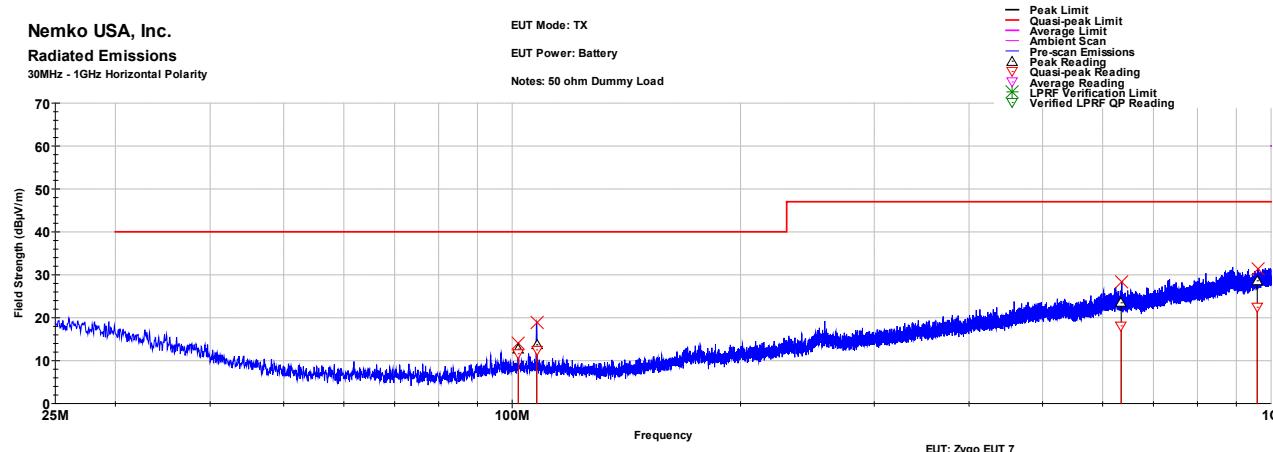

Operator: Veer Patel

Last Data Update 08:56:53 AM, Wednesday, May 08, 2024


EUT: Zyg EUT 7

Client: Swimmersive

Project Number: PRJ0050267


Frequency (MHz)	EUT Direction (Degrees)	Antenna Height (cm)	Quasi-peak Reading (dB μ V)	Quasi-peak Limit (dB μ V)	Quasi-peak Margin (dB)	Quasi-peak Results	Peak Reading (dB μ V)
101.888	248.000	121.000	11.593	40.000	-28.407	PASS	12.676
107.727	67.000	250.000	12.493	40.000	-27.507	PASS	13.673
634.744	338.000	266.000	18.077	47.000	-28.923	PASS	23.468
959.122	203.000	250.000	22.423	47.000	-24.577	PASS	28.581

1GHz - 4GHz Vertical Polarity Measured Emissions Data:

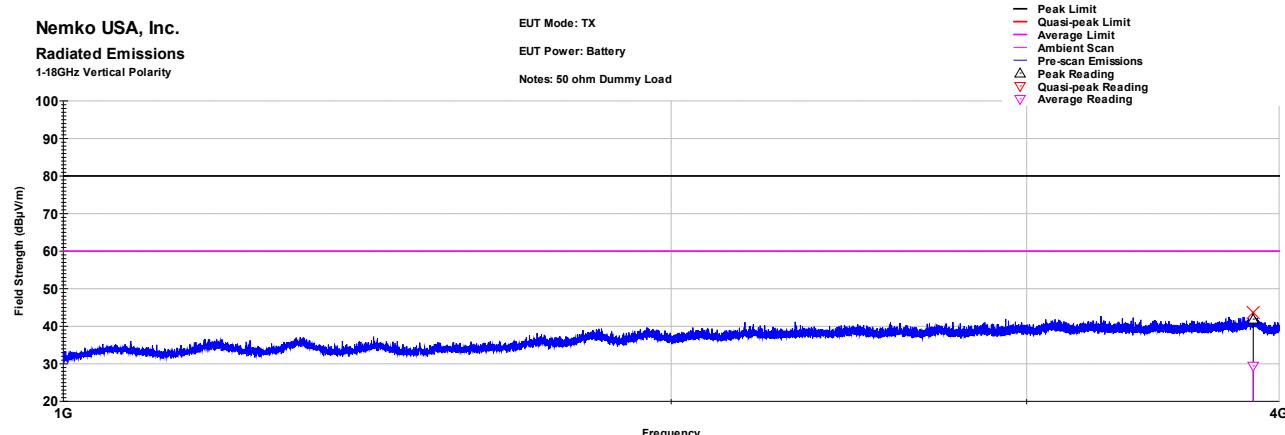

Frequency (MHz)	EUT Direction (Degrees)	Antenna Height (cm)	Peak Reading (dB μ V)	Peak Limit (dB μ V)	Peak Margin (dB)	Peak Results	Average Reading (dB μ V)	Average Limit (dB μ V)	Average Margin (dB)	Average Results
3884.31	131	135	41.882	80.000	-38.118	PASS	29.452	60.000	-30.548	PASS

1GHz - 4GHz Horizontal Polarity Measured Emissions Data

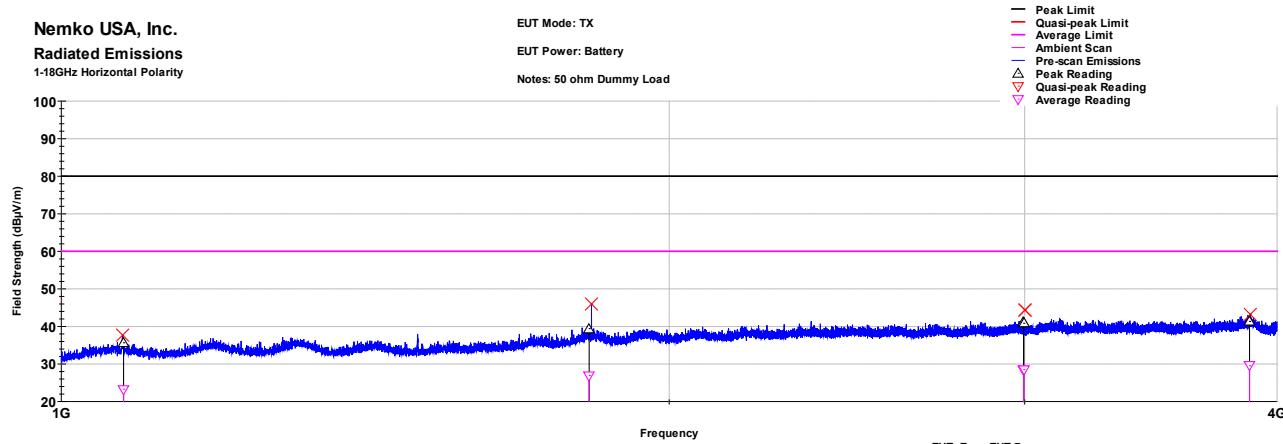

Operator: Veer Patel

Last Data Update 09:55:42 AM, Wednesday, May 08, 2024

EUT: Zyg EUT 7

Client: Swimmersive

Project Number: PRJ0050267

Frequency (MHz)	EUT Direction (Degrees)	Antenna Height (cm)	Peak Reading (dB μ V)	Peak Limit (dB μ V)	Peak Margin (dB)	Peak Results	Average Reading (dB μ V)	Average Limit (dB μ V)	Average Margin (dB)	Average Results
1073.66	0	175	35.621	80.000	-44.379	PASS	23.265	60.000	-36.735	PASS
1825.79	272	185	39.392	80.000	-40.608	PASS	26.941	60.000	-33.059	PASS
2996.19	359	306	41.025	80.000	-38.975	PASS	28.510	60.000	-31.490	PASS
2996.68	219	134	40.839	80.000	-39.161	PASS	28.503	60.000	-31.497	PASS
3876.60	103	286	41.330	80.000	-38.670	PASS	29.518	60.000	-30.482	PASS

6.0 Equipment

6.1 Radiated Emissions

Manufacturer	Model	Equipment Nomenclature	Serial Number	Calibration Due Date
Keysight	E4440A-AYZ	PSA Spectrum Analyzer	MY46186204	7/14/2024
Agilent	11713A	Switch Driver	MY44321972	NCR
ETS-Lindgren	3142C	Antenna, Biconilog, 26 MHz-3GHz	49383	4/17/2025
HP	8447D	Preamp, .1-1300MHz	1937A02800	10/28/2024
Miteq	AFS44-00101800-2S-10P-44	Amplifier, 40dB, 100MHz-18GHz	None	1/26/2025
ETS-Lindgren	3117	Antenna, Double Ridged Guide Horn, 1 - 18 GHz	99232	10/12/2024
evissaP	eP7123R-432	Cable, RF, N-N, 36', DC-18GHz	None	2/15/2026
evissaP	eP7123R-384	Cable, RF, N-N, 32', DC-18GHz	None	2/14/2026
evissaP	eP7031R-22FT	Cable, RF, N-N, 22', DC-18GHz	None	3/1/2026
evissaP	eP7031R-30FT	Cable, RF, N-N, 30', DC-18GHz	None	3/1/2026
evissaP	eP7101R-12	Cable, RF, SMA-SMA, 12", 2.92mm, DC-40GHz	None	3/1/2026
TDK	254	Enclosure, Shielded, RFI/EMI, NSA, 3m & 10m, 30MHz - 1 GHz	23177	2/3/2026
evissaP	eP7033R-6FT	Cable, RF, SMA-N, 6', DC-18GHz	None	3/1/2026
evissaP	eP7101R-12	Cable, RF, SMA-SMA, 12", 2.92mm, DC-40GHz	None	3/1/2026
evissaP	eP7033R-6FT	Cable, RF, SMA-N, 6', DC-18GHz	None	3/1/2026
evissaP	eP7033R-6FT	Cable, RF, SMA-N, 6', DC-18GHz	None	3/1/2026

6.2 Fundamental Power, Bandwidth, Duty Cycle, Mask, Conducted Spurious

Manufacturer	Model	Equipment Nomenclature	Serial Number	Calibration Due Date
Rohde & Schwarz	FSV3044	Analyzer, Signal, 44GHz	101602	2/9/2025
MCE/Weinschel	34-20-34	Attenuator,20dB 25W, DC-4GHz	BP7921	4/11/2025
MCE/Weinschel	34-20-34	Attenuator,20dB 25W, DC-4GHz	BP7923	4/11/2025
C397	eP7101R-132	Cable,RF,SMA-SMA,11',2.92mm,DC	None	3/1/2025

7.0 Measurement Bandwidths

Radiated Emissions Spectrum Analyzer Bandwidth and Measurement Time - Peak Scan				
Frequency Band Start (MHz)	Frequency Band Stop (MHz)	6 dB Bandwidth (kHz)	Number of Ranges Used	Measurement Time per Range
0.009	0.15	0.3	2	Multiple Sweeps
0.15	30	9	6	Multiple Sweeps
30	1000	120	2	Multiple 800 mS Sweeps
1000	6000	1000	2	Multiple Sweeps
6000	18000	1000	2	Multiple Sweeps
18000	26500	1000	2	Multiple Sweeps

*Notes:

1. The settings above are specifically calculated for the E4440A series of spectrum analyzers, which have 8,000 data points per range.
2. The measurement receiver resolution bandwidth setting was 300 Hz for quasi-peak measurements from 9-150 kHz.
3. The measurement receiver resolution bandwidth setting was 9 kHz for quasi-peak measurements from 0.15-30 MHz.
4. The measurement receiver resolution bandwidth setting was 120 kHz for quasi-peak measurements from 30-1000 MHz.
5. The measurement receiver resolution bandwidth setting was 1 MHz for average measurements from 1-18 GHz.

Appendix: Policy, Rationale, and Evaluation of EMC Measurement Uncertainty

All uncertainty calculations, estimates and expressions thereof shall be in accordance with ANAB policy. Since Nemko USA, Inc. operates in accordance with ANAB Document Number AR 2250: 2021/06/16, all instrumentation having an effect on the accuracy or validity of tests shall be periodically calibrated or verified traceable to national standards by a competent calibration laboratory. The certificates of calibration or verification on this instrumentation shall include estimates of uncertainty as required by ANAB Document Number AR 2250.

1. Rationale and Summary of Expanded Uncertainty.

Each piece of instrumentation at Nemko USA that is used in making measurements for determining conformance to a standard (or limit), shall be assessed to evaluate its contribution to the overall uncertainty of the measurement in which it is used. The assessment of each item will be based on either a type A evaluation or a type B evaluation. Most of the evaluations will be type B, since they will be based on the manufacturer's statements or specifications of the calibration tolerances, or uncertainty will be stated along with a brief rationale for the type of evaluation and the resulting stated uncertainties.

The individual uncertainties included in the combined standard uncertainty for a specific test result will depend on the configuration in which the item of instrumentation is used. The combination will always be based on the law of propagation of uncertainty. Any systematic effects will be accommodated by including their uncertainties, in the calculation of the combined standard uncertainty; except that if the direction and amount of the systematic effect cannot be determined and separated from its uncertainty, the whole effect will be treated as uncertainty and combined along with the other elements of the test setup.

Type A evaluations of standard uncertainty will usually be based on calculating the standard deviation of the mean of a series of independent observations, but may be based on a least-squares curve fit or the analysis of variance for unusual situations. Type B evaluations of standard uncertainty will usually be based on manufacturer's specifications, data provided in calibration reports, and experience. The type of probability distribution used (normal, rectangular, a priori, or u-shaped) will be stated for each Type B evaluation.

In the evaluation of the uncertainty of each type of measurement, the uncertainty caused by the operator will be estimated. One notable operator contribution to measurement uncertainty is the manipulation of cables to maximize the measured values of radiated emissions. The operator contribution to measurement uncertainty is evaluated by having several operators independently repeat the same test. This results in a Type A evaluation of operator-contributed measurement uncertainty.

A summary of the expanded uncertainties of Nemko USA's measurements is shown as Table 1. These are the worst-case uncertainties considering all operative influence factors.

Table 1: Summary of Measurement Uncertainties

Type of Measurement	Frequency Range	Meas. Dist.	Expanded Uncertainty U, dB (k=2)
Mains Conducted Emissions	150 kHz to 30 MHz	N/A	2.82
Telecom Conducted Emissions	150 kHz to 30 MHz	N/A	3.48
Radiated Emissions	30 to 1,000 MHz	10 m	4.82
	1 to 18 GHz	3 m	5.09
	18 to 26 GHz	3 m	4.42
	26 to 40 GHz	0.1 m	5.97

End of Report