

# RED DOT INFORMATION TECHNOLOGY SHENZHEN CO, LTD

## PRODUCT SPECIFICATION

Customer	
Customers part number	
Product Material Code	HD. TG-5. 0-12. 5-92-12
Working Band	5150MHz- 5850MHz
Issue Date	2023-12- 1 5
Release Version	A1
Author	Zou yang cheng

# Directory


Cover .....	1
Directory .....	2
One、Product parameters .....	3
Two、Vswr .....	4
Three、Efficiency/Gain/Directivity Diagram .....	5-6
Four、Product drawing .....	7

## One、 PRODUCT TECHNICAL SPECIFICATION

Frequency Range (MHz)	5150-5850
Input Impedance ( $\Omega$ )	50
VSWR	$\leq 2.0$
Radiation	Omni-directional
Gain (dBi)	2
Polarization Type	Linear polarization
Admitted Power Connector	2W
Connect Type	IPEX
Bandwidth (MHz)	700
Chassis Color	Black
Operation temperature (°C)	-40~+85
Store temperat (°C)	-40~+85

## Two 、 VSWR


Frequency (MHz)	5150	5850
VSWR	1.7991	1.8225

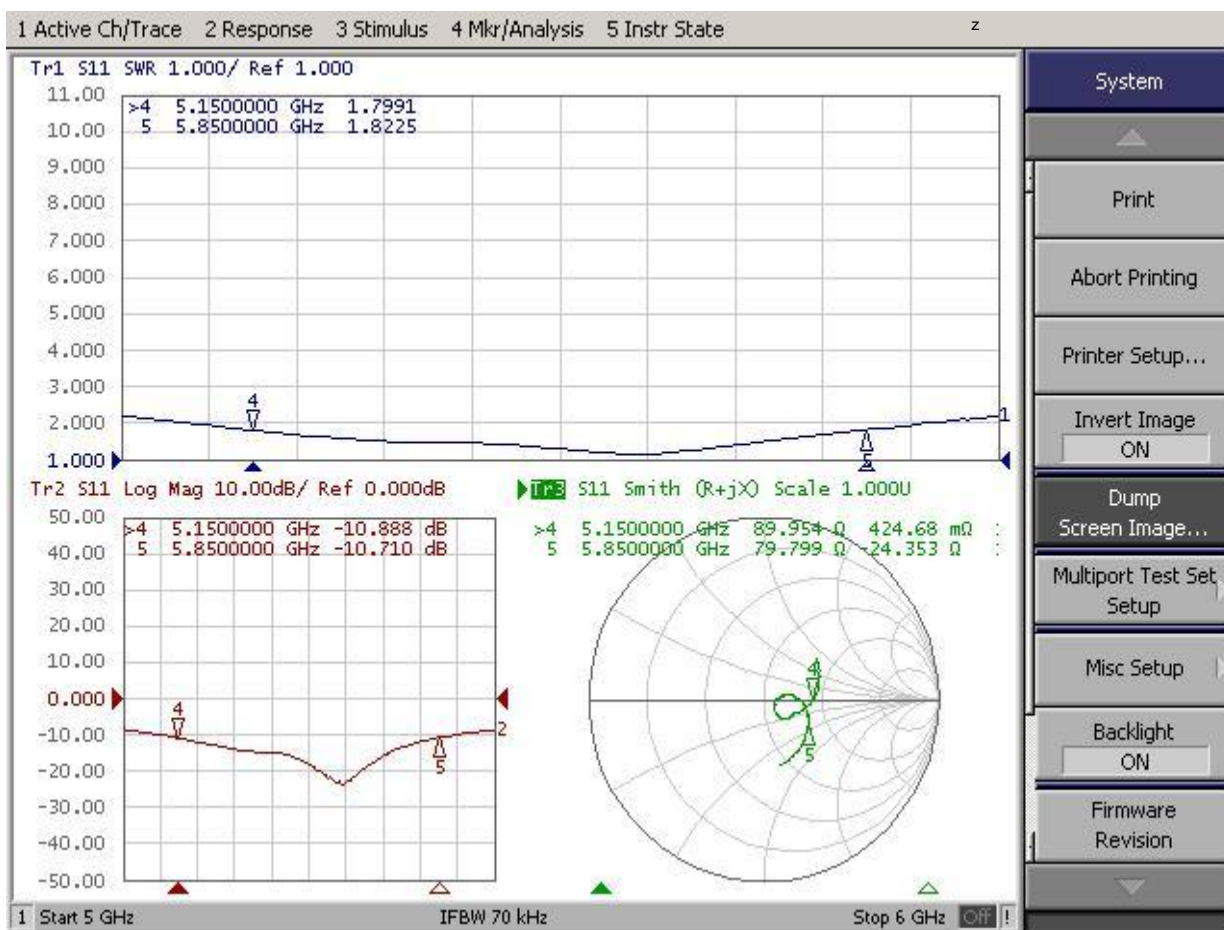


### Three、Efficiency/Gain/Directivity Diagram

Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)
5150	73.9	-1.31	2
5220	69.12	-1.6	1.4
5290	64.32	-1.92	1.05
5360	64.59	-1.9	0.98
5430	73.62	-1.33	1.32
5500	66.44	-1.78	0.88
5570	67.85	-1.68	1.11
5640	61.96	-2.08	1.02
5710	60.83	-2.16	1.05
5780	61.95	-2.45	1.35
5850	62.14	-2.07	1.23


5150.000MHz

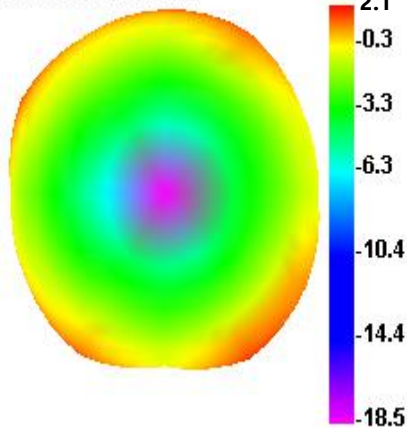


5150.000MHz H

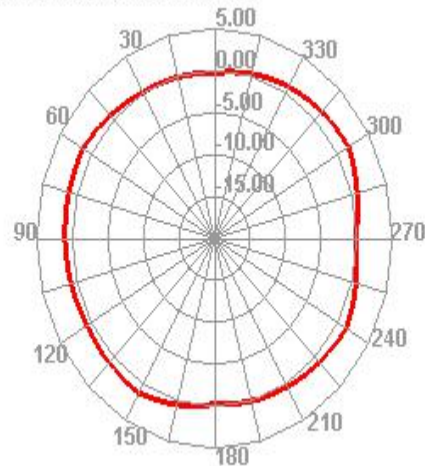


5150.000MHz E1

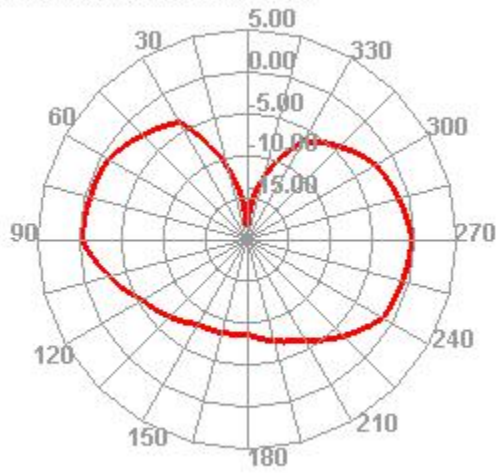


5150.000MHz E2

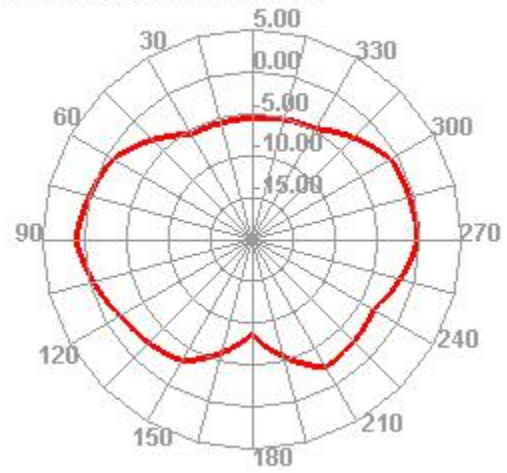


5850.000MHz

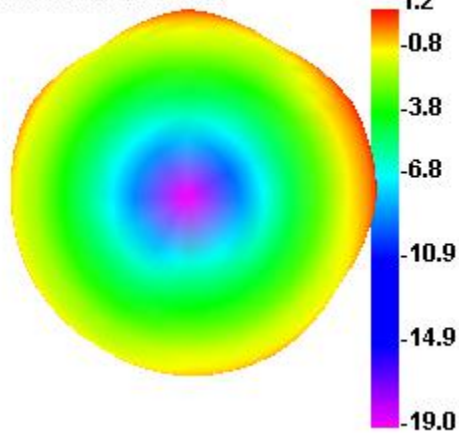


5850.000MHz H

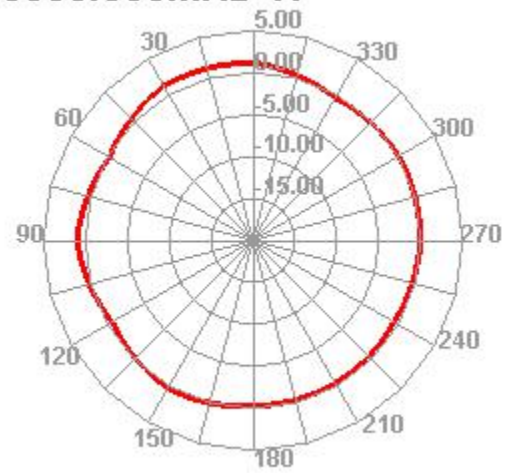

5850.000MHz

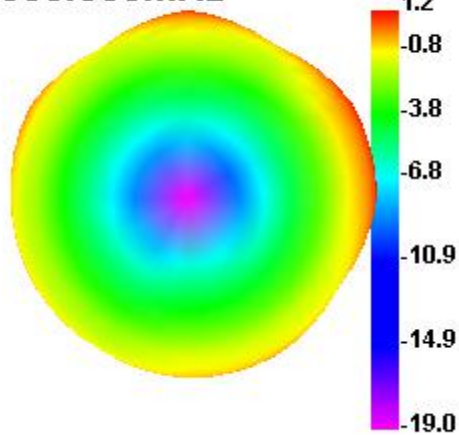

E' 5850.000MHz H

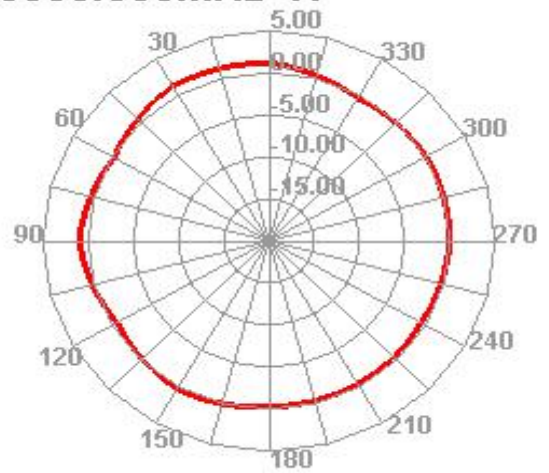

# Four、Product drawing

