



Test Report No.: RF190903N031



TEST REPORT



Applicant	Shenzhen VanTop Technology & Innovation Co., Ltd.
Address	502, 5th Flr. BLDG 4, MinQi Technology Park, No. 65 Lishan Road, Taoyuan Street, Nanshan District, Shenzhen, China

Manufacturer or Supplier	Shenzhen VanTop Technology & Innovation Co., Ltd.
Address	502, 5th Flr. BLDG 4, MinQi Technology Park, No. 65 Lishan Road, Taoyuan Street, Nanshan District, Shenzhen, China
Product	Projector
Brand Name	N/A
Model	LEISURE 3
Additional Model & Model Difference	LEISURE 3W, LEISURE 3 PLUS, LEISURE 3W PLUS ,LEISURE 3 PRO, PREMIUM LEISURE 3, LEISURE 450, LEISURE 450W, LEISURE 470, LEISURE 470W, LEISURE 480, LEISURE 480W, LEISURE 490, LEISURE 490W, C480,C480W, C490, C490W, See item 3.1 note
Date of tests	Sep. 03, 2019 ~ Oct. 08, 2019

The tests have been carried out according to the requirements of the following standard:

FCC Part 15, Subpart C, Section 15.247

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Tom Chen Project Engineer / EMC Department	Approved by Glyn He Assistant Manager / EMC Department
	
	Date: Oct. 15, 2019

This report is governed by, and incorporates by reference, CPS Conditions of Service as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1 SUMMARY OF TEST RESULTS..... 5

2 MEASUREMENT UNCERTAINTY 5

3 GENERAL INFORMATION 6

3.1 GENERAL DESCRIPTION OF EUT..... 6

3.2 DESCRIPTION OF TEST MODES..... 7

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST 8

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 8

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS.....11

3.4 DESCRIPTION OF SUPPORT UNITS.....11

4 TEST TYPES AND RESULTS..... 12

4.1. CONDUCTED EMISSION MEASUREMENT 12

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 12

4.1.2 TEST INSTRUMENTS..... 12

4.1.3 TEST PROCEDURES 13

4.1.4 DEVIATION FROM TEST STANDARD 13

4.1.5 TEST SETUP..... 14

4.1.6 EUT OPERATING CONDITIONS 14

4.1.7 TEST RESULTS 15

4.2. RADIATED EMISSION MEASUREMENT 17

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT 17

4.2.2 TEST INSTRUMENTS..... 18

4.2.3 TEST PROCEDURES 19

4.2.4 DEVIATION FROM TEST STANDARD 20

4.2.5 TEST SETUP..... 20

4.2.6 EUT OPERATING CONDITIONS 21

4.2.7 TEST RESULTS 22

4.3 6DB BANDWIDTH MEASUREMENT..... 36

4.3.1 LIMITS OF 6DB BANDWIDTH MEASUREMENT 36

4.3.2 TEST INSTRUMENTS..... 36

4.3.3 TEST PROCEDURE..... 36

4.3.4 DEVIATION FROM TEST STANDARD 37

4.3.5 TEST SETUP..... 37

4.3.6 EUT OPERATING CONDITIONS 37

4.3.7 TEST RESULTS 38



Test Report No.: RF190903N031

4.4	CONDUCTED OUTPUT POWER	40
4.4.1	LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT	40
4.4.2	TEST SETUP	40
4.4.3	TEST INSTRUMENTS.....	40
4.4.4	TEST PROCEDURES	41
4.4.5	DEVIATION FROM TEST STANDARD	41
4.4.6	EUT OPERATING CONDITIONS	41
4.4.7	TEST RESULTS	42
4.5	POWER SPECTRAL DENSITY MEASUREMENT	44
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	44
4.5.2	TEST SETUP.....	44
4.5.3	TEST INSTRUMENTS.....	44
4.5.4	TEST PROCEDURE	44
4.5.5	DEVIATION FROM TEST STANDARD	44
4.5.6	EUT OPERATING CONDITION	45
4.5.7	TEST RESULTS	45
4.6	OUT OF BAND EMISSION MEASUREMENT	47
4.6.1	LIMITS OF OUT OF BAND EMISSION MEASUREMENT	47
4.6.2	TEST SETUP.....	47
4.6.3	TEST INSTRUMENTS.....	47
4.6.4	TEST PROCEDURE	47
4.6.5	DEVIATION FROM TEST STANDARD	48
4.6.6	EUT OPERATING CONDITION	48
4.6.7	TEST RESULTS	49
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	55
6	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	56



Test Report No.: RF190903N031

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF190903N031	Original release	Oct. 15, 2019

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Output power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	No antenna connector is used

2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.70dB
Radiated emissions	9KHz ~ 30MHz	2.90dB
	30MHz ~ 1GMHz	3.83dB
	1GHz ~ 18GHz	4.93dB
	18GHz ~ 40GHz	4.80dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Projector
MODEL NO.	LEISURE 3
ADDITIONAL MODELS	LEISURE 3W, LEISURE 3 PLUS, LEISURE 3W PLUS, LEISURE 3 PRO, PREMIUM LEISURE 3, LEISURE 450, LEISURE 450W, LEISURE 470, LEISURE 470W, LEISURE 480, LEISURE 480W, LEISURE 490, LEISURE 490W, C480, C480W, C490, C490W
FCC ID	2AQ3ALEISURE3
NOMINAL VOLTAGE	AC 100-240V 50/60Hz
MODULATION TECHNOLOGY	DSSS, OFDM
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
OPERATING FREQUENCY	2412-2462MHz for 11b/g/n(HT20) 2422-2452MHz for 11n(HT40)
PEAK OUTPUT POWER	22.19dBm(Maximum)
ANTENNA TYPE	Wire Antenna, with 2dBi gain
I/O PORTS	Refer to user's manual
CABLE SUPPLIED	AC cable: Unshielded, detachable, 1.5m AV cable: Unshielded, detachable, 1m HDMI cable: Shielded, detachable, 1.5m with two cores

NOTE:

1. The EUT provides completed transmitters and receivers:

MODULATION MODE	FUNCTION
802.11b	1TX/1RX
802.11g	1TX/1RX
802.11n (HT20)	1TX/1RX
802.11n (HT40)	1TX/1RX

2. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
3. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
4. Please refer to the EUT photo document (Reference No.: 190903N031) for detailed product photo.
5. Additional models (See above table) are identical with the test model LEISURE 3 except the color of the appearance, sizes and model name for trading purpose.

3.2 DESCRIPTION OF TEST MODES

11 channels are provided for 802.11b, 802.11g and 802.11n(HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

7 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photographs of the test configuration for reference.

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission. Following test modes were selected for the final test, and the final worst case is marked in boldface and recorded in the report:

EUT CONFIGURE MODE	APPLICABLE TO				MODE
	RE<1G	RE≥1G	PLC	APCM	
-	√	√	√	√	Powered by AC with WIFI

Where **RE<1G**: Radiated Emission below 1GHz **RE≥1G**: Radiated Emission above 1GHz
PLC: Power Line Conducted Emission **APCM**: Antenna Port Conducted Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	TESTED CONDITION
-	WIFI (2.4G) Link

RADIATED EMISSION TEST (BELOW 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1	DSSS	DBPSK	1.0

RADIATED EMISSION TEST (ABOVE 1GHz):

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5

BANDEDGE MEASUREMENT:

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 11	OFDM	BPSK	6.0
-	802.11n HT20	1 to 11	1, 11	OFDM	BPSK	6.5
-	802.11n HT40	3 to 9	3, 9	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).

Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
-	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1.0
-	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6.0
-	802.11n HT20	1 to 11	1, 6, 11	OFDM	BPSK	6.5
-	802.11n HT40	3 to 9	3, 6, 9	OFDM	BPSK	13.5



Test Report No.: RF190903N031

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	TEST VOLTAGE	TESTED BY
RE<1G	25deg. C, 53%RH	AC 120V 60Hz	Walker yuan
RE≥1G	25deg. C, 53%RH	AC 120V 60Hz	Walker yuan
PLC	20deg. C, 56%RH	AC 120V 60Hz	Sen He
APCM	25deg. C, 60%RH	AC 120V 60Hz	Robert Cheng



Test Report No.: RF190903N031

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C, Section 15.247

KDB 558074 D01 15.247 Meas Guidance v05r02

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as a dependent unit together without any other necessary accessories or support units.

4 TEST TYPES AND RESULTS

4.1. CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15 ~ 0.5	66 to 56	56 to 46
0.5 ~ 5	56	46
5 ~ 30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Mar. 12,19	Mar. 11,20
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 12,19	Mar. 11,20
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Mar. 13,19	Mar. 12,20
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 17,19	Jan. 16,20
Test software	ADT	ADT_Cond_V7.3.7	N/A	N/A	N/A

- NOTE:**
1. The test was performed in shielded room 553.
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

4.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

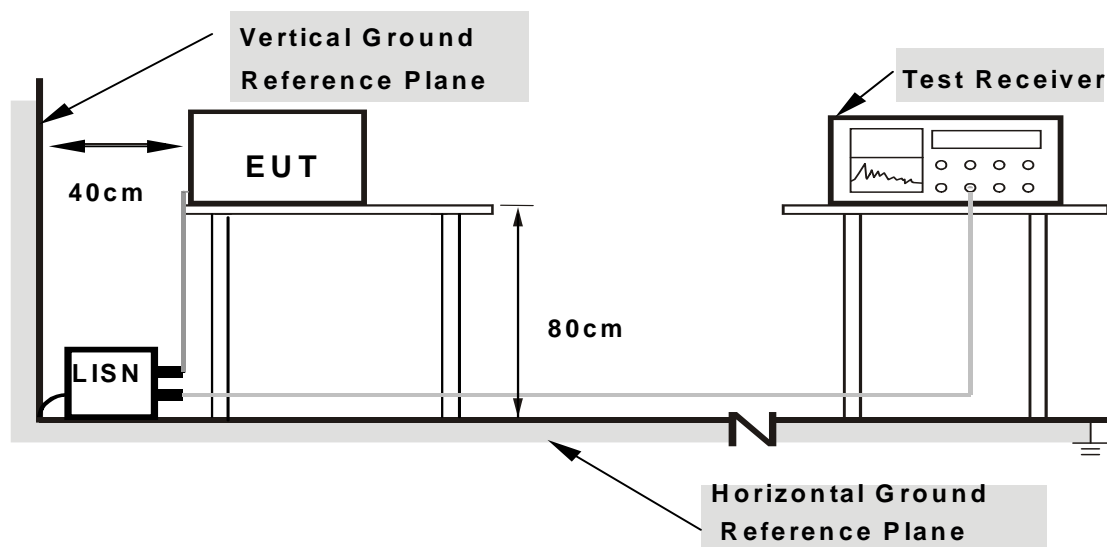

- Note: 1.Support units were connected to second LISN.**
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- Turned on the power and connected of all equipment.
- EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.


4.1.7 TEST RESULTS

CONDUCTED WORST-CASE DATA:

PHASE	Line	6dB BANDWIDTH	9kHz
--------------	------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.20356	10.21	36.53	29.63	46.74	39.84	63.46	53.46	-16.72	-13.62
2	0.48140	10.22	35.24	24.48	45.46	34.70	56.31	46.31	-10.85	-11.61
3	0.63688	10.23	34.94	22.07	45.17	32.30	56.00	46.00	-10.83	-13.70
4	0.79800	10.24	34.02	21.17	44.26	31.41	56.00	46.00	-11.74	-14.59
5	1.56290	10.23	37.35	34.25	47.58	44.48	56.00	46.00	-8.42	-1.52
6	11.70825	10.29	41.09	34.19	51.38	44.48	60.00	50.00	-8.62	-5.52


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

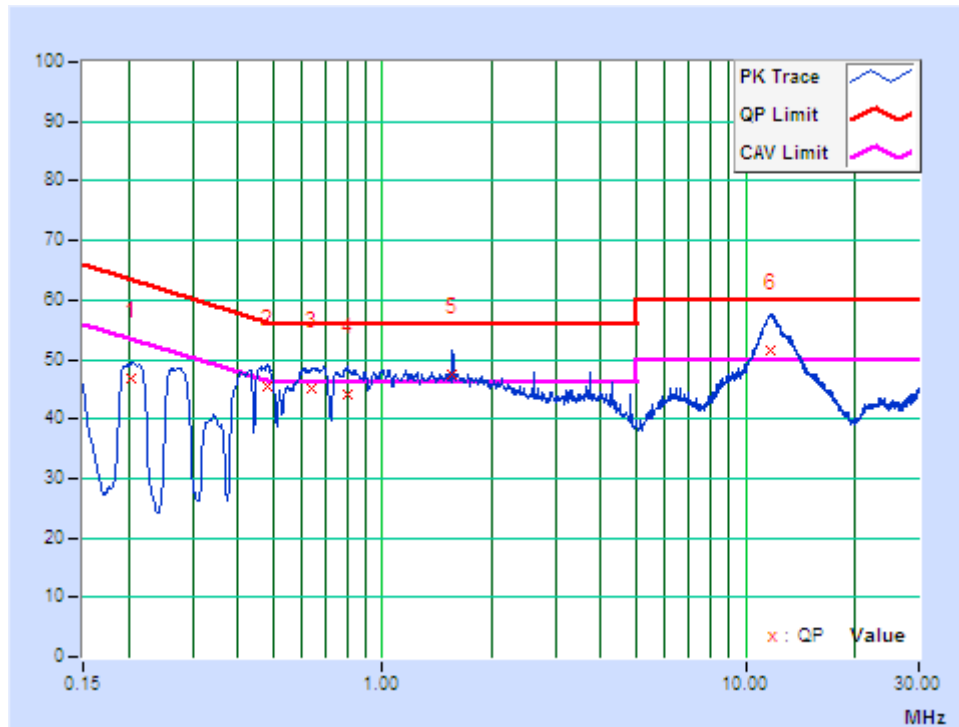

PHASE	Neutral	6dB BANDWIDTH	9kHz
--------------	---------	----------------------	------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.27578	10.00	38.99	33.28	48.99	43.28	60.94	50.94	-11.95	-7.66
2	0.34517	10.02	35.92	26.37	45.94	36.39	59.08	49.08	-13.14	-12.69
3	0.48395	10.02	37.78	28.93	47.80	38.95	56.27	46.27	-8.47	-7.32
4	0.61125	10.03	36.39	25.75	46.42	35.78	56.00	46.00	-9.58	-10.22
5	1.56290	10.01	36.19	34.11	46.20	44.12	56.00	46.00	-9.80	-1.88
6	11.77800	10.17	37.67	30.60	47.84	40.77	60.00	50.00	-12.16	-9.23

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

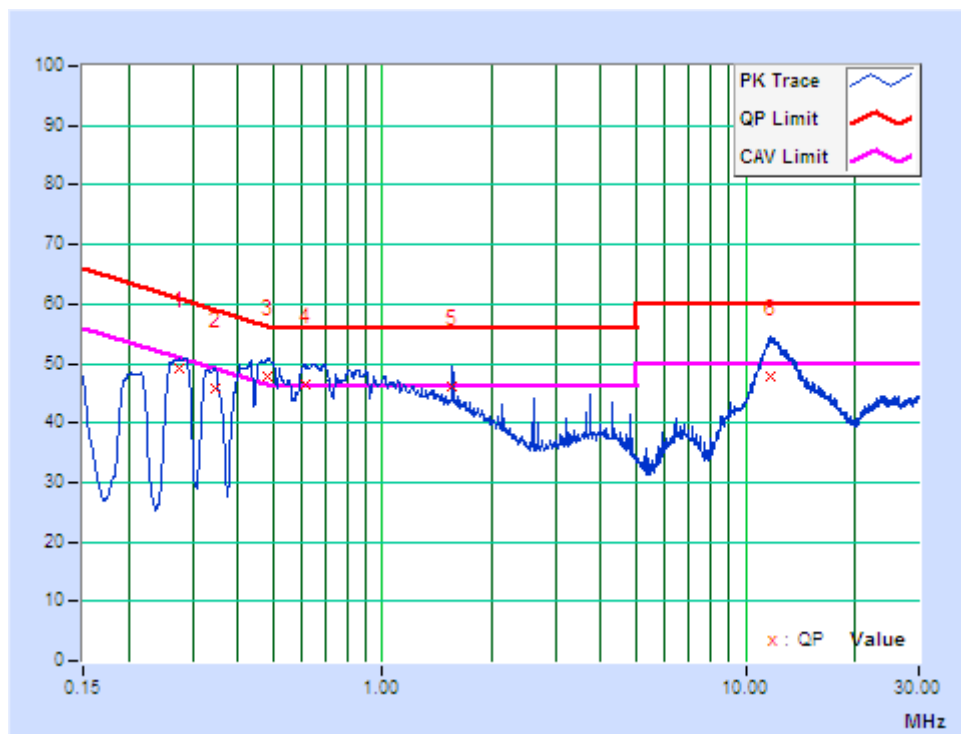

4.2. RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESU40	100449	Mar. 12,19	Mar. 11,20
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	May 22,19	May 21,20
Active Loop Antenna (9KHz -30MHz)	SCHWARZBECK	FMZB 1519B	1519B-045	May 04,19	May 03,20
Amplifier (9KHz -1GHz)	Burgeon	BPA-530	100210	Apr. 21,19	Apr. 20,20
Bilog Antenna (20MHz -2GHz)	Teseq	CBL 6111D	30643	Aug. 11, 19	Aug. 10, 20
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	Jul. 21, 19	Jul. 20, 20
Horn Antenna (18GHz -40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	May 05,19	May 04,20
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Apr. 21,19	Apr. 20,20
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
Broadband Preamplifier (1GHz~18GHz)	SCHWARZBECK	BBV9718	305	Apr. 21,19	Apr. 20,20
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 09,18	Nov. 08,19
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	May 20,19	May 19,20

NOTE:

1. The test was performed in 966 Chamber.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
3. The horn antenna is used only for the measurement of emission frequency above 1GHz if tested.
4. The FCC Site Registration No. is 749762.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 1.5 meters (above 1GHz) and 0.8 meters (below 1GHz) above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. For below 1GHz was used bilog antenna, and above 1GHz was used horn antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. For below 30MHz, a loop antenna with its vertical plane is place 3m from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. And the centre of the loop shall be 1m above the ground.
- g. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz(Duty cycle > 98%) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.
5. The testing of the EUT was performed on all 3 orthogonal axes, the worst-case test configuration was reported on the file test setup photo.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation.

4.2.5 TEST SETUP

Below 30MHz test setup

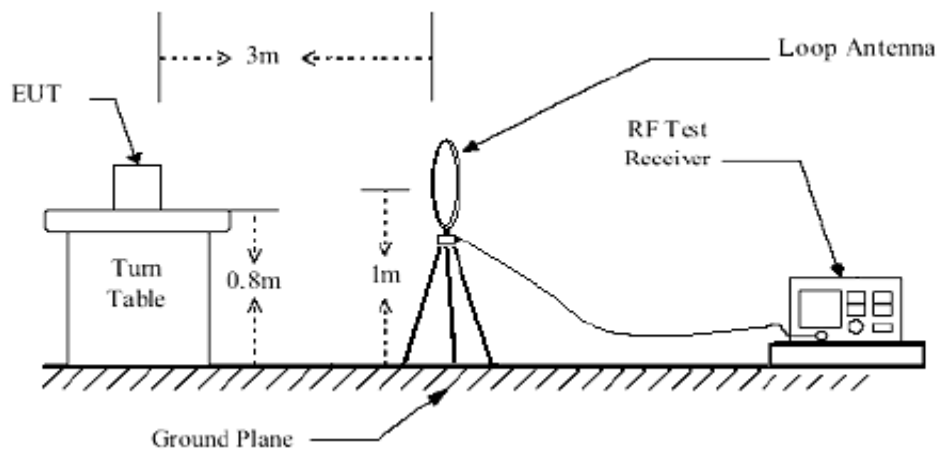


Below 1GHz test setup

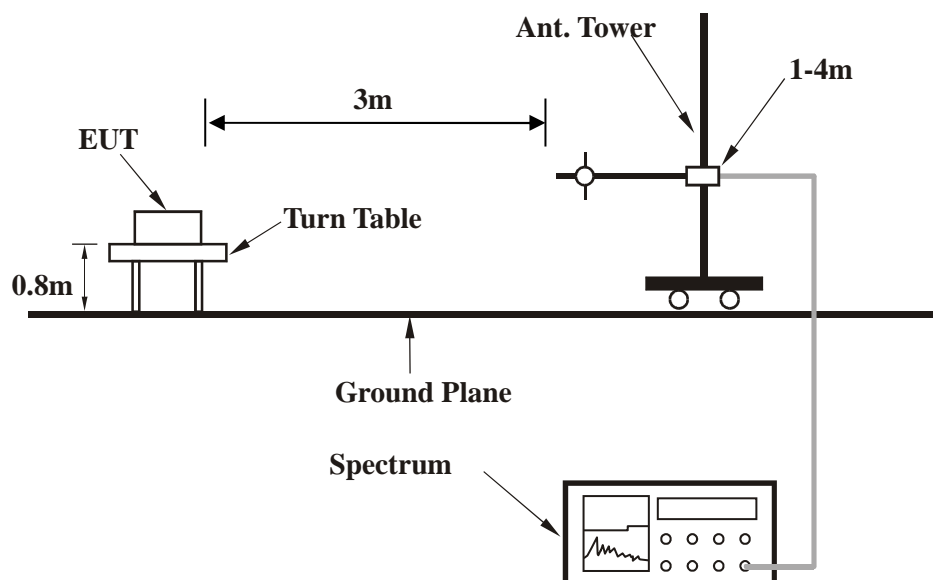

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

Above 1GHz test setup

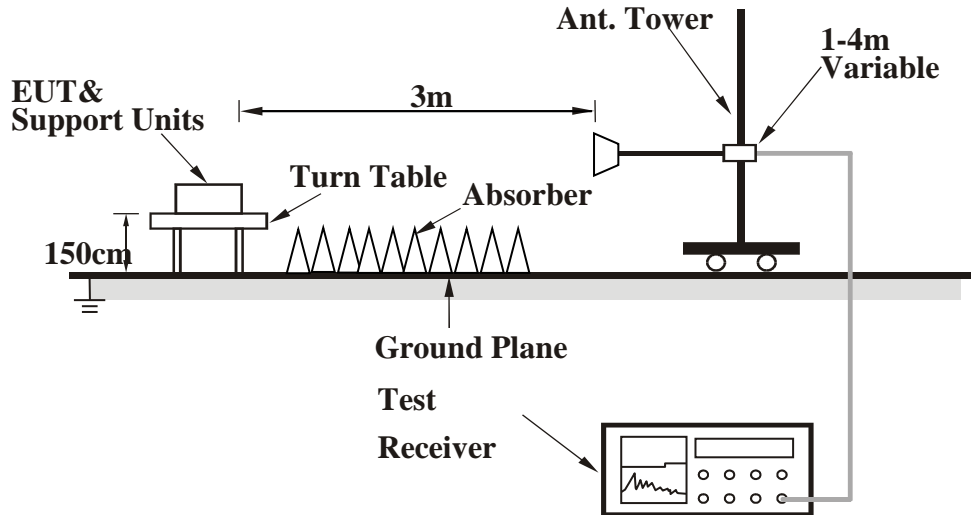

Note: For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA:


802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	31.53 QP	40.00	-8.47	1.00 H	219	42.73	-11.20
2	155.02	39.00 QP	43.50	-4.50	1.00 H	358	55.38	-16.38
3	186.28	37.93 QP	43.50	-5.57	1.00 H	214	55.20	-17.27
4	271.34	45.30 QP	46.00	-0.70	1.00 H	214	59.98	-14.68
5	362.46	41.00 QP	46.00	-5.00	1.00 H	76	51.26	-10.26
6	380.12	40.80 QP	46.00	-5.20	1.00 H	193	50.73	-9.93

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

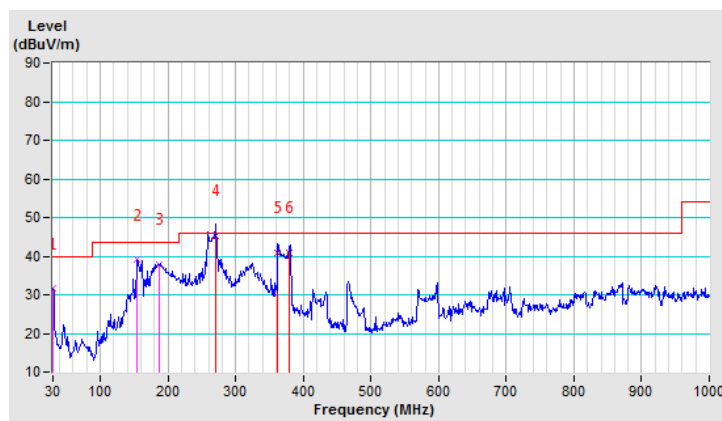


CHANNEL	TX Channel 1	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9KHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.10	38.80 QP	40.00	-1.20	1.00 V	125	50.50	-11.70
2	46.56	37.40 QP	40.00	-2.60	1.00 V	230	55.90	-18.50
3	63.41	36.00 QP	40.00	-4.00	1.00 V	201	59.40	-23.40
4	162.57	34.16 QP	43.50	-9.34	1.00 V	85	51.01	-16.85
5	259.57	34.77 QP	46.00	-11.23	1.00 V	144	50.20	-15.43
6	380.28	42.58 QP	46.00	-3.42	1.00 V	167	52.51	-9.93

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.

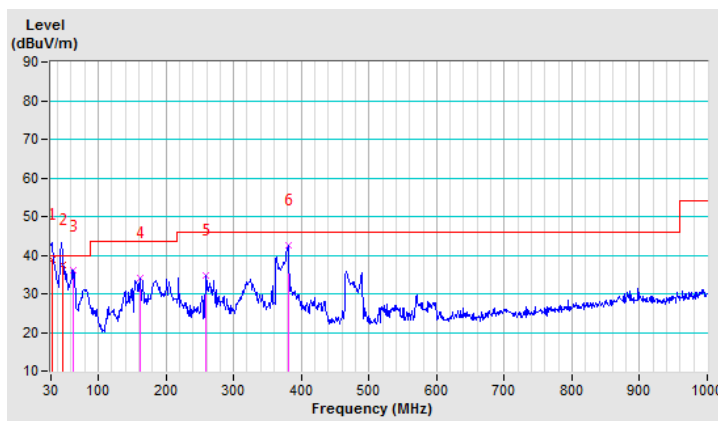

ABOVE 1GHZ DATA
802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	45.72 PK	74.00	-28.28	1.00 H	332	42.88	2.84
2	2390.00	34.07 AV	54.00	-19.93	1.00 H	332	31.23	2.84
3	*2412.00	103.15 PK			1.00 H	332	100.23	2.92
4	*2412.00	99.51 AV			1.00 H	332	96.59	2.92
5	4824.00	50.69 PK	74.00	-23.31	1.00 H	262	45.40	5.29
6	4824.00	44.50 AV	54.00	-9.50	1.00 H	262	39.21	5.29
7	#7236.00	54.52 PK	74.00	-19.48	1.00 H	153	45.22	9.30
8	#7236.00	45.50 AV	54.00	-8.50	1.00 H	153	36.20	9.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	47.23 PK	74.00	-26.77	1.00 V	284	44.39	2.84
2	2390.00	34.65 AV	54.00	-19.35	1.00 V	284	31.81	2.84
3	*2412.00	102.55 PK			1.00 V	284	99.63	2.92
4	*2412.00	98.49 AV			1.00 V	284	95.57	2.92
5	4824.00	51.94 PK	74.00	-22.06	1.00 V	123	46.65	5.29
6	4824.00	46.90 AV	54.00	-7.10	1.00 V	123	41.61	5.29
7	#7236.00	54.52 PK	74.00	-19.48	1.00 V	69	45.22	9.30
8	#7236.00	43.61 AV	54.00	-10.39	1.00 V	69	34.31	9.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	104.78 PK			1.00 H	349	101.76	3.02
2	*2437.00	100.97 AV			1.00 H	349	97.95	3.02
3	4874.00	52.11 PK	74.00	-21.89	1.00 H	162	46.74	5.37
4	4874.00	46.35 AV	54.00	-7.65	1.00 H	162	40.98	5.37
5	7311.00	52.73 PK	74.00	-21.27	1.00 H	93	43.38	9.35
6	7311.00	42.89 AV	54.00	-11.11	1.00 H	93	33.54	9.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.63 PK			1.00 V	57	99.61	3.02
2	*2437.00	98.19 AV			1.00 V	57	95.17	3.02
3	4874.00	51.89 PK	74.00	-22.11	1.00 V	177	46.52	5.37
4	4874.00	47.03 AV	54.00	-6.97	1.00 V	177	41.66	5.37
5	7311.00	54.85 PK	74.00	-19.15	1.00 V	273	45.50	9.35
6	7311.00	43.22 AV	54.00	-10.78	1.00 V	273	33.87	9.35

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.62 PK			1.00 H	345	103.51	3.11
2	*2462.00	101.79 AV			1.00 H	345	98.68	3.11
3	2483.50	50.83 PK	74.00	-23.17	1.00 H	345	47.64	3.19
4	2483.50	40.70 AV	54.00	-13.30	1.00 H	345	37.51	3.19
5	4924.00	53.63 PK	74.00	-20.37	1.00 H	99	48.18	5.45
6	4924.00	48.72 AV	54.00	-5.28	1.00 H	99	43.27	5.45
7	7386.00	51.84 PK	74.00	-22.16	1.00 H	131	42.44	9.40
8	7386.00	41.12 AV	54.00	-12.88	1.00 H	131	31.72	9.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.81 PK			1.00 V	277	103.70	3.11
2	*2462.00	102.19 AV			1.00 V	277	99.08	3.11
3	2483.50	50.62 PK	74.00	-23.38	1.00 V	277	47.43	3.19
4	2483.50	37.10 AV	54.00	-16.90	1.00 V	277	33.91	3.19
5	4924.00	55.81 PK	74.00	-18.19	1.00 V	147	50.36	5.45
6	4924.00	50.57 AV	54.00	-3.43	1.00 V	147	45.12	5.45
7	7386.00	52.44 PK	74.00	-21.56	1.00 V	74	43.04	9.40
8	7386.00	43.76 AV	54.00	-10.24	1.00 V	74	34.36	9.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. "* ": Fundamental frequency.

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.15 PK	74.00	-16.85	1.00 H	330	54.31	2.84
2	2390.00	40.61 AV	54.00	-13.39	1.00 H	330	37.77	2.84
3	*2412.00	104.67 PK			1.00 H	330	101.75	2.92
4	*2412.00	94.19 AV			1.00 H	330	91.27	2.92
5	4824.00	48.75 PK	74.00	-25.25	1.00 H	92	43.46	5.29
6	4824.00	34.82 AV	54.00	-19.18	1.00 H	92	29.53	5.29
7	#7236.00	52.31 PK	74.00	-21.69	1.00 H	0	43.01	9.30
8	#7236.00	38.99 AV	54.00	-15.01	1.00 H	0	29.69	9.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	58.72 PK	74.00	-15.28	1.00 V	284	55.88	2.84
2	2390.00	41.54 AV	54.00	-12.46	1.00 V	284	38.70	2.84
3	*2412.00	102.85 PK			1.00 V	284	99.93	2.92
4	*2412.00	92.70 AV			1.00 V	284	89.78	2.92
5	4824.00	49.18 PK	74.00	-24.82	1.00 V	99	43.89	5.29
6	4824.00	34.85 AV	54.00	-19.15	1.00 V	99	29.56	5.29
7	#7236.00	52.10 PK	74.00	-21.90	1.00 V	277	42.80	9.30
8	#7236.00	37.90 AV	54.00	-16.10	1.00 V	277	28.60	9.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.89 PK			1.00 H	351	102.87	3.02
2	*2437.00	95.86 AV			1.00 H	351	92.84	3.02
3	4874.00	52.93 PK	74.00	-21.07	1.00 H	117	47.56	5.37
4	4874.00	39.15 AV	54.00	-14.85	1.00 H	117	33.78	5.37
5	7311.00	55.57 PK	74.00	-18.43	1.00 H	140	46.22	9.35
6	7311.00	39.27 AV	54.00	-14.73	1.00 H	140	29.92	9.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.14 PK			1.00 V	58	99.12	3.02
2	*2437.00	91.97 AV			1.00 V	58	88.95	3.02
3	4874.00	52.63 PK	74.00	-21.37	1.00 V	136	47.26	5.37
4	4874.00	38.83 AV	54.00	-15.17	1.00 V	136	33.46	5.37
5	7311.00	52.39 PK	74.00	-21.61	1.00 V	281	43.04	9.35
6	7311.00	40.40 AV	54.00	-13.60	1.00 V	281	31.05	9.35

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.02 PK			1.00 H	333	100.91	3.11
2	*2462.00	93.15 AV			1.00 H	333	90.04	3.11
3	2483.50	67.71 PK	74.00	-6.29	1.00 H	333	64.52	3.19
4	2483.50	49.15 AV	54.00	-4.85	1.00 H	333	45.96	3.19
5	4924.00	51.92 PK	74.00	-22.08	1.00 H	99	46.47	5.45
6	4924.00	37.81 AV	54.00	-16.19	1.00 H	99	32.36	5.45
7	7386.00	55.56 PK	74.00	-18.44	1.00 H	131	46.16	9.40
8	7386.00	39.00 AV	54.00	-15.00	1.00 H	131	29.60	9.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.22 PK			1.00 V	277	102.11	3.11
2	*2462.00	95.93 AV			1.00 V	277	92.82	3.11
3	2483.50	69.20 PK	74.00	-4.80	1.00 V	277	66.01	3.19
4	2483.50	50.89 AV	54.00	-3.11	1.00 V	277	47.70	3.19
5	4924.00	50.28 PK	74.00	-23.72	1.00 V	122	44.83	5.45
6	4924.00	36.20 AV	54.00	-17.80	1.00 V	122	30.75	5.45
7	7386.00	50.82 PK	74.00	-23.18	1.00 V	360	41.42	9.40
8	7386.00	38.99 AV	54.00	-15.01	1.00 V	360	29.59	9.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

802.11n HT20

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.95 PK	74.00	-16.05	1.00 H	336	55.11	2.84
2	2390.00	40.42 AV	54.00	-13.58	1.00 H	336	37.58	2.84
3	*2412.00	104.13 PK			1.00 H	336	101.21	2.92
4	*2412.00	92.72 AV			1.00 H	336	89.80	2.92
5	4824.00	50.73 PK	74.00	-23.27	1.00 H	121	45.44	5.29
6	4824.00	36.93 AV	54.00	-17.07	1.00 H	121	31.64	5.29
7	#7236.00	52.88 PK	74.00	-21.12	1.00 H	0	43.58	9.30
8	#7236.00	37.52 AV	54.00	-16.48	1.00 H	0	28.22	9.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.45 PK	74.00	-16.55	1.00 V	282	54.61	2.84
2	2390.00	41.65 AV	54.00	-12.35	1.00 V	282	38.81	2.84
3	*2412.00	103.90 PK			1.00 V	282	100.98	2.92
4	*2412.00	92.83 AV			1.00 V	282	89.91	2.92
5	4824.00	50.63 PK	74.00	-23.37	1.00 V	115	45.34	5.29
6	4824.00	36.24 AV	54.00	-17.76	1.00 V	115	30.95	5.29
7	#7236.00	51.49 PK	74.00	-22.51	1.00 V	311	42.19	9.30
8	#7236.00	37.78 AV	54.00	-16.22	1.00 V	311	28.48	9.30

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	105.63 PK			1.00 H	352	102.61	3.02
2	*2437.00	95.37 AV			1.00 H	352	92.35	3.02
3	4874.00	51.73 PK	74.00	-22.27	1.00 H	72	46.36	5.37
4	4874.00	39.52 AV	54.00	-14.48	1.00 H	72	34.15	5.37
5	7311.00	54.37 PK	74.00	-19.63	1.00 H	177	45.02	9.35
6	7311.00	40.81 AV	54.00	-13.19	1.00 H	177	31.46	9.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.32 PK			1.00 V	57	99.30	3.02
2	*2437.00	91.91 AV			1.00 V	57	88.89	3.02
3	4874.00	51.72 PK	74.00	-22.28	1.00 V	44	46.35	5.37
4	4874.00	38.82 AV	54.00	-15.18	1.00 V	44	33.45	5.37
5	7311.00	52.03 PK	74.00	-21.97	1.00 V	152	42.68	9.35
6	7311.00	40.16 AV	54.00	-13.84	1.00 V	152	30.81	9.35

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.49 PK			1.00 H	334	100.38	3.11
2	*2462.00	93.79 AV			1.00 H	334	90.68	3.11
3	2483.50	68.14 PK	74.00	-5.86	1.00 H	334	64.95	3.19
4	2483.50	48.63 AV	54.00	-5.37	1.00 H	334	45.44	3.19
5	4924.00	47.82 PK	74.00	-26.18	1.00 H	149	42.37	5.45
6	4924.00	34.52 AV	54.00	-19.48	1.00 H	149	29.07	5.45
7	7386.00	52.51 PK	74.00	-21.49	1.00 H	162	43.11	9.40
8	7386.00	38.15 AV	54.00	-15.85	1.00 H	162	28.75	9.40
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.02 PK			1.95 V	277	100.91	3.11
2	*2462.00	94.66 AV			1.95 V	277	91.55	3.11
3	2483.50	70.18 PK	74.00	-3.82	1.00 V	277	66.99	3.19
4	2483.50	50.25 AV	54.00	-3.75	1.00 V	277	47.06	3.19
5	4924.00	49.46 PK	74.00	-24.54	1.00 V	149	44.01	5.45
6	4924.00	34.88 AV	54.00	-19.12	1.00 V	149	29.43	5.45
7	7386.00	51.46 PK	74.00	-22.54	1.00 V	172	42.06	9.40
8	7386.00	37.14 AV	54.00	-16.86	1.00 V	172	27.74	9.40

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The emission levels of other frequencies were less than 20dB margin against the limit.
4. Margin value = Emission level – Limit value.
5. "*" : Fundamental frequency.

802.11n HT40

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	56.72 PK	74.00	-17.28	1.00 H	336	53.88	2.84
2	2390.00	48.63 AV	54.00	-5.37	1.00 H	336	45.79	2.84
3	*2422.00	102.08 PK			1.00 H	336	99.12	2.96
4	*2422.00	92.73 AV			1.00 H	336	89.77	2.96
5	4844.00	49.53 PK	74.00	-24.47	1.00 H	219	44.21	5.32
6	4844.00	35.79 AV	54.00	-18.21	1.00 H	219	30.47	5.32
7	7266.00	51.73 PK	74.00	-22.27	1.00 H	74	42.40	9.33
8	7266.00	38.92 AV	54.00	-15.08	1.00 H	74	29.59	9.33

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.52 PK	74.00	-11.48	1.00 V	295	59.68	2.84
2	2390.00	47.44 AV	54.00	-6.56	1.00 V	295	44.60	2.84
3	*2422.00	100.94 PK			1.00 V	295	97.98	2.96
4	*2422.00	91.33 AV			1.00 V	295	88.37	2.96
5	4844.00	49.01 PK	74.00	-24.99	1.00 V	45	43.69	5.32
6	4844.00	35.71 AV	54.00	-18.29	1.00 V	45	30.39	5.32
7	7266.00	51.69 PK	74.00	-22.31	1.00 V	360	42.36	9.33
8	7266.00	37.90 AV	54.00	-16.10	1.00 V	360	28.57	9.33

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * " : Fundamental frequency.

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.37 PK			1.00 H	333	100.35	3.02
2	*2437.00	92.71 AV			1.00 H	333	89.69	3.02
3	4874.00	49.43 PK	74.00	-24.57	1.00 H	105	44.06	5.37
4	4874.00	36.11 AV	54.00	-17.89	1.00 H	105	30.74	5.37
5	7311.00	51.72 PK	74.00	-22.28	1.00 H	177	42.37	9.35
6	7311.00	39.18 AV	54.00	-14.82	1.00 H	177	29.83	9.35
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	102.25 PK			1.00 V	294	99.23	3.02
2	*2437.00	91.86 AV			1.00 V	294	88.84	3.02
3	4874.00	48.72 PK	74.00	-25.28	1.00 V	360	43.35	5.37
4	4874.00	34.92 AV	54.00	-19.08	1.00 V	360	29.55	5.37
5	7311.00	51.12 PK	74.00	-22.88	1.00 V	104	41.77	9.35
6	7311.00	37.52 AV	54.00	-16.48	1.00 V	104	28.17	9.35

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.31 PK			1.00 H	334	97.24	3.07
2	*2452.00	90.33 AV			1.00 H	334	87.26	3.07
3	2483.50	65.99 PK	74.00	-8.01	1.00 H	334	62.80	3.19
4	2483.50	50.89 AV	54.00	-3.11	1.00 H	334	47.70	3.19
5	4904.00	48.54 PK	74.00	-25.46	1.00 H	107	43.12	5.42
6	4904.00	36.19 AV	54.00	-17.81	1.00 H	107	30.77	5.42
7	7356.00	51.42 PK	74.00	-22.58	1.00 H	360	42.04	9.38
8	7356.00	38.15 AV	54.00	-15.85	1.00 H	360	28.77	9.38
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	101.93 PK			1.00 V	278	98.86	3.07
2	*2452.00	91.87 AV			1.00 V	278	88.80	3.07
3	2483.50	67.22 PK	74.00	-6.78	1.00 V	278	64.03	3.19
4	2483.50	49.37 AV	54.00	-4.63	1.00 V	278	46.18	3.19
5	4904.00	48.72 PK	74.00	-25.28	1.00 V	144	43.30	5.42
6	4904.00	35.19 AV	54.00	-18.81	1.00 V	144	29.77	5.42
7	7356.00	51.12 PK	74.00	-22.88	1.00 V	175	41.74	9.38
8	7356.00	38.49 AV	54.00	-15.51	1.00 V	175	29.11	9.38

REMARKS:

1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission level – Limit value.
5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 22, 19	May 21, 20
Power Sensor	Keysight	U2021XA	MY55060018	May 22, 19	May 21, 20
Power Meter	Anritsu	ML2495A	1139001	Mar. 12, 19	Mar. 11, 20
Power Sensor	Anritsu	MA2411B	1531155	Mar. 12, 19	Mar. 11, 20
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 17, 18	Oct. 16, 19
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Nov. 15, 18	Nov. 14, 19
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 09, 18	Nov. 08, 19
Signal Analyzer	Rohde & Schwarz	FSV7	102331	May 22, 19	May 21, 20
Signal Generator	Agilent	N5183A	MY50140980	Dec. 07, 18	Dec. 06, 19
Agile Signal Generator	Agilent	8645A	Agilent	Oct. 27, 18	Oct. 26, 19
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 12, 19	Mar. 11, 20
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Dec. 07, 18	Dec. 06, 19
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	May 20, 19	May 19, 20
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

NOTE: 1. The test was performed in RF Oven room.

2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = 100KHz
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

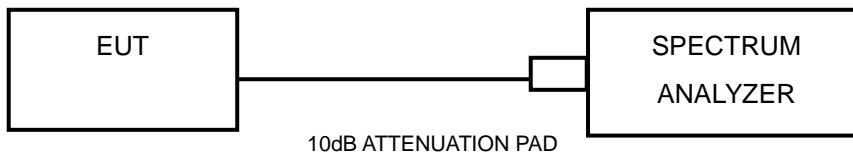

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 TEST RESULTS

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	9.09	0.5	PASS
6	2437	9.10	0.5	PASS
11	2462	9.11	0.5	PASS

802.11g


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.63	0.5	PASS
6	2437	16.63	0.5	PASS
11	2462	16.63	0.5	PASS

802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.81	0.5	PASS
6	2437	17.82	0.5	PASS
11	2462	17.81	0.5	PASS

802.11n HT40

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
3	2422	36.62	0.5	PASS
6	2437	36.64	0.5	PASS
9	2452	36.59	0.5	PASS

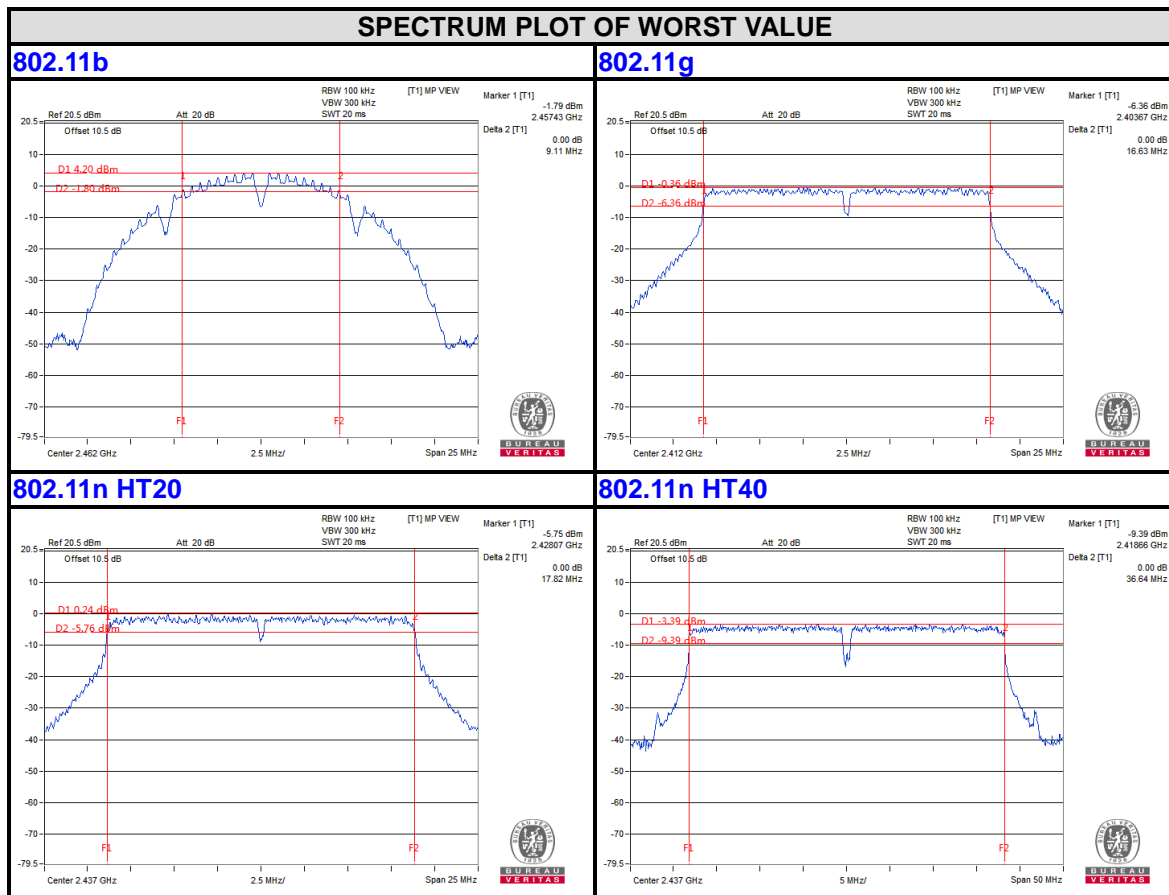


4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm).

4.4.2 TEST SETUP

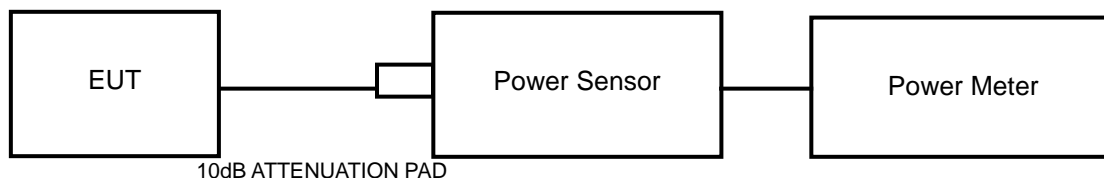

4.4.3 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Sensor	Keysight	U2021XA	MY55060016	May 22,19	May 21,20
Power Sensor	Keysight	U2021XA	MY55060018	May 22,19	May 21,20
Power Meter	Anritsu	ML2495A	1139001	Mar. 12,19	Mar. 11,20
Power Sensor	Anritsu	MA2411B	1531155	Mar. 12,19	Mar. 11,20
Digital Multimeter	FLUKE	15B	A1220010DG	Oct. 17, 18	Oct.16, 19
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Nov.15,18	Nov. 14,19
Oscilloscope	Agilent	DSO9254A	MY51260160	Nov. 09,18	Nov. 08,19
Signal Analyzer	Rohde & Schwarz	FSV7	102331	May 22,19	May 21,20
Signal Generator	Agilent	N5183A	MY50140980	Dec. 07,18	Dec. 06,19
Agile Signal Generator	Agilent	8645A	Agilent	Oct.27, 18	Oct.26, 19
Spectrum Analyzer	Keysight	N9020A	MY55400499	Mar. 12,19	Mar. 11,20
MXG-B RF Vector Signal Generator	Keysight	N5182B	MY56200288	Dec. 07, 18	Dec. 06, 19
BLUETOOTH TESTER	Rohde&Schwarz	CBT32	100811	May 20,19	May 19,20
Attenuator	MINI	BW-S10W2+	S130129FGE2	N/A	N/A
DC Source	Keysight	E3642A	MY56146098	N/A	N/A

NOTE:

1. The test was performed in RF Oven room.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.



Test Report No.: RF190903N031

4.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A peak power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.

4.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.4.7 TEST RESULTS

MAXIMUM PEAK OUTPUT POWER

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	18.66	73.451	1	PASS
6	2437	18.64	73.114	1	PASS
11	2462	17.44	55.463	1	PASS

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	21.92	155.597	1	PASS
6	2437	21.75	149.624	1	PASS
11	2462	18.69	73.961	1	PASS

802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
1	2412	21.75	149.624	1	PASS
6	2437	22.19	165.577	1	PASS
11	2462	18.02	63.387	1	PASS

802.11n HT40

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER (dBm)	PEAK POWER (mW)	PEAK POWER LIMIT (W)	PASS/FAIL
3	2422	21.47	140.281	1	PASS
6	2437	21.72	148.594	1	PASS
9	2452	18.21	66.222	1	PASS

AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

802.11b

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	15.69	37.068
6	2437	15.66	36.813
11	2462	14.27	26.73

802.11g

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	14.04	25.351
6	2437	14.52	28.314
11	2462	11.53	14.223

802.11n HT20

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
1	2412	14.24	26.546
6	2437	14.33	27.102
11	2462	10.57	11.402

802.11n HT40


CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (dBm)	AVG. POWER (mW)
3	2422	14.38	27.416
6	2437	14.31	26.977
9	2452	11.18	13.122

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set span to 1.5 times the DTS bandwidth.
- c) Set RBW to: 3KHz
- d) Set VBW $\geq 3 \times$ RBW.
- e) Detector = peak
- f) Ensure that the number of measurement points in the sweep $\geq 2 \times$ span/RBW.
- g) Sweep time = auto couple.
- h) Use the peak marker function to determine the maximum amplitude level.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

Same as item 4.3.6.

4.5.7 TEST RESULTS

802.11b

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-14.26	8.00	PASS
6	2437	-14.27	8.00	PASS
11	2462	-15.89	8.00	PASS

802.11g


Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-14.84	8.00	PASS
6	2437	-14.55	8.00	PASS
11	2462	-17.59	8.00	PASS

802.11n HT20

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
1	2412	-14.23	8.00	PASS
6	2437	-13.82	8.00	PASS
11	2462	-17.64	8.00	PASS

802.11n HT40

Channel	FREQ. (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
3	2422	-16.30	8.00	PASS
6	2437	-16.16	8.00	PASS
9	2452	-19.46	8.00	PASS

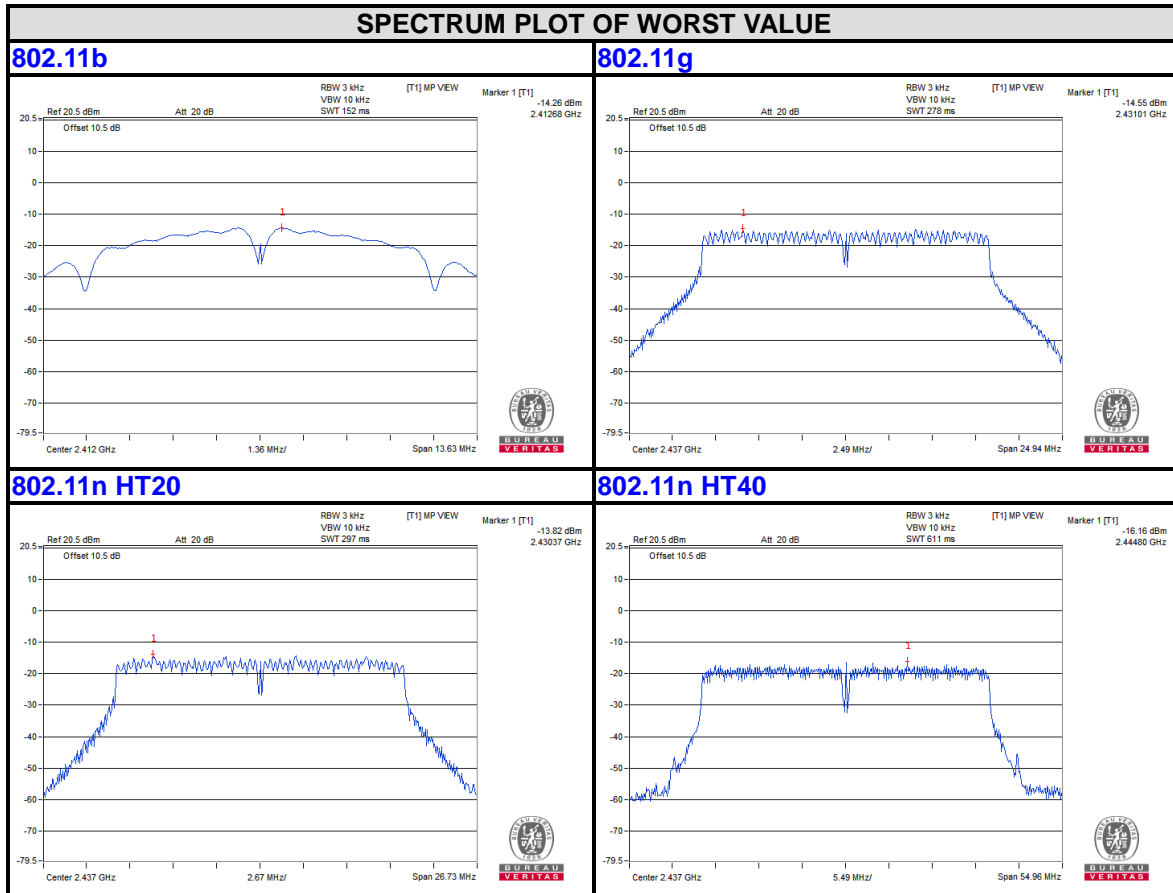

4.6 OUT OF BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.3.2 to get information of above instrument.

4.6.4 TEST PROCEDURE

Measurement Procedure - Reference Level

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



Test Report No.: RF190903N031

Measurement Procedure –Unwanted Emission Level

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.



4.6.6 EUT OPERATING CONDITION

Same as item 4.3.6



4.6.7 TEST RESULTS

802.11b



CH 1

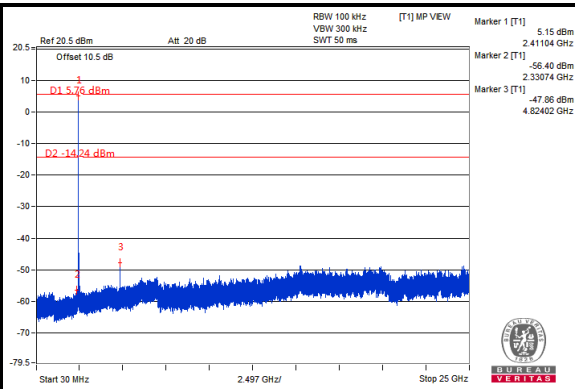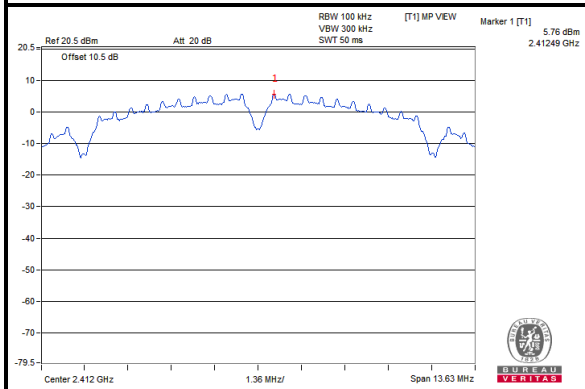


CH 6

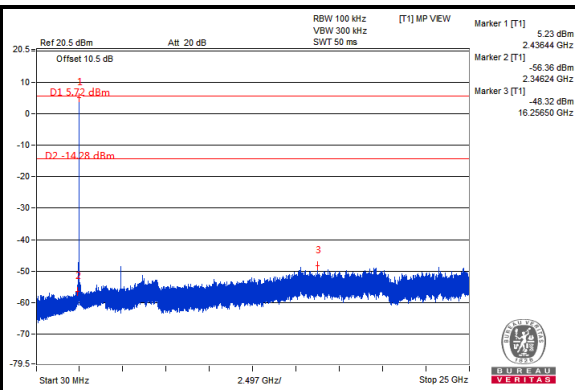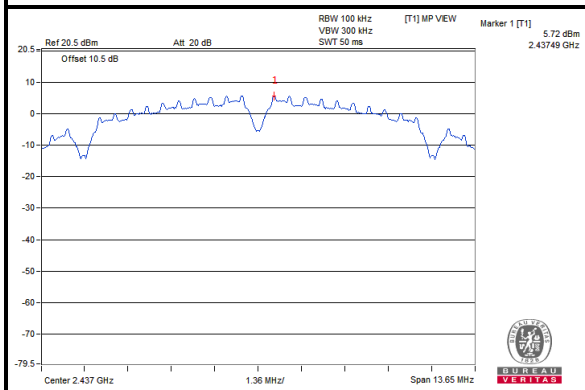


CH 11

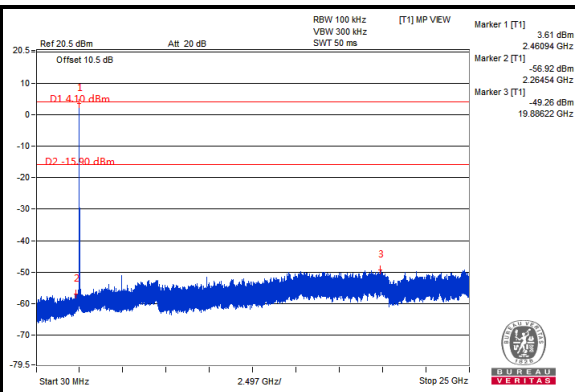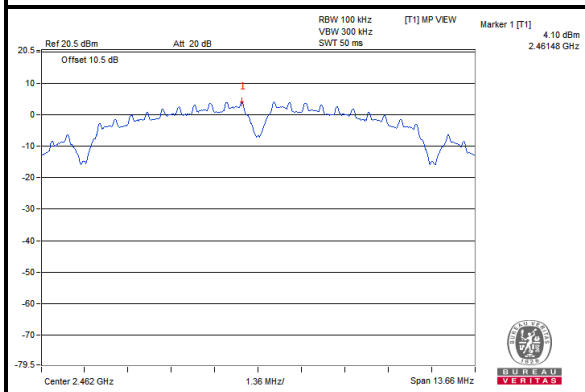

802.11g


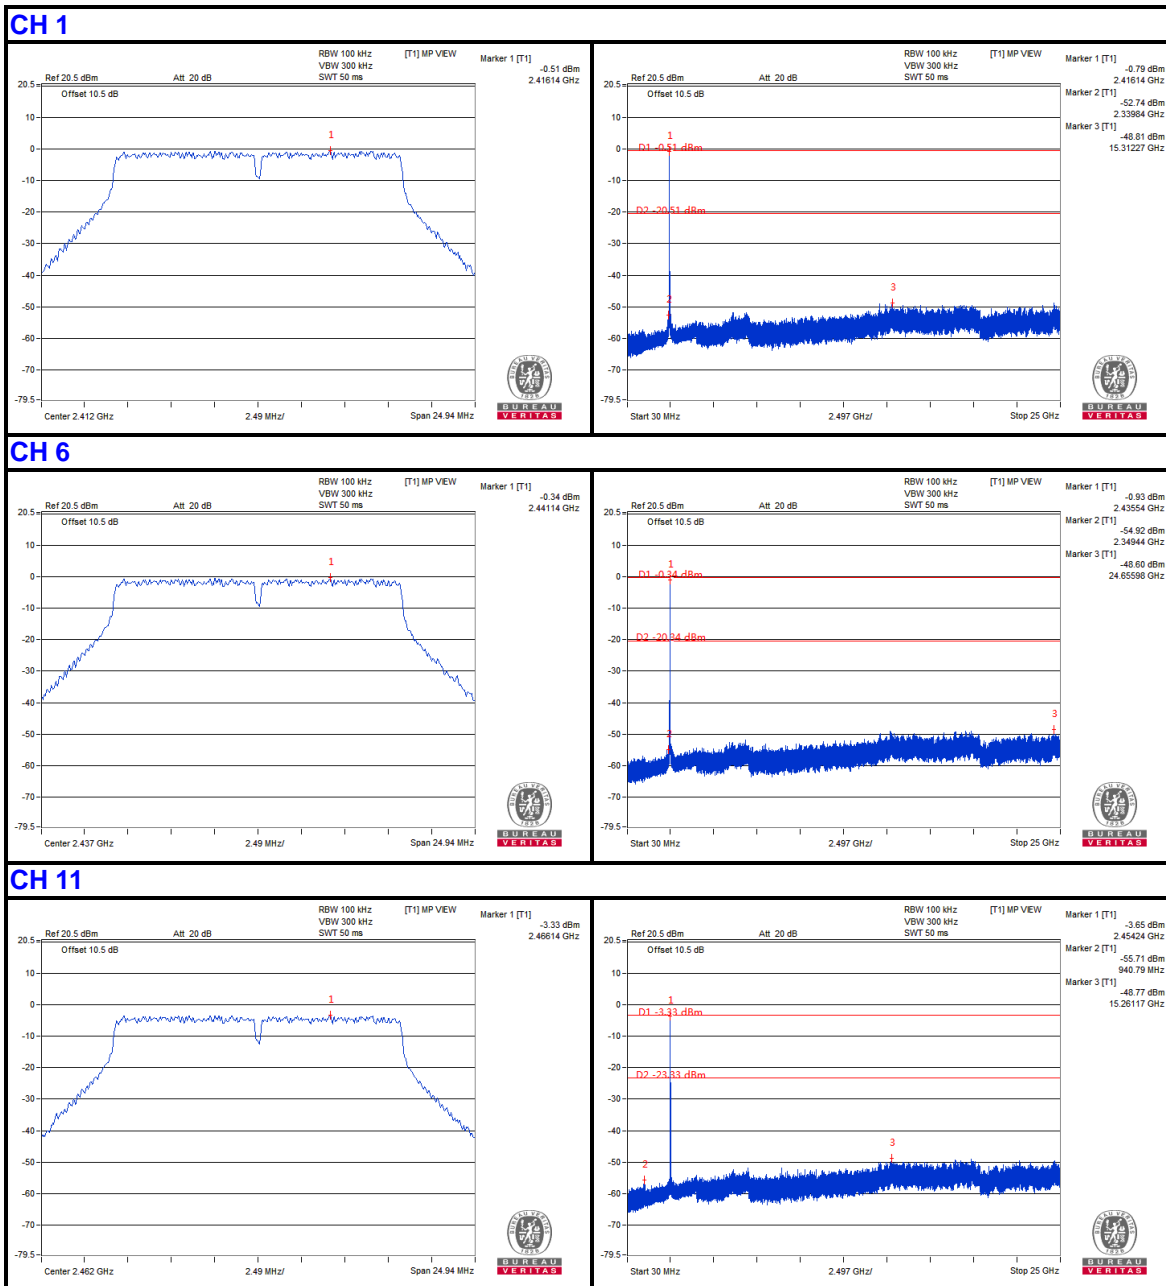


802.11n HT20


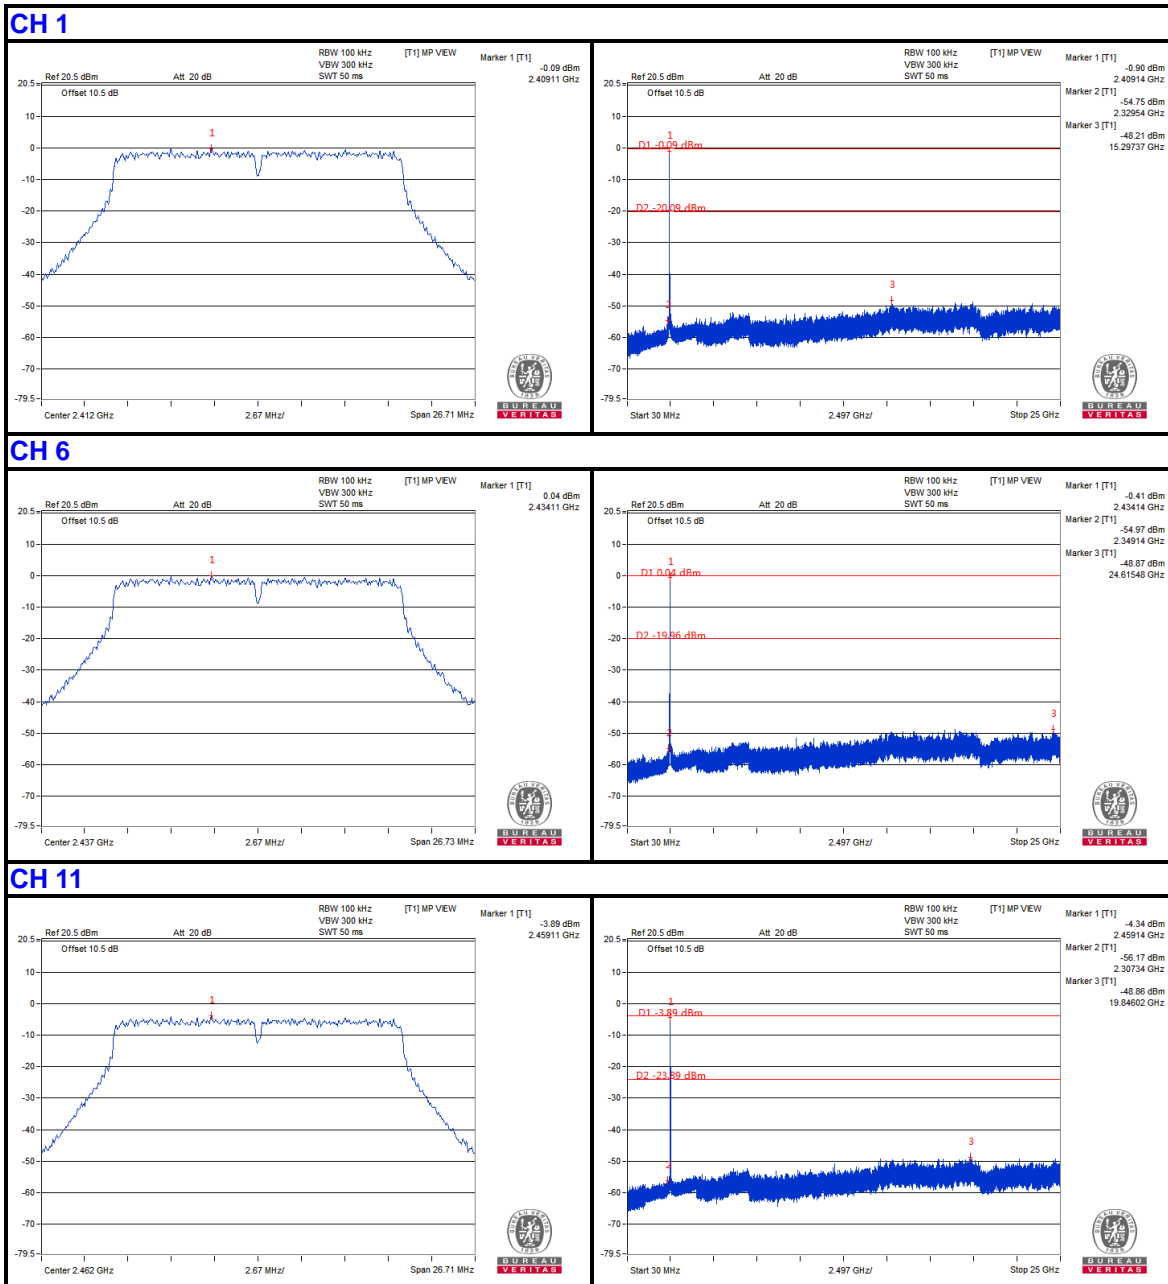


802.11n HT40



CH 3

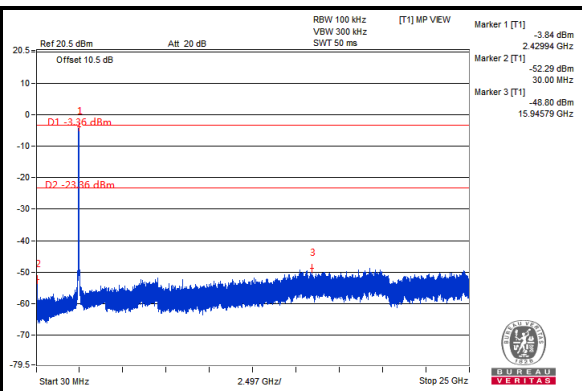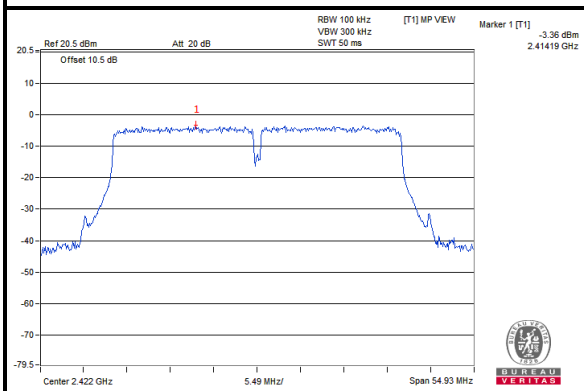


CH 6

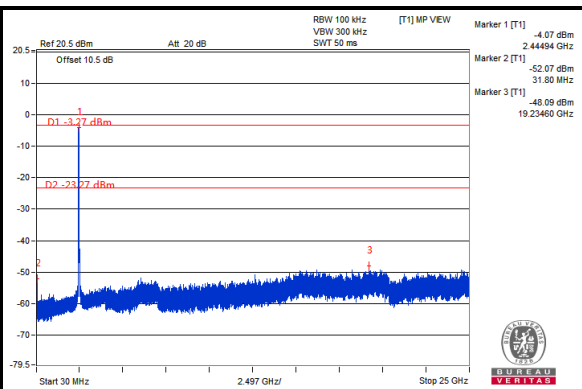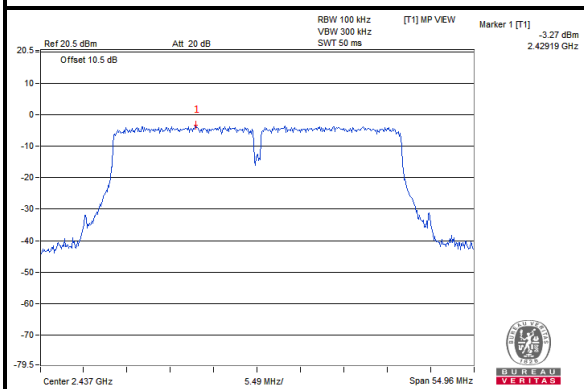


CH 9

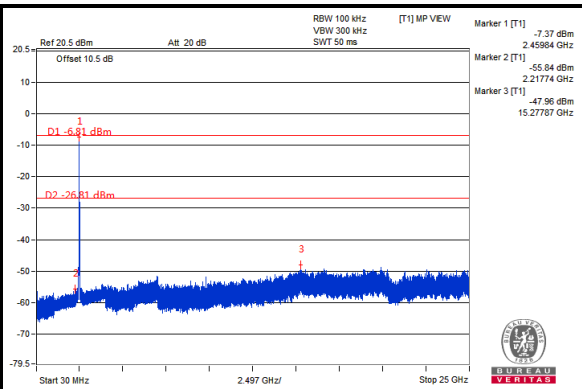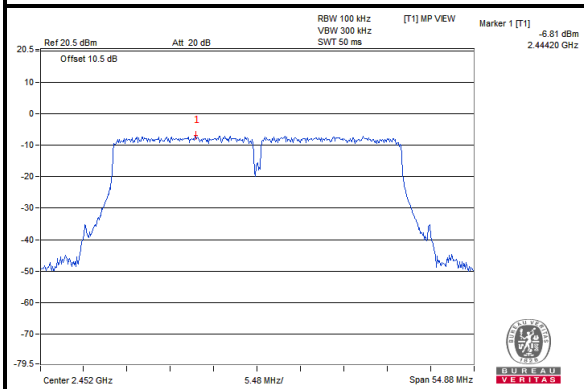


802.11b

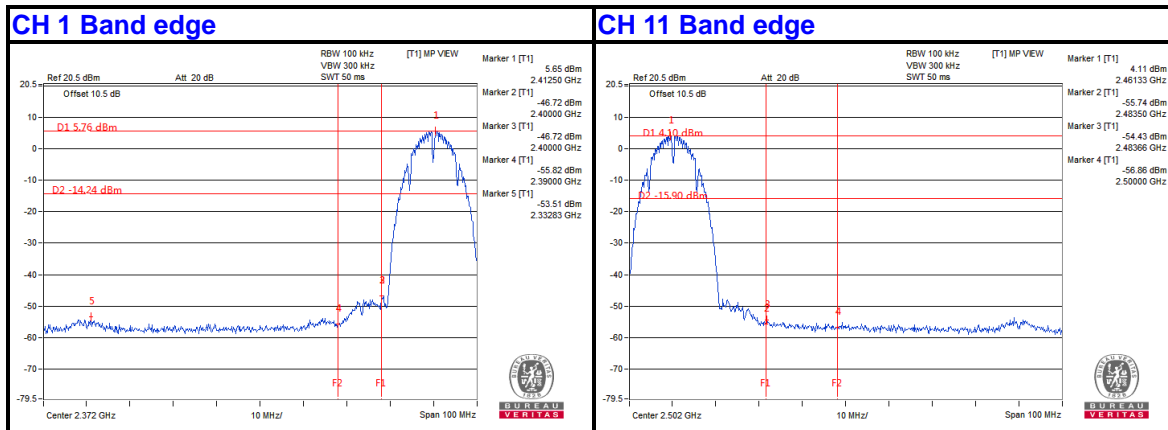


802.11g

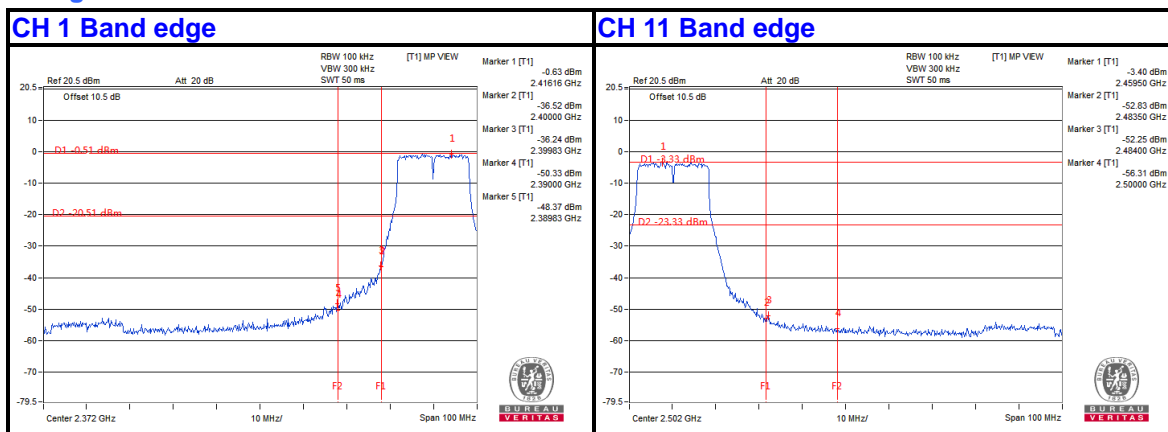

802.11n HT20

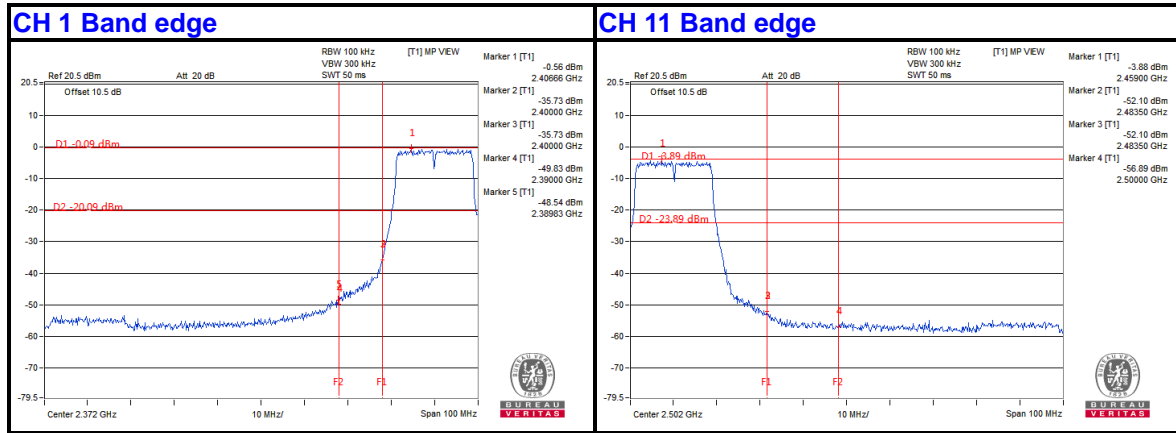

802.11n HT40

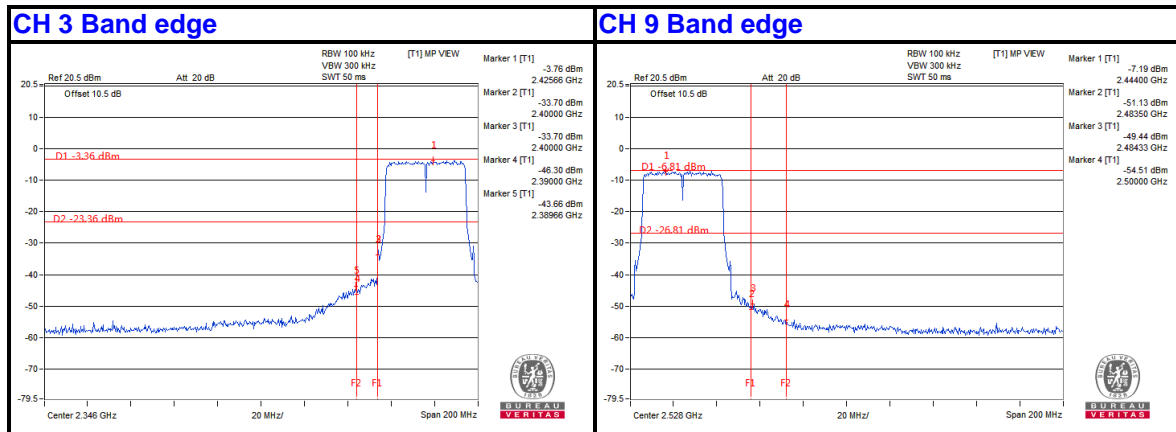



Test Report No.: RF190903N031

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF190903N031

6 APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

---END---