



***Test Report No. 7012320623***

***Applicant: Check-Cap Ltd.***

***Equipment Under Test:***

***C-Scan track transceiver***

***Model: SUB-108167-00***

***From The Standards Institution  
Of Israel  
Industry Division  
Electronics & Telematics Laboratory  
EMC Branch***



***Certificate Number: AT-1359***

**Test Report No.:** 7012320623

Page 2 of 23 pages

**Title:** C-Scan track transceiver**Model:** SUB-108167-00**FCC ID:** 2AQ3L-TRK108167-00

<b>Applicant:</b>	Check-Cap Ltd.
<b>Address:</b>	Aba Hushi 29 Ave., POB 1271, Isfiya, Israel
<b>Sample for test selected by:</b>	The customer
<b>The date of tests:</b>	17 September 2020; 15 August 2022

<b>Description of Equipment Under Test (EUT):</b>	C-Scan track transceiver.
<b>Model:</b>	SUB-108167-00
<b>Software version of radio unit:</b>	5.0.4
<b>Hardware version of radio units:</b>	PCBA-108018-00; PCBA-108019-00
<b>Manufactured by:</b>	Check-Cap Ltd.

**Reference Documents:**

❖ CFR 47 FCC:	Rules and Regulations; Part 15. "Radio frequency devices"; <u>Subpart C</u> : "Intentional radiators" Section 15.205. "Restricted bands of operations", Section 15.209. "Radiated emission limits, general requirements". "Radiated Emission Limits, Additional Provisions"; Section 15.231. "Periodic operation in the bands 40.66 – 40.70 MHz, and above 70 MHz".
---------------	---

This Test Report contains 23 pages  
and may be used only in full.

This Test Report applies only to the specimen tested and may not  
be applied to other specimens of the same product.



**Test Report No.:** 7012320623

Page 3 of 23 pages

**Title:** C-Scan track transceiver

**Model:** SUB-108167-00

FCC ID: 2AQ3L-TRK108167-00

## **Table of Contents**

<b>1. EUT Description and operation</b>	<b>4</b>
1.1. General description:	4
<b>2. Test summary</b>	<b>5</b>
2.1. Potential emission sources:	7
2.2. EUT setup and operation:	7
<b>3. Measurements and derived results</b>	<b>7</b>
3.1. Location of the Test Site:	7
3.2. Test condition:	7
3.3. Radiated emission test.	8
3.4. Common conditions for operation in the band above 70 MHz.	9
3.5. Test of field strength emission from intentional radiator.	10
3.6. Test of occupied bandwidth per 15.231(c)	17
<b>4. Appendix 1. Test equipment used</b>	<b>18</b>
<b>5. Appendix 2: Antenna Factor and Cable Loss</b>	<b>19</b>
<b>6. Appendix 3: Test setups photo.</b>	<b>23</b>

**Test Report No.:** 7012320623

Page 4 of 23 pages

**Title:** C-Scan track transceiver**Model:** SUB-108167-00**FCC ID:** 2AQ3L-TRK108167-00

## 1. EUT Description and operation

### 1.1. General description:

\* Note: the applicant supplied all information in clause below.

The C-Scan Track transceiver is a standalone application used for to collect acquired data from C-Scan Cap. The acquired data from the human colon is used to analyze and identify polyps. The EUT comprises the 433.5 MHz transceiver module.

C-Scan Track has two RF transceivers. The purpose of the two transceivers is to cover the clinical volume of the C-Scan System (human abdomen). Both transceivers are used for reception simultaneously and if transmission back to the capsule is required, only the best reception transceiver is used. There are no simultaneous transmissions from both transceivers.

Power source: 3.8VDC Lithium-Ion battery pack.

Transmitter frequency:	433.5 MHz
Type of modulation:	GFSK
Antenna type:	Internal integrated on PCB.

The EUT external view presented in photo # 1.



**Photo 1. Transceiver external view.**



**Test Report No.:** 7012320623

Page 5 of 23 pages

**Title:** C-Scan track transceiver

**Model:** SUB-108167-00

FCC ID: 2AQ3L-TRK108167-00

## 2. Test summary

Parameter	FCC Part 15 Reference paragraph	Verdict
Radiated emission from intentional radiators in restricted bands	Subpart C Section 15.205	Comply
Test of field strength emission from intentional radiators	"Radiated Emission Limits, Additional Provisions"; Section 15.231.	Comply
Occupied bandwidth	Subpart C section 15.231(c)	Comply

Electronics & Telematics Laboratory

September 2022

Name: Eng. Yuri Rozenberg  
Position: Head of EMC Branch

Name: Michael Feldman  
Position: Test Engineer.

Name: Alexander Konkov  
Position: Test Engineer

### Measurement uncertainty.

The test equipment has been calibrated according to its recommended procedures and is within the manufacturer's published limit of error.

The laboratory calibrates its standards by a third party (traceable to NIST, USA) on a regular basis according to equipment manufacturer requirements.

In the following table the uncertainty calculation is given.

Type of disturbance Test description	Calculated uncertainty $U_{LAB}$
<b><u>Radiated disturbance</u></b> electric field strength in a SAR at 3 m distance 30 MHz – 1.0 GHz	±4.32 dB
electric field strength in a FAR at 3 m distance 1.0 – 18 GHz. 18 – 40 GHz.	±4.47 dB ±2.78 dB



**Test Report No.:** 7012320623

Page 6 of 23 pages

**Title:** C-Scan track transceiver

**Model:** SUB-108167-00

**FCC ID:** 2AQ3L-TRK108167-00

**Normative References.**

FCC 47 CFR Part 15, Subpart C	Radio Frequency Devices Subpart C – Intentional Radiators
ANSI C63.4: 2009	American National Standard for Method of Measurements of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
ANSI C63.10: 2013	American National Standard for Testing of Unlicensed Wireless Devices.

**Test Report No.:** 7012320623

Page 7 of 23 pages

**Title:** C-Scan track transceiver**Model:** SUB-108167-00**FCC ID:** 2AQ3L-TRK108167-00

### 2.1. Potential emission sources:

The potential emission sources are detailed in Table 1.

**Table 1. Potential emission sources**

Frequency	Location
8.192 kHz	Positioning system magnetic field frequency
32.768 kHz	Microcontroller oscillator
24.0 MHz	Microcontroller local oscillator
50.0 MHz	RF transceiver local crystal
433.5 MHz	RF signal

### 2.2. EUT setup and operation:

Test was performed in continuous transmission mode.

## 3. Measurements and derived results

### 3.1. Location of the Test Site:

Radiated test measurements were conducted in the Anechoic chamber at the EMC laboratory of the Standards Institution of Israel in Tel-Aviv.

### 3.2. Test condition:

Temperature: 23 °C. Humidity: 67 %. Atmospheric pressure: 1010 mbar.

**Test Report No.:** 7012320623

Page 8 of 23 pages

**Title:** C-Scan track transceiver**Model:** SUB-108167-00**FCC ID:** 2AQ3L-TRK108167-00

### 3.3. Radiated emission test.

#### 3.3.1. General:

Per FCC Part 15 Subpart C Sections 15.209, 15.231.

- \* Initial scans were made using a peak detector but still using the appropriate ANSI IF bandwidth.
- \* A tolerance limit was set 10 dB below the specification limit. Levels above the tolerance limit were retested using the Peak, QP or Average detectors.

#### 3.3.2. Radiated emission measurements:

Preliminary investigation was performed from the lowest radio frequency signal generated in the equipment up to ten harmonic of a carrier frequency.

The final radiated emission measurements were performed in the semi Anechoic chamber at the 3 m test distances. Test was started with fully charged batteries. The EUT was operated in continue transmission mode. The transmitter was installed on a turn - table. Biconilog and Double Ridged Guide antennas were used. The measurements were performed at frequencies at which the signal level was 10 dB below the limit or less. The levels were maximized by rotating turntable through 360° and changing antenna-to-EUT polarization from vertical to horizontal. The worst-case result was noted in tables.

#### 3.3.3. Radiated emission test results:

Final measurements results are presented in tables and plots ## 1 - 8 in section 3.5.





**Test Report No.:** 7012320623

Page 9 of 23 pages

**Title:** C-Scan track transceiver

**Model:** SUB-108167-00

**FCC ID:** 2AQ3L-TRK108167-00

### **3.4. Common conditions for operation in the band above 70 MHz.**

#### **3.4.1. General:**

Per FCC Part 15 Subpart C clause 15.231 (a).

#### **3.4.2. Requirements:**

15.231(a) – Transmitter is not a part of security system.

15.231(a)(1) – Not applicable. Transmitter is not activated manually.

15.231(a)(2) - Transmission duration is limited by program and after activation is less than 5 second.

15.231(a)(3) – \*Duration of transmissions data in application is 1.93 second per hour that is less than 2 seconds limit per hour.

15.231(a)(4) – Transmitter is not designed to use during the emergencies.

15.231(a)(5) - Transmitter doesn't exceed the limits of this section.

\*Based on applicant declaration.

#### **3.4.3. Summary:**

The EUT is complies with the requirements of clause 15.231(a).

**Test Report No.:** 7012320623

Page 10 of 23 pages

**Title:** C-Scan track transceiver**Model:** SUB-108167-00

FCC ID: 2AQ3L-TRK108167-00

### 3.5. Test of field strength emission from intentional radiator.

#### 3.5.1. General:

Per FCC Part 15 Subpart C clause 15.231(b).

#### 3.5.2. Requirements:

The field strength emissions from intentional radiators operated on this frequency shall comply with the limit based on the average value.

Fundamental Frequency MHz	Calculated Field Strength limit of Fundamental dB $\mu$ V/m	Calculated Field Strength limit of Harmonics dB $\mu$ V/m
433.5	80.8	60.8

Note: Peak field strength shall not exceed the maximum permitted specified limit by more than 20 dB.

Field strength limits are specified at a distance of 3 meters.

#### 3.5.3. Test procedure:

The test was conducted according to clause 15.231.

#### 3.5.4. Test summary:

The tested unit meets the standard requirement.



**Test Report No.:** 7012320623

Page 11 of 23 pages

**Title:** C-Scan track transceiver

**Model:** SUB-108167-00

FCC ID: 2AQ3L-TRK108167-00

**3.5.5. Test results:**

**Radiated emission result at carrier frequencies.**

Carrier frequency MHz	Peak Ampl. dB $\mu$ V/m	Peak Limit dB $\mu$ V/m	Margin dB	Avg Ampl.* dB $\mu$ V/m	Specified Avg. @3m limit, dB $\mu$ V/m	Margin dB
433.5	98.6	100.8	2.2	76.7	80.8	4.1

The test was provided for both left and right side transmitters. The worst-case result present in a table above.

\*Average amplitude result was calculated from measured Peak value - Average factor.

Were Average factor calculation based on maximum declared time transmitting 8 msec that is more than measured. Average factor =  $20\text{Log Tx on}/100\text{msec} = 20\text{Log } [8\text{ms}/100] = - 21.9 \text{ dB}$ .

For transmitter measured time transmitting see plot # 9.

For recorded Fundamental frequency result, see plots #1 and #2.

All received spurious emissions were found below the specified limit.

Founded spurious emissions results presented in tables below.

**Spurious emission test result.**

Freq. MHz	Antenna pol. V/H	Peak Ampl dB $\mu$ V/m	Peak Ampl limit, dB $\mu$ V/m	Margin dB	Avg Ampl. dB $\mu$ V/m	Specified @3m limit, dB $\mu$ V/m	Margin dB	Ref. to plot #
866.9	H	57.1	80.8	23.7	35.2	60.8	25.6	6
1300.5	H	51.0	74.0	23	45.8	54.0	8.2	8

**Test Report No.:** 7012320623

Page 12 of 23 pages

**Title:** C-Scan track transceiver**Model:** SUB-108167-00

FCC ID: 2AQ3L-TRK108167-00

**Unwanted emissions test result.**

Freq. MHz	Antenna Polariz. V/H	Antenna Height (m)	Turn table Angle (°)	QP. Emission Level (dB $\mu$ V/m)	Limit @ 3 m (dB $\mu$ V/m)	Margin (dB)	Reference to plot #
425.5	V	1.0	262	27.0	46.0	19.0	4
585.0	H	1.2	179	26.5	46.0	19.5	5
600.0	H	1.0	207	27.3	46.0	18.7	5
607.5	H	1.2	199	27.0	46.0	19.0	5

Emission level = E Reading (dB $\mu$ V) + Cable loss (dB) + Antenna Factor (dB/m).  
For Cable Loss and Antenna Factor refer to Appendix 2.

Margin (dB) = Limit (dB $\mu$ V/m) – Emission level (dB $\mu$ V/m)



Test Report No.: 7012320623


Page 13 of 23 pages

Title: C-Scan track transceiver


Model: SUB-108167-00

FCC ID: 2AQ3L-TRK108167-00


### Fundamental frequency test.

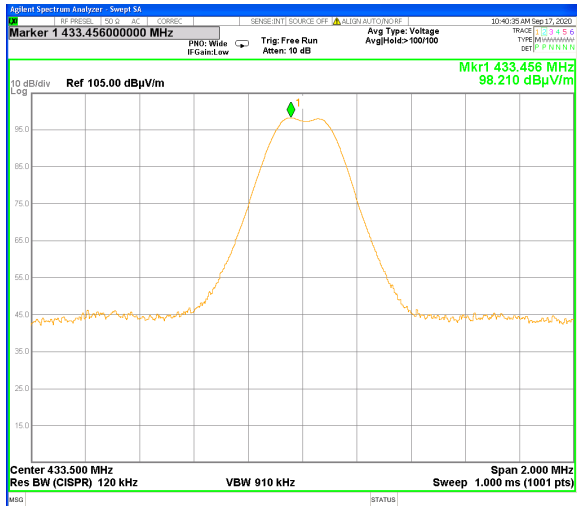

Plot # 1. Left side transmitter.

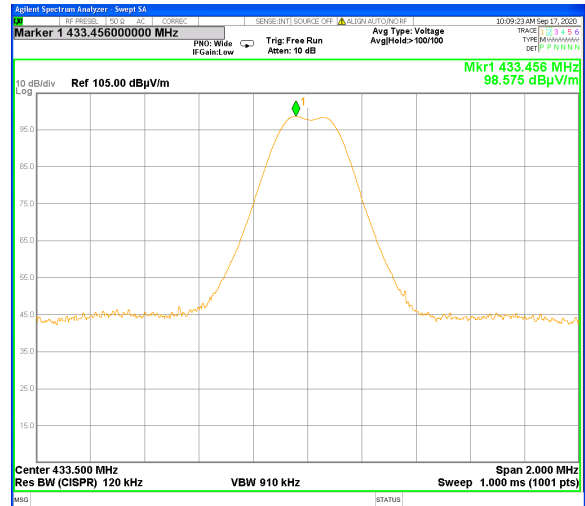

Plot # 2. Right side transmitter

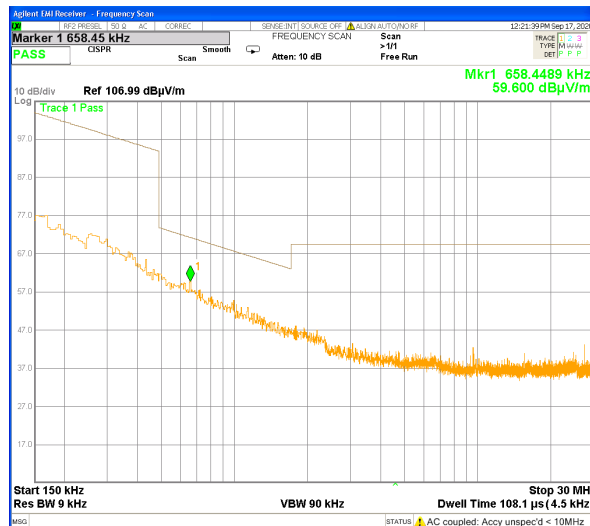

Plot # 3. Spurious emissions scan 0.15 MHz – 30 MHz.




Test Report No.: 7012320623


Page 14 of 23 pages

Title: C-Scan track transceiver  
Model: SUB-108167-00


FCC ID: 2AQ3L-TRK108167-00

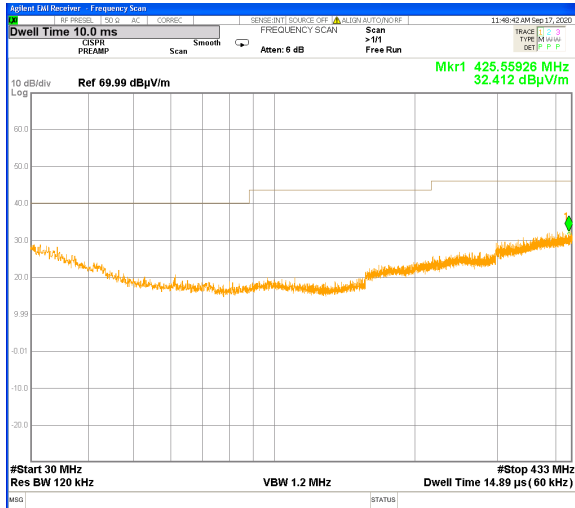

Plot # 4. Spurious emissions scan  
30 MHz – 433.0 MHz.

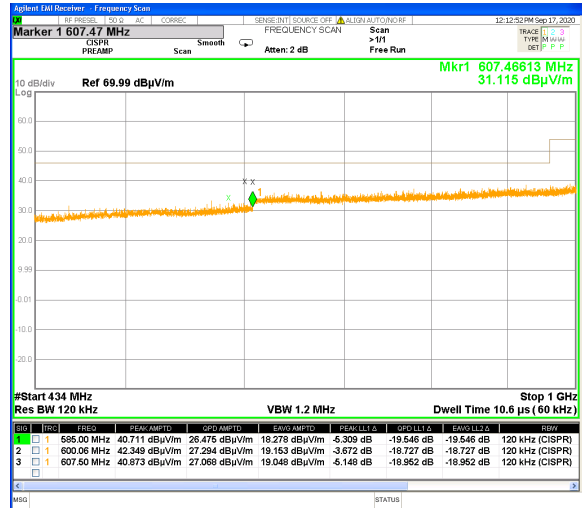

Plot # 5. Spurious emissions scan  
434.0 MHz – 1000 MHz.

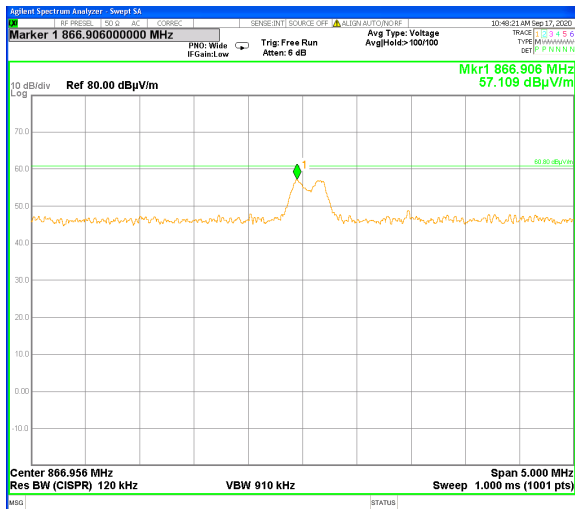

Plot # 6. Harmonic emission result




Test Report No.: 7012320623

Page 15 of 23 pages


Title: C-Scan track transceiver

Model: SUB-108167-00

FCC ID: 2AQ3L-TRK108167-00

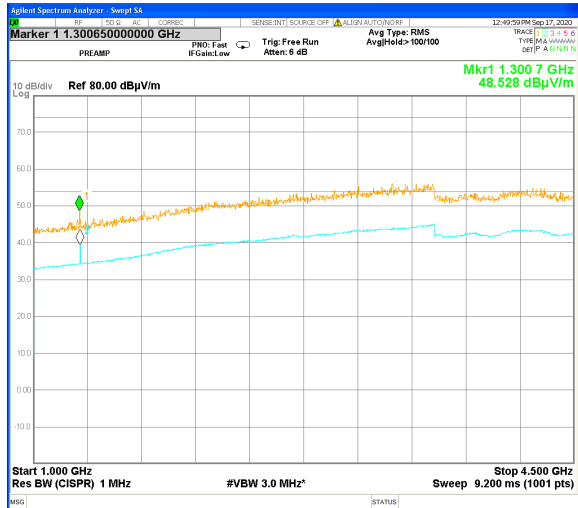

Plot # 7.

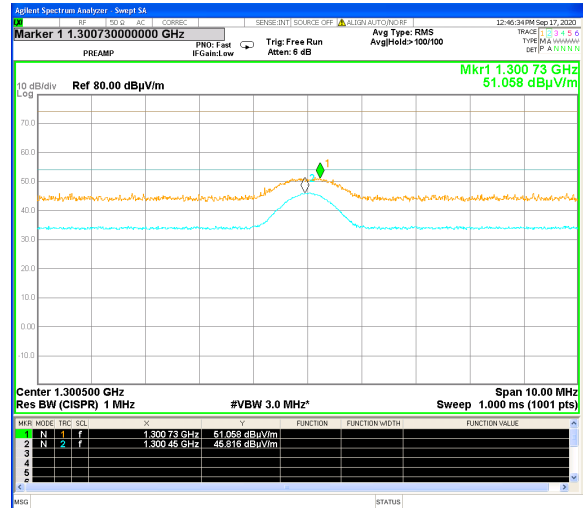

Plot # 8.

Spurious emissions scan 1.0 – 4.5 GHz.




Test Report No.: 7012320623

Page 16 of 23 pages


Title: C-Scan track transceiver

Model: SUB-108167-00


FCC ID: 2AQ3L-TRK108167-00

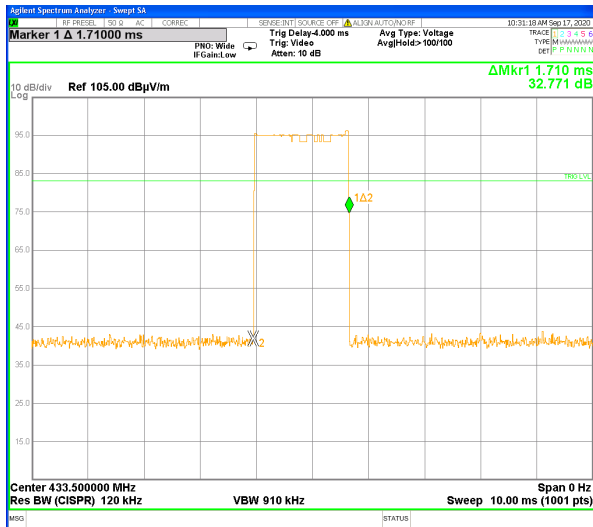

Plot # 9. Transmission duration test.

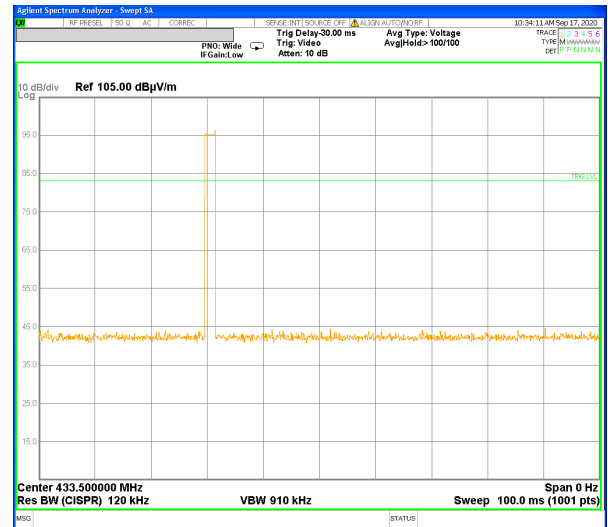

Plot # 10. Transmission in 100 msec.

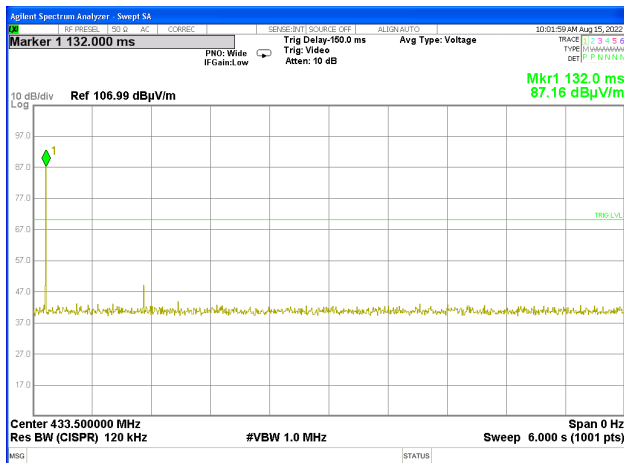

Plot # 11. Transmission in 6 sec.



**Test Report No.:** 7012320623

Page 17 of 23 pages

**Title:** C-Scan track transceiver

**Model:** SUB-108167-00

FCC ID: 2AQ3L-TRK108167-00

### 3.6. Test of occupied bandwidth per 15.231(c)

#### 3.6.1. Requirements:

The bandwidth of the emissions shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. Bandwidth is determined at the points 20 dB down from the modulated carrier.

For 433.5 MHz centre frequency allowed emission bandwidth shall be less than  $(433.5/100) 0.25\% = 1.083$  MHz.

#### 3.6.2. Test results:

Test result present in plot below.



Plot # 12. Occupied bandwidth test result

#### 3.6.3. Test summary:

20 dB occupied bandwidth is 0.256 MHz.  
The tested unit meets the standard requirement.

**Test Report No.:** 7012320623

Page 18 of 23 pages

**Title:** C-Scan track transceiver**Model:** SUB-108167-00**FCC ID:** 2AQ3L-TRK108167-00

#### 4. Appendix 1. Test equipment used

All measurements equipment is on SII calibration schedule with a recalibration interval not exceeding one year.

##### Test equipment used

No	Description	Manufacturer information			Due Calibration date
		Name	Model	Serial No	
1	MXE EMI Receiver 20 Hz -26.5 GHz	Agilent	N9038A	MY52130048	June 2021; October 2022
2	Double Ridged Guide Antenna 0.75 – 18 GHz	ETS-Lindgren	3115	00143138	March 2021
3	Broadband Horn antenna 15 – 40 GHz	Schwarzbeck Mess-Electronik	BBHA 9170	9170-341	March 2021
4	Double Ridged Waveguide Horn Antenna 1 – 18 GHz	ETS-Lindgren	3117	00139055	March 2021
5	Antenna Biconilog 30 – 6000 MHz	ETS-Lindgren	31142D	0146490	March 2021; October 2023
6	Spectrum analyzer 20 Hz-40 GHz	Rohde&Schwarz	ESU 40	100168	November 2020
7	EMI Analyser 9 kHz - 26.5 GHz	HP	E7405A	SII 4944	May 2021
8	Attenuator 3 dB DC – 12.4 GHz	HP	8491A	50469	October 2020
9	LISN 9 kHz – 30 MHz	FCC	LISN 250-32-4- 16	SII5023	October 2020
10	Transient limiter 0.009-200 MHz	HP	11947A	3107105	August 2021
11	Cable RF 1m	Huber-Suhner	Sucoflex 104PE	21325/4PE	October 2020
12	Cable RF 5m	Harbour Industries	Neoflex LLEF142	1802	July 2021
13	Cable RF 0.5m	Huber-Suhner	Multiflex 141	520201	October 2020
14	Active Loop antenna 1.0 kHz – 30 MHz	ETS-Lindgren	6507	00144641	December 2020

**Test Report No.:** 7012320623

Page 19 of 23 pages

**Title:** C-Scan track transceiver**Model:** SUB-108167-00

FCC ID: 2AQ3L-TRK108167-00

## 5. Appendix 2: Antenna Factor and Cable Loss

### Cable Loss. Mast 6 m set cable.

Point	Frequency, MHz	Cable Loss, dB	Point	Frequency, MHz	Cable Loss, dB
1	30	0.3	21	1000	2.5
2	50	0.4	22	1100	2.6
3	100	0.6	23	1200	2.8
4	150	0.8	24	1300	2.9
5	200	1.0	25	1400	3.1
6	250	1.1	26	1500	3.2
7	300	1.2	27	1600	3.3
8	350	1.3	28	1700	3.5
9	400	1.5	29	1800	3.6
10	450	1.6	30	1900	3.7
11	500	1.7	31	2000	3.9
12	550	1.8	32	2100	4.0
13	600	1.9	33	2200	4.1
14	650	1.9	34	2300	4.2
15	700	2.0	35	2400	4.4
16	750	2.1	36	2500	4.6
17	800	2.1	37	2600	4.7
18	850	2.2	38	2700	4.8
19	900	2.3	39	2800	4.9
20	950	2.4	40	2900	5.0



**Test Report No.:** 7012320623

**Page 20 of 23 pages**

**Title:** C-Scan track transceiver

**Model:** SUB-108167-00

**FCC ID:** 2AQ3L-TRK108167-00

**Antenna factor**

**Biconilog Antenna, ETS-Lindgren mod. 31142D, S/N: 0146490 3m calibration.**

No.	f / MHz	AF / dB/m	f / MHz	AF / dB/m	f / MHz	AF / dB/m
1	30	18.7	250	12.0	2750	31.0
2	35	15.7	300	13.8	3000	31.2
3	40	12.9	400	16.2	3250	32.7
4	45	10.6	500	18.6	3500	34.5
5	50	9.0	600	20.2	3750	34.3
6	60	7.3	700	21.8	4000	34.5
7	70	7.7	800	22.9	4250	35.3
8	80	8.2	900	24.1	4500	35.5
9	90	9.2	1000	24.8	4750	36.1
10	100	9.4	1250	26.9	5000	37.4
11	120	8.5	1500	30.2	5250	38.4
12	140	8.5	1750	28.5	5000	39.9
13	160	9.1	2000	28.9	5750	38.2
14	180	10.5	2250	29.8	6000	39.1
15	200	10.9	2500	32.5		

**Test Report No.:** 7012320623

Page 21 of 23 pages

**Title:** C-Scan track transceiver**Model:** SUB-108167-00**FCC ID:** 2AQ3L-TRK108167-00

**Antenna Factor**  
**Double Ridged Guide Antenna mfr ETS-Lindgren model 3115 1m calibration**

Point	Frequency (MHz)	Antenna Factor (dB/m)
1	1000	23.7
2	2000	28.5
3	3000	29.6
4	4000	32.5
5	4500	32.6
6	5000	33.5
7	6000	36.1
8	6500	36.5
9	7000	37.3
10	7500	38.0
11	8000	37.3
12	8500	37.9
13	9000	38.1
14	9500	38.5
15	10000	38.7
16	10500	38.8
17	11000	38.6
18	11500	38.8
19	12000	38.9
20	12500	39.3
21	13000	40.2
22	13500	40.8
23	14000	40.6
24	14500	40.4
25	15000	39.6
26	15500	39.5
27	16000	39.8
28	16500	40.4
29	17000	41.3
30	17500	42.8
31	18000	43.2

**Test Report No.:** 7012320623

Page 22 of 23 pages

**Title:** C-Scan track transceiver**Model:** SUB-108167-00

FCC ID: 2AQ3L-TRK108167-00

**Cable Loss****Type:** Neoflex LLEF142; Ser.No.1802; 5 m length

Point	Frequency (GHz)	Cable Loss (dB)
0	0.0-1.0	1.3
1	1.0 – 3.0	2.4
2	3.0 – 5.0	3.2
3	5.0-7.0	4.0
4	7.0-9.0	4.4
5	9.0-10.0	4.7
6	10.0-12.0	5.2
7	12.0-14.0	5.9
8	14.0-16.0	6.1
9	16.2-18.00	6.6

**Active Loop antenna mfr.ETS-Lindgren mod. 6507 S/N 144641.**

Frequency, MHz	Magnetic Antenna factor dBs/m	Electric Antenna factor dB/m
0.009	-20.0	31.5
0.010	-21.0	30.5
0.020	-26.7	24.9
0.075	-32.4	19.1
0.100	-32.7	18.8
0.150	-32.9	18.6
0.250	-33.0	18.5
0.500	-33.0	18.5
0.750	-33.0	18.5
1.000	-32.8	18.7
2.000	-32.7	18.8
3.000	-32.9	18.7
4.000	-33.2	18.3
5.000	-33.4	18.2
10.000	-34.0	17.6
15.000	-34.2	17.3
20.000	-34.4	17.1
25.000	-34.8	16.7
30.000	-35.0	16.5

**Test Report No.:** 7012320623

Page 23 of 23 pages

**Title:** C-Scan track transceiver

**Model:** SUB-108167-00

FCC ID: 2AQ3L-TRK108167-00

## 6. Appendix 3: Test setups photo.

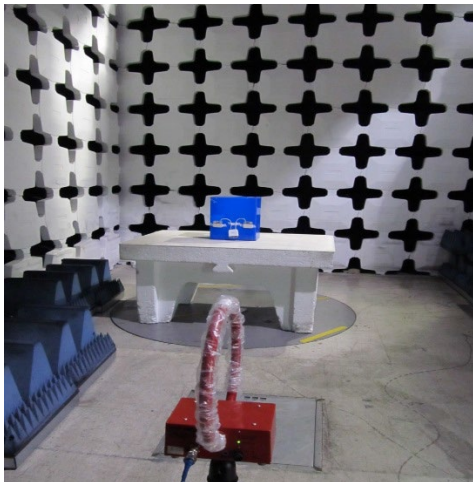


Photo 2.

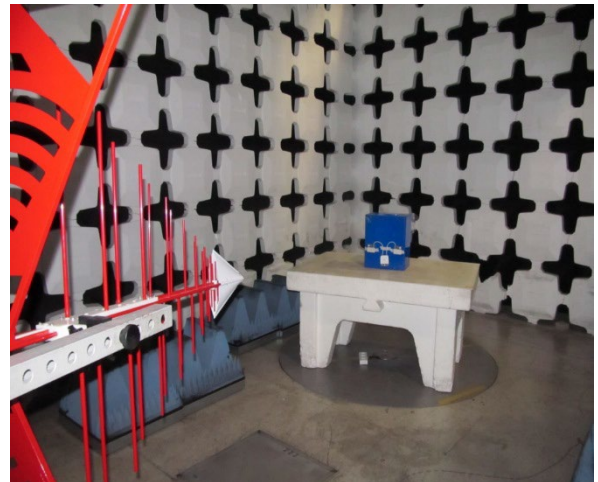


Photo 3.

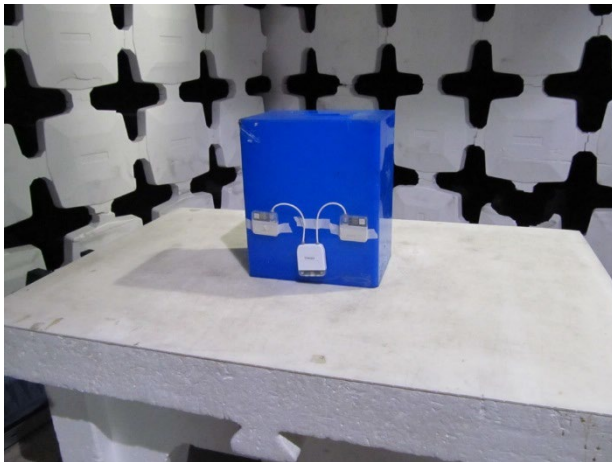


Photo 4.



Photo 5.

**End of the document**