



RF TEST REPORT

Applicant Eltel Group Inc.
Product LTE Desk Router
Model R520
Report No. Y1810A0962-R1
Issue Date October 12, 2018

TA Technology (Shanghai) Co., Ltd. tested the above equipment in accordance with the requirements in **FCC CFR47 Part 2 (2018)/ FCC CFR47 Part 27C (2018)**. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Wei Liu

Guangchang Fan

Performed by: Wei Liu/ Manager

Approved by: Guangchang Fan/ Director

TA Technology (Shanghai) Co., Ltd.

No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China

TEL: +86-021-50791141/2/3

FAX: +86-021-50791141/2/3-8000



Table of Contents

1	Test Laboratory.....	4
1.1	Notes of the Test Report	4
1.2	Test facility	4
1.3	Testing Location.....	5
2	General Description of Equipment under Test.....	6
3	Applied Standards	7
4	Test Configuration	8
5	Test Case Results	9
5.1	RF Power Output	9
5.2	Radiates Spurious Emission	12
6	Main Test Instruments	20



Summary of Measurement Results

Number	Test Case	Clause in FCC rules	Note
1	RF power output	2.1046	PASS
2	Radiates Spurious Emission	2.1053 /27.53(m)	/
Date of Testing: October 10, 2018			

1 Test Laboratory

1.1 Notes of the Test Report

This report shall not be reproduced in full or partial, without the written approval of **TA technology (shanghai) co., Ltd.** The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein .Measurement Uncertainties were not taken into account and are published for informational purposes only. This report is written to support regulatory compliance of the applicable standards stated above.

1.2 Test facility

CNAS (accreditation number: L2264)

TA Technology (Shanghai) Co., Ltd. has obtained the accreditation of China National Accreditation Service for Conformity Assessment (CNAS).

FCC (Designation number: CN1179, Test Firm Registration Number: 446626)

TA Technology (Shanghai) Co., Ltd. has been listed on the US Federal Communications Commission list of test facilities recognized to perform electromagnetic emissions measurements.

IC (recognition number is 8510A)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Canada to perform electromagnetic emission measurement.

VCCI (recognition number is C-4595, T-2154, R-4113, G-10766)

TA Technology (Shanghai) Co., Ltd. has been listed by industry Japan to perform electromagnetic emission measurement.

A2LA (Certificate Number: 3857.01)

TA Technology (Shanghai) Co., Ltd. has been listed by American Association for Laboratory Accreditation to perform electromagnetic emission measurement.

1.3 Testing Location

Company: TA Technology (Shanghai) Co., Ltd.
Address: No.145, Jintang Rd, Tangzhen Industry Park, Pudong Shanghai, China
City: Shanghai
Post code: 201201
Country: P. R. China
Contact: Xu Kai
Telephone: +86-021-50791141/2/3
Fax: +86-021-50791141/2/3-8000
Website: <http://www.ta-shanghai.com>
E-mail: xukai@ta-shanghai.com

2 General Description of Equipment under Test

Client Information

Applicant	Eltel Group Inc.
Applicant address	19 Calle 5-65 Zona 10, Guatemala
Manufacturer	Shanghai BroadMobi Communication Technology Co., Ltd
Manufacturer address	15F,Building9,No99.Tianzhou Rd.,Xuhui District,Shanghai,P.R.China

General information

EUT Description			
Model	R520		
IMEI	/		
Hardware Version	2.0		
Software Version	1.01		
Power Supply	AC adapter		
Antenna Type	Internal Antenna		
Test Mode(s)	LTE Band 7		
Test Modulation	(LTE)QPSK 16QAM;		
LTE Category	/		
Operating Frequency Range(s)	Mode	Tx (MHz)	Rx (MHz)
	LTE Band 7	2500 ~ 2570	2620 ~ 2690
Note: 1. The information of the EUT is declared by the manufacturer.			

3 Applied Standards

According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

Test standards

FCC CFR47 Part 2 (2018)

FCC CFR47 Part 27C (2018)

ANSI C63.26 (2015)

KDB 971168 D01 Power Meas License Digital Systems v03r01

4 Test Configuration

Radiated measurements are performed by rotating the EUT in three different orthogonal test planes. EUT stand-up position (Z axis), lie-down position (X, Y axis). Receiver antenna polarization (horizontal and vertical), the worst emission was found in position (Z axis, horizontal polarization) and the worst case was recorded.

All mode and data rates and positions and RB size and modulations were investigated.

Subsequently, only the worst case emissions are reported.

The following testing in LTE is set based on the maximum RF Output Power.

The following testing in different Bandwidth is set to detail in the following table:

Test modes are chosen to be reported as the worst case configuration below for LTE Band 7

Test items	Modes	Bandwidth (MHz)						Modulation		RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	50%	100%	L	M	H
RF power output	LTE 7	-	-	O	O	O	O	O	O	O	O	O	O	O	O
Radiates Spurious Emission	LTE 7	-	-	O	-	O	O	O	-	O	-	-	O	O	O
Note	1. The mark "O" means that this configuration is chosen for testing. 2. The mark "-" means that this configuration is not testing.														

5 Test Case Results

5.1 RF Power Output


Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Methods of Measurement

During the process of the testing, The EUT is controlled by the Base Station Simulator to ensure max power transmission and proper modulation.

Test Setup

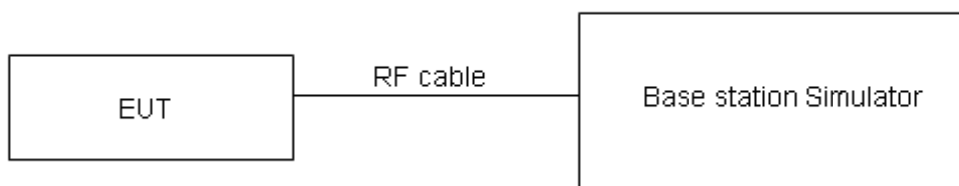

The loss between RF output port of the EUT and the input port of the tester has been taken into consideration.

Limits

No specific RF power output requirements in part 2.1046.

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U=0.4$ dB.

Test Results

LTE Band 7				Conducted Power(dBm)		
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20775/2502.5	21100/2535	21425/2567.5
5MHz	QPSK	1	0	22.14	22.15	22.12
		1	13	22.12	22.01	22.25
		1	24	21.98	22.06	22.22
		12	0	21.11	21.13	21.25
		12	6	21.07	21.14	21.22
		12	13	21.04	21.12	21.25
		25	0	20.97	21.01	21.24
	16QAM	1	0	20.53	20.46	20.94
		1	13	20.63	20.43	20.98
		1	24	20.61	20.11	20.65
		12	0	19.90	20.07	20.17
		12	6	19.80	20.05	20.19
		12	13	19.77	20.03	20.21
		25	0	20.13	20.01	20.19
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20800/2505	21100/2535	21400/2565
10MHz	QPSK	1	0	22.28	21.95	22.42
		1	25	22.60	21.96	22.68
		1	49	22.02	22.12	22.39
		25	0	21.11	20.96	21.27
		25	13	21.13	20.98	21.31
		25	25	21.07	20.95	21.38
		50	0	21.11	20.87	21.32
	16QAM	1	0	21.85	21.42	21.11
		1	25	22.27	21.47	21.08
		1	49	21.67	21.28	21.20
		25	0	20.37	19.98	20.28
		25	13	20.28	20.04	20.41
		25	25	20.18	20.11	20.62
		50	0	20.22	19.93	20.33
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20825/2507.5	21100/2535	21375/2562.5
15MHz	QPSK	1	0	22.36	22.06	22.28
		1	38	22.27	22.28	22.49
		1	74	22.45	21.99	22.31
		36	0	21.27	21.19	21.28
		36	18	21.25	21.14	21.40
		36	39	21.23	21.10	21.45



	16QAM	75	0	21.21	21.08	21.24
		1	0	21.63	21.45	21.41
		1	38	21.54	21.14	20.85
		1	74	21.73	21.18	20.97
		36	0	20.26	19.97	19.93
		36	18	20.18	19.99	20.18
		36	39	20.03	20.04	20.40
		75	0	20.13	19.93	20.12
Bandwidth	Modulation	RB size	RB offset	Channel/Frequency (MHz)		
				20850/2510	21100/2535	21350/2560
20MHz	QPSK	1	0	22.28	22.14	22.45
		1	50	22.57	22.59	22.44
		1	99	22.04	22.02	22.87
		50	0	21.40	21.14	21.24
		50	25	21.36	21.23	21.45
		50	50	21.24	21.22	21.57
		100	0	21.32	21.12	21.39
	16QAM	1	0	20.96	20.90	20.87
		1	50	21.19	21.84	21.58
		1	99	21.12	21.73	21.57
		50	0	20.16	20.18	20.15
		50	25	20.11	20.28	20.31
		50	50	20.09	20.26	20.42
		100	0	20.24	20.14	20.11

5.2 Radiates Spurious Emission

Ambient condition

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.5kPa

Method of Measurement

1. The testing follows FCC KDB 971168 D01 v03r01 Section 5.8 and ANSI C63.26 (2015).
2. Above 30MHz: The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H). Above 1GHz: (Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).
3. A log-periodic antenna or horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
4. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
5. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.
6. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
7. The measurement results are obtained as described below:

$$\text{Power(EIRP)} = \text{PMea} - \text{PAg} - \text{Pcl} + \text{Ga}$$
The measurement results are amend as described below:


$$\text{Power(EIRP)} = \text{PMea} - \text{Pcl} + \text{Ga}$$
8. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power. ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP

= EIRP-2.15dBi.


The modulation mode and RB allocation refer to section 5.1, using the maximum output power configuration.

Test setup

30MHz~~~ 1GHz

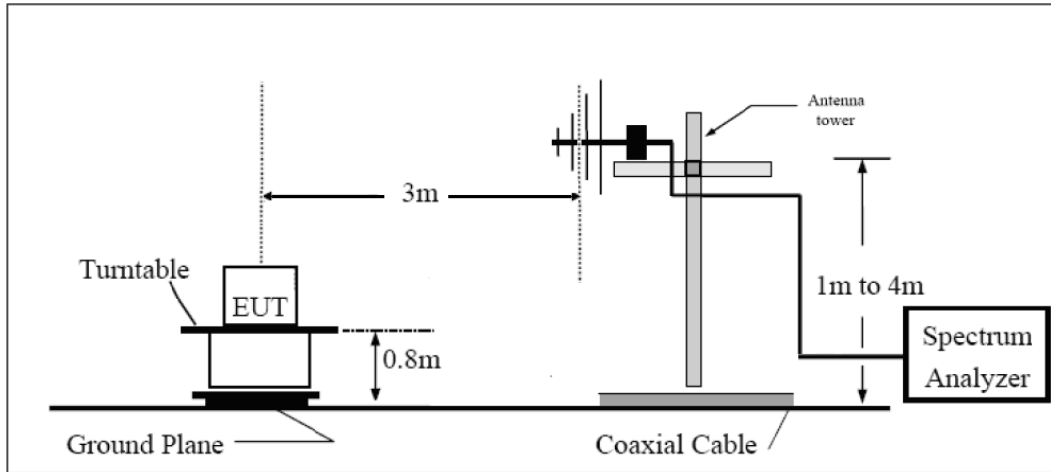

Above 1GHz

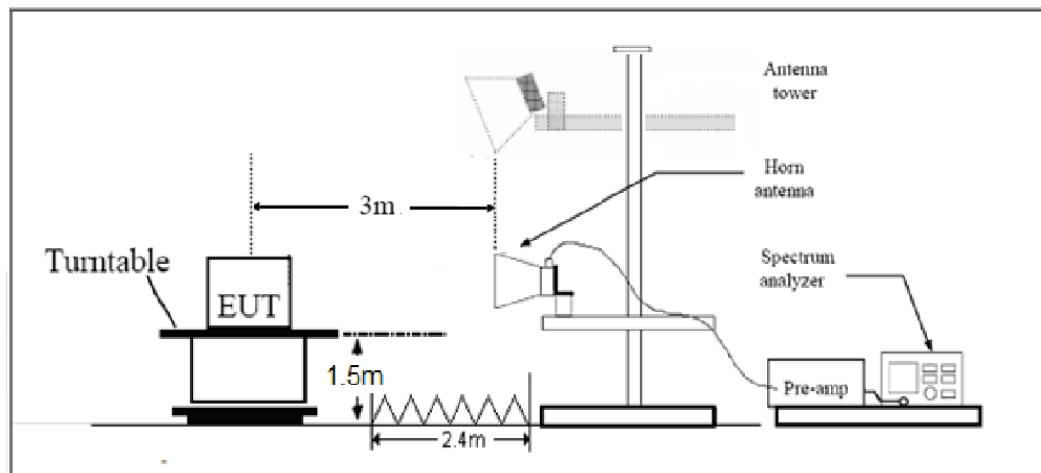

Note: Area side:2.4mX3.6m

**Limits**

Rule Part 27.53(m) $55 + 10 \log (P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(4) of this section.

Part 27.53(m) Limit	-25 dBm
---------------------	---------

Measurement Uncertainty

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = \pm 1.96$, $U = \pm 3.55$ dB.

Test Result

Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the emissions below the noise floor will not be recorded in the report.

LTE Band 7 QPSK 5MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5005.0	-48.39	2.00	9.15	Horizontal	-41.24	-25.00	16.24	45
3	7507.5	-54.78	2.50	11.35	Horizontal	-45.93	-25.00	20.93	180
4	10010.0	-47.16	4.20	12.05	Horizontal	-39.31	-25.00	14.31	90
5	12512.5	-43.48	5.20	12.85	Horizontal	-35.83	-25.00	10.83	0
6	15015.0	-51.03	5.50	14.23	Horizontal	-42.30	-25.00	17.30	180
7	17517.5	-51.89	5.70	14.15	Horizontal	-43.44	-25.00	18.44	45
8	20020.0	--	--	--	--	--	--	--	--
9	22522.5	--	--	--	--	--	--	--	--
10	25025.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 7 QPSK 5MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5070.0	-46.85	2.00	9.15	Horizontal	-39.70	-25.00	14.70	45
3	7605.0	-56.35	2.50	11.35	Horizontal	-47.50	-25.00	22.50	225
4	10140.0	-42.49	4.20	12.05	Horizontal	-34.64	-25.00	9.64	135
5	12675.0	-45.41	5.20	12.85	Horizontal	-37.76	-25.00	12.76	180
6	15210.0	-51.03	5.50	14.23	Horizontal	-42.30	-25.00	17.30	270
7	17745.0	-51.89	5.70	14.15	Horizontal	-43.44	-25.00	18.44	315
8	20280.0	--	--	--	--	--	--	--	--
9	22815.0	--	--	--	--	--	--	--	--
10	25350.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 7 QPSK 5MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5135.0	-45.18	2.00	9.15	Horizontal	-38.03	-25.00	13.03	135
3	7702.5	-52.56	2.50	11.35	Horizontal	-43.71	-25.00	18.71	225
4	10270.0	-44.39	4.20	12.05	Horizontal	-36.54	-25.00	11.54	45
5	12837.5	-42.23	5.20	12.85	Horizontal	-34.58	-25.00	9.58	135
6	15405.0	-50.63	5.50	14.23	Horizontal	-41.90	-25.00	16.90	90
7	17972.5	-51.96	5.70	14.15	Horizontal	-43.51	-25.00	18.51	225
8	20540.0	--	--	--	--	--	--	--	--
9	23107.5	--	--	--	--	--	--	--	--
10	25675.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 7 QPSK 10MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5010.0	-47.73	2.00	9.15	Horizontal	-40.58	-25.00	15.58	270
3	7515.0	-56.11	2.50	11.35	Horizontal	-47.26	-25.00	22.26	315
4	10020.0	-40.28	4.20	12.05	Horizontal	-32.43	-25.00	7.43	45
5	12525.0	-40.92	5.20	12.85	Horizontal	-33.27	-25.00	8.27	0
6	15030.0	-49.72	5.50	14.23	Horizontal	-40.99	-25.00	15.99	135
7	17535.0	-52.95	5.70	14.15	Horizontal	-44.50	-25.00	19.50	90
8	20040.0	--	--	--	--	--	--	--	--
9	22545.0	--	--	--	--	--	--	--	--
10	25050.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.



LTE Band 7 QPSK 10MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5070.0	-46.36	2.00	9.15	Horizontal	-39.21	-25.00	14.21	4
3	7605.0	-55.94	2.50	11.35	Horizontal	-47.09	-25.00	22.09	225
4	10140.0	-41.81	4.20	12.05	Horizontal	-33.96	-25.00	8.96	0
5	12675.0	-45.19	5.20	12.85	Horizontal	-37.54	-25.00	12.54	135
6	15210.0	-52.71	5.50	14.23	Horizontal	-43.98	-25.00	18.98	90
7	17745.0	-52.08	5.70	14.15	Horizontal	-43.63	-25.00	18.63	315
8	20280.0	--	--	--	--	--	--	--	--
9	22815.0	--	--	--	--	--	--	--	--
10	25350.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 7 QPSK 10MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5130.0	-47.22	2.00	10.15	Horizontal	-39.07	-25.00	14.07	90
3	7695.0	-53.32	2.50	11.35	Horizontal	-44.47	-25.00	19.47	45
4	10260.0	-44.89	4.20	12.05	Horizontal	-37.04	-25.00	12.04	225
5	12825.0	-42.49	5.20	14.85	Horizontal	-32.84	-25.00	7.84	270
6	15390.0	-51.84	5.50	13.23	Horizontal	-44.11	-25.00	19.11	0
7	17955.0	-49.99	5.70	12.15	Horizontal	-43.54	-25.00	18.54	90
8	20520.0	--	--	--	--	--	--	--	--
9	23085.0	--	--	--	--	--	--	--	--
10	25650.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.

2. The worst emission was found in the antenna is Horizontal position.

LTE Band 7 QPSK 20MHz CH-Low, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5020.0	-48.32	2.00	10.15	Horizontal	-40.17	-25.00	15.17	270
3	7530.0	-54.68	2.50	11.35	Horizontal	-45.83	-25.00	20.83	45
4	10040.0	-40.83	4.20	12.05	Horizontal	-32.98	-25.00	7.98	315
5	12550.0	-42.92	5.20	14.85	Horizontal	-33.27	-25.00	8.27	225
6	15060.0	-46.64	5.50	13.23	Horizontal	-38.91	-25.00	13.91	90
7	17570.0	-49.60	5.70	12.15	Horizontal	-43.15	-25.00	18.15	135
8	20080.0	--	--	--	--	--	--	--	--
9	22590.0	--	--	--	--	--	--	--	--
10	25100.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 7 QPSK 20MHz CH-Middle, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5070.0	-47.68	2.00	10.15	Horizontal	-39.53	-25.00	14.53	135
3	7605.0	-56.56	2.50	11.35	Horizontal	-47.71	-25.00	22.71	225
4	10140.0	-42.58	4.20	12.05	Horizontal	-34.73	-25.00	9.73	135
5	12675.0	-47.61	5.20	14.85	Horizontal	-37.96	-25.00	12.96	90
6	15210.0	-49.80	5.50	13.23	Horizontal	-42.07	-25.00	17.07	315
7	17745.0	-49.90	5.70	12.15	Horizontal	-43.45	-25.00	18.45	90
8	20280.0	--	--	--	--	--	--	--	--
9	22815.0	--	--	--	--	--	--	--	--
10	25350.0	--	--	--	--	--	--	--	--

Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor.
2. The worst emission was found in the antenna is Horizontal position.

LTE Band 7 QPSK 20MHz CH-High, RB 1

Harmonic	Frequency (MHz)	SG (dBm)	Cable Loss (dB)	Gain (dBi)	Antenna Polarization	EIRP Level (dBm)	Limit (dBm)	Margin (dB)	Azimuth (deg)
2	5120.0	-48.44	2.00	10.15	Horizontal	-40.29	-25.00	15.29	90
3	7680.0	-53.83	2.50	11.35	Horizontal	-44.98	-25.00	19.98	315
4	10240.0	-40.91	4.20	12.05	Horizontal	-33.06	-25.00	8.06	270
5	12800.0	-40.96	5.20	14.85	Horizontal	-31.31	-25.00	6.31	225
6	15360.0	-50.82	5.50	13.23	Horizontal	-43.09	-25.00	18.09	45
7	17920.0	-49.98	5.70	12.15	Horizontal	-43.53	-25.00	18.53	0
8	20480.0	--	--	--	--	--	--	--	--
9	23040.0	--	--	--	--	--	--	--	--
10	25600.0	--	--	--	--	--	--	--	--
Note: 1.The other Spurious RF Radiated emissions level is no more than noise floor. 2. The worst emission was found in the antenna is Horizontal position.									

6 Main Test Instruments

Name	Manufacturer	Type	Serial Number	Calibration Date	Expiration Date
Base Station Simulator	R&S	CMW500	113824	2018-05-20	2019-05-19
Power Splitter	Hua Xiang	SHX-GF2-2-13	10120101	/	/
Spectrum Analyzer	Key sight	N9010A	MY50210259	2018-05-20	2019-05-19
Signal Analyzer	R&S	FSV30	100815	2017-12-17	2018-12-16
EMI Test Receiver	R&S	ESCI	100948	2018-05-20	2019-05-19
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2017-09-26	2019-09-25
Trilog Antenna	SCHWARZBECK	VUBL 9163	9163-201	2017-11-18	2019-11-17
Horn Antenna	R&S	HF907	100126	2018-07-07	2020-07-06
Horn Antenna	ETS-Lindgren	3160-09	00102643	2018-06-20	2020-06-19
Signal generator	R&S	SMB 100A	102594	2018-05-20	2019-05-19
Climatic Chamber	ESPEC	SU-242	93000506	2017-12-17	2020-12-16
Preamplifier	R&S	SCU18	102327	2018-05-20	2019-05-19
MOB COMMS DC SUPPLY	Keysight	66319D	MY43004105	2018-05-21	2019-05-20
RF Cable	Agilent	SMA 15cm	0001	/	/
Software	R&S	EMC32	9.26.0	/	/

*****END OF REPORT *****