

FCC RADIO TEST REPORT

FCC ID: 2AQ5W-GT500V

Product : Handheld Device

Trade Mark : AMobile

Model Name : GT500V

Serial Model : N/A

Report No. : S18092901802E001

Prepared for

Hong Kong AMobile Intelligent Corp. Limited Taiwan Branch
8F.-1, No.700, Zhongzheng Rd., Zhonghe Dist., New Taipei City
235, Taiwan

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.
1/F, Building E, Fenda Science Park, Sanwei Community,
Xixiang Street Bao'an District, Shenzhen 518126 P.R. China
Tel.: +86-755-6115 6588
Fax.: +86-755-6115 6599
Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's name : Hong Kong AMobile Intelligent Corp. Limited Taiwan Branch
Address : 8F.-1, No.700, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan

Manufacturer's Name : Hong Kong AMobile Intelligent Corp. Limited Taiwan Branch
Address : 8F.-1, No.700, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan

Product description

Product name : Handheld Device
Model and/or type reference : GT500V
Serial Model : N/A

Standards : FCC Part15.407

Test procedure : ANSI C63.10-2013
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

This device described above has been tested by NTEK, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements/ the Industry Canada requirements.. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests : 28 Jun. 2018 ~ 16 Oct. 2018

Date of Issue : 18 Oct. 2018

Test Result : Pass

Testing Engineer : [Signature: Loren Luo]
(Loren Luo)

Technical Manager : [Signature: Jason Chen]
(Jason Chen)

Authorized Signatory : [Signature: Sam Chen]
(Sam Chen)

Table of Contents

	Page
1 . SUMMARY OF TEST RESULTS	6
1.1 FACILITIES AND ACCREDITATIONS	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	12
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	13
3 . EMC EMISSION TEST	15
3.1 CONDUCTED EMISSION MEASUREMENT	15
3.1.1 APPLICABLE STANDARD	15
3.1.2 CONFORMANCE LIMIT	15
3.1.3 TEST CONFIGURATION	15
3.1.4 TEST PROCEDURE	15
3.2 RADIATED EMISSION MEASUREMENT	20
3.2.1 APPLICABLE STANDARD	20
3.2.2 CONFORMANCE LIMIT	20
3.2.3 MEASURING INSTRUMENTS	20
3.2.4 TEST CONFIGURATION	21
3.2.5 TEST PROCEDURE	22
3.2.6 TEST RESULTS (9KHZ – 30 MHZ)	23
3.2.7 TEST RESULTS (30MHZ – 1GHZ)	24
3.2.8 TEST RESULTS (1GHZ-26GHZ)	28
3.2.9 TEST RESULTS (26GHZ-40GHZ)	30
4 . POWER SPECTRAL DENSITY TEST	34
4.1 APPLIED PROCEDURES / LIMIT	34
4.2 TEST PROCEDURE	35
4.3 DEVIATION FROM STANDARD	35
4.4 TEST SETUP	35
4.5 EUT OPERATION CONDITIONS	35
4.6 TEST RESULTS	36
5 . 26DB & 99% EMISSION BANDWIDTH	44
5.1 APPLIED PROCEDURES / LIMIT	44
5.2 TEST PROCEDURE	44
5.3 EUT OPERATION CONDITIONS	45
5.4 TEST RESULTS	46

Table of Contents

	Page
6 . MINIMUM 6 DB BANDWIDTH	54
6.1 APPLIED PROCEDURES / LIMIT	54
6.2 TEST PROCEDURE	54
6.3 DEVIATION FROM STANDARD	54
6.4 TEST SETUP	54
6.5 EUT OPERATION CONDITIONS	54
6.6 TEST RESULTS	55
7 . MAXIMUM CONDUCTED OUTPUT POWER	63
7.1 PPLIED PROCEDURES / LIMIT	63
7.2 TEST PROCEDURE	63
7.3 DEVIATION FROM STANDARD	65
7.4 TEST SETUP	65
7.5 EUT OPERATION CONDITIONS	65
7.6 TEST RESULTS	66
8 . OUT OF BAND EMISSIONS	68
8.1 APPLICABLE STANDARD	68
8.2 TEST PROCEDURE	68
8.3 DEVIATION FROM STANDARD	68
8.4 TEST SETUP	68
8.5 EUT OPERATION CONDITIONS	68
8.6 TEST RESULTS	69
9. SPURIOUS RF CONDUCTED EMISSIONS	76
9.1 CONFORMANCE LIMIT	76
9.2 MEASURING INSTRUMENTS	76
9.3 TEST SETUP	76
9.4 TEST PROCEDURE	76
9.5 TEST RESULTS	76
10. FREQUENCY STABILITY MEASUREMENT	91
10.1 LIMIT	91
10.2 TEST PROCEDURES	91
10.3 TEST SETUP LAYOUT	91
10.4 EUT OPERATION DURING TEST	91
10.5 TEST RESULTS	92
11. ANTENNA REQUIREMENT	98
11.1 STANDARD REQUIREMENT	98
11.2 EUT ANTENNA	98

Revision History

Report No.	Version	Description	Issued Date
S18092901802E001	Rev.01	Initial issue of report	Oct 18, 2018

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	AC Power Line Conducted Emissions	PASS	
15.209(a), 15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(6)	Spurious Radiated Emissions	PASS	
15.407 (a)(1) 15.407 (a)(3) 15.1049	26 dB and 99% Emission Bandwidth	PASS	
15.407(e)	Minimum 6 dB bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
2.1051, 15.407(b)(1) 15.407(b)(4)	Band Edge	PASS	
15.407 (a)(1) 15.407 (a)(3)	Power Spectral Density	PASS	
2.1051, 15.407(b)	Spurious Emissions at Antenna Terminals	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

1.1 FACILITIES AND ACCREDITATIONS

FACILITIES

All measurement facilities used to collect the measurement data are located at 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516.

IC-Registration The Certificate Registration Number is 9270A-1.

FCC- Accredited Test Firm Registration Number: 463705.
Designation Number: CN1184

A2LA-Lab. The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

Name of Firm : Shenzhen NTEK Testing Technology Co., Ltd.

Site Location : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street, Bao'an District, Shenzhen 518126 P.R. China.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	± 2.80 dB
2	RF power, conducted	± 0.16 dB
3	Spurious emissions, conducted	± 0.21 dB
4	All emissions, radiated(30MHz~1GHz)	± 2.64 dB
5	All emissions, radiated(1GHz~6GHz)	± 2.40 dB
6	All emissions, radiated(> 6GHz)	± 2.52 dB
7	Temperature	± 0.5 °C
8	Humidity	± 2 %

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Handheld Device	
Trade Mark	AMobile	
Model Name	GT500V	
Serial Model	N/A	
Model Difference	N/A	
FCC ID	2AQ5W-GT500V	
Product Description	IEEE 802.11 WLAN Mode Supported	<input checked="" type="checkbox"/> 802.11a/n/ac(20MHz channel bandwidth) <input checked="" type="checkbox"/> 802.11n/ac(40MHz channel bandwidth) <input type="checkbox"/> 802.11ac(80MHz channel bandwidth)
	Data Rate	802.11a: 6,9,12,18,24,36,48,54Mbps; 802.11n(HT20/HT40):MCS0-MCS15; 802.11ac(VHT20): NSS1, MCS0-MCS8 802.11ac(VHT40):NSS1, MCS0-MCS9
	Modulation	OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11a/n/ac;
	Operating Frequency Range	<input checked="" type="checkbox"/> 5180-5240MHz for 802.11a/n(HT20)/ac20; 5190-5230MHz for 802.11n(HT40)/ac40; <input checked="" type="checkbox"/> 5745-5825 MHz for 802.11a/n(HT20)/ac20; 5755-5795 MHz for 802.11a/n(HT40)/ac40;
	Number of Channels	<input checked="" type="checkbox"/> 4 channels for 802.11a/n20/ac20 in the 5180-5240MHz band ; 2 channels for 802.11 n40/ac40 in the 5190-5230MHz band ; <input checked="" type="checkbox"/> 5 channels for 802.11a/n20/ac20 in the 5745-5825MHz band ; 2 channels for 802.11 n40/ac40 in the 5755-5795MHz band ;
	Antenna Type	FPCB Antenna
	Antenna Gain	1dBi
	Based on the application, features, or specification exhibited in User's Manual, More details of EUT technical specification, please refer to the User's Manual.	
Ratings	DC 3.8V from Battery or DC 5V from USB Port.	
Adapter	Model:PSAF10R-050Q Input: 100-240V~50-60Hz 0.3A Output: 5V---2.0A	
Battery	DC 3.8V,4800mAh	
Connecting I/O Port(s)	Please refer to the User's Manual	
HW Version	GT-500V_MB_V1.1_170929	
SW Version	V018.08.01	

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency and Channel list for 802.11a/n(20MHz) band I (5180-5240MHz):

802.11a/n/ac(20MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220	-	-	-	-
40	5200	48	5240	-	-	-	-

Frequency and Channel list for 802.11n(40MHz) band I (5190-5230MHz):

802.11n /ac(40MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	-	-	-	-	-	-
46	5230	-	-	-	-	-	-

Frequency and Channel list for 802.11a/n(20 MHz) band IV (5745-5825MHz):

802.11a/n/ac(20 MHz) Carrier Frequency Channel							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	153	5765	157	5785	161	5805
165	5825	-	-	-	-	-	-

Frequency and Channel list for 802.11n(40MHz) band IV (5755-5795MHz):

802.11n/ac 40MHz Carrier Frequency Channel					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795	-	-

Antenna

Antenna	Antenna Type	Antenna Gain(dBi)
		5G
A(main)	FPCB	1

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Normal Link Mode
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159

For Conducted Emission	
Final Test Mode	Description
Mode 1	Normal Link Mode


For Radiated Emission	
Final Test Mode	Description
Mode 2	802.11a / n/ ac 20 CH36/ CH40/ CH 48 802.11a /n/ ac 20 CH149/ CH157/ CH 165
Mode 3	802.11n/ ac40 CH38/ CH 46 802.11n/ ac40 CH 151 / CH 159

Note:


- (1) The measurements are performed at the highest, middle, lowest available channels.
- (2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


For AC Conducted Emission Mode

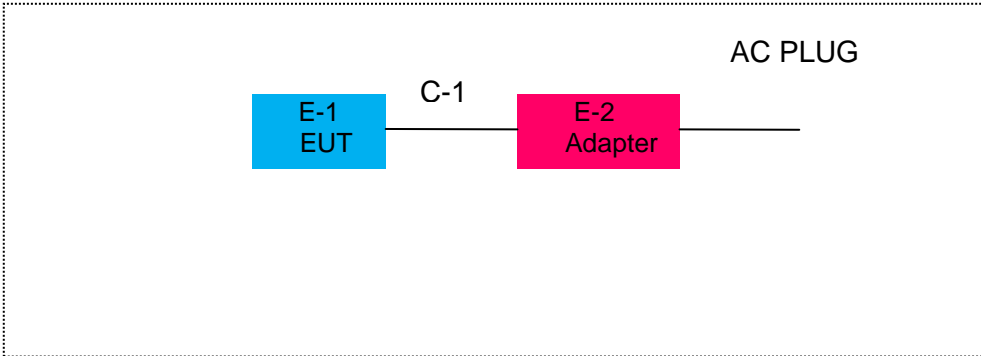

Radiated Spurious Emission Test

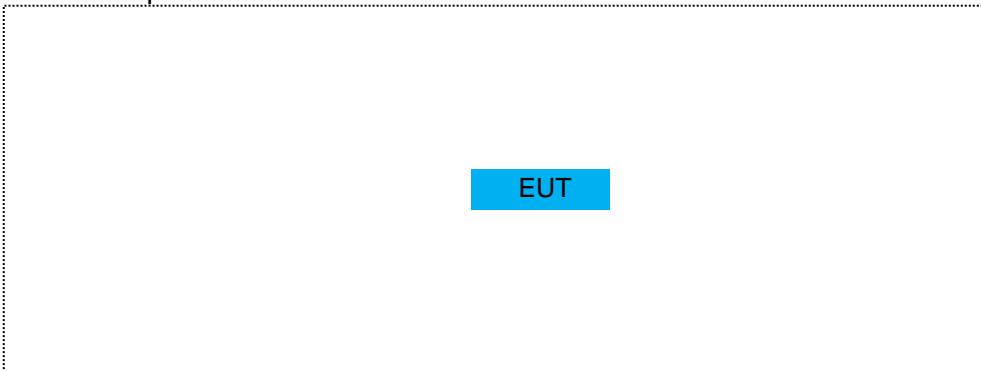

For Conducted Test Cases

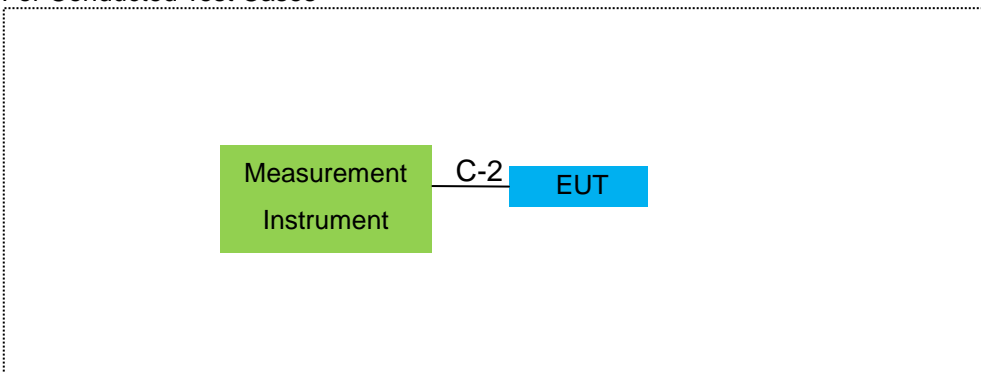

Note: EUT built-in battery-powered, the battery is fully-charged.

2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	Handheld Device	AMobile	GT500V	N/A	EUT
E-2	Adapter	N/A	PSAF10R-050Q	N/A	Peripherals

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
C-1	USB Cable	NO	NO	1.0m	
C-2	RF Cable	NO	NO	0.5m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation& Conducted Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Agilent	E4407B	MY45108040	2018.05.19	2019.05.18	1 year
2	Spectrum Analyzer	Agilent	N9020A	MY49100060	2017.10.26	2018.10.25	1 year
3	EMI Test Receiver	Agilent	N9038A	MY53227146	2017.10.26	2018.10.25	1 year
4	Test Receiver	R&S	ESPI	101318	2018.05.19	2019.05.18	1 year
5	Bilog Antenna	TESEQ	CBL6111D	31216	2018.04.08	2019.04.07	1 year
6	50Ω Coaxial Switch	Anritsu	MP59B	6200983705	2018.05.19	2020.05.18	3 year
7	Horn Antenna	EM	EM-AH-10180	2011071402	2018.04.08	2019.04.07	1 year
8	Horn Ant	Schwarzbeck	BBHA 9170	9170-181	2018.08.05	2019.08.04	1 year
9	Amplifier	EMC	EMC051835SE	980246	2017.12.06	2018.12.06	1 year
10	Amplifier	MITEQ	TTA1840-35-HG	177156	2018.08.05	2019.08.04	1 year
11	Loop Antenna	ARA	PLA-1030/B	1029	2017.04.21	2020.04.20	3 year
12	Power Meter	DARE	RPR3006W	15100041SN084	2017.04.21	2020.04.20	3 year
13	Test Cable (9KHz-30MHz)	N/A	R-01	N/A	2017.04.21	2020.04.20	3 year
14	Test Cable (30MHz-1GHz)	N/A	R-02	N/A	2017.04.21	2020.04.20	3 year
15	High Test Cable(1G-40G Hz)	N/A	R-03	N/A	2017.04.19	2020.04.18	3 year
16	High Test Cable(1G-40G Hz)	N/A	R-04	N/A	N/A	N/A	3 year
17	Filter	TRILTHIC	2400MHz	29	2018.04.09	2019.04.08	1 year
18	temporary antenna connector (Note)	NTS	R001	N/A	2017.12.06	2018.12.06	1 year

Note:

We will use the temporary antenna connector (soldered on the PCB board) When conducted test
And this temporary antenna connector is listed within the instrument list

AC Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Test Receiver	R&S	ESCI	101160	2018.05.19	2019.05.18	1 year
2	LISN	R&S	ENV216	101313	2018.04.18	2019.04.19	1 year
3	LISN	SCHWARZBECK	NNLK 8129	8129245	2018.05.19	2019.05.18	1 year
4	50Ω Coaxial Switch	ANRITSU CORP	MP59B	6200983704	2018.05.19	2020.05.18	3 year
5	Test Cable (9KHz-30MHz)	N/A	C01	N/A	2017.04.21	2020.04.20	3 year
6	Test Cable (9KHz-30MHz)	N/A	C02	N/A	2017.04.21	2020.04.20	3 year
7	Test Cable (9KHz-30MHz)	N/A	C03	N/A	2017.04.21	2020.04.20	3 year

Note: Each piece of equipment is scheduled for calibration once a year except the Test Cable which is scheduled for calibration every 3 years.

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 APPLICABLE STANDARD


According to FCC Part 15.207(a) and KDB 174176 D01 Line Conducted FAQ v01r01

3.1.2 CONFORMANCE LIMIT

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56*	56-46*
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. *Decreases with the logarithm of the frequency
 2. The lower limit shall apply at the transition frequencies
 3. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

3.1.3 TEST CONFIGURATION

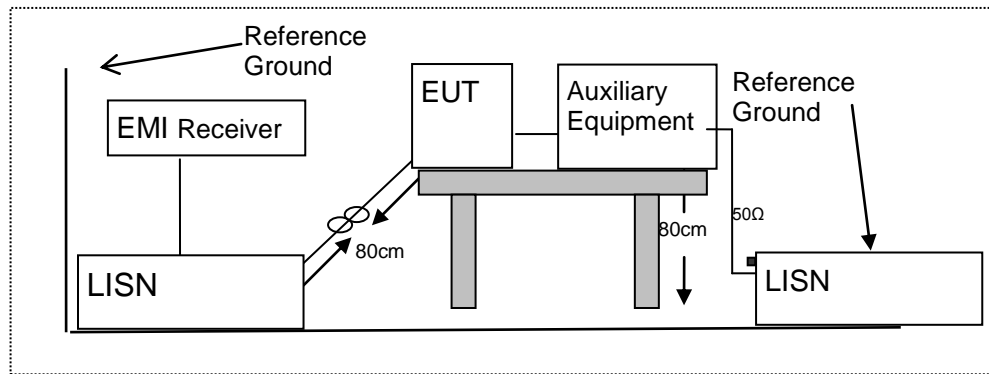

3.1.4 TEST PROCEDURE

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room.
2. The EUT was placed on a table which is 0.8m above ground plane.
3. Connect EUT to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
4. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40cm long.
5. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
6. LISN at least 80 cm from nearest part of EUT chassis.
7. The frequency range from 150KHz to 30MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth(IF bandwidth=9KHz) with Maximum Hold Mode
9. For the actual test configuration, please refer to the related Item –EUT Test Photos.

EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.2260	38.70	9.76	48.46	62.59	-14.13	QP
0.2260	20.91	9.76	30.67	52.59	-21.92	AVG
0.5897	37.49	9.74	47.23	56.00	-8.77	QP
0.5897	27.60	9.74	37.34	46.00	-8.66	AVG
0.6460	39.02	9.74	48.76	56.00	-7.24	QP
0.6460	28.92	9.74	38.66	46.00	-7.34	AVG
1.2338	39.69	9.74	49.43	56.00	-6.57	QP
1.2338	23.78	9.74	33.52	46.00	-12.48	AVG
1.3420	40.41	9.75	50.16	56.00	-5.84	QP
1.3420	23.79	9.75	33.54	46.00	-12.46	AVG
12.2179	21.78	10.05	31.83	50.00	-18.17	AVG
12.3739	37.44	10.05	47.49	60.00	-12.51	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

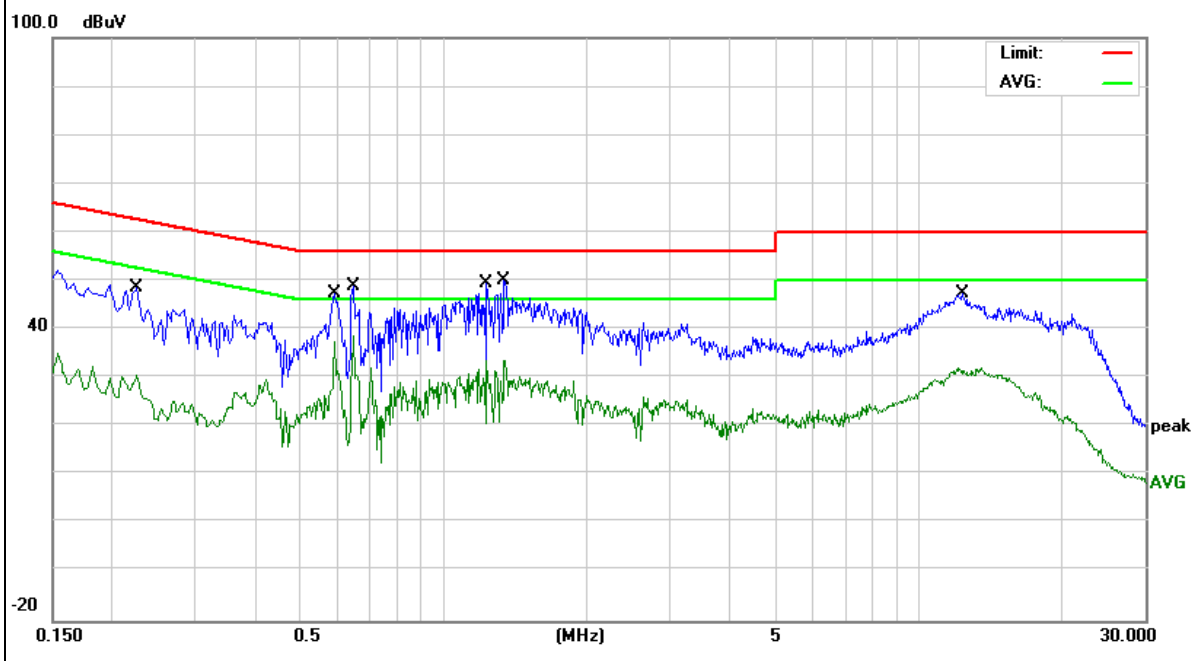


EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 120V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.5299	28.67	9.75	38.42	56.00	-17.58	QP
0.5299	13.97	9.75	23.72	46.00	-22.28	AVG
0.5977	32.31	9.75	42.06	56.00	-13.94	QP
0.6018	20.12	9.75	29.87	46.00	-16.13	AVG
0.6580	22.33	9.75	32.08	46.00	-13.92	AVG
0.6620	35.37	9.75	45.12	56.00	-10.88	QP
1.3220	34.35	9.76	44.11	56.00	-11.89	QP
1.3500	20.20	9.76	29.96	46.00	-16.04	AVG
11.9657	18.51	10.07	28.58	50.00	-21.42	AVG
12.1339	35.97	10.07	46.04	60.00	-13.96	QP
15.5419	20.10	10.10	30.20	50.00	-19.80	AVG
15.8696	37.44	10.11	47.55	60.00	-12.45	QP

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

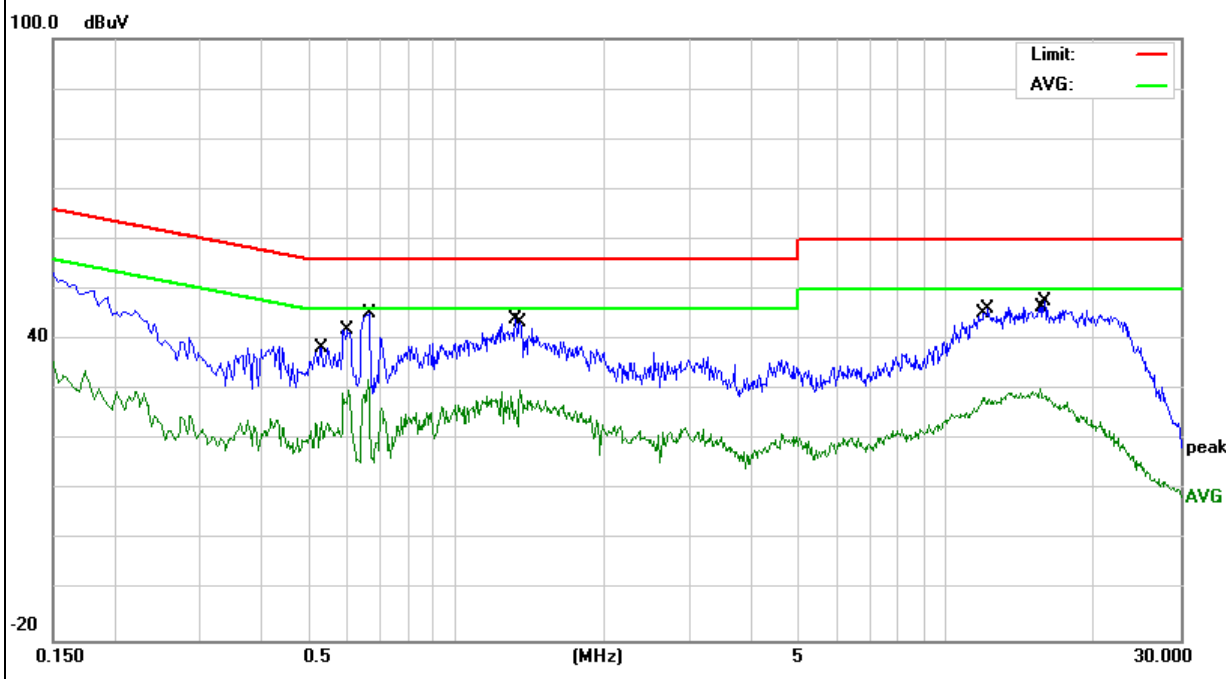


EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	L
Test Voltage :	DC 5V from Adapter AC 240V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measurement (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.6058	41.12	9.74	50.86	56.00	-5.14	QP
0.6058	30.87	9.74	40.61	46.00	-5.39	AVG
0.6620	42.45	9.74	52.19	56.00	-3.81	QP
0.6660	33.19	9.74	42.93	46.00	-3.07	AVG
0.8215	37.81	9.74	47.55	56.00	-8.45	QP
0.8296	22.15	9.74	31.89	46.00	-14.11	AVG
1.2177	38.81	9.74	48.55	56.00	-7.45	QP
1.2177	27.05	9.74	36.79	46.00	-9.21	AVG
1.3260	41.62	9.75	51.37	56.00	-4.63	QP
1.3260	31.64	9.75	41.39	46.00	-4.61	AVG
10.9016	36.10	10.02	46.12	60.00	-13.88	QP
10.9016	20.96	10.02	30.98	50.00	-19.02	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

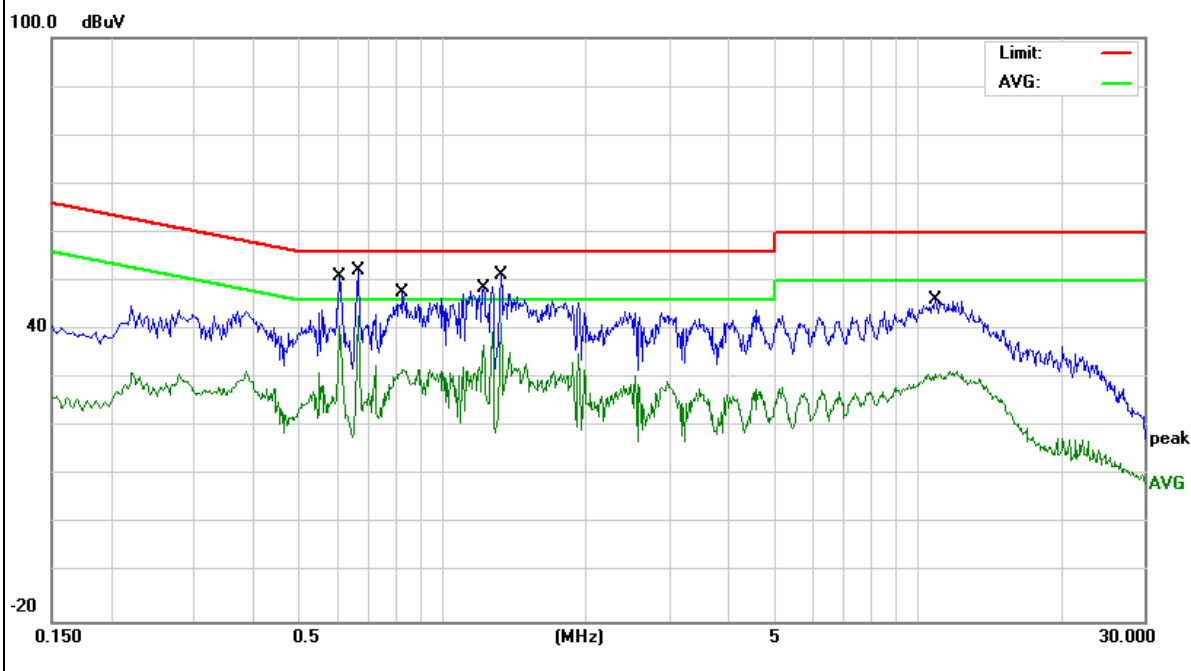


EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	26 °C	Relative Humidity :	56%
Pressure :	1010hPa	Phase :	N
Test Voltage :	DC 5V from Adapter AC 240V/60Hz	Test Mode :	Mode 1

Frequency (MHz)	Reading Level (dBμV)	Correct Factor (dB)	Measure-ment (dBμV)	Limits (dBμV)	Margin (dB)	Remark
0.3860	15.65	9.75	25.40	48.15	-22.75	AVG
0.3899	28.90	9.75	38.65	58.06	-19.41	QP
0.6058	25.03	9.75	34.78	46.00	-11.22	AVG
0.6097	36.35	9.75	46.10	56.00	-9.90	QP
0.6620	35.22	9.75	44.97	56.00	-11.03	QP
0.6620	27.09	9.75	36.84	46.00	-9.16	AVG
1.2177	35.49	9.75	45.24	56.00	-10.76	QP
1.2177	23.57	9.75	33.32	46.00	-12.68	AVG
1.3260	36.67	9.76	46.43	56.00	-9.57	QP
1.3260	26.11	9.76	35.87	46.00	-10.13	AVG
11.7018	36.46	10.07	46.53	60.00	-13.47	QP
11.7018	17.80	10.07	27.87	50.00	-22.13	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

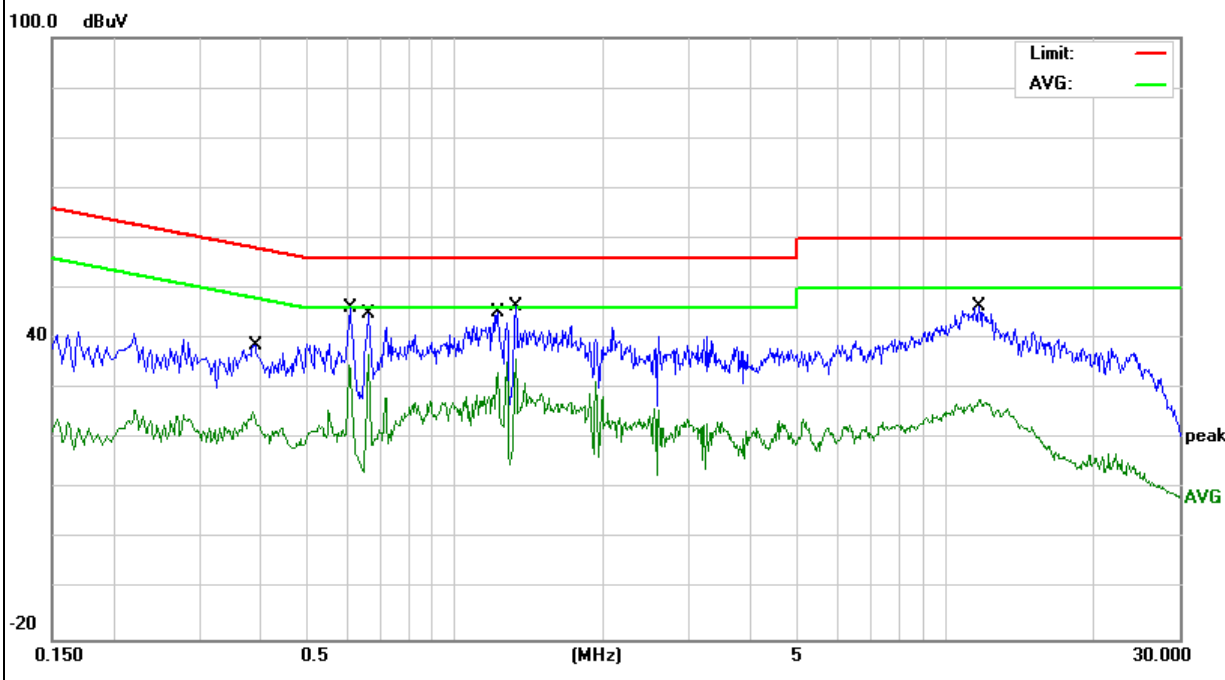

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 APPLICABLE STANDARD

According to FCC Part 15.407(d) and 15.209

3.2.2 CONFORMANCE LIMIT

According to FCC Part 15.407(b)(7): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
According to FCC Part 15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Restricted Frequency(MHz)	Field Strength (µV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009~0.490	2400/F(KHz)	20 log (uV/m)	300
0.490~1.705	2400/F(KHz)	20 log (uV/m)	30
1.705~30.0	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Limits of Radiated Emission Measurement(Above 1000MHz)

Frequency(MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54


- Remark : 1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB);
 Limit line=Specific limits(dBuV) + distance extrapolation factor.

3.2.3 MEASURING INSTRUMENTS


The Measuring equipment is listed in the section 6.3 of this test report.

3.2.4 TEST CONFIGURATION


(a) For radiated emissions below 30MHz

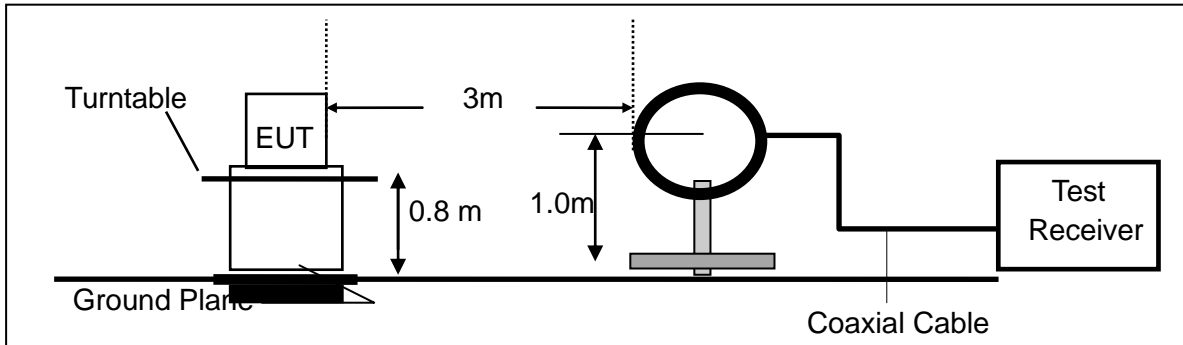

(b) For radiated emissions from 30MHz to 1000MHz

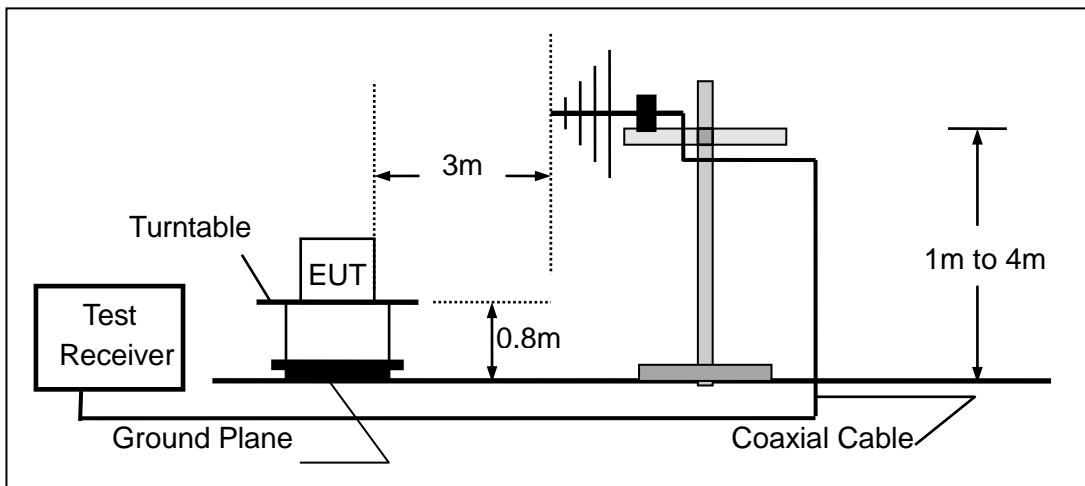

(c) For radiated emissions above 1000MHz

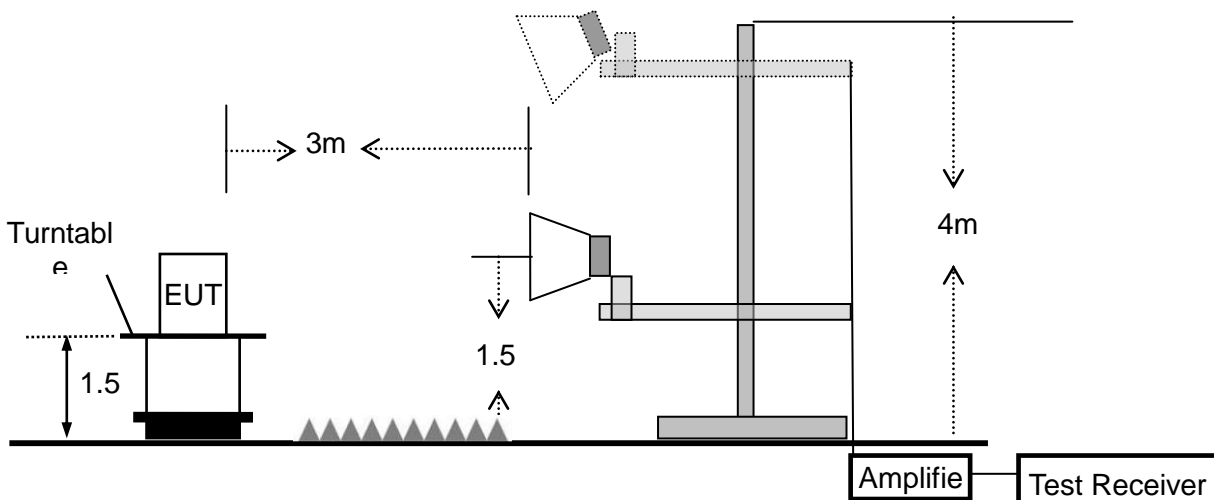

3.2.5 TEST PROCEDURE

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Average	1 MHz	10 Hz

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW [kHz]})$. , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

3.2.6 TEST RESULTS (9KHZ – 30 MHZ)

EUT:	Handheld Device	Model Name. :	GT500V
Temperature:	20 °C	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX	Polarization :	--

Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	N/A
--	--	--	--	N/A

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.


3.2.7 TEST RESULTS (30MHZ – 1GHZ)

EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.2G)- 802.11a (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	33.3278	8.81	17.48	26.29	40.00	-13.71	QP
V	47.1599	17.99	11.29	29.28	40.00	-10.72	QP
V	61.1315	22.51	6.43	28.94	40.00	-11.06	QP
V	86.5027	19.55	10.01	29.56	40.00	-10.44	QP
V	177.5089	24.61	10.82	35.43	43.50	-8.07	QP
V	731.9202	5.52	27.35	32.87	46.00	-13.13	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

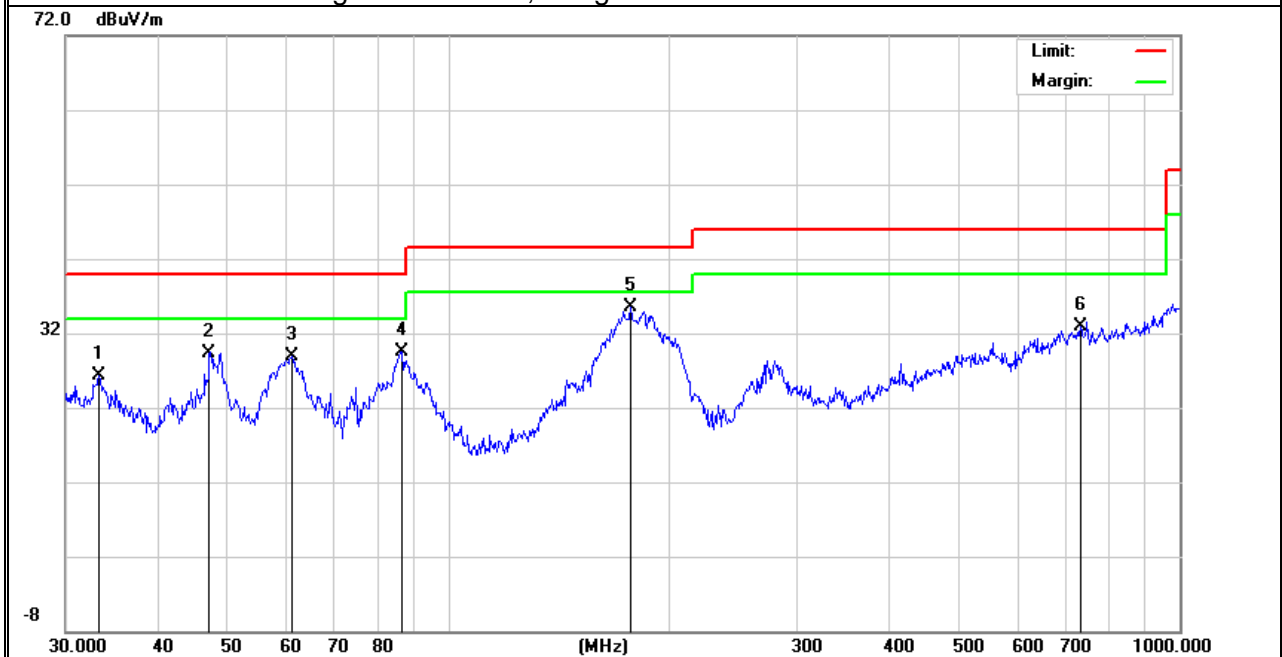

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	34.3962	7.97	16.96	24.93	40.00	-15.07	QP
H	84.9993	12.46	9.69	22.15	40.00	-17.85	QP
H	143.8291	14.21	13.18	27.39	43.50	-16.11	QP
H	185.1379	22.90	10.75	33.65	43.50	-9.85	QP
H	198.5877	23.85	9.78	33.63	43.50	-9.87	QP
H	975.7527	5.45	31.12	36.57	54.00	-17.43	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

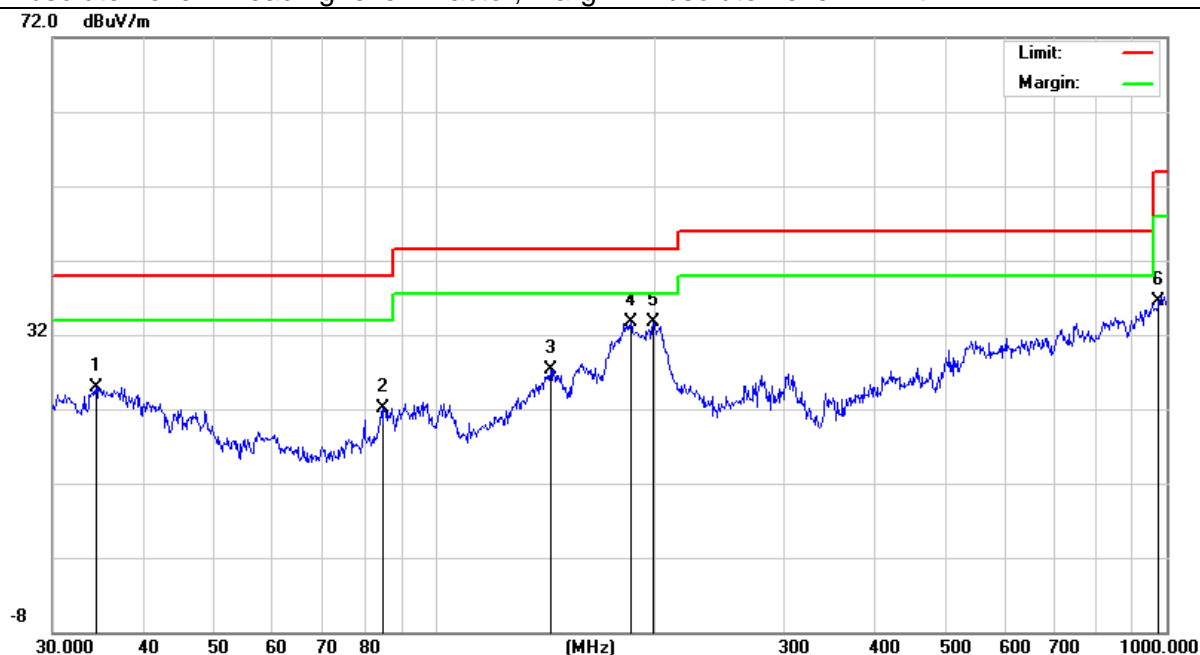


Note: The test modes were carried out for all operation modes. The worst test mode for test data was showed in the report.

EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.8G) - 802.11a (High CH)		

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
V	34.8823	10.63	16.77	27.40	40.00	-12.60	QP
V	55.0274	19.24	7.23	26.47	40.00	-13.53	QP
V	125.4457	17.27	13.33	30.60	43.50	-12.90	QP
V	160.3454	20.93	11.56	32.49	43.50	-11.01	QP
V	175.0363	21.38	10.80	32.18	43.50	-11.32	QP
V	665.8034	11.74	24.99	36.73	46.00	-9.27	QP

Remark:


Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

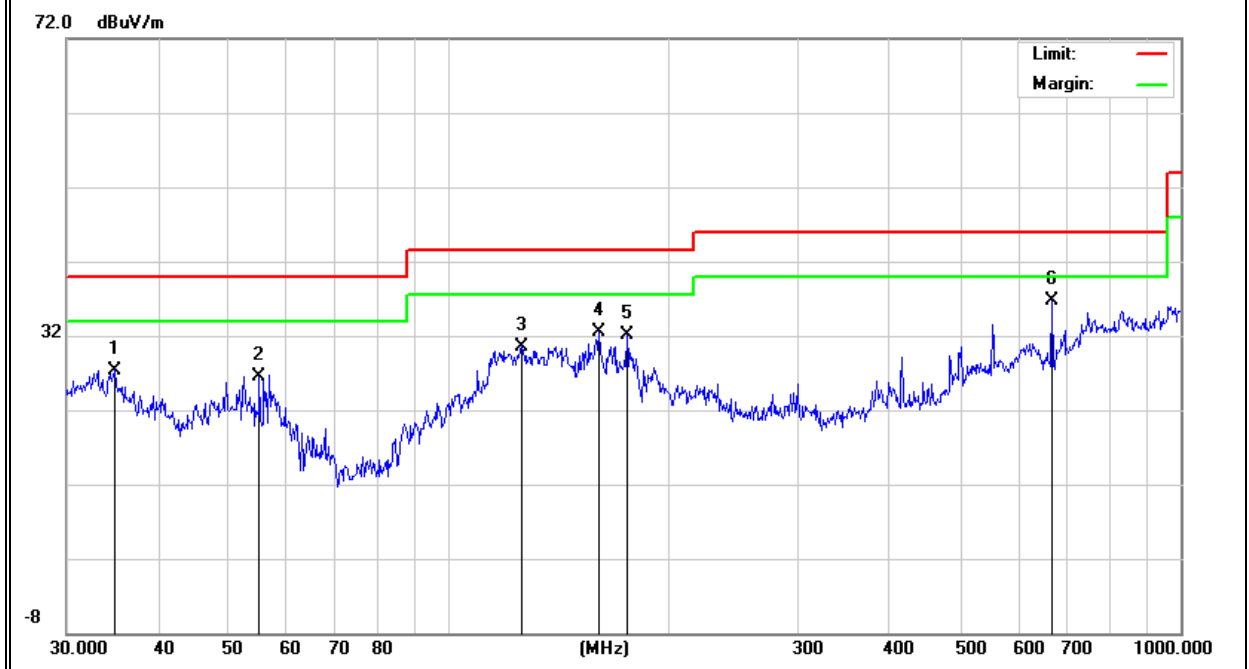

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBuV)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
H	31.6202	13.35	18.32	31.67	40.00	-8.33	QP
H	141.8262	18.29	13.24	31.53	43.50	-11.97	QP
H	164.9071	21.18	11.41	32.59	43.50	-10.91	QP
H	300.3672	16.04	16.09	32.13	46.00	-13.87	QP
H	729.3582	7.96	27.23	35.19	46.00	-10.81	QP
H	938.8324	5.83	30.85	36.68	46.00	-9.32	QP

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

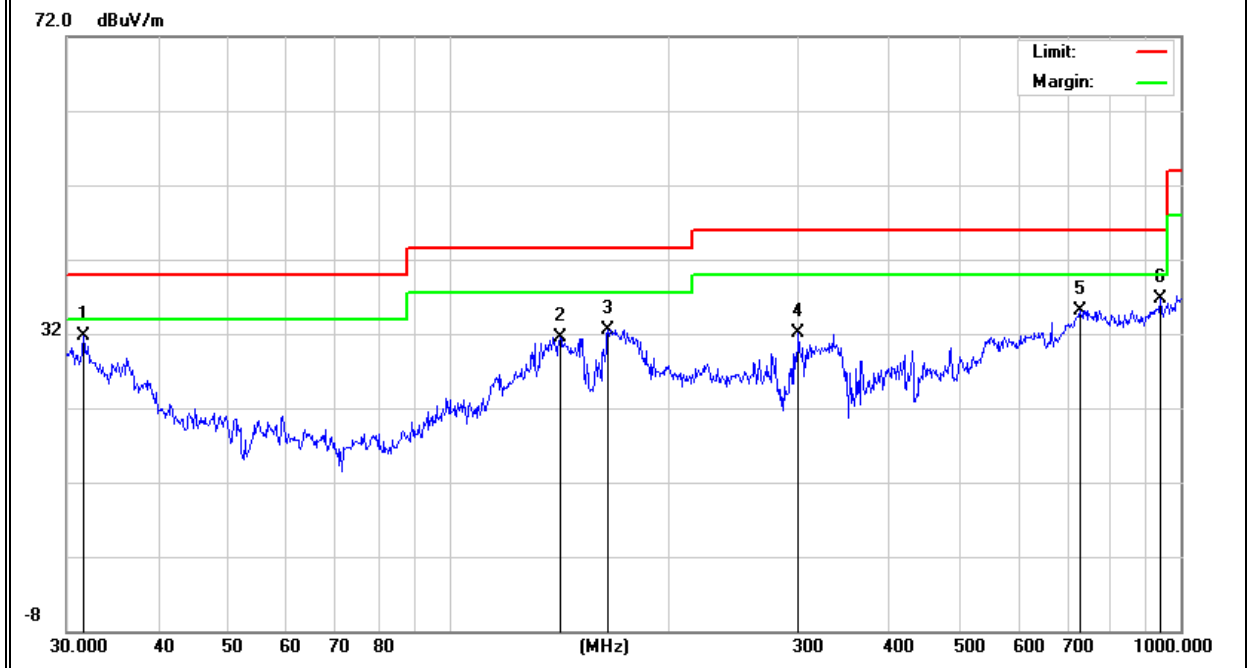

Note: The test modes were carried out for all operation modes. The worst test mode for test data was showed in the report.

3.2.8 TEST RESULTS (1GHz-26GHz)

EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX(5.2G) - 802.11a_5180~5240MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5180 MHz)-Above 1G									
Vertical	4435.641	61.39	5.94	35.40	44.00	58.73	74.00	-15.27	Pk
Vertical	4435.641	42.15	5.94	35.40	44.00	39.49	54.00	-14.51	AV
Vertical	10370.486	63.33	8.46	39.75	44.50	67.04	74.00	-6.96	Pk
Vertical	10370.486	41.65	8.46	39.75	44.50	45.36	54.00	-8.64	AV
Vertical	15541.232	60.29	10.12	38.80	44.10	65.11	74.00	-8.89	Pk
Vertical	15541.232	38.51	10.12	38.80	42.70	44.73	54.00	-9.27	AV
Horizontal	4434.623	63.33	5.94	35.18	44.00	60.45	74.00	-13.55	Pk
Horizontal	4434.623	43.29	5.94	35.18	44.00	40.41	54.00	-13.59	AV
Horizontal	10370.300	58.27	8.46	38.71	44.50	60.94	74.00	-13.06	Pk
Horizontal	10370.300	42.16	8.46	38.71	44.50	44.83	54.00	-9.17	AV
Horizontal	10540.507	56.27	10.12	38.38	44.10	60.67	74.00	-13.33	Pk
Horizontal	10540.507	40.27	10.12	38.38	44.10	44.67	54.00	-9.33	AV
Middle Channel (5200 MHz)-Above 1G									
Vertical	4593.483	58.62	6.48	36.35	44.05	57.40	74.00	-16.60	Pk
Vertical	4593.483	42.27	6.48	36.35	44.05	41.05	54.00	-12.95	AV
Vertical	10401.304	59.34	8.47	37.88	44.51	61.18	74.00	-12.82	Pk
Vertical	10401.304	41.11	8.47	37.88	44.51	42.95	54.00	-11.05	AV
Vertical	15601.148	59.63	10.12	38.80	44.10	64.45	74.00	-9.55	Pk
Vertical	15601.148	38.27	10.12	38.80	42.70	44.49	54.00	-9.51	AV
Horizontal	4592.578	58.24	6.48	36.37	44.05	57.04	74.00	-16.96	Pk
Horizontal	4592.578	44.16	6.48	36.37	44.05	42.96	54.00	-11.04	AV
Horizontal	10400.614	60.29	8.47	38.64	44.50	62.90	74.00	-11.10	Pk
Horizontal	10400.614	40.27	8.47	38.64	44.50	42.88	54.00	-11.12	AV
Horizontal	15600.941	59.16	10.12	38.38	44.10	63.56	74.00	-10.44	Pk
Horizontal	15600.941	40.37	10.12	38.38	44.10	44.77	54.00	-9.23	AV
High Channel (5240 MHz)-Above 1G									
Vertical	4740.273	62.37	7.10	37.24	43.50	63.21	74.00	-10.79	Pk
Vertical	4740.273	42.25	7.10	37.24	43.50	43.09	54.00	-10.91	AV
Vertical	10480.481	60.12	8.46	37.68	44.50	61.76	74.00	-12.24	Pk
Vertical	10480.481	40.59	8.46	37.68	44.50	42.23	54.00	-11.77	AV
Vertical	15720.869	60.29	10.12	38.80	44.10	65.11	74.00	-8.89	Pk
Vertical	15720.869	38.57	10.12	38.80	42.70	44.79	54.00	-9.21	AV
Horizontal	4739.678	61.14	7.10	37.24	43.50	61.98	74.00	-12.02	Pk
Horizontal	4739.678	40.26	7.10	37.24	43.50	41.10	54.00	-12.90	AV
Horizontal	10482.070	60.58	8.46	38.57	44.50	63.11	74.00	-10.89	Pk
Horizontal	10482.070	41.46	8.46	38.57	44.50	43.99	54.00	-10.01	AV
Horizontal	15720.952	58.67	10.12	38.38	44.10	63.07	74.00	-10.93	Pk
Horizontal	15720.952	42.37	10.12	38.38	44.10	46.77	54.00	-7.23	AV

Note: "802.11a (5.2G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.8G) -- 802.11a_5745~5825MHz		

Polar	Frequency	Meter Reading	Cable loss	Antenna Factor	Preamp Factor	Emission Level	Limits	Margin	Detector Type
(H/V)	(MHz)	(dBuV)	(dB)	dB/m	(dB)	(dBuV/m)	(dBuV/m)	(dB)	
Low Channel (5745 MHz)-Above 1G									
Vertical	4680.60	62.19	5.94	35.40	44.00	59.53	74.00	-14.47	Pk
Vertical	4680.60	43.33	5.94	35.40	44.00	40.67	54.00	-13.33	AV
Vertical	11490.89	58.67	8.46	39.75	44.50	62.38	74.00	-11.62	Pk
Vertical	11490.89	41.29	8.46	39.75	44.50	45.00	54.00	-9.00	AV
Vertical	17236.25	50.19	10.12	38.80	44.10	55.01	74.00	-18.99	Pk
Vertical	17236.25	40.67	10.12	38.80	42.70	46.89	54.00	-7.11	AV
Horizontal	4680.25	58.63	5.94	35.18	44.00	55.75	74.00	-18.25	Pk
Horizontal	4680.25	40.27	5.94	35.18	44.00	37.39	54.00	-16.61	AV
Horizontal	11491.12	57.23	8.46	38.71	44.50	59.90	74.00	-14.10	Pk
Horizontal	11491.12	40.15	8.46	38.71	44.50	42.82	54.00	-11.18	AV
Horizontal	17235.33	60.38	10.12	38.38	44.10	64.78	74.00	-9.22	Pk
Horizontal	17235.33	38.69	10.12	38.38	44.10	43.09	54.00	-10.91	AV
Middle Channel (5785 MHz)-Above 1G									
Vertical	4592.85	61.56	6.48	36.35	44.05	60.34	74.00	-13.66	Pk
Vertical	4592.85	42.17	6.48	36.35	44.05	40.95	54.00	-13.05	AV
Vertical	11570.53	58.34	8.47	37.88	44.51	60.18	74.00	-13.82	Pk
Vertical	11570.53	42.33	8.47	37.88	44.51	44.17	54.00	-9.83	AV
Vertical	17355.99	59.34	10.12	38.80	44.10	64.16	74.00	-9.84	Pk
Vertical	17355.99	38.81	10.12	38.80	42.70	45.03	54.00	-8.97	AV
Horizontal	4592.84	58.63	6.48	36.37	44.05	57.43	74.00	-16.57	Pk
Horizontal	4592.84	42.15	6.48	36.37	44.05	40.95	54.00	-13.05	AV
Horizontal	11570.84	60.19	8.47	38.64	44.50	62.80	74.00	-11.20	Pk
Horizontal	11570.84	42.13	8.47	38.64	44.50	44.74	54.00	-9.26	AV
Horizontal	17356.23	60.27	10.12	38.38	44.10	64.67	74.00	-9.33	Pk
Horizontal	17356.23	41.55	10.12	38.38	44.10	45.95	54.00	-8.05	AV
High Channel (5825 MHz)-Above 1G									
Vertical	6040.17	61.28	7.10	37.24	43.50	62.12	74.00	-11.88	Pk
Vertical	6040.17	41.44	7.10	37.24	43.50	42.28	54.00	-11.72	AV
Vertical	11652.90	60.39	8.46	37.68	44.50	62.03	74.00	-11.97	Pk
Vertical	11652.90	41.56	8.46	37.68	44.50	43.20	54.00	-10.80	AV
Vertical	17473.65	60.24	10.12	38.80	44.10	65.06	74.00	-8.94	Pk
Vertical	17473.65	39.64	10.12	38.80	42.70	45.86	54.00	-8.14	AV
Horizontal	6040.21	59.68	7.10	37.24	43.50	60.52	74.00	-13.48	Pk
Horizontal	6040.21	41.57	7.10	37.24	43.50	42.41	54.00	-11.59	AV
Horizontal	11653.25	59.33	8.46	38.57	44.50	61.86	74.00	-12.14	Pk
Horizontal	11653.25	41.27	8.46	38.57	44.50	43.80	54.00	-10.20	AV
Horizontal	17475.24	58.15	10.12	38.38	44.10	62.55	74.00	-11.45	Pk
Horizontal	17475.24	40.23	10.12	38.38	44.10	44.63	54.00	-9.37	AV

Note:"802.11a (5.8G)" mode is the worst mode. PK value is lower than the Average value limit, So average didn't record.

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value

has no need to be reported.


Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

3.2.9 TEST RESULTS (26GHZ-40GHZ)


EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	20 °C	Relative Humidity :	48%
Pressure :	1010 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX (5.2G)-802.11a 5180MHz~5240MHz , TX (5.8G)-802.11a 5745MHz~5825MHz		

All the modulation modes have been tested, and the worst result was report as below:
Low Channel (5180 MHz)-Above 1G

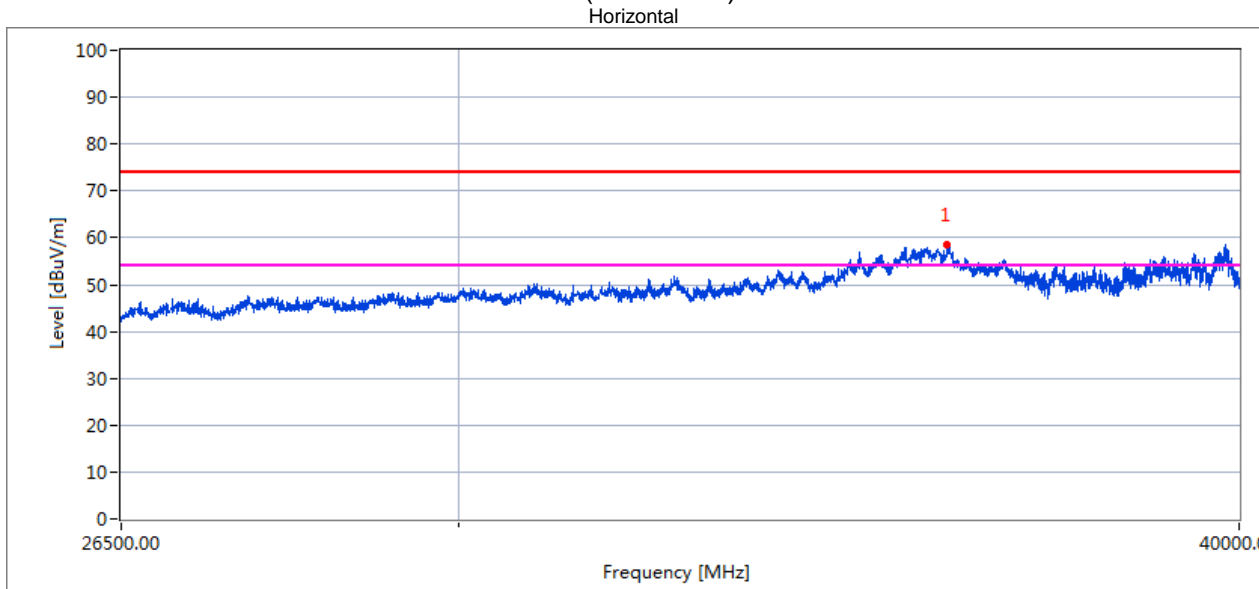

Measurement Result:

Frequency MHz	Pre-scan Level MaxPeak dBuV/m	Final Test Level MaxPeak dBuV/m	Limit MaxPeak dBuV/m	Margin dB
35394.213	58.6	54.3	74.0	19.7
35394.213	46.3	43.5	54.0	10.5

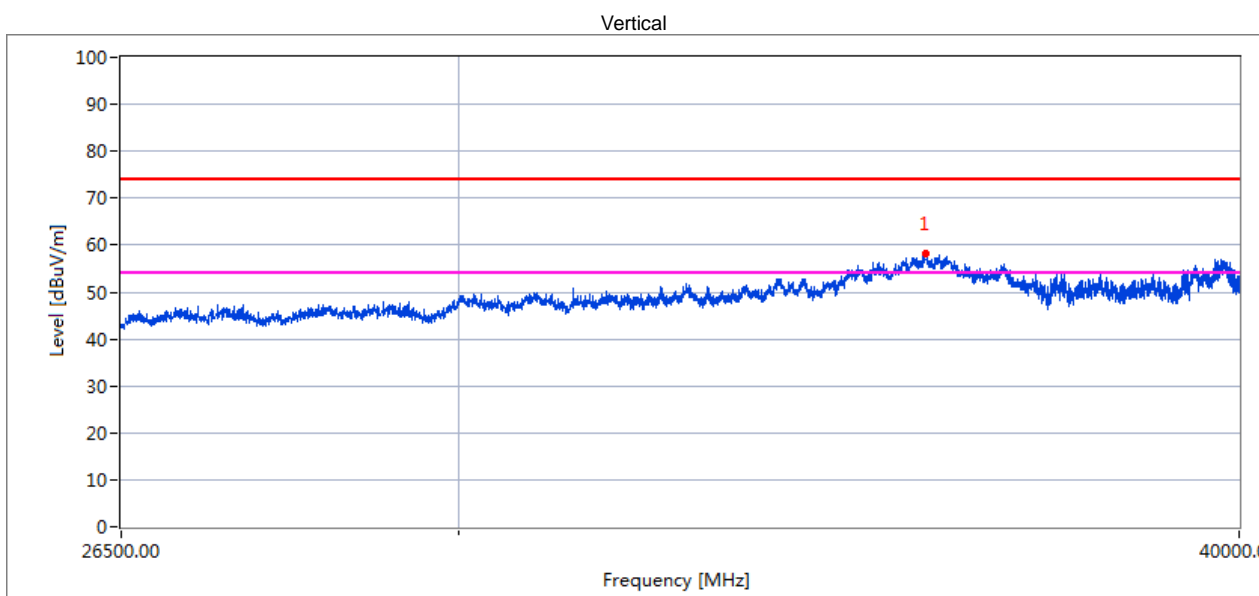


Measurement Result:

Frequency MHz	Pre-scan Level MaxPeak dBuV/m	Final Test Level MaxPeak dBuV/m	Limit MaxPeak dBuV/m	Margin dB
35853.613	58.2	54.6	74.0	19.4
35853.613	43.7	43.1	54.0	10.9

High Channel (5240 MHz)-Above 1G


Horizontal

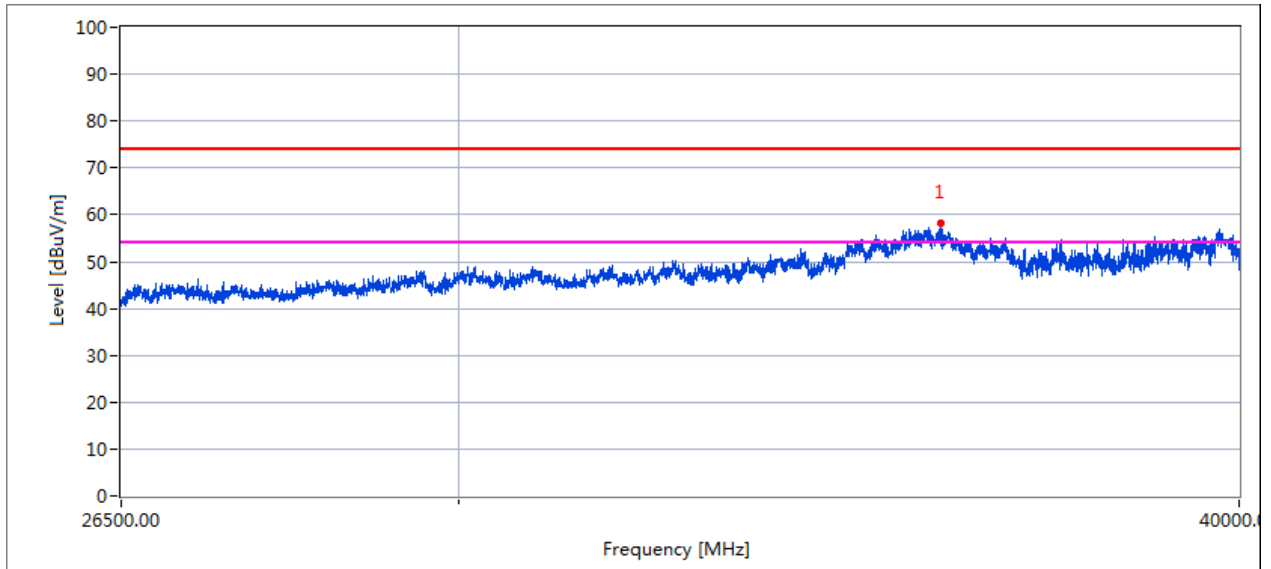

Measurement Result:

Frequency MHz	Pre-scan Level MaxPeak dBuV/m	Final Test Level MaxPeak dBuV/m	Limit MaxPeak dBuV/m	Margin dB
35633.241	58.3	55.4	74.0	18.6
35633.241	42.7	42.3	54.0	11.7

Vertical

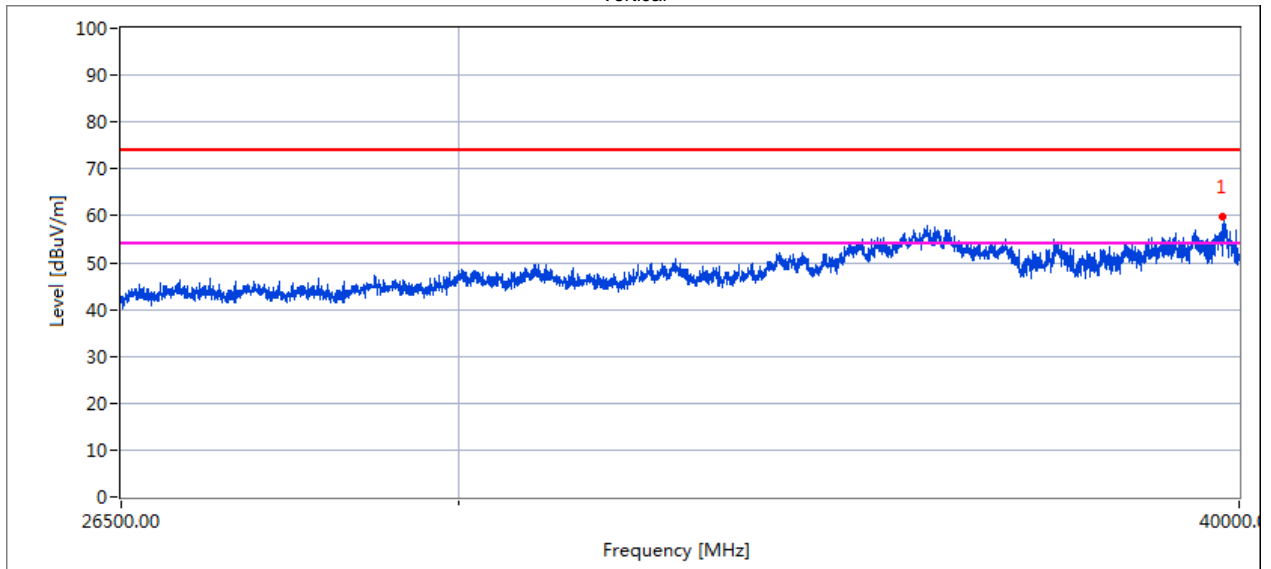


Measurement Result:

Frequency MHz	Pre-scan Level MaxPeak dBuV/m	Final Test Level MaxPeak dBuV/m	Limit MaxPeak dBuV/m	Margin dB
39526.359	58.3	56.3	74.0	17.7
39526.359	43.4	43.3	54.0	10.7

Low Channel (5745 MHz)-Above 1G


Horizontal

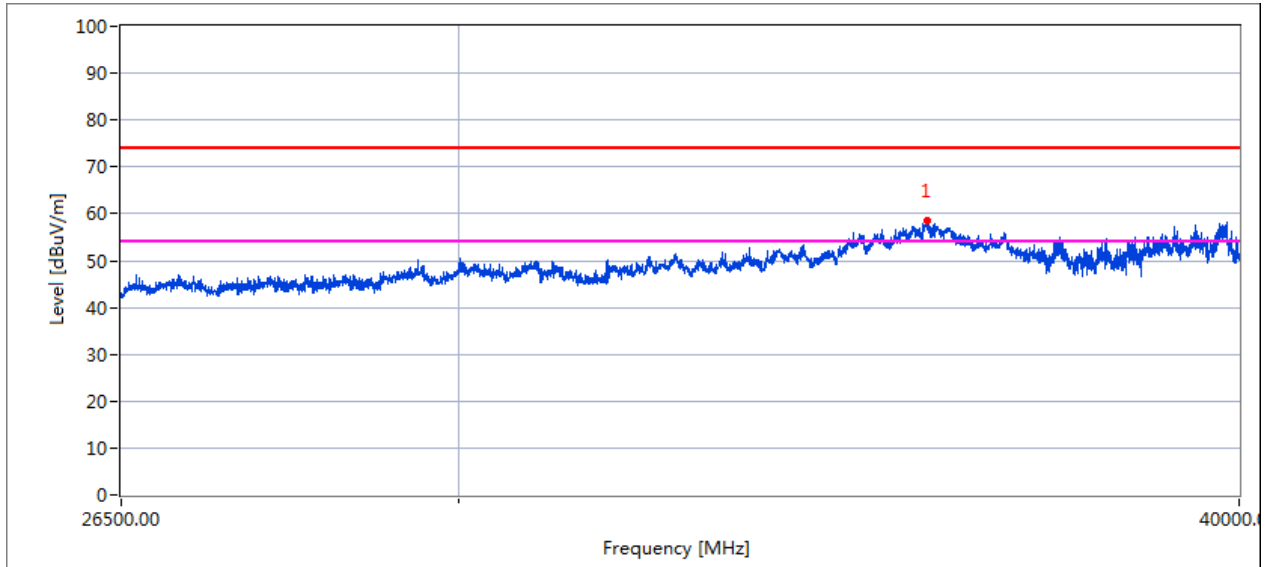

Measurement Result:

Frequency MHz	Pre-scan Level MaxPeak dBuV/m	Final Test Level MaxPeak dBuV/m	Limit MaxPeak dBuV/m	Margin dB
35656.387	58.8	48.4	74.0	25.6
35656.387	43.4	43.2	54.0	10.8

Vertical

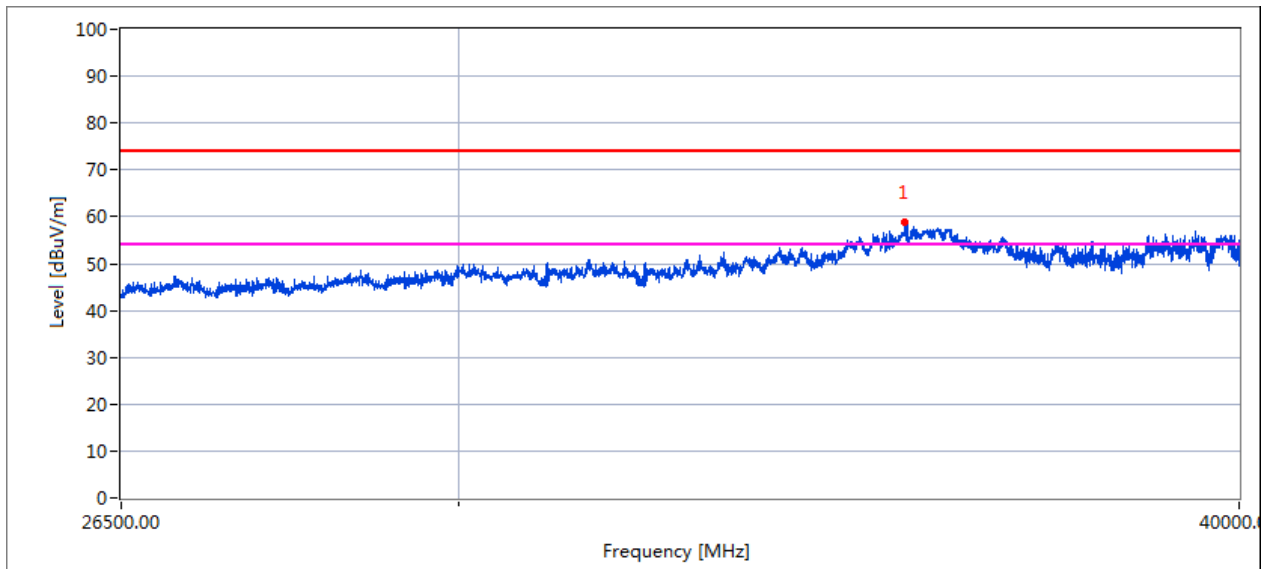


Measurement Result:

Frequency MHz	Pre-scan Level MaxPeak dBuV/m	Final Test Level MaxPeak dBuV/m	Limit MaxPeak dBuV/m	Margin dB
35415.356	58.6	54.3	74.0	19.7
35415.356	42.5	42.2	54.0	11.8

High Channel (5825 MHz)-Above 1G


Horizontal

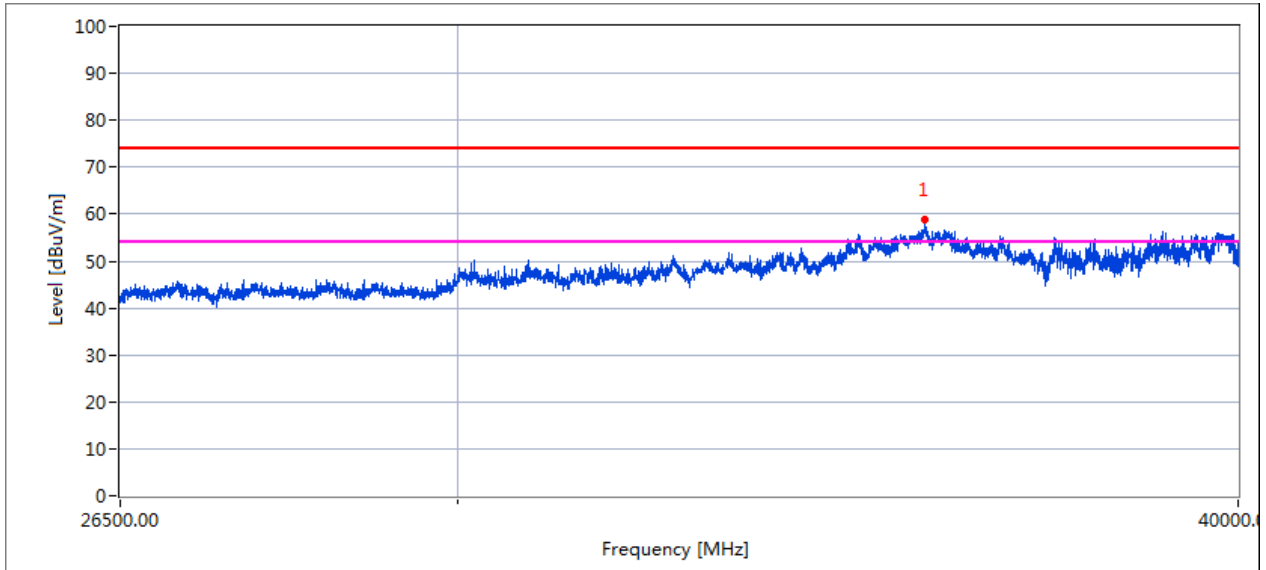

Measurement Result:

Frequency MHz	Pre-scan Level MaxPeak dBuV/m	Final Test Level MaxPeak dBuV/m	Limit MaxPeak dBuV/m	Margin dB
35632.225	59.3	56.7	74.0	17.3
35632.225	44.5	43.6	54.0	10.4

Vertical

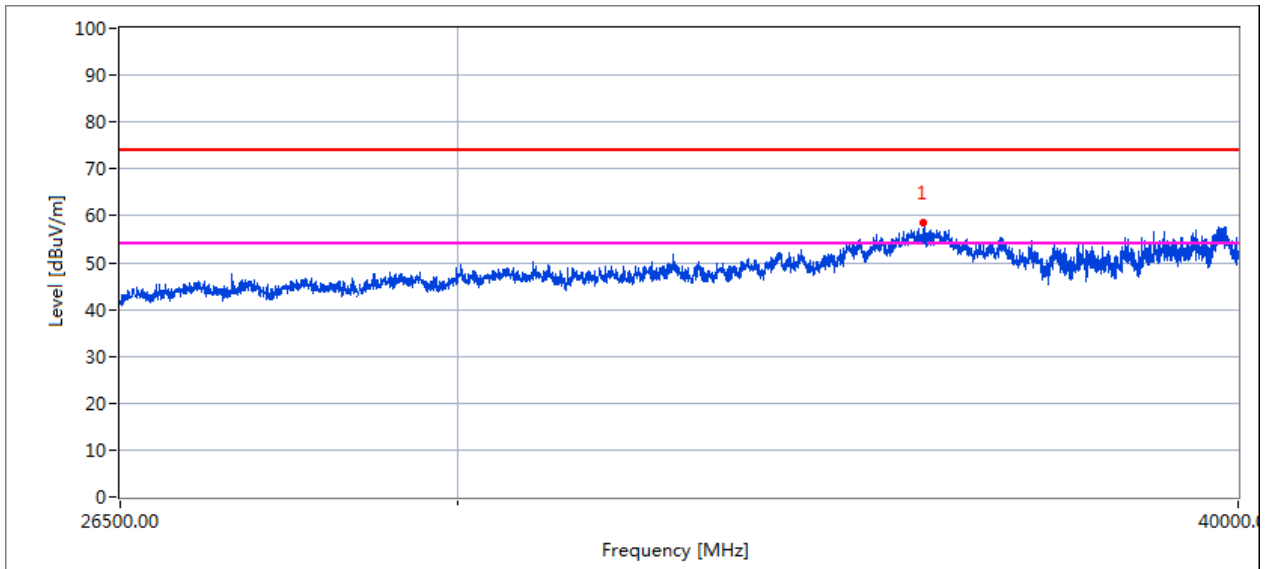

Measurement Result:

Frequency MHz	Pre-scan Level MaxPeak dBuV/m	Final Test Level MaxPeak dBuV/m	Limit MaxPeak dBuV/m	Margin dB
35736.263	58.5	58.1	74.0	15.9
35736.263	43.8	43.3	54.0	10.7

4. POWER SPECTRAL DENSITY TEST

4.1 APPLIED PROCEDURES / LIMIT

According to FCC §15.407(a)(3)

For the band 5.15-5.25 GHz,

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

,

4.2 TEST PROCEDURE

For devices operating in the bands 5.15-5.25 GHz, 5.25-5.35 GHz, and 5.47-5.725 GHz, the above procedures make use of 1 MHz RBW to satisfy directly the 1 MHz reference bandwidth specified in § 15.407(a)(5). For devices operating in the band 5.725-5.85 GHz, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (i.e., 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10\log(500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ KHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10\log(1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 KHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS


EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band I (5150-5250MHz)		

Mode	Frequency	Measured Power Density (dBm)	Limit (dBm)	Result
802.11 a	5180 MHz	5.251	11	PASS
	5200 MHz	5.931	11	PASS
	5240 MHz	6.756	11	PASS
802.11 n20	5180 MHz	5.317	11	PASS
	5200 MHz	5.896	11	PASS
	5240 MHz	6.852	11	PASS
802.11 n40	5190 MHz	1.150	11	PASS
	5230 MHz	2.417	11	PASS
802.11 ac20	5180 MHz	6.613	11	PASS
	5200 MHz	7.491	11	PASS
	5240 MHz	7.509	11	PASS
802.11 ac40	5190 MHz	2.092	11	PASS
	5230 MHz	2.215	11	PASS


(802.11a) PSD plot on channel 36

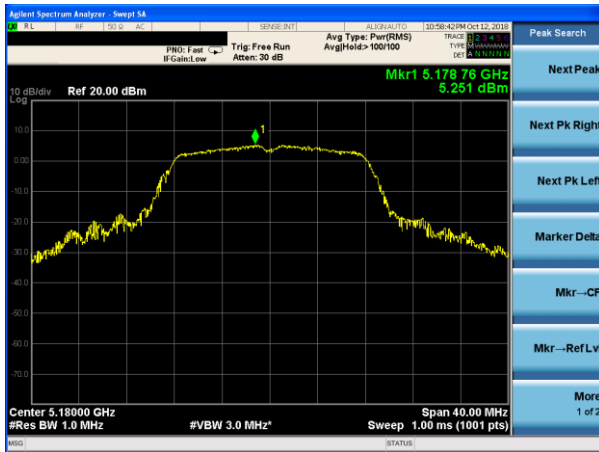


(802.11n20) PSD plot on channel 36

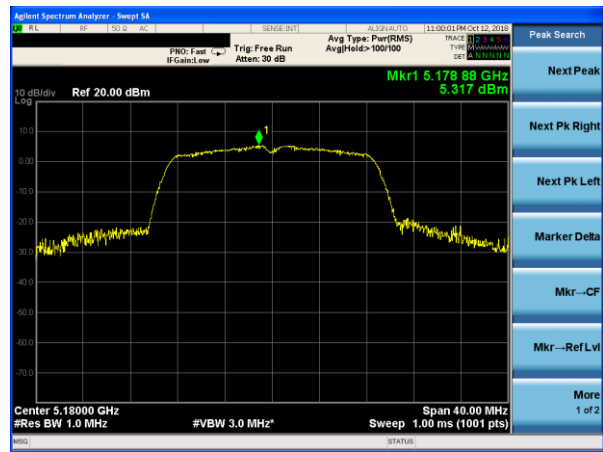


(802.11a) PSD plot on channel 40

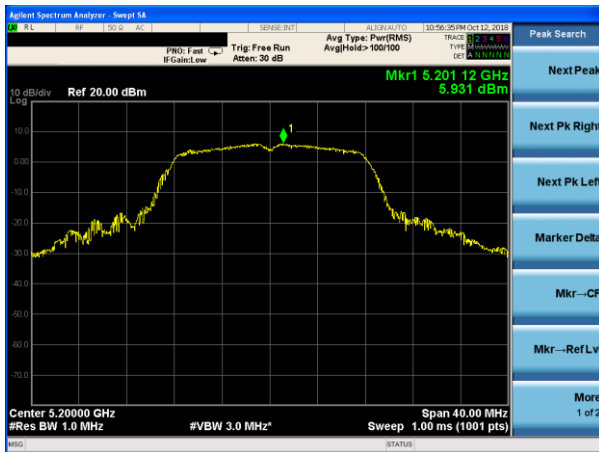


(802.11n20) PSD plot on channel 40

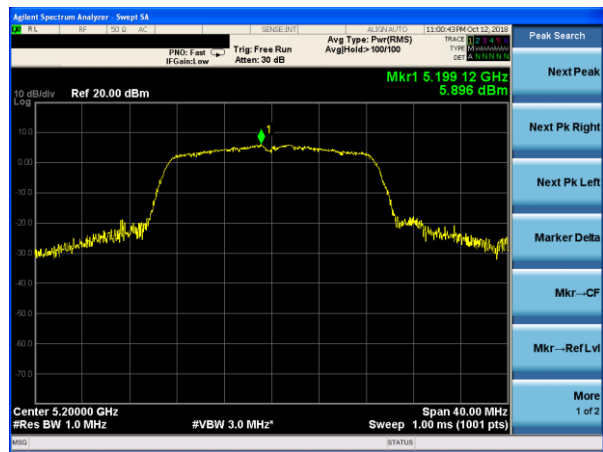


(802.11a) PSD plot on channel 48

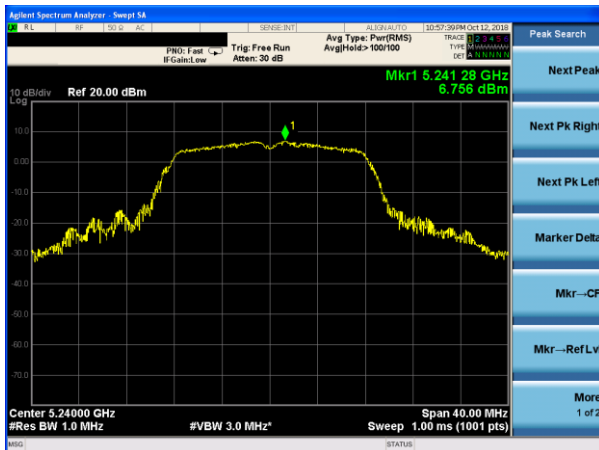


(802.11n20) PSD plot on channel 48

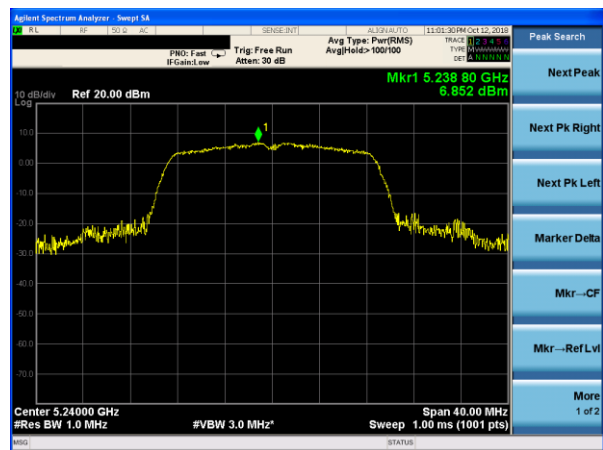


(802.11n40) PSD plot on channel 38

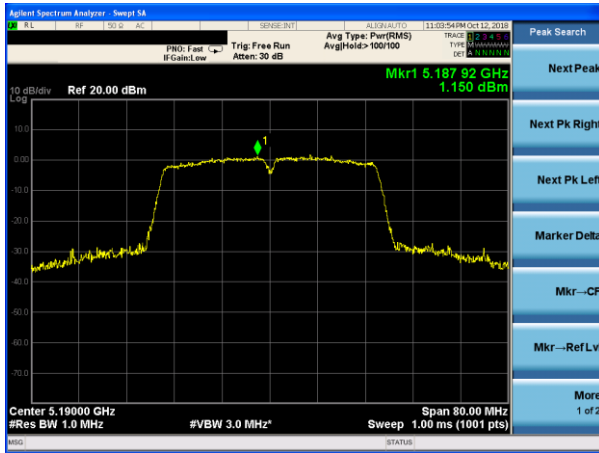


(802.11ac20) PSD plot on channel 36

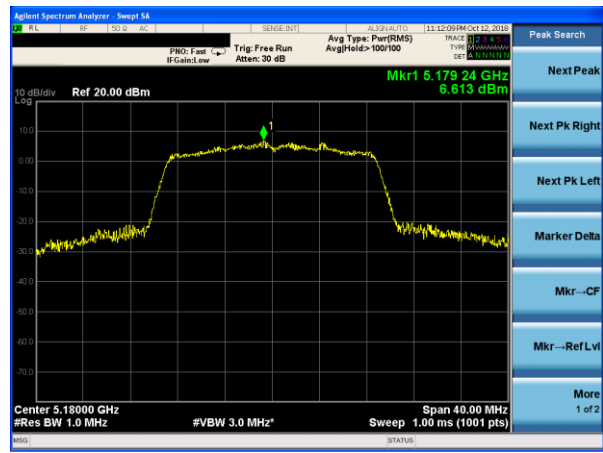


(802.11n40) PSD plot on channel 46

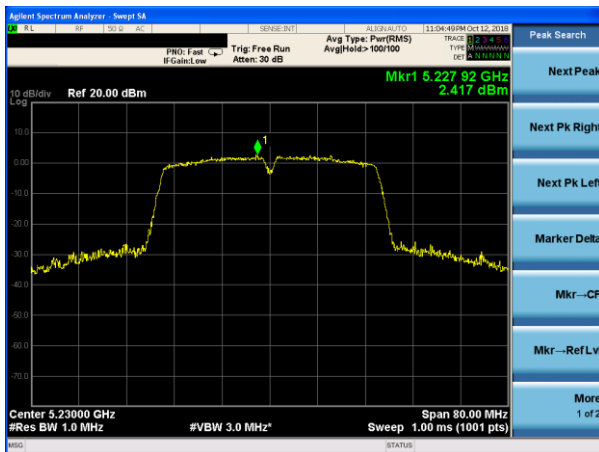


(802.11ac20) PSD plot on channel 40

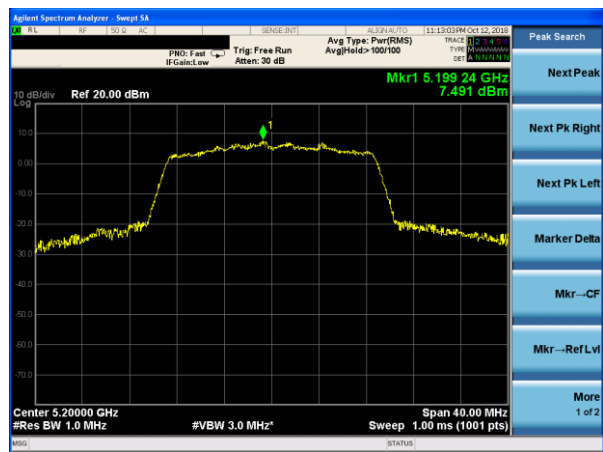


(802.11ac20) PSD plot on channel 48

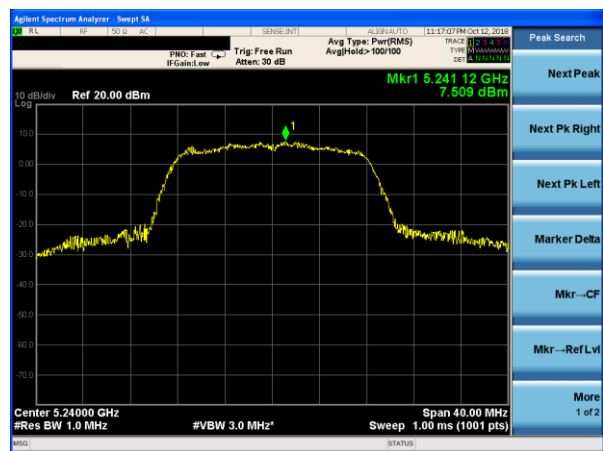

(802.11ac40) PSD plot on channel 38

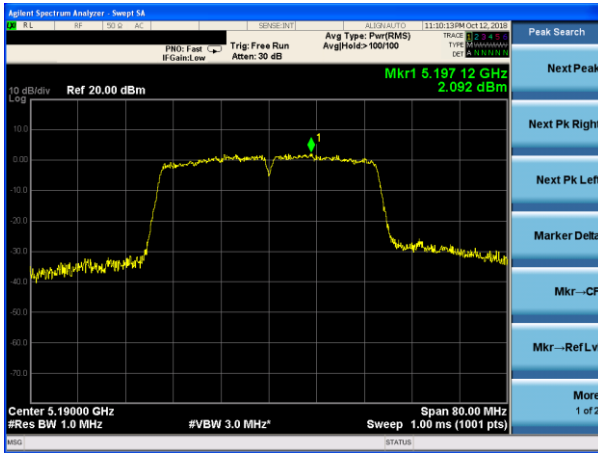

(802.11ac40) PSD plot on channel 46

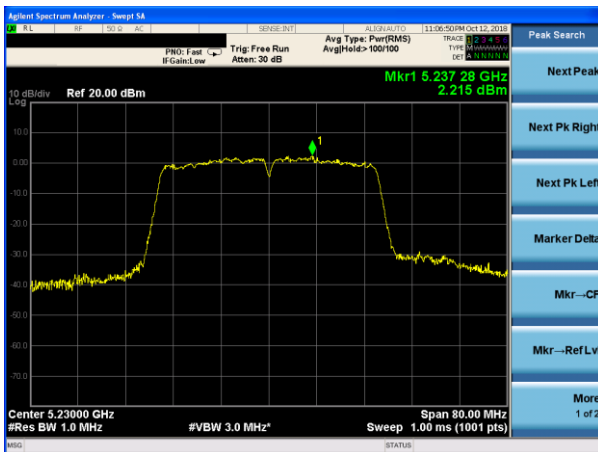


EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1015 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band IV (5745-5825MHz)		

Mode	Frequency	Measured Power Density (dBm)	Calculate power density (dBm)(Note 1)	Limit (dBm)	Result
802.11 a	5745 MHz	6.34	6.25	30	PASS
	5785 MHz	6.10	6.01	30	PASS
	5825 MHz	5.27	5.18	30	PASS
802.11 n20	5745 MHz	6.33	6.24	30	PASS
	5785 MHz	6.14	6.05	30	PASS
	5825 MHz	4.55	4.46	30	PASS
802.11 n40	5755 MHz	3.05	2.96	30	PASS
	5795 MHz	2.94	2.85	30	PASS
802.11 ac20	5745 MHz	6.99	6.90	30	PASS
	5785 MHz	6.82	6.73	30	PASS
	5825 MHz	5.46	5.37	30	PASS
802.11 ac40	5755 MHz	3.16	3.07	30	PASS
	5795 MHz	3.20	3.11	30	PASS


Note:

- (1) Calculate power density= Measured Power Density+10log(500kHz/RBW)= Measured Power Density+(-0.086)
RBW=0.51MHz


(802.11a) PSD plot on channel 149

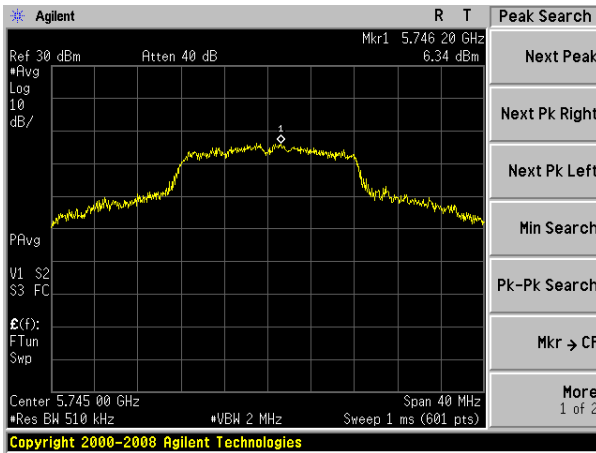


(802.11n20) PSD plot on channel 149

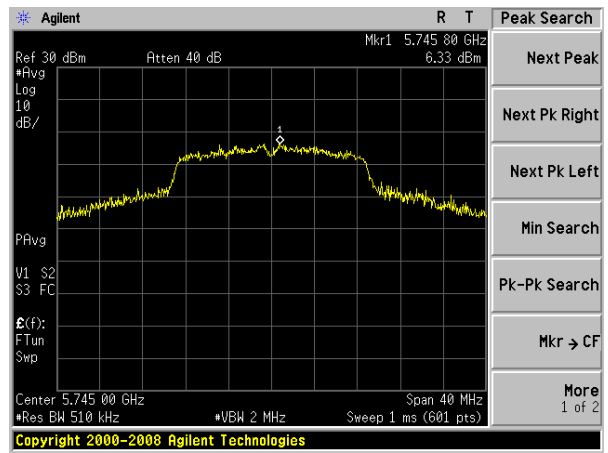


(802.11a) PSD plot on channel 157

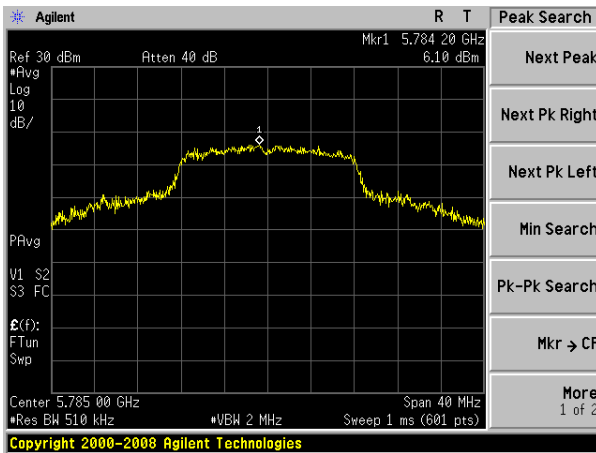


(802.11n20) PSD plot on channel 157

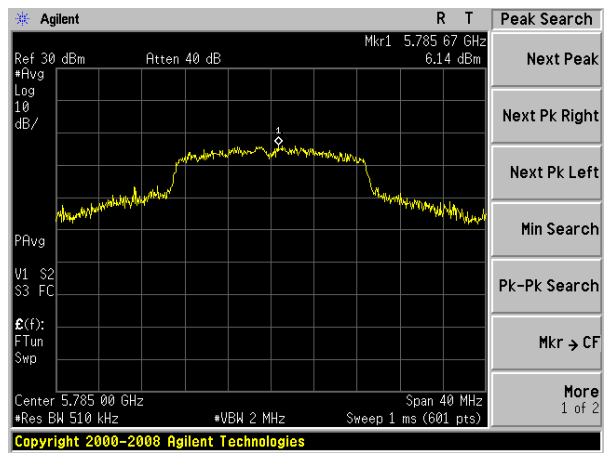


(802.11a) PSD plot on channel R 165

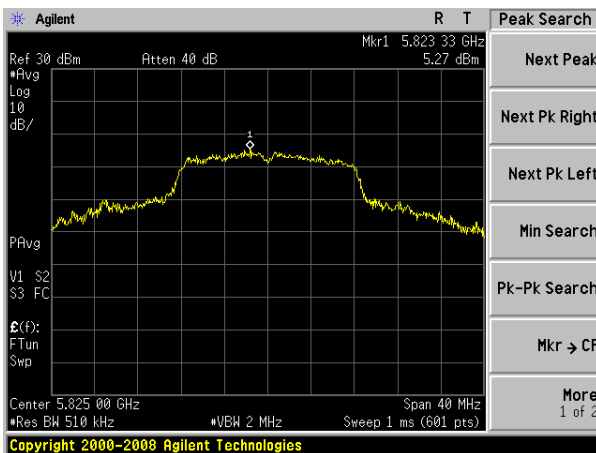


(802.11n20) PSD plot on channel R 165

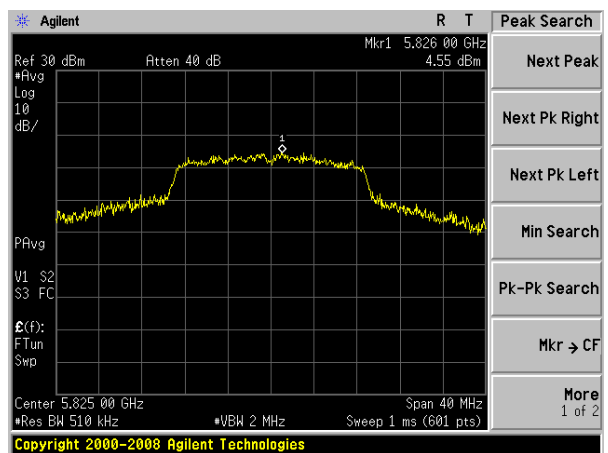


(802.11n40) PSD plot on channel 151

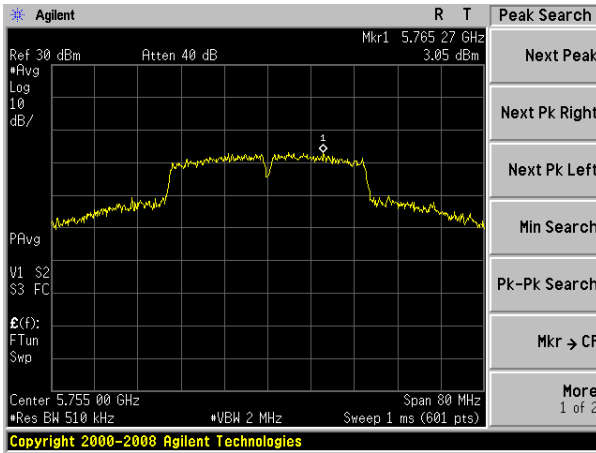


(802.11ac20) PSD plot on channel 149

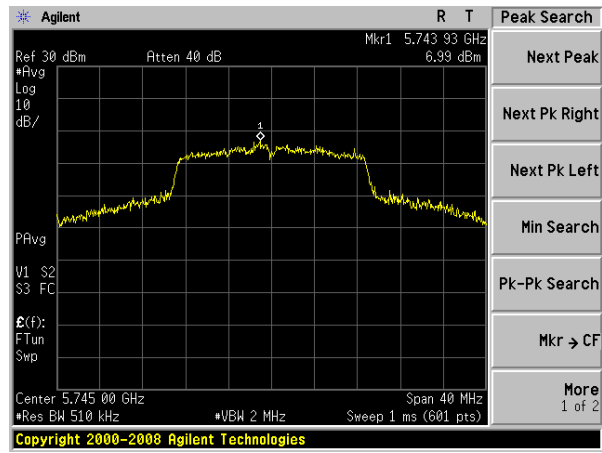


(802.11n40) PSD plot on channel 159

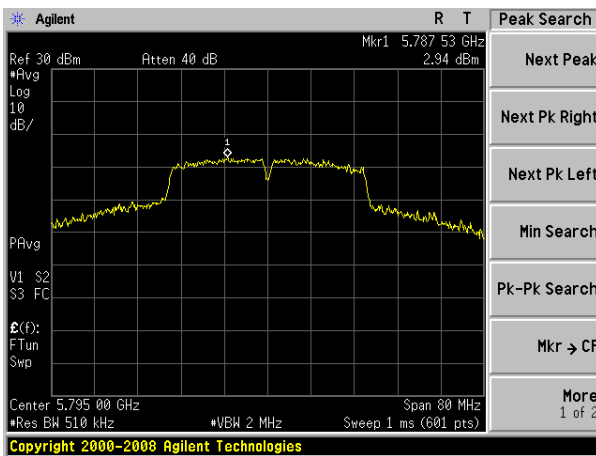


(802.11ac20) PSD plot on channel 157

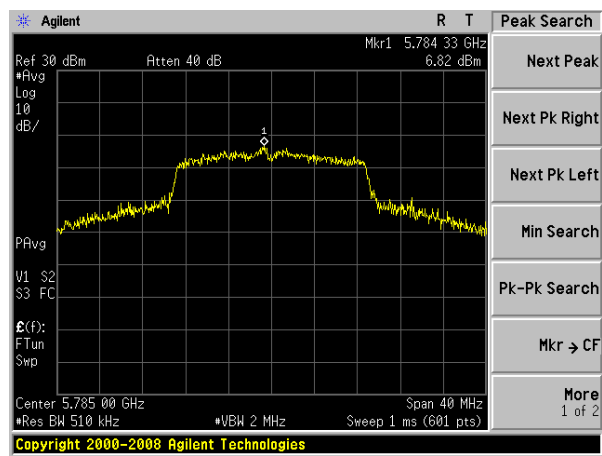


(802.11ac20) PSD plot on channel 165

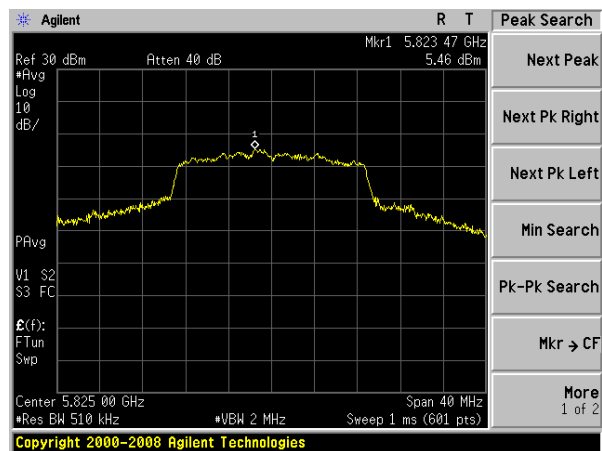

(802.11ac40) PSD plot on channel 151

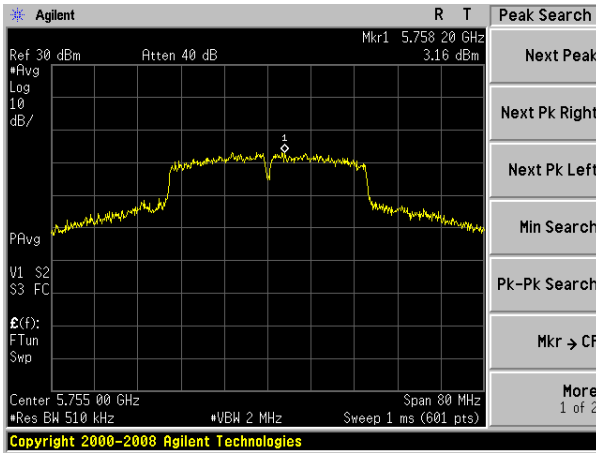

(802.11ac40) PSD plot on channel 159

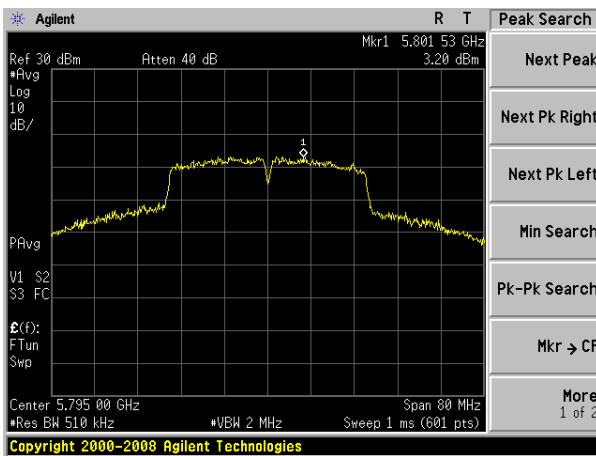

5. 26DB & 99% EMISSION BANDWIDTH

5.1 APPLIED PROCEDURES / LIMIT


The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test. If the device cannot be connected directly, alternative techniques acceptable to the Commission may be used. Measurements in the 5.725-5.85 GHz band are made over a reference bandwidth of 500 kHz or the 26 dB emission bandwidth of the device, whichever is less. Measurements in the 5.15-5.25 GHz, 5.25-5.35 GHz, and the 5.47-5.725 GHz bands are made over a bandwidth of 1 MHz or the 26 dB emission bandwidth of the device, whichever is less. A narrower resolution bandwidth can be used, provided that the measured power is integrated over the full reference bandwidth.

5.2 TEST PROCEDURE

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

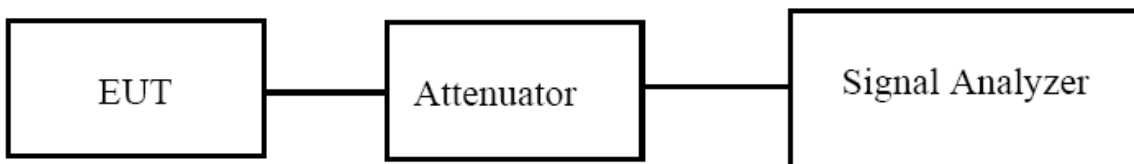

5.3 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.


5.4 TEST RESULTS

EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band I (5150-5250MHz)		


Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	26dB bandwidth (MHz)	Result
802.11a	CH36	5180	16.776	19.78	Pass
	CH40	5200	16.808	20.79	Pass
	CH48	5240	16.942	20.75	Pass
802.11 n20	CH36	5180	17.678	19.87	Pass
	CH40	5200	17.700	19.93	Pass
	CH48	5240	17.676	19.89	Pass
802.11 n40	CH 38	5190	36.077	40.27	Pass
	CH 46	5230	36.047	40.13	Pass
802.11 ac20	CH36	5180	17.702	19.85	Pass
	CH40	5200	17.685	19.76	Pass
	CH48	5240	17.692	19.89	Pass
802.11 ac40	CH 38	5190	36.087	39.70	Pass
	CH 46	5230	36.027	39.59	Pass

Test plot


(802.11a) -26dB&99%Bandwidth plot on channel 36

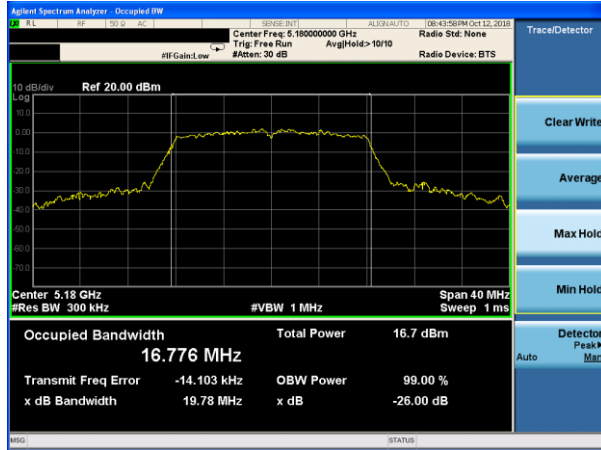


(802.11 n20) -26dB&99%Bandwidth plot on channel 36

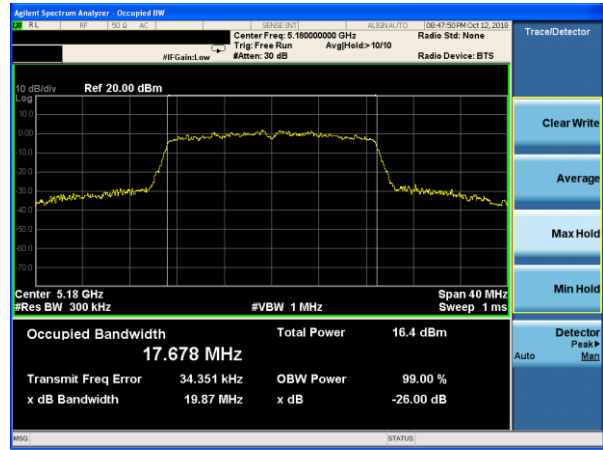


(802.11a) -26dB&99%Bandwidth plot on channel 40

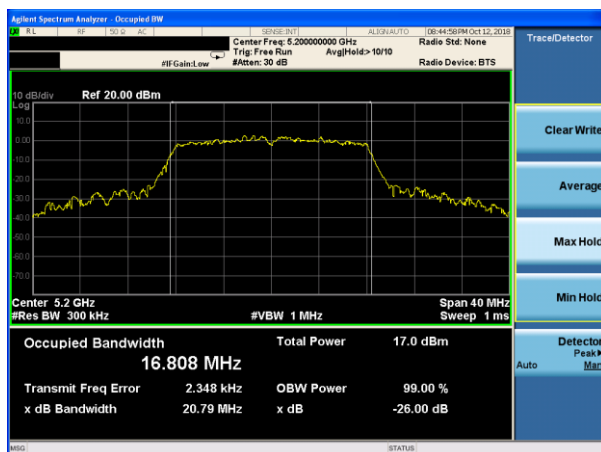


(802.11 n20) -26dB&99%Bandwidth plot on channel 40

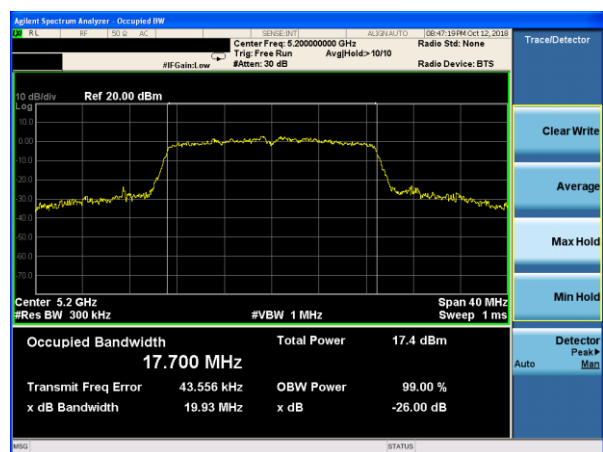

(802.11a) -26dB&99%Bandwidth plot on channel 48

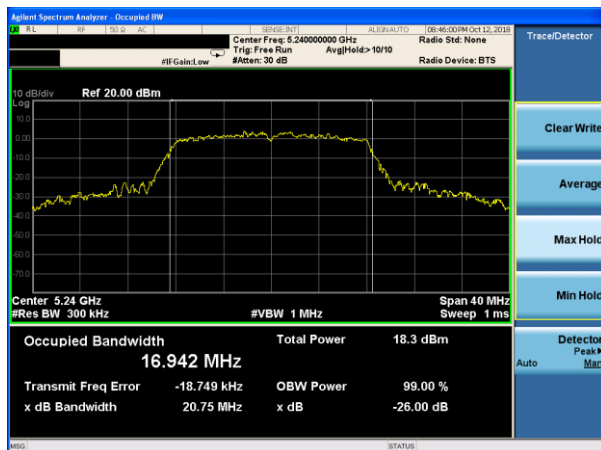


(802.11 n20) -26dB&99%Bandwidth plot on channel 48

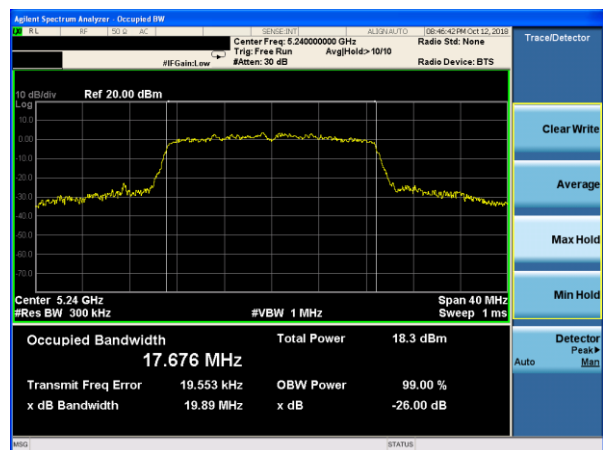


Test plot


(802.11 n40) -26dB&99%Bandwidth plot on channel 38

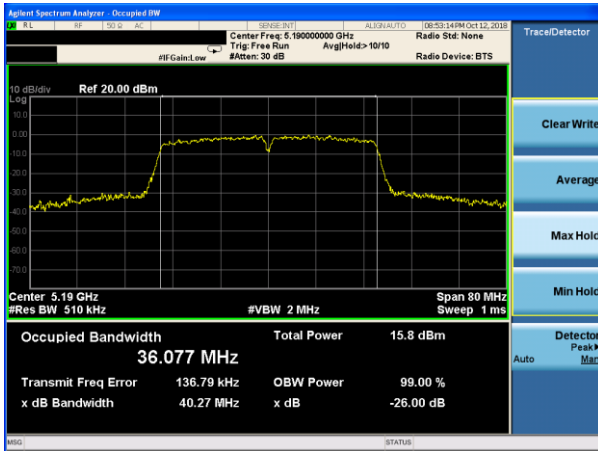


(802.11 ac20) -26dB&99%Bandwidth plot on channel 36

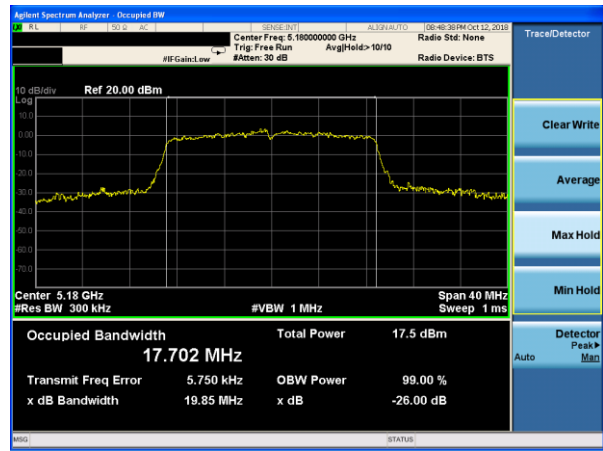


(802.11 n40) -26dB&99%Bandwidth plot on channel 46

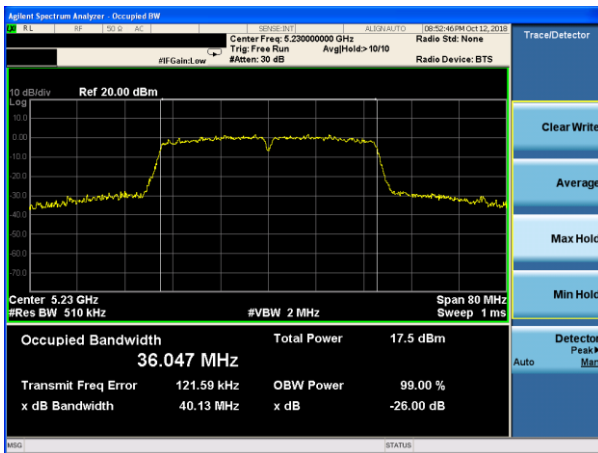

(802.11 ac20) -26dB&99%Bandwidth plot on channel 40

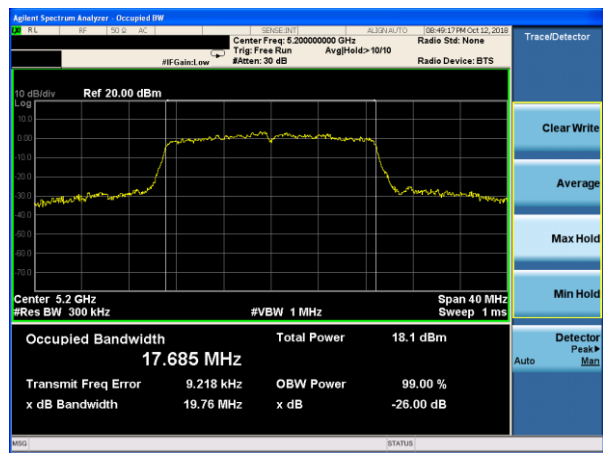


(802.11 ac20) -26dB&99%Bandwidth plot on channel 48

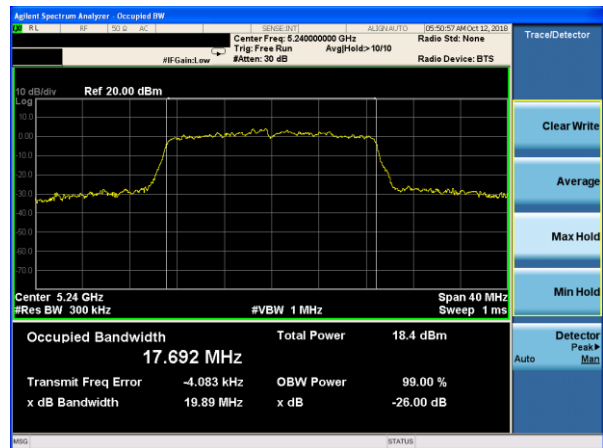


Test plot

(802.11 ac40) -26dB&99%Bandwidth plot on
channel 38

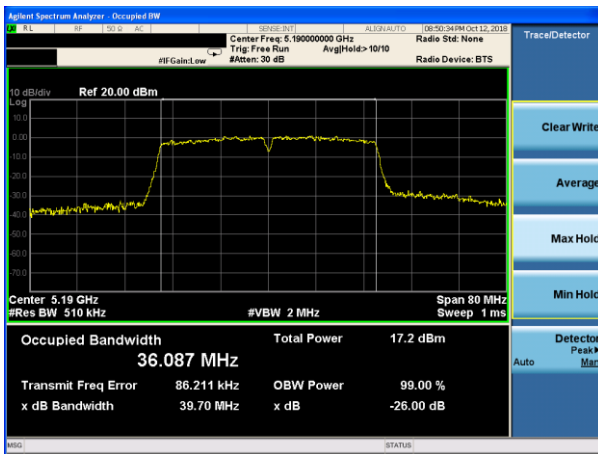

(802.11 ac40) -26dB&99%Bandwidth plot on
channel 46

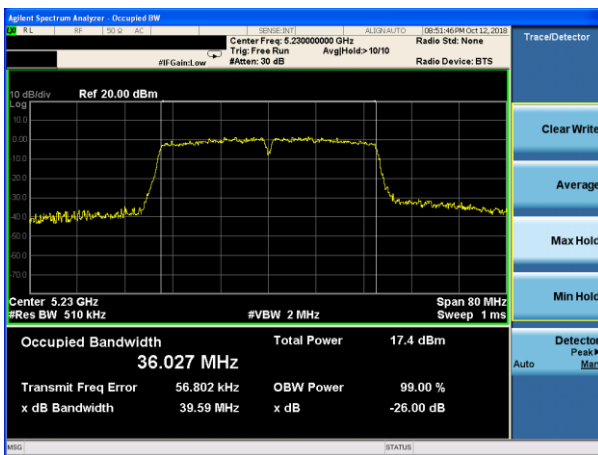

EUT :	Handheld Device	Model Name. :	GT500V
Temperature :	25 °C	Relative Humidity :	56%
Pressure :	1012 hPa	Test Voltage :	DC 3.8V
Test Mode :	TX Frequency Band IV(5745-5850MHz)		

Mode	Channel	Frequency (MHz)	99% bandwidth(MHz)	26dB bandwidth (MHz)	Result
802.11a	CH149	5745	17.111	30.49	Pass
	CH157	5785	17.333	31.22	Pass
	CH165	5825	17.279	29.02	Pass
802.11 n20	CH149	5745	18.047	31.99	Pass
	CH157	5785	18.138	33.19	Pass
	CH165	5825	18.110	33.57	Pass
802.11 n40	CH151	5755	36.767	69.44	Pass
	CH159	5795	36.869	65.72	Pass
802.11 ac20	CH149	5745	17.694	22.52	Pass
	CH157	5785	17.712	21.56	Pass
	CH165	5825	17.707	21.61	Pass
802.11 ac40	CH151	5755	36.147	43.05	Pass
	CH159	5795	36.135	49.71	Pass