





FR1 n71 / 5MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

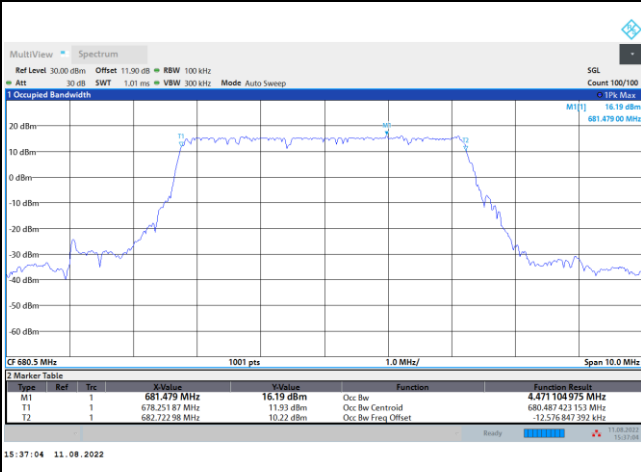


FR1 n71 / 5MHz / CP OFDM / Middle Channel / Full RB


QPSK

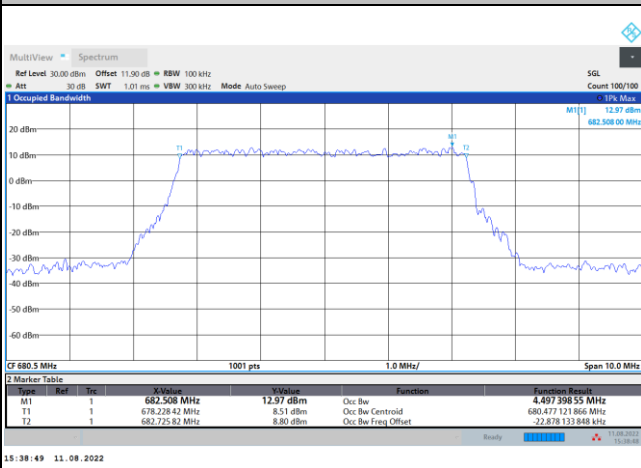


16QAM

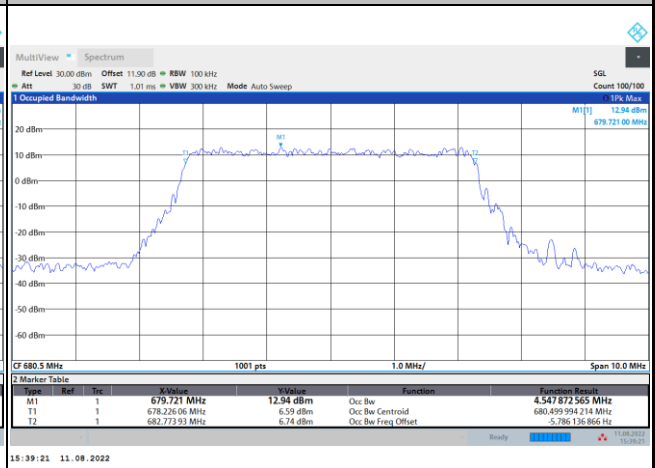

64QAM

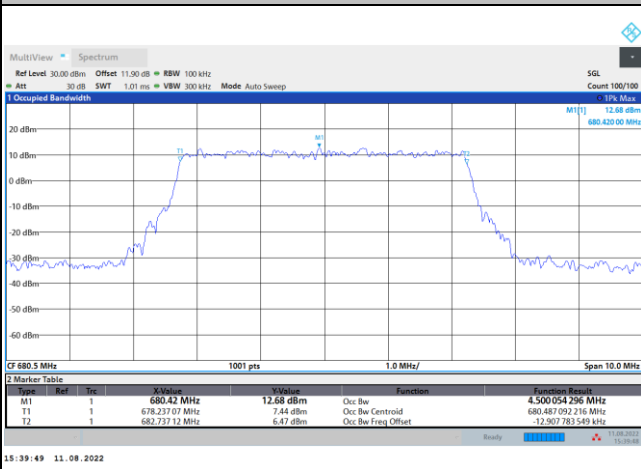


256QAM

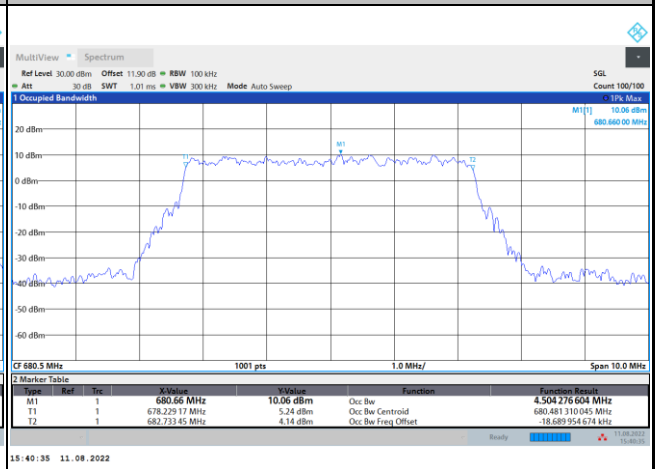




FR1 n71 / 10MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

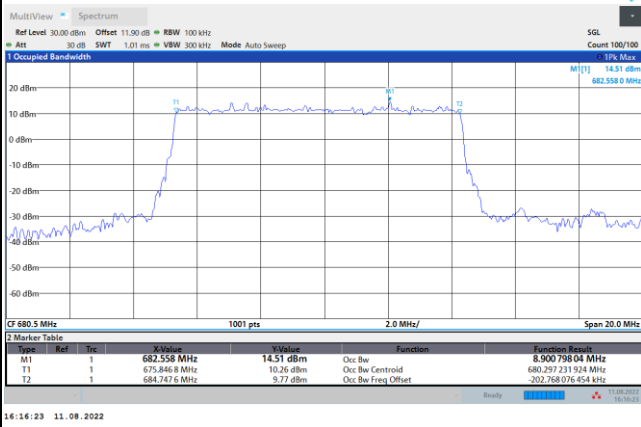


FR1 n71 / 10MHz / CP OFDM / Middle Channel / Full RB


QPSK

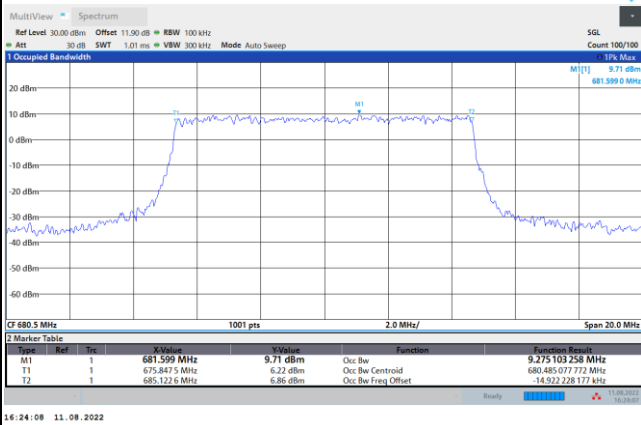


16QAM

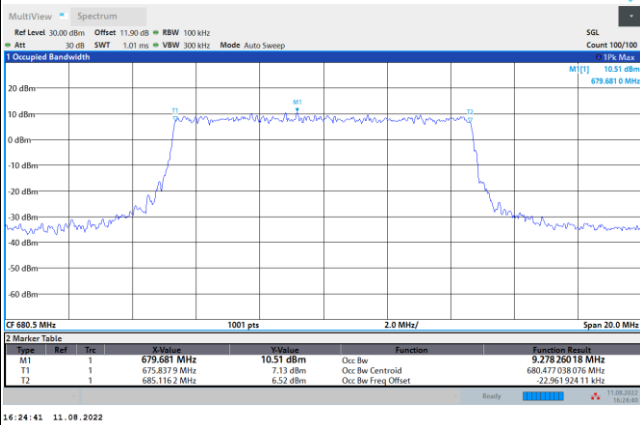

64QAM

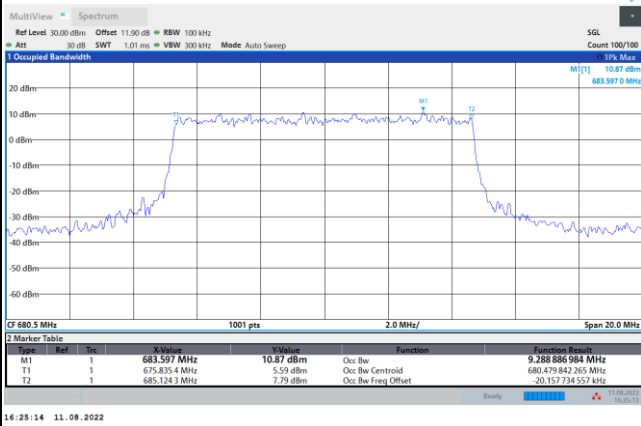


256QAM

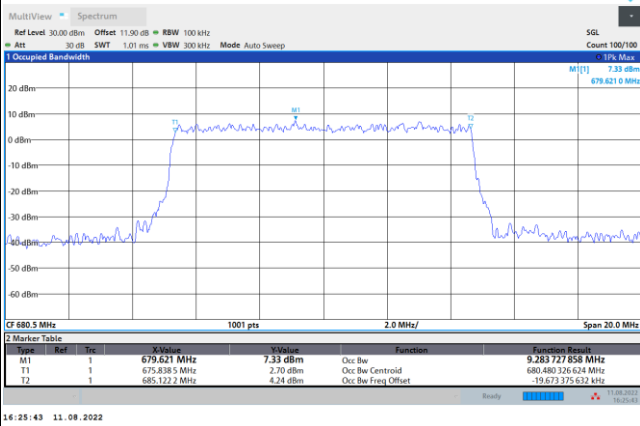




FR1 n71 / 15MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

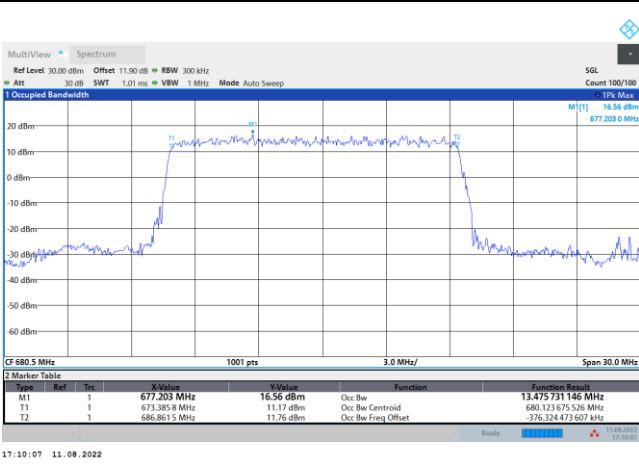


FR1 n71 / 15MHz / CP OFDM / Middle Channel / Full RB


QPSK

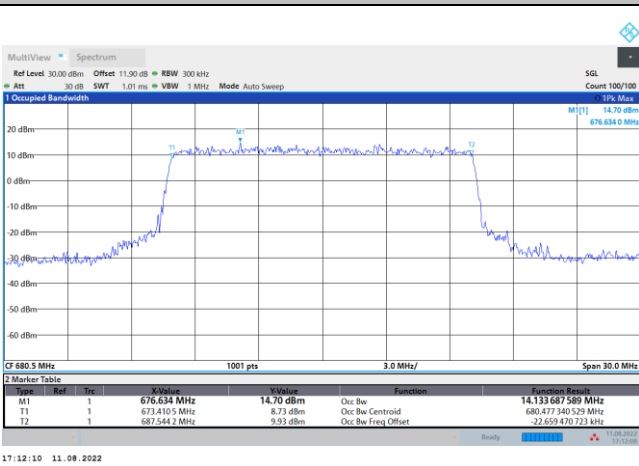


16QAM

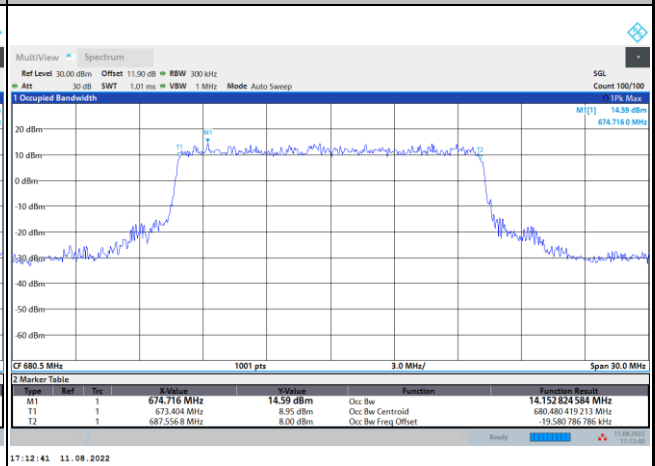

64QAM

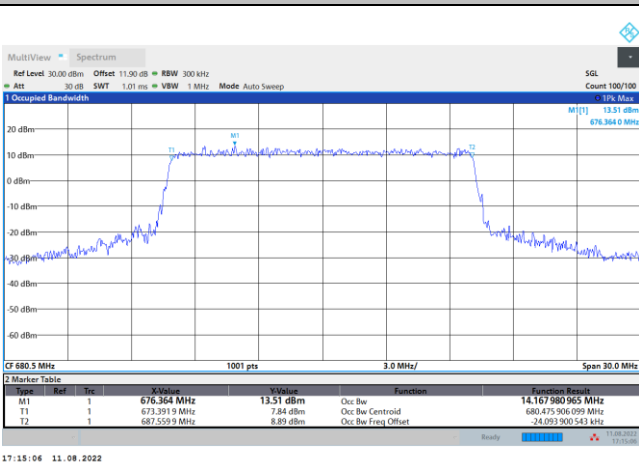


256QAM

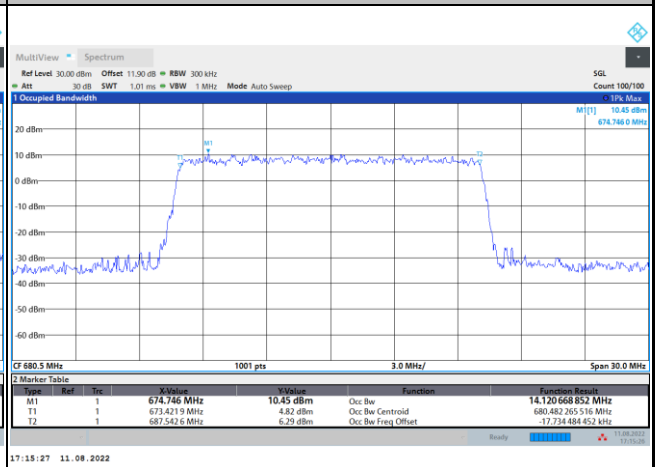




FR1 n71 / 20MHz / DFT-S OFDM / Middle Channel / Full RB

PI/2 BPSK

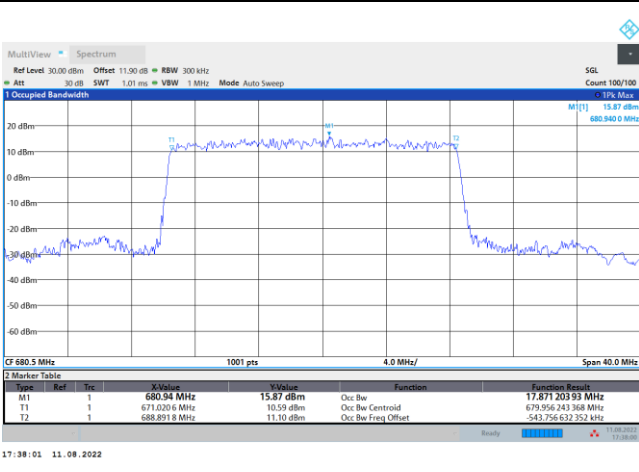


FR1 n71 / 20MHz / CP OFDM / Middle Channel / Full RB


QPSK

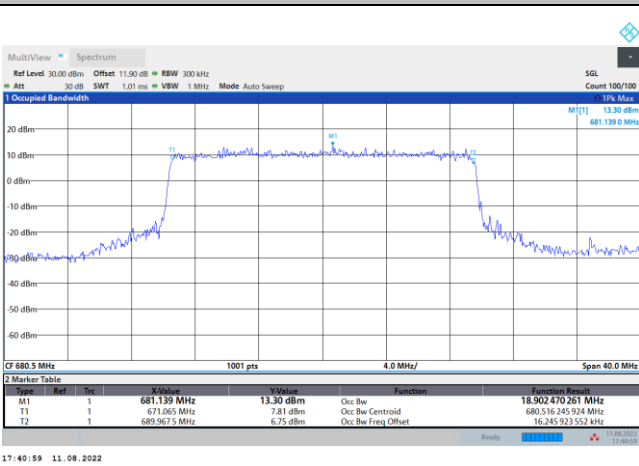


16QAM

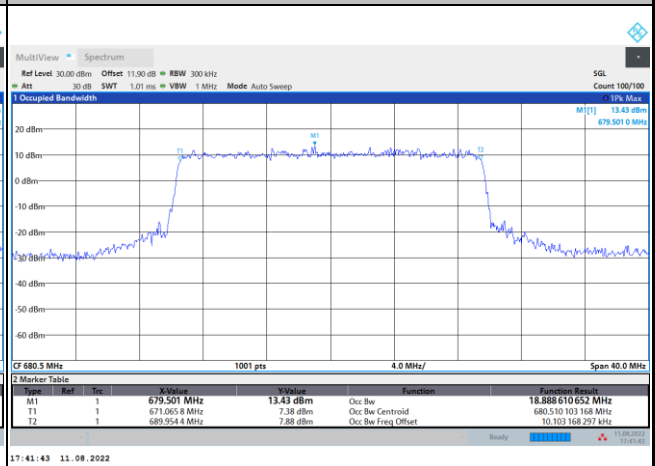

64QAM

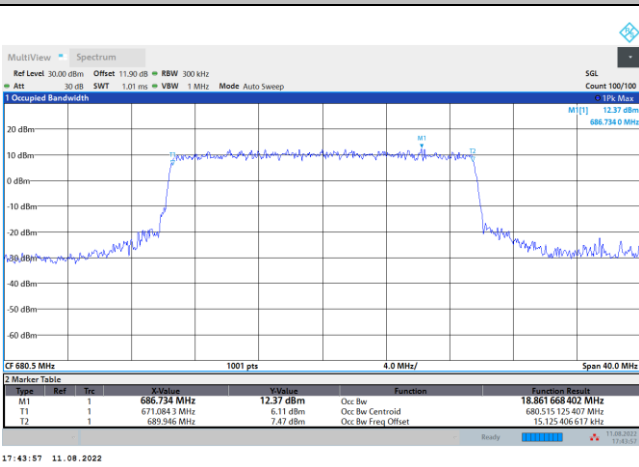

256QAM

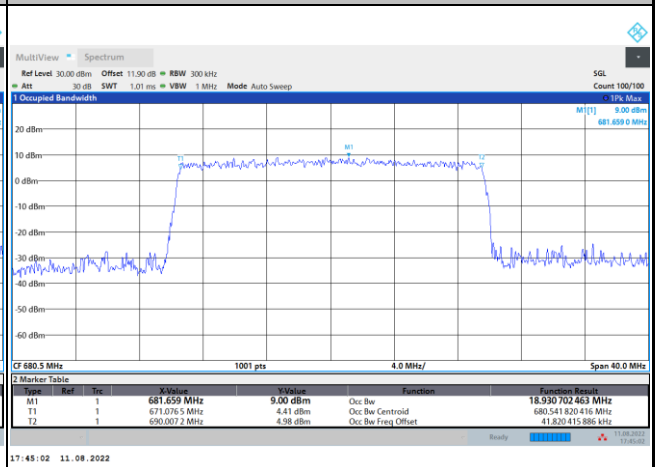





# Conducted Band Edge

## FR1 n71 / 5MHz / DFT-S OFDM / PI/2 BPSK



### Lowest Band Edge / 1RB0

### Highest Band Edge / 1RBmax

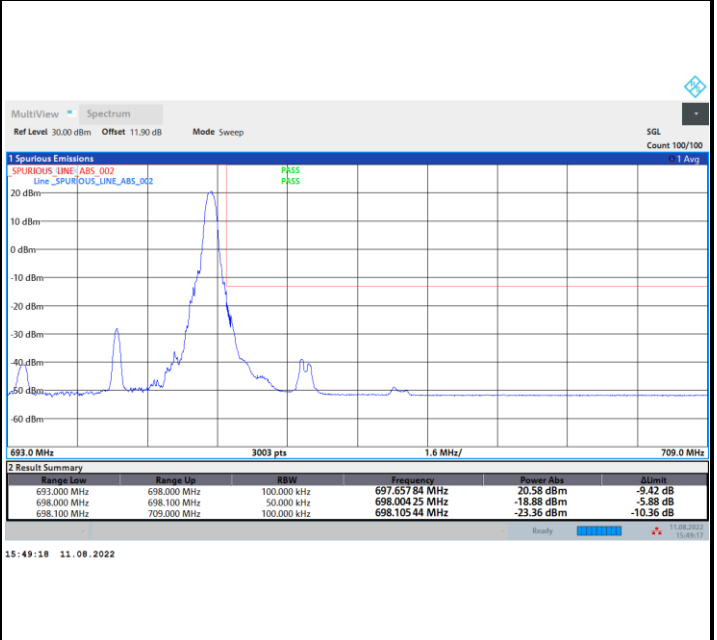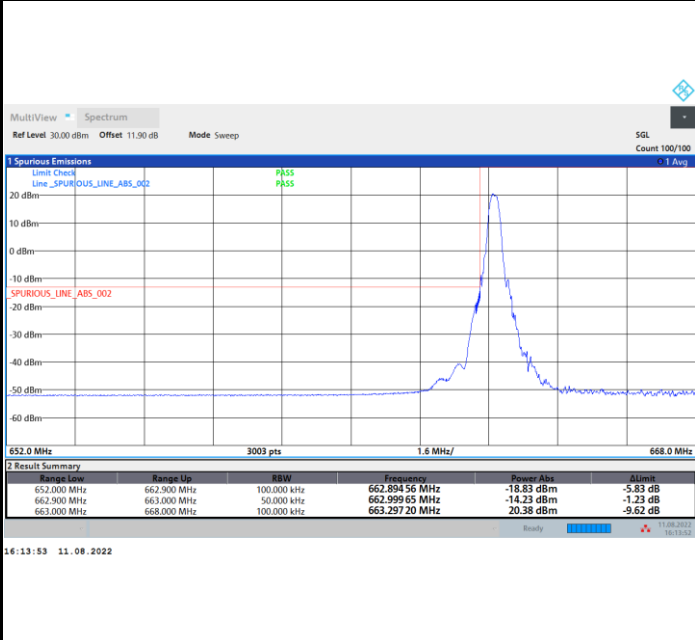

### Lowest Band Edge / Full RB

### Highest Band Edge / Full RB

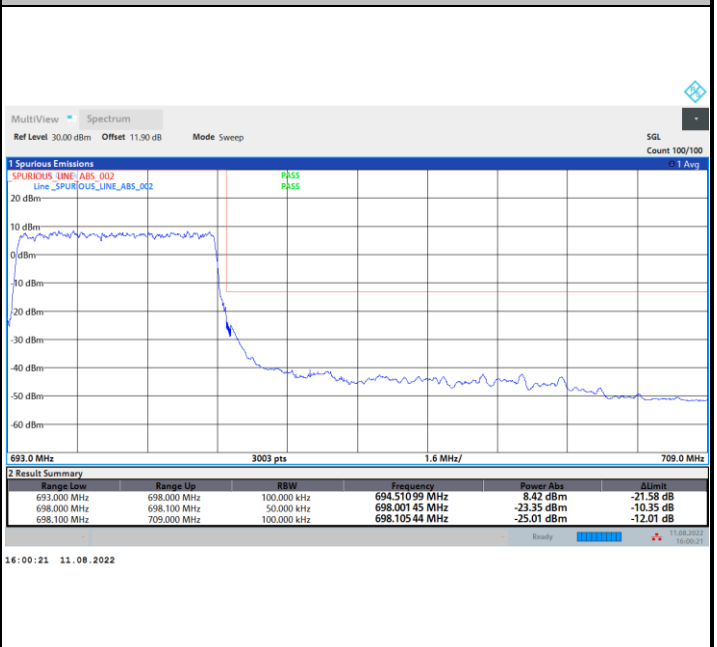
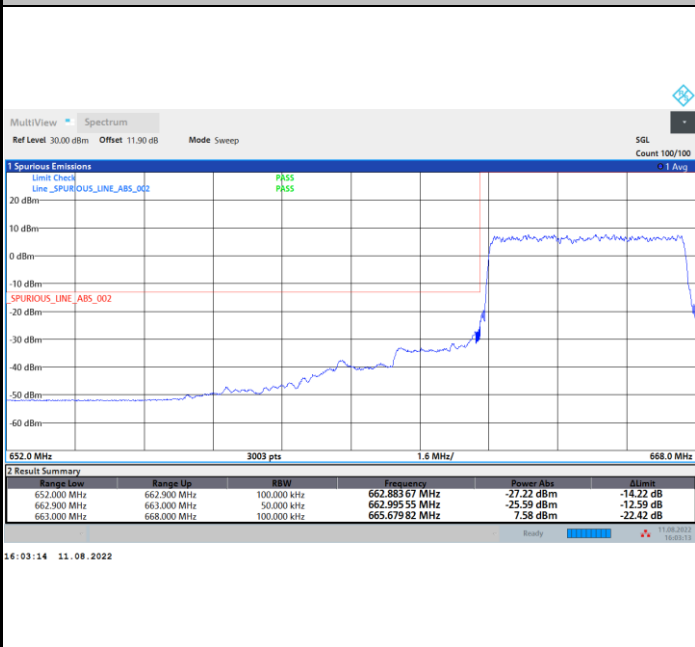




FR1 n71 / 5MHz / DFT-S OFDM / QPSK



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

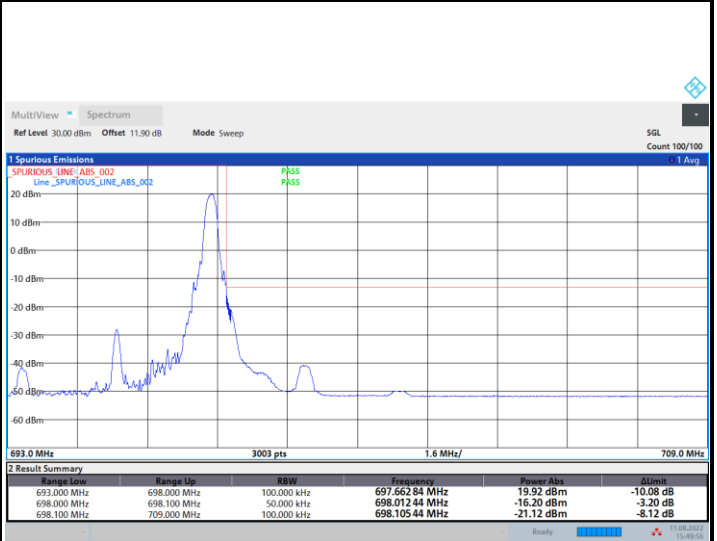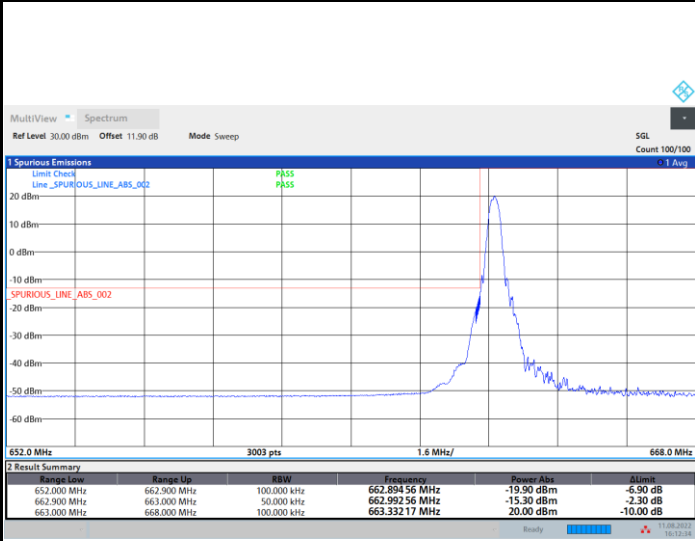

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

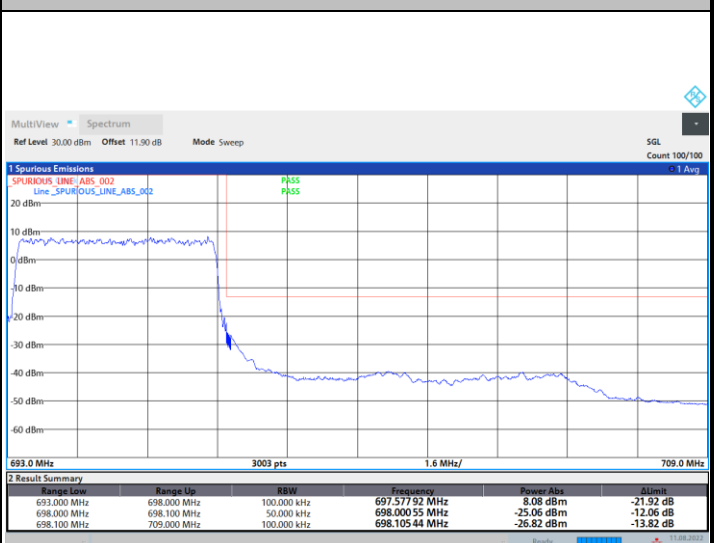
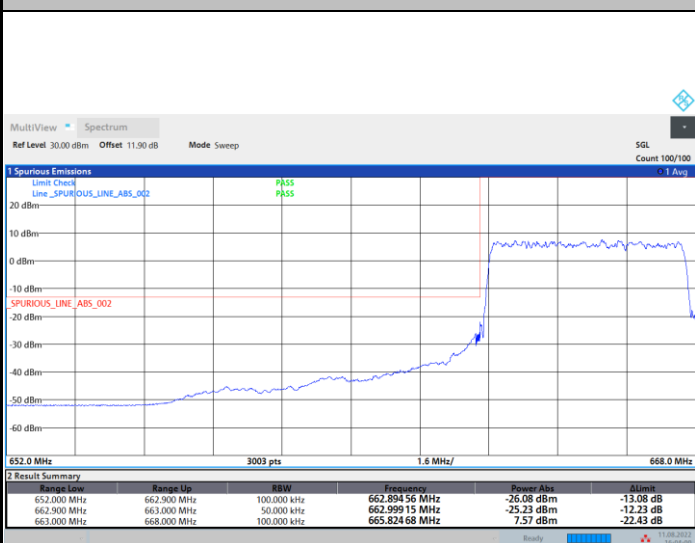




FR1 n71 / 5MHz / DFT-S OFDM / 16QAM


Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

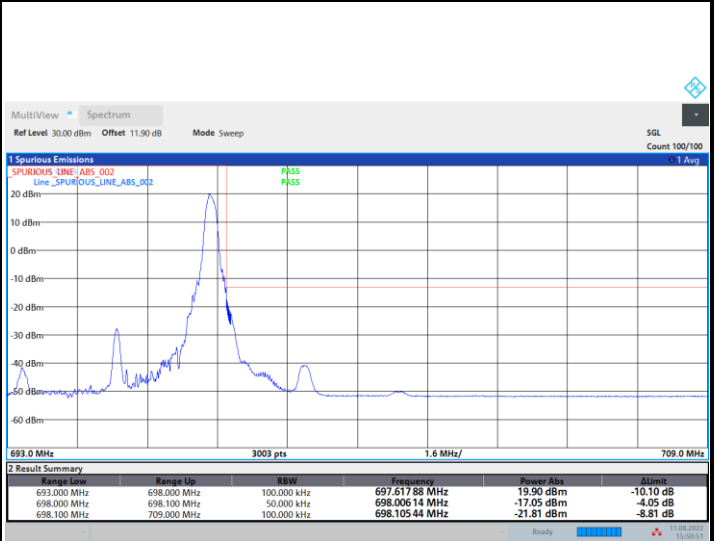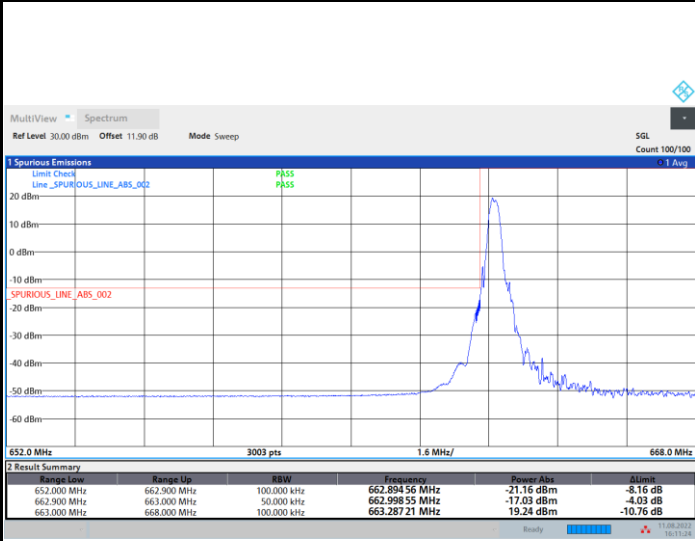

Lowest Band Edge / Full RB

Highest Band Edge / Full RB


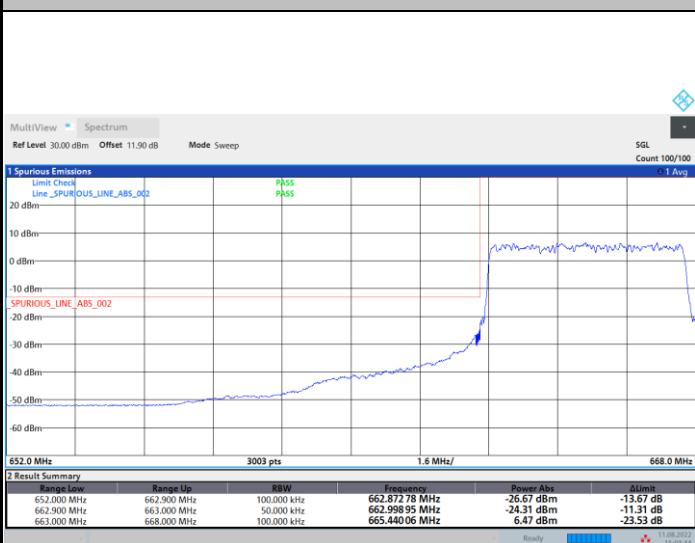




FR1 n71 / 5MHz / DFT-S OFDM / 64QAM



Lowest Band Edge / 1RB0

Highest Band Edge / 1RBmax

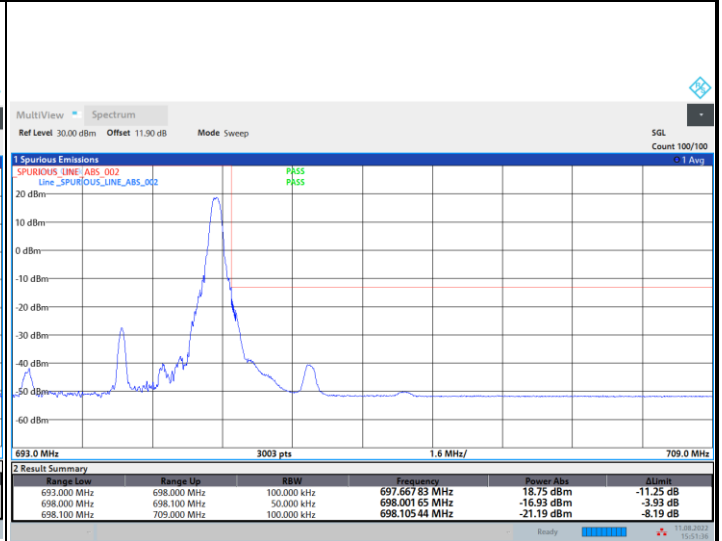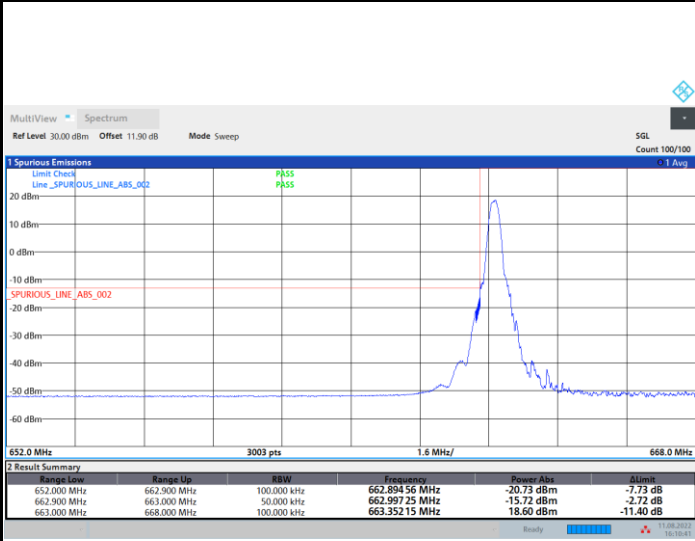

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

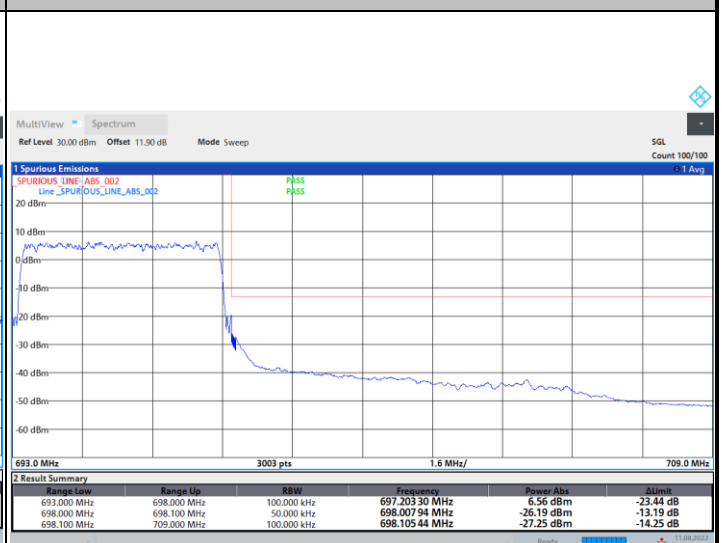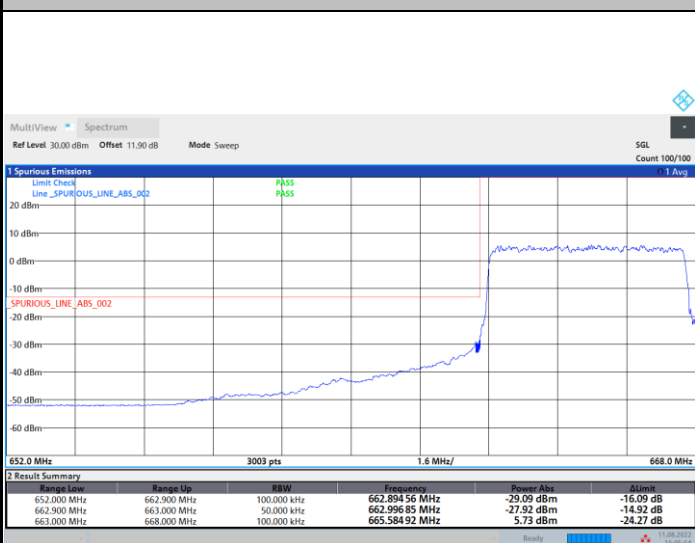







FR1 n71 / 5MHz / DFT-S OFDM / 256QAM



Lowest Band Edge / 1RB0


Highest Band Edge / 1RBmax

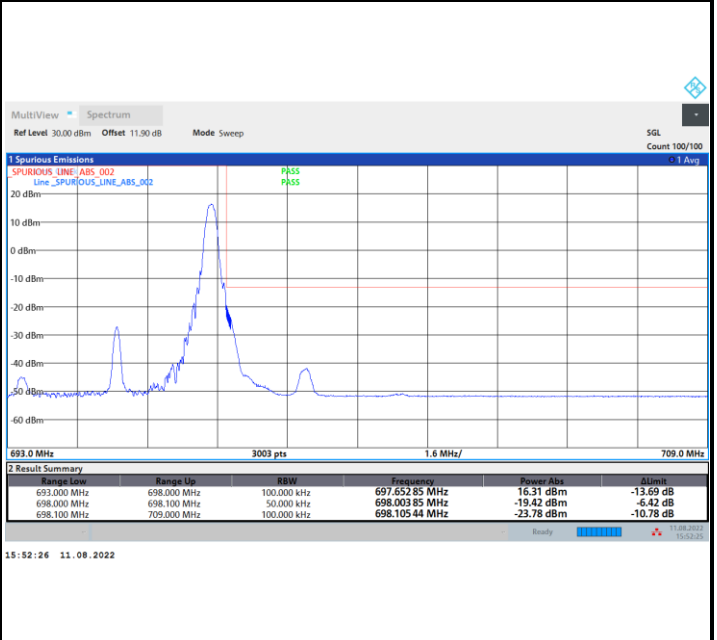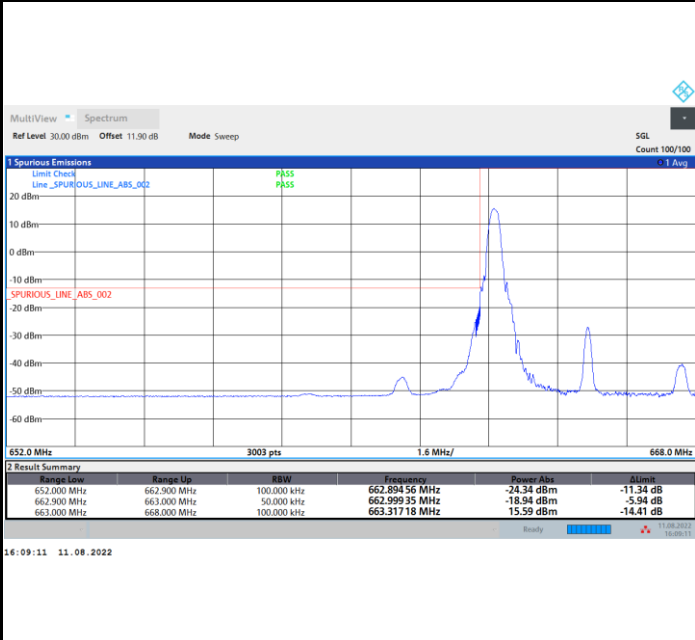

Lowest Band Edge / Full RB

Highest Band Edge / Full RB

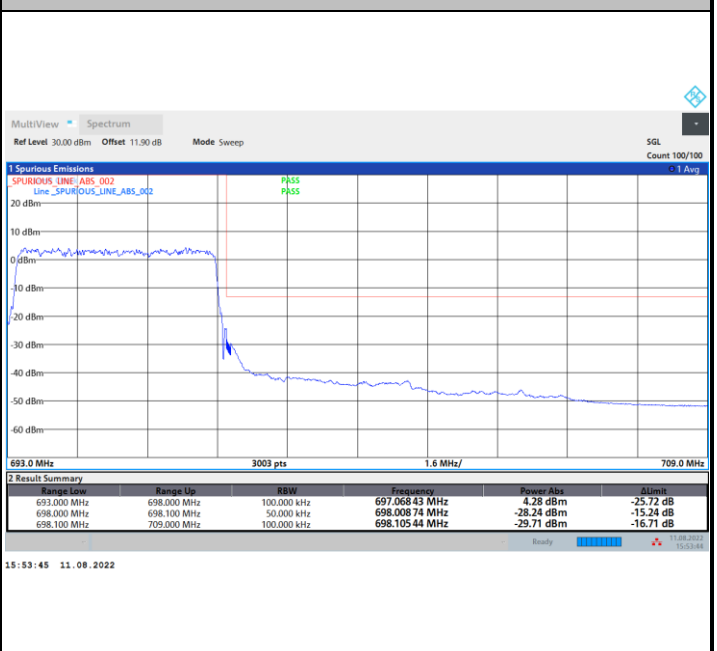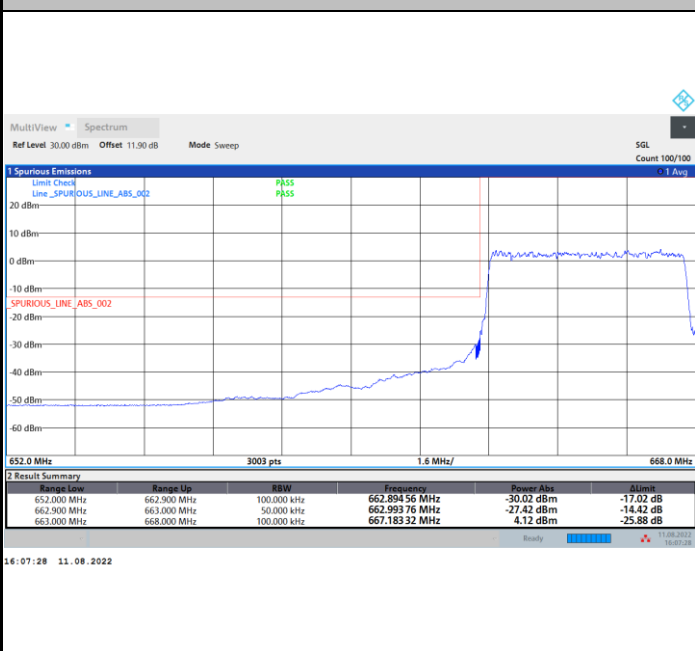


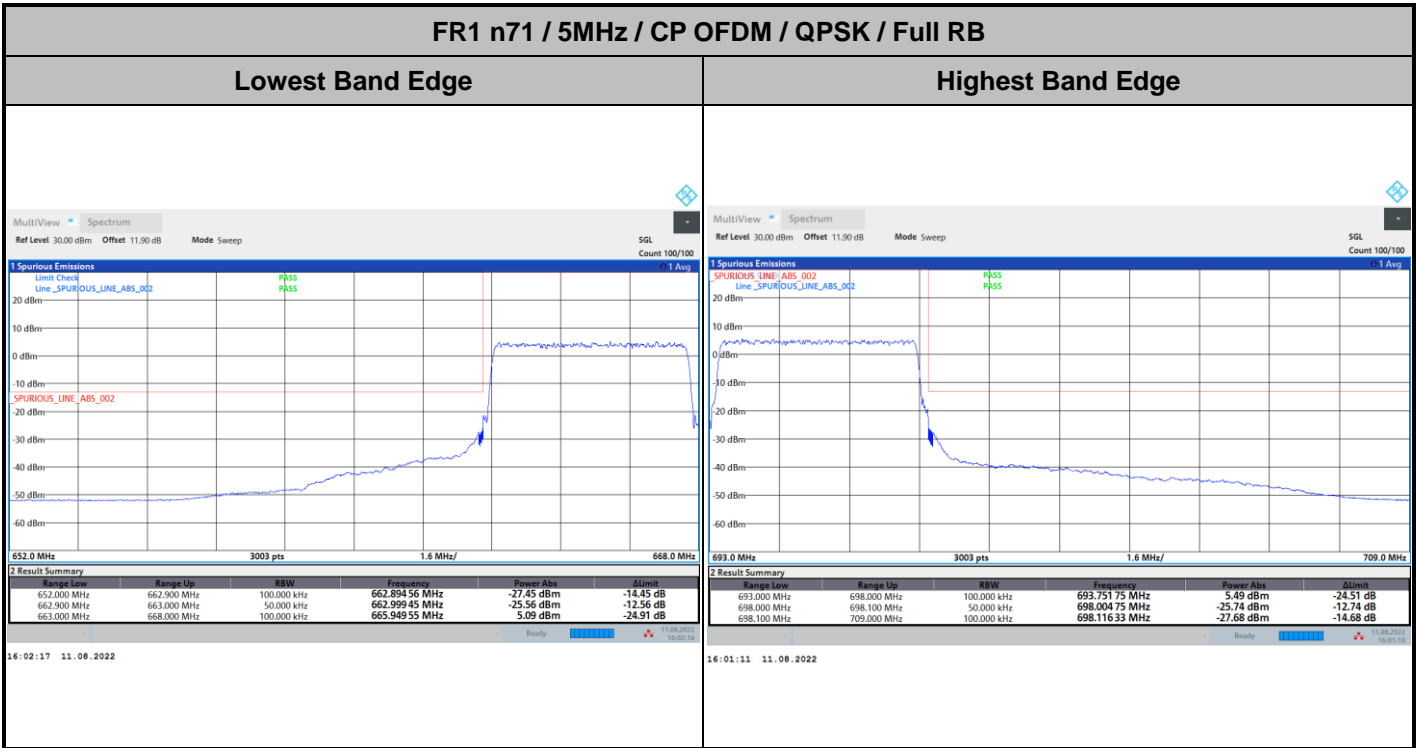




FR1 n71 / 10MHz / DFT-s-OFDM / PI/2 BPSK / Full RB

Lowest Band Edge



Highest Band Edge

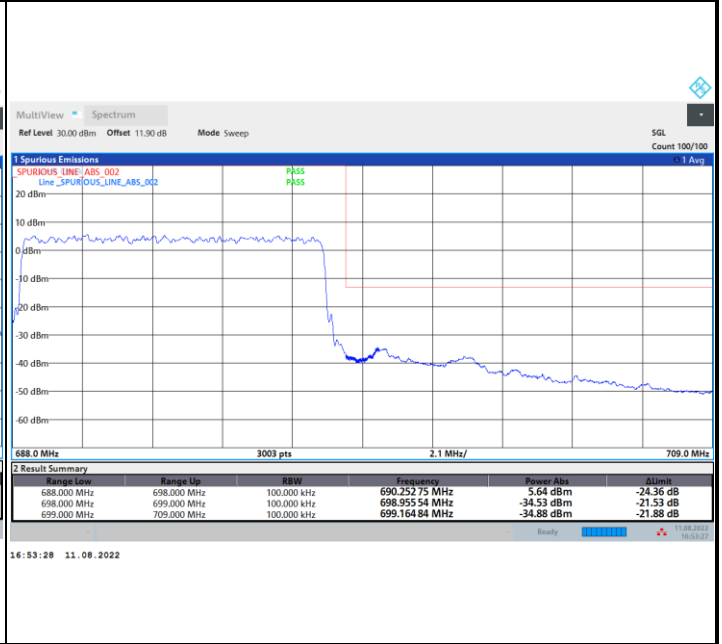
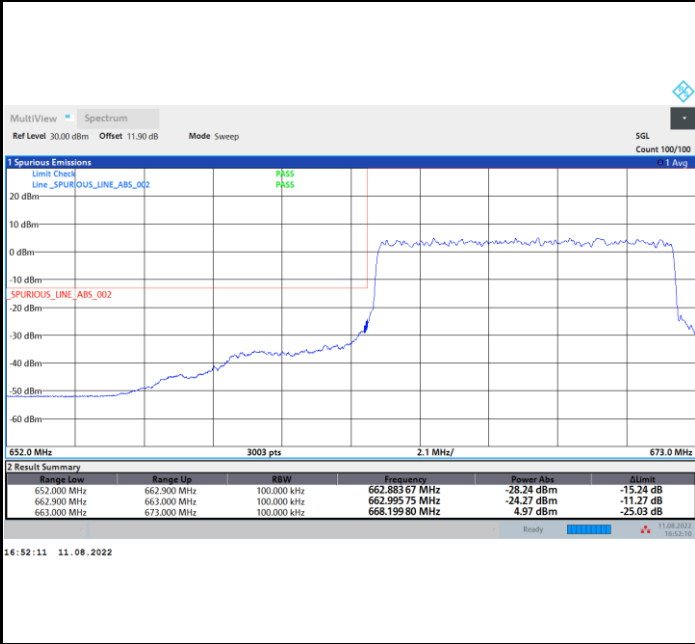


FR1 n71 / 10MHz / DFT-s-OFDM / QPSK / Full RB

Lowest Band Edge

Highest Band Edge

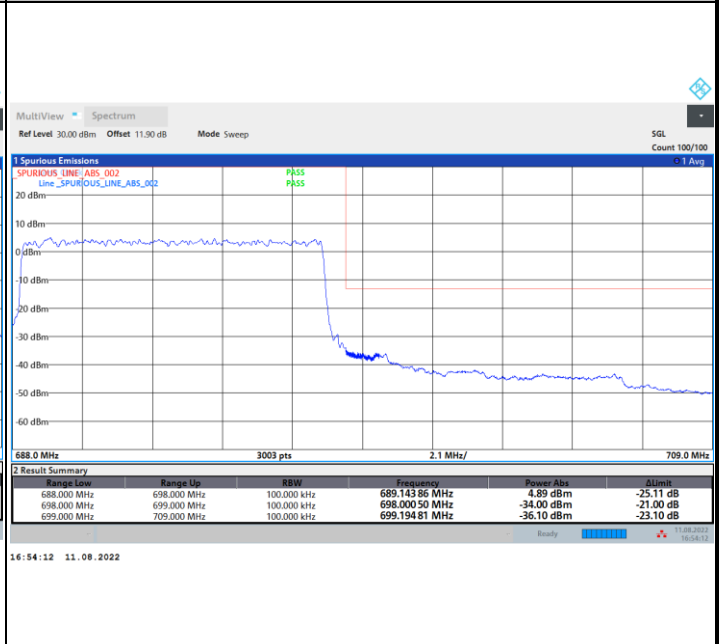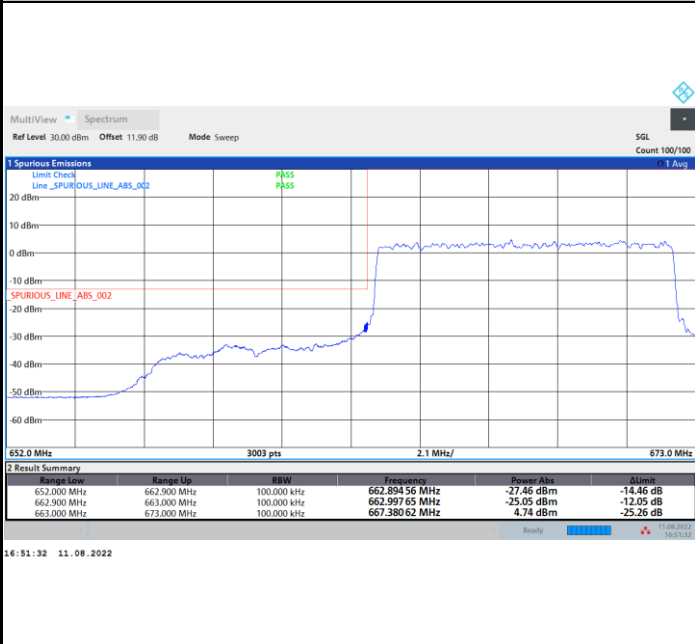

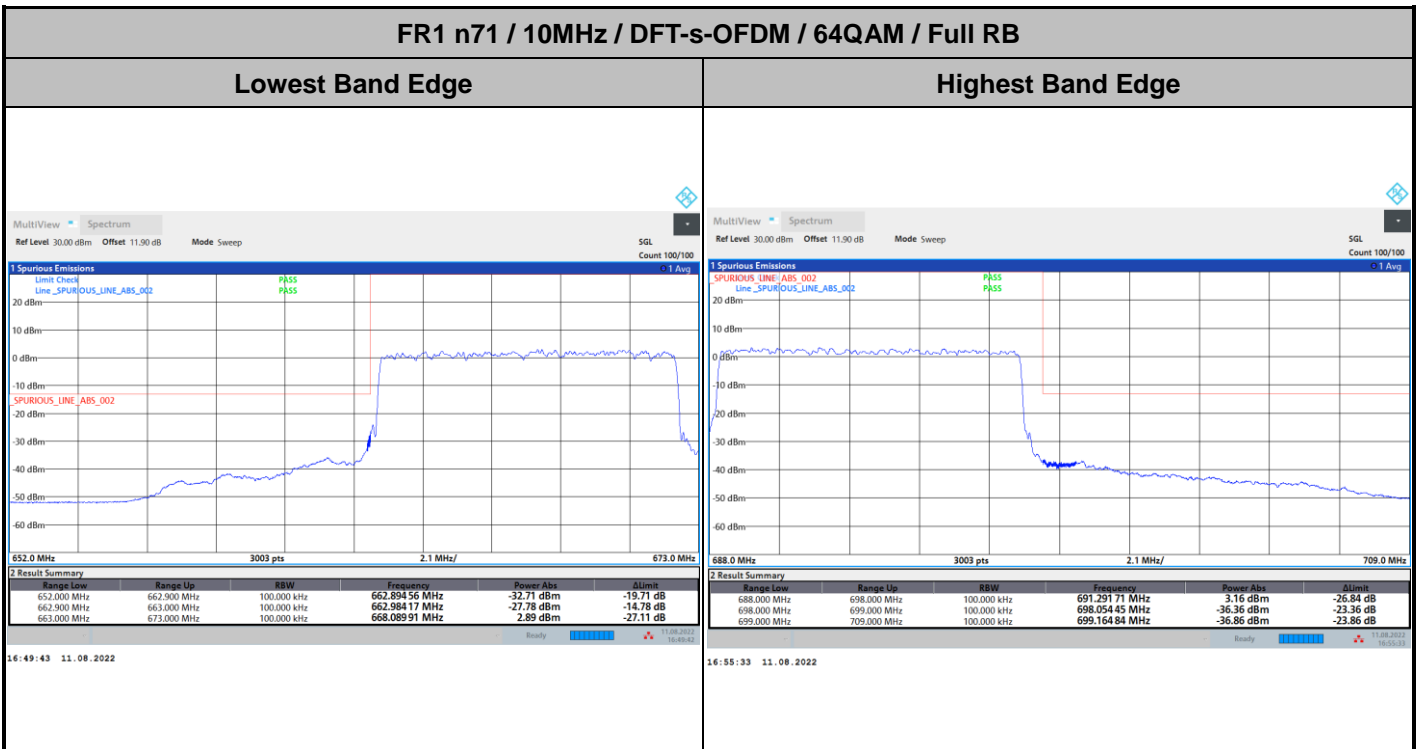
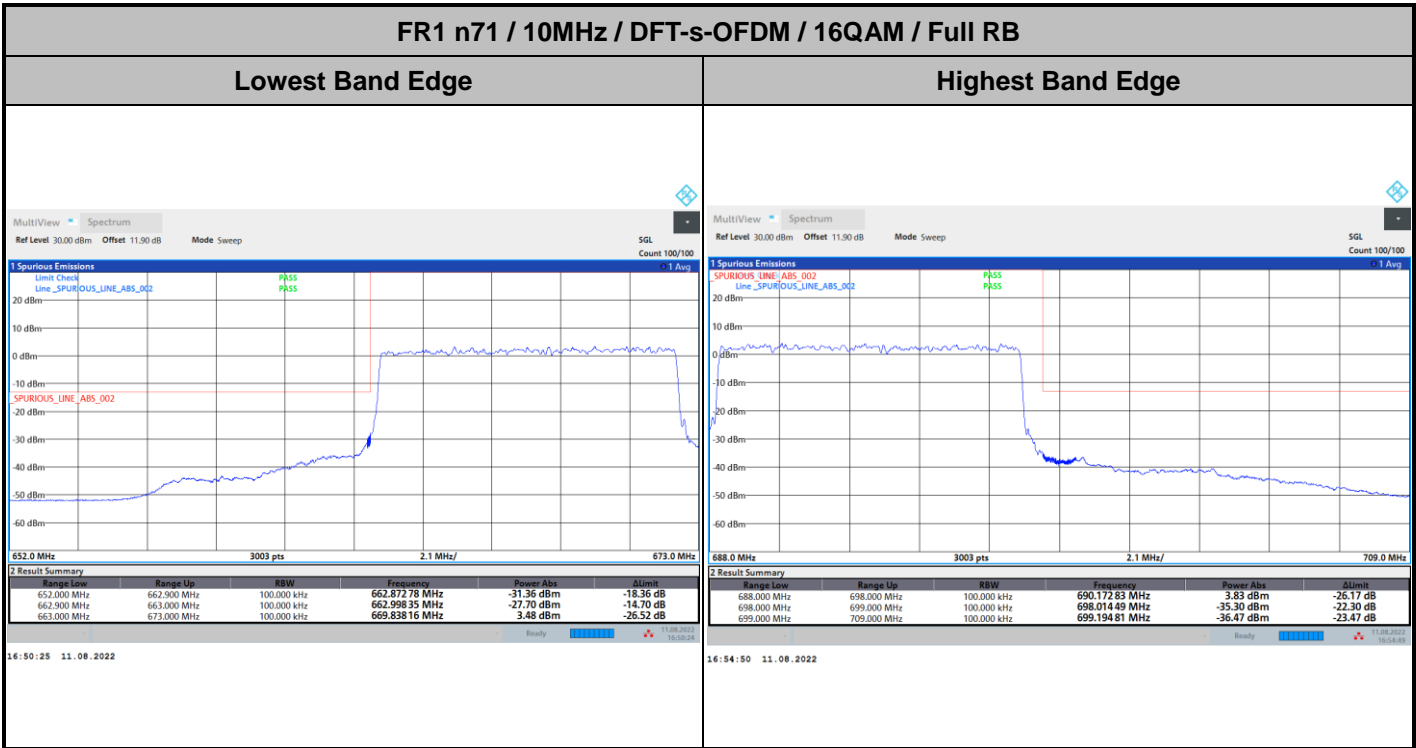




FR1 n71 / 10MHz / DFT-s-OFDM / 256QAM / Full RB

Lowest Band Edge



Highest Band Edge

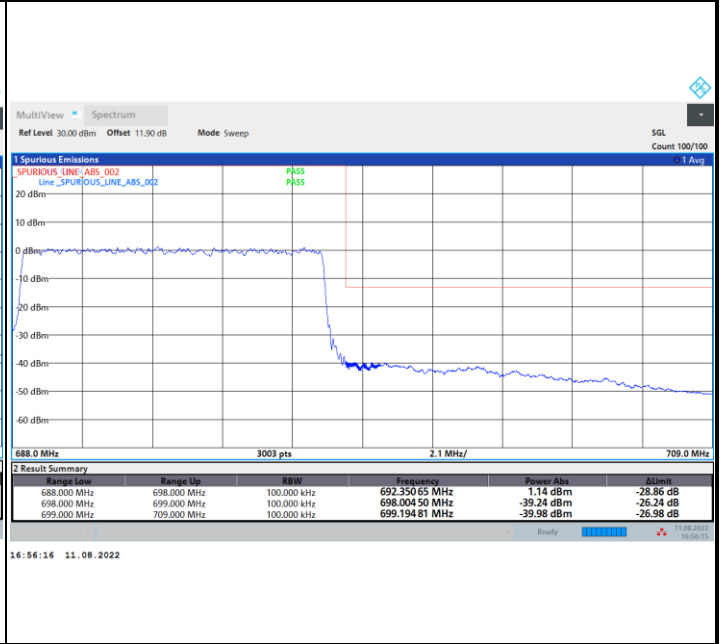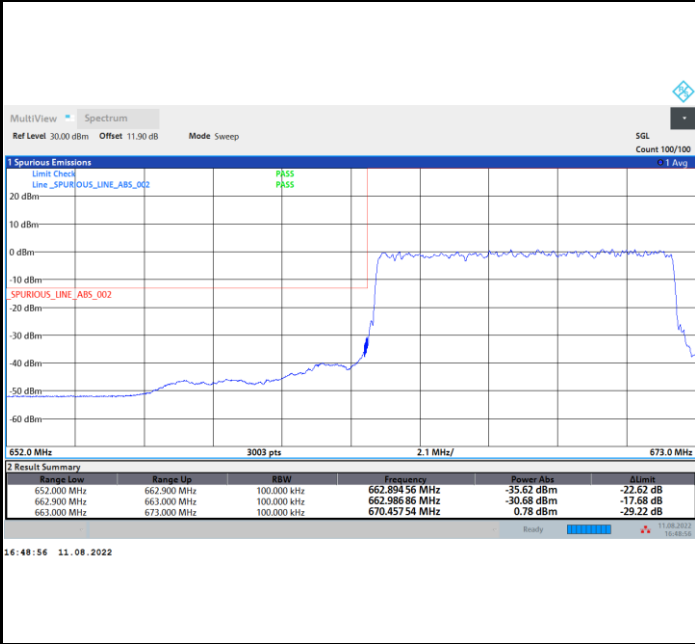

FR1 n71 / 10MHz / CP OFDM / QPSK / Full RB

Lowest Band Edge

Highest Band Edge

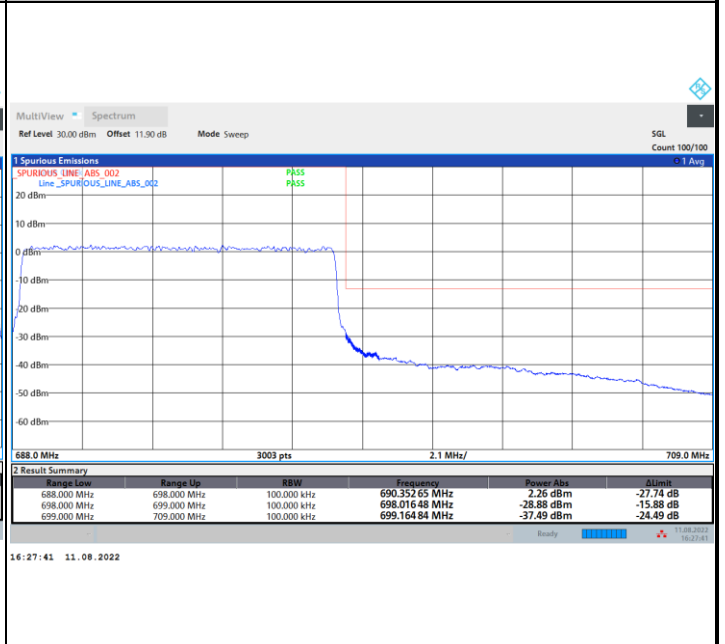
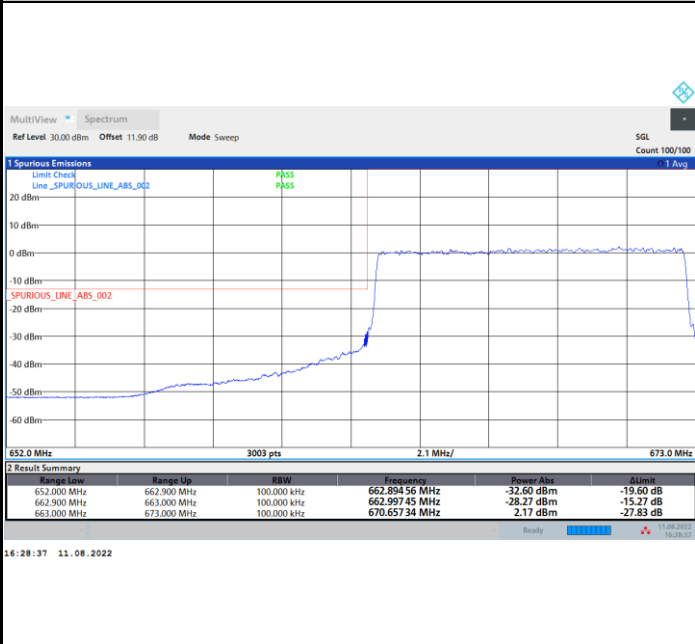




FR1 n71 / 15MHz / DFT-s-OFDM / PI/2 BPSK / Full RB

Lowest Band Edge



Highest Band Edge

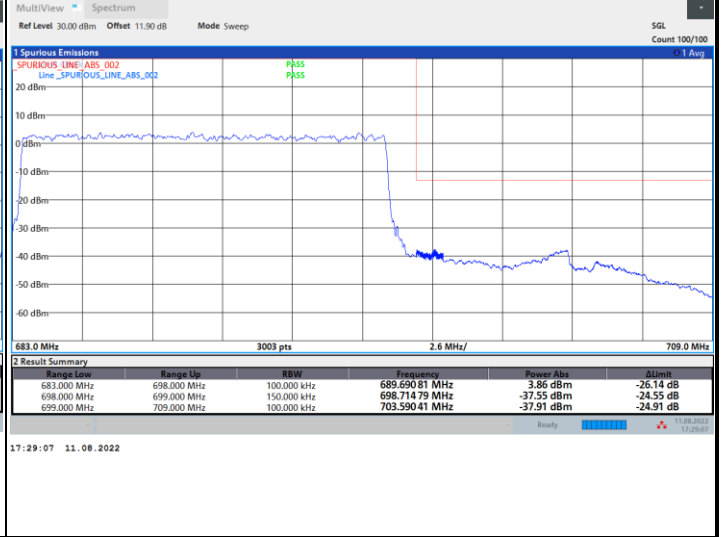
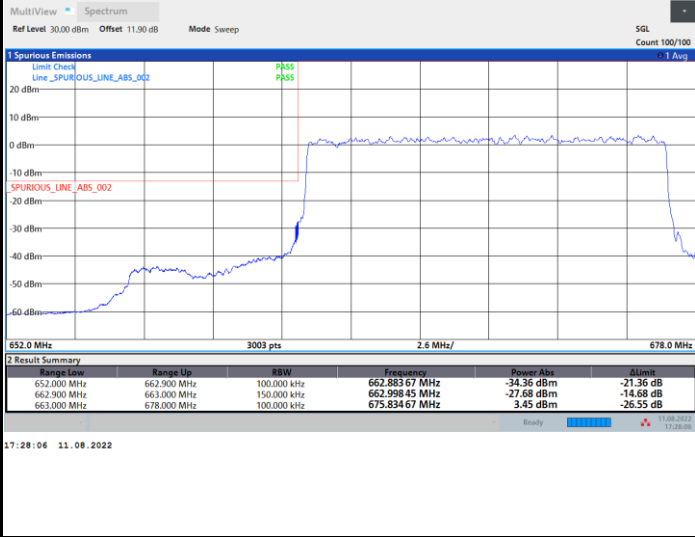


FR1 n71 / 15MHz / DFT-s-OFDM / QPSK / Full RB

Lowest Band Edge

Highest Band Edge

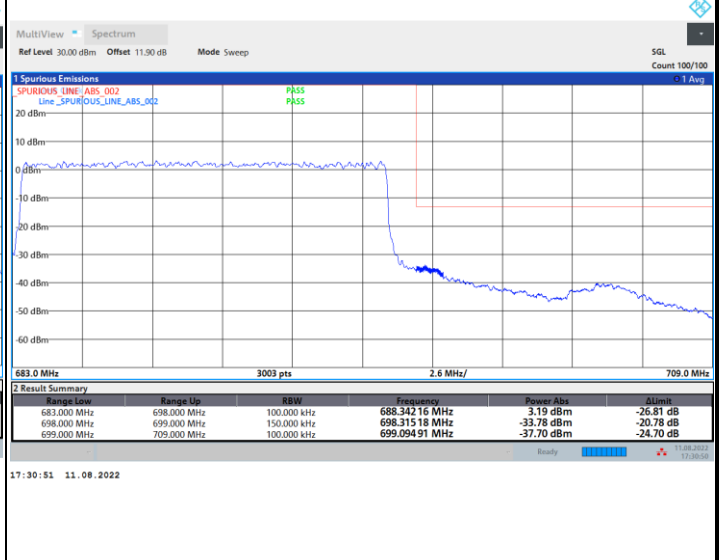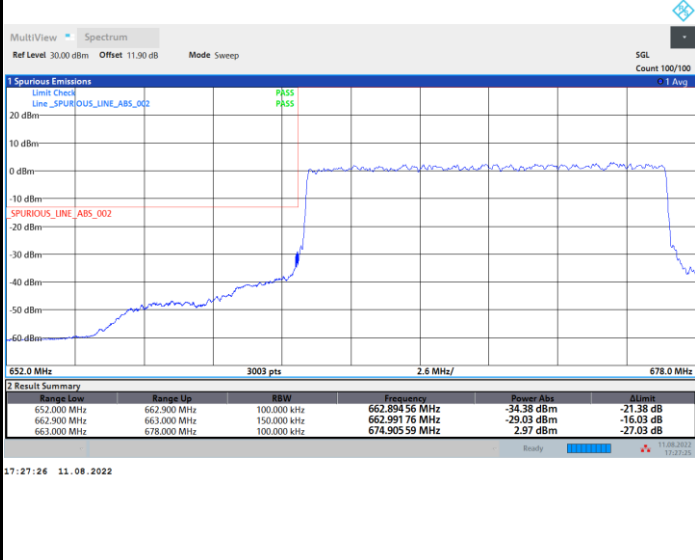

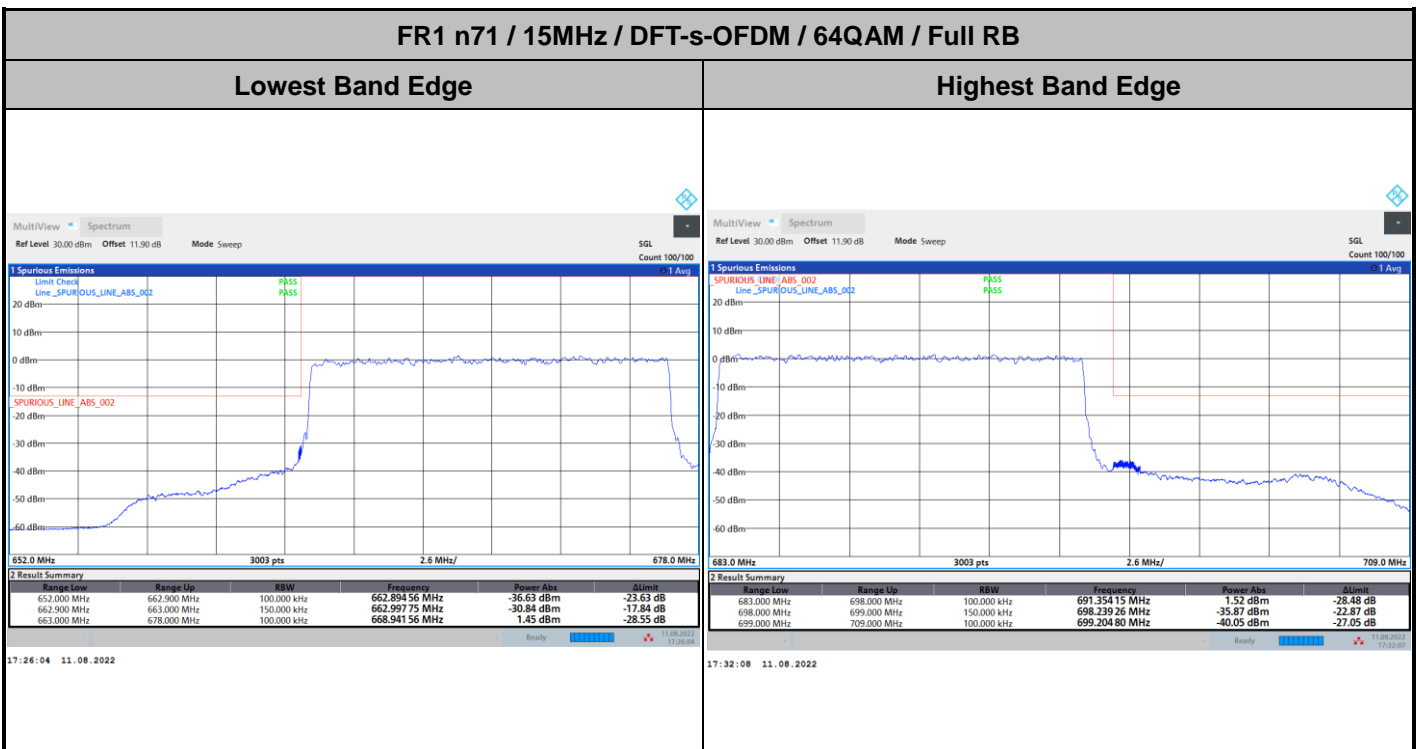
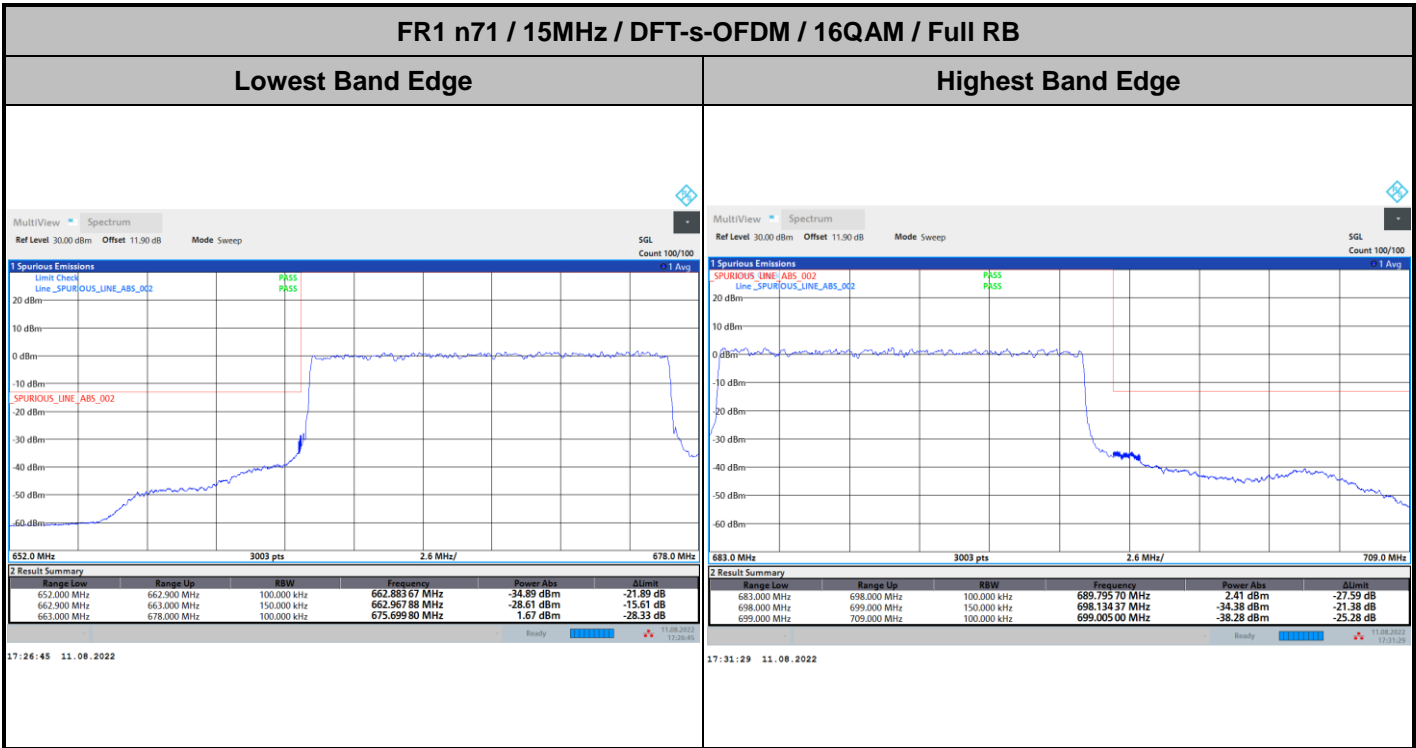




FR1 n71 / 15MHz / DFT-s-OFDM / 256QAM / Full RB

Lowest Band Edge



Highest Band Edge

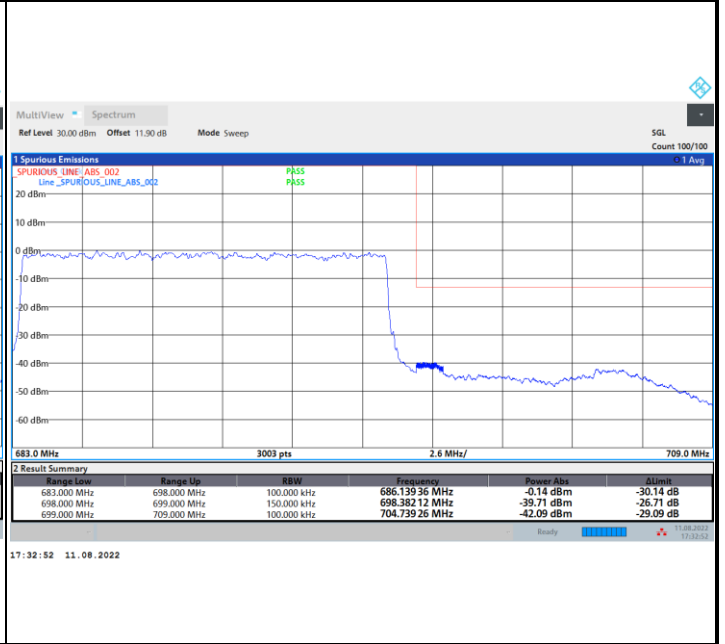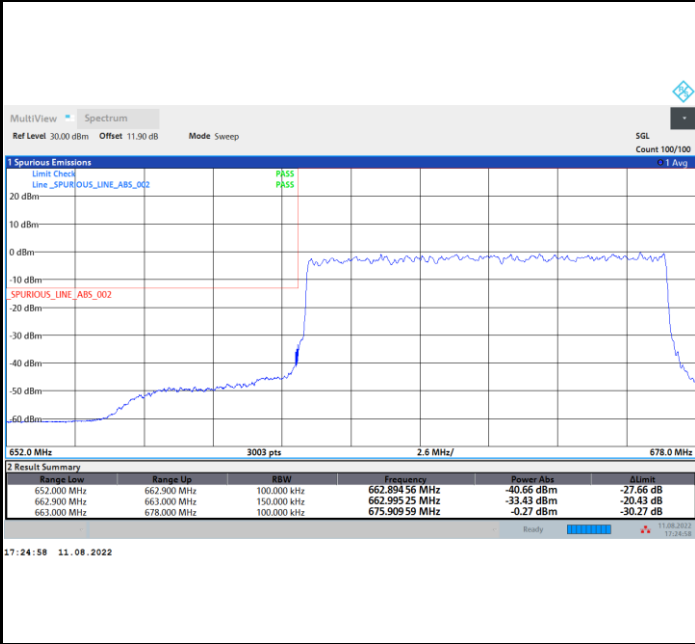

FR1 n71 / 15MHz / CP OFDM / QPSK / Full RB

Lowest Band Edge

Highest Band Edge

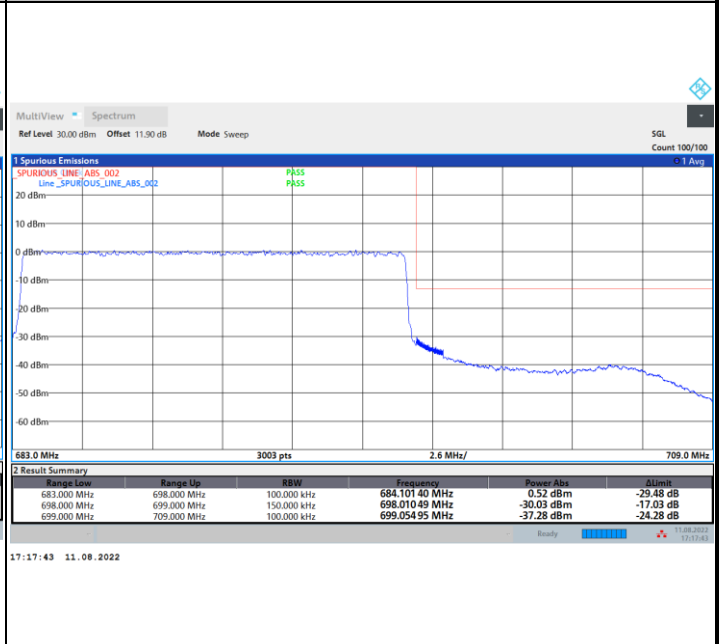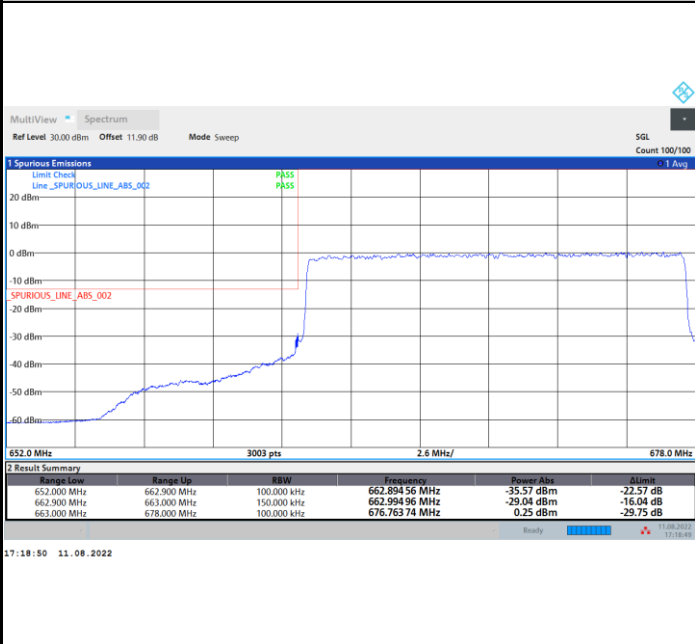







FR1 n71 / 20MHz / DFT-s-OFDM / PI/2 BPSK / Full RB

Lowest Band Edge


Highest Band Edge

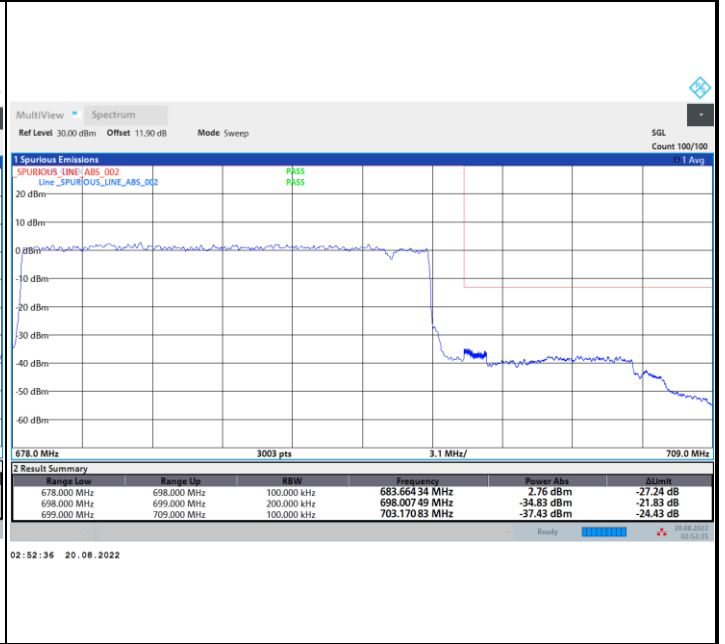
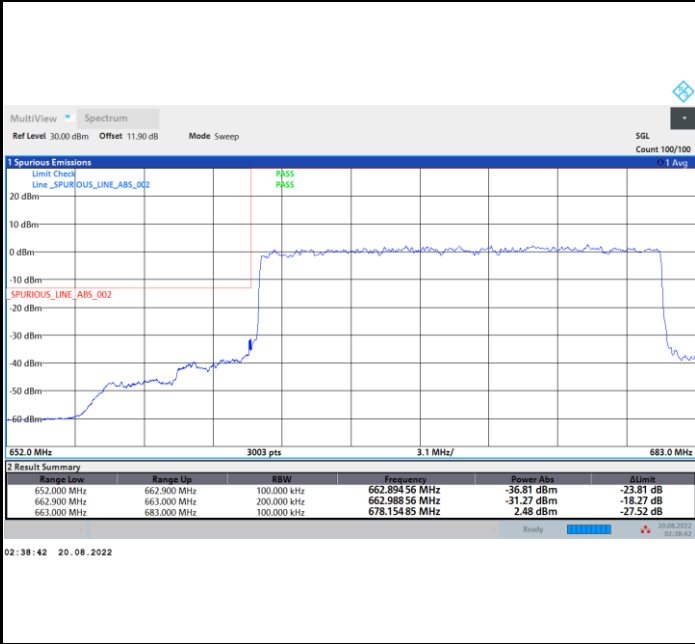


FR1 n71 / 20MHz / DFT-s-OFDM / QPSK / Full RB

Lowest Band Edge

Highest Band Edge

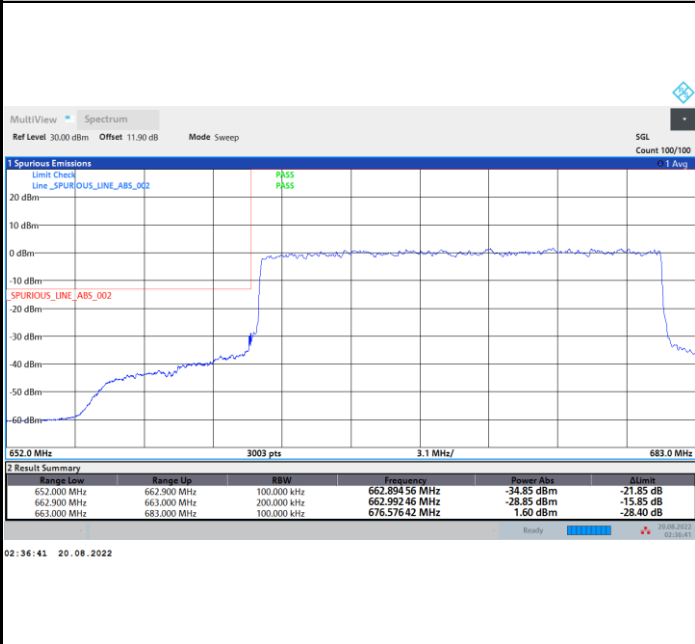

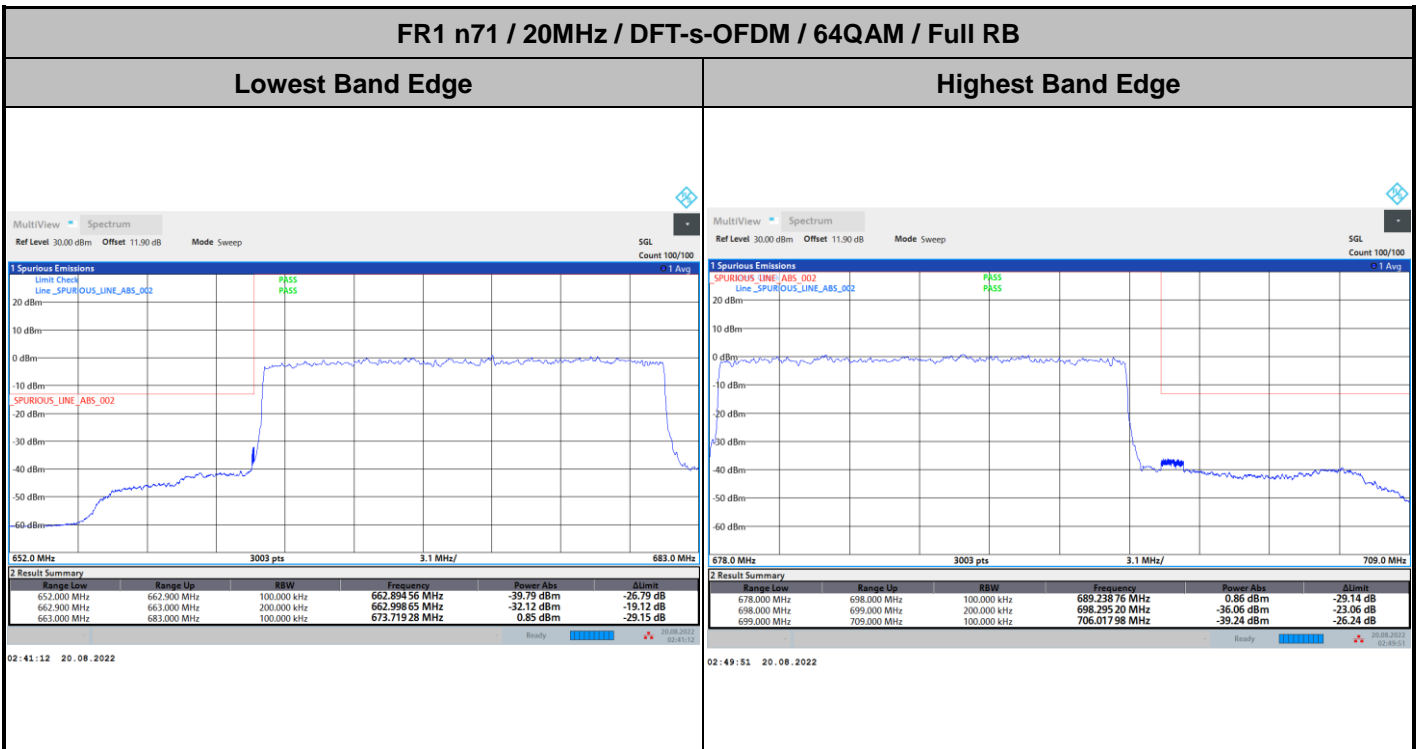
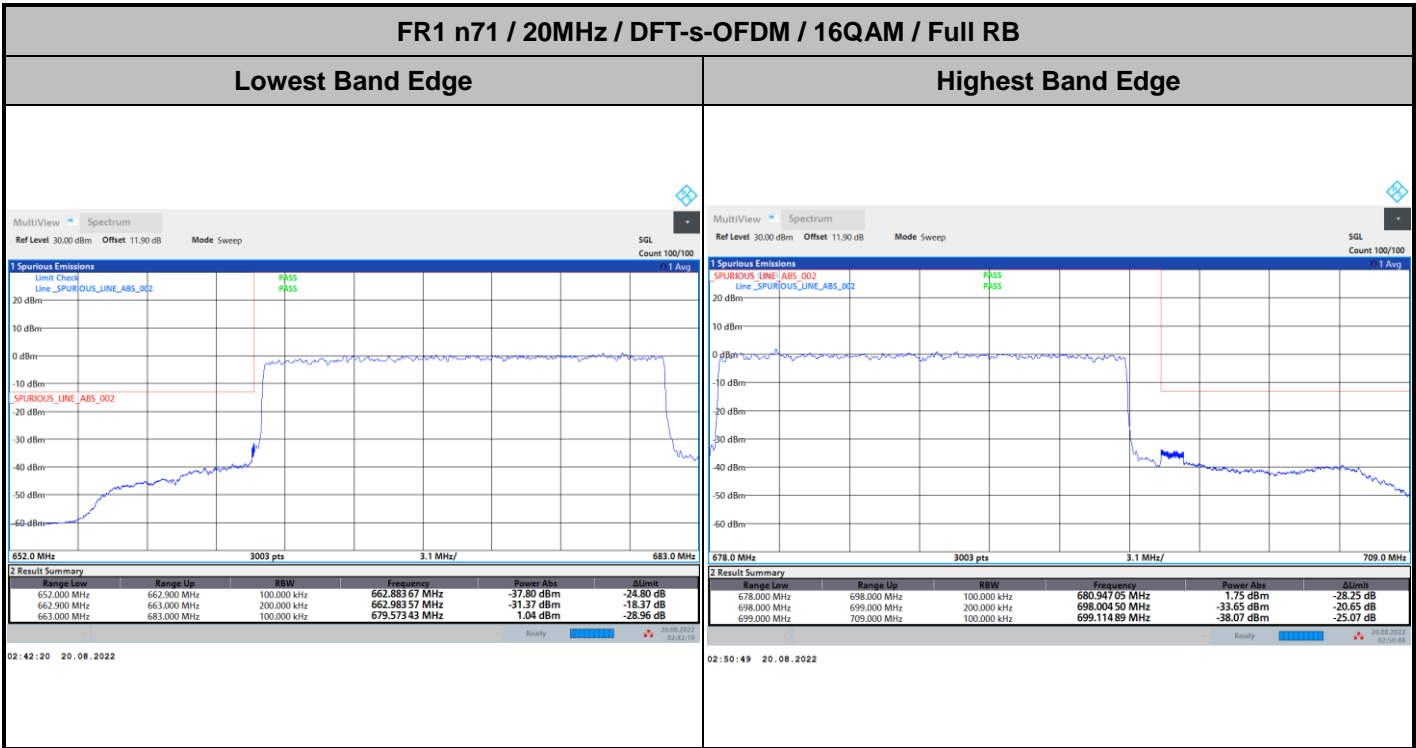




FR1 n71 / 20MHz / DFT-s-OFDM / 256QAM / Full RB

Lowest Band Edge



Highest Band Edge

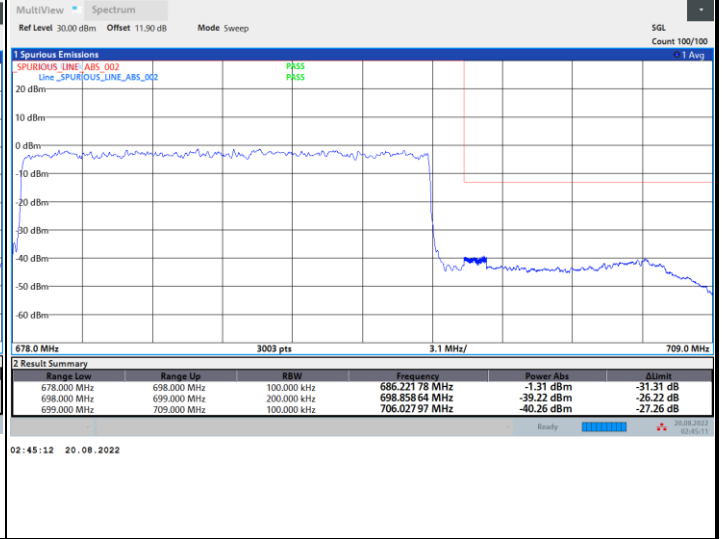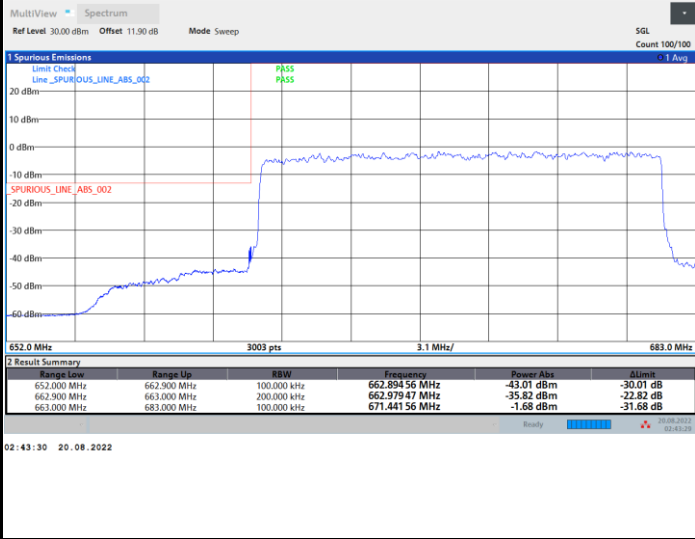

FR1 n71 / 20MHz / CP OFDM / QPSK / Full RB

Lowest Band Edge

Highest Band Edge

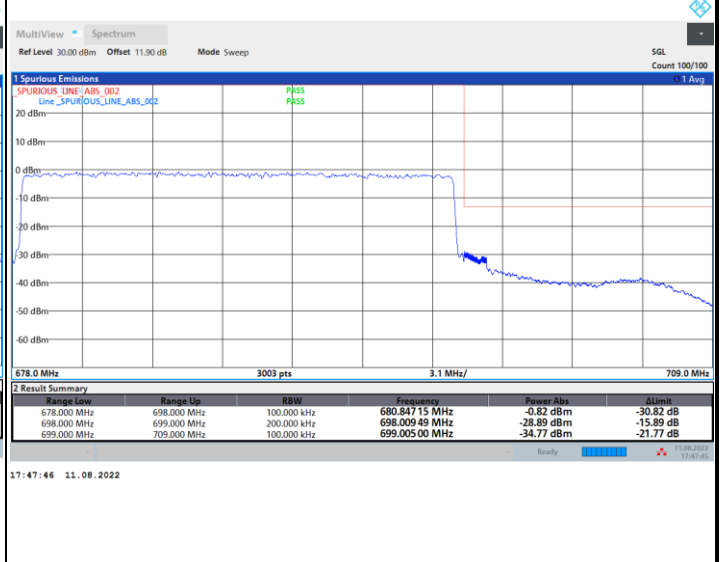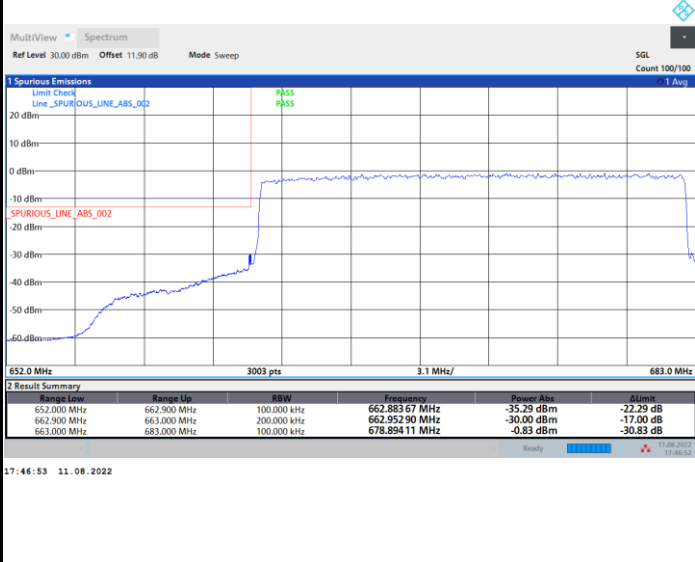





# Conducted Spurious Emission


FR1 n71 / 5MHz / DFT-S OFDM / QPSK / 1RB1

## Lowest Channel

## Middle Channel

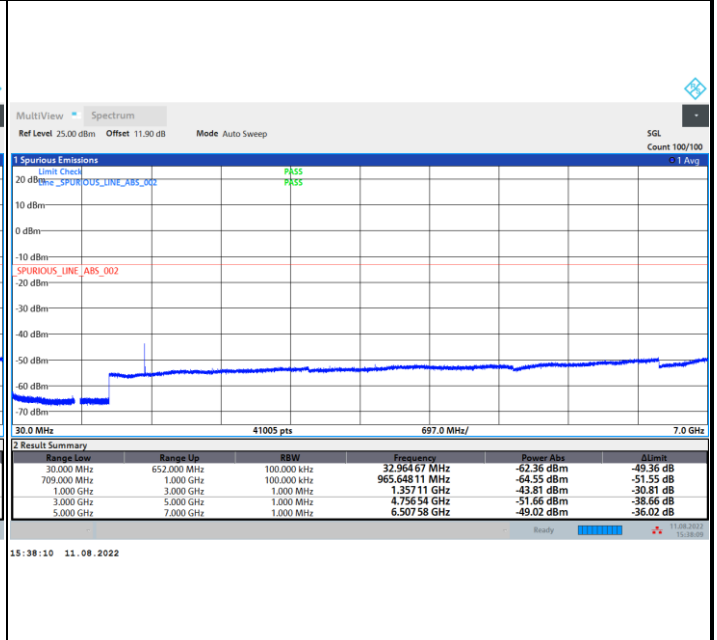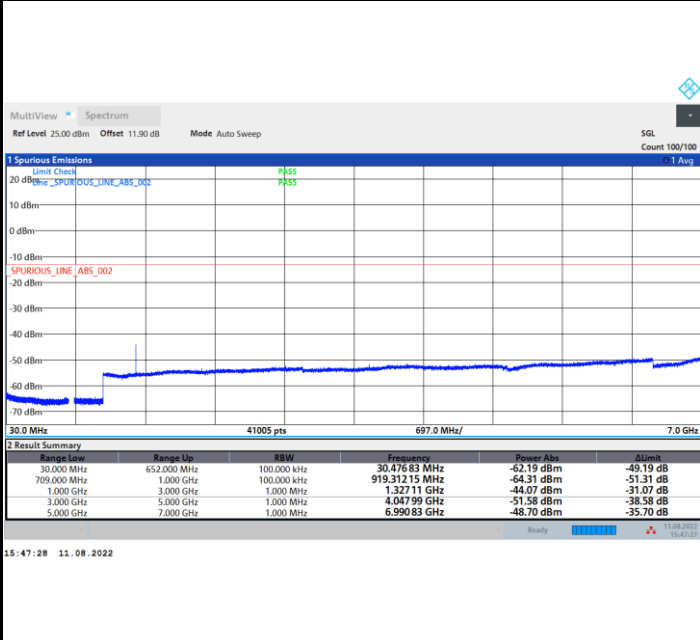

## Highest Channel

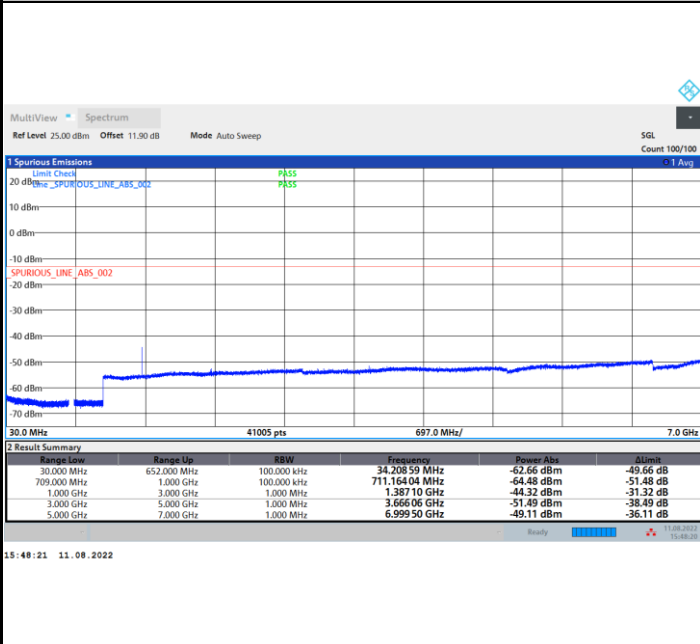



### Frequency Stability

Test Conditions		FR1 n71 (PI/2 BPSK) / Middle Channel	Limit
Temperature (°C)	Voltage (Volt)	BW 20MHz	Note 2.
		Deviation (ppm)	Result
50	Normal Voltage	0.0046	PASS
40	Normal Voltage	0.0044	
30	Normal Voltage	0.0031	
20(Ref.)	Normal Voltage	0.0000	
10	Normal Voltage	0.0034	
0	Normal Voltage	0.0007	
-10	Normal Voltage	0.0017	
-20	Normal Voltage	0.0051	
-30	Normal Voltage	0.0039	
20	Maximum Voltage	0.0047	
20	Normal Voltage	0.0000	
20	Battery End Point	0.0007	

**Note:**

- 1. Normal Voltage = 3.30 V. ; Battery End Point (BEP) = 3.135 V. ; Maximum Voltage = 3.63 V.
- 2. The frequency fundamental emissions stay within the authorized frequency block.



## Appendix B. Test Results of Radiated Test

<Ant. 0>

### 5G NR n2

5G NR n2 / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-56.62	-13	-43.62	-77.41	-63.19	1.67	8.24	H
	5550	-55.71	-13	-42.71	-81.19	-62.78	2.65	9.72	H
	7404	-49.86	-13	-36.86	-76.95	-59.01	2.46	11.61	H
									H
									H
									H
	3702	-55.32	-13	-42.32	-74.07	-61.89	1.67	8.24	V
	5550	-55.41	-13	-42.41	-80.83	-62.48	2.65	9.72	V
	7404	-44.47	-13	-31.47	-71.75	-53.62	2.46	11.61	V
									V
									V
									V
Middle	3744	-56.74	-13	-43.74	-77.48	-63.35	1.68	8.29	H
	5610	-56.02	-13	-43.02	-81.54	-63.08	2.69	9.74	H
	7482	-53.78	-13	-40.78	-80.99	-63.11	2.44	11.76	H
									H
									H
									H
	3744	-53.33	-13	-40.33	-74.08	-59.94	1.68	8.29	V
	5610	-55.41	-13	-42.41	-80.92	-62.47	2.69	9.74	V
	7482	-48.52	-13	-35.52	-75.79	-57.85	2.44	11.76	V
									V
									V



Highest	3780	-57.21	-13	-44.21	-77.95	-63.85	1.69	8.34	H
	5670	-55.89	-13	-42.89	-81.51	-62.94	2.72	9.77	H
	7560	-51.38	-13	-38.38	-78.71	-60.81	2.41	11.84	H
									H
									H
									H
	3780	-52.51	-13	-39.51	-73.29	-59.15	1.69	8.34	V
	5670	-55.62	-13	-42.62	-81.23	-62.67	2.72	9.77	V
	7560	-45.94	-13	-32.94	-73.53	-55.37	2.41	11.84	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n5**

5G NR n5/ 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-62.18	-13	-49.18	-74.08	-63.94	0.98	4.89	H
	2472	-59.54	-13	-46.54	-76.75	-61.42	1.28	5.32	H
	3296	-58.24	-13	-45.24	-77.54	-61.65	1.54	7.10	H
									H
									H
									H
	1648	-63.07	-13	-50.07	-75.44	-64.83	0.98	4.89	V
	2472	-58.57	-13	-45.57	-76.22	-60.45	1.28	5.32	V
	3296	-57.45	-13	-44.45	-77.08	-60.86	1.54	7.10	V
									V
									V
									V
Middle	1656	-63.45	-13	-50.45	-75.5	-65.18	0.98	4.86	H
	2480	-58.90	-13	-45.90	-76.09	-60.81	1.28	5.34	H
	3304	-57.98	-13	-44.98	-77.38	-61.42	1.54	7.14	H
									H
									H
									H
	1656	-63.17	-13	-50.17	-75.69	-64.9	0.98	4.86	V
	2480	-58.76	-13	-45.76	-76.39	-60.67	1.28	5.34	V
	3304	-58.06	-13	-45.06	-77.74	-61.5	1.54	7.14	V
									V
									V
									V





Highest	1656	-63.75	-13	-50.75	-75.8	-65.48	0.98	1656	H
	2487	-59.30	-13	-46.30	-76.48	-61.22	1.29	2487	H
	3320	-57.76	-13	-44.76	-77.17	-61.27	1.55	3320	H
									H
									H
									H
	1656	-62.91	-13	-49.91	-75.43	-64.64	0.98	4.86	V
	2487	-58.30	-13	-45.30	-75.92	-60.22	1.29	5.36	V
	3320	-57.41	-13	-44.41	-77.1	-60.92	1.55	7.21	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n25

5G NR n25 / 40MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3702	-56.86	-13	-43.86	-77.64	-63.43	1.67	8.24	H
	5550	-55.96	-13	-42.96	-81.4	-63.03	2.65	9.72	H
	7404	-52.11	-13	-39.11	-79.17	-61.26	2.46	11.61	H
									H
									H
									H
	3702	-53.44	-13	-40.44	-74.1	-60.01	1.67	8.24	V
	5550	-55.29	-13	-42.29	-80.56	-62.36	2.65	9.72	V
	7404	-48.62	-13	-35.62	-75.95	-57.77	2.46	11.61	V
									V
									V
									V
Middle	3726	-57.29	-13	-44.29	-78.14	-63.89	1.68	8.27	H
	5586	-55.99	-13	-42.99	-81.5	-63.05	2.67	9.73	H
	7452	-52.77	-13	-39.77	-79.93	-62.03	2.44	11.70	H
									H
									H
									H
	3726	-54.42	-13	-41.42	-75.14	-61.02	1.68	8.27	V
	5586	-56.21	-13	-43.21	-81.67	-63.27	2.67	9.73	V
	7452	-50.76	-13	-37.76	-78.07	-60.02	2.44	11.70	V
									V
									V
									V



Highest	3750	-57.76	-13	-44.76	-78.48	-64.38	1.68	8.30	H
	5628	-56.04	-13	-43.04	-81.56	-63.09	2.70	9.75	H
	7500	-54.02	-13	-41.02	-81.27	-63.39	2.43	11.80	H
									H
									H
									H
	3750	-56.41	-13	-43.41	-77.19	-63.03	1.68	8.30	V
	5628	-55.96	-13	-42.96	-81.49	-63.01	2.70	9.75	V
	7500	-53.85	-13	-40.85	-81.29	-63.22	2.43	11.80	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n26

5G NR n26 / 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1648	-63.63	-13	-50.63	-75.53	-65.39	0.98	4.89	H
	2472	-59.67	-13	-46.67	-76.88	-61.55	1.28	5.32	H
	3296	-57.95	-13	-44.95	-77.25	-61.36	1.54	7.10	H
									H
									H
									H
	1648	-63.16	-13	-50.16	-75.53	-64.92	0.98	4.89	V
	2472	-58.78	-13	-45.78	-75.43	-60.66	1.28	5.32	V
	3296	-57.70	-13	-44.70	-77.33	-61.11	1.54	7.10	V
									V
									V
									V
Middle	1656	-63.97	-13	-50.97	-76.02	-65.70	0.98	4.86	H
	2480	-59.41	-13	-46.41	-76.6	-61.32	1.28	5.34	H
	3304	-57.89	-13	-44.89	-77.29	-61.33	1.54	7.14	H
									H
									H
									H
	1656	-63.41	-13	-50.41	-75.93	-65.14	0.98	4.86	V
	2480	-58.31	-13	-45.31	-75.94	-60.22	1.28	5.34	V
	3304	-57.76	-13	-44.76	-77.44	-61.2	1.54	7.14	V
									V
									V
									V



Highest	1656	-63.69	-13	-50.69	-75.74	-65.42	0.98	4.86	H
	2488	-59.15	-13	-46.15	-76.41	-61.08	1.29	5.36	H
	3320	-57.84	-13	-44.84	-77.25	-61.35	1.55	7.21	H
									H
									H
									H
	1656	-63.04	-13	-50.04	-75.56	-64.77	0.98	4.86	V
	2488	-57.78	-13	-44.78	-75.49	-59.71	1.29	5.36	V
	3320	-57.77	-13	-44.77	-77.46	-61.28	1.55	7.21	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



### 5G NR n12

5G NR n12/ 15MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1400	-64.46	-13	-51.46	-74.72	-66.12	0.87	4.68	H
	2096	-60.81	-13	-47.81	-76.36	-61.68	1.16	4.19	H
	2792	-59.25	-13	-46.25	-77.03	-61.35	1.38	5.63	H
									H
									H
									H
	1400	-63.21	-13	-50.21	-73.97	-64.87	0.87	4.68	V
	2096	-56.82	-13	-43.82	-72.66	-57.69	1.16	4.19	V
	2792	-58.56	-13	-45.56	-77.00	-60.66	1.38	5.63	V
									V
									V
									V
Middle	1400	-62.16	-13	-49.16	-72.25	-63.82	0.87	4.68	H
	2104	-61.23	-13	-48.23	-76.68	-62.13	1.17	4.21	H
	2800	-59.42	-13	-46.42	-77.15	-61.53	1.38	5.64	H
									H
									H
									H
	1400	-62.98	-13	-49.98	-73.58	-64.64	0.87	4.68	V
	2104	-56.33	-13	-43.33	-72.12	-57.23	1.17	4.21	V
	2800	-58.34	-13	-45.34	-76.74	-60.45	1.38	5.64	V
									V
									V
									V



Highest	1400	-63.87	-13	-50.87	-74.20	-65.53	0.87	4.68	H
	2104	-59.79	-13	-46.79	-75.41	-60.69	1.17	4.21	H
	2808	-59.08	-13	-46.08	-76.69	-61.19	1.39	5.65	H
									H
									H
									H
	1400	-62.73	-13	-49.73	-73.41	-64.39	0.87	4.68	V
	2104	-55.71	-13	-42.71	-71.50	-56.61	1.17	4.21	V
	2808	-58.41	-13	-45.41	-76.84	-60.52	1.39	5.65	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n13

5G NR n13/ 5MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1552	-54.18	-13	-41.18	-65.21	-56.25	0.94	5.15	H
	2328	-58.45	-13	-45.45	-74.99	-59.95	1.24	4.88	H
	3112	-58.69	-13	-45.69	-77.10	-61.35	1.48	6.29	H
									H
									H
									H
	1552	-55.02	-13	-42.02	-66.57	-57.09	0.94	5.15	V
	2328	-57.76	-13	-44.76	-74.70	-59.26	1.24	4.88	V
	3112	-58.48	-13	-45.48	-77.65	-61.14	1.48	6.29	V
									V
									V
									V
Middle	1560	-53.82	-42.15	-11.67	-65.00	-55.86	0.94	5.13	H
	2336	-58.52	-13	-45.52	-75.15	-60.04	1.24	4.91	H
	3120	-59.09	-13	-46.09	-77.57	-61.78	1.49	6.33	H
									H
									H
									H
	1560	-55.31	-42.15	-13.16	-66.99	-57.35	0.94	5.13	V
	2336	-57.00	-13	-44.00	-74.04	-58.52	1.24	4.91	V
	3120	-58.15	-13	-45.15	-77.35	-60.84	1.49	6.33	V
									V
									V
									V





Highest	1568	-53.23	-42.15	-11.08	-64.40	-55.25	0.94	5.11	H
	2344	-58.83	-13	-45.83	-75.46	-60.37	1.24	4.93	H
	3128	-58.29	-13	-45.29	-77.28	-61.02	1.49	6.36	H
									H
									H
									H
	1568	-55.46	-42.15	-13.31	-67.13	-57.48	0.94	5.11	V
	2344	-56.98	-13	-43.98	-74.02	-58.52	1.24	4.93	V
	3128	-58.29	-13	-45.29	-77.48	-61.02	1.49	6.36	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n13/ 10MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	1552	-64.19	-13	-51.19	-75.22	-66.26	0.94	5.15	H
	2328	-59.17	-13	-46.17	-75.71	-60.67	1.24	4.88	H
	3112	-58.99	-13	-45.99	-77.40	-61.65	1.48	6.29	H
									H
									H
									H
	1552	-63.65	-13	-50.65	-75.20	-65.72	0.94	5.15	V
	2328	-58.36	-13	-45.36	-76.30	-59.86	1.24	4.88	V
	3112	-57.60	-13	-44.60	-76.77	-60.26	1.48	6.29	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n66**

5G NR n66/ 40MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3420	-57.32	-13	-44.32	-77.88	-63.39	1.58	7.65	H
	5130	-56.76	-13	-43.76	-80.88	-64.05	2.41	9.70	H
	6846	-53.25	-13	-40.25	-80.27	-61.23	2.64	10.62	H
									H
									H
									H
	3420	-57.11	-13	-44.11	-77.77	-63.18	1.58	7.65	V
	5130	-54.06	-13	-41.06	-78.14	-61.35	2.41	9.70	V
	6846	-50.79	-13	-37.79	-77.76	-58.77	2.64	10.62	V
									V
									V
									V
Middle	3450	-57.64	-13	-44.64	-78.33	-63.83	1.59	7.78	H
	5178	-56.49	-13	-43.49	-80.73	-63.75	2.44	9.70	H
	6906	-55.12	-13	-42.12	-81.98	-63.19	2.62	10.69	H
									H
									H
									H
	3450	-56.64	-13	-43.64	-77.36	-62.83	1.59	7.78	V
	5178	-55.85	-13	-42.85	-79.85	-63.11	2.44	9.70	V
	6906	-52.42	-13	-39.42	-79.27	-60.49	2.62	10.69	V
									V
									V
									V



Highest	3480	-56.71	-13	-43.71	-77.59	-63.02	1.60	7.91	H
	5220	-56.71	-13	-43.71	-80.84	-63.95	2.46	9.70	H
	6966	-53.88	-13	-40.88	-80.65	-62.04	2.60	10.76	H
									H
									H
									H
	3480	-57.02	-13	-44.02	-77.92	-63.33	1.60	7.91	V
	5220	-55.34	-13	-42.34	-79.46	-62.58	2.46	9.70	V
	6966	-51.18	-13	-38.18	-77.98	-59.34	2.60	10.76	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n70**

5G NR n70/ 10MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	3390	-57.36	-13	-44.36	-77.83	-63.31	1.57	7.52	H
	5085	-57.05	-13	-44.05	-81.1	-64.36	2.39	9.70	H
	6780	-54.25	-13	-41.25	-81.34	-62.12	2.66	10.54	H
	8478	-50.36	-13	-37.36	-79.41	-60.47	2.37	12.48	H
									H
									H
	3390	-57.45	-13	-44.45	-78.01	-63.4	1.57	7.52	V
	5085	-56.91	-13	-43.91	-80.79	-64.22	2.39	9.70	V
	6780	-54.74	-13	-41.74	-81.74	-62.61	2.66	10.54	V
	8478	-47.92	-13	-34.92	-77.3	-58.03	2.37	12.48	V
									V
									V
Middle	3396	-57.72	-13	-44.72	-78.19	-63.69	1.57	7.54	H
	5094	-56.85	-13	-43.85	-80.94	-64.16	2.39	9.70	H
	6792	-54.44	-13	-41.44	-81.57	-62.33	2.66	10.55	H
	8490	-51.85	-13	-38.85	-80.91	-61.97	2.37	12.49	H
									H
									H
	3396	-56.97	-13	-43.97	-77.53	-62.94	1.57	7.54	V
	5094	-57.02	-13	-44.02	-80.94	-64.33	2.39	9.70	V
	6792	-54.74	-13	-41.74	-81.79	-62.63	2.66	10.55	V
	8490	-48.05	-13	-35.05	-77.44	-58.17	2.37	12.49	V
									V
									V



Highest	3402	-56.99	-13	-43.99	-77.46	-62.99	1.57	7.57	H
	5100	-57.07	-13	-44.07	-81.15	-64.38	2.39	9.70	H
	6800	-54.41	-13	-41.41	-81.55	-62.31	2.66	10.56	H
	8502	-51.34	-13	-38.34	-80.4	-61.47	2.38	12.50	H
									H
									H
	3402	-56.72	-13	-43.72	-77.28	-62.72	1.57	7.57	V
	5100	-56.84	-13	-43.84	-80.75	-64.15	2.39	9.70	V
	6800	-54.80	-13	-41.80	-81.86	-62.7	2.66	10.56	V
	8502	-48.66	-13	-35.66	-78.05	-58.79	2.38	12.50	V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n70/ 15MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Middle	3390	-57.40	-13	-44.40	-77.87	-63.35	1.57	7.52	H
	5085	-56.04	-13	-43.04	-80.09	-63.35	2.39	9.70	H
	6780	-54.25	-13	-41.25	-81.34	-62.12	2.66	10.54	H
									H
									H
									H
	3390	-57.46	-13	-44.46	-78.02	-63.41	1.57	7.52	V
	5085	-56.11	-13	-43.11	-79.99	-63.42	2.39	9.70	V
	6780	-54.69	-13	-41.69	-81.69	-62.56	2.66	10.54	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n7**

5G NR n7/ 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5004	-56.56	-25	-31.56	-80.57	-63.92	2.34	9.70	H
	7500	-53.71	-25	-28.71	-80.87	-63.08	2.43	11.80	H
	10008	-49.81	-25	-24.81	-81.19	-59.32	2.70	12.20	H
									H
									H
									H
	5004	-55.10	-25	-30.10	-78.92	-62.46	2.34	9.70	V
	7500	-49.79	-25	-24.79	-77.19	-59.16	2.43	11.80	V
	10008	-50.19	-25	-25.19	-81.51	-59.7	2.70	12.20	V
									V
									V
									V
Middle	5052	-57.04	-25	-32.04	-81.05	-64.37	2.37	9.70	H
	7572	-53.99	-25	-28.99	-81.36	-63.43	2.41	11.84	H
	10098	-49.61	-25	-24.61	-81.27	-59.15	2.70	12.24	H
									H
									H
									H
	5052	-55.90	-25	-30.90	-79.73	-63.23	2.37	9.70	V
	7572	-53.47	-25	-28.47	-81.09	-62.91	2.41	11.84	V
	10098	-49.37	-25	-24.37	-80.95	-58.91	2.70	12.24	V
									V
									V
									V





Highest	5100	-56.41	-25	-31.41	-80.49	-63.72	2.39	9.70	H
	7650	-53.46	-25	-28.46	-80.99	-62.97	2.38	11.89	H
	10206	-49.19	-25	-24.19	-81.18	-58.78	2.70	12.28	H
									H
									H
									H
	5100	-55.48	-25	-30.48	-79.39	-62.79	2.39	9.70	V
	7650	-51.38	-25	-26.38	-79.18	-60.89	2.38	11.89	V
	10206	-49.36	-25	-24.36	-81.25	-58.95	2.70	12.28	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n38

5G NR n38/ 40MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-56.84	-25	-31.84	-81.01	-64.12	2.42	9.70	H
	7710	-53.53	-25	-28.53	-81.22	-63.09	2.36	11.93	H
	10278	-49.21	-25	-24.21	-81.42	-58.83	2.69	12.31	H
									H
									H
									H
	5142	-56.45	-25	-31.45	-80.49	-63.73	2.42	9.70	V
	7710	-53.49	-25	-28.49	-81.48	-63.05	2.36	11.93	V
	10278	-49.31	-25	-24.31	-81.3	-58.93	2.69	12.31	V
									V
									V
									V
Middle	5148	-56.44	-25	-31.44	-80.61	-63.72	2.42	9.70	H
	7728	-53.84	-25	-28.84	-81.58	-63.42	2.36	11.94	H
	10296	-49.25	-25	-24.25	-81.51	-58.87	2.69	12.32	H
									H
									H
									H
	5148	-56.94	-25	-31.94	-80.89	-64.22	2.42	9.70	V
	7728	-52.97	-25	-27.97	-80.95	-62.55	2.36	11.94	V
	10296	-49.24	-25	-24.24	-81.39	-58.86	2.69	12.32	V
									V
									V
									V



Highest	5160	-56.55	-25	-31.55	-80.74	-63.82	2.43	9.70	H
	7740	-53.73	-25	-28.73	-81.52	-63.32	2.35	11.94	H
	10314	-49.42	-25	-24.42	-81.75	-59.05	2.69	12.33	H
									H
									H
									H
	5160	-56.56	-25	-31.56	-80.55	-63.83	2.43	9.70	V
	7740	-53.08	-25	-28.08	-81.09	-62.67	2.35	11.94	V
	10314	-49.52	-25	-24.52	-81.74	-59.15	2.69	12.33	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n41 (HPUE)**

5G NR n41 (HPUE) / 100MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4992	-57.14	-25	-32.14	-81.15	-64.49	2.33	9.68	H
	7494	-53.65	-25	-28.65	-80.7	-63.01	2.43	11.79	H
	9990	-50.07	-25	-25.07	-81.52	-59.58	2.69	12.21	H
									H
									H
									H
	4992	-56.32	-25	-31.32	-80.22	-63.67	2.33	9.68	V
	7494	-50.12	-25	-25.12	-77.41	-59.48	2.43	11.79	V
	9990	-50.02	-25	-25.02	-81.32	-59.53	2.69	12.21	V
									V
									V
									V
Middle	5088	-56.72	-25	-31.72	-80.72	-64.03	2.39	9.70	H
	7632	-53.76	-25	-28.76	-81.28	-63.25	2.39	11.88	H
	10170	-49.25	-25	-24.25	-81.1	-58.82	2.70	12.27	H
									H
									H
									H
	5088	-55.55	-25	-30.55	-79.5	-62.86	2.39	9.70	V
	7632	-52.02	-25	-27.02	-79.86	-61.51	2.39	11.88	V
	10170	-49.11	-25	-24.11	-80.94	-58.68	2.70	12.27	V
									V
									V
									V



Highest	5184	-56.48	-25	-31.48	-80.63	-63.74	2.44	9.70	H
	7770	-53.76	-25	-28.76	-81.59	-63.38	2.34	11.96	H
	10368	-49.22	-25	-24.22	-81.65	-58.87	2.69	12.35	H
									H
									H
									H
	5184	-55.11	-25	-30.11	-79.11	-62.37	2.44	9.70	V
	7770	-53.22	-25	-28.22	-81.4	-62.84	2.34	11.96	V
	10368	-49.46	-25	-24.46	-81.76	-59.11	2.69	12.35	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n71**

5G NR n71/ 20MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	ERP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	1328	-58.53	-13	-45.53	-68.46	-59.78	0.84	4.23	H
	1992	-60.59	-13	-47.59	-75.44	-61.23	1.13	3.92	H
	2648	-56.25	-13	-43.25	-73.63	-58.28	1.34	5.52	H
									H
									H
									H
	1328	-60.68	-13	-47.68	-70.91	-61.93	0.84	4.23	V
	1992	-59.89	-13	-46.89	-75.12	-60.53	1.13	3.92	V
	2648	-57.64	-13	-44.64	-75.63	-59.67	1.34	5.52	V
									V
									V
									V
Middle	1344	-58.93	-13	-45.93	-68.91	-60.27	0.84	4.33	H
	2008	-59.72	-13	-46.72	-74.79	-60.36	1.14	3.92	H
	2680	-58.14	-13	-45.14	-75.56	-60.19	1.35	5.54	H
									H
									H
									H
	1344	-61.69	-13	-48.69	-72.05	-63.03	0.84	4.33	V
	2008	-59.33	-13	-46.33	-74.61	-59.97	1.14	3.92	V
	2680	-57.06	-13	-44.06	-75.11	-59.11	1.35	5.54	V
									V
									V
									V



Highest	1352	-58.09	-13	-45.09	-68.14	-59.48	0.85	4.38	H
	2032	-60.91	-13	-47.91	-76.08	-61.61	1.14	4.00	H
	2712	-57.21	-13	-44.21	-74.76	-59.27	1.36	5.57	H
									H
									H
									H
	1352	-62.09	-13	-49.09	-72.6	-63.48	0.85	4.38	V
	2032	-60.55	-13	-47.55	-76.07	-61.25	1.14	4.00	V
	2712	-57.52	-13	-44.52	-75.7	-59.58	1.36	5.57	V
									V
									V
									V

**Remark:** Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 1>

5G NR n38 (SRS Mode)

5G NR n38 (SRS Mode) / 40MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-56.58	-25	-31.58	-80.77	-63.86	2.42	9.70	H
	7710	-53.88	-25	-28.88	-81.57	-63.44	2.36	11.93	H
	10278	-49.39	-25	-24.39	-81.6	-59.01	2.69	12.31	H
									H
									H
									H
	5142	-53.28	-25	-28.28	-77.28	-60.56	2.42	9.70	V
	7710	-53.32	-25	-28.32	-81.23	-62.88	2.36	11.93	V
	10278	-49.64	-25	-24.64	-81.72	-59.26	2.69	12.31	V
									V
									V
									V
Middle	5154	-56.75	-25	-31.75	-80.84	-64.02	2.43	9.70	H
	7728	-54.28	-25	-29.28	-81.86	-63.86	2.36	11.94	H
	10296	-49.19	-25	-24.19	-81.55	-58.81	2.69	12.32	H
									H
									H
									H
	5154	-53.57	-25	-28.57	-77.47	-60.84	2.43	9.70	V
	7728	-53.51	-25	-28.51	-81.53	-63.09	2.36	11.94	V
	10296	-49.44	-25	-24.44	-81.61	-59.06	2.69	12.32	V
									V
									V
									V





Highest	5166	-57.12	-25	-32.12	-81.23	-64.39	2.43	9.70	H
	7740	-54.19	-25	-29.19	-82	-63.78	2.35	11.94	H
	10314	-49.72	-25	-24.72	-82.06	-59.35	2.69	12.33	H
									H
									H
									H
	5166	-55.28	-25	-30.28	-79.19	-62.55	2.43	9.70	V
	7740	-53.77	-25	-28.77	-81.75	-63.36	2.35	11.94	V
	10314	-49.52	-25	-24.52	-81.69	-59.15	2.69	12.33	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n41 (HPUE) (SRS Mode)**

5G NR n41 (HPUE) (SRS Mode) / 100MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4992	-57.43	-25	-32.43	-81.36	-64.78	2.33	9.68	H
	7488	-54.69	-25	-29.69	-81.79	-64.03	2.43	11.78	H
	9990	-50.31	-25	-25.31	-81.66	-59.82	2.69	12.21	H
									H
									H
									H
	4992	-57.73	-25	-32.73	-81.57	-65.08	2.33	9.68	V
	7488	-54.12	-25	-29.12	-81.5	-63.46	2.43	11.78	V
	9990	-50.51	-25	-25.51	-81.74	-60.02	2.69	12.21	V
									V
									V
									V
Middle	5088	-56.72	-25	-31.72	-80.77	-64.03	2.39	9.70	H
	7632	-54.33	-25	-29.33	-81.72	-63.82	2.39	11.88	H
	10170	-49.21	-25	-24.21	-80.98	-58.78	2.70	12.27	H
									H
									H
									H
	5088	-56.38	-25	-31.38	-80.13	-63.69	2.39	9.70	V
	7632	-53.73	-25	-28.73	-81.48	-63.22	2.39	11.88	V
	10170	-49.66	-25	-24.66	-81.45	-59.23	2.70	12.27	V
									V
									V
									V



Highest	5178	-56.99	-25	-31.99	-81.06	-64.25	2.44	9.70	H
	7770	-53.93	-25	-28.93	-81.76	-63.55	2.34	11.96	H
	10368	-49.23	-25	-24.23	-81.65	-58.88	2.69	12.35	H
									H
									H
									H
	5178	-56.85	-25	-31.85	-80.86	-64.11	2.44	9.70	V
	7770	-53.33	-25	-28.33	-81.41	-62.95	2.34	11.96	V
	10368	-49.71	-25	-24.71	-82.08	-59.36	2.69	12.35	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 2>

**5G NR n38 (SRS Mode)**

5G NR n38 (SRS Mode) / 40MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-56.65	-25	-31.65	-80.76	-63.93	2.42	9.70	H
	7710	-54.12	-25	-29.12	-81.77	-63.68	2.36	11.93	H
	10278	-49.43	-25	-24.43	-81.64	-59.05	2.69	12.31	H
									H
									H
									H
	5142	-55.83	-25	-30.83	-79.82	-63.11	2.42	9.70	V
	7710	-53.77	-25	-28.77	-81.71	-63.33	2.36	11.93	V
	10278	-49.53	-25	-24.53	-81.7	-59.15	2.69	12.31	V
									V
									V
									V
Middle	5154	-56.86	-25	-31.86	-80.95	-64.13	2.43	9.70	H
	7728	-54.01	-25	-29.01	-81.84	-63.59	2.36	11.94	H
	10296	-49.39	-25	-24.39	-81.66	-59.01	2.69	12.32	H
									H
									H
									H
	5154	-55.75	-25	-30.75	-79.66	-63.02	2.43	9.70	V
	7728	-53.74	-25	-28.74	-81.75	-63.32	2.36	11.94	V
	10296	-50.69	-25	-25.69	-81.91	-60.31	2.69	12.32	V
									V
									V
									V



Highest	5166	-56.87	-25	-31.87	-80.97	-64.14	2.43	9.70	H
	7740	-54.09	-25	-29.09	-81.74	-63.68	2.35	11.94	H
	10314	-49.53	-25	-24.53	-81.83	-59.16	2.69	12.33	H
									H
									H
									H
	5166	-55.46	-25	-30.46	-79.45	-62.73	2.43	9.70	V
	7740	-53.43	-25	-28.43	-81.45	-63.02	2.35	11.94	V
	10314	-49.42	-25	-24.42	-81.59	-59.05	2.69	12.33	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n41 (HPUE) (SRS Mode)**

5G NR n41(SRS Mode) / 100MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4992	-56.91	-25	-31.91	-80.83	-64.26	2.33	9.68	H
	7488	-54.83	-25	-29.83	-82.05	-64.17	2.43	11.78	H
	9990	-51.36	-25	-26.36	-82.63	-60.87	2.69	12.21	H
									H
									H
									H
	4992	-54.03	-25	-29.03	-77.85	-61.38	2.33	9.68	V
	7488	-54.77	-25	-29.77	-82.2	-64.11	2.43	11.78	V
	9990	-50.86	-25	-25.86	-82.26	-60.37	2.69	12.21	V
									V
									V
									V
Middle	5088	-56.81	-25	-31.81	-80.88	-64.12	2.39	9.70	H
	7632	-53.83	-25	-28.83	-81.33	-63.32	2.39	11.88	H
	10170	-51.01	-25	-26.01	-82.93	-60.58	2.70	12.27	H
									H
									H
									H
	5088	-56.55	-25	-31.55	-80.4	-63.86	2.39	9.70	V
	7632	-53.75	-25	-28.75	-81.64	-63.24	2.39	11.88	V
	10170	-50.82	-25	-25.82	-82.63	-60.39	2.70	12.27	V
									V
									V
									V



Highest	5178	-56.48	-25	-31.48	-80.58	-63.74	2.44	9.70	H
	7770	-53.96	-25	-28.96	-81.67	-63.58	2.34	11.96	H
	10368	-50.61	-25	-25.61	-83.01	-60.26	2.69	12.35	H
									H
									H
									H
	5178	-56.99	-25	-31.99	-80.99	-64.25	2.44	9.70	V
	7770	-53.93	-25	-28.93	-81.98	-63.55	2.34	11.96	V
	10368	-50.54	-25	-25.54	-82.82	-60.19	2.69	12.35	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



<Ant. 3>

**5G NR n38 (SRS Mode)**

5G NR n38 (SRS Mode) / 40MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-55.97	-25	-30.97	-80.02	-63.25	2.42	9.70	H
	7710	-53.33	-25	-28.33	-80.96	-62.89	2.36	11.93	H
	10278	-48.74	-25	-23.74	-80.94	-58.36	2.69	12.31	H
									H
									H
									H
	5142	-54.25	-25	-29.25	-78.17	-61.53	2.42	9.70	V
	7710	-52.99	-25	-27.99	-80.98	-62.55	2.36	11.93	V
	10278	-48.89	-25	-23.89	-80.9	-58.51	2.69	12.31	V
									V
									V
									V
Middle	5154	-56.21	-25	-31.21	-80.34	-63.48	2.43	9.70	H
	7728	-53.37	-25	-28.37	-81.1	-62.95	2.36	11.94	H
	10296	-49.19	-25	-24.19	-81.34	-58.81	2.69	12.32	H
									H
									H
									H
	5154	-54.08	-25	-29.08	-78.04	-61.35	2.43	9.70	V
	7728	-53.43	-25	-28.43	-81.44	-63.01	2.36	11.94	V
	10296	-49.32	-25	-24.32	-81.45	-58.94	2.69	12.32	V
									V
									V
									V





Highest	5166	-56.12	-25	-31.12	-80.19	-63.39	2.43	9.70	H
	7740	-53.74	-25	-28.74	-81.52	-63.33	2.35	11.94	H
	10314	-49.24	-25	-24.24	-81.55	-58.87	2.69	12.33	H
									H
									H
									H
	5166	-54.94	-25	-29.94	-78.89	-62.21	2.43	9.70	V
	7740	-53.42	-25	-28.42	-81.44	-63.01	2.35	11.94	V
	10314	-49.39	-25	-24.39	-81.48	-59.02	2.69	12.33	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n41 (HPUE) (SRS Mode)**

5G NR n41(SRS Mode) / 100MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4992	-56.41	-25	-31.41	-80.3	-63.76	2.33	9.68	H
	7494	-54.28	-25	-29.28	-81.51	-63.64	2.43	11.79	H
	9990	-51.27	-25	-26.27	-82.62	-60.78	2.69	12.21	H
									H
									H
									H
	4992	-54.66	-25	-29.66	-78.44	-62.01	2.33	9.68	V
	7494	-51.96	-25	-26.96	-79.35	-61.32	2.43	11.79	V
	9990	-51.52	-25	-26.52	-82.84	-61.03	2.69	12.21	V
									V
									V
									V
Middle	5088	-56.74	-25	-31.74	-80.79	-64.05	2.39	9.70	H
	7632	-53.56	-25	-28.56	-81.06	-63.05	2.39	11.88	H
	10170	-51.09	-25	-26.09	-82.87	-60.66	2.70	12.27	H
									H
									H
									H
	5088	-54.43	-25	-29.43	-78.22	-61.74	2.39	9.70	V
	7632	-52.74	-25	-27.74	-80.52	-62.23	2.39	11.88	V
	10170	-50.91	-25	-25.91	-82.74	-60.48	2.70	12.27	V
									V
									V
									V



Highest	5178	-56.89	-25	-31.89	-80.99	-64.15	2.44	9.70	H
	7770	-54.05	-25	-29.05	-81.89	-63.67	2.34	11.96	H
	10368	-50.41	-25	-25.41	-82.87	-60.06	2.69	12.35	H
									H
									H
									H
	5178	-57.07	-25	-32.07	-81.02	-64.33	2.44	9.70	V
	7770	-53.73	-25	-28.73	-81.86	-63.35	2.34	11.96	V
	10368	-50.68	-25	-25.68	-82.96	-60.33	2.69	12.35	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



MIMO <Ant. 0+1>

5G NR n38 (SRS Mode)

5G NR n38(SRS Mode) / 40MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-56.47	-25	-31.47	-80.63	-63.75	2.42	9.70	H
	7710	-53.88	-25	-28.88	-81.55	-63.44	2.36	11.93	H
	10278	-51.07	-25	-26.07	-83.24	-60.69	2.69	12.31	H
									H
									H
									H
	5142	-55.44	-25	-30.44	-79.44	-62.72	2.42	9.70	V
	7710	-53.96	-25	-28.96	-81.9	-63.52	2.36	11.93	V
	10278	-50.86	-25	-25.86	-82.99	-60.48	2.69	12.31	V
									V
									V
									V
Middle	5154	-56.32	-25	-31.32	-80.4	-63.59	2.43	9.70	H
	7728	-53.84	-25	-28.84	-81.54	-63.42	2.36	11.94	H
	10296	-50.67	-25	-25.67	-83.01	-60.29	2.69	12.32	H
									H
									H
									H
	5154	-55.02	-25	-30.02	-79.06	-62.29	2.43	9.70	V
	7728	-53.88	-25	-28.88	-81.83	-63.46	2.36	11.94	V
	10296	-50.66	-25	-25.66	-82.98	-60.28	2.69	12.32	V
									V
									V
									V



Highest	5166	-56.57	-25	-31.57	-80.72	-63.84	2.43	9.70	H
	7740	-54.28	-25	-29.28	-81.85	-63.87	2.35	11.94	H
	10314	-51.05	-25	-26.05	-83.33	-60.68	2.69	12.33	H
									H
									H
									H
	5166	-55.61	-25	-30.61	-79.53	-62.88	2.43	9.70	V
	7740	-54.15	-25	-29.15	-82.15	-63.74	2.35	11.94	V
	10314	-50.72	-25	-25.72	-82.96	-60.35	2.69	12.33	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n41 (HPUE) (SRS Mode)**

5G NR n41 (HPUE) (SRS Mode) / 100MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4992	-54.51	-25	-29.51	-78.4	-61.86	2.33	9.68	H
	7494	-54.89	-25	-29.89	-82.01	-64.25	2.43	11.79	H
	9990	-51.37	-25	-26.37	-82.72	-60.88	2.69	12.21	H
									H
									H
									H
	4992	-52.13	-25	-27.13	-75.96	-59.48	2.33	9.68	V
	7494	-50.41	-25	-25.41	-77.74	-59.77	2.43	11.79	V
	9990	-51.72	-25	-26.72	-82.81	-61.23	2.69	12.21	V
									V
									V
									V
Middle	5088	-55.34	-25	-30.34	-79.19	-62.65	2.39	9.70	H
	7632	-54.26	-25	-29.26	-81.7	-63.75	2.39	11.88	H
	10170	-50.92	-25	-25.92	-82.79	-60.49	2.70	12.27	H
									H
									H
									H
	5088	-52.47	-25	-27.47	-76.3	-59.78	2.39	9.70	V
	7632	-53.19	-25	-28.19	-80.87	-62.68	2.39	11.88	V
	10170	-50.98	-25	-25.98	-82.69	-60.55	2.70	12.27	V
									V
									V
									V



Highest	5184	-56.77	-25	-31.77	-80.83	-64.03	2.44	9.70	H
	7770	-53.92	-25	-28.92	-81.74	-63.54	2.34	11.96	H
	10368	-50.64	-25	-25.64	-83.05	-60.29	2.69	12.35	H
									H
									H
									H
	5184	-53.73	-25	-28.73	-77.71	-60.99	2.44	9.70	V
	7770	-53.92	-25	-28.92	-81.96	-63.54	2.34	11.96	V
	10368	-50.18	-25	-25.18	-82.48	-59.83	2.69	12.35	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



MIMO <Ant. 0+2>

5G NR n38 (SRS Mode)

5G NR n38 (SRS Mode) / 40MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-57.29	-25	-32.29	-81.41	-64.57	2.42	9.70	H
	7710	-54.02	-25	-29.02	-81.72	-63.58	2.36	11.93	H
	10278	-49.06	-25	-24.06	-81.27	-58.68	2.69	12.31	H
									H
									H
									H
	5142	-56.69	-25	-31.69	-80.66	-63.97	2.42	9.70	V
	7710	-53.47	-25	-28.47	-81.46	-63.03	2.36	11.93	V
	10278	-49.75	-25	-24.75	-81.83	-59.37	2.69	12.31	V
									V
									V
									V
Middle	5148	-56.90	-25	-31.90	-81.02	-64.18	2.42	9.70	H
	7728	-53.91	-25	-28.91	-81.64	-63.49	2.36	11.94	H
	10296	-49.59	-25	-24.59	-81.86	-59.21	2.69	12.32	H
									H
									H
									H
	5148	-57.15	-25	-32.15	-81.12	-64.43	2.42	9.70	V
	7728	-53.61	-25	-28.61	-81.63	-63.19	2.36	11.94	V
	10296	-49.68	-25	-24.68	-81.83	-59.3	2.69	12.32	V
									V
									V
									V





Highest	5160	-55.84	-25	-30.84	-80.98	-63.11	2.43	9.70	H
	7740	-54.50	-25	-29.50	-82.23	-64.09	2.35	11.94	H
	10314	-49.78	-25	-24.78	-82.07	-59.41	2.69	12.33	H
									H
									H
									H
	5160	-57.25	-25	-32.25	-81.24	-64.52	2.43	9.70	V
	7740	-53.94	-25	-28.94	-81.96	-63.53	2.35	11.94	V
	10314	-49.79	-25	-24.79	-81.96	-59.42	2.69	12.33	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



5G NR n41 (HPUE) (SRS Mode)

5G NR n41 (HPUE) (SRS Mode) / 100MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4998	-57.41	-25	-32.41	-81.32	-64.77	2.34	9.70	H
	7488	-54.61	-25	-29.61	-81.69	-63.95	2.43	11.78	H
	9990	-50.51	-25	-25.51	-81.76	-60.02	2.69	12.21	H
									H
									H
									H
	4998	-55.13	-25	-30.13	-78.94	-62.49	2.34	9.70	V
	7488	-54.32	-25	-29.32	-81.67	-63.66	2.43	11.78	V
	9990	-49.91	-25	-24.91	-81.28	-59.42	2.69	12.21	V
									V
									V
									V
Middle	5088	-57.38	-25	-32.38	-81.26	-64.69	2.39	9.70	H
	7632	-54.02	-25	-29.02	-81.57	-63.51	2.39	11.88	H
	10170	-49.58	-25	-24.58	-81.39	-59.15	2.70	12.27	H
									H
									H
									H
	5088	-55.31	-25	-30.31	-79.26	-62.62	2.39	9.70	V
	7632	-53.82	-25	-28.82	-81.63	-63.31	2.39	11.88	V
	10170	-49.48	-25	-24.48	-81.28	-59.05	2.70	12.27	V
									V
									V
									V



Highest	5184	-57.12	-25	-32.12	-81.19	-64.38	2.44	9.70	H
	7770	-54.31	-25	-29.31	-82.12	-63.93	2.34	11.96	H
	10368	-49.58	-25	-24.58	-82.13	-59.23	2.69	12.35	H
									H
									H
									H
	5184	-54.76	-25	-29.76	-78.69	-62.02	2.44	9.70	V
	7770	-53.76	-25	-28.76	-81.85	-63.38	2.34	11.96	V
	10368	-49.72	-25	-24.72	-82.02	-59.37	2.69	12.35	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



MIMO <Ant. 0+3>

**5G NR n38 (SRS Mode)**

5G NR n38(SRS Mode) / 40MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-56.17	-25	-31.17	-80.26	-63.45	2.42	9.70	H
	7710	-54.12	-25	-29.12	-81.76	-63.68	2.36	11.93	H
	10278	-50.87	-25	-25.87	-83.17	-60.49	2.69	12.31	H
									H
									H
									H
	5142	-54.87	-25	-29.87	-78.82	-62.15	2.42	9.70	V
	7710	-53.96	-25	-28.96	-81.96	-63.52	2.36	11.93	V
	10278	-50.82	-25	-25.82	-82.94	-60.44	2.69	12.31	V
									V
									V
									V
Middle	5154	-56.42	-25	-31.42	-80.66	-63.69	2.43	9.70	H
	7728	-54.09	-25	-29.09	-81.85	-63.67	2.36	11.94	H
	10296	-50.83	-25	-25.83	-83.1	-60.45	2.69	12.32	H
									H
									H
									H
	5154	-54.94	-25	-29.94	-78.89	-62.21	2.43	9.70	V
	7728	-53.83	-25	-28.83	-81.9	-63.41	2.36	11.94	V
	10296	-50.81	-25	-25.81	-83.13	-60.43	2.69	12.32	V
									V
									V
									V



Highest	5160	-56.51	-25	-31.51	-80.73	-63.78	2.43	9.70	H
	7740	-54.18	-25	-29.18	-81.84	-63.77	2.35	11.94	H
	10314	-50.84	-25	-25.84	-83.2	-60.47	2.69	12.33	H
									H
									H
									H
	5160	-55.76	-25	-30.76	-79.75	-63.03	2.43	9.70	V
	7740	-53.99	-25	-28.99	-81.95	-63.58	2.35	11.94	V
	10314	-50.85	-25	-25.85	-83.03	-60.48	2.69	12.33	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n41 (HPUE) (SRS Mode)**

5G NR n41 (HPUE) (SRS Mode) / 100MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4998	-57.51	-25	-32.51	-81.56	-64.87	2.34	9.70	H
	7488	-54.88	-25	-29.88	-82.04	-64.22	2.43	11.78	H
	9990	-50.64	-25	-25.64	-81.97	-60.15	2.69	12.21	H
									H
									H
									H
	4998	-53.02	-25	-28.02	-76.81	-60.38	2.34	9.70	V
	7488	-54.32	-25	-29.32	-81.64	-63.66	2.43	11.78	V
	9990	-50.85	-25	-25.85	-82.19	-60.36	2.69	12.21	V
									V
									V
									V
Middle	5088	-56.38	-25	-31.38	-80.37	-63.69	2.39	9.70	H
	7632	-53.02	-25	-28.02	-80.51	-62.51	2.39	11.88	H
	10170	-49.26	-25	-24.26	-81.17	-58.83	2.70	12.27	H
									H
									H
									H
	5088	-55.81	-25	-30.81	-79.7	-63.12	2.39	9.70	V
	7632	-52.07	-25	-27.07	-79.89	-61.56	2.39	11.88	V
	10170	-49.27	-25	-24.27	-81.16	-58.84	2.70	12.27	V
									V
									V
									V



Highest	5184	-56.48	-25	-31.48	-80.61	-63.74	2.44	9.70	H
	7770	-54.39	-25	-29.39	-82.18	-64.01	2.34	11.96	H
	10368	-49.51	-25	-24.51	-82.05	-59.16	2.69	12.35	H
									H
									H
									H
	5184	-51.48	-25	-26.48	-75.53	-58.74	2.44	9.70	V
	7770	-54.33	-25	-29.33	-82.34	-63.95	2.34	11.96	V
	10368	-50.18	-25	-25.18	-82.4	-59.83	2.69	12.35	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



MIMO <Ant. 1+3>

**5G NR n38 (SRS Mode)**

5G NR n38(SRS Mode) / 40MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-56.45	-25	-31.45	-80.63	-63.73	2.42	9.70	H
	7710	-54.13	-25	-29.13	-81.86	-63.69	2.36	11.93	H
	10278	-50.73	-25	-25.73	-82.84	-60.35	2.69	12.31	H
									H
									H
									H
	5142	-55.44	-25	-30.44	-79.41	-62.72	2.42	9.70	V
	7710	-53.97	-25	-28.97	-81.91	-63.53	2.36	11.93	V
	10278	-51.05	-25	-26.05	-83.1	-60.67	2.69	12.31	V
									V
									V
									V
Middle	5154	-56.58	-25	-31.58	-80.62	-63.85	2.43	9.70	H
	7728	-54.19	-25	-29.19	-81.87	-63.77	2.36	11.94	H
	10296	-50.84	-25	-25.84	-83.05	-60.46	2.69	12.32	H
									H
									H
									H
	5154	-55.11	-25	-30.11	-79.04	-62.38	2.43	9.70	V
	7728	-53.97	-25	-28.97	-81.97	-63.55	2.36	11.94	V
	10296	-50.94	-25	-25.94	-82.95	-60.56	2.69	12.32	V
									V
									V
									V





Highest	5160	-56.32	-25	-31.32	-80.61	-63.59	2.43	9.70	H
	7740	-54.23	-25	-29.23	-81.98	-63.82	2.35	11.94	H
	10314	-50.84	-25	-25.84	-83.03	-60.47	2.69	12.33	H
									H
									H
									H
	5160	-55.24	-25	-30.24	-79.24	-62.51	2.43	9.70	V
	7740	-53.93	-25	-28.93	-81.92	-63.52	2.35	11.94	V
	10314	-51.25	-25	-26.25	-83.38	-60.88	2.69	12.33	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n41 (HPUE) (SRS Mode)**

5G NR n41 (HPUE) (SRS Mode) / 100MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4992	-54.33	-25	-29.33	-78.23	-61.68	2.33	9.68	H
	7488	-54.99	-25	-29.99	-82.14	-64.33	2.43	11.78	H
	9990	-51.01	-25	-26.01	-82.44	-60.52	2.69	12.21	H
									H
									H
									H
	4992	-54.34	-25	-29.34	-78.03	-61.69	2.33	9.68	V
	7488	-54.67	-25	-29.67	-82.06	-64.01	2.43	11.78	V
	9990	-50.93	-25	-25.93	-82.18	-60.44	2.69	12.21	V
									V
									V
									V
Middle	5088	-55.71	-25	-30.71	-79.76	-63.02	2.39	9.70	H
	7632	-54.02	-25	-29.02	-81.51	-63.51	2.39	11.88	H
	10170	-51.44	-25	-26.44	-83.3	-61.01	2.70	12.27	H
									H
									H
									H
	5088	-48.91	-25	-23.91	-72.8	-56.22	2.39	9.70	V
	7632	-53.62	-25	-28.62	-81.42	-63.11	2.39	11.88	V
	10170	-51.25	-25	-26.25	-83.07	-60.82	2.70	12.27	V
									V
									V
									V



Highest	5184	-55.83	-25	-30.83	-79.95	-63.09	2.44	9.70	H
	7770	-54.03	-25	-29.03	-81.81	-63.65	2.34	11.96	H
	10368	-50.21	-25	-25.21	-82.69	-59.86	2.69	12.35	H
									H
									H
									H
	5184	-50.99	-25	-25.99	-74.95	-58.25	2.44	9.70	V
	7770	-53.76	-25	-28.76	-81.77	-63.38	2.34	11.96	V
	10368	-50.38	-25	-25.38	-82.65	-60.03	2.69	12.35	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



MIMO <Ant. 2+1>

**5G NR n38 (SRS Mode)**

5G NR n38(SRS Mode) / 40MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-56.83	-25	-31.83	-80.93	-64.11	2.42	9.70	H
	7710	-53.97	-25	-28.97	-81.61	-63.53	2.36	11.93	H
	10278	-49.39	-25	-24.39	-81.6	-59.01	2.69	12.31	H
									H
									H
									H
	5142	-52.78	-25	-27.78	-76.75	-60.06	2.42	9.70	V
	7710	-53.67	-25	-28.67	-81.6	-63.23	2.36	11.93	V
	10278	-49.41	-25	-24.41	-81.47	-59.03	2.69	12.31	V
									V
									V
									V
Middle	5154	-57.11	-25	-32.11	-81.15	-64.38	2.43	9.70	H
	7728	-54.09	-25	-29.09	-81.86	-63.67	2.36	11.94	H
	10296	-49.25	-25	-24.25	-81.45	-58.87	2.69	12.32	H
									H
									H
									H
	5154	-55.26	-25	-30.26	-79.3	-62.53	2.43	9.70	V
	7728	-53.91	-25	-28.91	-81.92	-63.49	2.36	11.94	V
	10296	-49.52	-25	-24.52	-81.61	-59.14	2.69	12.32	V
									V
									V
									V



Highest	5164	-56.46	-25	-31.46	-80.55	-63.73	2.43	9.70	H
	7740	-53.66	-25	-28.66	-81.4	-63.25	2.35	11.94	H
	10314	-49.72	-25	-24.72	-81.97	-59.35	2.69	12.33	H
									H
									H
									H
	5164	-54.61	-25	-29.61	-78.64	-61.88	2.43	9.70	V
	7740	-53.23	-25	-28.23	-81.29	-62.82	2.35	11.94	V
	10314	-49.89	-25	-24.89	-81.98	-59.52	2.69	12.33	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n41 (HPUE) (SRS Mode)**

5G NR n41 (HPUE) (SRS Mode) / 100MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4992	-56.34	-25	-31.34	-80.32	-63.69	2.33	9.68	H
	7488	-54.97	-25	-29.97	-82.11	-64.31	2.43	11.78	H
	9990	-51.31	-25	-26.31	-82.66	-60.82	2.69	12.21	H
									H
									H
									H
	4992	-54.32	-25	-29.32	-78.08	-61.67	2.33	9.68	V
	7488	-54.81	-25	-29.81	-82.22	-64.15	2.43	11.78	V
	9990	-51.12	-25	-26.12	-82.49	-60.63	2.69	12.21	V
									V
									V
									V
Middle	5088	-56.42	-25	-31.42	-80.49	-63.73	2.39	9.70	H
	7632	-54.33	-25	-29.33	-81.88	-63.82	2.39	11.88	H
	10170	-51.02	-25	-26.02	-82.93	-60.59	2.70	12.27	H
									H
									H
									H
	5088	-54.52	-25	-29.52	-78.37	-61.83	2.39	9.70	V
	7632	-53.74	-25	-28.74	-81.49	-63.23	2.39	11.88	V
	10170	-51.02	-25	-26.02	-82.92	-60.59	2.70	12.27	V
									V
									V
									V



Highest	5184	-54.57	-25	-29.57	-78.74	-61.83	2.44	9.70	H
	7770	-54.13	-25	-29.13	-81.91	-63.75	2.34	11.96	H
	10368	-50.54	-25	-25.54	-82.98	-60.19	2.69	12.35	H
									H
									H
									H
	5184	-53.85	-25	-28.85	-77.82	-61.11	2.44	9.70	V
	7770	-53.73	-25	-28.73	-81.79	-63.35	2.34	11.96	V
	10368	-50.79	-25	-25.79	-83.09	-60.44	2.69	12.35	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



MIMO <Ant. 2+3>

**5G NR n38 (SRS Mode)**

5G NR n38(SRS Mode) / 40MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	5142	-55.95	-25	-30.95	-80.02	-63.23	2.42	9.70	H
	7710	-54.13	-25	-29.13	-81.82	-63.69	2.36	11.93	H
	10278	-49.43	-25	-24.43	-81.7	-59.05	2.69	12.31	H
									H
									H
									H
	5142	-52.74	-25	-27.74	-76.71	-60.02	2.42	9.70	V
	7710	-53.79	-25	-28.79	-81.74	-63.35	2.36	11.93	V
	10278	-49.73	-25	-24.73	-81.77	-59.35	2.69	12.31	V
									V
									V
									V
Middle	5154	-56.98	-25	-31.98	-81.02	-64.25	2.43	9.70	H
	7728	-53.86	-25	-28.86	-81.61	-63.44	2.36	11.94	H
	10296	-49.54	-25	-24.54	-81.8	-59.16	2.69	12.32	H
									H
									H
									H
	5154	-53.46	-25	-28.46	-77.51	-60.73	2.43	9.70	V
	7728	-53.48	-25	-28.48	-81.52	-63.06	2.36	11.94	V
	10296	-49.61	-25	-24.61	-81.76	-59.23	2.69	12.32	V
									V
									V
									V





Highest	5166	-57.12	-25	-32.12	-81.22	-64.39	2.43	9.70	H
	7740	-54.09	-25	-29.09	-81.87	-63.68	2.35	11.94	H
	10314	-49.74	-25	-24.74	-81.99	-59.37	2.69	12.33	H
									H
									H
									H
	5166	-54.75	-25	-29.75	-78.73	-62.02	2.43	9.70	V
	7740	-53.73	-25	-28.73	-81.81	-63.32	2.35	11.94	V
	10314	-49.58	-25	-24.58	-81.82	-59.21	2.69	12.33	V
									V
									V
									V

Remark: Spurious emissions within 30-1000MHz were found more than 20dB below limit line.



**5G NR n41 (HPUE) (SRS Mode)**

5G NR n41 (HPUE) (SRS Mode) / 100MHz / PI/2 BPSK									
Channel	Frequency ( MHz )	EIRP ( dBm )	Limit ( dBm )	Margin ( dB )	SPA Reading (dBm)	S.G. Power ( dBm )	TX Cable loss ( dB )	TX Antenna Gain (dBi)	Polarization (H/V)
Lowest	4992	-57.33	-25	-32.33	-81.19	-64.68	2.33	9.68	H
	7488	-54.29	-25	-29.29	-81.53	-63.63	2.43	11.78	H
	9990	-50.16	-25	-25.16	-81.73	-59.67	2.69	12.21	H
									H
									H
									H
	4992	-54.32	-25	-29.32	-78.02	-61.67	2.33	9.68	V
	7488	-50.99	-25	-25.99	-78.38	-60.33	2.43	11.78	V
	9990	-50.52	-25	-25.52	-81.76	-60.03	2.69	12.21	V
									V
									V
									V
Middle	5088	-56.41	-25	-31.41	-80.34	-63.72	2.39	9.70	H
	7632	-53.46	-25	-28.46	-80.96	-62.95	2.39	11.88	H
	10170	-49.29	-25	-24.29	-81.2	-58.86	2.70	12.27	H
									H
									H
									H
	5088	-54.04	-25	-29.04	-77.93	-61.35	2.39	9.70	V
	7632	-53.53	-25	-28.53	-81.21	-63.02	2.39	11.88	V
	10170	-49.64	-25	-24.64	-81.42	-59.21	2.70	12.27	V
									V
									V
									V