

TEST REPORT

Product : Coolbox
Trade mark : Coolbox
Model/Type reference : CB100 Blue, CB200 White, CB300 Green
Serial Number : N/A
Report Number : EED32K00221601
FCC ID : 2AQ7ECB100-GWB01
Date of Issue : Sep. 10, 2018
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

Texas Coolbox Hardgoods, LLC
12310 Old Oaks Drive, Houston, Texas,
United States 77024

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Tested By:

Tom chen
Tom chen (Test Project)

Compiled by:

Kevin lan
Kevin lan (Project Engineer)

Reviewed by:

Kevin Yang
Kevin yang (Reviewer)

Approved by:

Sheek Luo
Sheek Luo (Lab supervisor)

Date:

Sep. 10, 2018

Report Seal

Check No.: 3096323601



2 Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | Sep. 10, 2018 | Original |
| | | |
| | | |

3 Test Summary

| Test Item | Test Requirement | Test method | Result |
|--|--|------------------|--------|
| Antenna Requirement | 47 CFR Part 15 Subpart C Section 15.203/15.247 (c) | ANSI C63.10-2013 | PASS |
| AC Power Line Conducted Emission | 47 CFR Part 15 Subpart C Section 15.207 | ANSI C63.10-2013 | PASS |
| Conducted Peak Output Power | 47 CFR Part 15 Subpart C Section 15.247 (b)(1) | ANSI C63.10-2013 | PASS |
| 20dB Occupied Bandwidth | 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 | PASS |
| Carrier Frequencies Separation | 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 | PASS |
| Hopping Channel Number | 47 CFR Part 15 Subpart C Section 15.247 (b) | ANSI C63.10-2013 | PASS |
| Dwell Time | 47 CFR Part 15 Subpart C Section 15.247 (a)(1) | ANSI C63.10-2013 | PASS |
| Pseudorandom Frequency Hopping Sequence | 47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002) | ANSI C63.10-2013 | PASS |
| RF Conducted Spurious Emissions | 47 CFR Part 15 Subpart C Section 15.247(d) | ANSI C63.10-2013 | PASS |
| Radiated Spurious emissions | 47 CFR Part 15 Subpart C Section 15.205/15.209 | ANSI C63.10-2013 | PASS |

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.

Model No.: CB100 Blue, CB200 White, CB300 Green

Only the model CB100 Blue was tested, since the electrical circuit design, layout, components used and internal wiring were identical for the above models, with difference being the outer decoration.


4 Content

| | |
|--|-----------|
| 1 COVER PAGE | 1 |
| 2 VERSION | 2 |
| 3 TEST SUMMARY | 3 |
| 4 CONTENT | 4 |
| 5 TEST REQUIREMENT | 5 |
| 5.1 TEST SETUP..... | 5 |
| 5.1.1 For Conducted test setup..... | 5 |
| 5.1.2 For Radiated Emissions test setup..... | 5 |
| 5.1.3 For Conducted Emissions test setup..... | 6 |
| 5.2 TEST ENVIRONMENT..... | 6 |
| 5.3 TEST CONDITION..... | 6 |
| 6 GENERAL INFORMATION | 7 |
| 6.1 CLIENT INFORMATION..... | 7 |
| 6.2 GENERAL DESCRIPTION OF EUT..... | 7 |
| 6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD..... | 7 |
| 6.4 DESCRIPTION OF SUPPORT UNITS..... | 8 |
| 6.5 TEST LOCATION..... | 8 |
| 6.6 DEVIATION FROM STANDARDS..... | 8 |
| 6.7 ABNORMALITIES FROM STANDARD CONDITIONS..... | 8 |
| 6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER..... | 8 |
| 6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2)..... | 9 |
| 7 EQUIPMENT LIST | 10 |
| 8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION | 12 |
| Appendix A): 20dB Occupied Bandwidth..... | 13 |
| Appendix B): Carrier Frequency Separation..... | 17 |
| Appendix C): Dwell Time..... | 21 |
| Appendix D): Hopping Channel Number..... | 25 |
| Appendix E): Conducted Peak Output Power..... | 27 |
| Appendix F): Band-edge for RF Conducted Emissions..... | 31 |
| Appendix G): RF Conducted Spurious Emissions..... | 36 |
| Appendix H): Pseudorandom Frequency Hopping Sequence..... | 45 |
| Appendix I): Antenna Requirement..... | 46 |
| Appendix J): AC Power Line Conducted Emission..... | 47 |
| Appendix K): Restricted bands around fundamental frequency (Radiated)..... | 50 |
| Appendix L): Radiated Spurious Emissions..... | 58 |
| PHOTOGRAPHS OF TEST SETUP | 65 |
| PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS | 67 |

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

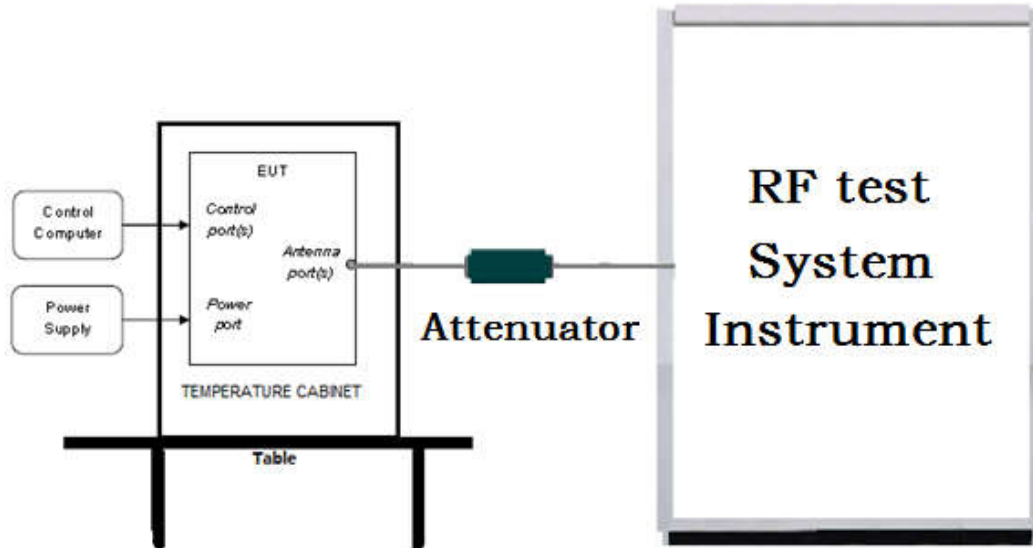

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

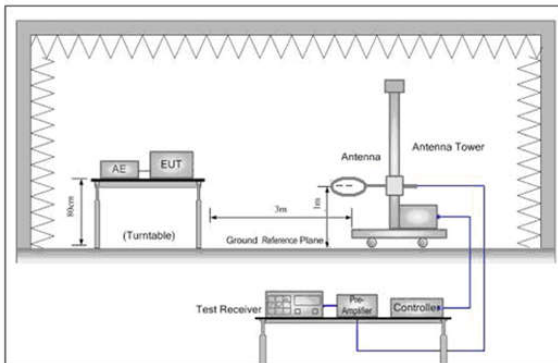


Figure 1. Below 30MHz

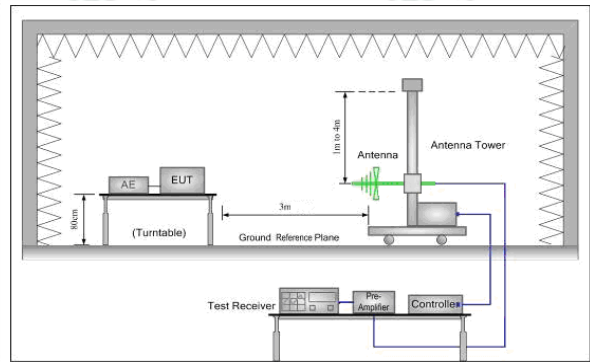


Figure 2. 30MHz to 1GHz


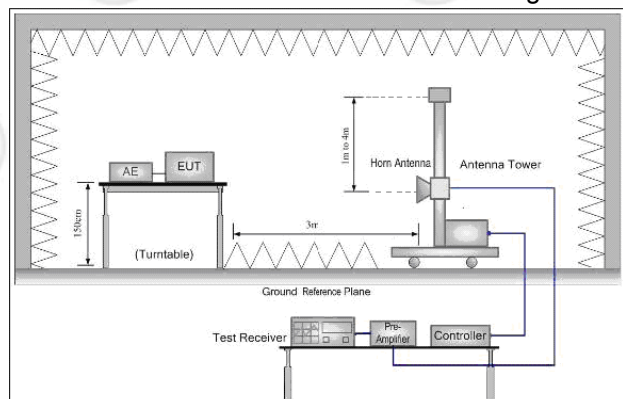


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

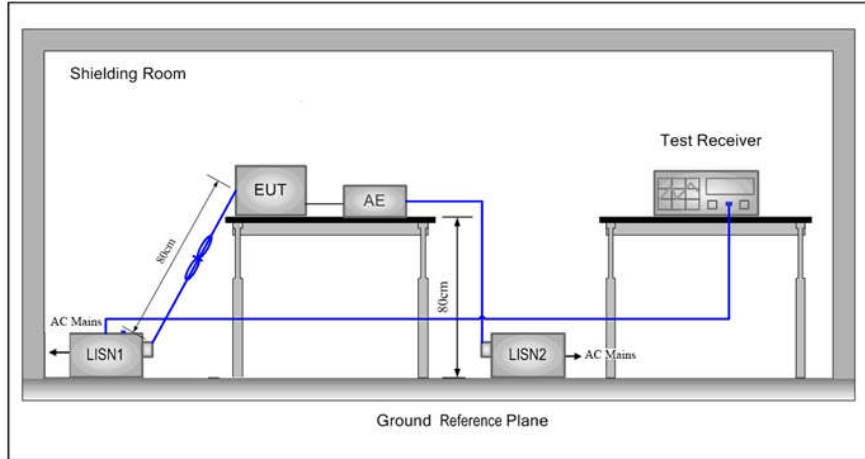

5.2 Test Environment

Operating Environment:

| | |
|-----------------------|----------|
| Temperature: | 23°C |
| Humidity: | 62% RH |
| Atmospheric Pressure: | 1010mbar |

5.3 Test Condition

| Test Mode | Tx | RF Channel | | |
|---|------------------|------------|------------|-----------|
| | | Low(L) | Middle(M) | High(H) |
| GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3, DH5) | 2402MHz ~2480MHz | Channel 1 | Channel 40 | Channel79 |
| | | 2402MHz | 2441MHz | 2480MHz |

TX mode: The EUT transmitted the continuous modulation test signal at the specific channel(s).

Test mode:

Pre-scan under all rate at Lowest channel 1

| Mode | GFSK | | |
|------------|-------|-------|-------|
| packets | 1-DH1 | 1-DH3 | 1-DH5 |
| Power(dBm) | 4.347 | 4.510 | 4.515 |

| Mode | π /4DQPSK | | |
|------------|---------------|-------|-------|
| packets | 2-DH1 | 2-DH3 | 2-DH5 |
| Power(dBm) | 2.221 | 2.257 | 2.277 |

| Mode | 8DPSK | | |
|------------|-------|-------|-------|
| packets | 3-DH1 | 3-DH3 | 3-DH5 |
| Power(dBm) | 2.408 | 2.467 | 2.574 |

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of π /4DQPSK, 3-DH5 packet the power is the worst case of 8DPSK.

6 General Information

6.1 Client Information

| | |
|--------------------------|---|
| Applicant: | Texas Coolbox Hardgoods, LLC |
| Address of Applicant: | 12310 Old Oaks Drive, Houston, Texas, United States 77024 |
| Manufacturer: | ZHONGSHAN XINZHIYUAN ELECTRIC&ELECTRONICS CO., LTD |
| Address of Manufacturer: | 5/F Building A & B, No.389 Dongfu Road, Heping Industrial Zone Dongfeng Town, ZhongshsnCity, 528425 |
| Factory: | ZHONGSHAN XINZHIYUAN ELECTRIC&ELECTRONICS CO., LTD |
| Address of Factory: | 5/F Building A & B, No.389 Dongfu Road, Heping Industrial Zone Dongfeng Town, ZhongshsnCity, 528425 |

6.2 General Description of EUT

| | | |
|----------------------------------|--------------------------------------|---|
| Product Name: | Coolbox | |
| Model No.: | CB100 Blue, CB200 White, CB300 Green | |
| Test Model No.: | CB100 Blue | |
| Trade mark: | Coolbox | |
| EUT Supports Radios application: | BT 4.0 Signal mode, 2402-2480MHz | |
| Power Supply: | AC adapter | MODEL No.:K48V135300U INPUT:100-240V~50/60Hz 1.2A OUTPUT:13.5V 3.0A |
| | Battery | 2500mAh 11.1V |
| Sample Received Date: | Aug. 15, 2018 | |
| Sample tested Date: | Aug. 15, 2018 to Sep. 10, 2018 | |

6.3 Product Specification subjective to this standard

| | | | | | | | |
|-------------------------------------|--|---------|-----------|---------|-----------|---------|-----------|
| Operation Frequency: | 2402MHz~2480MHz | | | | | | |
| Bluetooth Version: | 4.0 | | | | | | |
| Modulation Technique: | Frequency Hopping Spread Spectrum(FHSS) | | | | | | |
| Modulation Type: | GFSK, $\pi/4$ DQPSK, 8DPSK | | | | | | |
| Number of Channel: | 79 | | | | | | |
| Hopping Channel Type: | Adaptive Frequency Hopping systems | | | | | | |
| Hardware Version: | v1.0(manufacturer declare) | | | | | | |
| Firmware Version: | V1.0(manufacturer declare) | | | | | | |
| Test Power Grade: | Power (Ext,Int) 50(manufacturer declare) | | | | | | |
| Test Software of EUT: | CSR BlueSuite 2.6.4 (manufacturer declare) | | | | | | |
| Antenna Type: | PCB Antenna | | | | | | |
| Antenna Gain: | 0dBi | | | | | | |
| Test Voltage: | AC 120V, 60Hz | | | | | | |
| Operation Frequency each of channel | | | | | | | |
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1 | 2402MHz | 21 | 2422MHz | 41 | 2442MHz | 61 | 2462MHz |
| 2 | 2403MHz | 22 | 2423MHz | 42 | 2443MHz | 62 | 2463MHz |
| 3 | 2404MHz | 23 | 2424MHz | 43 | 2444MHz | 63 | 2464MHz |

| | | | | | | | |
|----|---------|----|---------|----|---------|----|---------|
| 4 | 2405MHz | 24 | 2425MHz | 44 | 2445MHz | 64 | 2465MHz |
| 5 | 2406MHz | 25 | 2426MHz | 45 | 2446MHz | 65 | 2466MHz |
| 6 | 2407MHz | 26 | 2427MHz | 46 | 2447MHz | 66 | 2467MHz |
| 7 | 2408MHz | 27 | 2428MHz | 47 | 2448MHz | 67 | 2468MHz |
| 8 | 2409MHz | 28 | 2429MHz | 48 | 2449MHz | 68 | 2469MHz |
| 9 | 2410MHz | 29 | 2430MHz | 49 | 2450MHz | 69 | 2470MHz |
| 10 | 2411MHz | 30 | 2431MHz | 50 | 2451MHz | 70 | 2471MHz |
| 11 | 2412MHz | 31 | 2432MHz | 51 | 2452MHz | 71 | 2472MHz |
| 12 | 2413MHz | 32 | 2433MHz | 52 | 2453MHz | 72 | 2473MHz |
| 13 | 2414MHz | 33 | 2434MHz | 53 | 2454MHz | 73 | 2474MHz |
| 14 | 2415MHz | 34 | 2435MHz | 54 | 2455MHz | 74 | 2475MHz |
| 15 | 2416MHz | 35 | 2436MHz | 55 | 2456MHz | 75 | 2476MHz |
| 16 | 2417MHz | 36 | 2437MHz | 56 | 2457MHz | 76 | 2477MHz |
| 17 | 2418MHz | 37 | 2438MHz | 57 | 2458MHz | 77 | 2478MHz |
| 18 | 2419MHz | 38 | 2439MHz | 58 | 2459MHz | 78 | 2479MHz |
| 19 | 2420MHz | 39 | 2440MHz | 59 | 2460MHz | 79 | 2480MHz |
| 20 | 2421MHz | 40 | 2441MHz | 60 | 2461MHz | | |

6.4 Description of Support Units

The EUT has been tested independently.

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd
 Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China
 Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

| No. | Item | Measurement Uncertainty |
|-----|---------------------------------|-------------------------|
| 1 | Radio Frequency | 7.9×10^{-8} |
| 2 | RF power, conducted | 0.31dB (30MHz-1GHz) |
| | | 0.57dB (1GHz-18GHz) |
| 3 | Radiated Spurious emission test | 4.5dB (30MHz-1GHz) |
| | | 4.8dB (1GHz-12.75GHz) |
| 4 | Conduction emission | 3.6dB (9kHz to 150kHz) |
| | | 3.2dB (150kHz to 30MHz) |
| 5 | Temperature test | 0.64°C |
| 6 | Humidity test | 2.8% |
| 7 | DC power voltages | 0.025% |

7 Equipment List

| RF test system | | | | | |
|----------------------------------|--------------|------------------------------|---------------|------------------------|----------------------------|
| Equipment | Manufacturer | Model No. | Serial Number | Cal. Date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Signal Generator | Keysight | E8257D | MY53401106 | 03-13-2018 | 03-12-2019 |
| Spectrum Analyzer | Keysight | N9010A | MY54510339 | 03-13-2018 | 03-12-2019 |
| Signal Generator | Keysight | N5182B | MY53051549 | 11-16-2017 | 11-15-2018 |
| High-pass filter | Sinoscite | FL3CX03WG18 NM12-0398-002 | --- | 01-10-2018 | 01-09-2019 |
| DC Power | Keysight | E3642A | MY54436035 | 03-13-2018 | 03-12-2019 |
| power meter & power sensor | R&S | OSP120 | 101374 | 04-11-2018 | 04-10-2019 |
| RF control unit | JS Tonscend | JS0806-2 | 2015860006 | 03-13-2018 | 03-12-2019 |
| BT&WI-FI Automatic test software | JS Tonscend | JSTS1120-2 | --- | 03-29-2018 | 03-28-2019 |
| Temperature / Humidity Indicator | Defu | TH128 | --- | 07-02-2018 | 07-01-2019 |

| Conducted disturbance Test | | | | | |
|----------------------------------|--------------|-----------|---------------|------------------------|----------------------------|
| Equipment | Manufacturer | Model No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| Temperature / Humidity Indicator | Defu | TH128 | --- | 07-02-2018 | 07-01-2019 |
| Receiver | R&S | ESCI | 100435 | 05-25-2018 | 05-24-2019 |
| LISN | R&S | ENV216 | 100098 | 05-11-2018 | 05-10-2019 |

| 3M Semi/full-anechoic Chamber | | | | | |
|----------------------------------|--------------|------------------------------|---------------|------------------------|----------------------------|
| Equipment | Manufacturer | Model No. | Serial Number | Cal. date (mm-dd-yyyy) | Cal. Due date (mm-dd-yyyy) |
| 3M Chamber & Accessory Equipment | TDK | SAC-3 | --- | 06-04-2016 | 06-03-2019 |
| Spectrum Analyzer | Agilent | E4443A | MY45300910 | 11-16-2017 | 11-15-2018 |
| Receiver | R&S | ESCI | 100435 | 05-25-2018 | 05-24-2019 |
| TRILOG Broadband Antenna | SCHWARZBECK | VULB9163 | 9163-618 | 07-30-2018 | 07-29-2019 |
| Horn Antenna | Schwarzbeck | BBHA 9120D | 9120D-1869 | 04-25-2018 | 04-23-2021 |
| Spectrum Analyzer | R&S | FSP40 | 100416 | 05-11-2018 | 05-10-2019 |
| Microwave Preamplifier | Tonscend | EMC051845SE | 980380 | 01-19-2018 | 01-18-2019 |
| Loop Antenna | ETS | 6502 | 00071730 | 06-22-2017 | 06-21-2019 |
| Double ridge horn antenna | A.H.SYSTEMS | SAS-574 | 6042 | 06-05-2018 | 06-03-2021 |
| Pre-amplifier | A.H.SYSTEMS | PAP-1840-60 | 6041 | 06-05-2018 | 06-03-2021 |
| Temperature/ Humidity Indicator | TAYLOR | 1451 | 1905 | 05-02-2018 | 05-01-2019 |
| Cable line | Fulai(7M) | SF106 | 5219/6A | 01-10-2018 | 01-09-2019 |
| Cable line | Fulai(6M) | SF106 | 5220/6A | 01-10-2018 | 01-09-2019 |
| Cable line | Fulai(3M) | SF106 | 5216/6A | 01-10-2018 | 01-09-2019 |
| Cable line | Fulai(3M) | SF106 | 5217/6A | 01-10-2018 | 01-09-2019 |
| band rejection filter | Sinoscite | FL5CX01CA09C L12-0395-001 | --- | 01-10-2018 | 01-09-2019 |
| band rejection filter | Sinoscite | FL5CX01CA08C L12-0393-001 | --- | 01-10-2018 | 01-09-2019 |
| band rejection filter | Sinoscite | FL5CX02CA04C L12-0396-002 | --- | 01-10-2018 | 01-09-2019 |
| band rejection filter | Sinoscite | FL5CX02CA03C L12-0394-001 | --- | 01-10-2018 | 01-09-2019 |

8 Radio Technical Requirements Specification

Reference documents for testing:

| No. | Identity | Document Title |
|-----|------------------|--|
| 1 | FCC Part15C | Subpart C-Intentional Radiators |
| 2 | ANSI C63.10-2013 | American National Standard for Testing Unlicensed Wireless Devices |

Test Results List:

| Test requirement | Test method | Test item | Verdict | Note |
|-----------------------------------|-------------|--|---------|-------------|
| Part15C Section 15.247 (a)(1) | ANSI 63.10 | 20dB Occupied Bandwidth | PASS | Appendix A) |
| Part15C Section 15.247 (a)(1) | ANSI 63.10 | Carrier Frequencies Separation | PASS | Appendix B) |
| Part15C Section 15.247 (a)(1) | ANSI 63.10 | Dwell Time | PASS | Appendix C) |
| Part15C Section 15.247 (b) | ANSI 63.10 | Hopping Channel Number | PASS | Appendix D) |
| Part15C Section 15.247 (b)(1) | ANSI 63.10 | Conducted Peak Output Power | PASS | Appendix E) |
| Part15C Section 15.247(d) | ANSI 63.10 | Band-edge for RF Conducted Emissions | PASS | Appendix F) |
| Part15C Section 15.247(d) | ANSI 63.10 | RF Conducted Spurious Emissions | PASS | Appendix G) |
| Part15C Section 15.247 (a)(1) | ANSI 63.10 | Pseudorandom Frequency Hopping Sequence | PASS | Appendix H) |
| Part15C Section 15.203/15.247 (c) | ANSI 63.10 | Antenna Requirement | PASS | Appendix I) |
| Part15C Section 15.207 | ANSI 63.10 | AC Power Line Conducted Emission | PASS | Appendix J) |
| Part15C Section 15.205/15.209 | ANSI 63.10 | Restricted bands around fundamental frequency (Radiated) Emission) | PASS | Appendix K) |
| Part15C Section 15.205/15.209 | ANSI 63.10 | Radiated Spurious Emissions | PASS | Appendix L) |

Appendix A): 20dB Occupied Bandwidth

Test Result

| Mode | Channel. | 20dB Bandwidth [MHz] | 99% OBW [MHz] | Verdict |
|---------------|----------|----------------------|---------------|---------|
| GFSK | LCH | 0.9444 | 0.85930 | PASS |
| GFSK | MCH | 0.9422 | 0.85841 | PASS |
| GFSK | HCH | 0.9419 | 0.85679 | PASS |
| $\pi/4$ DQPSK | LCH | 1.256 | 1.1633 | PASS |
| $\pi/4$ DQPSK | MCH | 1.226 | 1.1622 | PASS |
| $\pi/4$ DQPSK | HCH | 1.228 | 1.1655 | PASS |
| 8DPSK | LCH | 1.270 | 1.1565 | PASS |
| 8DPSK | MCH | 1.257 | 1.1572 | PASS |
| 8DPSK | HCH | 1.258 | 1.1572 | PASS |

Test Graph



| | |
|------------------------------------|--|
| <p>$\pi/4$DQPSK/LCH</p> | <p>Center Freq: 2.402000000 GHz</p> <p>Center Freq: 2.402000000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1633 MHz Total Power 8.09 dBm</p> <p>Transmit Freq Error -20.799 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.256 MHz x dB -20.00 dB</p> |
| <p>$\pi/4$DQPSK/MCH</p> | <p>Center Freq: 2.441000000 GHz</p> <p>Center Freq: 2.441000000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1622 MHz Total Power 11.6 dBm</p> <p>Transmit Freq Error -32.000 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.226 MHz x dB -20.00 dB</p> |
| <p>$\pi/4$DQPSK/HCH</p> | <p>Center Freq: 2.480000000 GHz</p> <p>Center Freq: 2.480000000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1655 MHz Total Power 12.6 dBm</p> <p>Transmit Freq Error -32.595 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.228 MHz x dB -20.00 dB</p> |

| | |
|------------------|--|
| <p>8DPSK/LCH</p> | |
| <p>8DPSK/MCH</p> | |
| <p>8DPSK/HCH</p> | |


Appendix B): Carrier Frequency Separation


Result Table

| Mode | Channel. | Carrier Frequency Separation [MHz] | Verdict |
|---------------|----------|------------------------------------|---------|
| GFSK | LCH | 0.996 | PASS |
| GFSK | MCH | 1.006 | PASS |
| GFSK | HCH | 1.000 | PASS |
| $\pi/4$ DQPSK | LCH | 1.168 | PASS |
| $\pi/4$ DQPSK | MCH | 1.076 | PASS |
| $\pi/4$ DQPSK | HCH | 0.994 | PASS |
| 8DPSK | LCH | 1.032 | PASS |
| 8DPSK | MCH | 0.954 | PASS |
| 8DPSK | HCH | 0.998 | PASS |

Test Graph



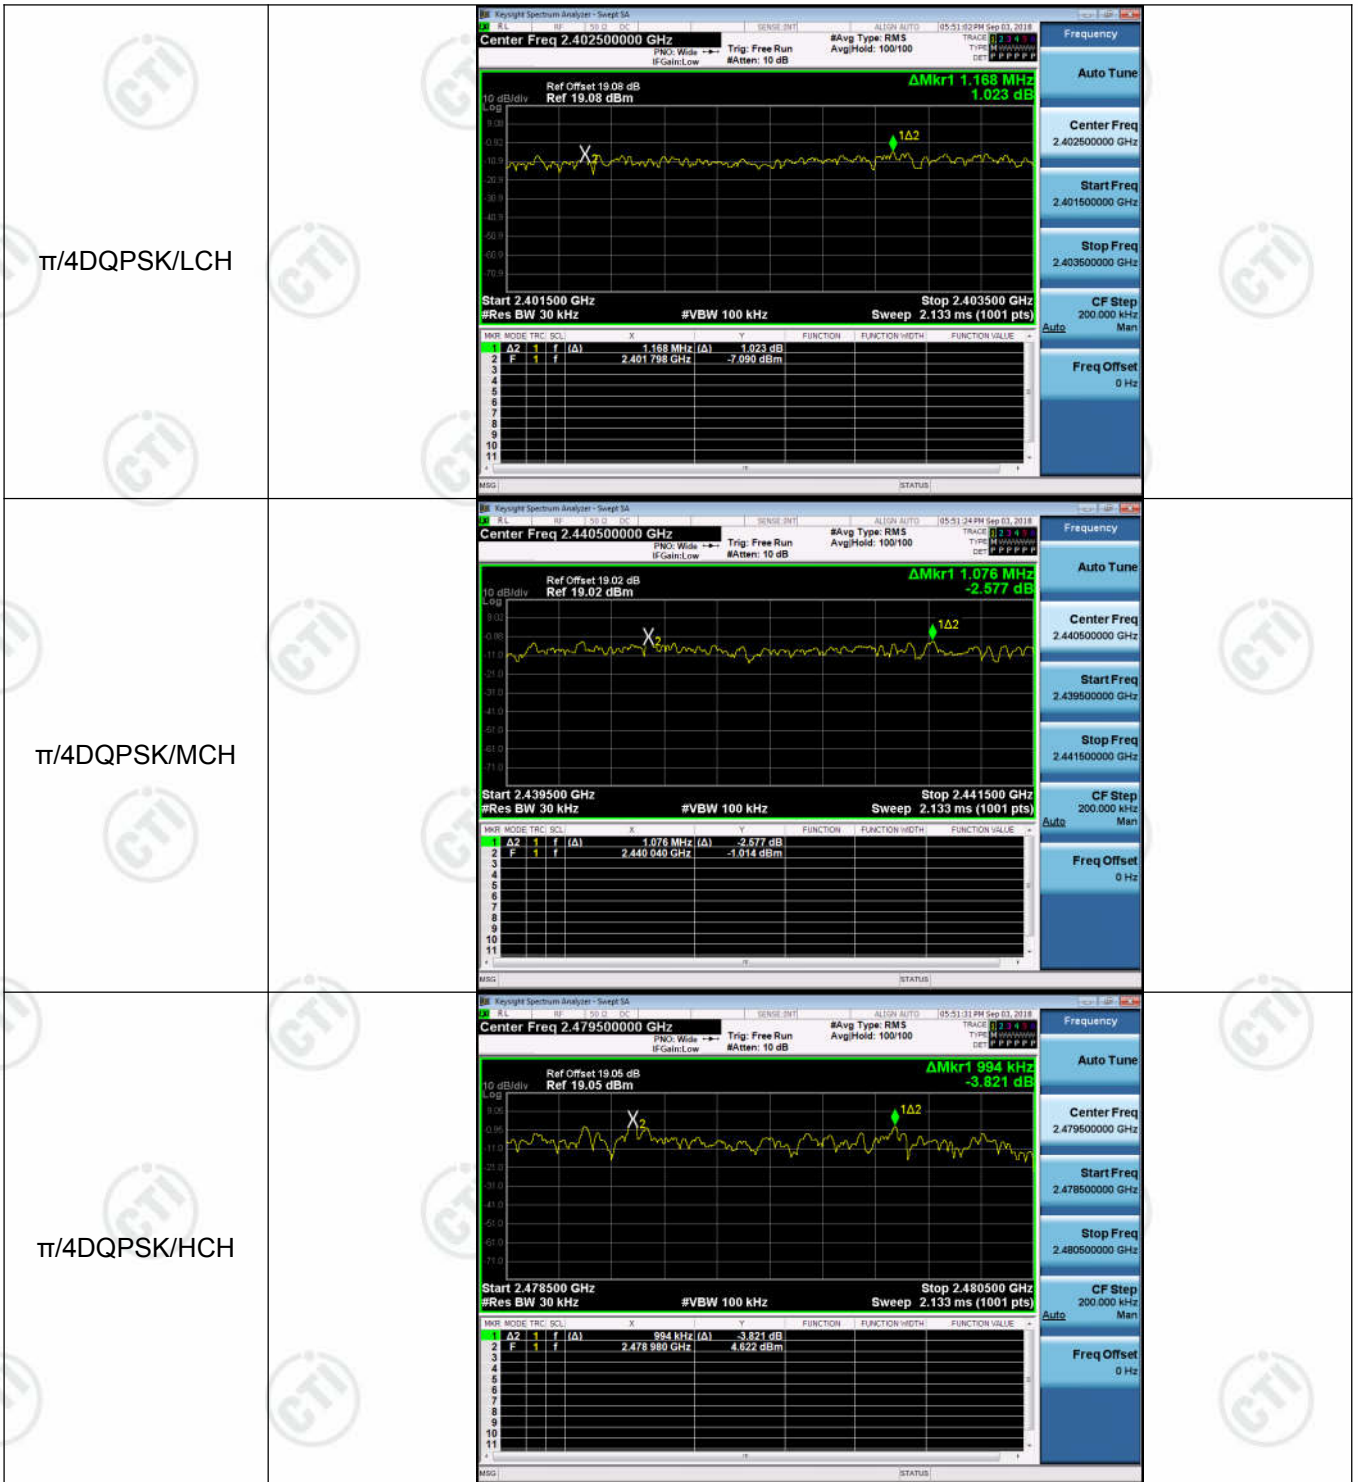

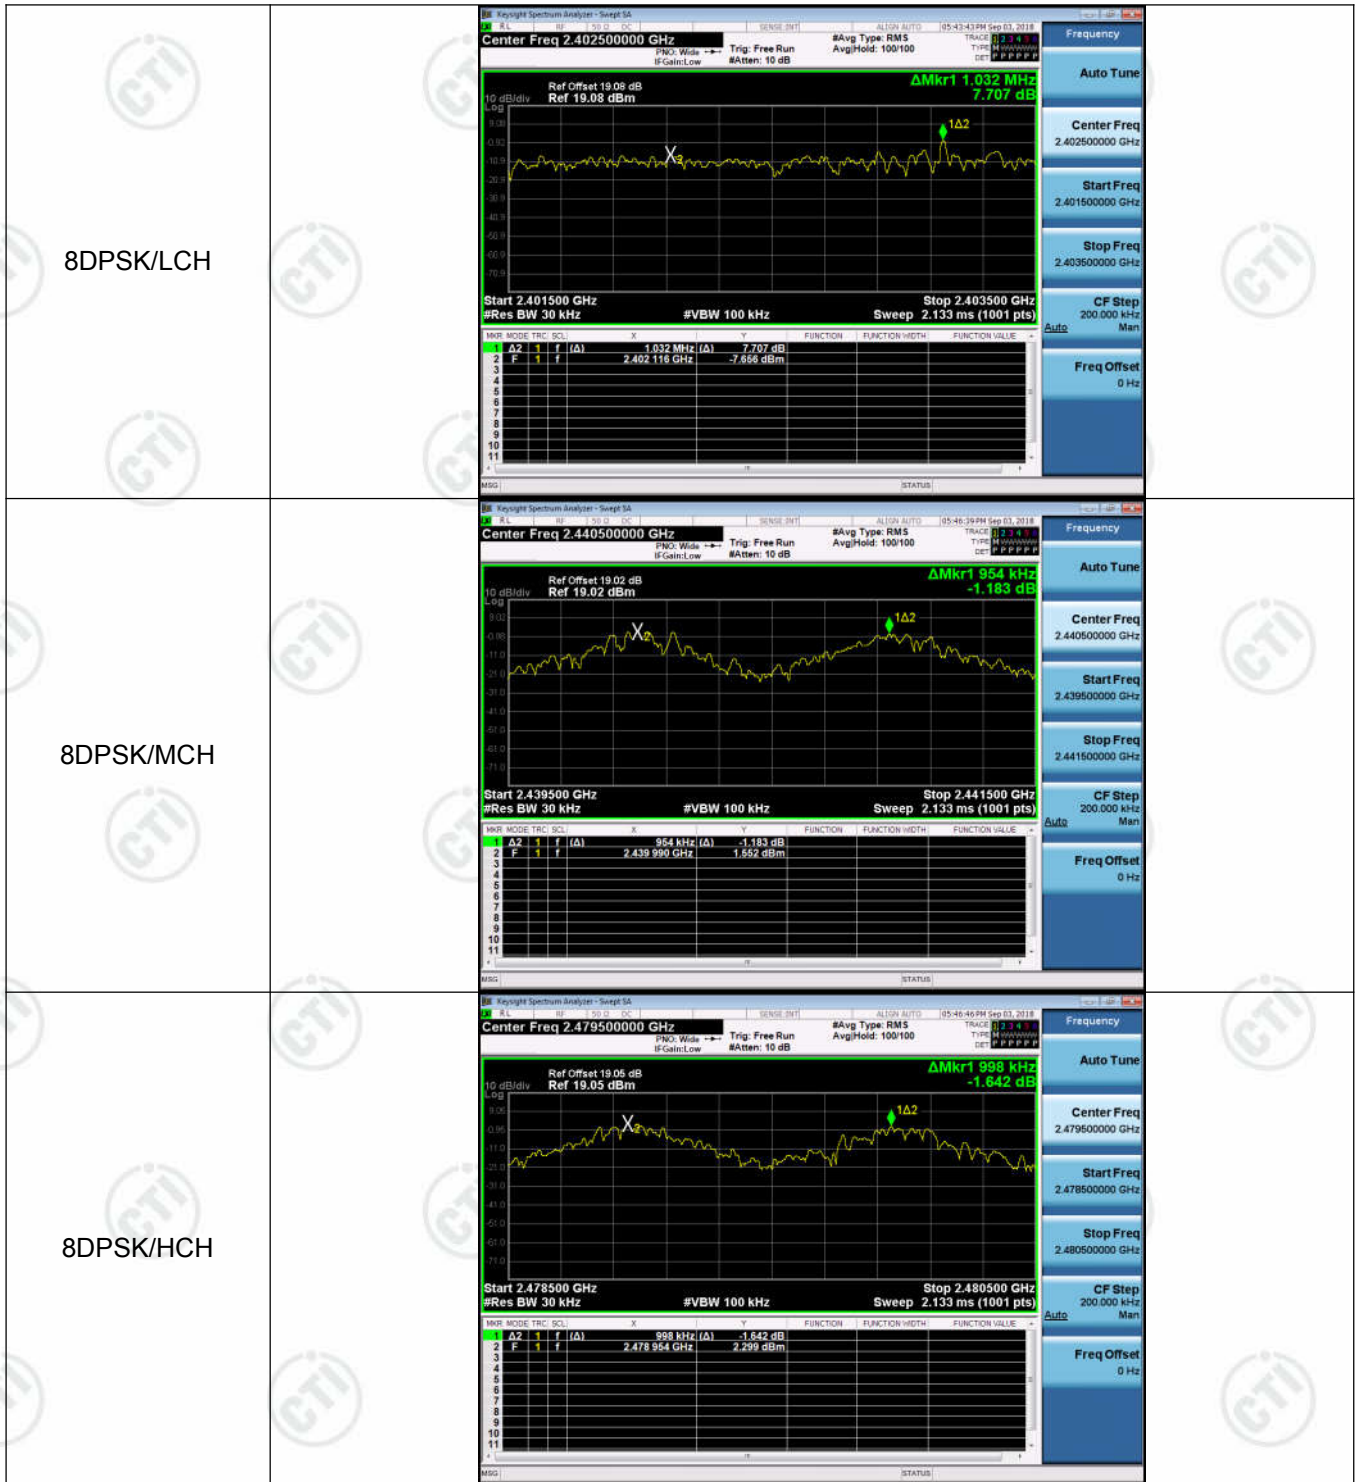

Appendix C): Dwell Time


Result Table


| Mode | Packet | Channel | Burst Width [ms/hop/ch] | Total Hops[hop*ch] | Dwell Time[s] | Duty Cycle [%] | Verdict |
|------|--------|---------|----------------------------|-----------------------|------------------|-------------------|---------|
| GFSK | DH1 | LCH | 0.40787 | 320 | 0.131 | 0.33 | PASS |
| GFSK | DH1 | MCH | 0.40914 | 320 | 0.131 | 0.33 | PASS |
| GFSK | DH1 | HCH | 0.409133 | 320 | 0.131 | 0.33 | PASS |
| GFSK | DH3 | LCH | 1.6644 | 160 | 0.266 | 0.67 | PASS |
| GFSK | DH3 | MCH | 1.6644 | 160 | 0.266 | 0.67 | PASS |
| GFSK | DH3 | HCH | 1.6644 | 160 | 0.266 | 0.67 | PASS |
| GFSK | DH5 | LCH | 2.898 | 106.7 | 0.309 | 0.77 | PASS |
| GFSK | DH5 | MCH | 2.898 | 106.7 | 0.309 | 0.77 | PASS |
| GFSK | DH5 | HCH | 2.898 | 106.7 | 0.309 | 0.77 | PASS |

Remark : All modes are tested, only the worst mode GFSK is reported.

Test Graph



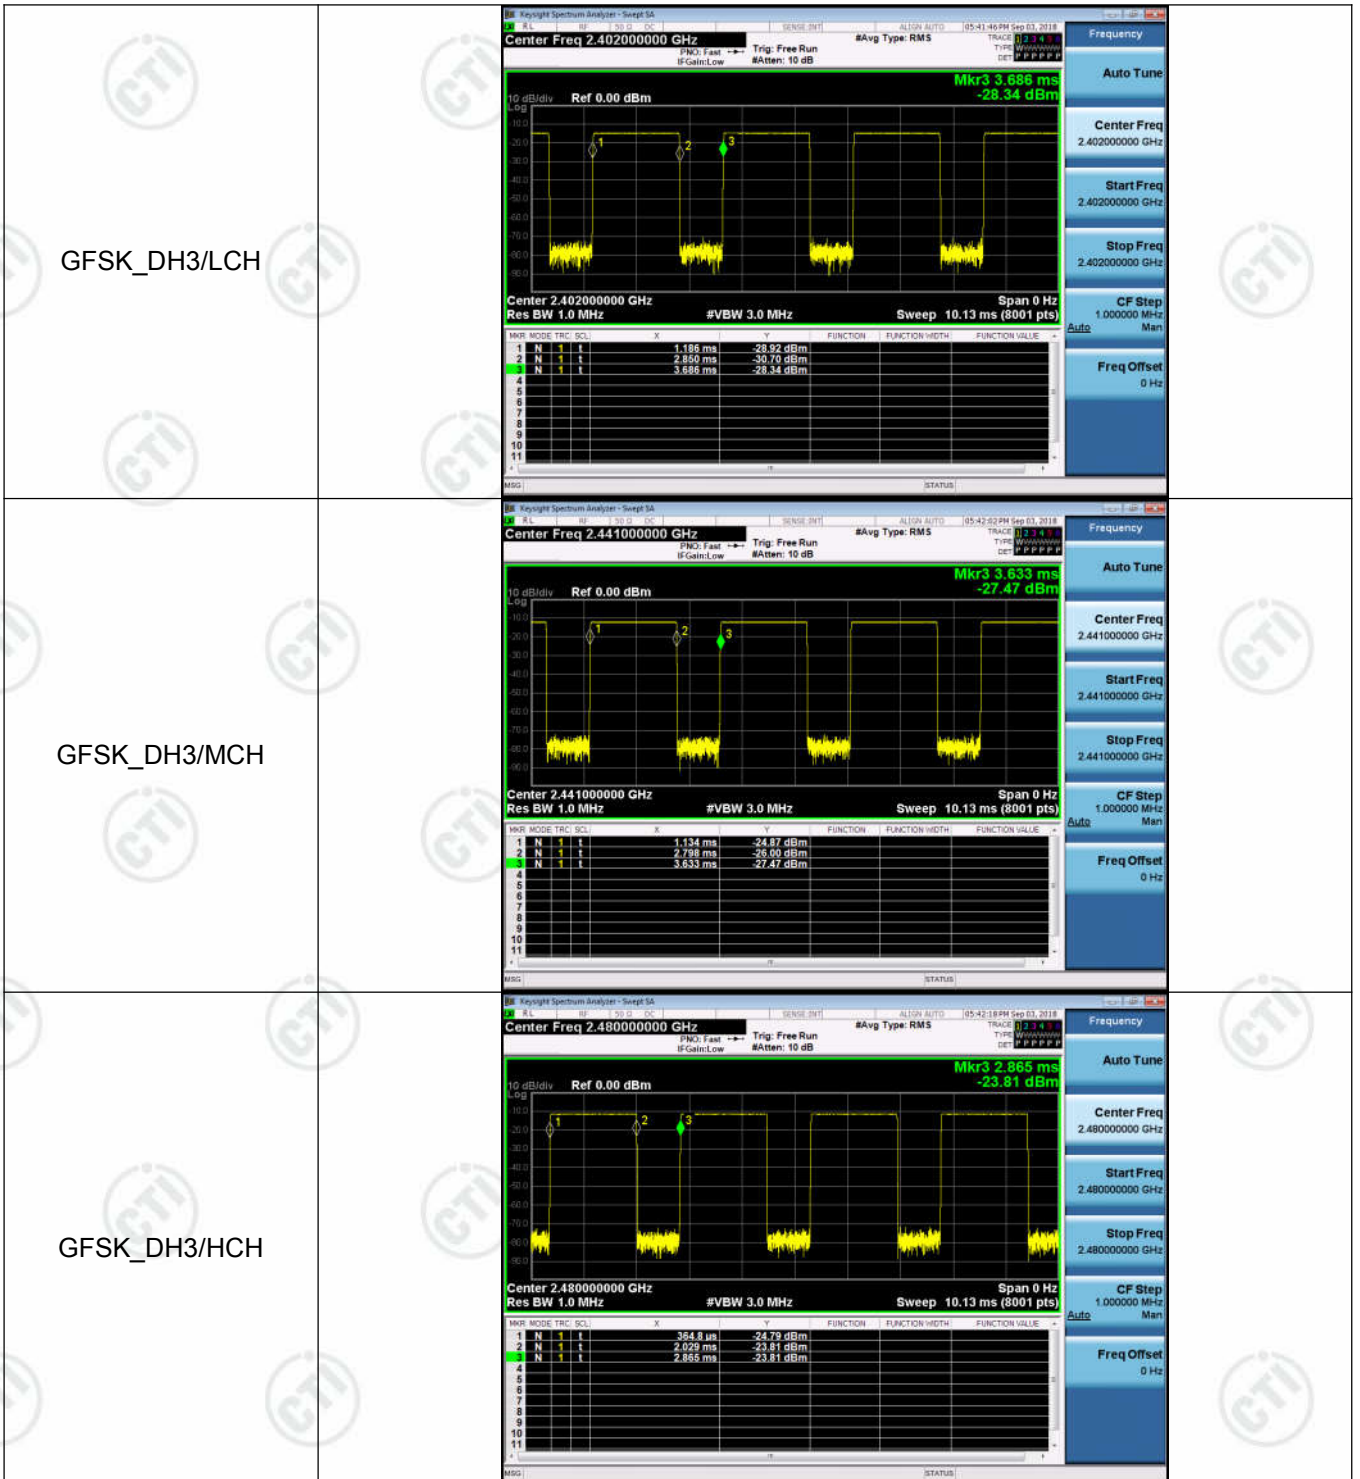

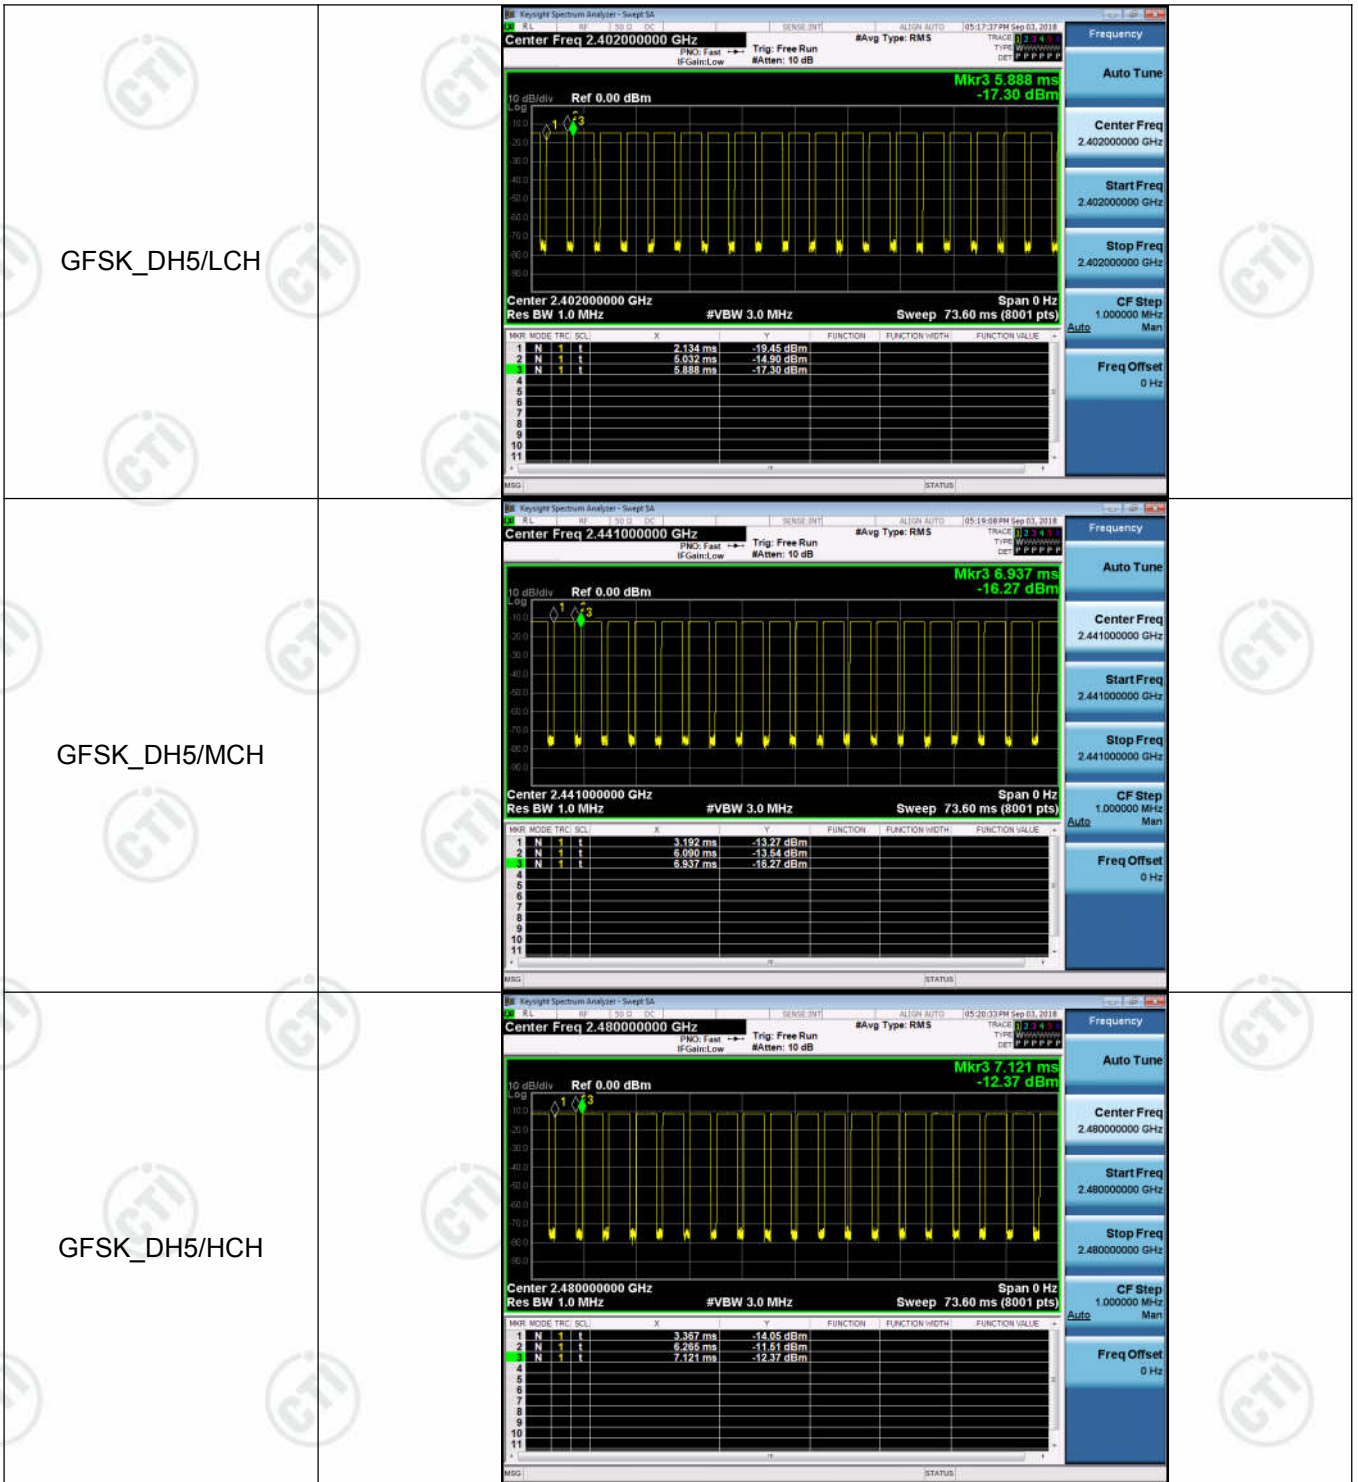


Appendix D): Hopping Channel Number

Result Table

| Mode | Channel. | Number of Hopping Channel | Verdict |
|---------------|----------|---------------------------|---------|
| GFSK | Hop | 79 | PASS |
| $\pi/4$ DQPSK | Hop | 79 | PASS |
| 8DPSK | Hop | 79 | PASS |

Test Graph

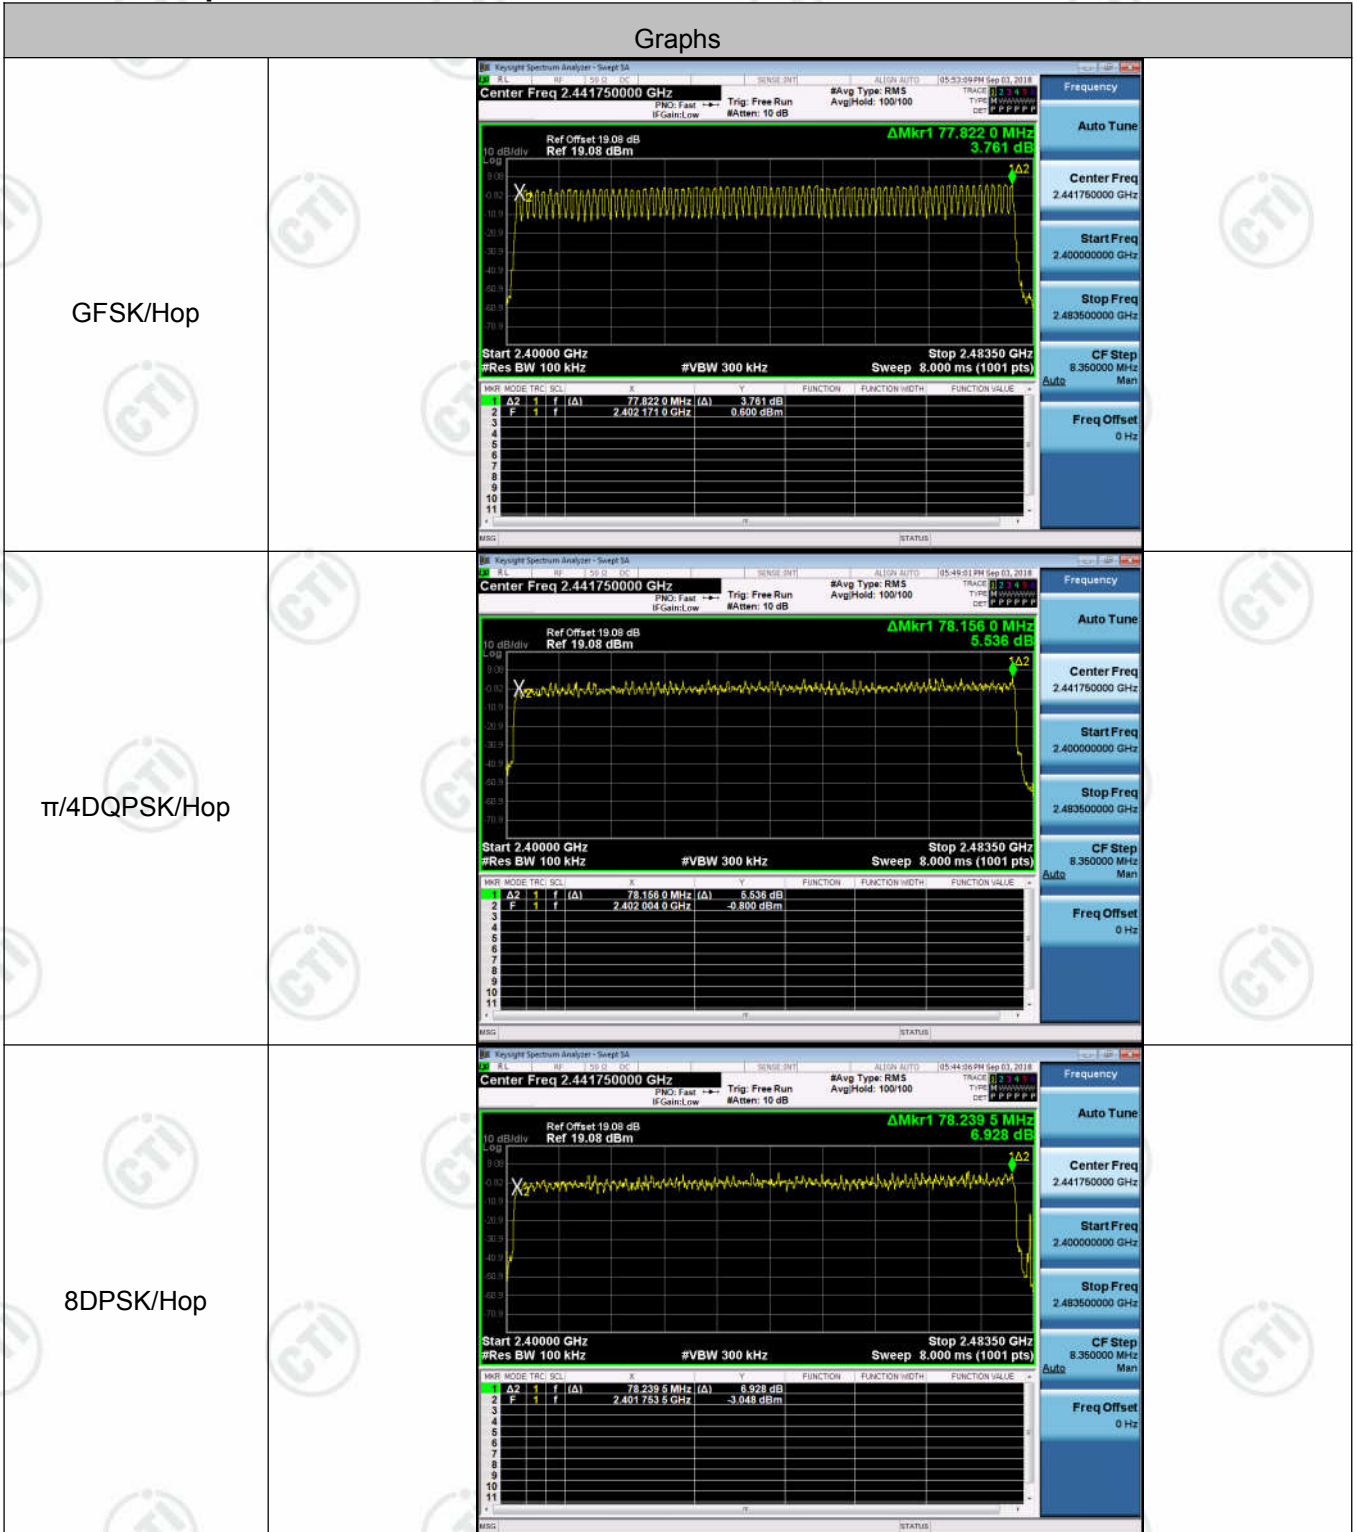





Appendix E): Conducted Peak Output Power




Result Table

| Mode | Channel. | Maximum Peak Output Power [dBm] | Verdict |
|---------------|----------|---------------------------------|---------|
| GFSK | LCH | 4.515 | PASS |
| GFSK | MCH | 6.949 | PASS |
| GFSK | HCH | 7.862 | PASS |
| $\pi/4$ DQPSK | LCH | 2.277 | PASS |
| $\pi/4$ DQPSK | MCH | 5.517 | PASS |
| $\pi/4$ DQPSK | HCH | 6.546 | PASS |
| 8DPSK | LCH | 2.574 | PASS |
| 8DPSK | MCH | 5.811 | PASS |
| 8DPSK | HCH | 6.824 | PASS |

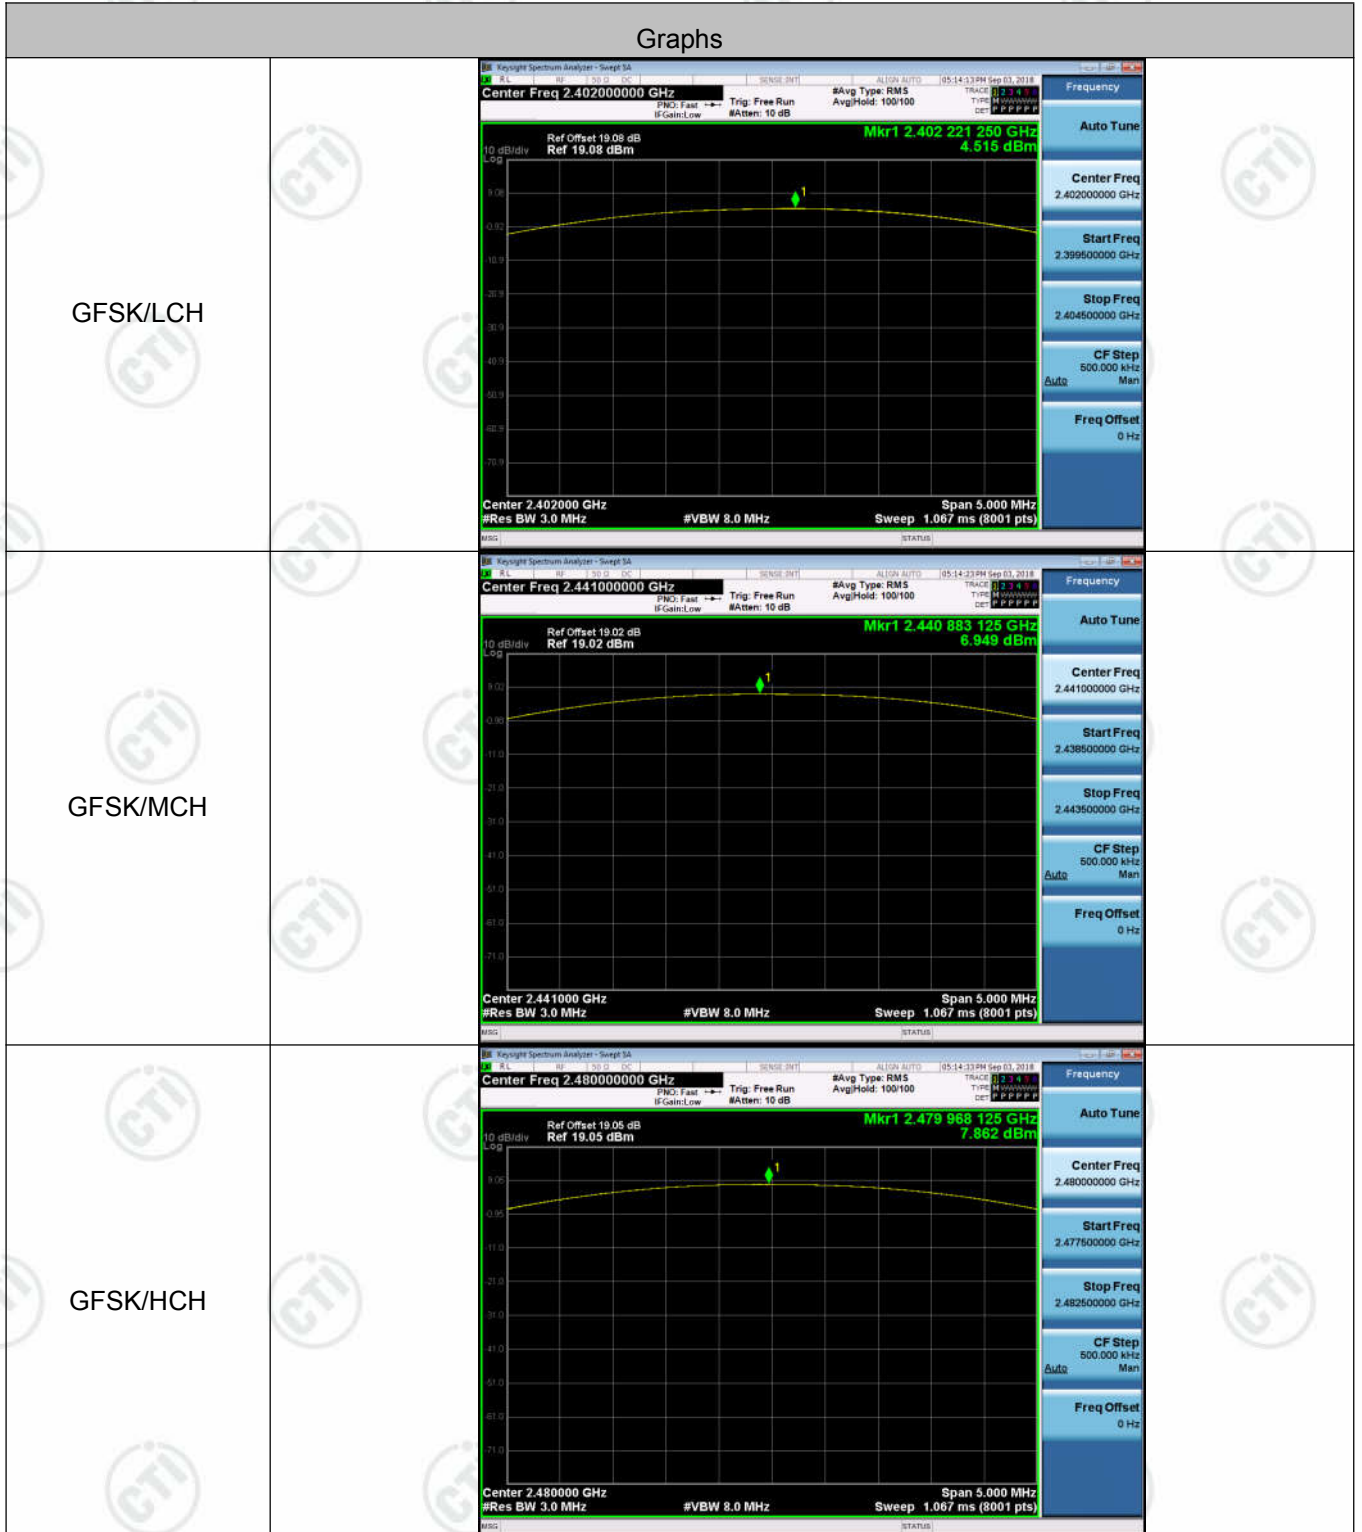Test Graph

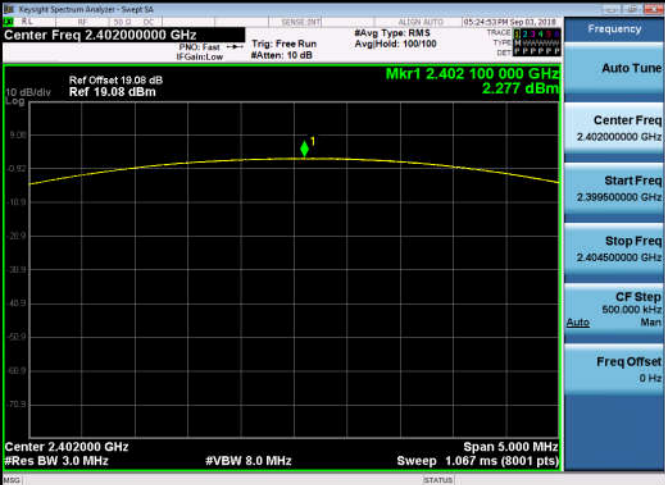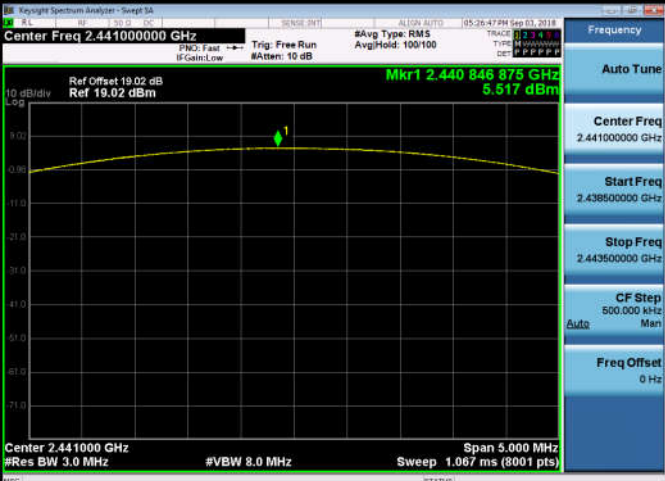
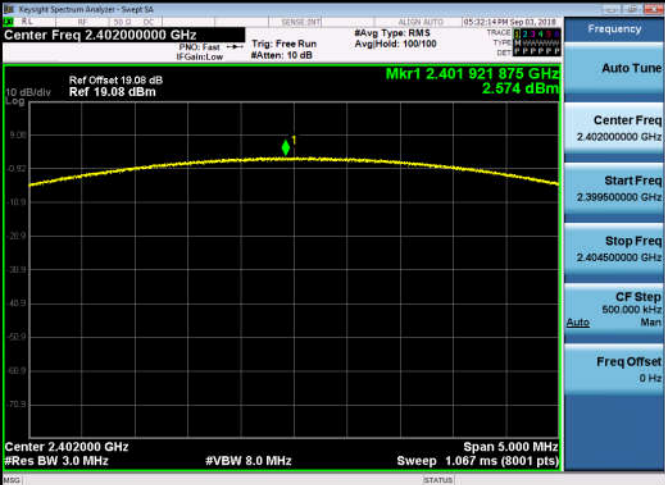
| | |
|------------------------------------|--|
| <p>$\pi/4$DQPSK/LCH</p> |  |
| <p>$\pi/4$DQPSK/MCH</p> |  |
| <p>$\pi/4$DQPSK/HCH</p> |  |


| | |
|------------------|--|
| <p>8DPSK/LCH</p> |  <p>Center Freq 2.40200000 GHz Mkr1 2.401 921 875 GHz 2.574 dBm Center 2.402000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)</p> |
| <p>8DPSK/MCH</p> |  <p>Center Freq 2.44100000 GHz Mkr1 2.441 026 875 GHz 5.811 dBm Center 2.441000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)</p> |
| <p>8DPSK/HCH</p> |  <p>Center Freq 2.48000000 GHz Mkr1 2.479 980 825 GHz 6.824 dBm Center 2.480000 GHz #Res BW 3.0 MHz #VBW 8.0 MHz Sweep 1.067 ms (8001 pts)</p> |

Appendix F): Band-edge for RF Conducted Emissions

Result Table


| Mode | Channel | Carrier Frequency [MHz] | Carrier Power [dBm] | Frequency Hopping | Max Spurious Level [dBm] | Limit [dBm] | Verdict |
|---------------|---------|-------------------------|---------------------|-------------------|--------------------------|-------------|---------|
| GFSK | LCH | 2402 | 4.335 | Off | -59.719 | -15.67 | PASS |
| | | | 2.111 | On | -58.266 | -17.89 | PASS |
| GFSK | HCH | 2480 | 7.688 | Off | -53.792 | -12.31 | PASS |
| | | | 4.966 | On | -43.705 | -15.03 | PASS |
| $\pi/4$ DQPSK | LCH | 2402 | 0.699 | Off | -60.128 | -19.3 | PASS |
| | | | 2.307 | On | -56.179 | -17.69 | PASS |
| $\pi/4$ DQPSK | HCH | 2480 | 5.203 | Off | -56.839 | -14.80 | PASS |
| | | | 3.593 | On | -44.197 | -16.41 | PASS |
| 8DPSK | LCH | 2402 | 0.735 | Off | -60.555 | -19.27 | PASS |
| | | | 2.423 | On | -53.096 | -17.58 | PASS |
| 8DPSK | HCH | 2480 | 5.356 | Off | -56.555 | -14.64 | PASS |
| | | | 4.719 | On | -52.090 | -15.28 | PASS |

Test Graph

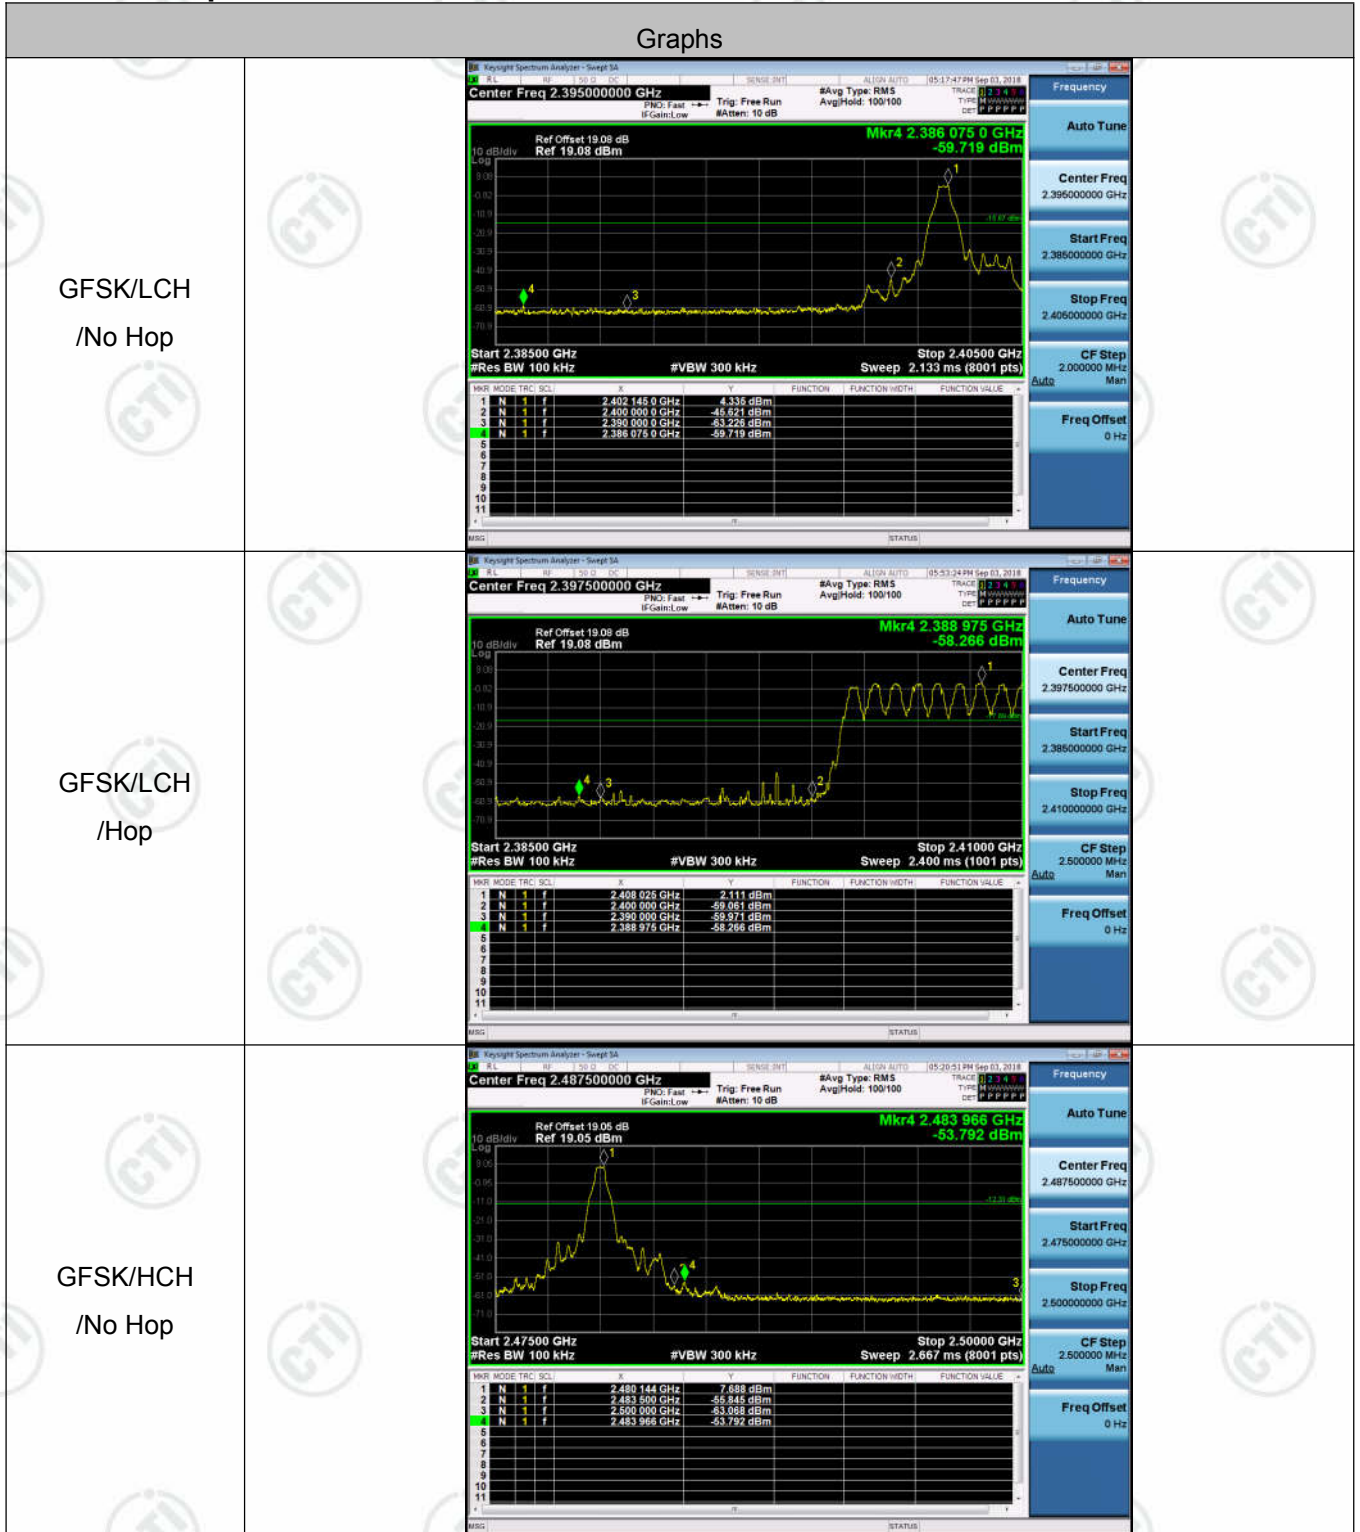

| <p>GFSK/HCH /Hop</p> | <p>Keyight Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.48500000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Mkr4 2.485 90 GHz -43.705 dBm</p> <p>Start 2.470000 GHz #Res BW 100 kHz</p> <p>Stop 2.500000 GHz #VBW 300 kHz Sweep 2.933 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.472 13 GHz</td> <td>4.998 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 50 GHz</td> <td>-61.020 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.490 00 GHz</td> <td>-54.440 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.485 90 GHz</td> <td>-43.705 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MNR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.472 13 GHz | 4.998 dBm | | | | 2 | N | 1 | f | 2.483 50 GHz | -61.020 dBm | | | | 3 | N | 1 | f | 2.490 00 GHz | -54.440 dBm | | | | 4 | N | 1 | f | 2.485 90 GHz | -43.705 dBm | | | |
|--|--|-----|------|-----------------|-------------|----------|----------------|----------------|----------------|----------------|---|---|---|---|-----------------|-----------|--|--|--|---|---|---|---|-----------------|-------------|--|--|--|---|---|---|---|-----------------|-------------|--|--|--|---|---|---|---|-----------------|-------------|--|--|--|
| MNR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.472 13 GHz | 4.998 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.483 50 GHz | -61.020 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 2.490 00 GHz | -54.440 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 2.485 90 GHz | -43.705 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>$\pi/4$DQPSK/LCH /No Hop</p> | <p>Keyight Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.39500000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Mkr4 2.388 777 5 GHz -60.128 dBm</p> <p>Start 2.385000 GHz #Res BW 100 kHz</p> <p>Stop 2.405000 GHz #VBW 300 kHz Sweep 2.133 ms (8001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.402 142 5 GHz</td> <td>0.699 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 0 GHz</td> <td>-60.910 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 0 GHz</td> <td>-62.430 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.388 777 5 GHz</td> <td>-60.128 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MNR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.402 142 5 GHz | 0.699 dBm | | | | 2 | N | 1 | f | 2.400 000 0 GHz | -60.910 dBm | | | | 3 | N | 1 | f | 2.390 000 0 GHz | -62.430 dBm | | | | 4 | N | 1 | f | 2.388 777 5 GHz | -60.128 dBm | | | |
| MNR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.402 142 5 GHz | 0.699 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.400 000 0 GHz | -60.910 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 2.390 000 0 GHz | -62.430 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 2.388 777 5 GHz | -60.128 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <p>$\pi/4$DQPSK/LCH /Hop</p> | <p>Keyight Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.39750000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Mkr4 2.387 800 GHz -56.179 dBm</p> <p>Start 2.385000 GHz #Res BW 100 kHz</p> <p>Stop 2.410000 GHz #VBW 300 kHz Sweep 2.400 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.407 975 GHz</td> <td>2.307 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-64.122 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-69.604 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.387 800 GHz</td> <td>-56.179 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table> | MNR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | 1 | N | 1 | f | 2.407 975 GHz | 2.307 dBm | | | | 2 | N | 1 | f | 2.400 000 GHz | -64.122 dBm | | | | 3 | N | 1 | f | 2.390 000 GHz | -69.604 dBm | | | | 4 | N | 1 | f | 2.387 800 GHz | -56.179 dBm | | | |
| MNR | MODE | TRC | SCL | X | Y | FUNCTION | FUNCTION WIDTH | FUNCTION VALUE | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | N | 1 | f | 2.407 975 GHz | 2.307 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 2 | N | 1 | f | 2.400 000 GHz | -64.122 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 3 | N | 1 | f | 2.390 000 GHz | -69.604 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 4 | N | 1 | f | 2.387 800 GHz | -56.179 dBm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | |
|--|--|
| <p>$\pi/4$DQPSK/HCH /No Hop</p> | |
| <p>$\pi/4$DQPSK/HCH /Hop</p> | |
| <p>8DPSK/LCH /No Hop</p> | |

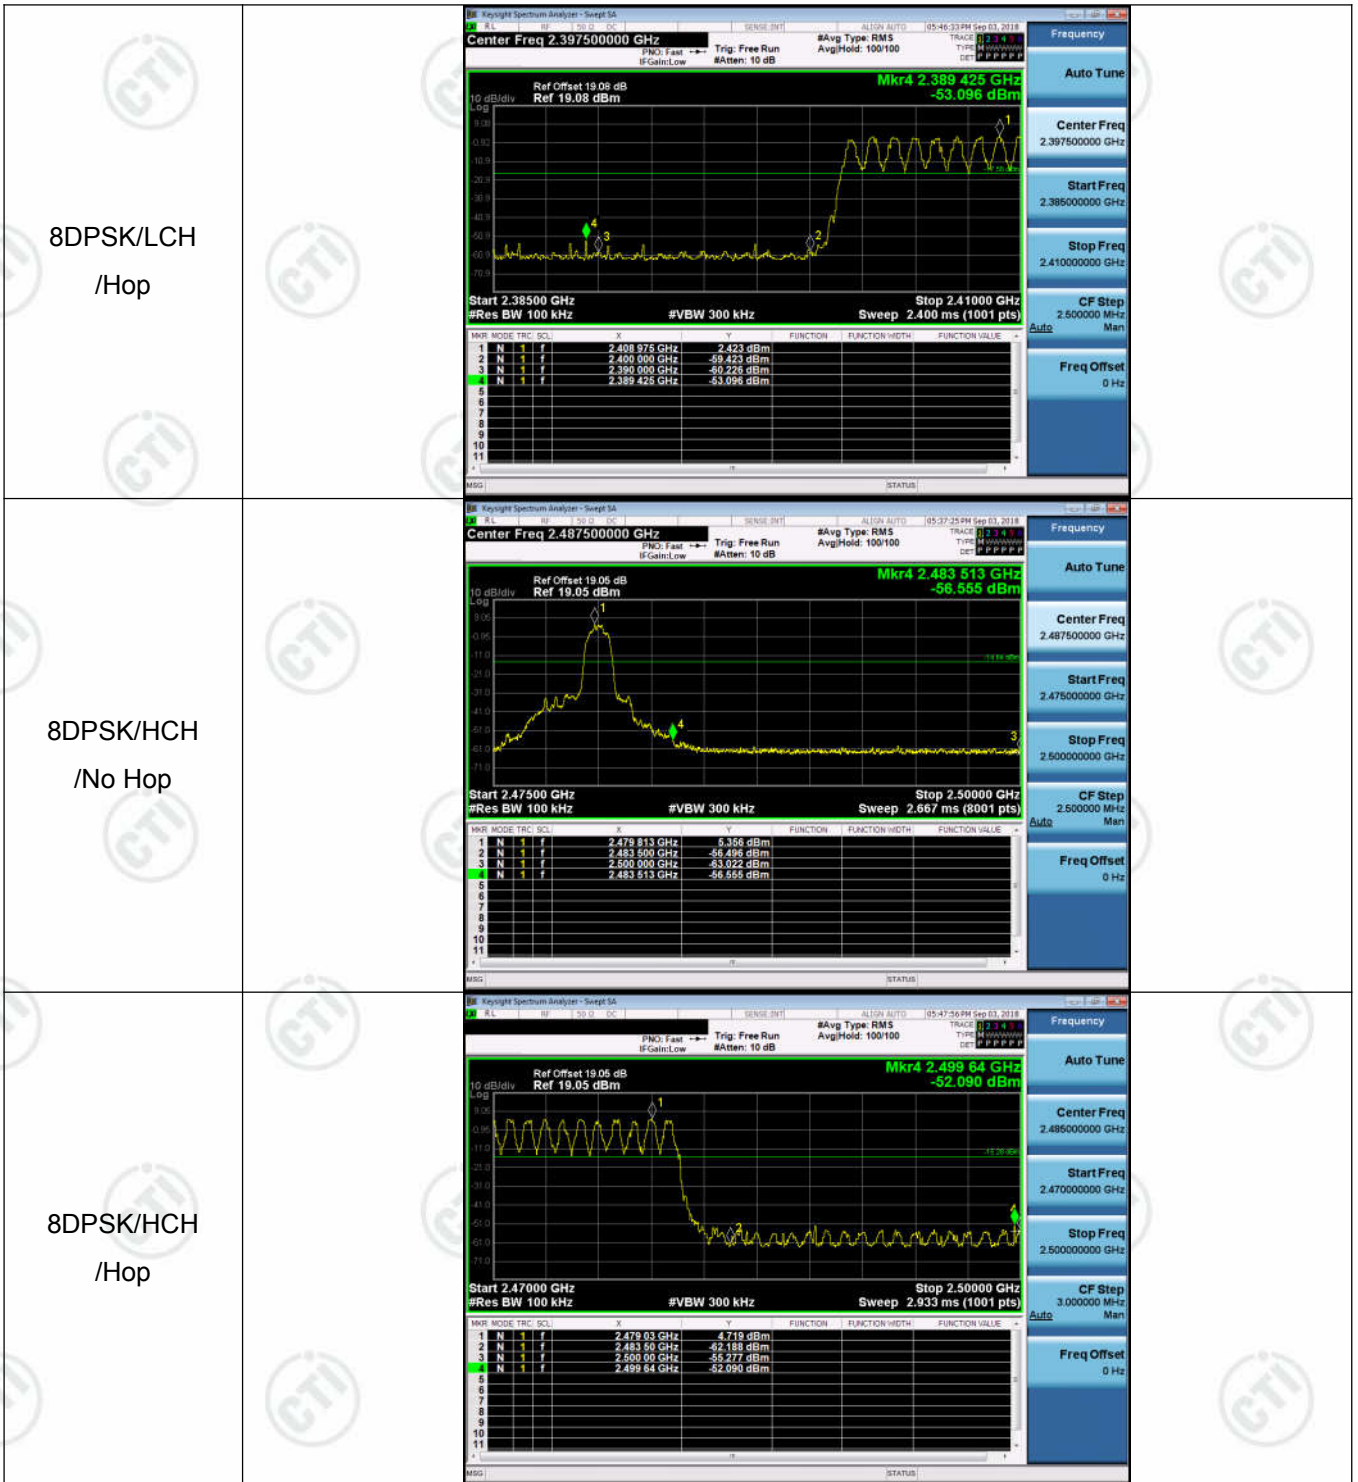



Appendix G): RF Conducted Spurious Emissions


Result Table


| Mode | Channel | Pref [dBm] | Puw[dBm] | Verdict |
|---------------|---------|------------|----------|---------|
| GFSK | LCH | 4.075 | <Limit | PASS |
| GFSK | MCH | 6.726 | <Limit | PASS |
| GFSK | HCH | 7.637 | <Limit | PASS |
| $\pi/4$ DQPSK | LCH | 0.511 | <Limit | PASS |
| $\pi/4$ DQPSK | MCH | 4.019 | <Limit | PASS |
| $\pi/4$ DQPSK | HCH | 5.207 | <Limit | PASS |
| 8DPSK | LCH | 0.673 | <Limit | PASS |
| 8DPSK | MCH | 4.207 | <Limit | PASS |
| 8DPSK | HCH | 5.318 | <Limit | PASS |


Test Graph

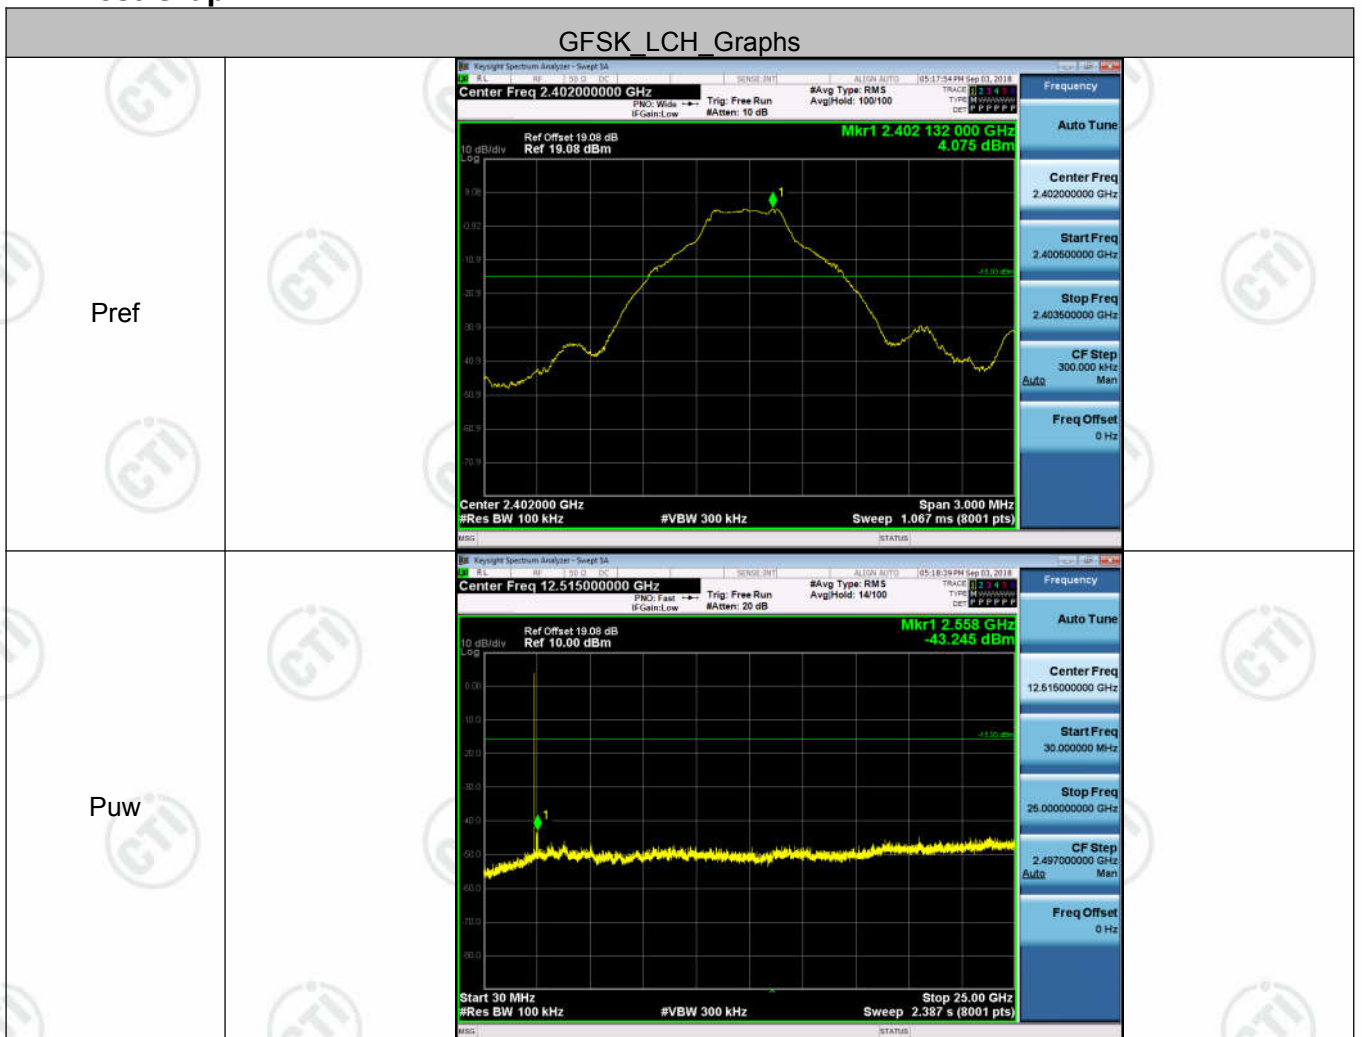


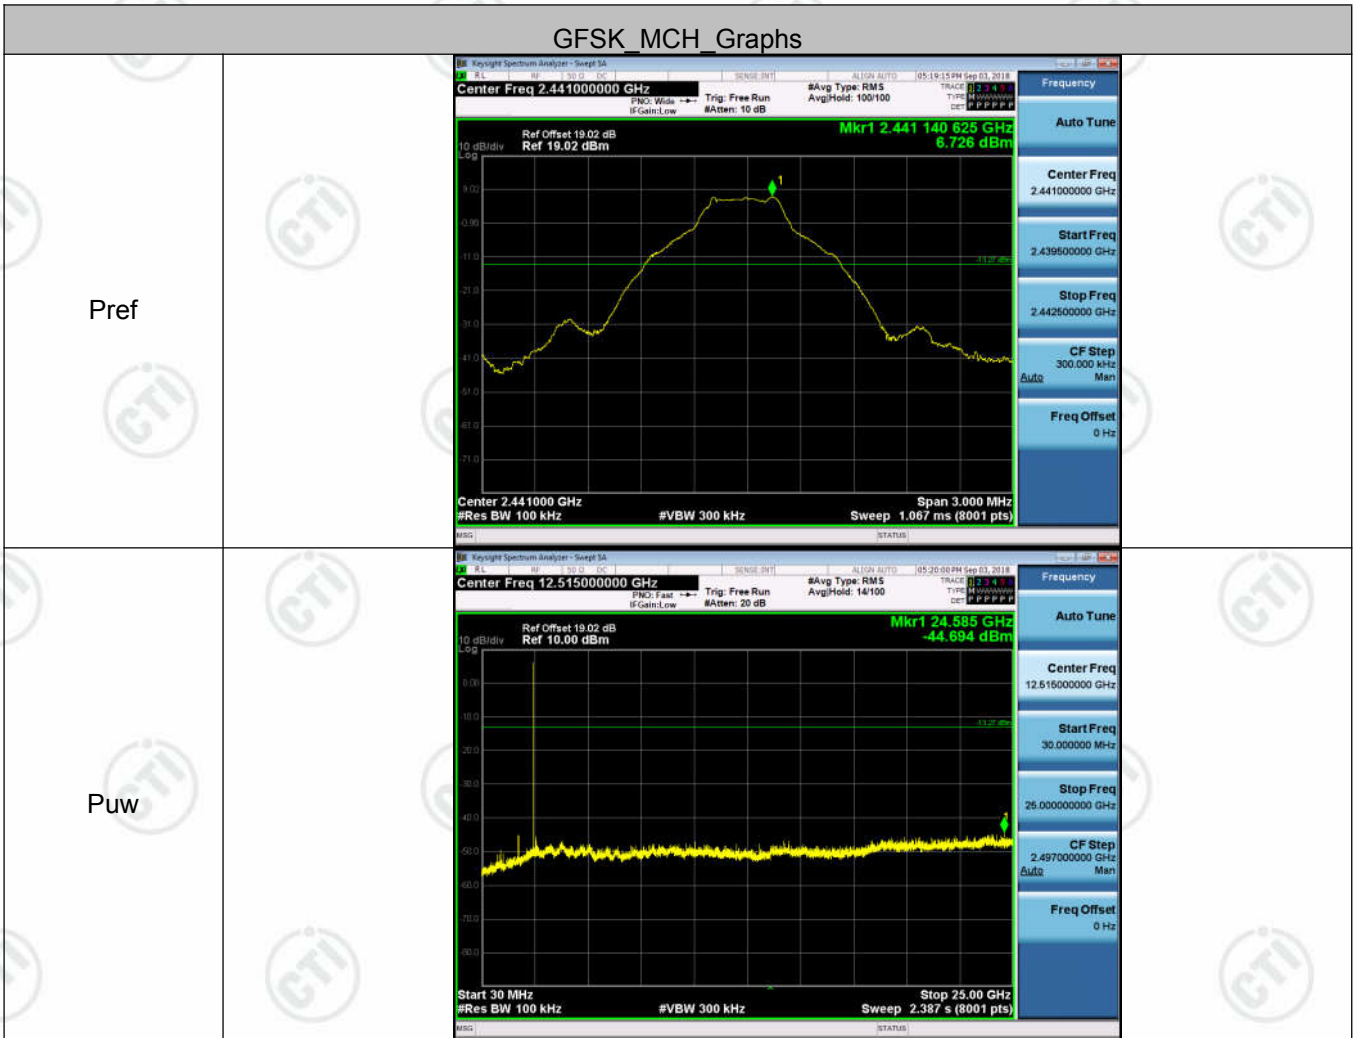


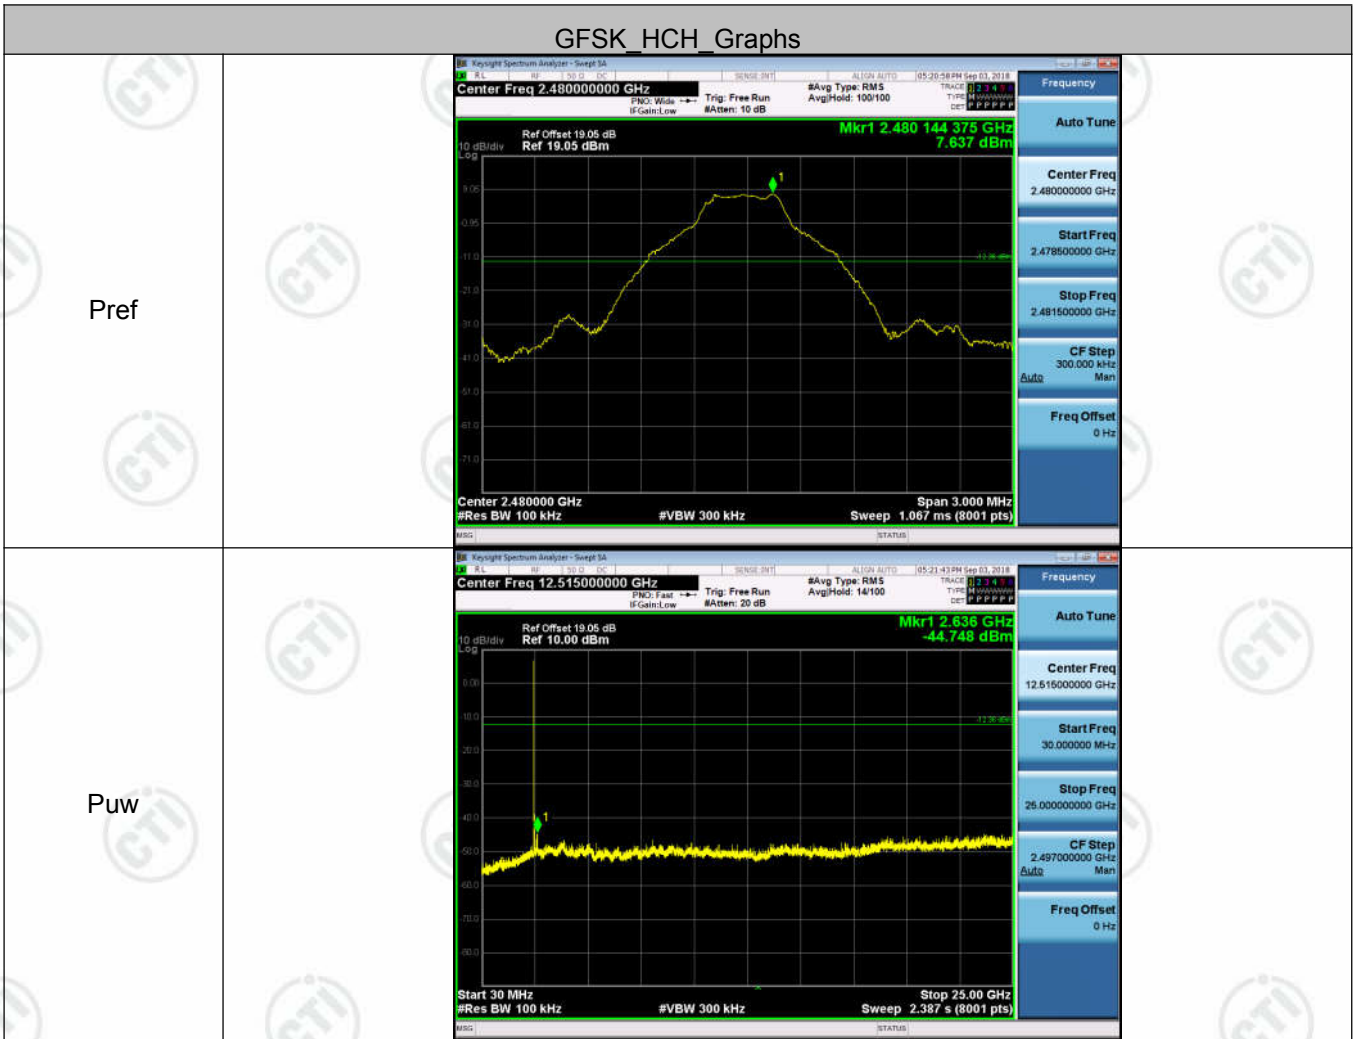


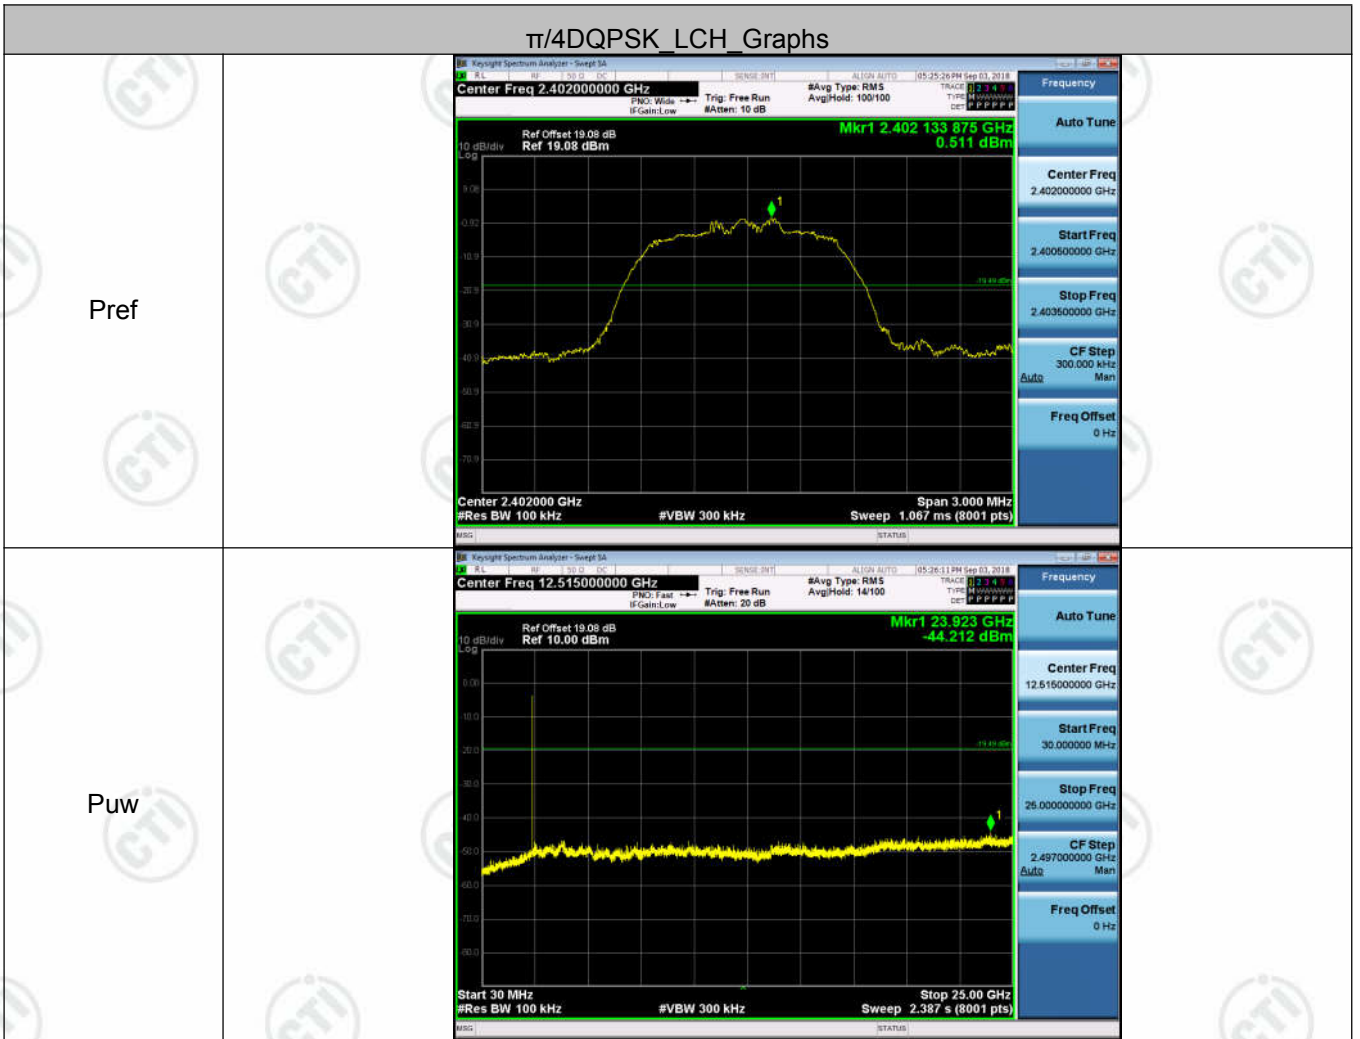

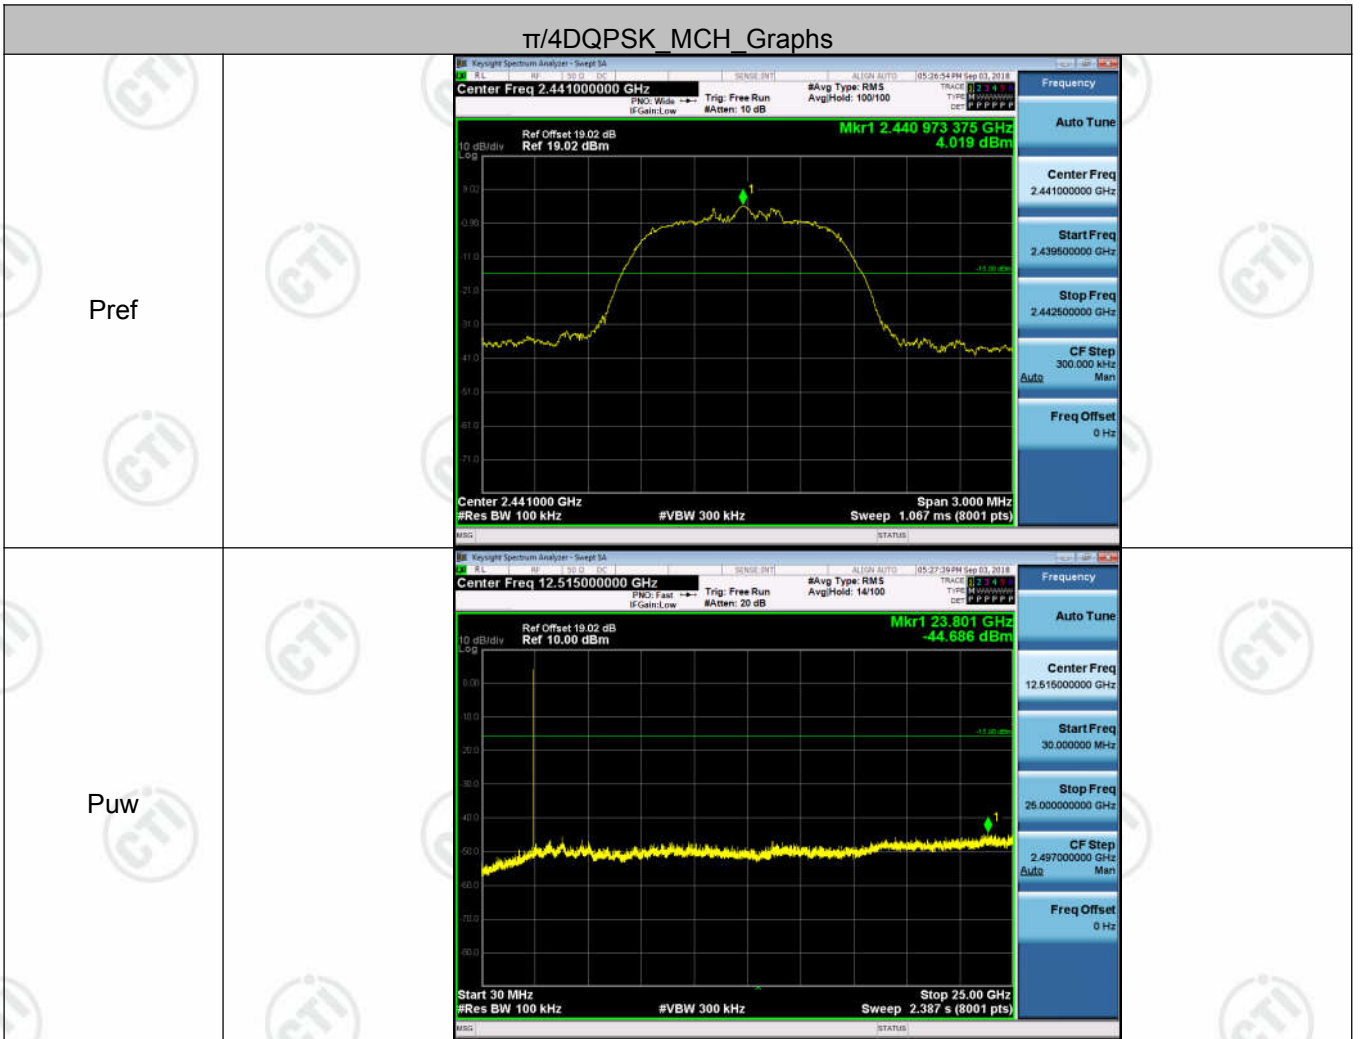

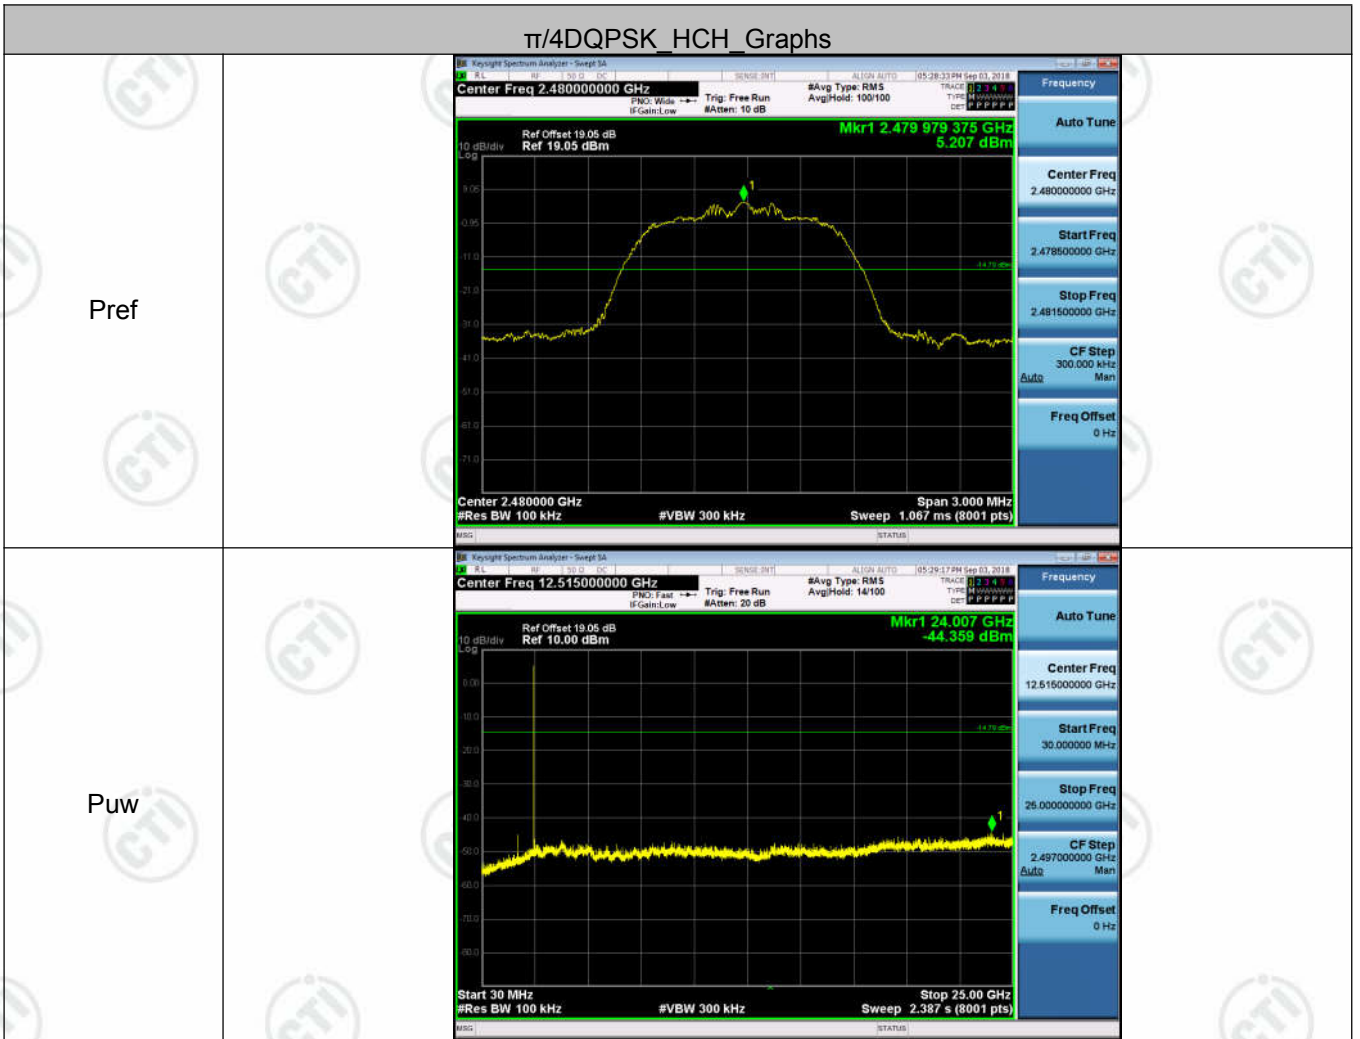


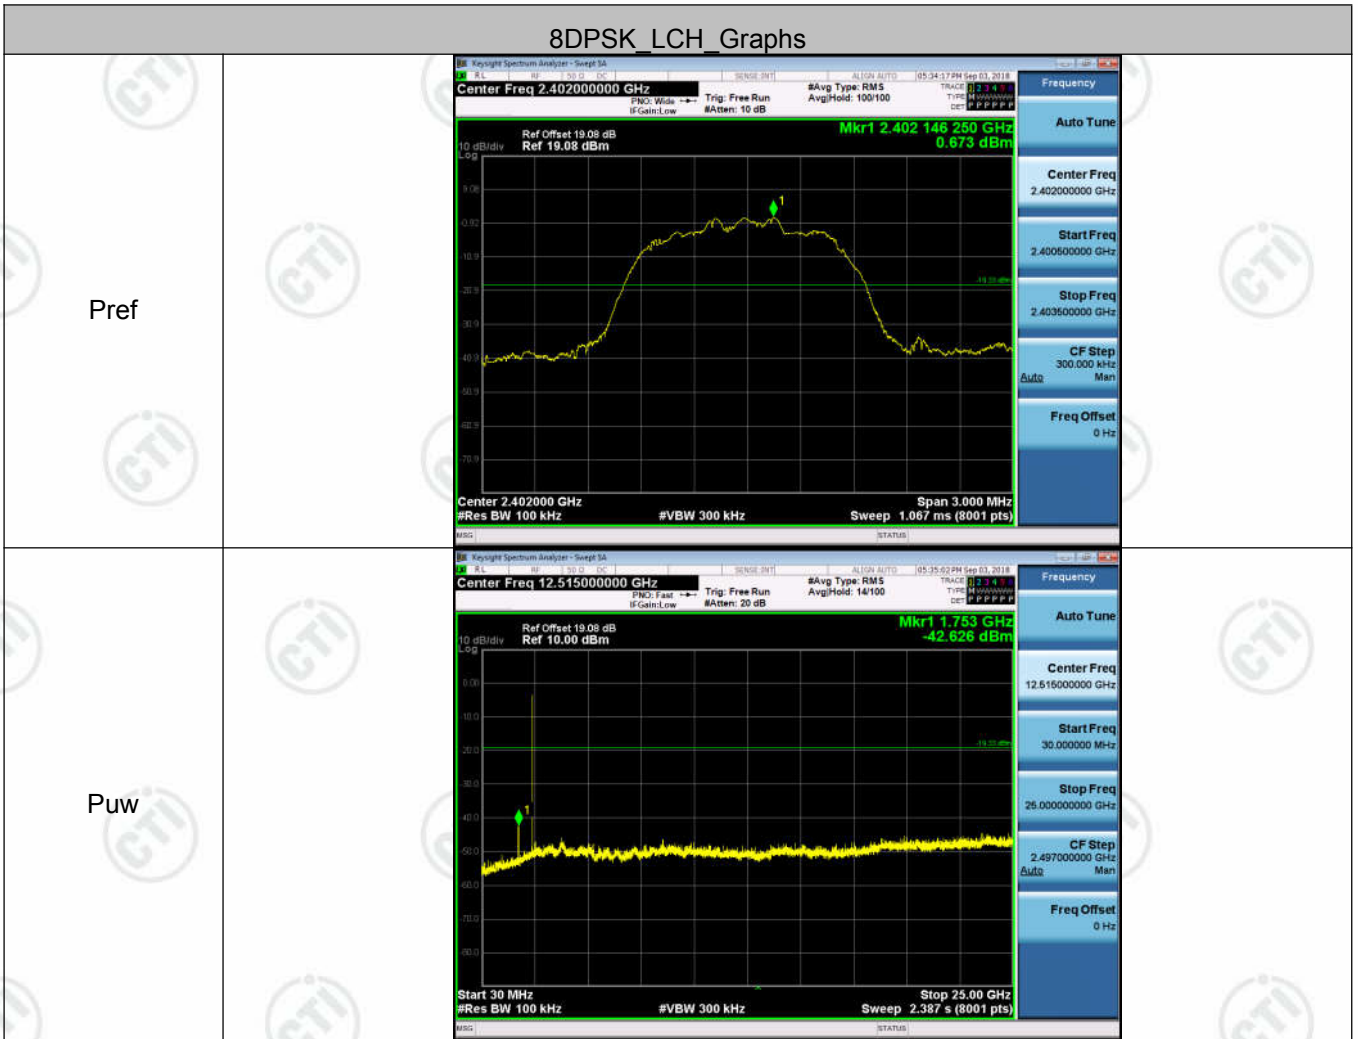

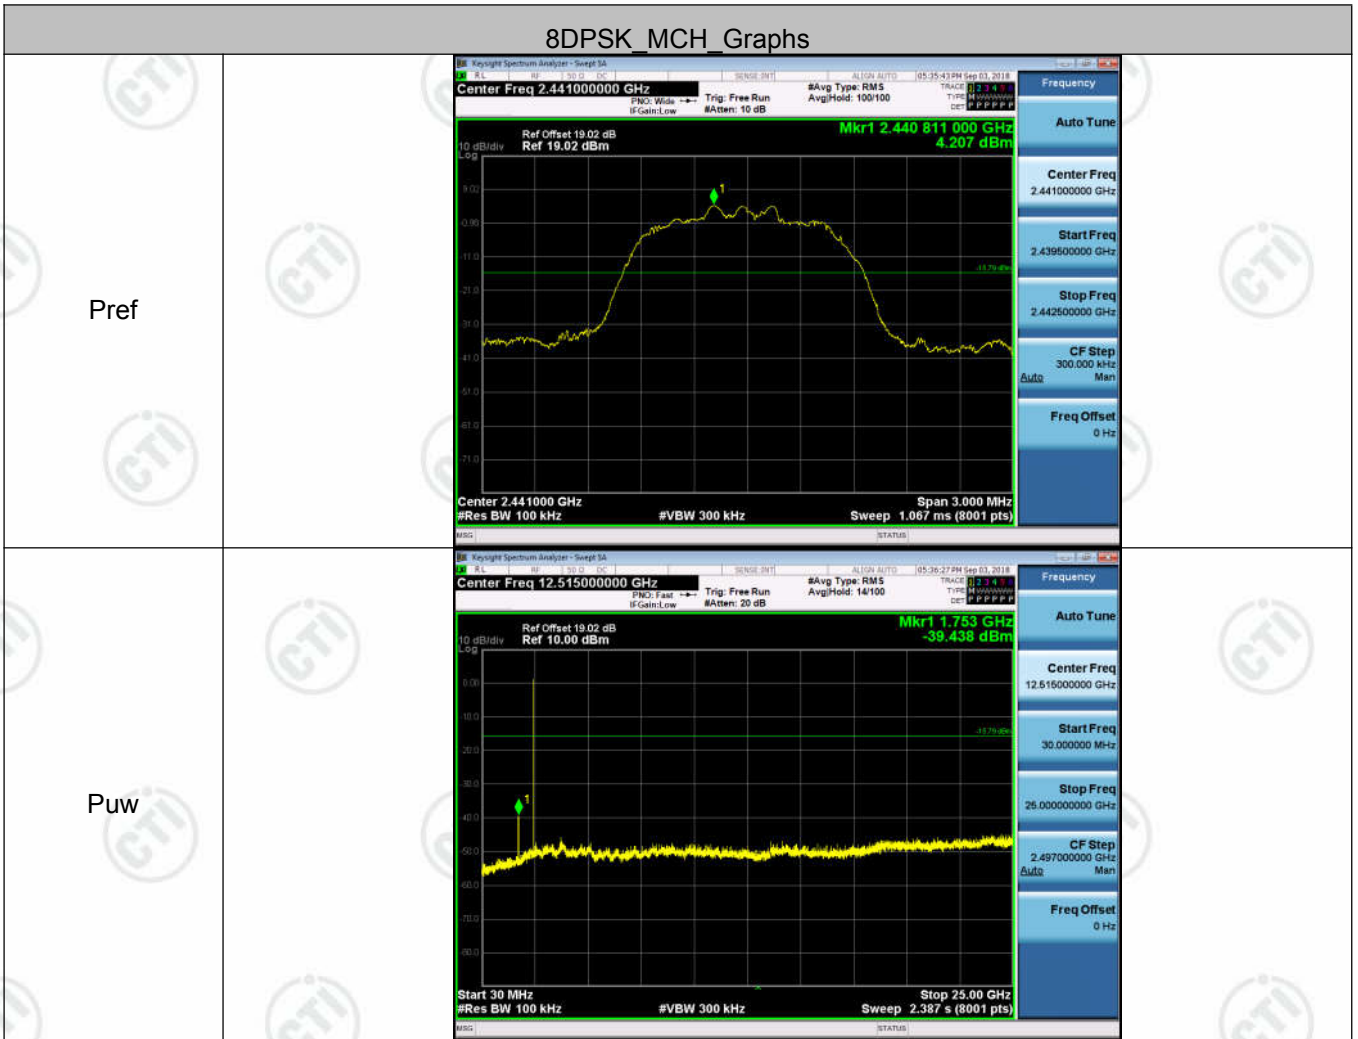




Appendix H): Pseudorandom Frequency Hopping Sequence
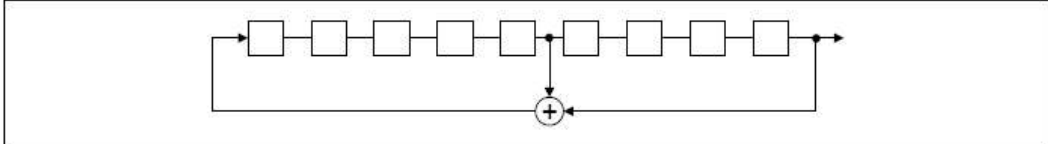
| | |
|--|---|
| Test Requirement: | 47 CFR Part 15C Section 15.247 (a)(1) requirement: |
| <p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p> | |
| <p>EUT Pseudorandom Frequency Hopping Sequence</p> | |
| <p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) | |
|  | |
| <p><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> | |
| <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> | |
|  | |
| <p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> | |
| <p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p> | |

Appendix I): Antenna Requirement

15.203 requirement:


An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is PCB Antenna and no consideration of replacement. The best case gain of the antenna is 0dBi.

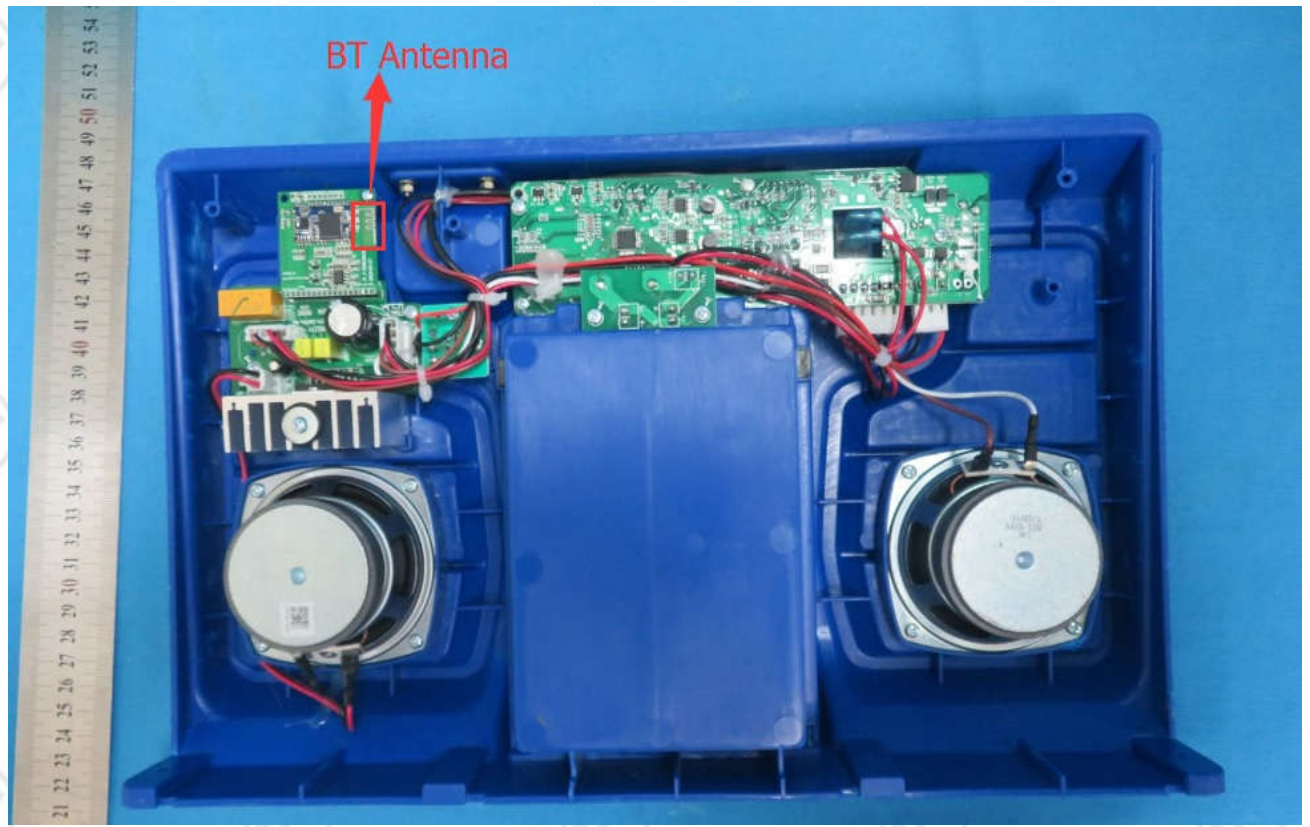

Appendix J): AC Power Line Conducted Emission


| <p>Test Procedure:</p> | <p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. | | | | | | | | | | | | | | |
|------------------------|---|-----------------------|--------------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| <p>Limit:</p> | <table border="1" data-bbox="497 1173 1366 1393"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p> | Frequency range (MHz) | Limit (dB μ V) | | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dB μ V) | | | | | | | | | | | | | | |
| | Quasi-peak | Average | | | | | | | | | | | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | | | | | | | | | | | |
| 0.5-5 | 56 | 46 | | | | | | | | | | | | | |
| 5-30 | 60 | 50 | | | | | | | | | | | | | |

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.


Live line:

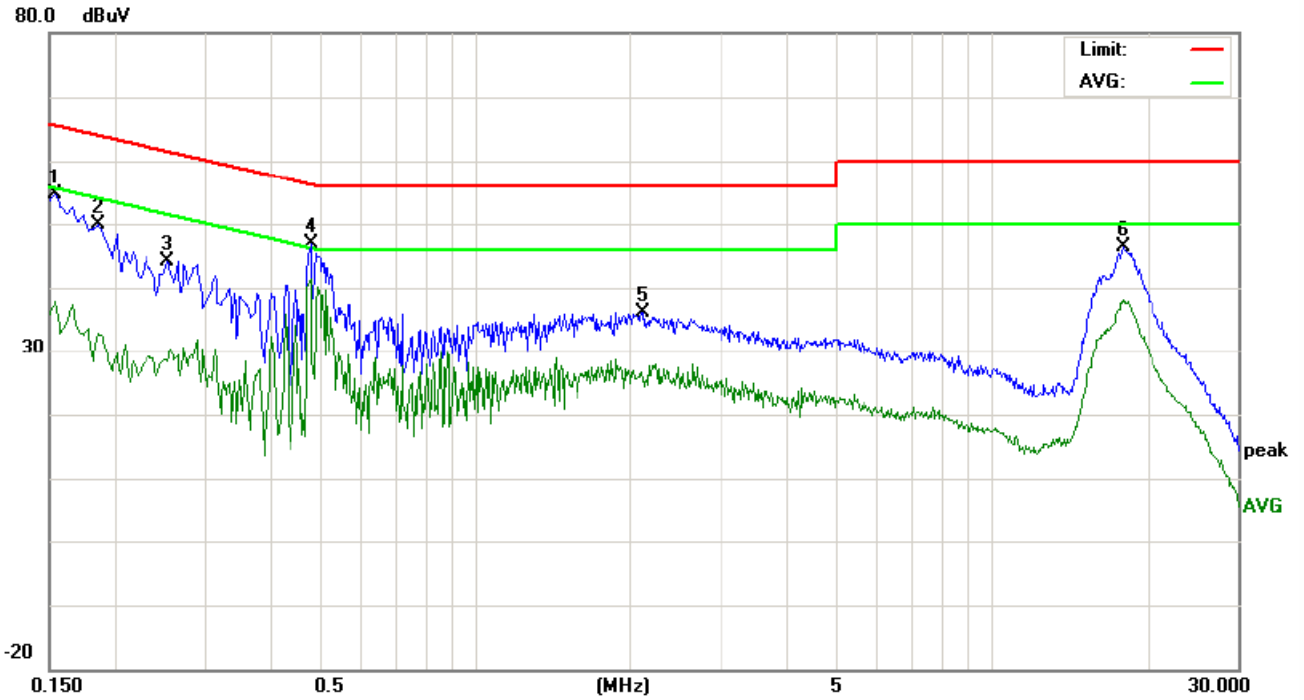

| No. | Freq. MHz | Reading_Level (dBuV) | | | Correct Factor dB | Measurement (dBuV) | | | Limit (dBuV) | | Margin (dB) | | P/F | Comment |
|-----|--------------|-------------------------|-------|-------|-------------------------|-----------------------|-------|-------|-----------------|-------|----------------|--------|-----|---------|
| | | Peak | QP | AVG | | peak | QP | AVG | QP | AVG | QP | AVG | | |
| 1 | 0.1539 | 44.97 | 41.75 | 28.10 | 9.76 | 54.73 | 51.51 | 37.86 | 65.78 | 55.78 | -14.27 | -17.92 | P | |
| 2 | 0.1884 | 43.95 | 40.17 | 26.06 | 9.72 | 53.67 | 49.89 | 35.78 | 64.10 | 54.10 | -14.21 | -18.32 | P | |
| 3 | 0.2540 | 34.48 | 31.26 | 18.75 | 9.75 | 44.23 | 41.01 | 28.50 | 61.62 | 51.62 | -20.61 | -23.12 | P | |
| 4 | 0.4820 | 37.19 | 33.47 | 31.64 | 9.72 | 46.91 | 43.19 | 41.36 | 56.30 | 46.30 | -13.11 | -4.94 | P | |
| 5 | 2.1140 | 26.51 | 24.11 | 15.82 | 9.72 | 36.23 | 33.83 | 25.54 | 56.00 | 46.00 | -22.17 | -20.46 | P | |
| 6 | 17.9660 | 36.28 | 33.26 | 28.11 | 10.04 | 46.32 | 43.30 | 38.15 | 60.00 | 50.00 | -16.70 | -11.85 | P | |

Neutral line:

80.0 dBuV

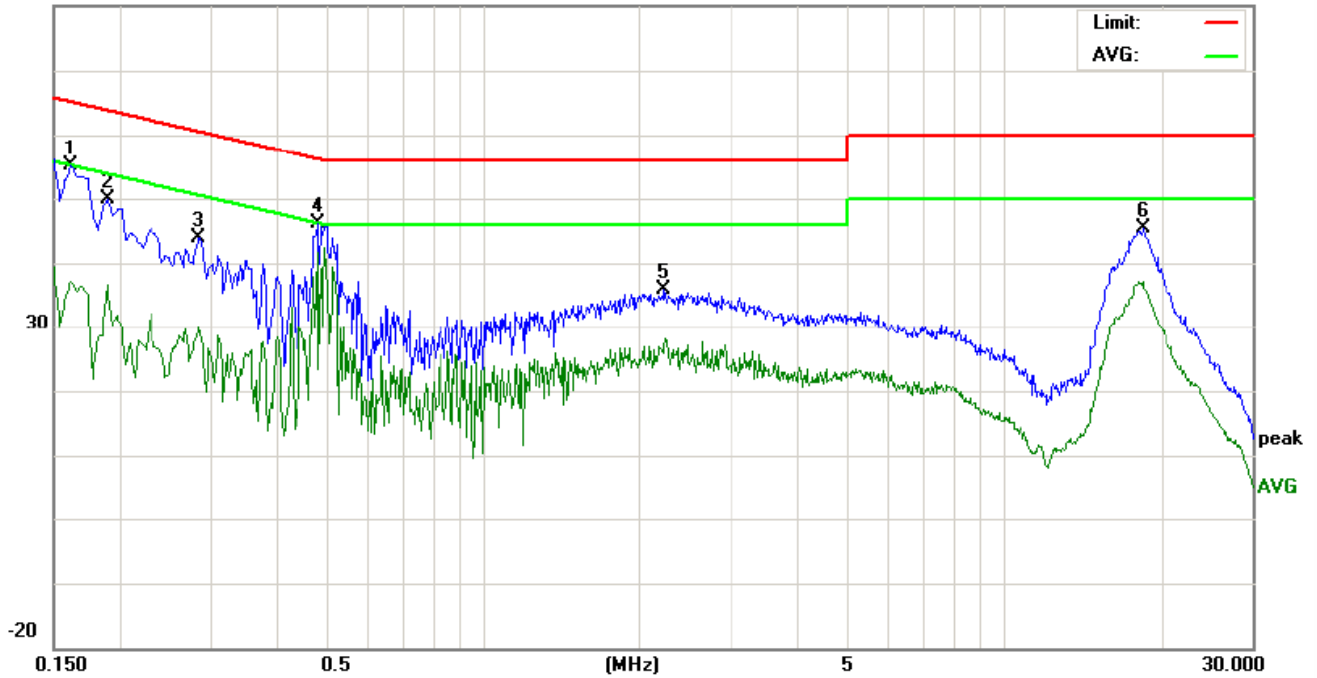

| No. | Freq. MHz | Reading_Level (dBuV) | | | Correct Factor dB | Measurement (dBuV) | | | Limit (dBuV) | | Margin (dB) | | P/F | Comment |
|-----|--------------|-------------------------|-------|-------|-------------------------|-----------------------|-------|-------|-----------------|-------|----------------|--------|-----|---------|
| | | Peak | QP | AVG | | peak | QP | AVG | QP | AVG | QP | AVG | | |
| 1 | 0.1620 | 45.36 | 43.15 | 27.41 | 9.75 | 55.11 | 52.90 | 37.16 | 65.36 | 55.36 | -12.46 | -18.20 | P | |
| 2 | 0.1900 | 40.18 | 37.86 | 26.93 | 9.72 | 49.90 | 47.58 | 36.65 | 64.03 | 54.03 | -16.45 | -17.38 | P | |
| 3 | 0.2860 | 34.18 | 31.25 | 20.35 | 9.77 | 43.95 | 41.02 | 30.12 | 60.64 | 50.64 | -19.62 | -20.52 | P | |
| 4 | 0.4820 | 36.47 | 33.47 | 31.93 | 9.72 | 46.19 | 43.19 | 41.65 | 56.30 | 46.30 | -13.11 | -4.65 | P | |
| 5 | 2.2300 | 26.20 | 23.15 | 17.01 | 9.71 | 35.91 | 32.86 | 26.72 | 56.00 | 46.00 | -23.14 | -19.28 | P | |
| 6 | 18.5459 | 35.26 | 32.84 | 26.33 | 10.05 | 45.31 | 42.89 | 36.38 | 60.00 | 50.00 | -17.11 | -13.62 | P | |

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix K): Restricted bands around fundamental frequency (Radiated)

| | | | | | |
|-----------------|--|--------------------------|------------------|--------|------------|
| Receiver Setup: | Frequency | Detector | RBW | VBW | Remark |
| | 30MHz-1GHz | Quasi-peak | 120kHz | 300kHz | Quasi-peak |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| | | Peak | 1MHz | 10Hz | Average |
| Test Procedure: | <p>Below 1GHz test procedure as below:</p> <p>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</p> <p>Above 1GHz test procedure as below:</p> <p>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>b. Test the EUT in the lowest channel , the Highest channel</p> <p>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>Repeat above procedures until all frequencies measured was complete.</p> | | | | |
| Limit: | Frequency | Limit (dB μ V/m @3m) | Remark | | |
| | 30MHz-88MHz | 40.0 | Quasi-peak Value | | |
| | 88MHz-216MHz | 43.5 | Quasi-peak Value | | |
| | 216MHz-960MHz | 46.0 | Quasi-peak Value | | |
| | 960MHz-1GHz | 54.0 | Quasi-peak Value | | |
| | Above 1GHz | 54.0 | Average Value | | |
| | | 74.0 | Peak Value | | |