



# RF TEST REPORT

Product Name: DTEN D7X

Model Name: DB71455, DB71455-S1

FCC ID: 2AQ7Q-DB71455

Issued For : DTEN Inc

97 E Brokaw Road suite 180 San Jose CA 95112

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Chen Hsong Industrial Park,  
No.177 Renmin West Road, Jinsha Community, Kengzi  
Street, Pingshan New District, Shenzhen, China

Report Number: LGT22G011RF10

Sample Received Date: July 25, 2022

Date of Tested: July 25, 2022 – August 29, 2022

Date of Issue: September 09, 2022

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



## TEST REPORT CERTIFICATION

**Applicant** DTEN Inc  
**Address** 97 E Brokaw Road suite 180 San Jose CA 95112  
**Manufacturer** DTEN Inc  
**Address** 97 E Brokaw Road suite 180 San Jose CA 95112  
**Product Name** DTEN D7X  
**Trade Mark** DTEN  
**Model Name** DB71455, DB71455-S1  
**Sample Status:** Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.247, Subpart C ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan  
Engineer

Approved by:

Vita Li

Vita Li  
Technical Director





## Table of Contents

<b>1. SUMMARY OF TEST RESULTS</b>	<b>6</b>
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
<b>2. GENERAL INFORMATION</b>	<b>8</b>
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF THE TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	10
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.5 EQUIPMENTS LIST	12
<b>3. EMC EMISSION TEST</b>	<b>13</b>
3.1 CONDUCTED EMISSION MEASUREMENT	13
3.2 TEST PROCEDURE	14
3.3 TEST SETUP	14
3.4 EUT OPERATING CONDITIONS	14
3.5 TEST RESULTS	15
<b>4. RADIATED EMISSION MEASUREMENT</b>	<b>19</b>
4.1 RADIATED EMISSION LIMITS	19
4.2 TEST PROCEDURE	21
4.3 TEST SETUP	22
4.4 EUT OPERATING CONDITIONS	22
4.5 FIELD STRENGTH CALCULATION	23
4.6 TEST RESULTS	24
<b>5. CONDUCTED SPURIOUS &amp; BAND EDGE EMISSION</b>	<b>40</b>
5.1 LIMIT	40
5.2 TEST PROCEDURE	40
5.3 TEST SETUP	40
5.4 EUT OPERATION CONDITIONS	40
5.5 TEST RESULTS	41
<b>6. POWER SPECTRAL DENSITY TEST</b>	<b>42</b>
6.1 LIMIT	42
6.2 TEST PROCEDURE	42
6.3 TEST SETUP	42
6.4 EUT OPERATION CONDITIONS	42



## Table of Contents

6.5 TEST RESULTS	42
<b>7. BANDWIDTH TEST</b>	<b>43</b>
7.1 LIMIT	43
7.2 TEST PROCEDURE	43
7.3 TEST SETUP	43
7.4 EUT OPERATION CONDITIONS	43
7.5 TEST RESULTS	43
<b>8. PEAK OUTPUT POWER TEST</b>	<b>44</b>
8.1 LIMIT	44
8.2 TEST PROCEDURE	44
8.3 TEST SETUP	44
8.4 EUT OPERATION CONDITIONS	44
8.5 TEST RESULTS	45
<b>9. ANTENNA REQUIREMENT</b>	<b>46</b>
9.1 STANDARD REQUIREMENT	46
9.2 EUT ANTENNA	46
<b>APPENDIX I:TEST RESULTS</b>	<b>47</b>
MAXIMUM PEAK CONDUCTED OUTPUT POWER	47
-6DB BANDWIDTH	48
OCCUPIED CHANNEL BANDWIDTH	51
MAXIMUM POWER SPECTRAL DENSITY LEVEL	54
BAND EDGE	57
CONDUCTED RF SPURIOUS EMISSION	60
DUTY CYCLE	64
<b>APPENDIX II: TEST PHOTO</b>	<b>66</b>



**Revision History**

Rev.	Issue Date	Contents
00	September 09, 2022	Initial Issue



## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:  
KDB 558074 D01 15.247 Meas Guidance v05r02.

<b>FCC Part 15.247, Subpart C</b>			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247 (a)(2)	6dB Bandwidth	PASS	--
15.247 (b)(3)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247 (d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247 (e)	Power Spectral Density	PASS	--
15.205	Restricted Band Edge Emission	PASS	--
Part 15.247(d)/ Part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

### NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2013.
- (3) For model DB71455 and DB71455-S1, the TP board have two types of A and B. DB71455-S1 with type A and DB71455 with type B were selected as the typical models for all necessary tests performed. For the details of type A&B, please refer to the EUT photos.



## 1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Chen Hsong Industrial Park, No.177 Renmin West Road, Jinsha Community, Kengzi Street, Pingshan New District, Shenzhen, China
Accreditation Certificate	FCC Registration No.: 746540
	A2LA Certificate No.: 6727.01

## 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.68$ dB
2	Unwanted Emissions, conducted	$\pm 2.988$ dB
3	All emissions, radiated 9K-30MHz	$\pm 2.84$ dB
4	All emissions, radiated 30M-1GHz	$\pm 4.39$ dB
5	All emissions, radiated 1G-6GHz	$\pm 5.10$ dB
6	All emissions, radiated >6G	$\pm 5.48$ dB
7	Conducted Emission (9KHz-150KHz)	$\pm 2.79$ dB
8	Conducted Emission (150KHz-30MHz)	$\pm 2.80$ dB



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	DTEN D7X																
Trade Mark	DTEN																
Model Name	DB71455																
Series Model	DB71455-S1																
Model Difference	DB71455-S1 is based on DB71455 to add a camera module on the left and right sides, the other parts are identical.																
Product Description	<p>The EUT is a DTEN D7X</p> <table border="1"><tr><td>Operation Frequency:</td><td>2402~2480 MHz</td></tr><tr><td>Modulation Type:</td><td>GFSK</td></tr><tr><td>Radio Technology:</td><td>BLE</td></tr><tr><td>Bluetooth Version:</td><td>4.2</td></tr><tr><td>Bluetooth Configuration:</td><td>1M PHY</td></tr><tr><td>Number Of Channel:</td><td>40</td></tr><tr><td>Antenna Designation:</td><td>Please refer to the Note 3.</td></tr><tr><td>Antenna Gain (dBi)</td><td>2</td></tr></table>	Operation Frequency:	2402~2480 MHz	Modulation Type:	GFSK	Radio Technology:	BLE	Bluetooth Version:	4.2	Bluetooth Configuration:	1M PHY	Number Of Channel:	40	Antenna Designation:	Please refer to the Note 3.	Antenna Gain (dBi)	2
Operation Frequency:	2402~2480 MHz																
Modulation Type:	GFSK																
Radio Technology:	BLE																
Bluetooth Version:	4.2																
Bluetooth Configuration:	1M PHY																
Number Of Channel:	40																
Antenna Designation:	Please refer to the Note 3.																
Antenna Gain (dBi)	2																
Channel List	Please refer to the Note 2.																
Rating	Input: 100-240V~ 50/60Hz 3.0A																
Hardware version number	OPSC17_V12																
Software version number	3.0.10																
Connecting I/O Port(s)	Please refer to the Note 1.																

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.





2.

Channel List							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	10	2422	20	2442	30	2462
01	2404	11	2424	21	2444	31	2464
02	2406	12	2426	22	2446	32	2466
03	2408	13	2428	23	2448	33	2468
04	2410	14	2430	24	2450	34	2470
05	2412	15	2432	25	2452	35	2472
06	2414	16	2434	26	2454	36	2474
07	2416	17	2436	27	2456	37	2476
08	2418	18	2438	28	2458	38	2478
09	2420	19	2440	29	2460	39	2480

3.

Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	DTEN	DB71455	PCB	N/A	2	BLE ANT

Note: The antenna information provide by manufacturer, applicable only to the tested sample identified in the report.



## 2.2 DESCRIPTION OF THE TEST MODES

For conducted test items and radiated spurious emissions  
Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively.

Worst Mode	Description	Data/Modulation
Mode 1	TX CH00(2402MHz)	1 MHz/GFSK
Mode 2	TX CH19(2440MHz)	1 MHz/GFSK
Mode 3	TX CH39(2480MHz)	1 MHz/GFSK

Worst Mode	Description	Data/Modulation
Mode 4	TX CH00(2402MHz)	2M PHY /GFSK
Mode 5	TX CH19(2440MHz)	2M PHY /GFSK
Mode 6	TX CH39(2480MHz)	2M PHY /GFSK

Note:

- (1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
- (2) We have be tested for all available U.S. voltage and frequency(For 120V,50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/60Hz is shown in the report.
- (3) The battery is fully-charged during the radited and RF conducted test.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 7: Keeping BT TX

## 2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.



## 2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

### Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
USB C-to-C cable	DTEN	N/A	N/A	1.9m
stylus	DTEN	N/A	N/A	N/A
Power cord	XIEKANG ELECTRONIC	N/A	N/A	3m, US plug
Camera	DTEN	N/A	N/A	2pcs

### Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Keyboard	Lenovo	EKB-536A	N/A	N/A
Mouse	Lenovo	EMS-537A	N/A	N/A
USB Flash disk	Hewlett-Packard	V206	N/A	2pcs
Laptop	Lenovo	Air 14	N/A	N/A
HDMI cable	GIMI	E81280-D	N/A	1.8m, shielded
HDMI cable	SONY	N/A	N/A	1.1m, shielded
Monitor	HKC	T275IU	N/A	N/A
Earphone	N/A	39630078	N/A	N/A
RJ45 cable	N/A	N/A	N/A	1m, unshielded
Router	CHINA TELECOM	WTA541	N/A	N/A

#### Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



## 2.5 EQUIPMENTS LIST

### Conducted Emission

Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU	100372	2022.04.12	2023.04.11
LISN	COM-POWER	LI-115	02032	2022.04.13	2023.04.12
LISN	SCHWARZBECK	NNLK 8121	00847	2022.08.19	2023.08.18
CE Cable	N.A	C01	N.A	2022.05.05	2023.05.04
Transient Limiter	CYBERTEK	EM5010A	E2250100049	2022.06.02	2023.06.01
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	EMC-I_V1.4.0.3_SKET				

### Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESU	100372	2022.04.12	2023.04.11
Spectrum Analyzer	Kesight	N9010B	MY60242508	2022.04.29	2023.04.28
Bilog Antenna	SCHAFFNER	CBL6112B	270S	2022.06.05	2025.06.04
Horn Antenna(18GHz)	SCHWARZBECK	3115	10SL0060	2022.06.02	2025.06.01
Horn Antenna(40 GHz)	A-INFO	LB-180400-KF	J211060273	2022.03.28	2025.03.27
Pre-amplifier(3GHz)	HP	8447D	2727A05655	2022.04.11	2023.04.10
Pre-amplifier(26.5G)	Agilent	8449B	3008A4722	2022.04.12	2023.04.11
Pre-amplifier(40 GHz)	com-mw	LNPA_18-40-01	18050001	2022.06.08	2023.06.07
RE Cable (9K-1G)	N.A	R01	N.A	2022.05.05	2023.05.04
RE Cable (1-26G)	N.A	R02	N.A	2022.05.05	2023.05.04
Temperature & Humidity	KTJ	TA218B	N.A	2022.05.05	2023.05.04
Testing Software	EMC-I_V1.4.0.3_SKET				

### RF Connected Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Generator	Keysight	N5182B	MY59100717	2022.04.30	2023.04.29
Signal Analyzer	Keysight	N9010B	MY60242508	2022.04.29	2023.04.28
Temperature & Humidity	KTJ	TA218B	N/A	2022.05.05	2023.05.04
Temperature & Humidity test chamber	AISRY	LX-1000L	171200018	2022.05.10	2023.05.09
Attenuator	eastsheep	90db	N/A	2022.04.29	2023.04.28
Testing Software	MTS 8310_2.0.0.0_MWRF-TEST				



### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ \* ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.2 TEST PROCEDURE

- a. The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN is at least 80 cm from the nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.3 TEST SETUP

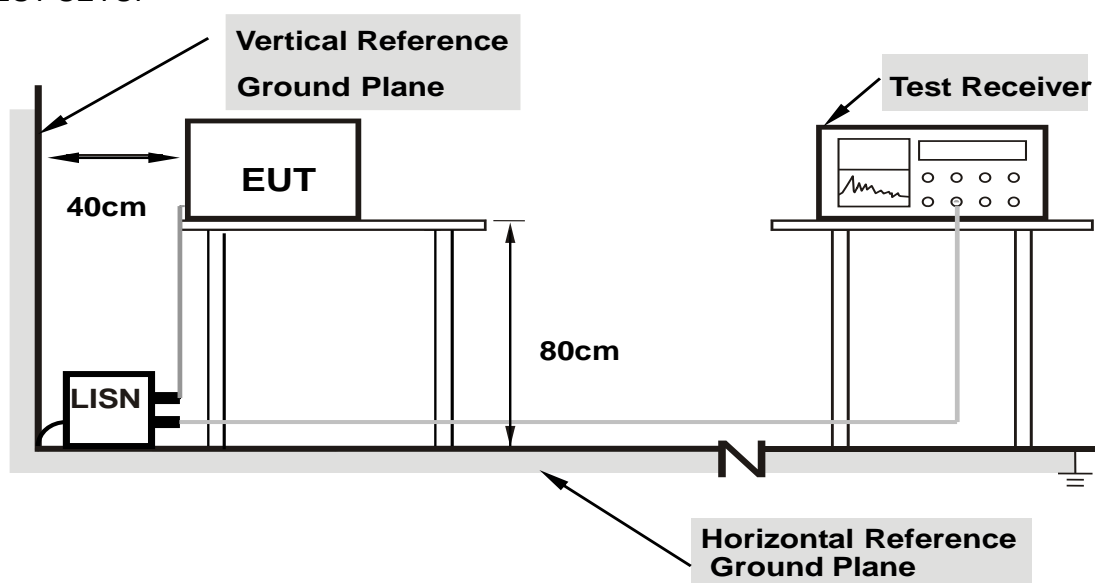

- Note: 1. Support units were connected to second LISN.**
- 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.**


### 3.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



### 3.5 TEST RESULTS


Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455	Temperature: 25°C
S/N:	Humidity: 45%RH
Test Mode: TX BT	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-18

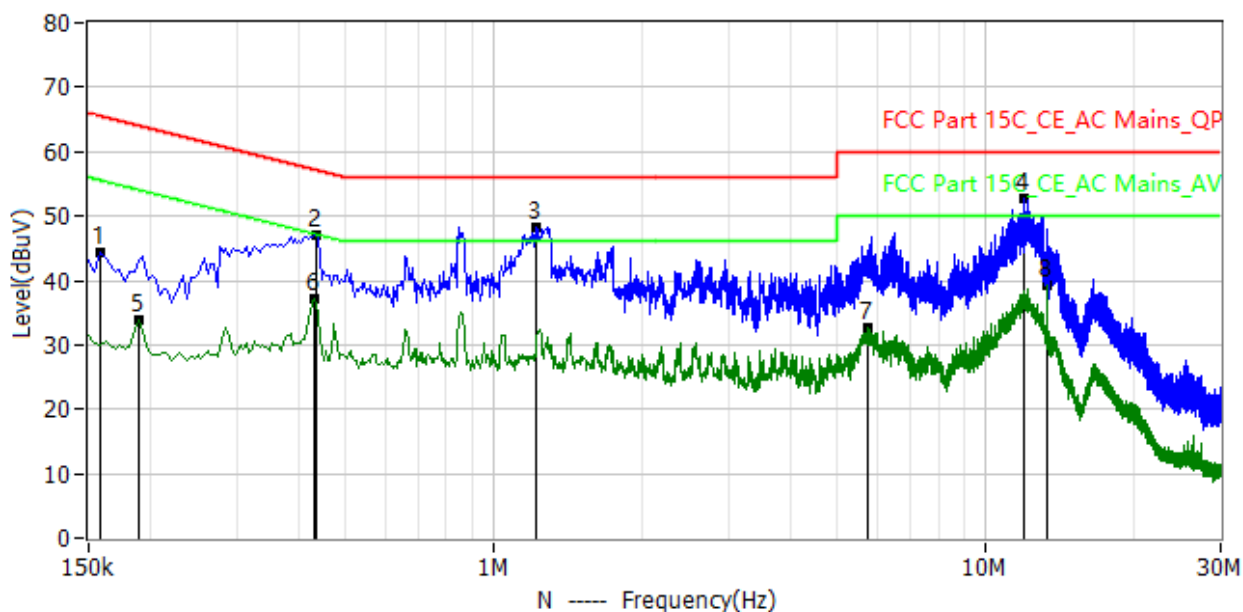

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1*	158.000kHz	65.57	44.40	-21.16	33.90	10.50	QP	N
2*	434.000kHz	57.18	47.16	-10.02	36.66	10.50	QP	N
3*	1.218MHz	56.00	48.38	-7.62	37.81	10.57	QP	N
4*	11.986MHz	60.00	52.74	-7.26	41.74	11.00	QP	N
5*	190.000kHz	54.04	33.76	-20.27	23.26	10.50	AV	N
6*	430.000kHz	47.25	37.21	-10.05	26.71	10.50	AV	N
7*	5.758MHz	50.00	32.57	-17.43	21.73	10.84	AV	N
8*	13.266MHz	50.00	39.39	-10.61	28.38	11.01	AV	N



Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455	Temperature: 25°C
S/N:	Humidity: 45%RH
Test Mode: TX BT	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-18

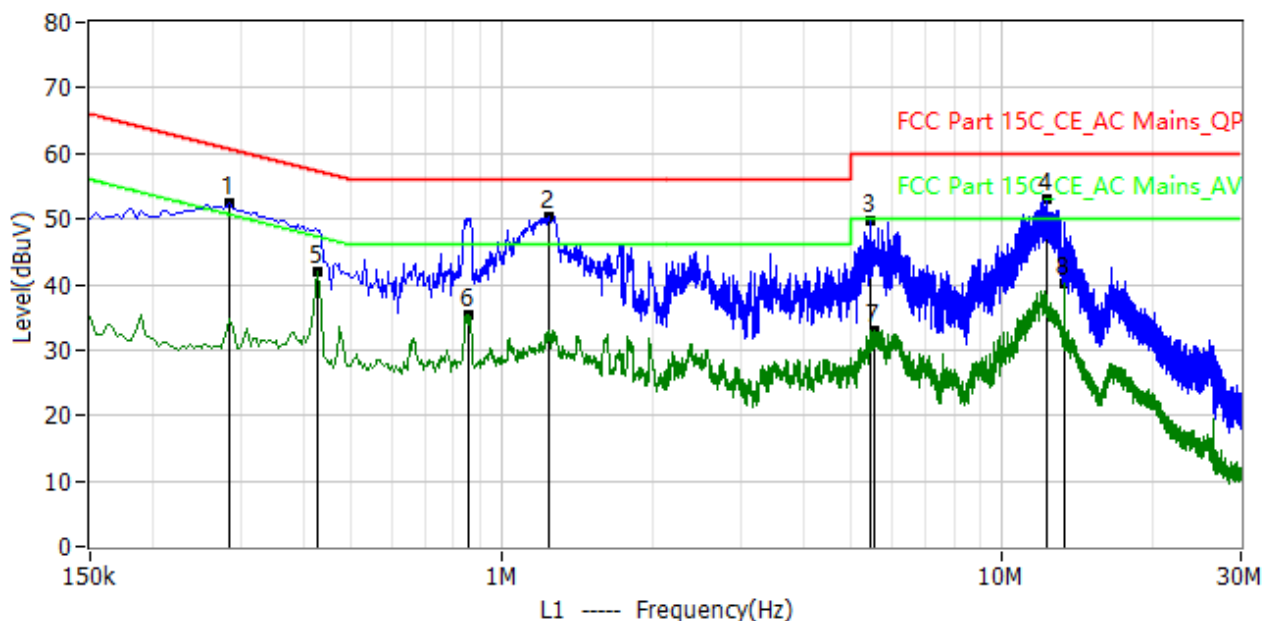


No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1*	286.000kHz	60.64	52.47	-8.17	41.97	10.50	QP	L1
2*	1.238MHz	56.00	50.23	-5.77	39.65	10.58	QP	L1
3*	5.438MHz	60.00	49.78	-10.22	38.95	10.83	QP	L1
4*	12.286MHz	60.00	53.10	-6.90	42.11	10.99	QP	L1
5*	426.000kHz	47.33	41.98	-5.35	31.48	10.50	AV	L1
6*	858.000kHz	46.00	35.36	-10.64	24.84	10.52	AV	L1
7*	5.534MHz	50.00	33.04	-17.00	22.21	10.83	AV	L1
8*	13.266MHz	50.00	40.12	-9.90	29.11	11.01	AV	L1






Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455-S1	Temperature: 25°C
S/N:	Humidity: 45%RH
Test Mode: TX BT	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-15

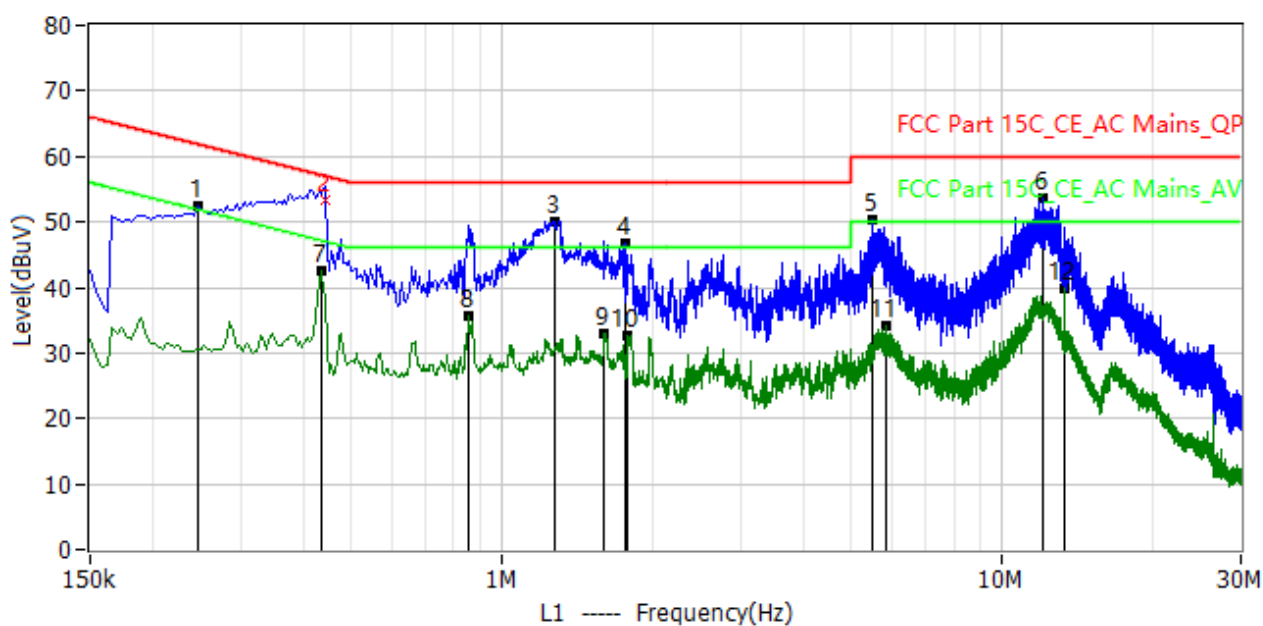

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1*	246.000kHz	61.90	52.32	-9.60	41.82	10.50	PK	L1
2	442.000kHz	57.00	53.31	-3.70	42.81	10.50	QP	L1
3*	1.274MHz	56.00	50.14	-5.90	39.55	10.59	PK	L1
4*	1.758MHz	56.00	46.89	-9.10	36.20	10.69	PK	L1
5*	5.478MHz	60.00	50.32	-9.70	39.49	10.83	PK	L1
6*	12.082MHz	60.00	53.58	-6.40	42.59	10.99	PK	L1
7*	434.000kHz	47.20	42.69	-4.50	32.19	10.50	AV	L1
8*	854.000kHz	46.00	35.53	-10.50	25.01	10.52	AV	L1
9*	1.602MHz	46.00	32.99	-13.00	22.34	10.65	AV	L1
10*	1.786MHz	46.00	32.68	-13.30	21.99	10.69	AV	L1
11*	5.838MHz	50.00	34.17	-15.80	23.33	10.84	AV	L1
12*	13.274MHz	50.00	39.98	-10.00	28.97	11.01	AV	L1



Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455-S1	Temperature: 25°C
S/N:	Humidity: 45%RH
Test Mode: TX BT	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-15

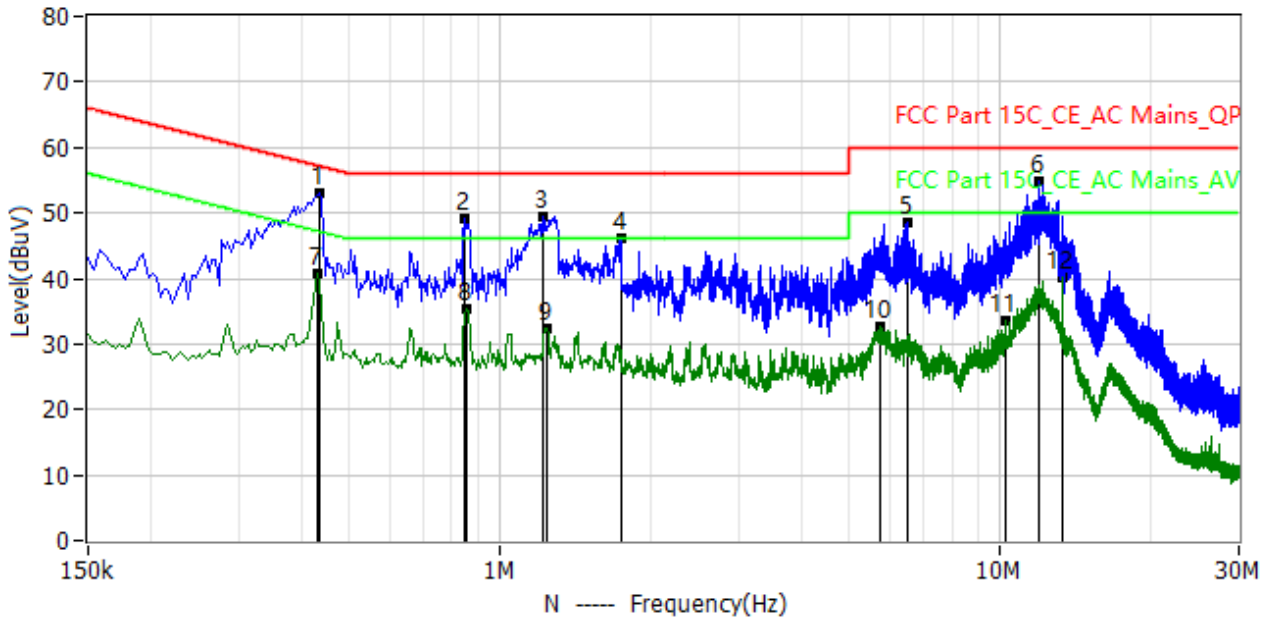

No.	Frequency	Limit dBuV	Level dBuV	Delta dB	Reading dBuV	Factor dB	Detector	Phase
1*	434.000kHz	57.20	52.98	-4.20	42.48	10.50	QP	N
2*	850.000kHz	56.00	49.12	-6.90	38.60	10.52	QP	N
3*	1.218MHz	56.00	49.42	-6.60	38.85	10.57	QP	N
4*	1.750MHz	56.00	46.08	-9.90	35.39	10.69	QP	N
5*	6.530MHz	60.00	48.57	-11.40	37.70	10.87	QP	N
6*	11.986MHz	60.00	54.69	-5.30	43.69	11.00	QP	N
7*	430.000kHz	47.30	40.68	-6.60	30.18	10.50	AV	N
8*	858.000kHz	46.00	35.41	-10.60	24.89	10.52	AV	N
9*	1.242MHz	46.00	32.45	-13.50	21.87	10.58	AV	N
10*	5.758MHz	50.00	32.73	-17.30	21.89	10.84	AV	N
11*	10.202MHz	50.00	33.48	-16.50	22.52	10.96	AV	N
12*	13.266MHz	50.00	40.15	-9.90	29.14	11.01	AV	N



## 4. RADIATED EMISSION MEASUREMENT

### 4.1 RADIATED EMISSION LIMITS

In case the emission fall within the Restricted band specified on Part15.205 (a)&209(a) limit in the table and according to ANSI C63.10-2013 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1GHz-25 GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			



For Radiated Emission

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP/AV
Start Frequency	9 KHz/150KHz(Peak/QP/AV)
Stop Frequency	150KHz/30MHz(Peak/QP/AV)
RB / VB (emission in restricted band)	200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz); 200Hz (From 9kHz to 0.15MHz)/ 9KHz (From 0.15MHz to 30MHz)

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/QP
Start Frequency	30 MHz(Peak/QP)
Stop Frequency	1000 MHz (Peak/QP)
RB / VB (emission in restricted band)	120 KHz / 300 KHz

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak/AV
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier hamonic(Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)

For Restricted band

Spectrum Parameter	Setting
Detector	Peak/AV
Start/Stop Frequency	Lower Band Edge: 2310 to 2410 MHz Upper Band Edge: 2475 to 2500 MHz
RB / VB	1 MHz / 3 MHz(Peak) 1 MHz/1/T MHz(AVG)



Receiver Parameter	Setting
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.2 TEST PROCEDURE


- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m(above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

### 4.3 TEST SETUP


#### (A) Radiated Emission Test-Up Frequency Below 30MHz

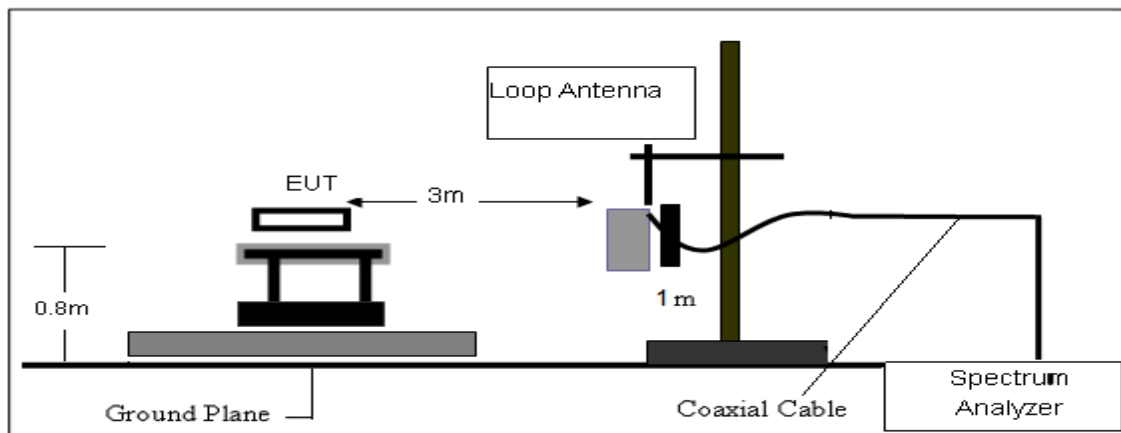

#### (B) Radiated Emission Test-Up Frequency 30MHz~1GHz

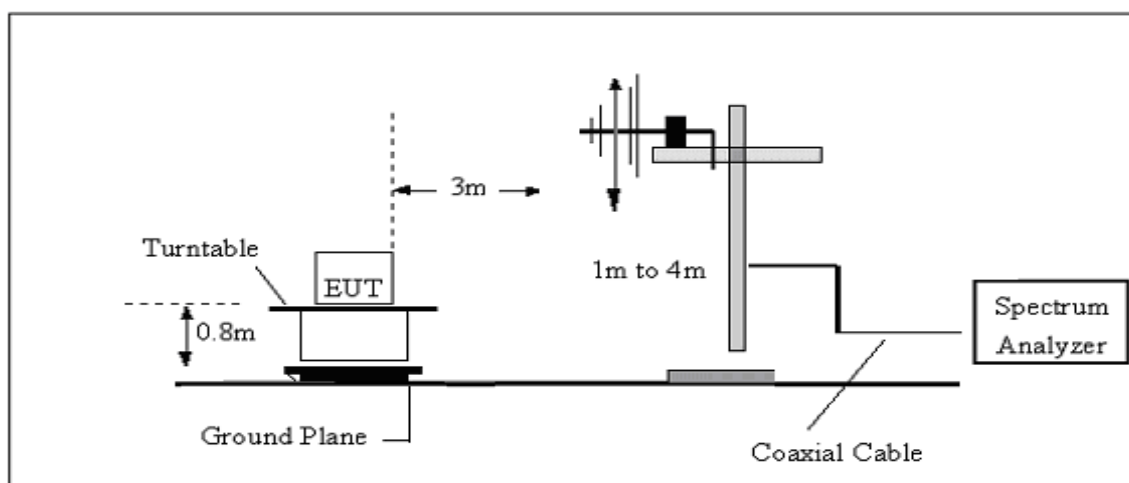

#### (C) Radiated Emission Test-Up Frequency Above 1GHz

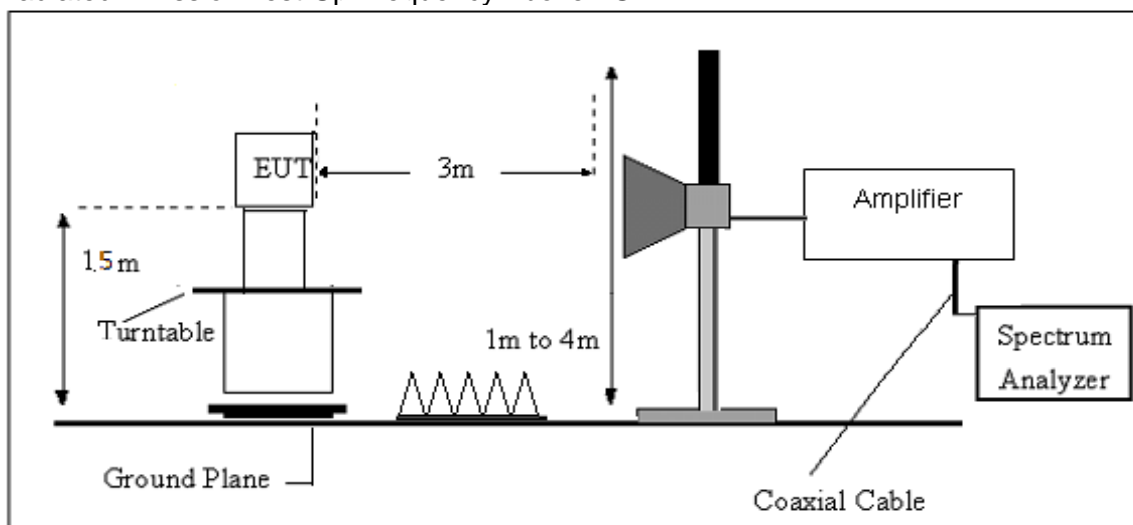

### 4.4 EUT OPERATING CONDITIONS

Please refer to section 3.4 of this report.



#### 4.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example


Frequency (MHz)	FS (dB $\mu$ V/m)	RA (dB $\mu$ V/m)	AF (dB)	CL (dB)	AG (dB)	Factor (dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



#### 4.6 TEST RESULTS

Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455	Temperature: 23.5°C
S/N:	Humidity: 54%RH
Test Mode: TX BT	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-05

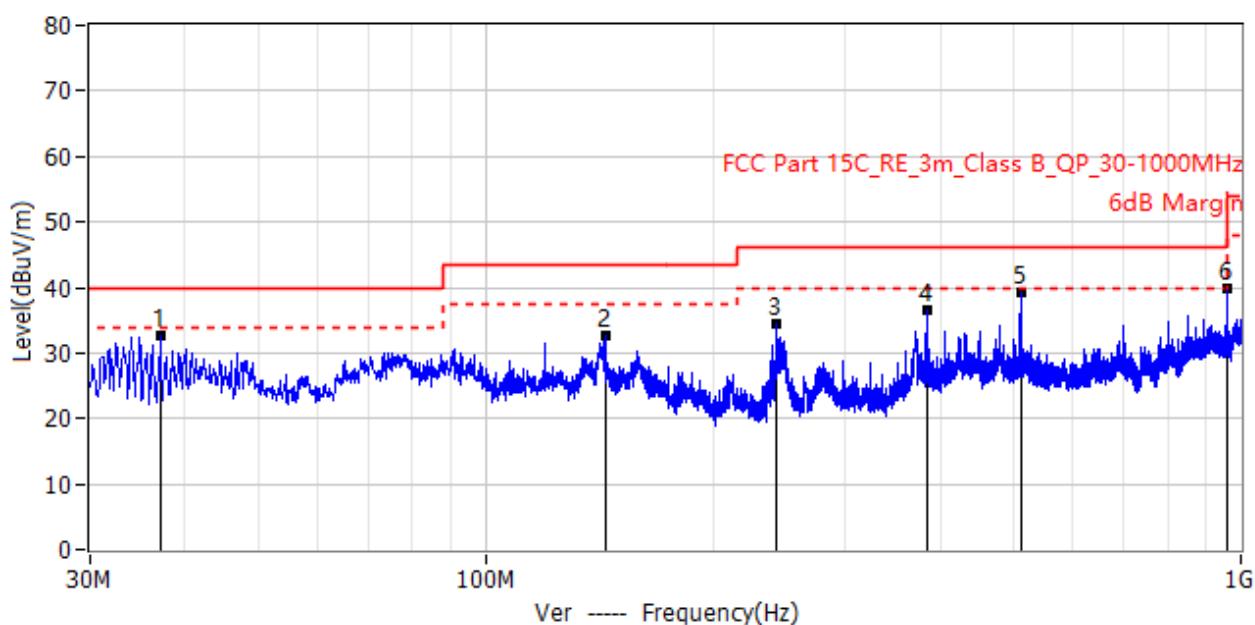


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	37.154MHz	40.0	32.6	-7.4	40.5	-7.9	PK	QP	100.0	290.0
2*	143.975MHz	43.5	32.8	-10.7	43.5	-10.7	PK	QP	100.0	175.0
3*	242.673MHz	46.0	34.5	-11.5	44.5	-10.0	PK	QP	100.0	44.0
4*	383.929MHz	46.0	36.5	-9.5	42.0	-5.5	PK	QP	100.0	14.0
5*	510.878MHz	46.0	39.3	-6.7	43.6	-4.3	PK	QP	100.0	353.0
6*	959.988MHz	46.0	39.9	-6.1	36.9	3.0	PK	QP	100.0	2.0






Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455	Temperature: 23.5°C
S/N:	Humidity: 54%RH
Test Mode: TX BT	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-05

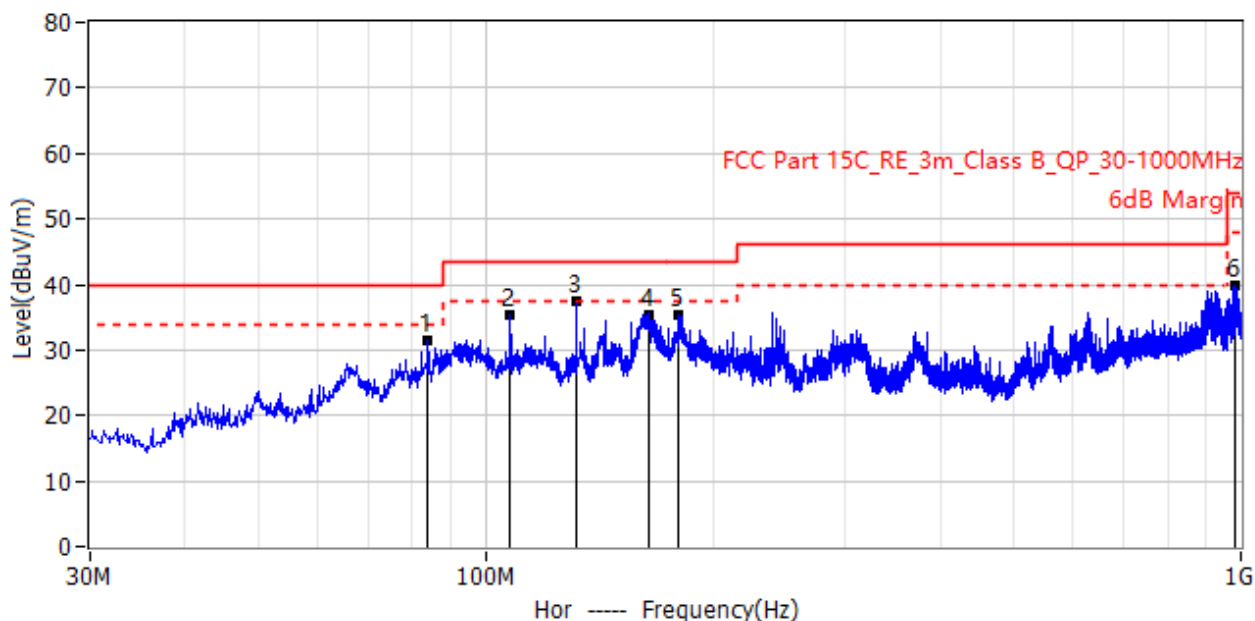

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	83.956MHz	40.0	31.5	-8.5	44.6	-13.1	QP	Hor	200.0	347.0
2*	107.964MHz	43.5	35.5	-8.0	46.2	-10.7	QP	Hor	200.0	329.0
3*	131.971MHz	43.5	37.5	-6.0	48.2	-10.7	QP	Hor	150.0	0.0
4*	164.588MHz	43.5	35.5	-8.0	46.5	-11.0	QP	Hor	190.0	32.0
5*	179.986MHz	43.5	35.5	-8.0	47.4	-11.9	QP	Hor	100.0	36.0
6*	980.115MHz	54.0	40.0	-14.0	36.7	3.3	QP	Hor	100.0	58.0




Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455	Temperature: 25°C
S/N:	Humidity: 45%RH
Test Mode: TX BT	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-09

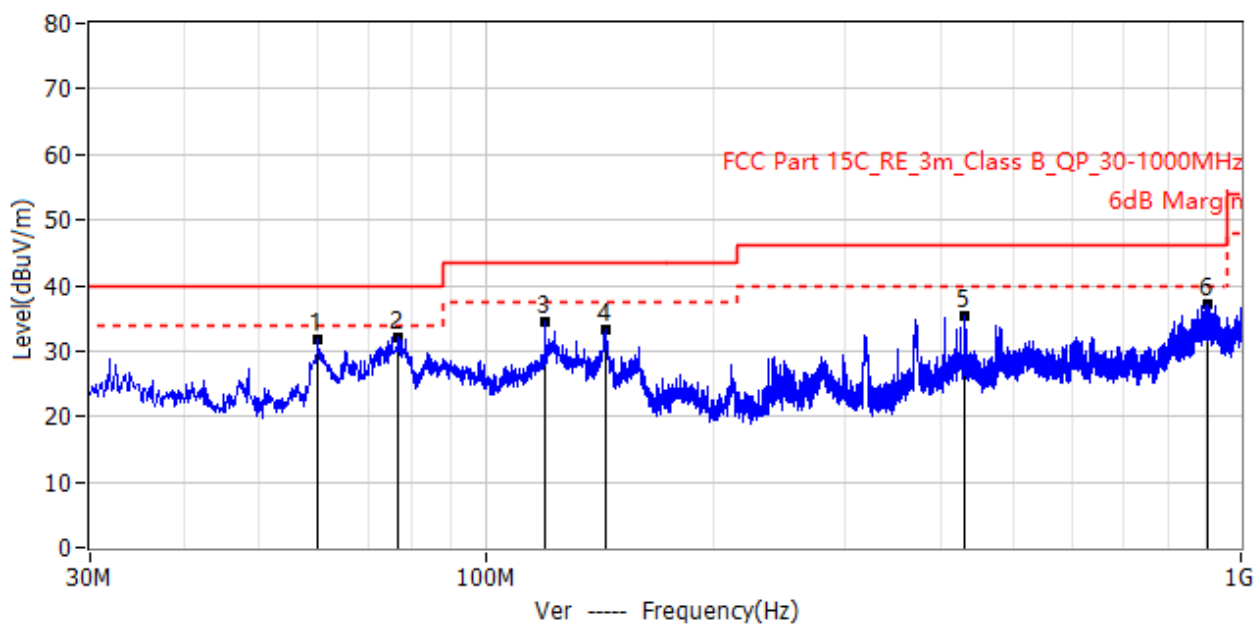

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	59.949MHz	40.0	31.8	-8.2	45.9	-14.1	QP	Ver	100.0	0.0
2*	76.803MHz	40.0	32.1	-7.9	48.4	-16.3	QP	Ver	100.0	3.0
3*	119.968MHz	43.5	34.5	-9.0	47.5	-13.0	QP	Ver	100.0	338.0
4*	144.218MHz	43.5	33.2	-10.3	43.9	-10.7	QP	Ver	100.0	7.0
5*	431.944MHz	46.0	35.4	-10.6	40.4	-5.0	QP	Ver	100.0	359.0
6*	905.425MHz	46.0	37.1	-8.9	34.4	2.7	QP	Ver	100.0	359.0




Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455	Temperature: 25°C
S/N:	Humidity: 45%RH
Test Mode: TX BT	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-09

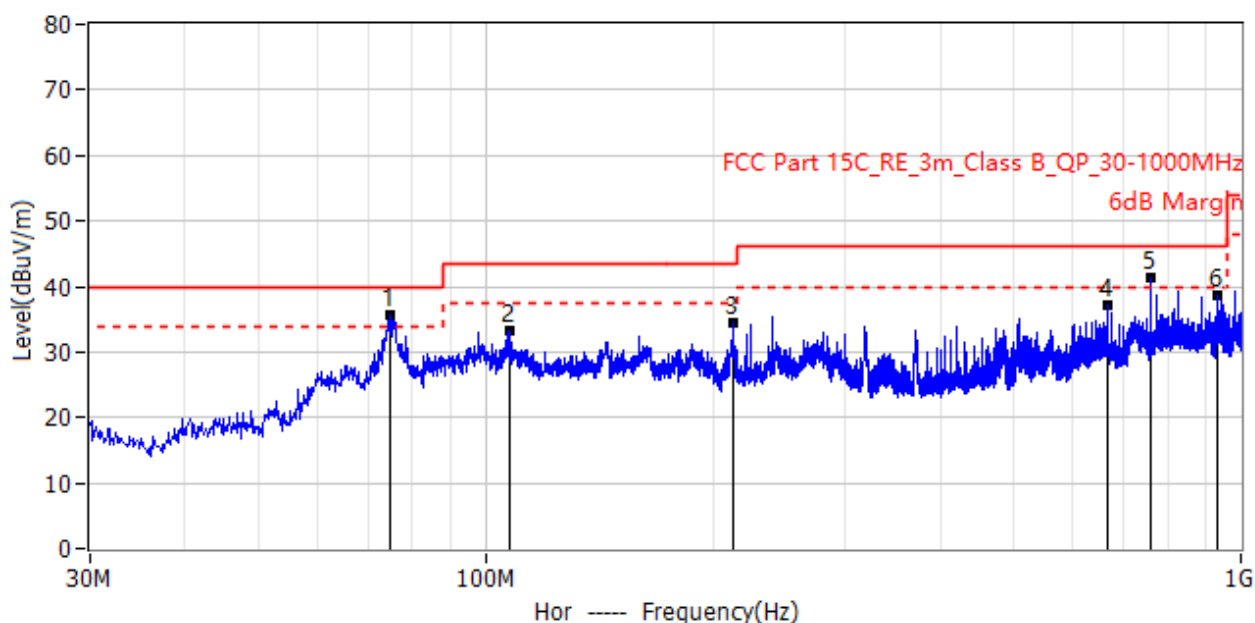

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	74.620MHz	40.0	35.7	-4.3	50.5	-14.8	QP	Hor	200.0	232.0
2*	107.479MHz	43.5	33.2	-10.3	43.9	-10.7	QP	Hor	173.0	17.0
3*	212.724MHz	43.5	34.4	-9.1	45.3	-10.9	QP	Hor	100.0	311.0
4*	666.563MHz	46.0	37.3	-8.7	39.3	-2.0	QP	Hor	100.0	57.0
5*	761.138MHz	46.0	41.4	-4.6	41.6	-0.2	QP	Hor	100.0	297.0
6*	933.191MHz	46.0	38.7	-7.3	36.2	2.5	QP	Hor	100.0	57.0




Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455	Temperature: 27.4°C
S/N:	Humidity: 54%RH
Test Mode: BLE_Lowest_CH	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-23

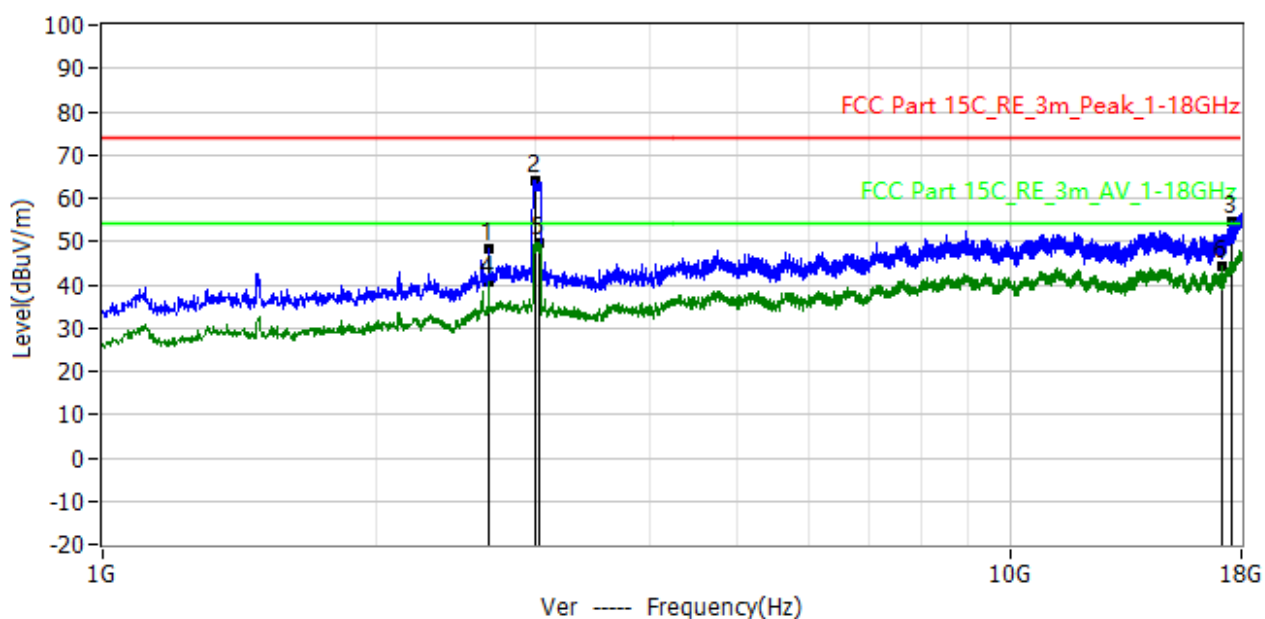

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	2.666GHz	74.00	48.32	-25.68	58.43	-10.11	QP	Ver	100.0	0.0
2*	3.002GHz	74.00	64.23	-9.77	72.57	-8.34	QP	Ver	100.0	0.0
3*	17.533GHz	74.00	54.78	-19.22	42.99	11.79	QP	Ver	100.0	0.0
4*	2.668GHz	54.00	40.67	-13.33	50.77	-10.10	AV	Ver	100.0	0.0
5*	3.029GHz	54.00	49.85	-4.15	58.20	-8.35	AV	Ver	100.0	0.0
6*	17.099GHz	54.00	44.35	-9.65	34.16	10.19	AV	Ver	100.0	0.0




Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455	Temperature: 27.4°C
S/N:	Humidity: 54%RH
Test Mode: BLE_Lowest_CH	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-23

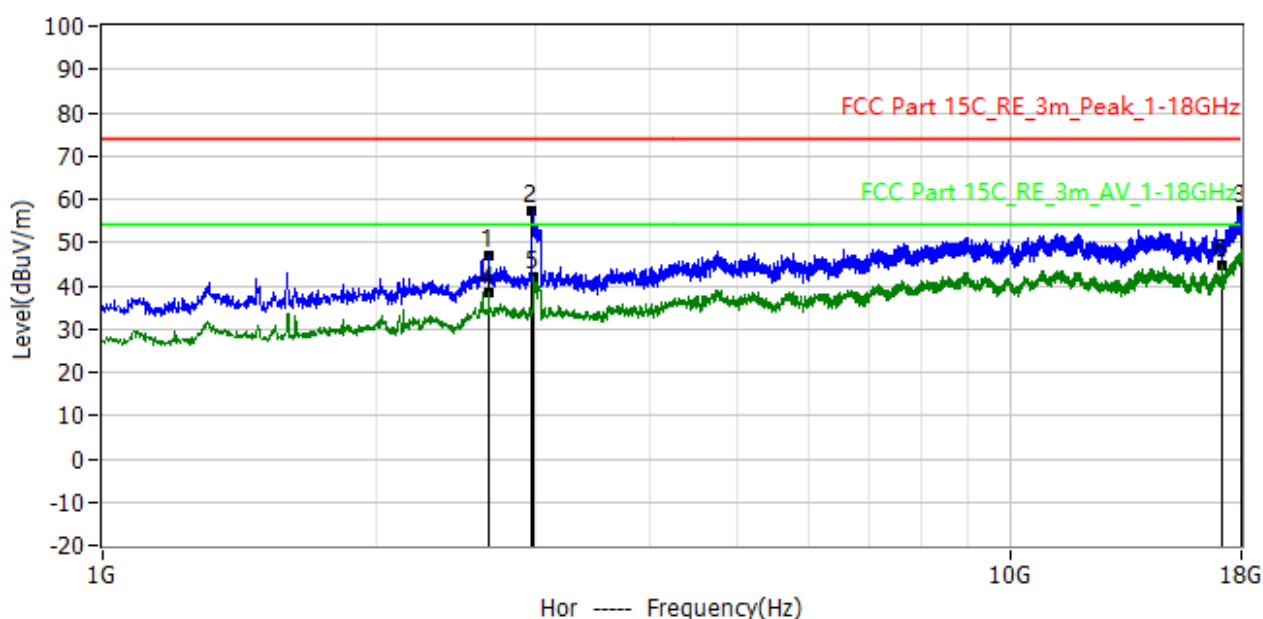

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	2.666GHz	74.00	46.83	-27.17	56.94	-10.11	QP	Hor	100.0	0.0
2*	2.976GHz	74.00	57.35	-16.65	65.82	-8.47	QP	Hor	100.0	0.0
3*	18.000GHz	74.00	57.10	-16.90	43.58	13.52	QP	Hor	100.0	0.0
4*	2.668GHz	54.00	38.33	-15.67	48.43	-10.10	AV	Hor	100.0	0.0
5*	2.978GHz	54.00	42.23	-11.77	50.68	-8.45	AV	Hor	100.0	0.0
6*	17.099GHz	54.00	44.57	-9.43	34.38	10.19	AV	Hor	100.0	0.0




Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455	Temperature: 27.4°C
S/N:	Humidity: 54%RH
Test Mode: BLE_Middle_CH	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-23

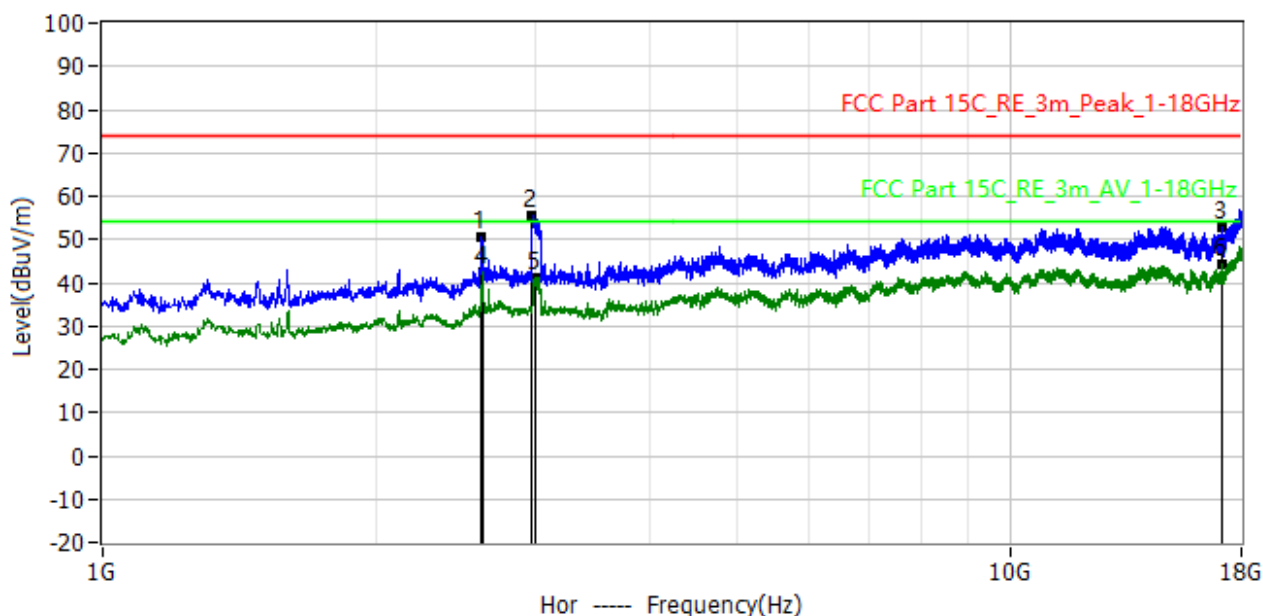

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	2.617GHz	74.00	50.56	-23.44	60.93	-10.37	QP	Hor	100.0	0.0
2*	2.976GHz	74.00	55.66	-18.34	64.13	-8.47	QP	Hor	100.0	0.0
3*	17.099GHz	74.00	52.75	-21.25	42.56	10.19	QP	Hor	100.0	0.0
4*	2.619GHz	54.00	42.47	-11.53	52.82	-10.35	AV	Hor	100.0	0.0
5*	2.991GHz	54.00	41.13	-12.87	49.52	-8.39	AV	Hor	100.0	0.0
6*	17.099GHz	54.00	44.16	-9.84	33.97	10.19	AV	Hor	100.0	0.0




Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455	Temperature: 27.4°C
S/N:	Humidity: 54%RH
Test Mode: BLE_Middle_CH	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-23

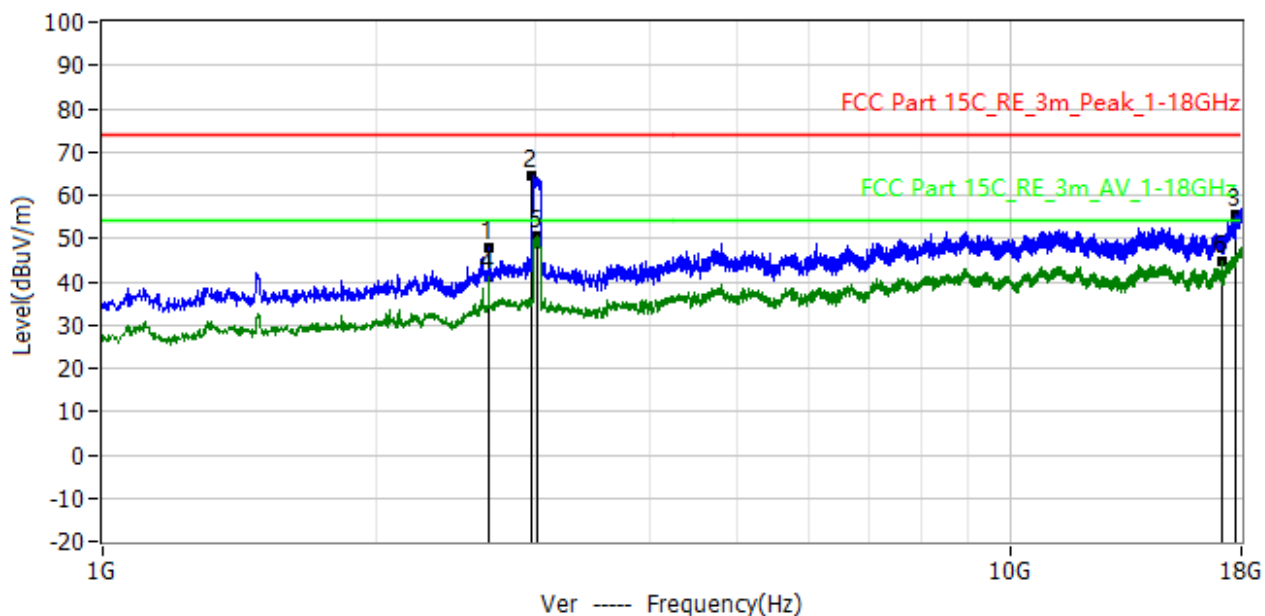

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	2.666GHz	74.00	47.72	-26.28	57.83	-10.11	QP	Ver	100.0	0.0
2*	2.976GHz	74.00	64.31	-9.69	72.78	-8.47	QP	Ver	100.0	0.0
3*	17.732GHz	74.00	55.45	-18.55	42.92	12.53	QP	Ver	100.0	0.0
4*	2.668GHz	54.00	40.99	-13.01	51.09	-10.10	AV	Ver	100.0	0.0
5*	3.019GHz	54.00	50.61	-3.39	58.96	-8.35	AV	Ver	100.0	0.0
6*	17.099GHz	54.00	44.61	-9.39	34.42	10.19	AV	Ver	100.0	0.0



Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455	Temperature: 27.4°C
S/N:	Humidity: 54%RH
Test Mode: BLE_Highest_CH	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-23

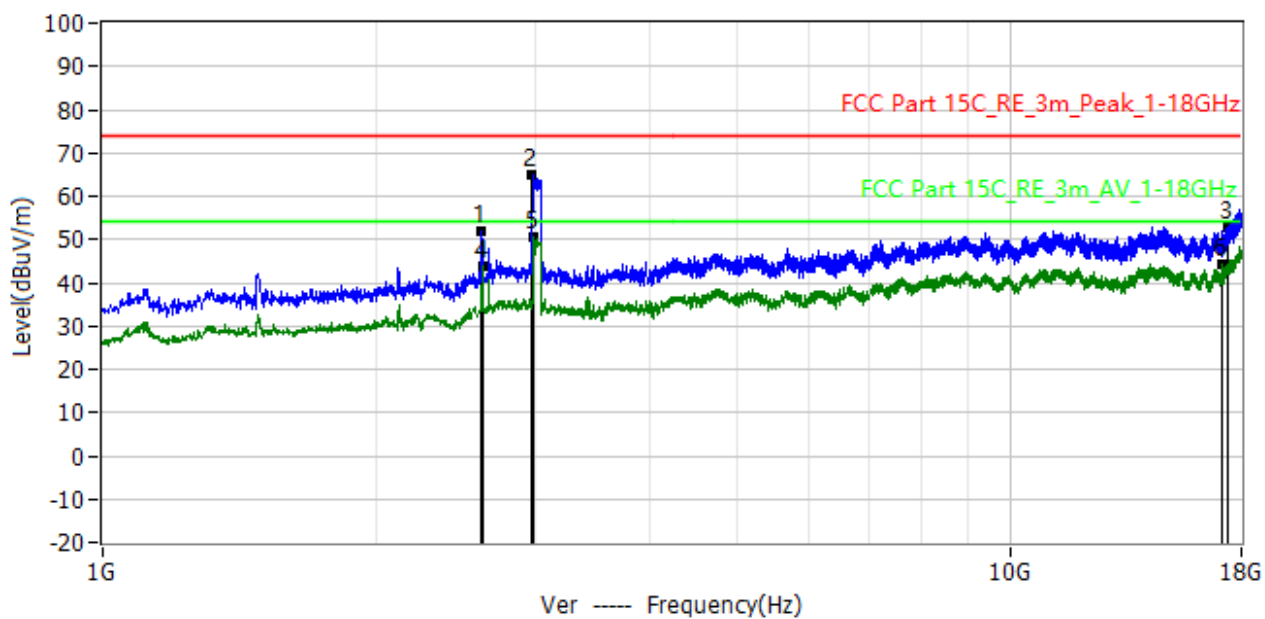


No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	2.617GHz	74.00	51.93	-22.07	62.30	-10.37	QP	Ver	100.0	0.0
2*	2.976GHz	74.00	64.87	-9.13	73.34	-8.47	QP	Ver	100.0	0.0
3*	17.348GHz	74.00	52.99	-21.01	41.88	11.11	QP	Ver	100.0	0.0
4*	2.619GHz	54.00	43.86	-10.14	54.21	-10.35	AV	Ver	100.0	0.0
5*	2.978GHz	54.00	50.47	-3.53	58.92	-8.45	AV	Ver	100.0	0.0
6*	17.099GHz	54.00	44.34	-9.66	34.15	10.19	AV	Ver	100.0	0.0






Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455	Temperature: 27.4°C
S/N:	Humidity: 54%RH
Test Mode: BLE_Highest_CH	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-23

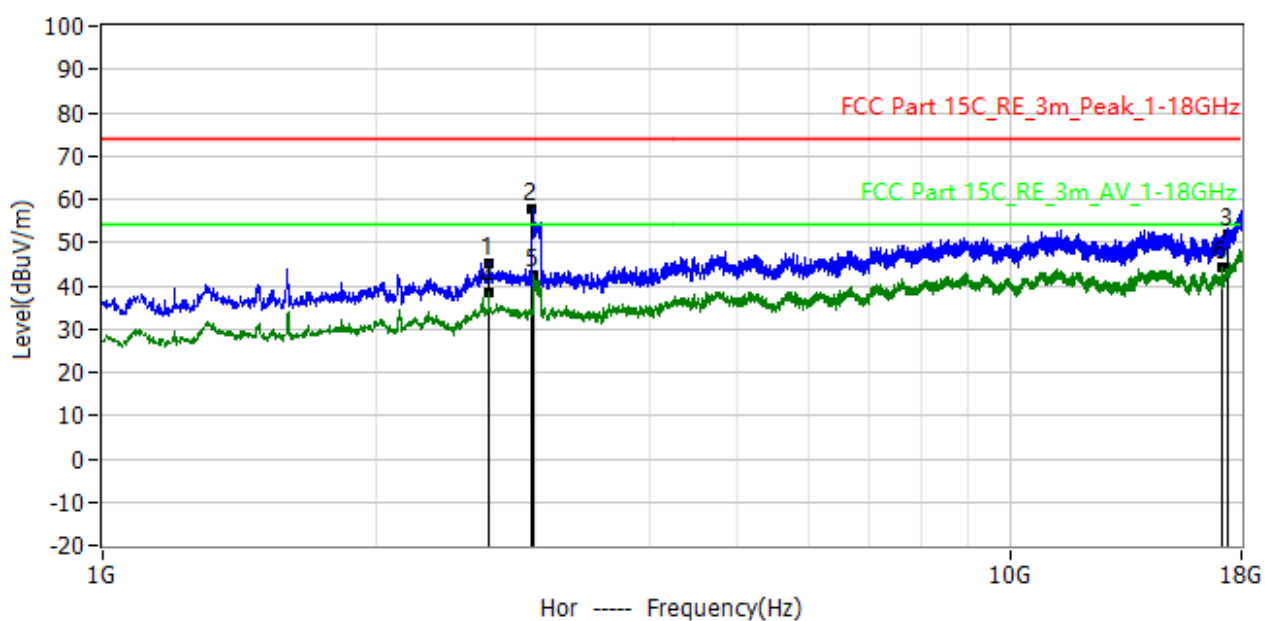

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	2.666GHz	74.00	45.28	-28.72	55.39	-10.11	QP	Hor	100.0	0.0
2*	2.976GHz	74.00	57.91	-16.09	66.38	-8.47	QP	Hor	100.0	0.0
3*	17.358GHz	74.00	52.10	-21.90	40.95	11.15	QP	Hor	100.0	0.0
4*	2.668GHz	54.00	38.47	-15.53	48.57	-10.10	AV	Hor	100.0	0.0
5*	2.981GHz	54.00	42.62	-11.38	51.06	-8.44	AV	Hor	100.0	0.0
6*	17.099GHz	54.00	44.33	-9.67	34.14	10.19	AV	Hor	100.0	0.0




Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455-S1	Temperature: 27.4°C
S/N:	Humidity: 54%RH
Test Mode: BLE_Lowest_CH	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-23

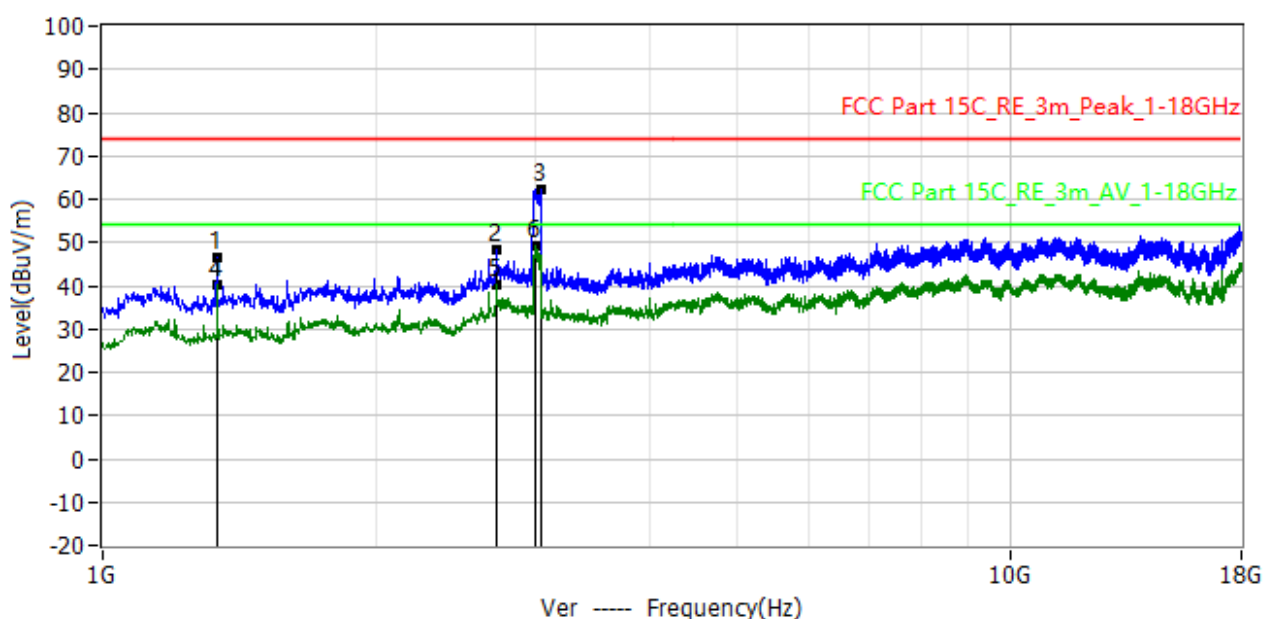

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	1.336GHz	74.00	46.69	-27.31	68.58	-21.89	QP	Ver	100.0	0.0
2*	2.715GHz	74.00	48.15	-25.85	58.00	-9.85	QP	Ver	100.0	0.0
3*	3.038GHz	74.00	62.39	-11.61	70.74	-8.35	QP	Ver	100.0	0.0
4*	1.338GHz	54.00	40.26	-13.74	62.13	-21.87	AV	Ver	100.0	0.0
5*	2.717GHz	54.00	40.42	-13.58	50.26	-9.84	AV	Ver	100.0	0.0
6*	2.993GHz	54.00	49.10	-4.90	57.48	-8.38	AV	Ver	100.0	0.0




Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455-S1	Temperature: 27.4°C
S/N:	Humidity: 54%RH
Test Mode: BLE_Lowest_CH	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-23

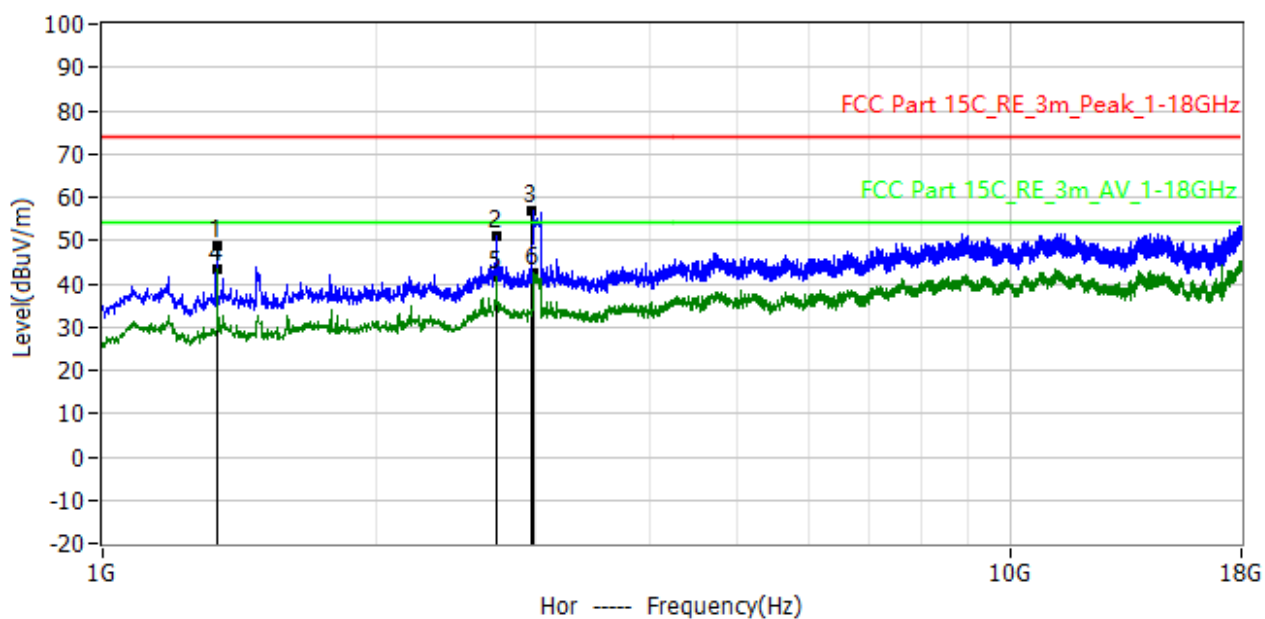

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	1.336GHz	74.00	48.91	-25.09	70.80	-21.89	QP	Hor	100.0	0.0
2*	2.715GHz	74.00	51.19	-22.81	61.04	-9.85	QP	Hor	100.0	0.0
3*	2.976GHz	74.00	57.01	-16.99	65.48	-8.47	QP	Hor	100.0	0.0
4*	1.338GHz	54.00	43.18	-10.82	65.05	-21.87	AV	Hor	100.0	0.0
5*	2.717GHz	54.00	41.39	-12.61	51.23	-9.84	AV	Hor	100.0	0.0
6*	2.978GHz	54.00	42.65	-11.35	51.10	-8.45	AV	Hor	100.0	0.0




Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455-S1	Temperature: 27.4°C
S/N:	Humidity: 54%RH
Test Mode: BLE_Middle_CH	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-23

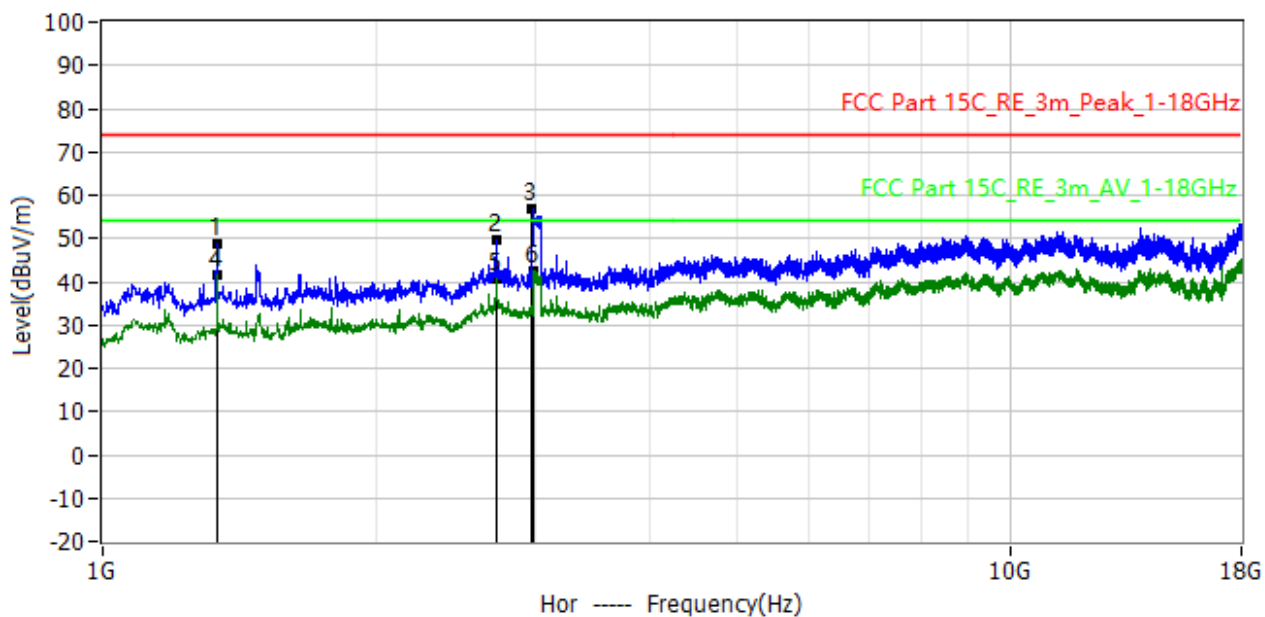

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	1.336GHz	74.00	48.72	-25.28	70.61	-21.89	QP	Hor	100.0	0.0
2*	2.715GHz	74.00	49.54	-24.46	59.39	-9.85	QP	Hor	100.0	0.0
3*	2.976GHz	74.00	57.00	-17.00	65.47	-8.47	QP	Hor	100.0	0.0
4*	1.338GHz	54.00	41.74	-12.26	63.61	-21.87	AV	Hor	100.0	0.0
5*	2.717GHz	54.00	40.86	-13.14	50.70	-9.84	AV	Hor	100.0	0.0
6*	2.978GHz	54.00	42.50	-11.50	50.95	-8.45	AV	Hor	100.0	0.0




Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455-S1	Temperature: 27.4°C
S/N:	Humidity: 54%RH
Test Mode: BLE_Middle_CH	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-23

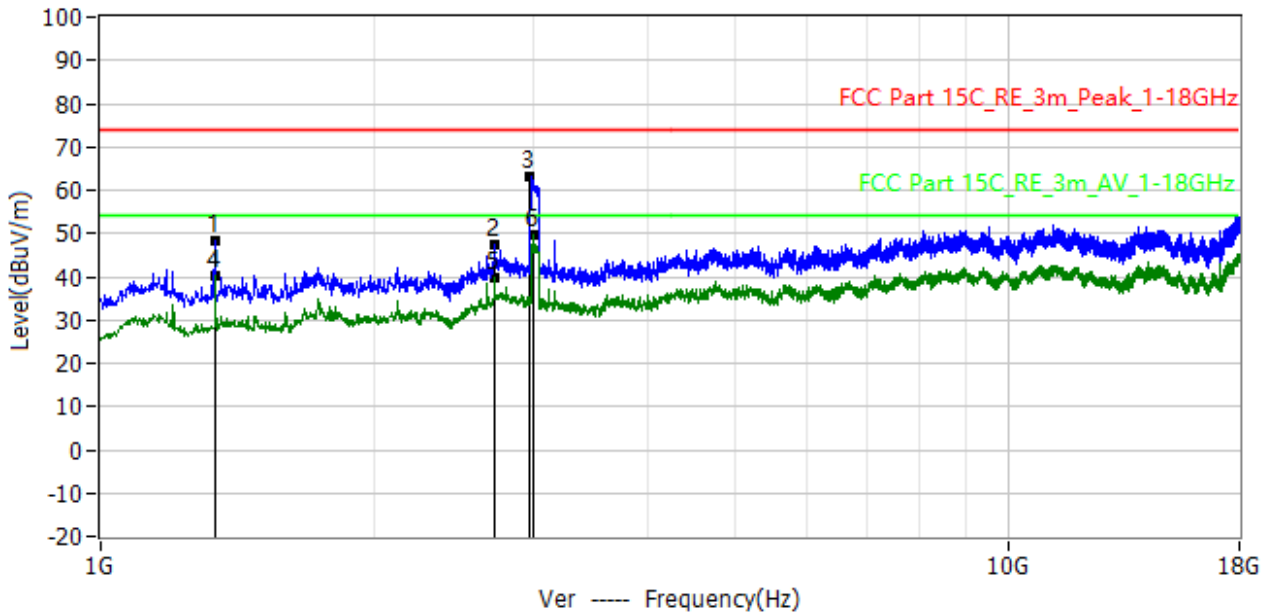

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	1.336GHz	74.00	48.50	-25.50	70.39	-21.89	QP	Ver	100.0	0.0
2*	2.715GHz	74.00	47.45	-26.55	57.30	-9.85	QP	Ver	100.0	0.0
3*	2.976GHz	74.00	62.97	-11.03	71.44	-8.47	QP	Ver	100.0	0.0
4*	1.338GHz	54.00	40.37	-13.63	62.24	-21.87	AV	Ver	100.0	0.0
5*	2.717GHz	54.00	39.87	-14.13	49.71	-9.84	AV	Ver	100.0	0.0
6*	2.998GHz	54.00	49.88	-4.12	58.23	-8.35	AV	Ver	100.0	0.0




Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455-S1	Temperature: 27.4°C
S/N:	Humidity: 54%RH
Test Mode: BLE_Highest_CH	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-23

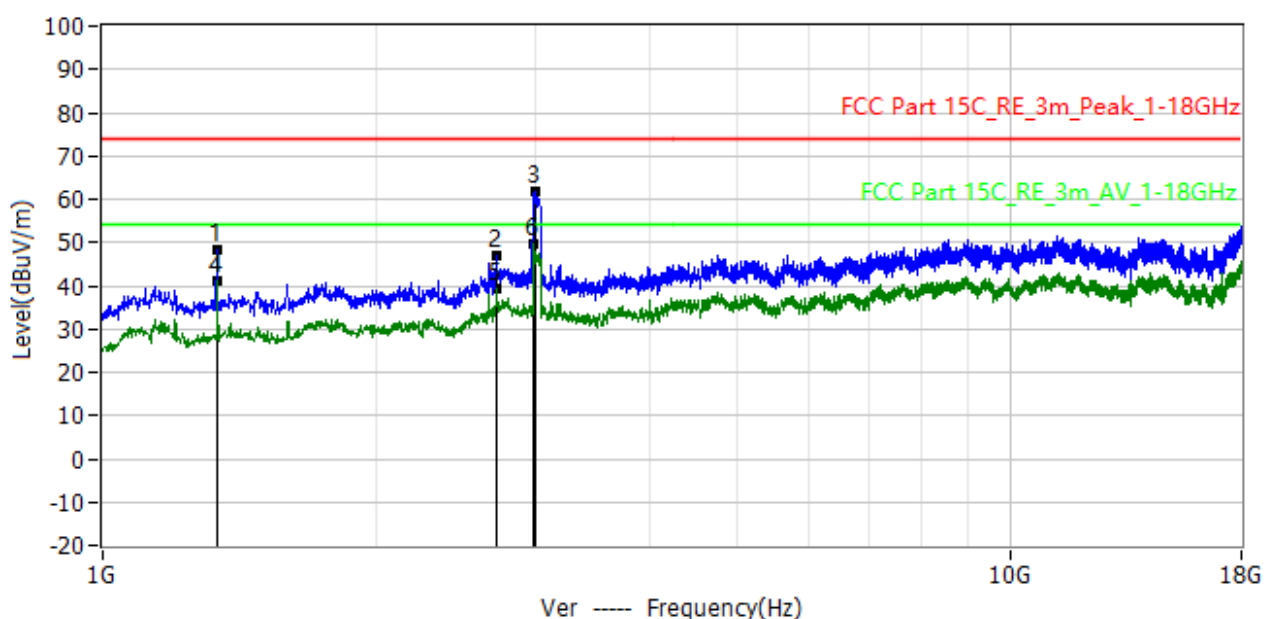

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	1.336GHz	74.00	48.39	-25.61	70.28	-21.89	QP	Ver	100.0	0.0
2*	2.715GHz	74.00	47.08	-26.92	56.93	-9.85	QP	Ver	100.0	0.0
3*	2.993GHz	74.00	61.62	-12.38	70.00	-8.38	QP	Ver	100.0	0.0
4*	1.338GHz	54.00	41.15	-12.85	63.02	-21.87	AV	Ver	100.0	0.0
5*	2.717GHz	54.00	39.35	-14.65	49.19	-9.84	AV	Ver	100.0	0.0
6*	2.981GHz	54.00	49.55	-4.45	57.99	-8.44	AV	Ver	100.0	0.0



Test Lab: LGT EMC Lab	Project: LGT22G011
EUT: DTEN D7X	Test Engineer: Terry.zhao
M/N: DB71455-S1	Temperature: 27.4°C
S/N:	Humidity: 54%RH
Test Mode: BLE_Highest_CH	Test Voltage: AC 120V/60Hz
Note:	Test Data: 2022-08-23

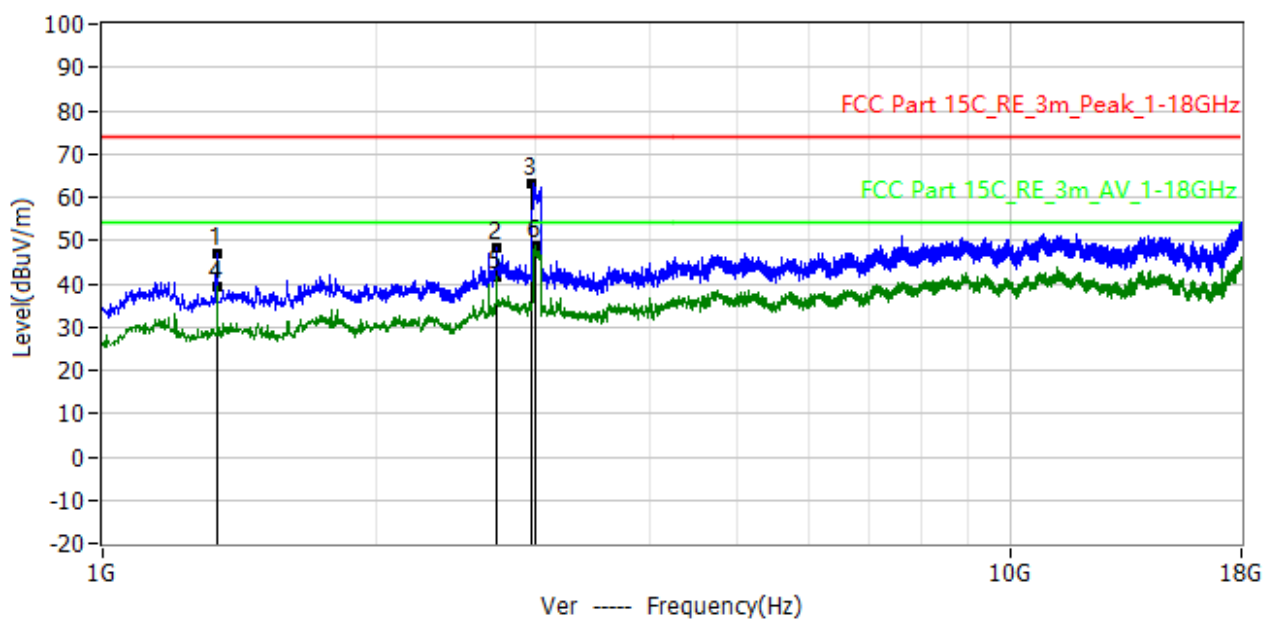

No.	Frequency	Limit dBuV/m	Level dBuV/m	Delta dB	Reading dBuV	Factor dB/m	Detector	Polar	Height cm	Angle deg
1*	1.336GHz	74.00	46.87	-27.13	68.76	-21.89	QP	Ver	100.0	0.0
2*	2.715GHz	74.00	48.35	-25.65	58.20	-9.85	QP	Ver	100.0	0.0
3*	2.976GHz	74.00	63.14	-10.86	71.61	-8.47	QP	Ver	100.0	0.0
4*	1.338GHz	54.00	39.42	-14.58	61.29	-21.87	AV	Ver	100.0	0.0
5*	2.717GHz	54.00	41.63	-12.37	51.47	-9.84	AV	Ver	100.0	0.0
6*	2.995GHz	54.00	48.57	-5.43	56.93	-8.36	AV	Ver	100.0	0.0



## 5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

### 5.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	Lower Band Edge: 2300 – 2407 MHz Upper Band Edge: 2475 – 2500 MHz
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

### 5.3 TEST SETUP



The EUT which is powered by the  $\{ \text{POWER BY} \}$ , is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading. Make the measurement with the spectrum analyzer's resolution bandwidth(RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

### 5.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.





## 5.5 TEST RESULTS

For the measurement records, refer to the appendix I.



## 6. POWER SPECTRAL DENSITY TEST

### 6.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	$\leq 8$ dBm (RBW $\geq 3$ KHz)	2400-2483.5	PASS

### 6.2 TEST PROCEDURE

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS channel bandwidth.
3. Set the RBW to:  $100 \text{ kHz} \geq \text{RBW} \geq 3 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 6.3 TEST SETUP



### 6.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

### 6.5 TEST RESULTS

For the measurement records refer to the appendix I.



## 7. BANDWIDTH TEST

### 7.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

### 7.2 TEST PROCEDURE

The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described above (i.e., RBW = 100 kHz, VBW  $\geq 3\text{RBW}$ , peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that might be  $\geq 6$  dB.

### 7.3 TEST SETUP



### 7.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.

### 7.5 TEST RESULTS

For the measurement records refer to the appendix I.



## 8. PEAK OUTPUT POWER TEST

### 8.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5	PASS

### 8.2 TEST PROCEDURE

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

RBW  $\geq$  DTS bandwidth

The following procedure shall be used when an instrument with a resolution bandwidth that is greater than the DTS bandwidth is available to perform the measurement:

- Set the RBW  $\geq$  DTS bandwidth.
- Set VBW  $\geq$  [3  $\times$  RBW].
- Set span  $\geq$  [3  $\times$  RBW].
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

Integrated band power method:

The following procedure can be used when the maximum available RBW of the instrument is less than the


DTS bandwidth:

- Set the RBW = 1 MHz.
- Set the VBW  $\geq$  [3  $\times$  RBW].
- Set the span  $\geq$  [1.5  $\times$  DTS bandwidth].
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges (for some instruments, this may require a manual override to select the peak detector). If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the DTS channel bandwidth.

PKPM1 Peak power meter method:

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

### 8.3 TEST SETUP



### 8.4 EUT OPERATION CONDITIONS

Please refer to section 3.4 of this report.



## 8.5 TEST RESULTS

For the measurement records · refer to the appendix I.



## 9. ANTENNA REQUIREMENT

### 9.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### 9.2 EUT ANTENNA

The EUT antenna is PCB Antenna. It comply with the standard requirement.



## APPENDIX I: TEST RESULTS

### MAXIMUM PEAK CONDUCTED OUTPUT POWER



Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	4.81	0	4.81	30	Pass
NVNT	BLE 1M	2440	Ant1	4.53	0	4.53	30	Pass
NVNT	BLE 1M	2480	Ant1	5.36	0	5.36	30	Pass




## -6DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.643	0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.641	0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.634	0.5	Pass



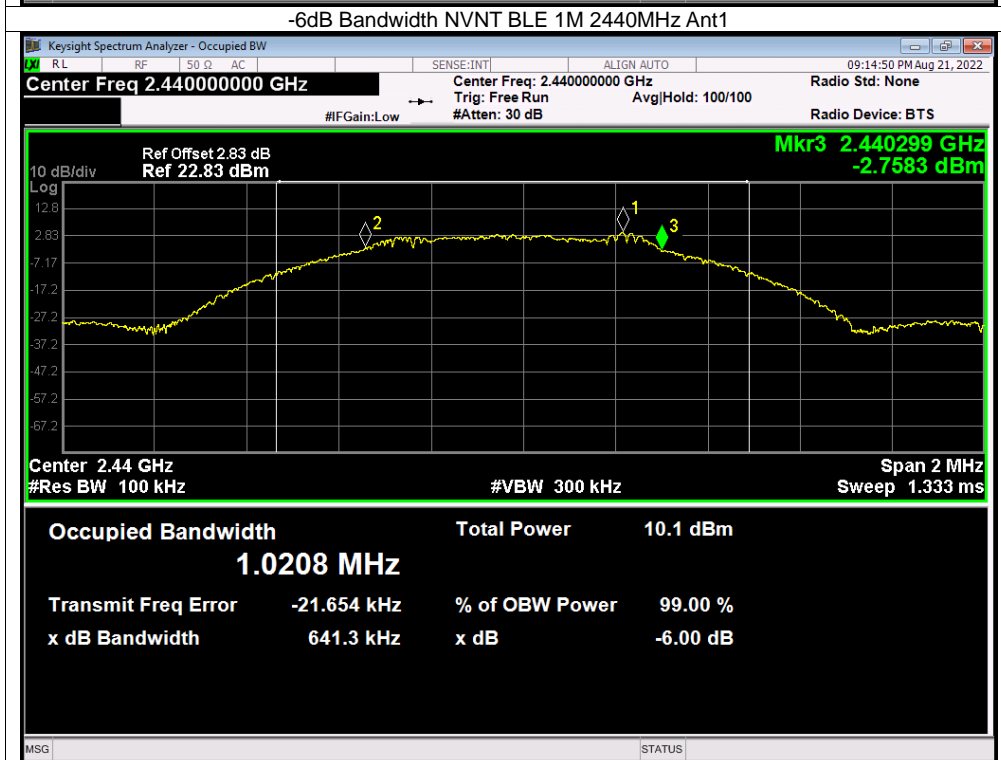
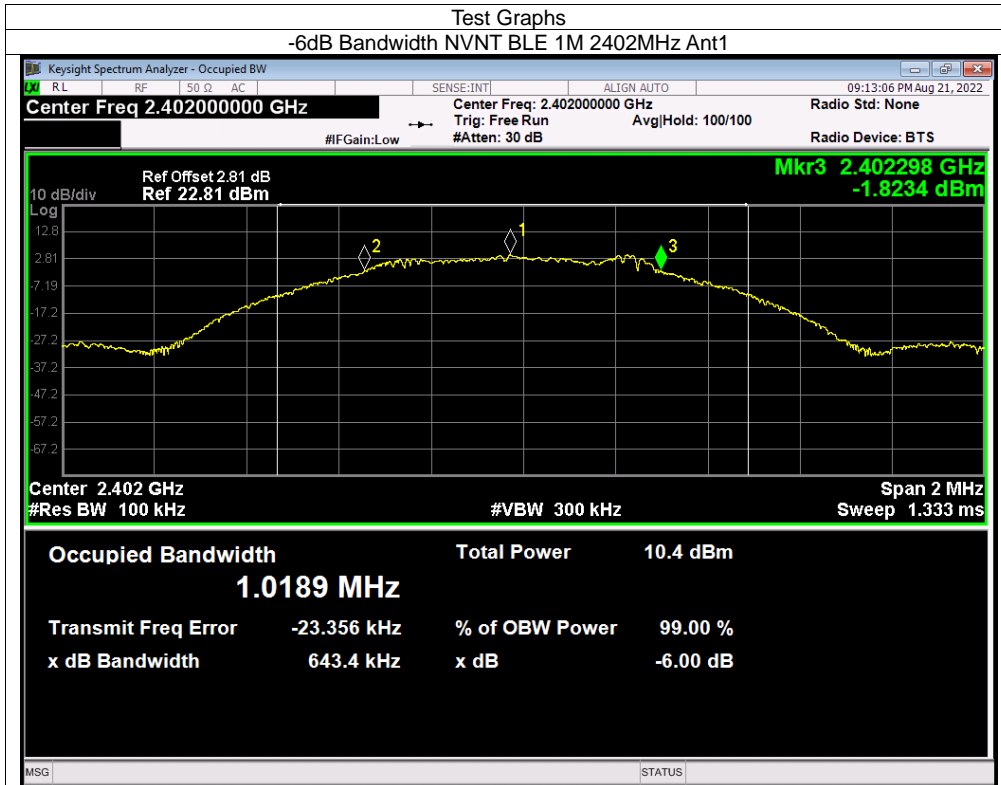


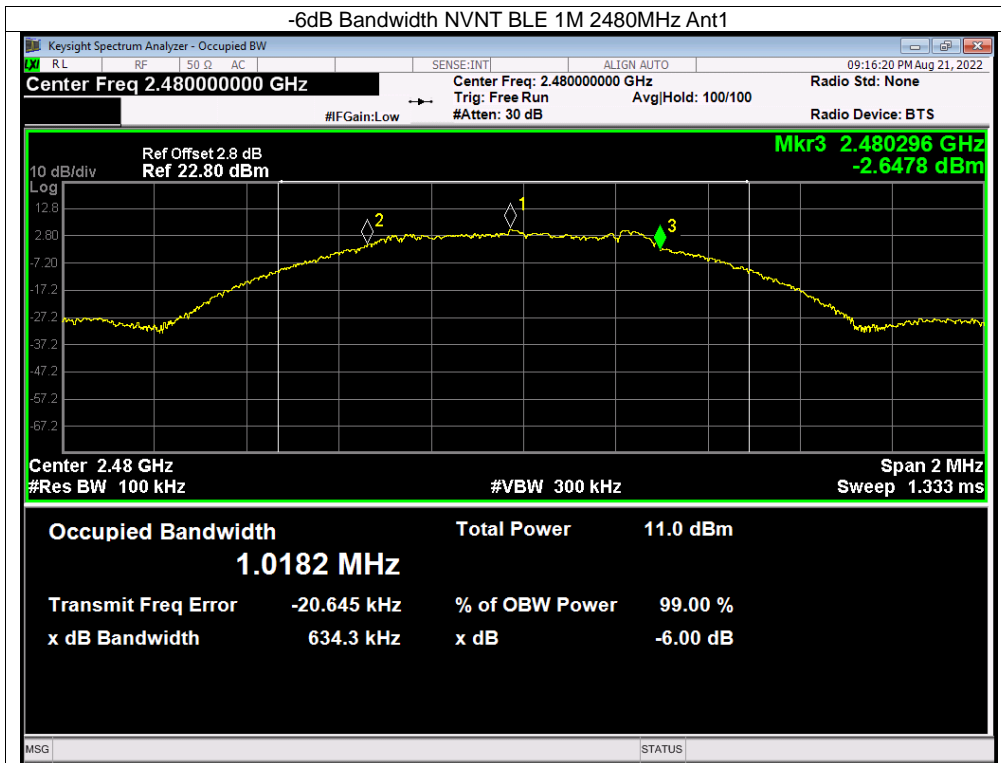




## OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	BLE 1M	2402	Ant1	1.011
NVNT	BLE 1M	2440	Ant1	1.023
NVNT	BLE 1M	2480	Ant1	1.019

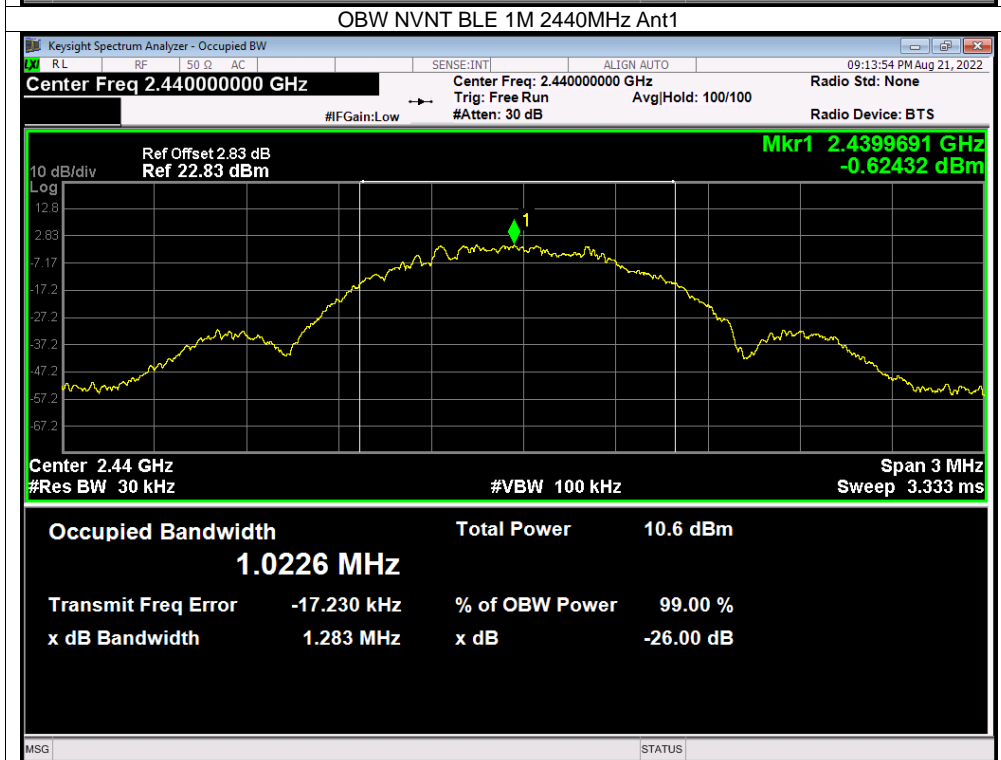
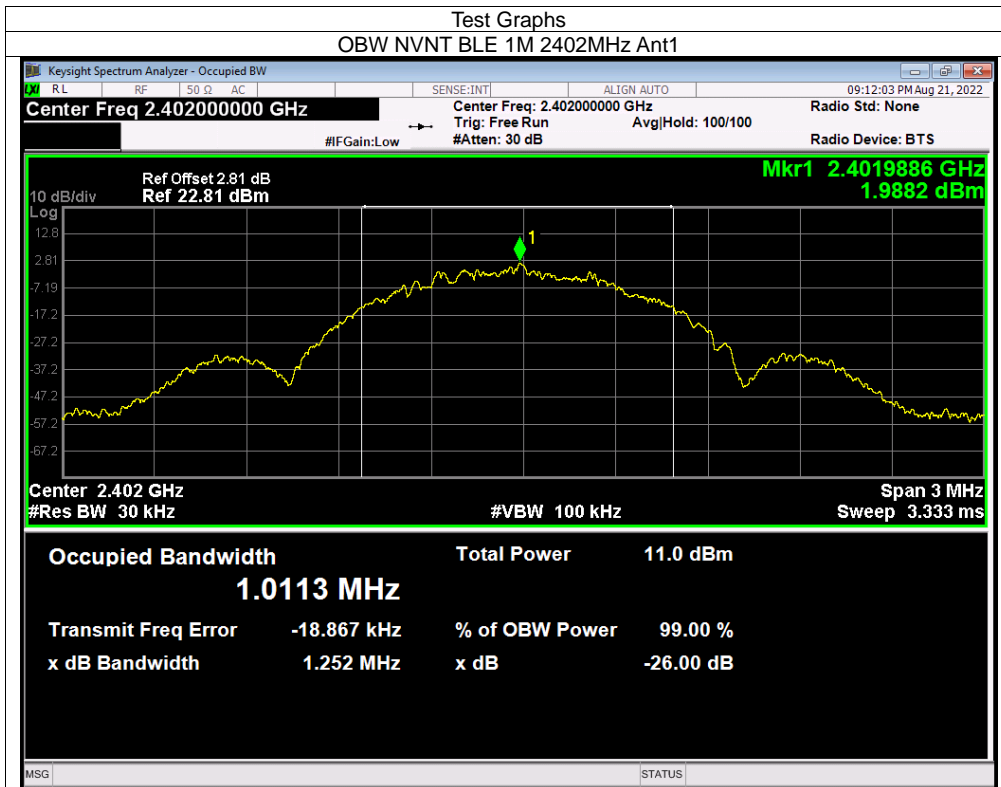


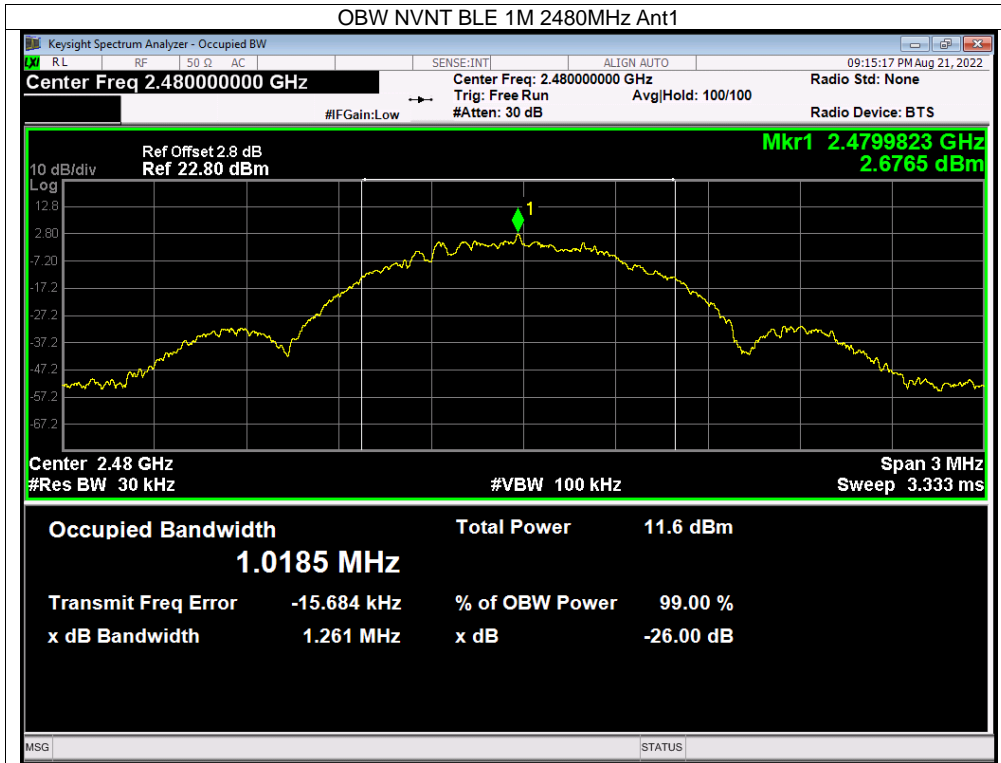




## MAXIMUM POWER SPECTRAL DENSITY LEVEL

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/3kHz)	Duty Factor (dB)	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-10.54	0	-10.54	8	Pass
NVNT	BLE 1M	2440	Ant1	-10.46	0	-10.46	8	Pass
NVNT	BLE 1M	2480	Ant1	-9.42	0	-9.42	8	Pass

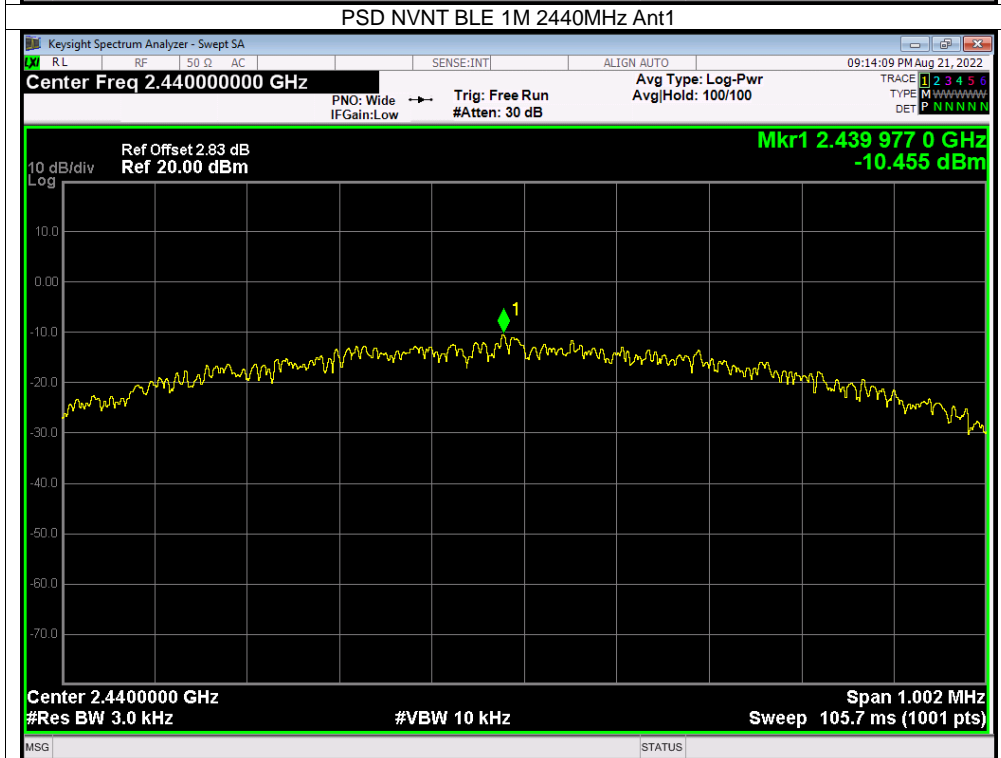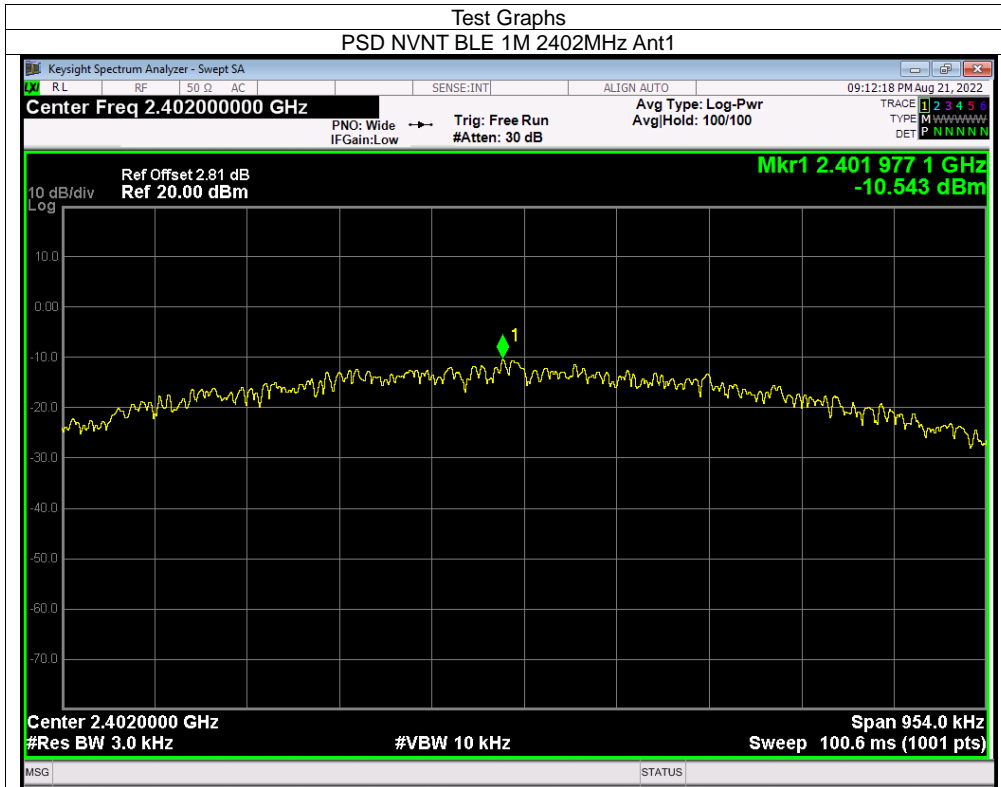


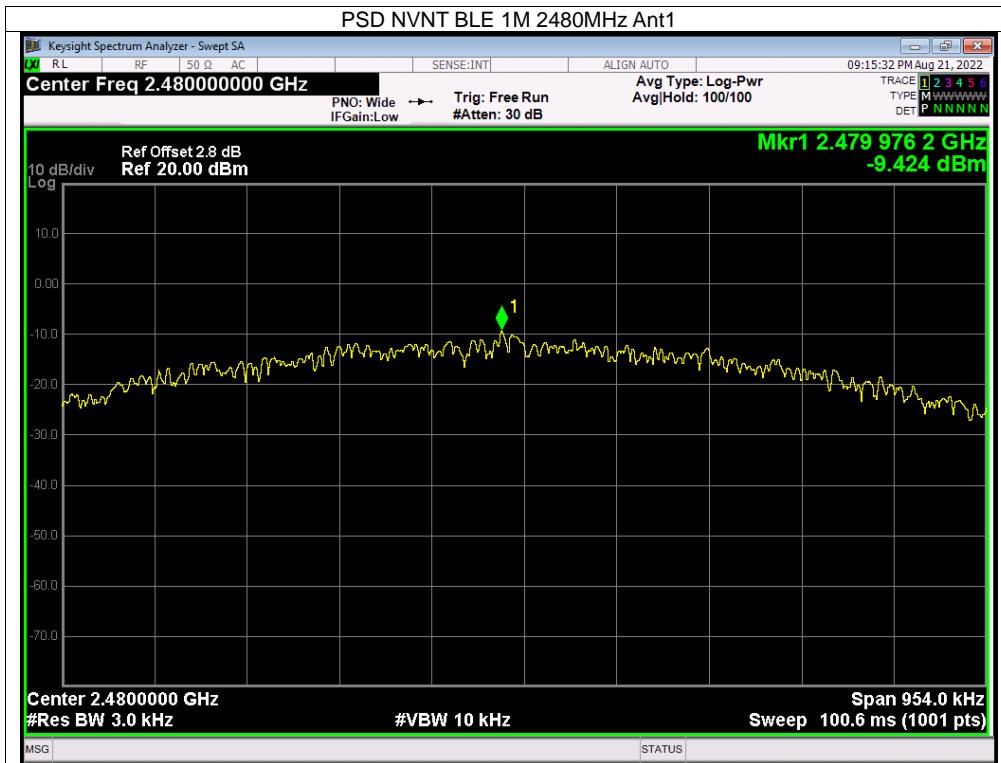








## BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-52.43	-20	Pass
NVNT	BLE 1M	2480	Ant1	-59.98	-20	Pass

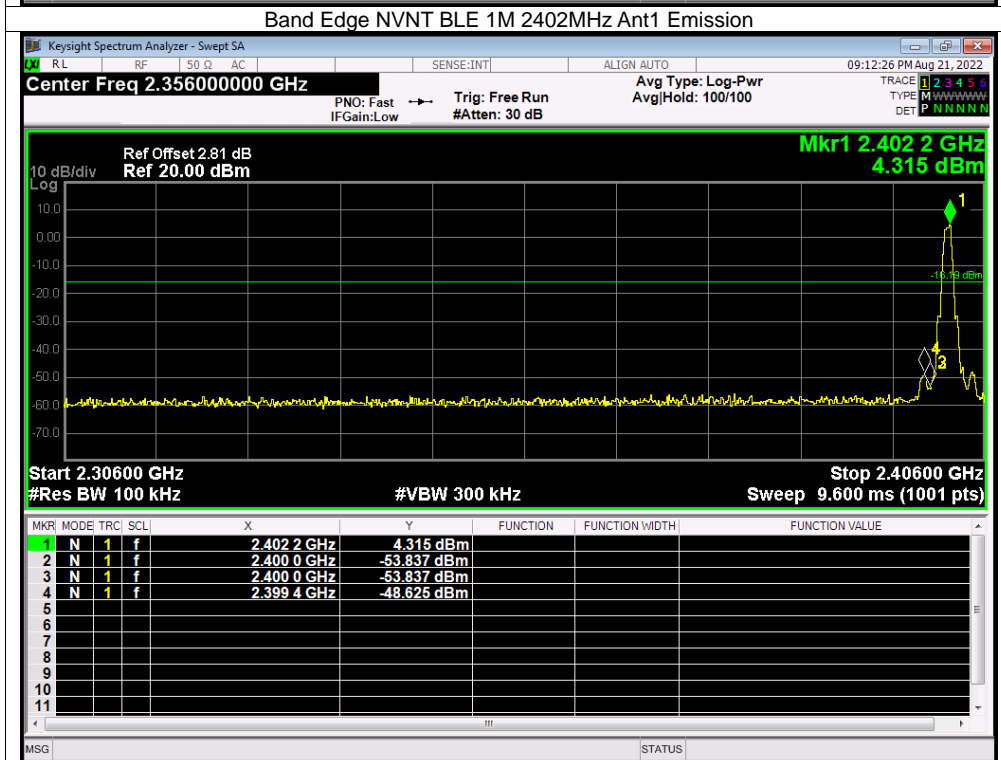
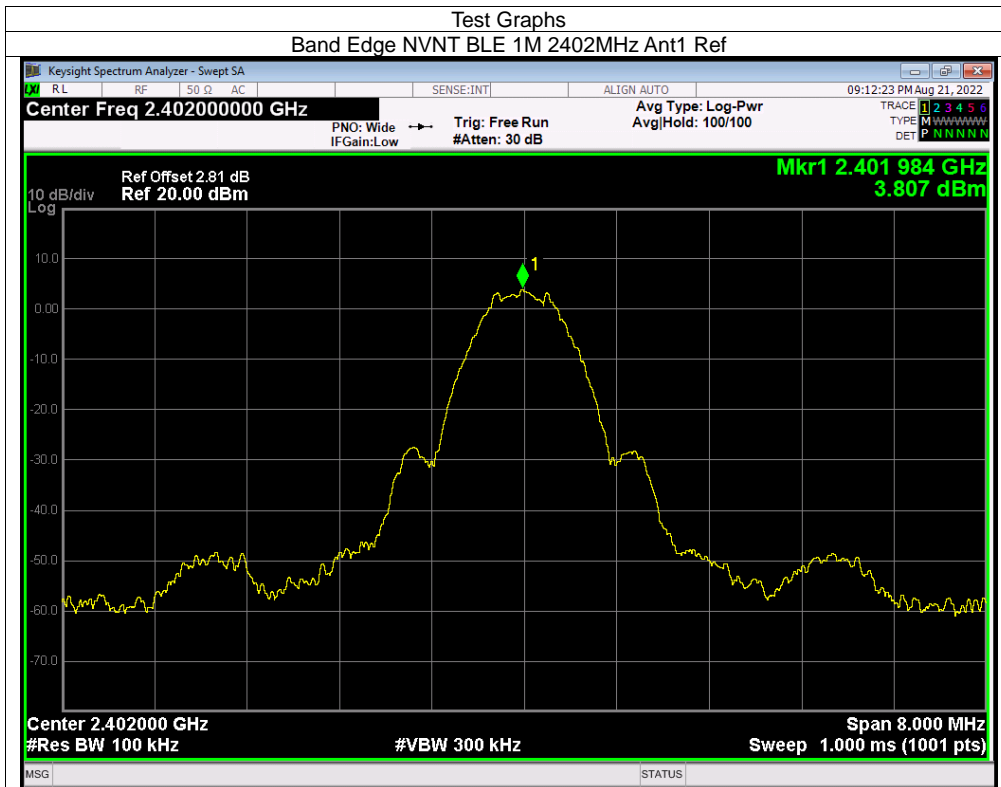


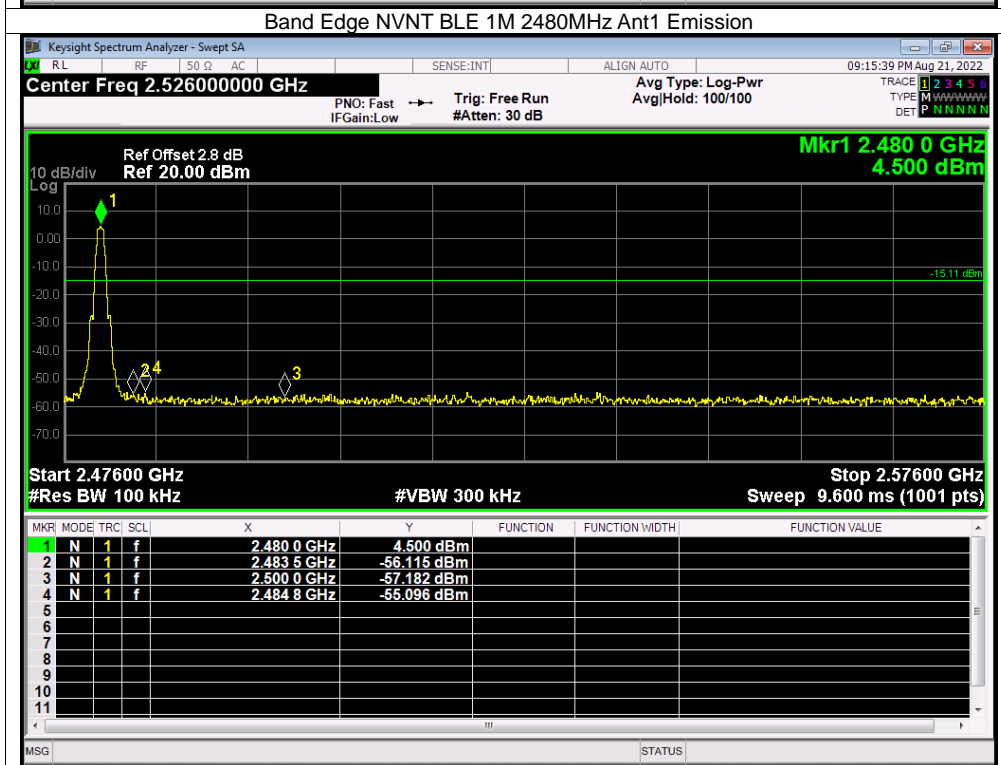
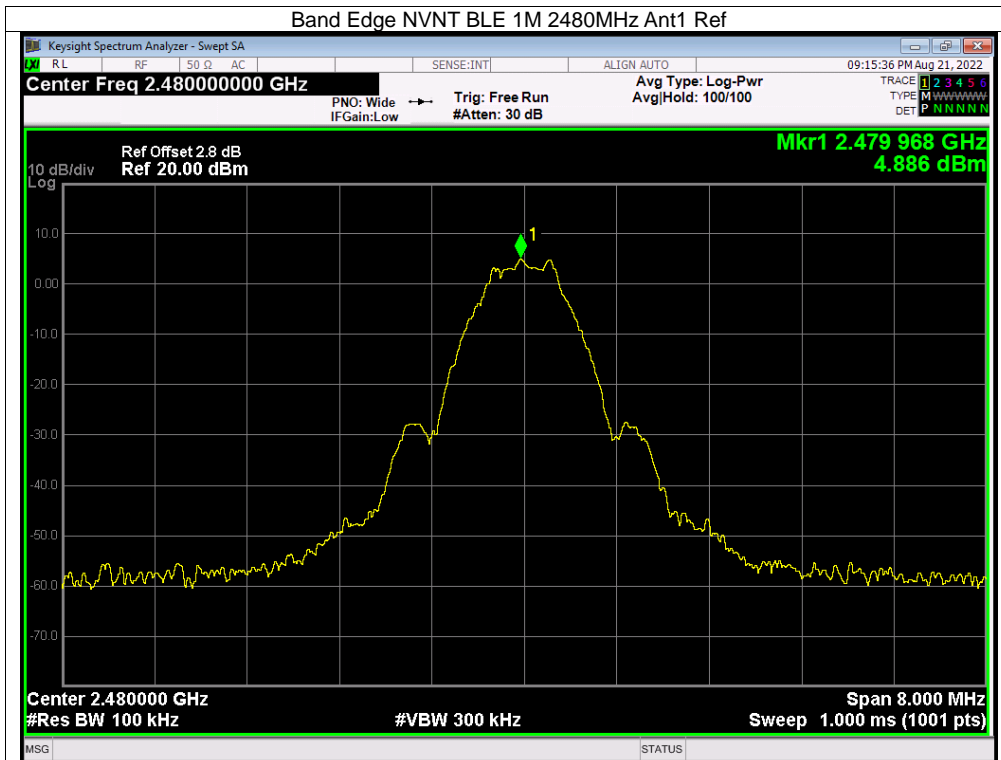






## CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-33.95	-20	Pass
NVNT	BLE 1M	2440	Ant1	-34.07	-20	Pass
NVNT	BLE 1M	2480	Ant1	-36.5	-20	Pass

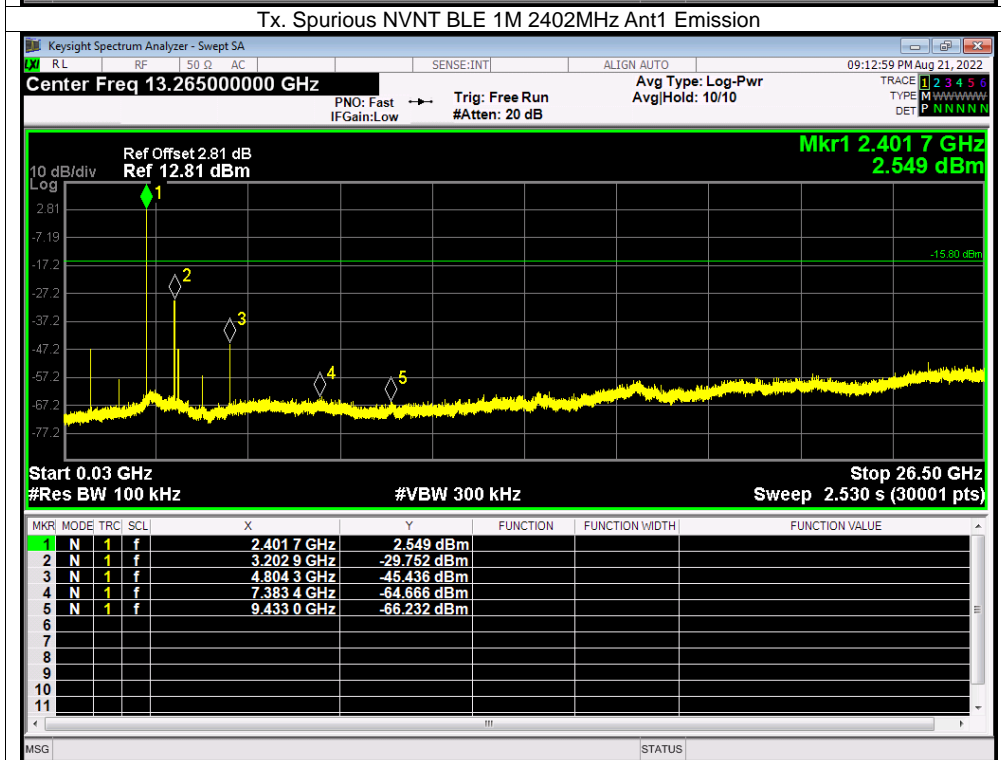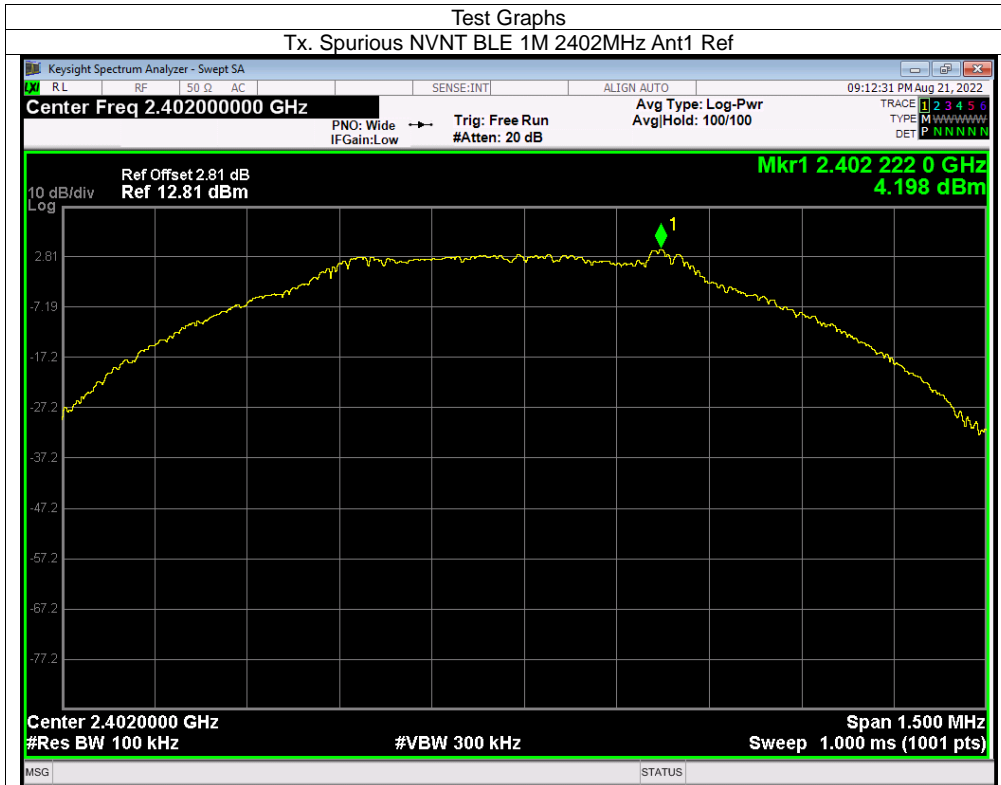

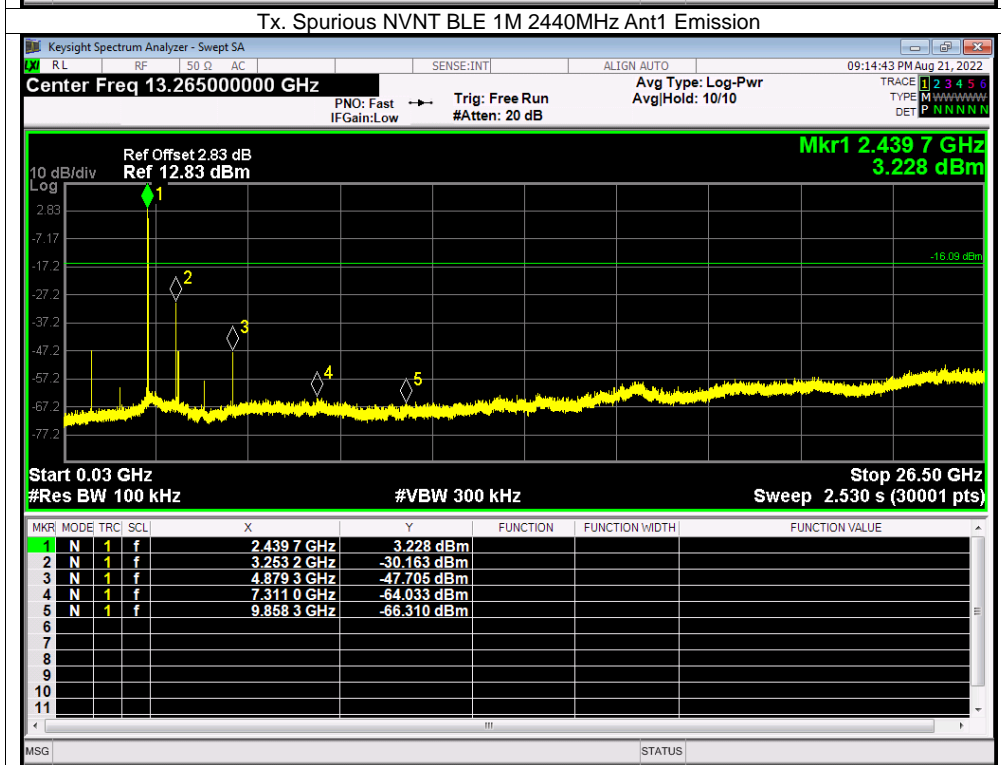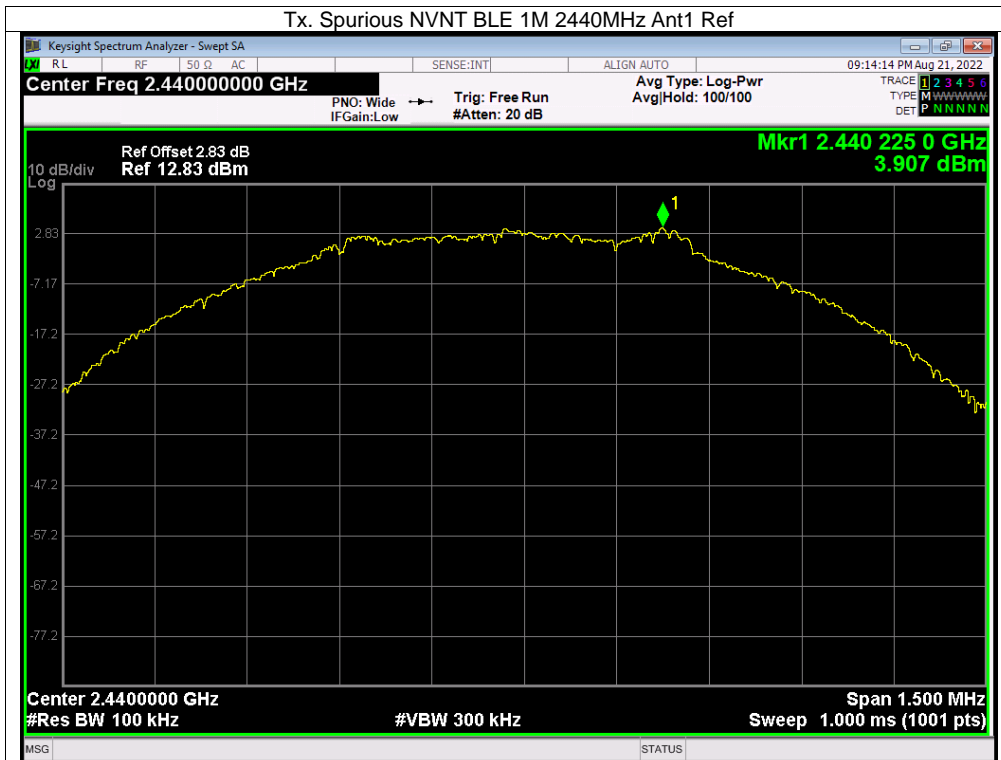

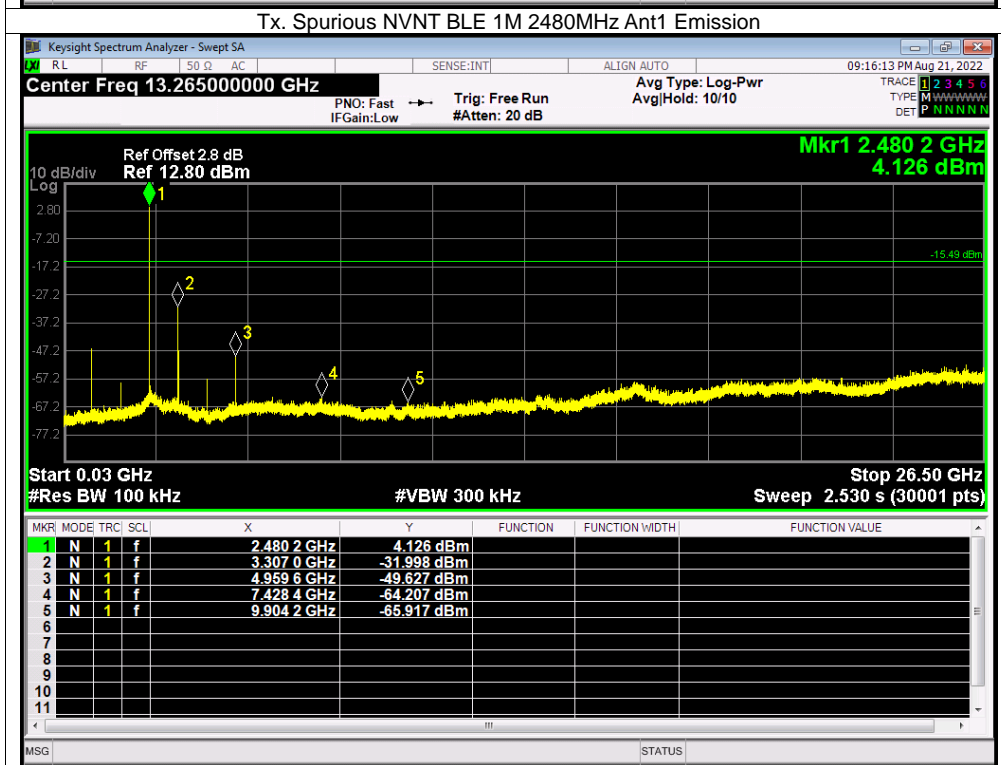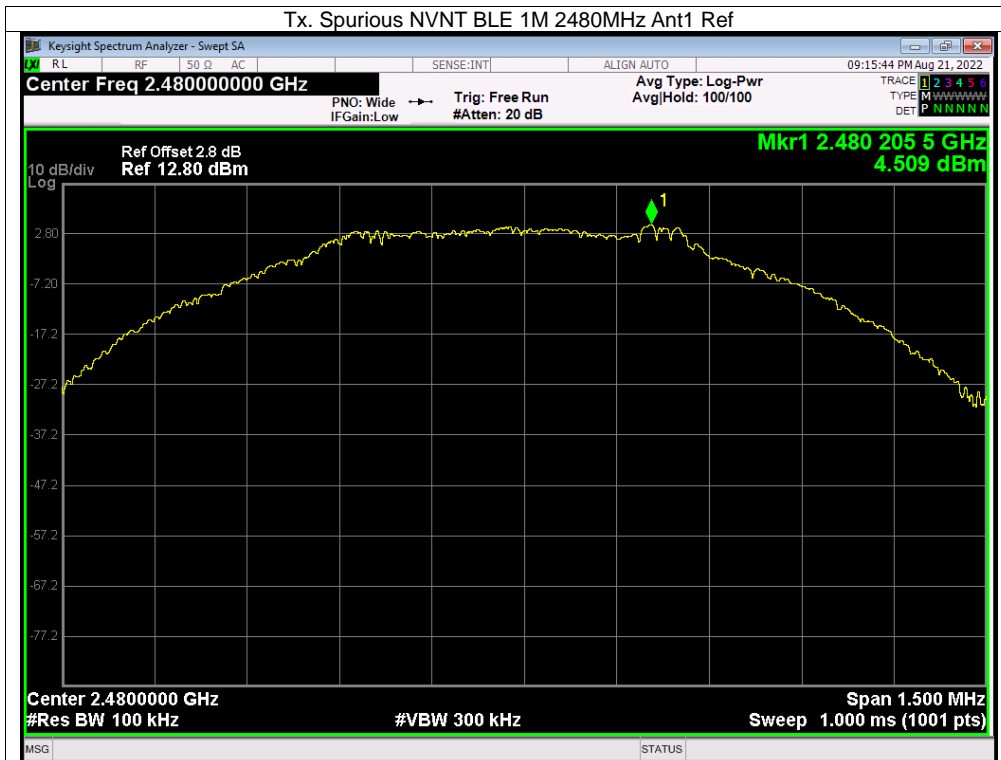




## DUTY CYCLE

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2440	Ant1	83.72	0.77	0.48



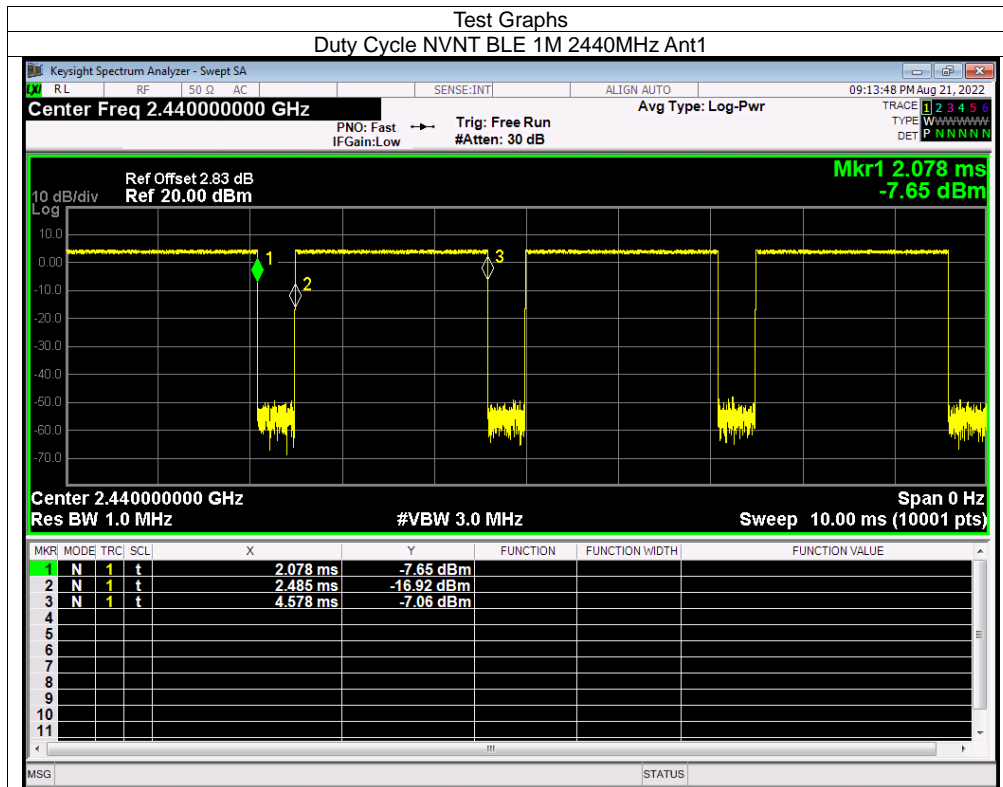


## APPENDIX II: TEST PHOTO

### Conducted Emission Test Setup Photo



### Radiated Emission Test Setup Photo - Below 1GHz

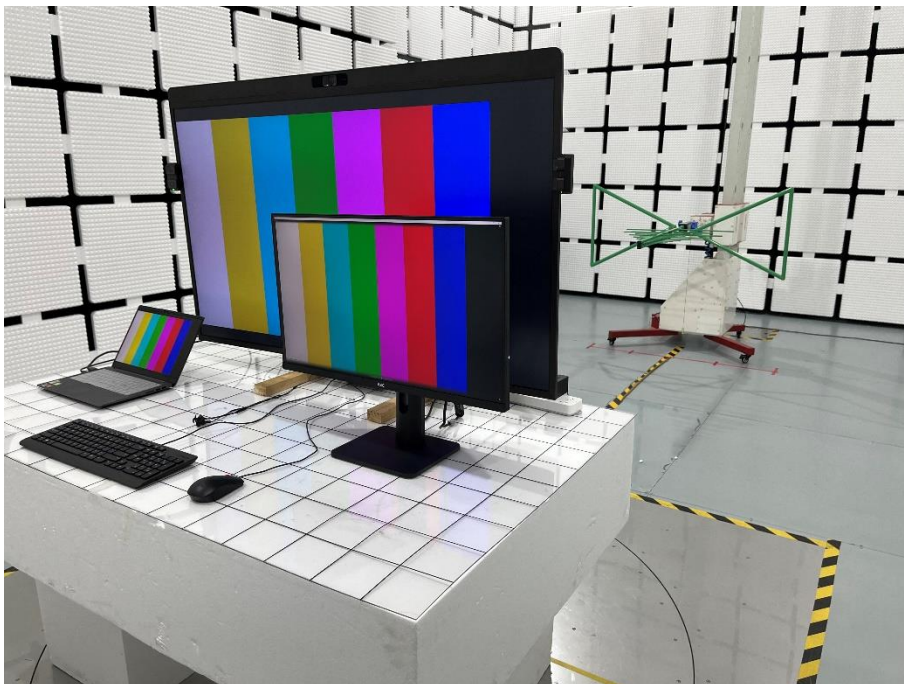



**Radiated Emission Test Setup Photo - Above 1GHz**



\*\*\*\*\*END OF THE REPORT\*\*\*\*\*