

TEST REPORT

Applicant:	V-Mark Enterprises Ltd.
Address of Applicant:	400-601 West Broadway, Vancouver, British Columbia, Canada
Manufacturer:	V-Mark Enterprises Ltd.
Address of Manufacturer:	400-601 West Broadway, Vancouver, British Columbia, Canada
Product name:	Smart 2-1 Switch (On/Off or Dimmer)
Model(s):	VZW31-SN, LT-3300
Rating(s):	120VAC 60Hz
Trademark:	Inovelli, URC
Standards:	47 CFR PART 15 Subpart C: 2021 section 15.247
FCC ID:	2AQ7V-VZW31SN
Data of Receipt:	2022-10-24
Date of Test:	2022-10-24~2023-01-05
Date of Issue:	2023-01-05
Test Result	Pass*

* In the configuration tested, the test item complied with the standards specified above.

Authorized for issue by:

Test by:



Jan.05, 2023 Chivas Tsang
Project Engineer

Chivas

Jan.05, 2023 Victor Meng
Project Manager

Victor

Date Name/Position Signature

Date Name/Position Signature

Testing Laboratory information:

Testing Laboratory Name : ITL Co., Ltd
Address : No. 8 Jinqianling Street 5, Huangjiang Town, Dongguan,
Guangdong, 523757 P.R.C.
Testing location : Same as above
Tel : 0086-769-39001678
Fax : 0086-20-62824387
E-mail : itl@i-testlab.com

Possible test case verdicts:

- test case does not apply to the test object.. : N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.. : F (Fail)

General remarks:

The test results presented in this report relate only to the object tested.

The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.

This report would be invalid test report without all the signatures of testing technician and approver.

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

General product information:

All models are identical to each other except the model name.

All tests were performed on the model VZW31-SN as representative.

1 Test Summary

Test	Test Requirement	Test method	Result
Antenna Requirement	FCC PART 15 C section 15.247 (c) and Section 15.203	FCC PART 15 C section 15.247 (c) and Section 15.203	PASS
Occupied Bandwidth	FCC PART 15 C section 15.247 (a)(2)	ANSI C63.10:2013	PASS
Maximum Peak Output Power	FCC PART 15 C section 15.247(b)(3)	ANSI C63.10: 2013	PASS
Peak Power Spectral Density	FCC PART 15 C section 15.247(e)	ANSI C63.10:2013	PASS
Conducted Spurious Emission (30MHz to 25GHz)	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10:2013	PASS
Radiated Spurious Emission (30 MHz to 25 GHz)	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10:2013	PASS
Radiated Emissions which fall in the restricted bands	FCC PART 15 C section 15.209	ANSI C63.10:2013	PASS
Band Edges Measurement	FCC PART 15 C section 15.209 &15.247(d)	ANSI C63.10:2013	PASS
Conducted Emissions at Mains Terminals	FCC PART 15 C section 15.207	ANSI C63.10:2013	PASS

2 Contents

	Page
TEST REPORT	1
1 TEST SUMMARY	3
2 CONTENTS	4
3 GENERAL INFORMATION	5
3.1 CLIENT INFORMATION.....	5
3.2 GENERAL DESCRIPTION OF E.U.T.....	5
3.3 DETAILS OF E.U.T.....	5
3.4 DESCRIPTION OF SUPPORT UNITS.....	5
3.5 TEST LOCATION.....	5
3.6 DEVIATION FROM STANDARDS.....	5
3.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	5
3.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	6
3.9 TEST FACILITY.....	6
3.10 MEASUREMENT UNCERTAINTY.....	6
4 INSTRUMENTS USED DURING TEST	7
5 TEST RESULTS	8
5.1 E.U.T. TEST CONDITIONS.....	8
5.2 ANTENNA REQUIREMENT.....	10
5.3 OCCUPIED BANDWIDTH.....	11
5.4 MAXIMUM PEAK OUTPUT POWER.....	15
5.5 PEAK POWER SPECTRAL DENSITY.....	19
5.6 CONDUCTED SPURIOUS EMISSIONS.....	24
5.7 RADIATED SPURIOUS EMISSIONS.....	27
5.7.1 <i>Harmonic and other spurious emissions</i>	30
5.8 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS.....	47
5.9 BAND EDGES REQUIREMENT.....	50
5.10 CONDUCTED EMISSIONS AT MAINS TERMINALS 150 KHZ TO 30MHZ.....	53
5.10.1 <i>Measurement Data</i>	55

3 General Information

3.1 Client Information

Applicant: V-Mark Enterprises Ltd.
Address of Applicant: 400-601 West Broadway, Vancouver, British Columbia, Canada

3.2 General Description of E.U.T.

Name: Smart 2-1 Switch (On/Off or Dimmer)
Model No.: VZW31-SN
Trade Mark: Inovelli, URC
Operating Frequency: 908.4 MHz to 920 MHz

Channels:

channel	Frequency (MHz)
1	908.4
2	912.0
3	916.0
4	920.0

Type of Modulation: BFSK/GFSK
Antenna Type: PIFA Antenna
Antenna gain: -5 dBi
Function: Smart 2-1 Switch (On/Off or Dimmer)

3.3 Details of E.U.T.

EUT Power Supply: AC 120V 60Hz
Test mode: The program used to control the EUT for staying in continuous transmitting and receiving mode is programmed. Channel (908.4MHz), (912.0MHz), (916.0MHz) and (920.0) are chosen for full testing.

3.4 Description of Support Units

The EUT has been tested as an independent unit for fixed frequency by testing lab.

3.5 Test Location

All tests were performed at:
ITL Co., Ltd
No. 8 Jinqianling Street 5, Huangjiang Town, Dongguan, Guangdong, 523757 P.R.C.
0086-769-39001678
itl@i-testlab.com
No tests were sub-contracted.

3.6 Deviation from Standards

None.

3.7 Abnormalities from Standard Conditions

None.

3.8 Other Information Requested by the Customer

None.

3.9 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS Lab code:L9342**
- **FCC Designation No.:CN5035**
- **IC Registration NO.: 12593A**
- **NVLAP LAB CODE: 600199-0**

3.10 Measurement Uncertainty

The below measurement uncertainties given below are based on a 95% confidence level (base on a coverage factor (k=2).)

Parameter	Uncertainty
Radio frequency	2.25%
total RF power, conducted	±1.34 dB
RF power density , conducted	±1.49 dB
All emissions, radiated	±2.72 dB
Temperature	±5.02 dB
Humidity	±0.8°C
DC and low frequency voltages	±1.5 %

4 Instruments Used during Test

No.	Test Equipment	Manufacturer	Model	Serial No.	Last Cal.	Cal. Due
ITL-114	Spectrum Analyzer	Agilent	N9010A	MY51250936	2022/01/14	2023/01/13
ITL-154	EMI test receiver 9kHz to 26.5GHz	R&S	ESR26	101257	2022/01/14	2023/01/13
ITL-116	Pre Amplifier	HP	8447F	3113A05905	2022/01/14	2023/01/13
ITL-117	Wideband Amplifier Super Ultra	Mini-circuits	ZVA-183- S+	469101134	2022/01/14	2023/01/13
ITL-180	Trilog-Broadband Antenna	Schwarzbeck	VULB 9164	005	2021/01/31	2023/01/30
ITL-110	Horn Antenna	A-INFOMW	JXTXLB- 10180-N	J2031090612 133	2022/06/17	2024/06/16
ITL-100	Semi-Anechoic chamber	ETS•Lindgren	FACT3 2.0	CT09015	2022/10/14	2025/10/13
ITL-145	Loop Antenna	ZHINAN	Z30900A	002489	2022/06/16	2024/06/15
ITL-146	Horn Antenna	Schwarzbck	BBHA 9170	B09806543	2022/06/16	2024/06/15
ITL-165	Power Meter	R&S	NRVS	838246/026	2022/10/16	2023/10/15
ITL-166	Power Sensor	Agilent	U2021XA	MY5365004	2022/01/14	2023/01/13
ITL-125	EMI Test receiver	R&S	ESCI	100910	2022/06/15	2023/06/14
ITL-103	Two-line v- network	R&S	ENV216	100120	2022/06/15	2023/06/14
ITL-101	Shielded Room	ETS•Lindgren	8*4*3	CT09015	2021/01/22	2024/01/21

5 Test Results

5.1 E.U.T. test conditions

Test Voltage: AC 120V 60Hz

Temperature: 20.0 -22.0 °C

Humidity: 38-50 % RH

Atmospheric Pressure: 1000 -1010 mbar

Requirements: **15.31(e):** For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

15.32: Power supplies and CPU boards used with personal computers and for which separate authorizations are required to be obtained shall be tested as follows: Testing shall be in accordance with the procedures specified in Section 15.31 of this part.

Test frequencies and frequency range:

According to the 15.31(m) Measurements on intentional radiators or receivers, other than TV broadcast receivers, shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table:

According to the 15.33 (a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in the following table:

Number of fundamental frequencies to be tested in EUT transmit band

Frequency range in which	Number of	Location in frequency range
1 MHz or less	1	Middle
1 MHz to 10 MHz	2	1 near top and 1 near bottom
More than 10 MHz	3	1 near top, 1 near middle and 1 near bottom

Frequency range of radiated emission measurements

Lowest frequency generated	Upper frequency range of measurement
9 kHz to below 10 GHz	10th harmonic of highest fundamental frequency or to 40 GHz,
At or above 10 GHz to below	5th harmonic of highest fundamental frequency or to 100 GHz,
At or above 30 GHz	5th harmonic of highest fundamental frequency or to 200 GHz,

EUT channels and frequencies list:

channel	Frequency (MHz)
1	908.4
2	912.0
3	916.0
4	920.0

Test frequencies are the 1 channel (908.4MHz), 2 channel (912.0MHz), 3 channel (916.0 MHz) and 4 channel (920.0MHz).

Test the EUT in continuous transmission mode, duty cycle > 98%.

5.2 Antenna requirement

Standard requirement

15.203 requirement:

For intentional device. According to 15.203. An intentional radiator shall be designed to Ensure that no antenna other than that furnished by the responsible party shall be used with the device.

15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz bands that are used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna

The antenna is an Internal Antenna and no consideration of replacement. The best case gain of the antenna is -5 dBi.

Test result: The unit does meet the FCC requirements.


5.3 Occupied Bandwidth

Test Requirement: FCC Part 15 C section 15.247
(a)(2) Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

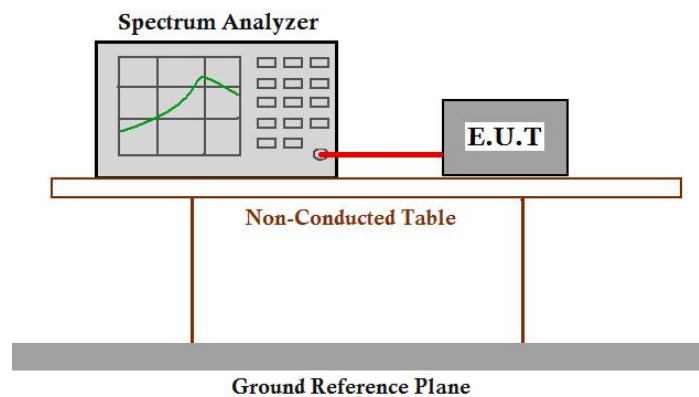

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (Cable loss =1.46dB) from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW=100kHz. VBW = 300kHz, Sweep = auto; Detector Function = Peak. Trace = Max Hold, Set span to encompass the entire emission bandwidth of the signal.
3. Mark the peak power frequency and -6dB (upper and lower) power frequency.
4. Repeat until all the test status is investigated.
5. Report the worst case.

Test result (6 dB bandwidth)


Channel No.	Frequency (MHz)	Measured 6dB bandwidth (MHz)	Limit	Result
1	908.4	0.714	≥500KHz	Pass
2	912.0	0.713		Pass
3	916.0	0.714		Pass
4	920.0	0.714		Pass

The unit does meet the FCC requirements.


6dB bandwidth:

Result plot as follows:


Channel 1:908.4MHz:

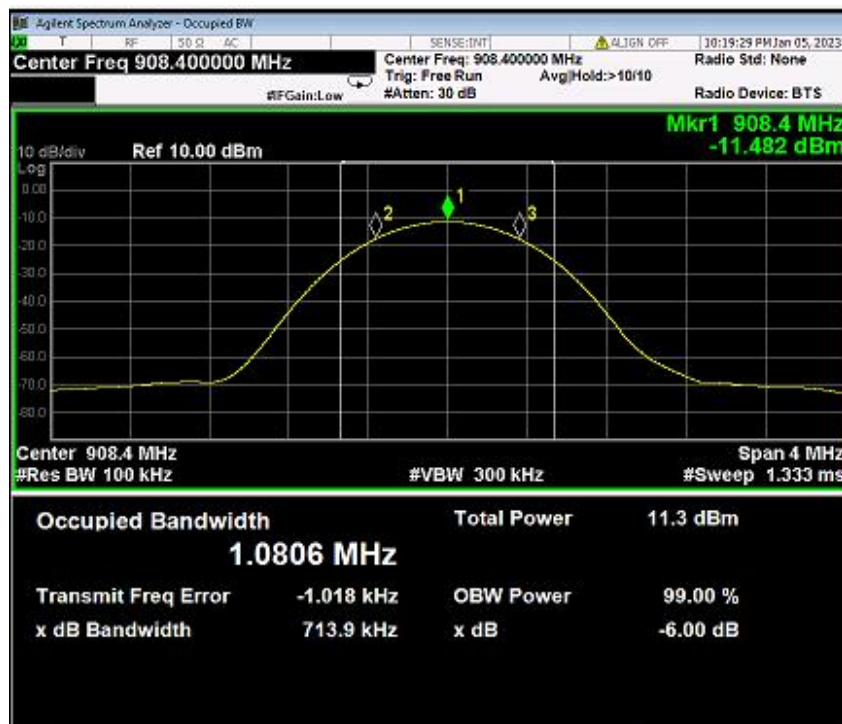


Channel 2: 912.0 MHz:

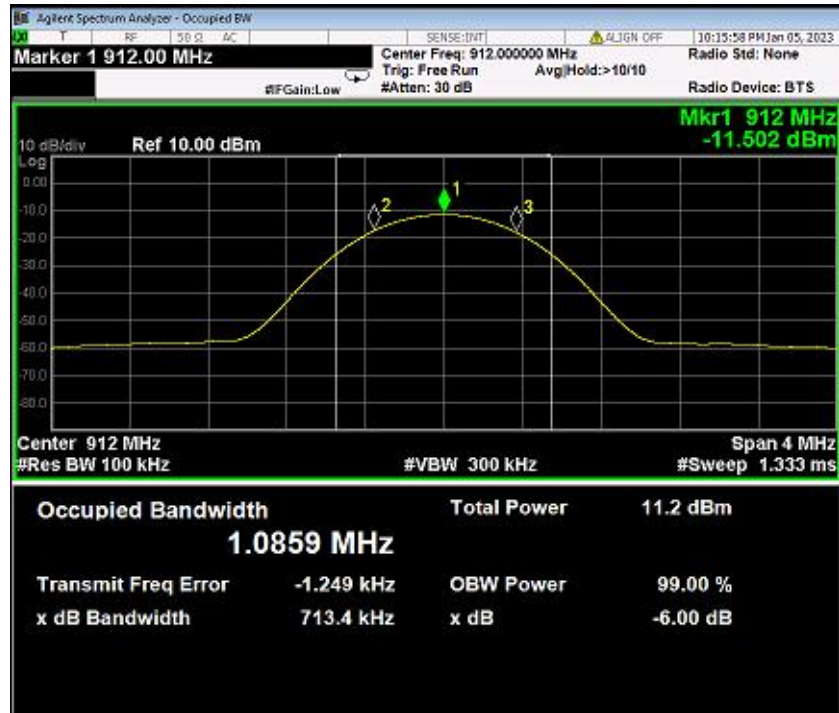

Channel 3: 916.0MHz:

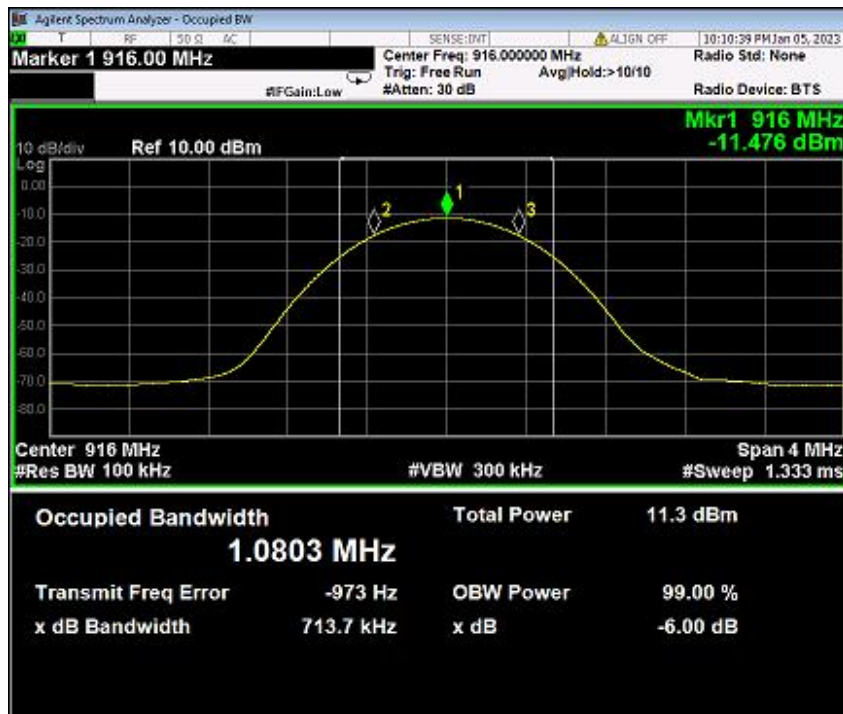

Channel 4: 920.0MHz:

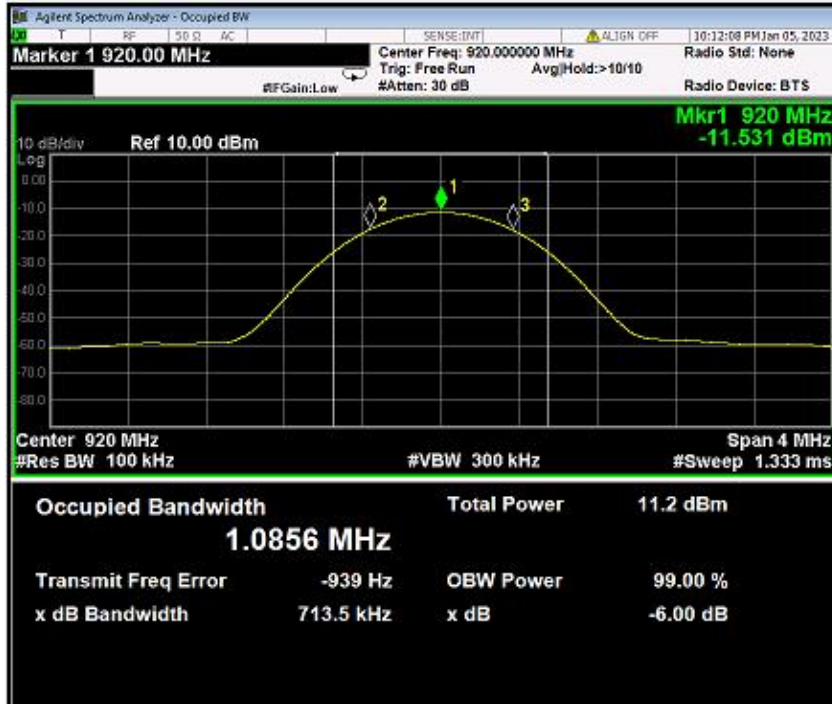

5.4 Maximum Peak Output Power

Test Requirement: FCC Part 15 C section 15.247


(b)(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt.

Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b) (1), (b) (2), and (b) (3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

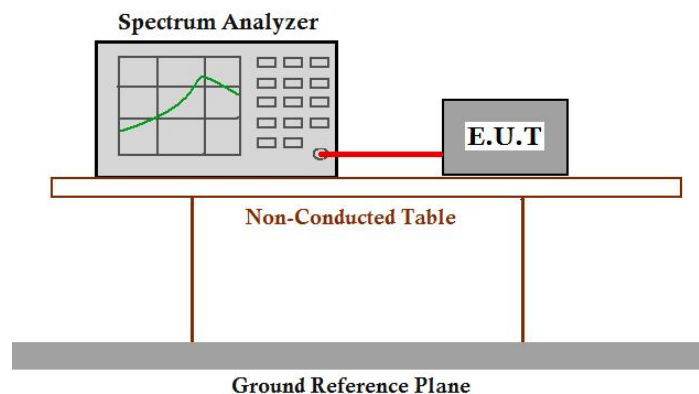

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (Cable loss =1.46dB) from the antenna port to the spectrum.
2. Set the RBW \geq DTS bandwidth
3. Set VBW \geq 3 x RBW
4. Set span \geq 3 x RBW.
5. Sweep time = auto.
6. Detector = peak.
7. Trace mode = max hold.
8. Allow trace to fully stabilize
9. Use peak marker function to determine the peak amplitude level

Report the worst case.


Test Data:

Channel No.	Frequency (MHz)	Measured Power (dBm)	Limit (dBm)	Result
1	908.4	11.051	30	Pass
2	912.0	11.148		Pass
3	916.0	11.497		Pass
4	920.0	11.638		Pass
Remark: cable loss=1.46dB				

The unit does meet the FCC requirements.

Result plot as follows:


Channel 1: 908.4 MHz:

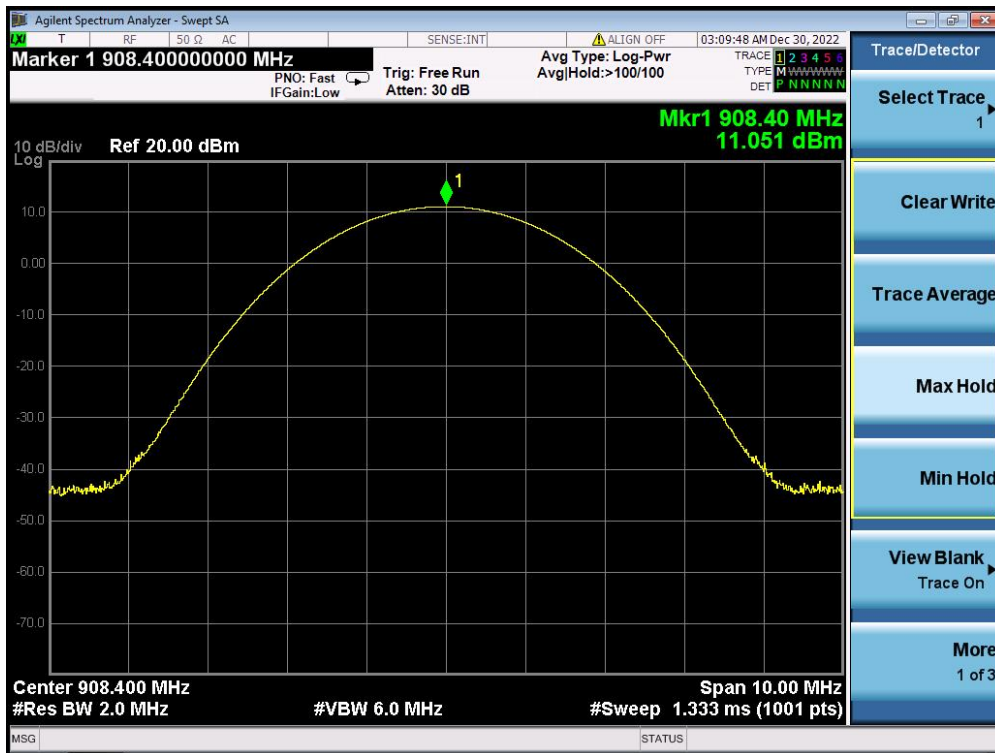


Channel 2: 912.0 MHz:



Channel 3: 916.0 MHz:

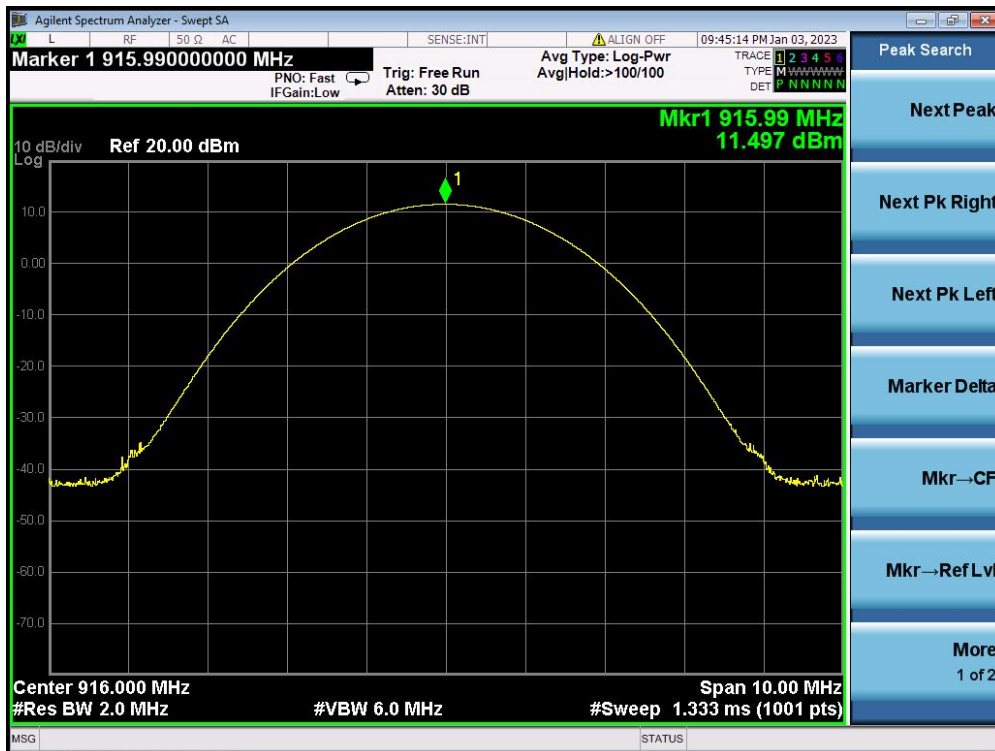

Channel 4: 920.0 MHz:

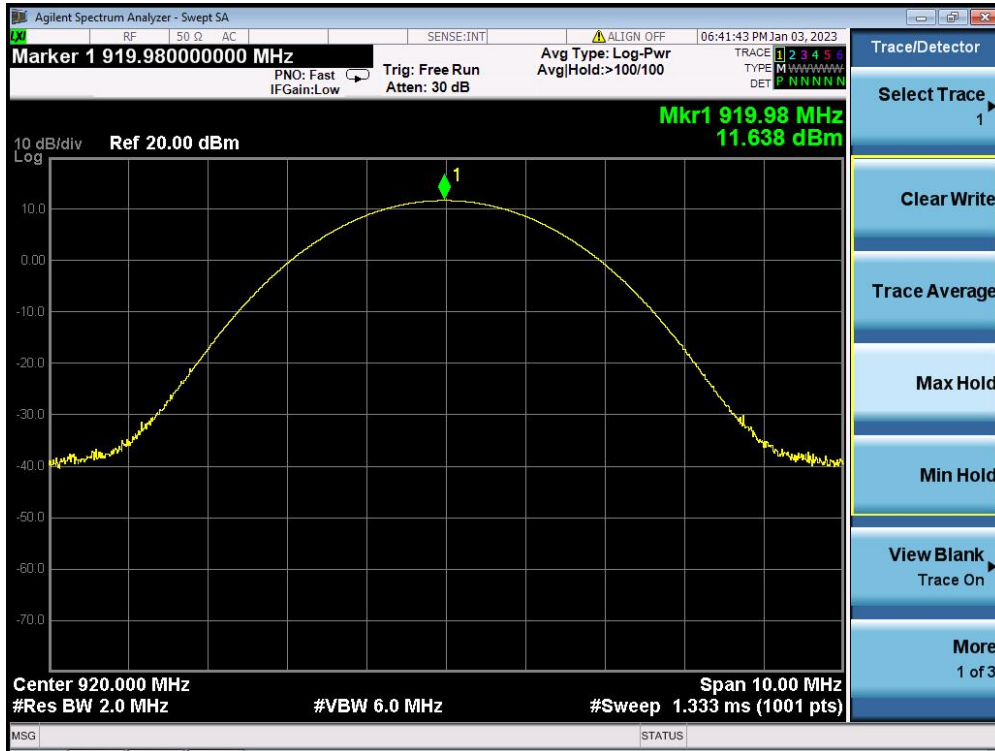


5.5 Peak Power Spectral Density

Test Requirement: FCC Part 15 C section 15.247
(e) For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channel and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

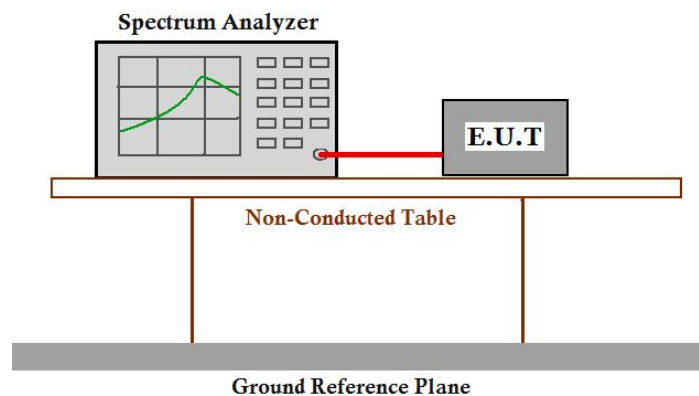

Test Procedure:

1. Remove the antenna from the EUT and then connect a low attention attenuation RF cable (Cable loss =1.46 dB) from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer:
 - a) Set instrument center frequency to DTS channel center frequency.
 - b) Set the instrument span to 1.5 times the OBW.
 - c) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
 - d) Set the VBW $\geq [3 \times \text{RBW}]$.
 - e) Detector = Peak

NOTE—The transmission symbol period (in seconds) is the reciprocal of the symbol rate (in baud or symbols per second). Note that each symbol can represent one or several data bits, and thus, the symbol rate should not be confused with the gross bit rate (expressed in bits/second). In no case should the sweep time be set less than the auto sweep time.

- h) Perform the measurement over a single sweep.
 - i) Use the peak marker function to determine the maximum amplitude level.
 - j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span to meet the minimum measurement point requirement as the RBW is reduced).
3. Repeat until all the test status is investigated.
4. Report the worst case.

Test result:


Channel No.	Frequency (MHz)	Measured Peak Power Spectral Density (dBm/3kHz)	Limit	Result
1	908.4	-4.017	8dBm/3kHz	Pass
2	912.0	-4.141		Pass
3	916.0	-4.229		Pass
4	920.0	-4.342		Pass

Remark: Cable loss=1.46dB


The unit does meet the FCC requirements.

Result plot as follows:


Channel 1: 908.4 MHz:

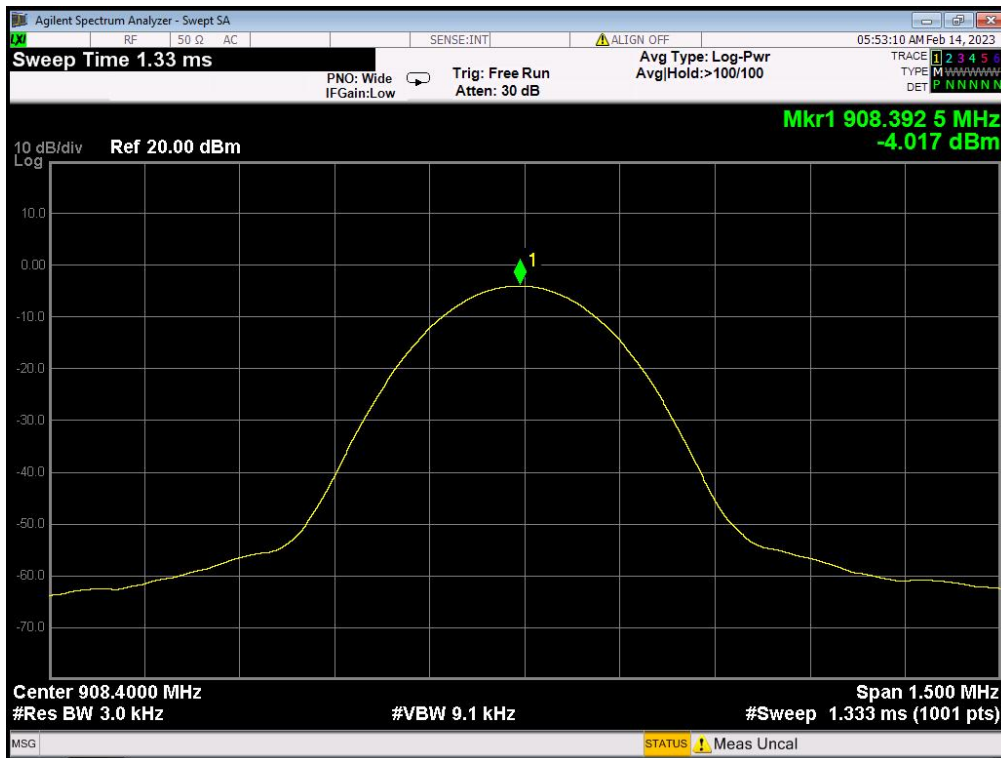


Channel 2: 912.0 MHz:

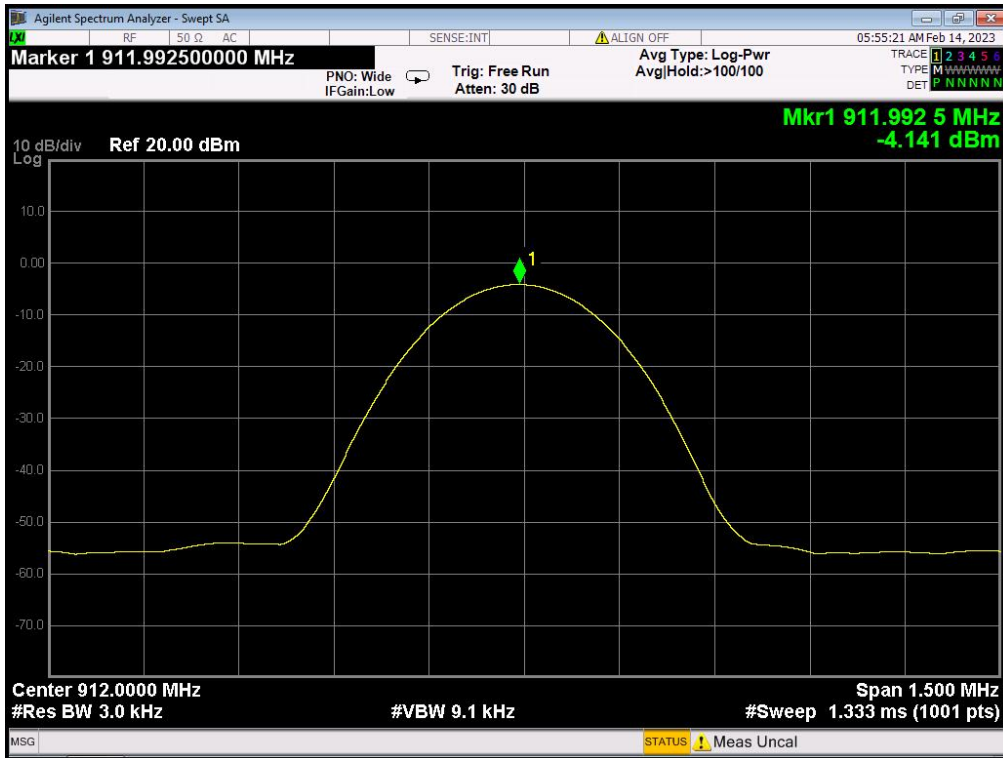

Channel 3: 916.0 MHz:

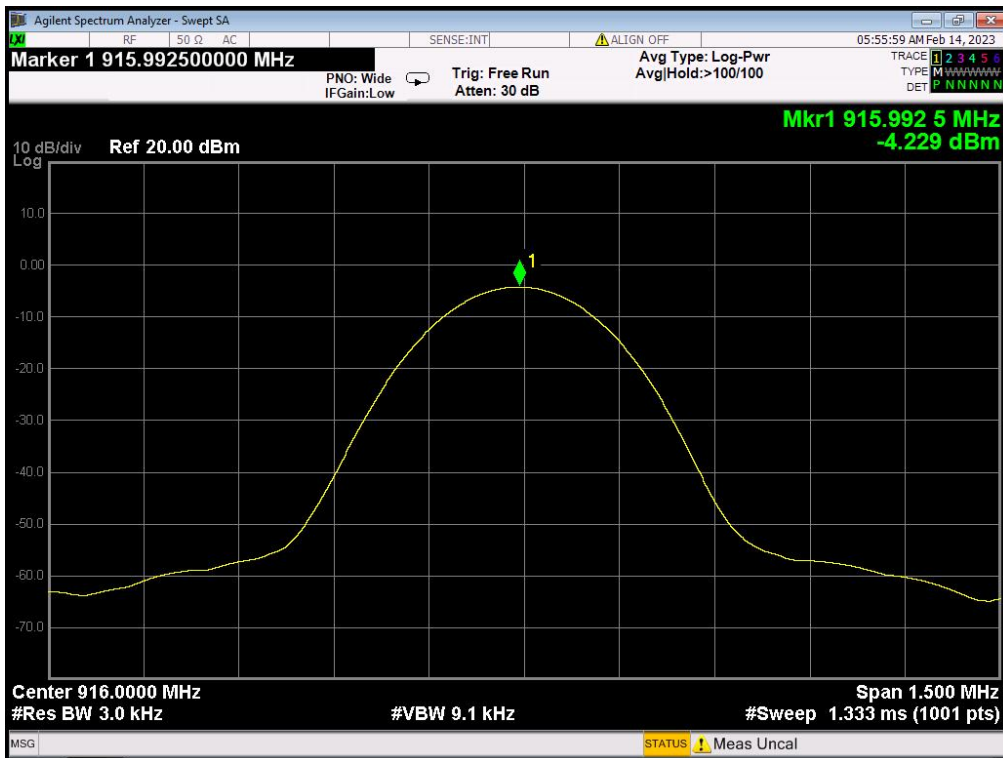

Channel 4: 920.0 MHz:

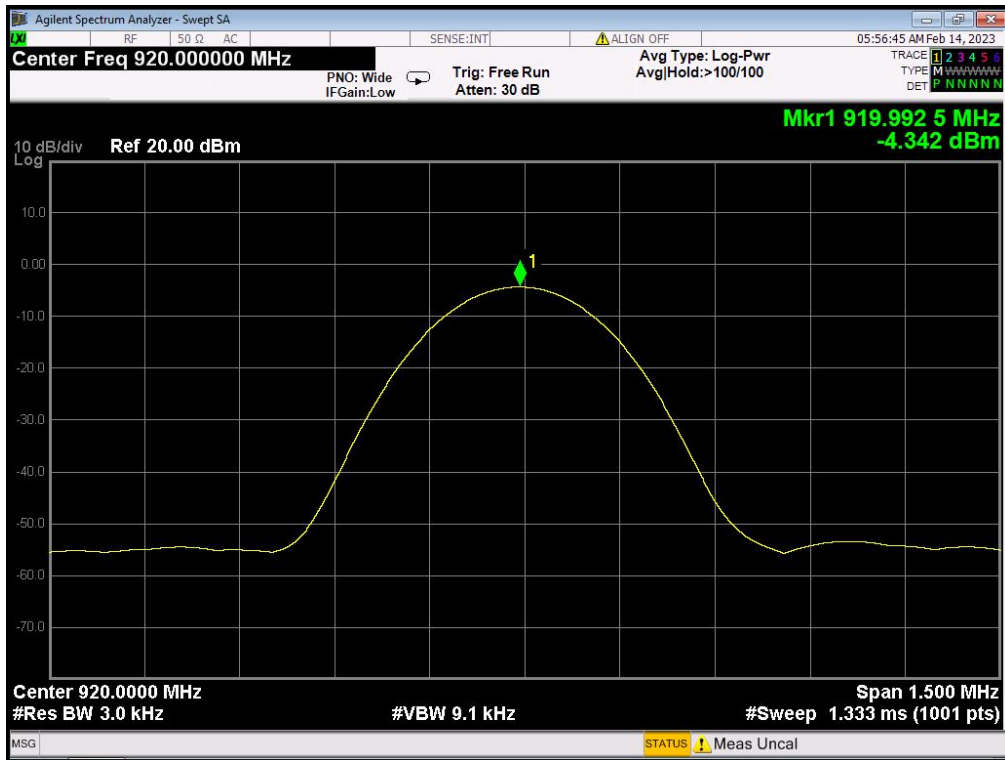

5.6 Conducted Spurious Emissions


Test Requirement: FCC Part 15 C section 15.247

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channel and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

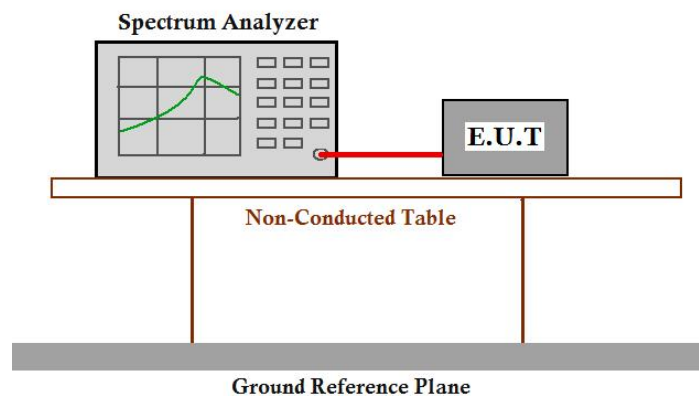


Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set the spectrum analyzer: RBW=100 KHz, VBW = 300KHz. Sweep = auto; Detector Function = Peak. Trace = Max Hold, Scan up through 10th harmonic.
3. Measure the Conducted Spurious Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worst case.

Result plot as follows:


Channel 1: 908.4MHz

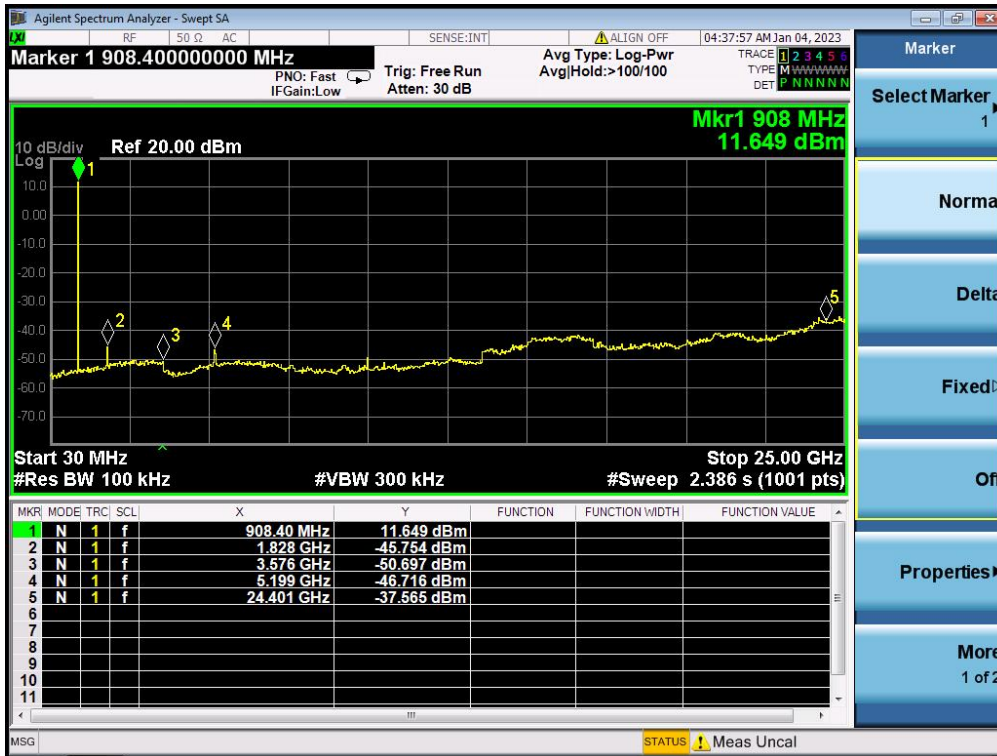


Channel 2: 912.0MHz

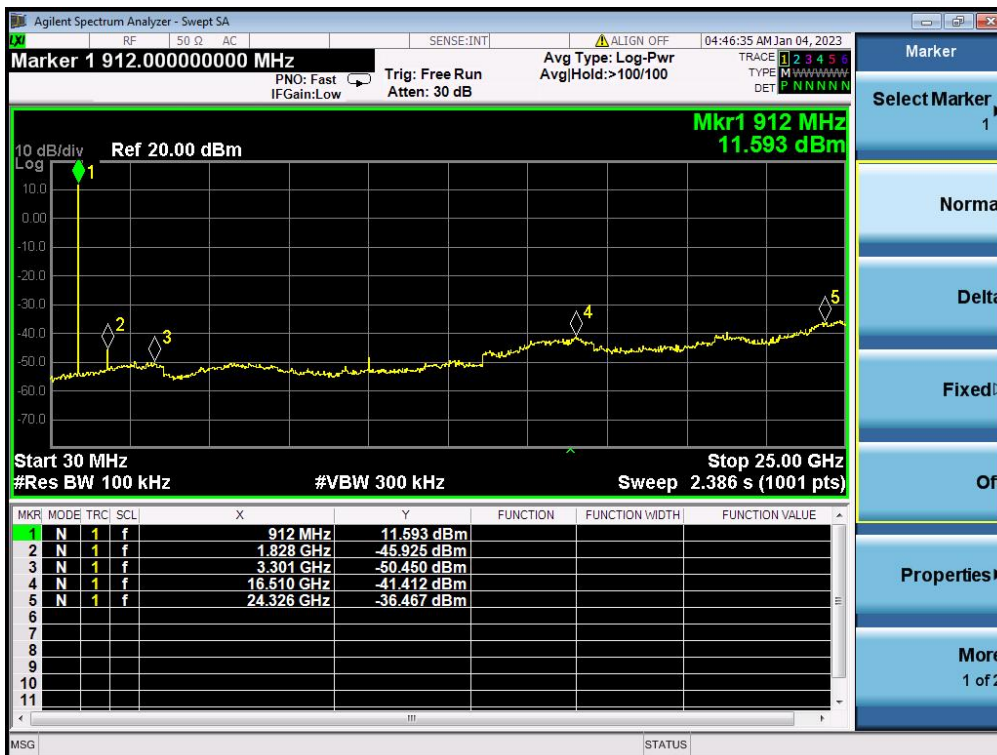

Channel 3: 916.0 MHz

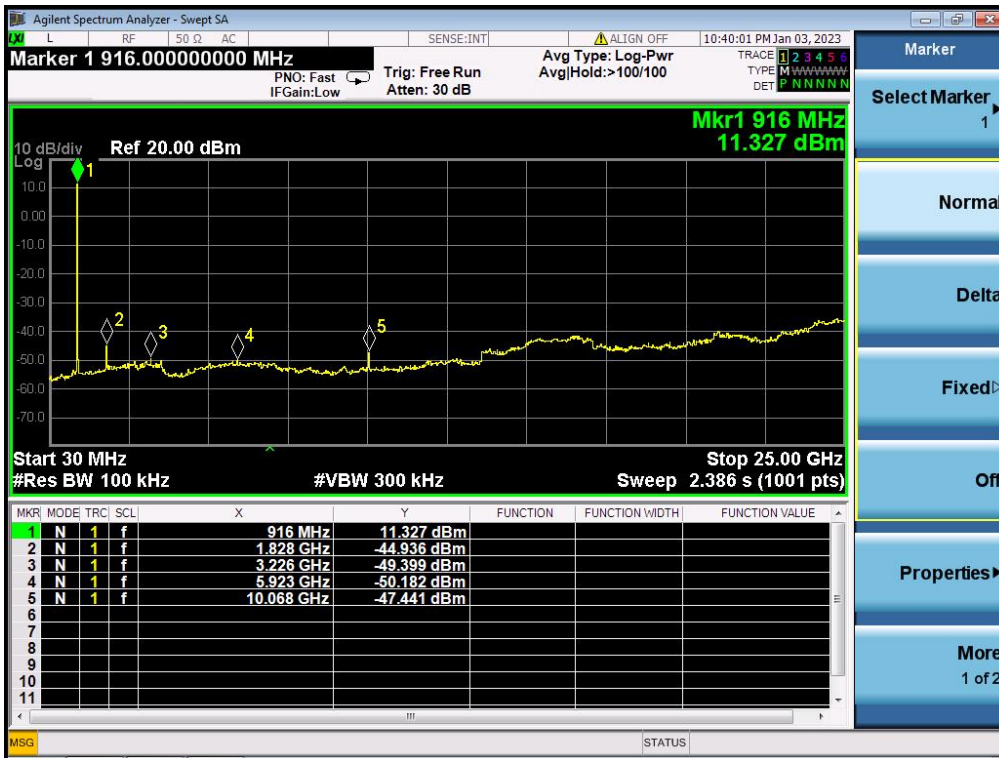

Channel 4: 920.0 MHz

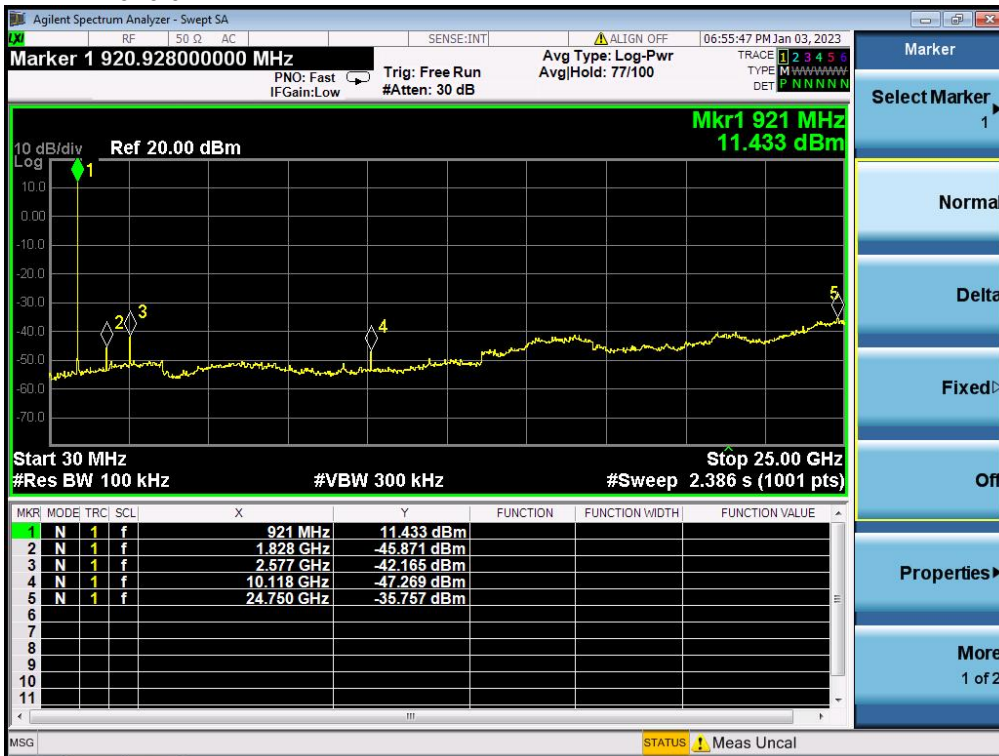

The results do meet the FCC requirements.

5.7 Radiated Spurious Emissions

Test Requirement: FCC Part 15 C section 15.247
(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, and provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Detector: For PK value:

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For AV value:

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz, 9kHz for < 30 MHz

VBW = 10 Hz

Sweep = auto


Detector function = peak

Trace = max hold


15.209 Limit: 40.0 dB μ V/m between 30 MHz & 88 MHz
43.5 dB μ V/m between 88 MHz & 216 MHz
46.0 dB μ V/m between 216 MHz & 960 MHz
54.0 dB μ V/m above 960 MHz

Test Configuration:


- 1) 9kHz to 30MHz emissions:

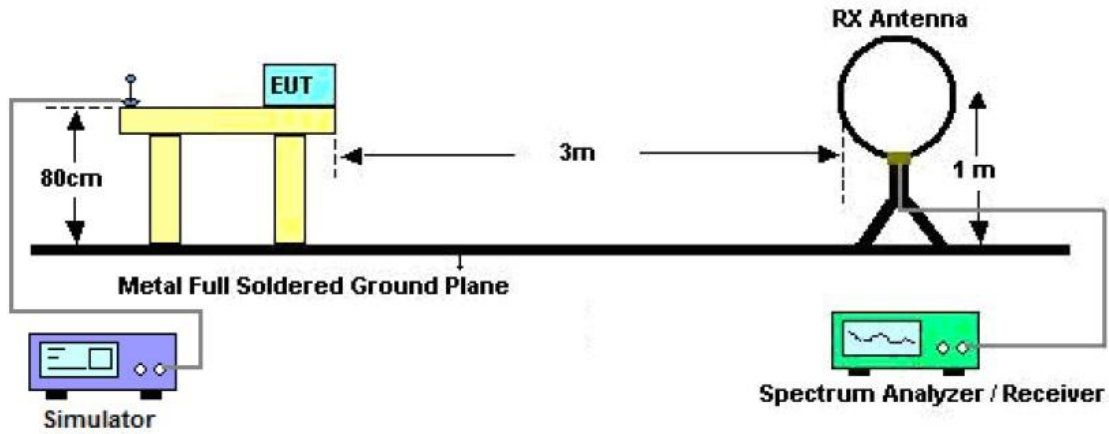

- 2) 30 MHz to 1 GHz emissions:

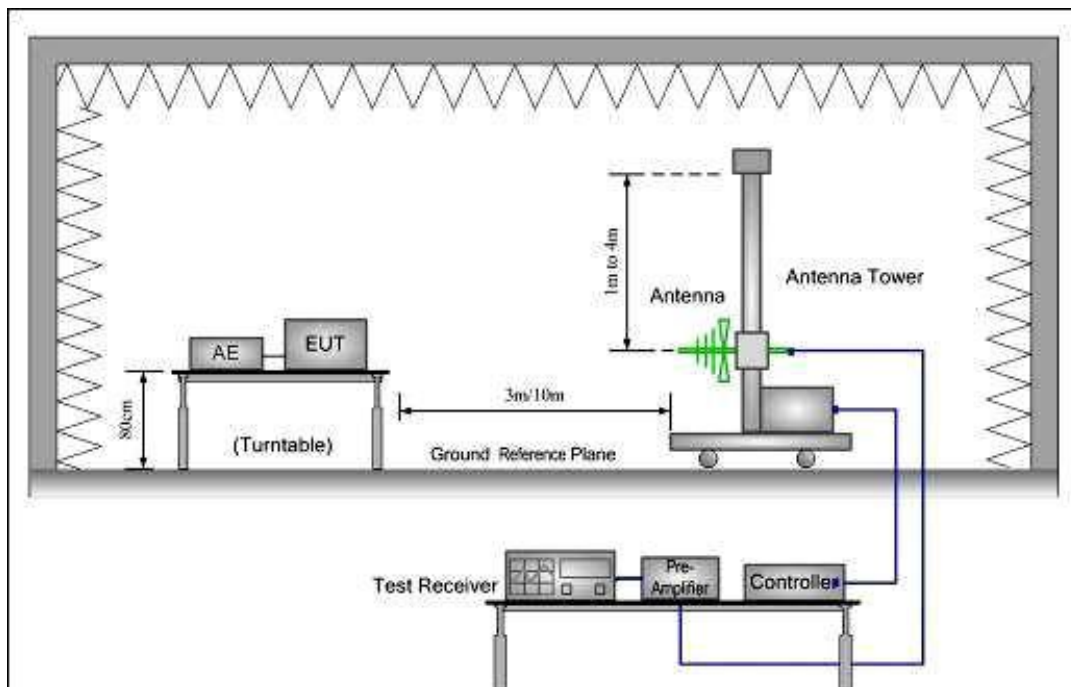

3) 1 GHz to 40 GHz emissions:

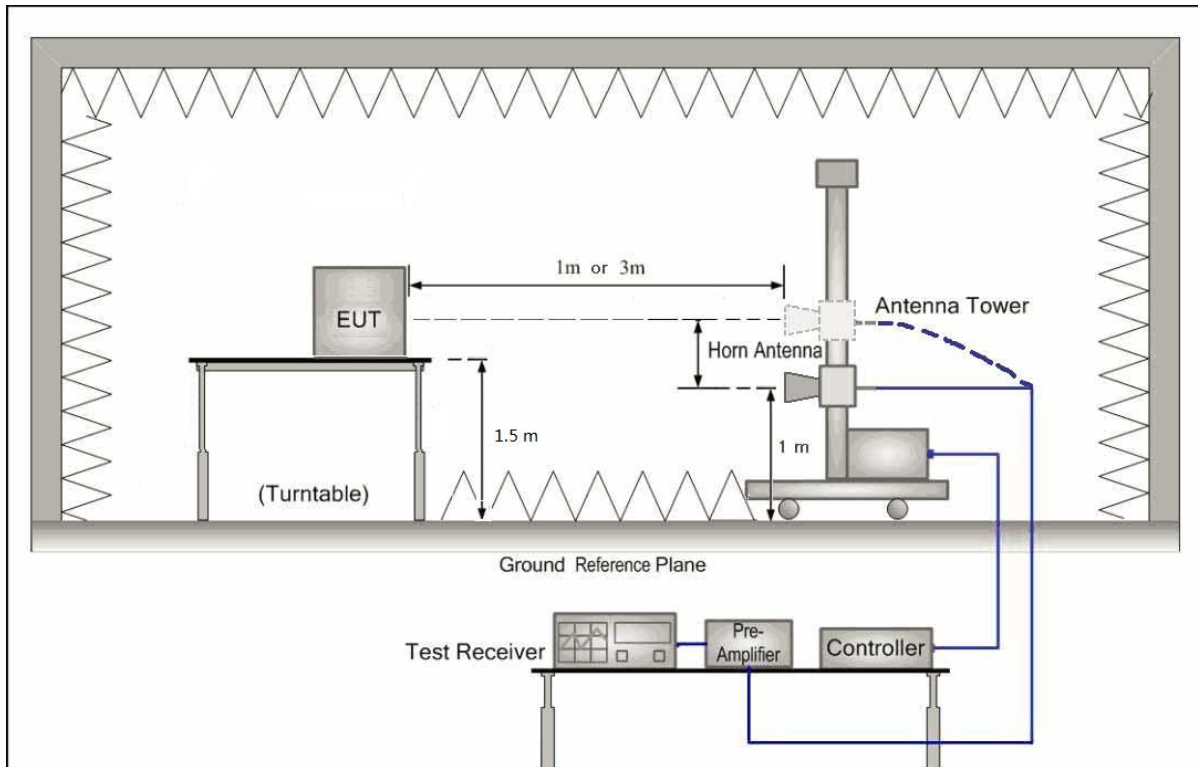

- Test Procedure:** (1) The receiver was scanned from 0.009MHz to 25GHz. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only. The worst case emissions were reported.
- (2) Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.
- (3) Pre-test under all modes below 1GHz, choose the worst case mode record on the report.

5.7.1 Harmonic and other spurious emissions

Test at Channel 1 (908.4 MHz) in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBμV/m)

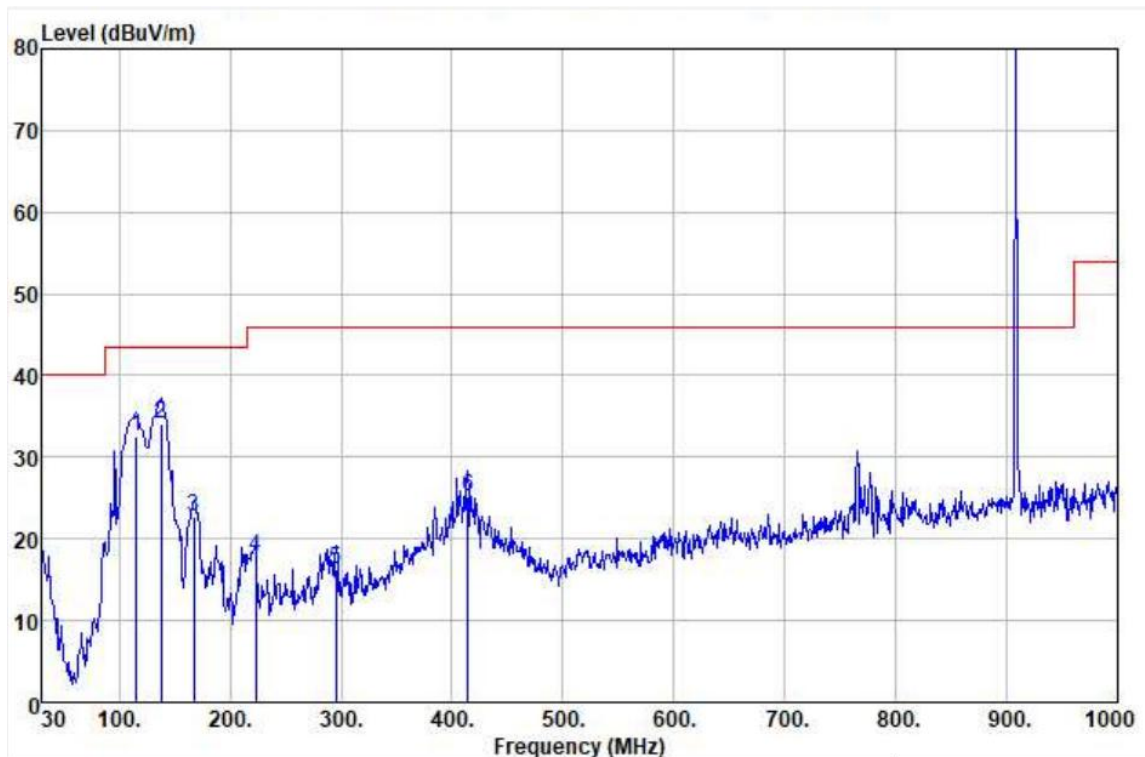

Quasi-peak measurement

No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	115.360	50.67	9.09	1.27	28.55	32.48	43.50	-11.02	HORIZONTAL	QP
2	137.670	52.78	8.24	1.40	28.25	34.17	43.50	-9.33	HORIZONTAL	QP
3	167.740	40.90	8.62	1.55	28.41	22.66	43.50	-20.84	HORIZONTAL	QP
4	223.030	32.42	11.27	1.81	27.71	17.79	46.00	-28.21	HORIZONTAL	QP
5	295.780	28.35	13.28	2.11	27.56	16.18	46.00	-29.82	HORIZONTAL	QP
6	414.120	35.08	15.80	2.50	28.14	25.24	46.00	-20.76	HORIZONTAL	QP


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Vertical:

Peak scan

Level (dBμV/m)

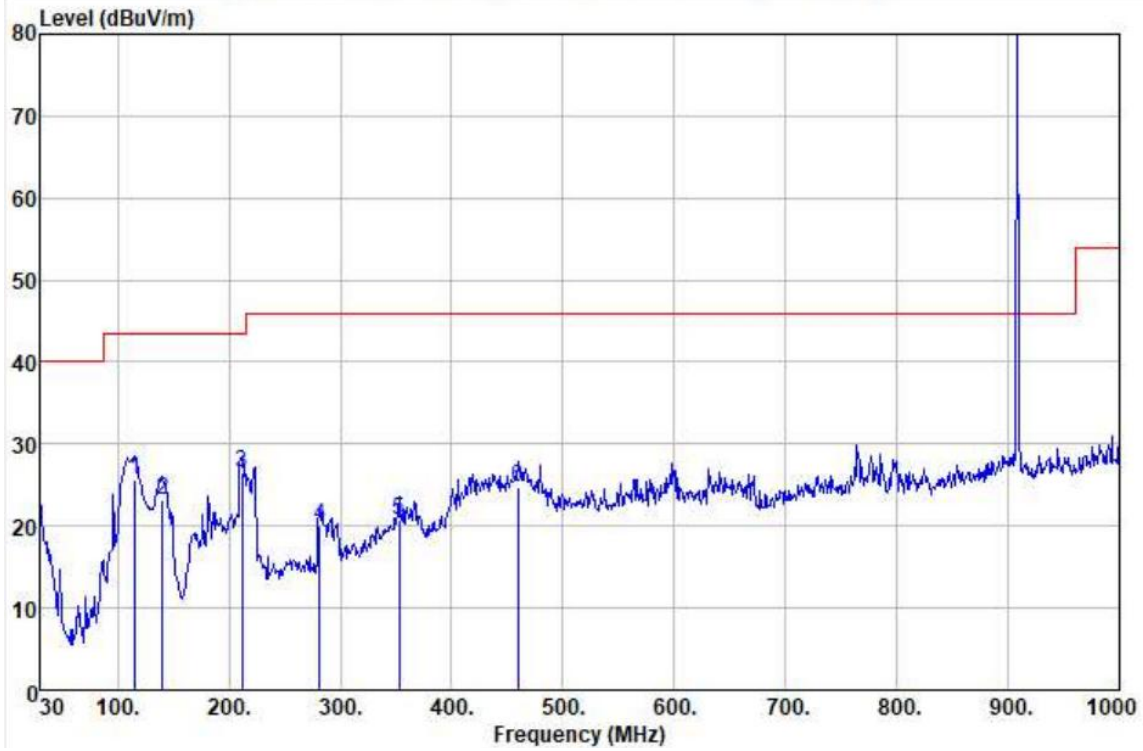

Quasi-peak measurement

No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	115.360	43.72	9.09	1.27	28.55	25.53	43.50	-17.97	VERTICAL	QP
2	140.580	41.86	8.08	1.41	28.22	23.13	43.50	-20.37	VERTICAL	QP
3	211.390	41.94	10.47	1.76	27.54	26.63	43.50	-16.87	VERTICAL	QP
4	281.230	32.43	13.22	2.05	27.68	20.02	46.00	-25.98	VERTICAL	QP
5	353.010	31.25	14.52	2.29	27.44	20.62	46.00	-25.38	VERTICAL	QP
6	459.710	34.24	16.44	2.65	28.52	24.81	46.00	-21.19	VERTICAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor


Note: The emission above limit is fundamental emission, which is not subject to the limit.

Spurious emissions above 1GHz

Horizontal:

Peak scan

Level (dBμV/m)

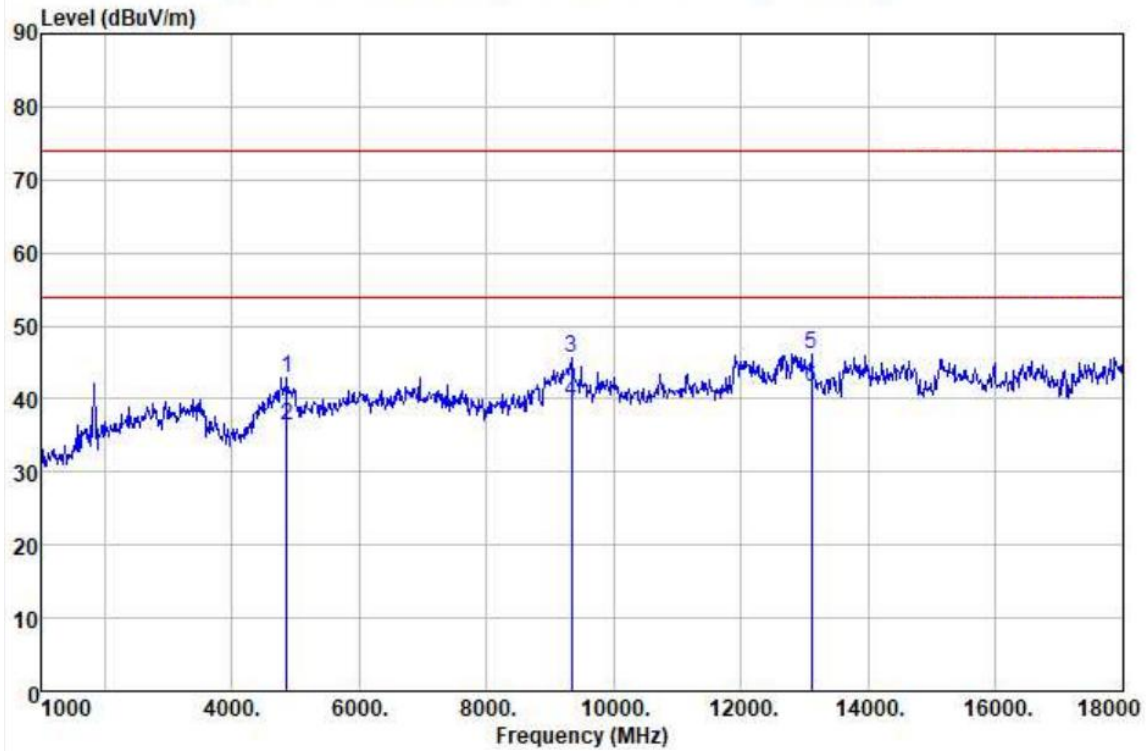


No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	4859.000	22.48	33.39	9.64	22.57	42.94	74.00	-31.06	HORIZONTAL	Peak
2	4859.000	15.79	33.39	9.64	22.57	36.25	54.00	-17.75	HORIZONTAL	Average
3	9330.000	16.07	38.80	14.19	23.43	45.63	74.00	-28.37	HORIZONTAL	Peak
4	9330.000	9.93	38.80	14.19	23.43	39.49	54.00	-14.51	HORIZONTAL	Average
5	13104.000	10.31	40.55	17.27	21.99	46.14	74.00	-27.86	HORIZONTAL	Peak
6	13104.000	5.75	40.55	17.27	21.99	41.58	54.00	-12.42	HORIZONTAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Vertical:

Peak scan

Level (dBµV/m)

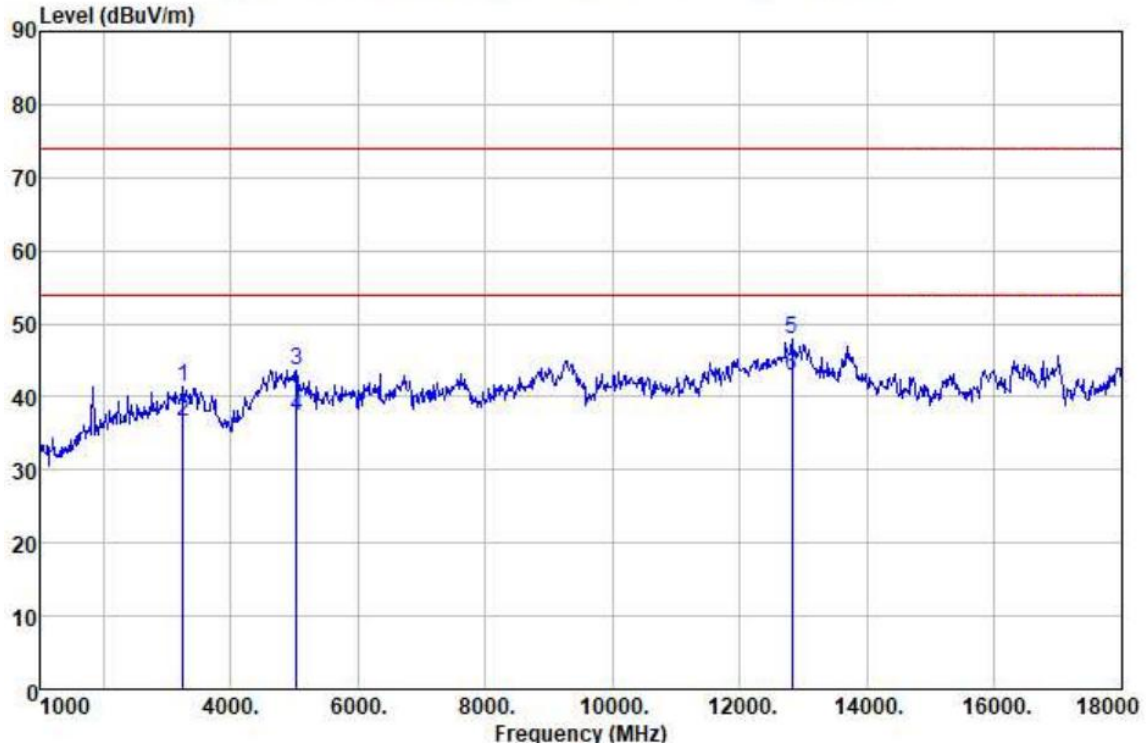

No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	3244.000	27.60	30.53	7.65	24.42	41.36	74.00	-32.64	VERTICAL	Peak
2	3244.000	22.77	30.53	7.65	24.42	36.53	54.00	-17.47	VERTICAL	Average
3	5029.000	22.63	33.52	9.83	22.24	43.74	74.00	-30.26	VERTICAL	Peak
4	5029.000	16.33	33.52	9.83	22.24	37.44	54.00	-16.56	VERTICAL	Average
5	12815.000	12.38	40.26	17.03	21.84	47.83	74.00	-26.17	VERTICAL	Peak
6	12815.000	7.42	40.26	17.03	21.84	42.87	54.00	-11.13	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Test at Channel 2 (912.0MHz) in transmitting status

9 kHz~30MHz Test result


The Low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBμV/m)

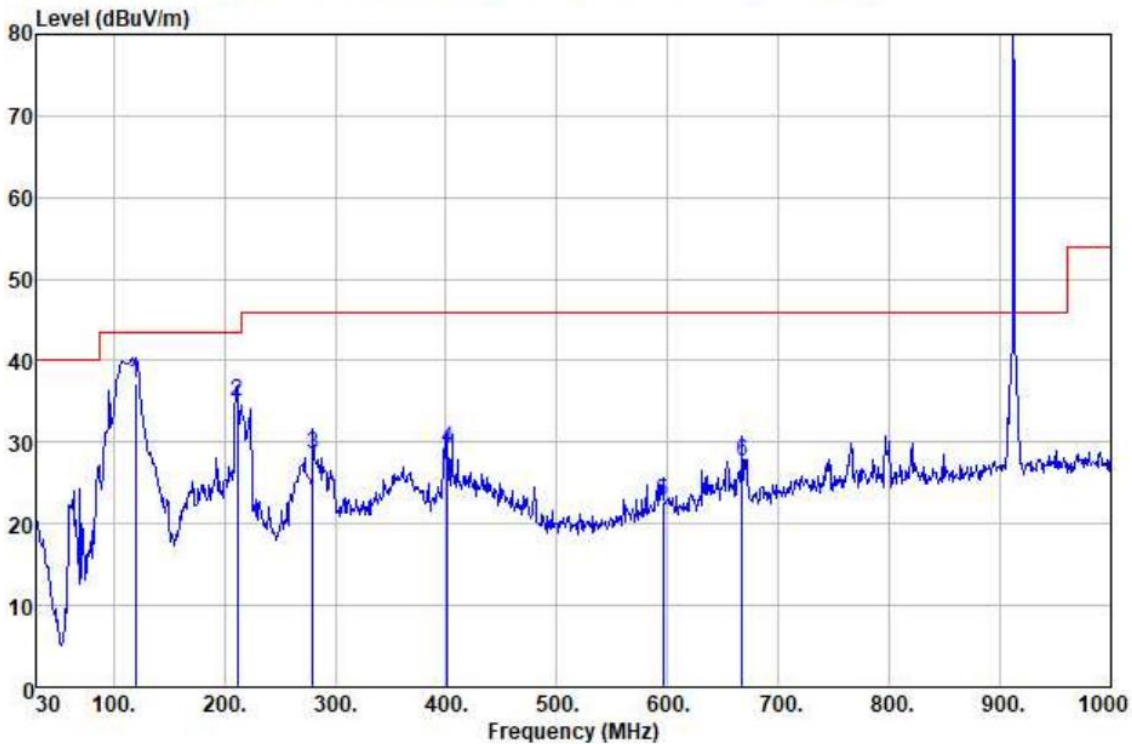

Quasi-peak measurement

No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	120.210	55.18	9.29	1.30	28.50	37.27	43.50	-6.23	HORIZONTAL	QP
2	211.390	50.36	10.47	1.76	27.51	35.05	43.50	-8.45	HORIZONTAL	QP
3	280.260	41.00	13.22	2.05	27.69	28.58	46.00	-17.42	HORIZONTAL	QP
4	401.510	39.27	15.62	2.46	28.19	29.16	46.00	-16.84	HORIZONTAL	QP
5	595.510	29.15	18.81	3.05	28.29	22.72	46.00	-23.28	HORIZONTAL	QP
6	667.290	33.44	19.57	3.24	28.58	27.67	46.00	-18.33	HORIZONTAL	QP


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Vertical:

Peak scan

Level (dBμV/m)

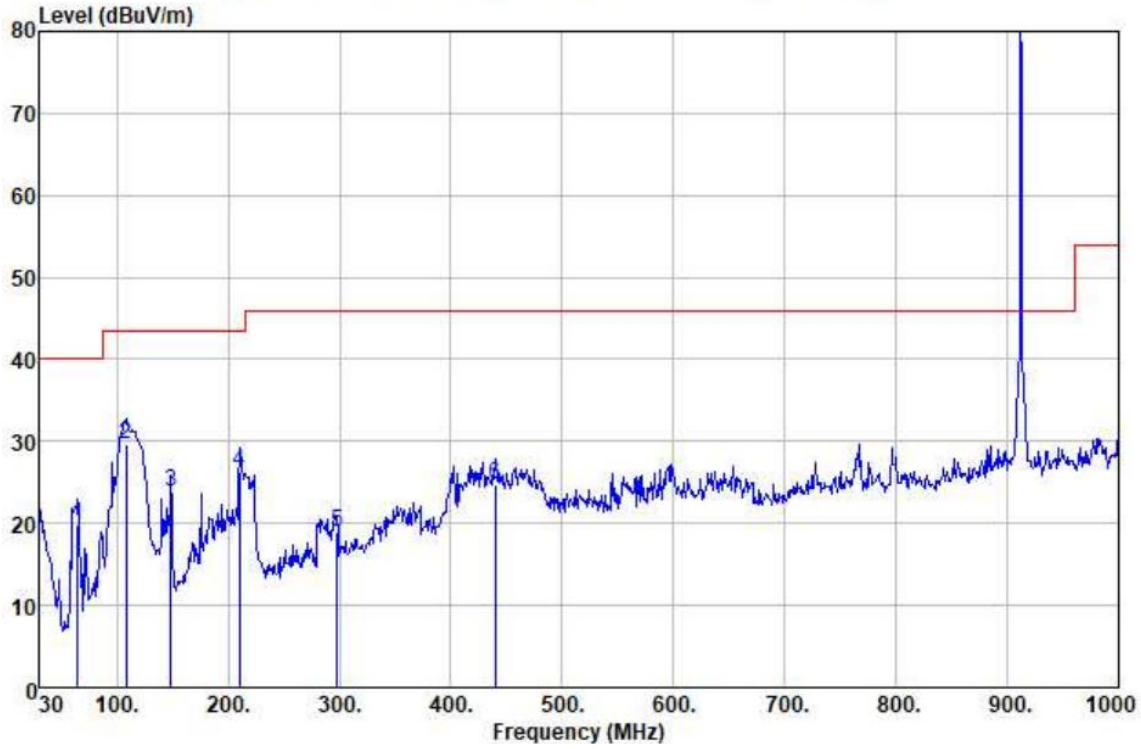

Quasi-peak measurement

No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	64.920	41.26	5.93	0.94	28.25	19.88	40.00	-20.12	VERTICAL	QP
2	108.570	48.32	8.79	1.22	28.63	29.70	43.50	-13.80	VERTICAL	QP
3	148.340	43.20	7.77	1.45	28.54	23.88	43.50	-19.62	VERTICAL	QP
4	210.420	41.56	10.41	1.75	27.51	26.21	43.50	-17.29	VERTICAL	QP
5	297.720	31.15	13.29	2.11	27.58	18.97	46.00	-27.03	VERTICAL	QP
6	440.310	34.41	16.16	2.59	28.41	24.75	46.00	-21.25	VERTICAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor


Note: The emission above limit is fundamental emission, which is not subject to the limit.

Spurious emissions above 1GHz

Horizontal:

Peak scan

Level (dBμV/m)

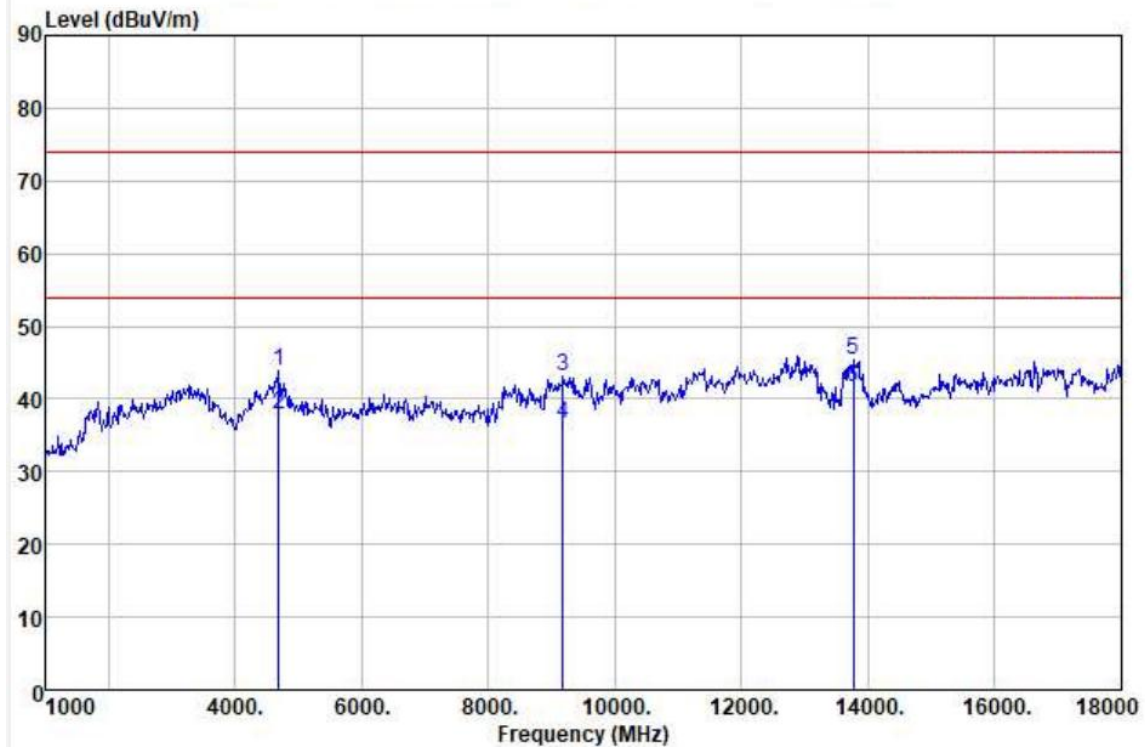


No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	4689.000	24.14	33.25	9.45	23.01	43.83	74.00	-30.17	HORIZONTAL	Peak
2	4689.000	18.21	33.25	9.45	23.01	37.90	54.00	-16.10	HORIZONTAL	Average
3	9177.000	13.53	38.80	14.05	23.37	43.01	74.00	-30.99	HORIZONTAL	Peak
4	9177.000	7.18	38.80	14.05	23.37	36.66	54.00	-17.34	HORIZONTAL	Average
5	13767.000	10.72	39.57	17.79	22.59	45.49	74.00	-28.51	HORIZONTAL	Peak
6	13767.000	6.85	39.57	17.79	22.59	41.62	54.00	-12.38	HORIZONTAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Vertical:

Peak scan

Level (dBµV/m)

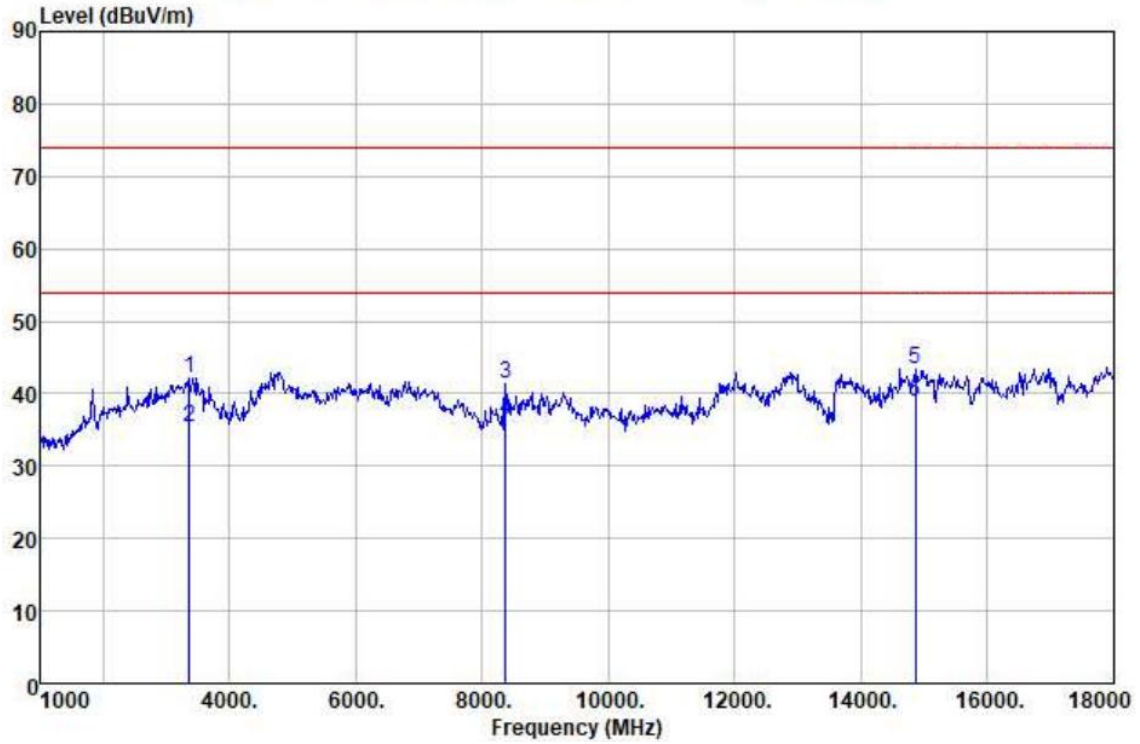

No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	3363.000	27.84	30.93	7.81	24.48	42.10	74.00	-31.90	VERTICAL	Peak
2	3363.000	21.02	30.93	7.81	24.48	35.28	54.00	-18.72	VERTICAL	Average
3	8378.000	14.29	37.60	13.28	23.80	41.37	74.00	-32.63	VERTICAL	Peak
4	8378.000	9.16	37.60	13.28	23.80	36.24	54.00	-17.76	VERTICAL	Average
5	14855.000	8.36	39.98	18.64	23.57	43.41	74.00	-30.59	VERTICAL	Peak
6	14855.000	3.77	39.98	18.64	23.57	38.82	54.00	-15.18	VERTICAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Test at Channel 3 (916.0 MHz) in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBμV/m)

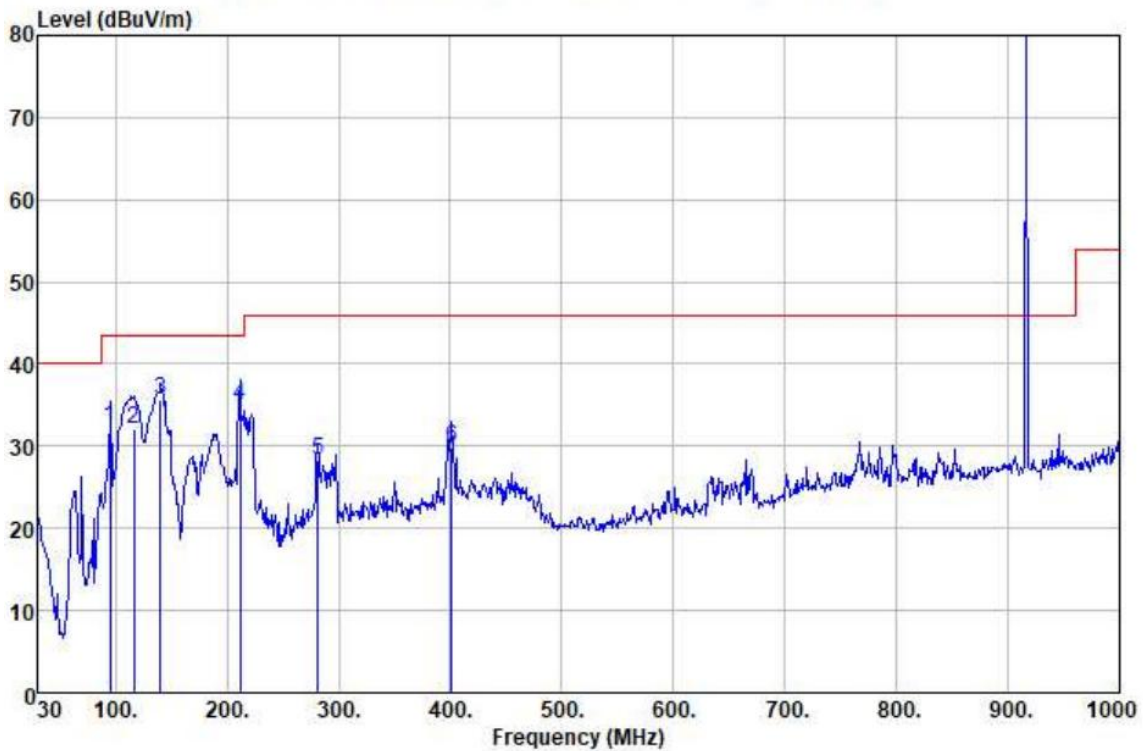

Quasi-peak measurement

No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	91.990	51.60	8.25	1.14	28.60	32.39	43.50	-11.11	HORIZONTAL	QP
2	116.330	50.32	9.13	1.27	28.54	32.18	43.50	-11.32	HORIZONTAL	QP
3	140.580	51.33	8.08	1.41	28.22	35.60	43.50	-7.90	HORIZONTAL	QP
4	211.390	50.39	10.47	1.76	27.54	35.08	43.50	-8.42	HORIZONTAL	QP
5	281.230	40.65	13.22	2.05	27.68	28.24	46.00	-17.76	HORIZONTAL	QP
6	401.510	40.04	15.62	2.46	28.19	29.93	46.00	-16.07	HORIZONTAL	QP


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Vertical:

Peak scan

Level (dBµV/m)

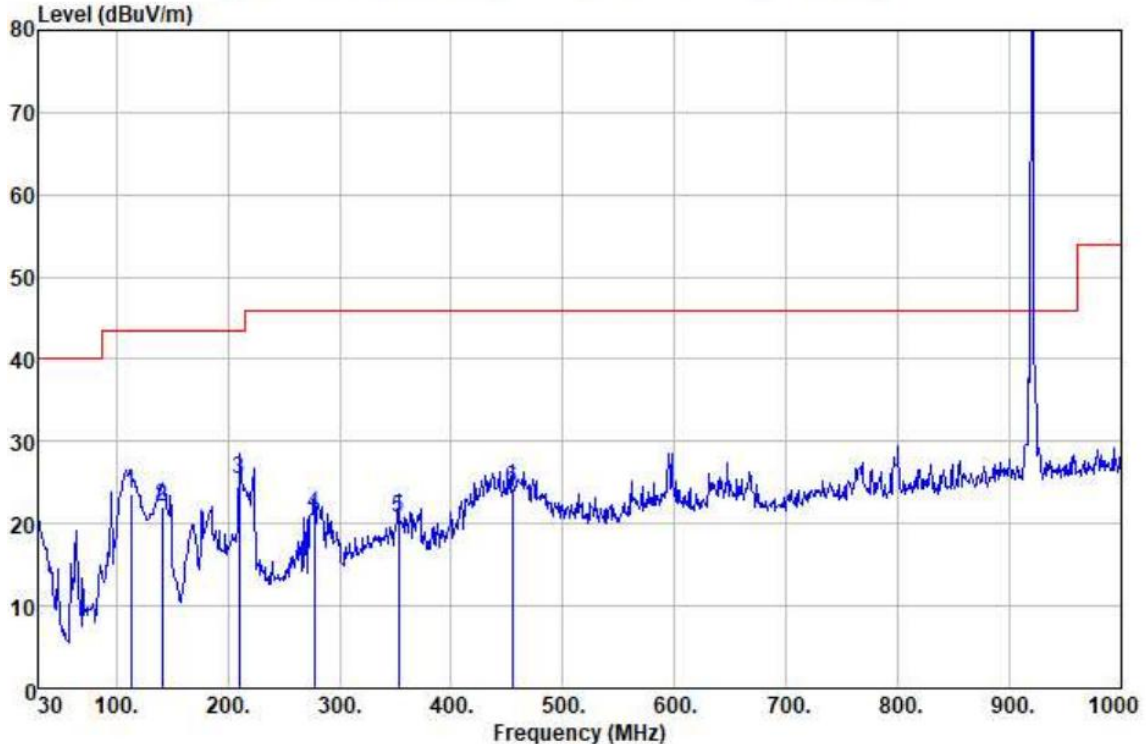

Quasi-peak measurement

No.	Freq MHz	Read Level dBµV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBµV/m	Limit Line dBµV/m	Over Limit dB	Pol/Phase	Remark
1	113.420	41.86	9.00	1.25	28.56	23.55	43.50	-19.95	VERTICAL	QP
2	141.550	40.79	8.04	1.42	28.26	21.99	43.50	-21.51	VERTICAL	QP
3	210.420	40.78	10.41	1.75	27.51	25.43	43.50	-18.07	VERTICAL	QP
4	277.350	33.44	13.21	2.03	27.57	21.11	46.00	-24.89	VERTICAL	QP
5	353.010	31.25	14.52	2.29	27.44	20.62	46.00	-25.38	VERTICAL	QP
6	454.860	33.79	16.37	2.64	28.56	24.24	46.00	-21.76	VERTICAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor


Note: The emission above limit is fundamental emission, which is not subject to the limit.

Spurious emissions above 1GHz

Horizontal:

Peak scan

Level (dBμV/m)

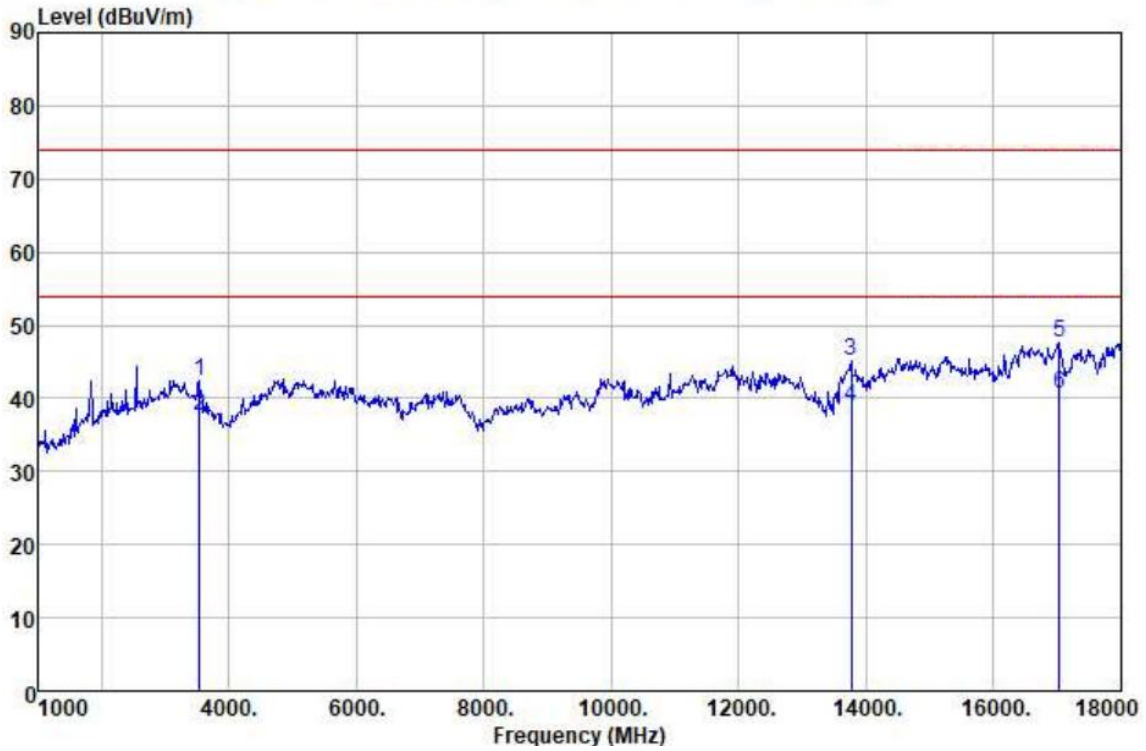


No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	3533.000	27.67	31.27	8.03	24.57	42.40	74.00	-31.60	HORIZONTAL	Peak
2	3533.000	22.93	31.27	8.03	24.57	37.66	54.00	-16.34	HORIZONTAL	Average
3	13767.000	10.26	39.57	17.79	22.59	45.03	74.00	-28.97	HORIZONTAL	Peak
4	13767.000	4.21	39.57	17.79	22.59	38.98	54.00	-15.02	HORIZONTAL	Average
5	17031.000	6.82	41.79	20.34	21.37	47.58	74.00	-26.42	HORIZONTAL	Peak
6	17031.000	-0.08	41.79	20.34	21.37	40.68	54.00	-13.32	HORIZONTAL	Average

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Vertical:

Peak scan

Level (dBµV/m)

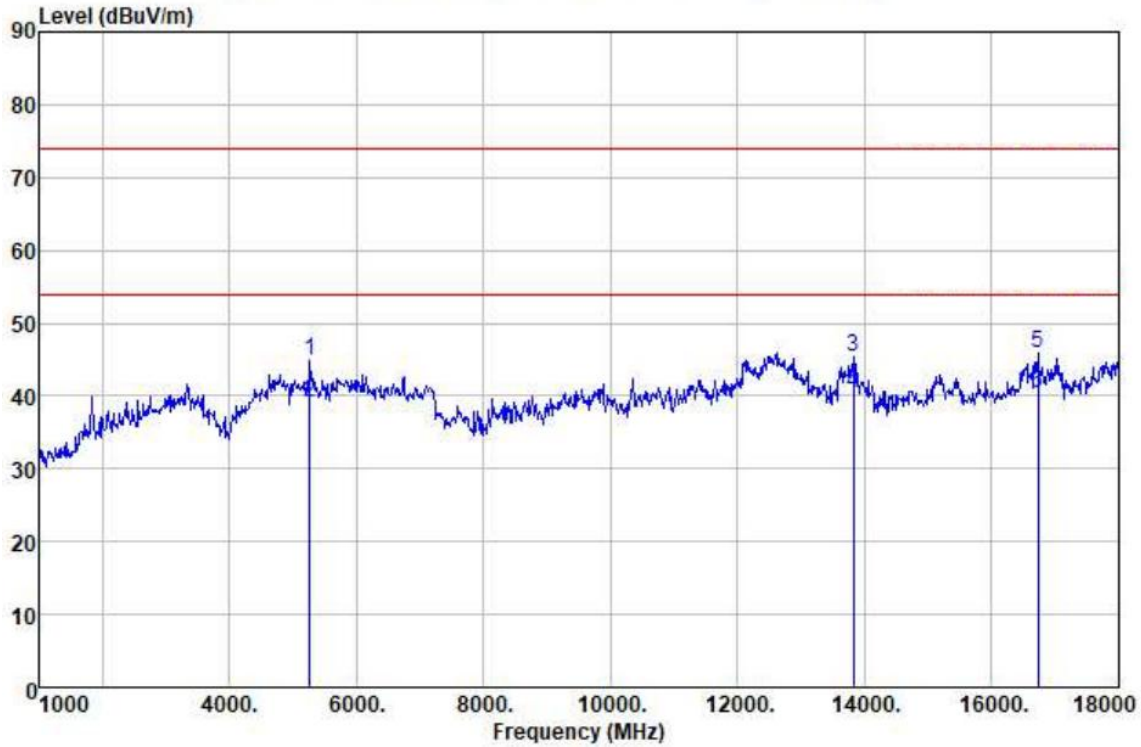

No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	5267.000	23.55	33.71	10.10	22.57	44.79	74.00	-29.21	VERTICAL	Peak
2	5267.000	17.76	33.71	10.10	22.57	39.00	54.00	-15.00	VERTICAL	Averag
	313818.000	10.74	39.49	17.83	22.64	45.42	74.00	-28.58	VERTICAL	Peak
	413818.000	5.56	39.49	17.83	22.64	40.24	54.00	-13.76	VERTICAL	Averag
	516725.000	6.73	40.93	20.05	21.93	45.78	74.00	-28.22	VERTICAL	Peak
	616725.000	1.35	40.93	20.05	21.93	40.40	54.00	-13.60	VERTICAL	Averag

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Test at Channel 4 (920.0MHz) in transmitting status

9kHz~30MHz Test result


The Low frequency, which started from 9kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not report

30 MHz~1 GHz Spurious Emissions .Quasi-Peak Measurement

Horizontal:

Peak scan

Level (dBμV/m)

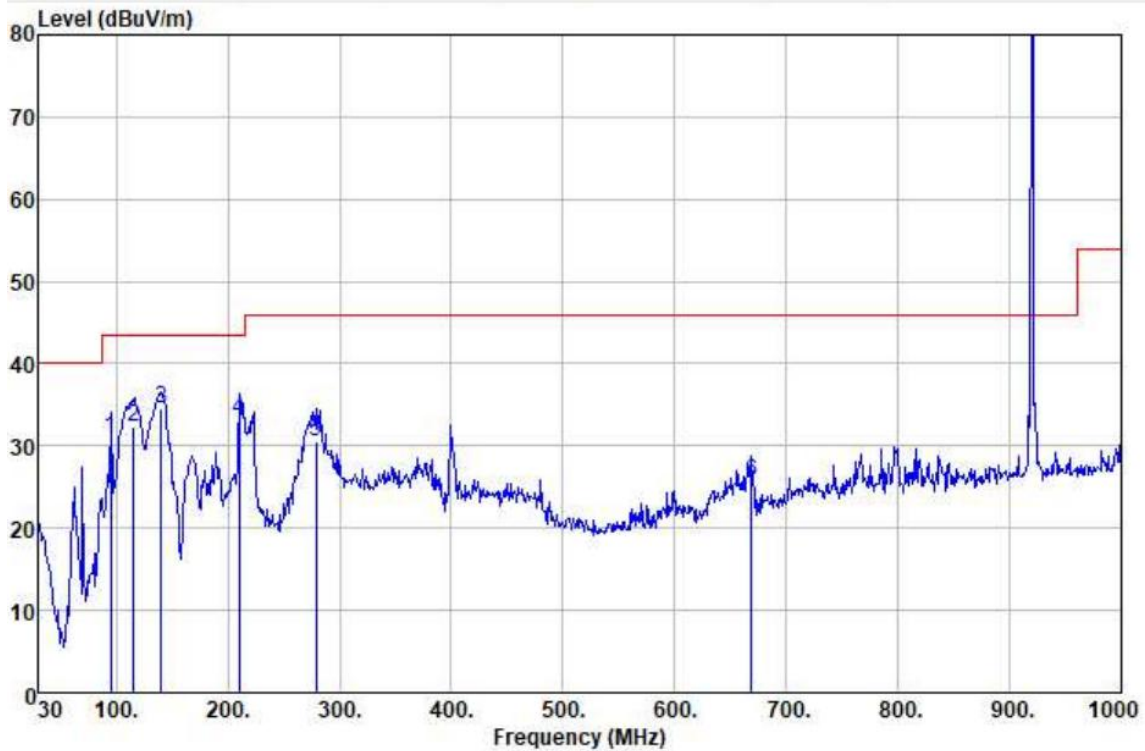

Quasi-peak measurement

No.	Freq MHz	Read Level dBμV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBμV/m	Limit Line dBμV/m	Over Limit dB	Pol/Phase	Remark
1	94.990	50.19	8.25	1.14	28.60	30.98	43.50	-12.52	HORIZONTAL	QP
2	115.360	50.59	9.09	1.27	28.55	32.40	43.50	-11.10	HORIZONTAL	QP
3	140.580	53.30	8.08	1.41	28.22	34.57	43.50	-8.93	HORIZONTAL	QP
4	210.420	48.61	10.41	1.75	27.51	33.26	43.50	-10.24	HORIZONTAL	QP
5	279.290	42.86	13.22	2.04	27.67	30.45	46.00	-15.55	HORIZONTAL	QP
6	669.230	31.49	19.59	3.25	28.61	25.72	46.00	-20.28	HORIZONTAL	QP


Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

Vertical:

Peak scan

Level (dBµV/m)

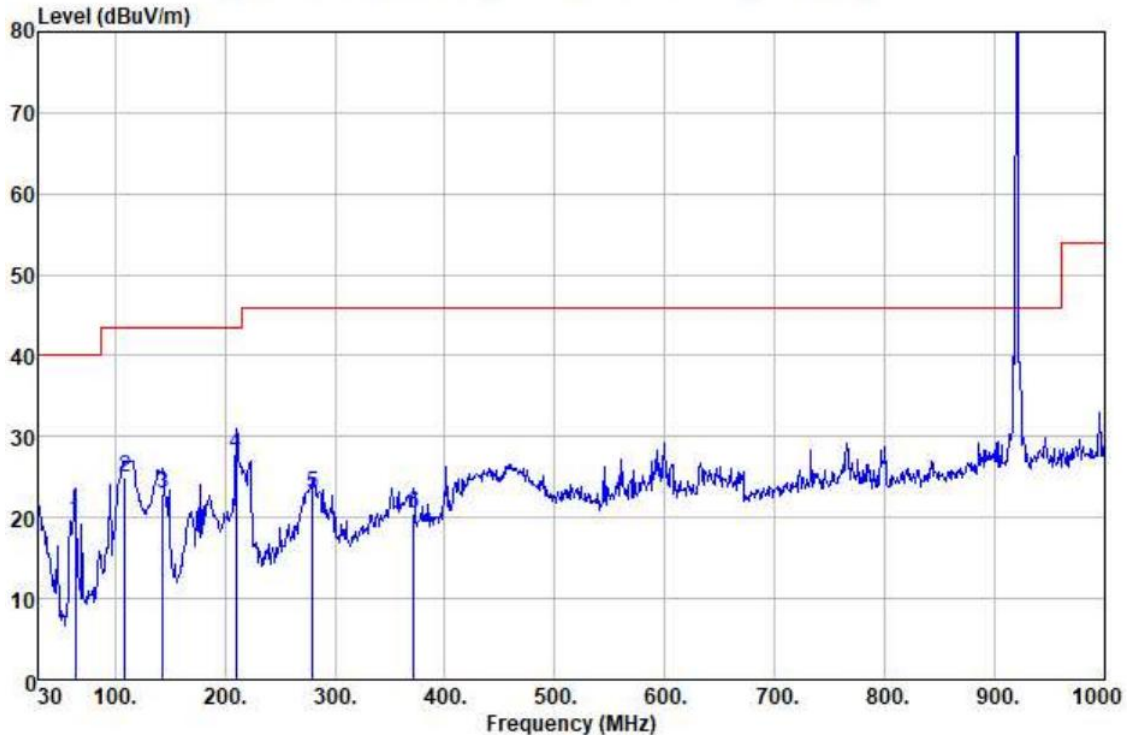

Quasi-peak measurement

No.	Freq MHz	Read Level dBuV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Pol/Phase	Remark
1	63.950	41.35	5.67	0.93	28.24	19.71	40.00	-20.29	VERTICAL	QP
2	109.540	43.62	8.83	1.23	28.61	25.07	43.50	-18.43	VERTICAL	QP
3	143.490	41.92	7.96	1.43	28.34	22.97	43.50	-20.53	VERTICAL	QP
4	210.420	43.31	10.41	1.75	27.51	27.96	43.50	-15.54	VERTICAL	QP
5	280.260	35.31	13.22	2.05	27.69	22.89	46.00	-23.11	VERTICAL	QP
6	371.440	31.57	14.94	2.35	28.25	20.61	46.00	-25.39	VERTICAL	QP

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor


Note: The emission above limit is fundamental emission, which is not subject to the limit.

Spurious emissions above 1GHz

Horizontal:

Peak scan

Level (dBµV/m)

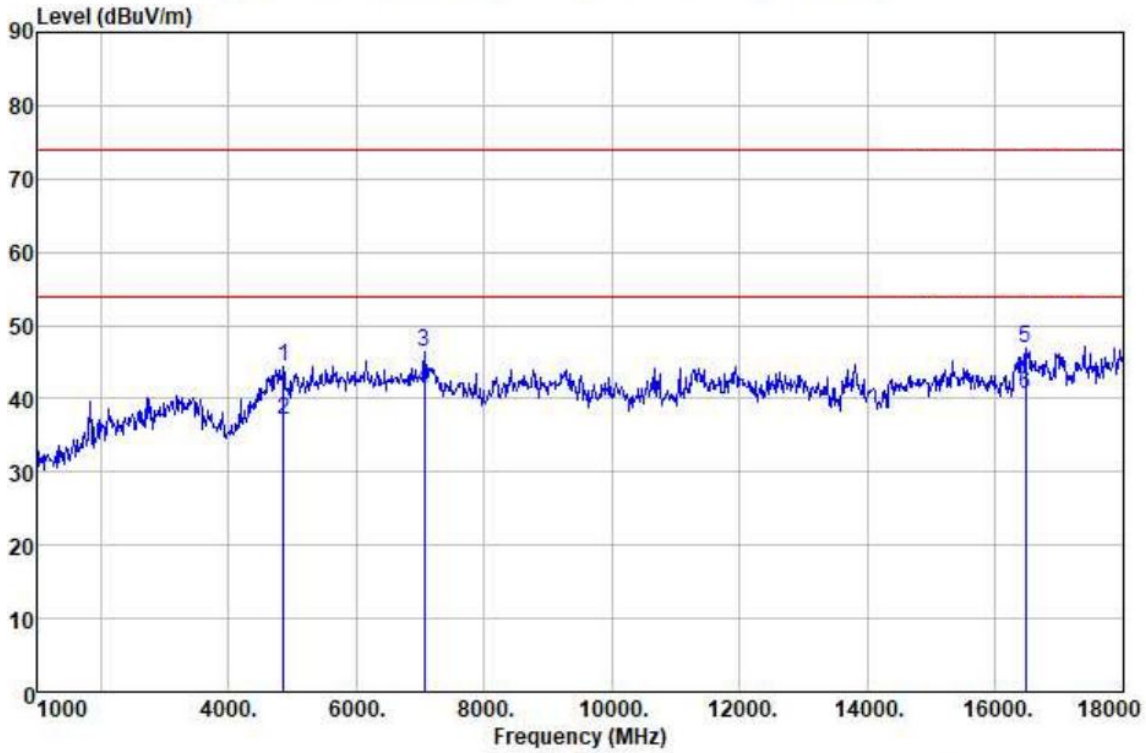


No.	Freq MHz	Read Level dBµV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBµV/m	Limit Line dBµV/m	Over Limit dB	Pol/Phase	Remark
1	4859.000	23.96	33.39	9.64	22.57	44.42	74.00	-29.58	HORIZONTAL	Peak
2	4859.000	16.58	33.39	9.64	22.57	37.04	54.00	-16.96	HORIZONTAL	Averag
3	7069.000	21.25	36.51	12.00	23.26	46.50	74.00	-27.50	HORIZONTAL	Peak
4	7069.000	16.03	36.51	12.00	23.26	41.28	54.00	-12.72	HORIZONTAL	Averag
5	16147.000	9.36	40.25	19.81	22.52	46.90	74.00	-27.10	HORIZONTAL	Peak
6	16147.000	3.13	40.25	19.81	22.52	40.67	54.00	-13.33	HORIZONTAL	Averag

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Vertical:

Peak scan

Level (dBµV/m)

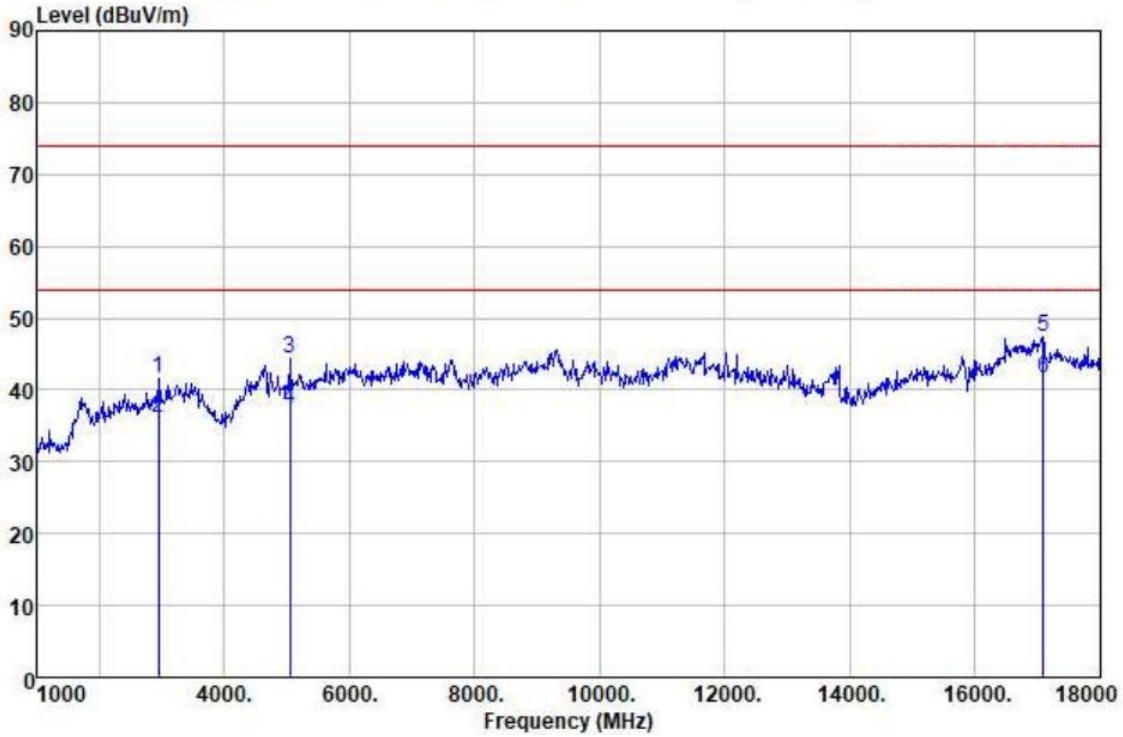

No.	Freq MHz	Read Level dBµV	Antenna Factor dB	Cable Loss dB	Preamp Factor dB	Level dBµV/m	Limit Line dBµV/m	Over Limit dB	Pol/Phase	Remark
1	2955.000	29.24	29.54	7.27	24.31	41.74	74.00	-32.26	VERTICAL	Peak
2	2955.000	23.50	29.54	7.27	24.31	36.00	54.00	-18.00	VERTICAL	Averag
3	5016.000	23.31	33.54	9.85	22.26	44.44	74.00	-29.56	VERTICAL	Peak
4	5016.000	16.24	33.54	9.85	22.26	37.37	54.00	-16.63	VERTICAL	Averag
	517082.000	6.68	41.93	20.35	21.48	47.48	74.00	-26.52	VERTICAL	Peak
	617082.000	0.92	41.93	20.35	21.48	41.72	54.00	-12.28	VERTICAL	Averag

Level=Read Level + Antenna Factor + Cable Loss - Preamp Factor

Note: The emission above limit is fundamental emission, which is not subject to the limit.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor.

No any other emissions level which are attenuated less than 20dB below the limit.

According to 15.31(o), the amplitude of spurious emissions from intentional radiators and emissions from unintentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this Part.

Hence there no other emissions have been reported.

Remark:

- 1) .For this intentional radiator operates below 25 GHz. The spectrum shall be investigated to the tenth harmonics of the highest fundamental frequency. And above the third harmonic of this intentional radiator, the disturbance is very low. So the test result only displays to 3rd harmonic.
- 2). As shown in Section, for frequencies above 1000 MHz. the above field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.
- 3). The test only perform the EUT in transmitting status since the test frequencies were over 1GHz only required transmitting status.

Test result: The unit does meet the FCC requirements.

5.8 Radiated Emissions which fall in the restricted bands

Test Requirement:	FCC Part 15 C section 15.247 (d) In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10:2013
Test Status:	Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)
Limit:	40.0 dB μ V/m between 30MHz & 88MHz; 43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz; 54.0 dB μ V/m above 960MHz.
Detector:	For PK value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW \geq RBW Sweep = auto Detector function = peak Trace = max hold For AV value: RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz VBW =10Hz Sweep = auto Detector function = peak Trace = max hold

Section 15.205 Restricted bands of operation.

(a) Except as shown in paragraph (d) of this section. Only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	
13.36 - 13.41	322 - 335.4		

Test Result:

Test at Channel 1 (908.4 MHz) in transmitting status

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)
895	22.20	3.80	27.22	25.75	24.53
901	22.24	3.81	27.26	30.11	28.90

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)
895	22.21	3.80	27.22	25.32	24.11
901	22.23	3.81	27.26	32.14	30.92

Test at Channel 4 (920.0 MHz) in transmitting status

Antenna polarization: Vertical

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)
928	22.35	3.85	27.40	24.32	23.12
930	22.41	3.88	27.32	30.85	29.82

Antenna polarization: Horizontal

Frequency (MHz)	Antenna factors (dB/m)	Cable loss(dB)	Preamp factor(dB)	Peak Reading Level (dB μ V)	Peak Emission Level (dB μ V/m)
929	22.36	3.85	27.41	26.74	25.54
934	22.42	3.88	27.33	30.32	29.29

5.9 Band Edges Requirement


Test Requirement: FCC Part 15 C section 15.247
(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating. The radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power. Based on either an RF conducted or a radiated measurement. Provided the transmitter demonstrates compliance with the peak conducted power limits.

Frequency Band: 902 MHz to 928 MHz

Test Method: ANSI C63.10:2013

Test Status: Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture). Following channel(s) was (were) selected for the final test as listed below.

Test Configuration:

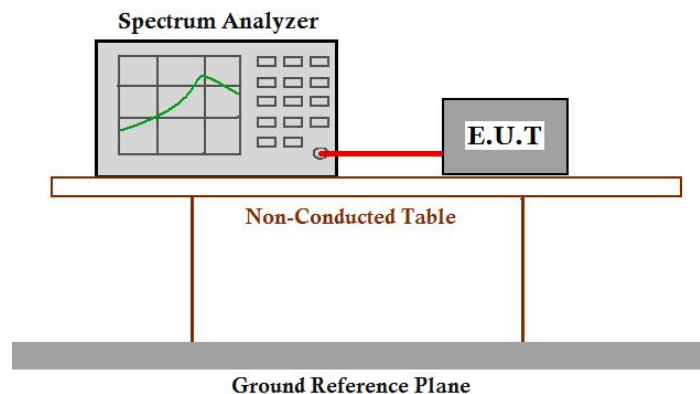

Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer or power meter.
2. Set RBW=100 kHz, VBW=300 KHz, suitable frequency span including 1000 kHz bandwidth from band edge.
3. Measure the Conducted Spurious Emissions and Radiated Emissions of the test frequency with special test status.
4. Repeat until all the test status is investigated.
5. Report the worse.

Test result with plots as follows:


The band edges was measured and recorded Result:

The Lower Edges attenuated more than 20dB.


The Upper Edges attenuated more than 20dB.

Result plot as follows:

Channel 1: 908.4 MHz

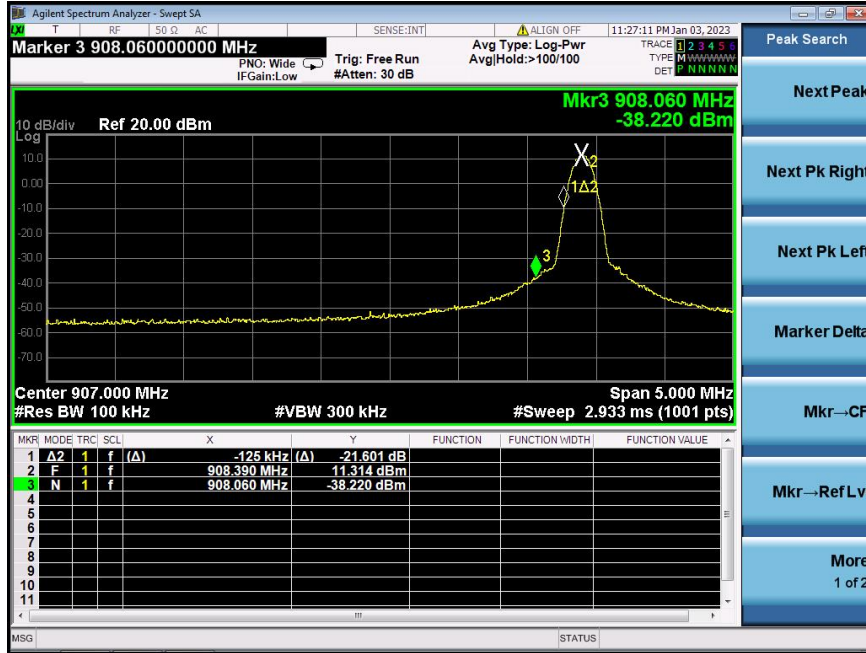

Channel 4: 920.0 MHz

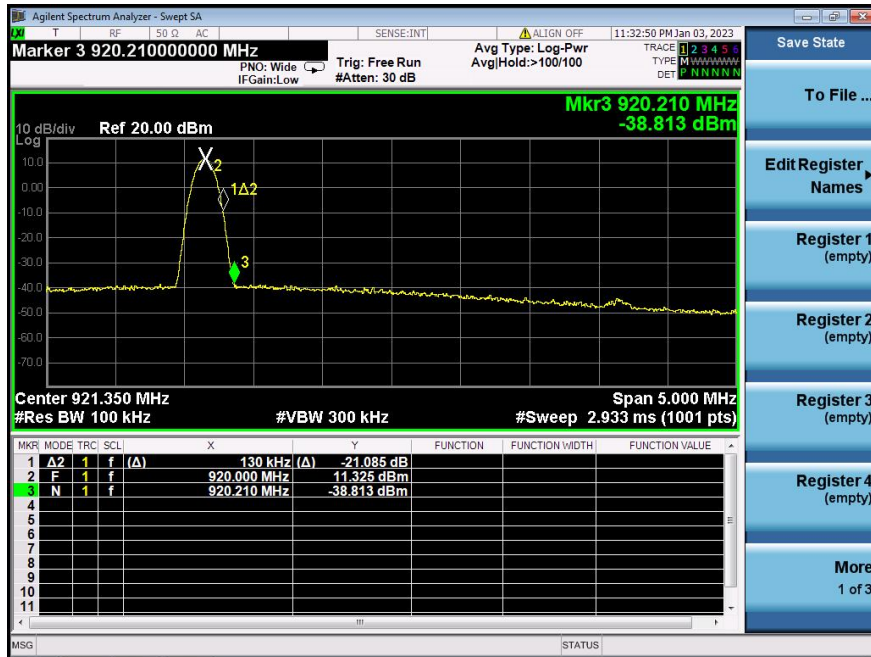

Test result: The unit does meet the FCC requirements.

5.10 Conducted Emissions at Mains Terminals 150 kHz to 30MHz

Test Requirement: FCC Part 15 C section 15.207

Test Voltage: 120V~ 60Hz

Test Method: ANSI C63.10:2013 Clause 6.2

Frequency Range: 150 kHz to 30 MHz

Detector: Peak for pre-scan (9 kHz Resolution Bandwidth)

Test Limit

Limits for conducted disturbance at the mains ports of class B


Frequency Range	Class B Limit dB(μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

NOTE 1 The limit decreases linearly with the logarithm of the frequency in the range 0,15 MHz to 0,50 MHz.

EUT Operation:

Test in normal operating mode. For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, channels and antenna ports (if EUT with antenna diversity architecture).

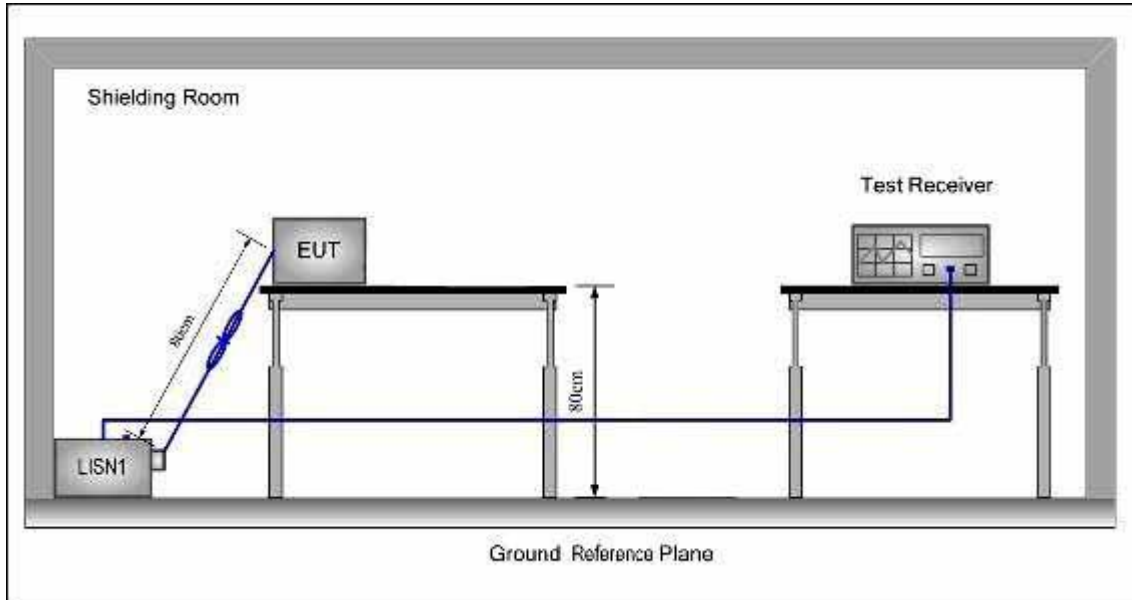Test Configuration:**Test procedure:**

1. The mains terminal disturbance voltage test was conducted in a shielded room.
2. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
3. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, but separated from metallic contact with the ground reference plane by 0.1m of insulation.
4. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

5.10.1 Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected. For EUT the communicating was worst case mode.

The following Quasi-Peak and Average measurements were performed on the EUT

Live line

Peak Scan:

Level (dBμV)

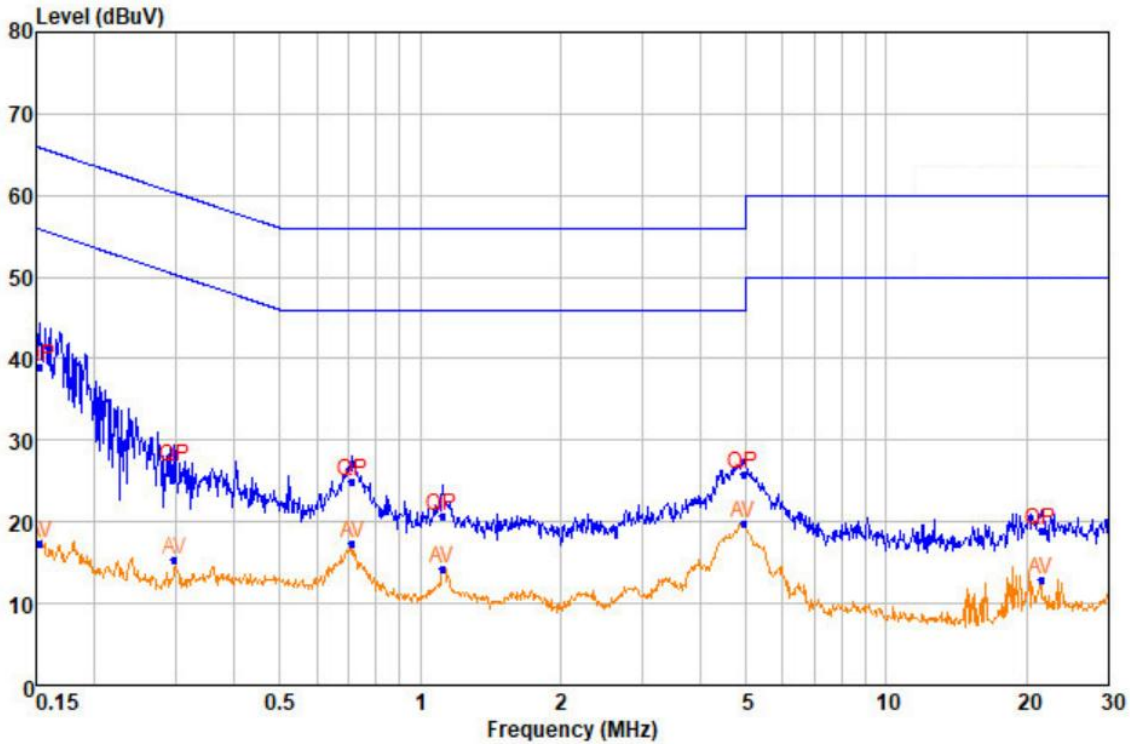


Quasi-peak and Average measurement

NO.	Freq MHz	Level dBμV	Remark	LISN Factor dB	Cable Loss dB	Limit Line dBμV	Over Limit dB
1	0.153	39.08	QP	9.70	0.20	65.82	-26.74
2	0.153	17.39	Average	9.70	0.20	55.82	-38.43
3	0.297	26.77	QP	9.67	0.24	60.32	-33.55
4	0.297	15.30	Average	9.67	0.24	50.32	-35.02
5	0.715	24.95	QP	9.71	0.29	56.00	-31.05
6	0.715	17.32	Average	9.71	0.29	46.00	-28.68
7	1.115	20.75	QP	9.67	0.31	56.00	-35.25
8	1.115	14.17	Average	9.67	0.31	46.00	-31.83
9	4.941	25.78	QP	9.60	0.40	56.00	-30.22
10	4.941	19.89	Average	9.60	0.40	46.00	-26.11
11	21.435	18.87	QP	9.68	0.48	60.00	-41.13
12	21.435	12.88	Average	9.68	0.48	50.00	-37.12

Neutral Line

Peak Scan:

Level (dB μ V)

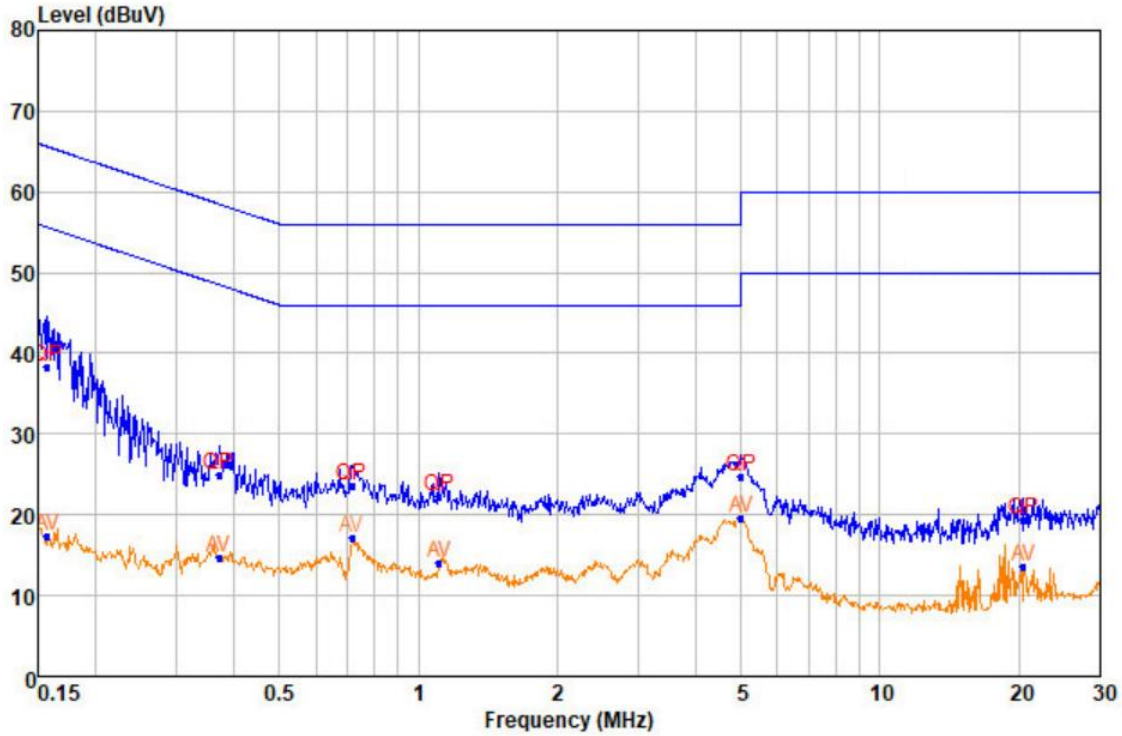

Quasi-peak and Average measurement

NO.	Freq MHz	Level dB μ V	Remark	LISN Factor dB	Cable Loss dB	Limit Line dB μ V	Over Limit dB
1	0.157	38.31	QP	9.70	0.20	65.60	-27.29
2	0.157	17.49	Average	9.70	0.20	55.60	-38.11
3	0.370	24.87	QP	9.66	0.25	58.49	-33.62
4	0.370	14.63	Average	9.66	0.25	48.49	-33.86
5	0.720	23.56	QP	9.62	0.29	56.00	-32.44
6	0.720	17.10	Average	9.62	0.29	46.00	-28.90
7	1.109	22.18	QP	9.63	0.31	56.00	-33.82
8	1.109	14.12	Average	9.63	0.31	46.00	-31.88
9	5.000	24.66	QP	9.62	0.40	56.00	-31.34
10	5.000	19.52	Average	9.62	0.40	46.00	-26.48
11	20.434	19.37	QP	9.62	0.48	60.00	-40.63
12	20.434	13.55	Average	9.62	0.48	50.00	-36.45

-- End of test report --