

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.649$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Left Head Cheek/GSM 850 Mid/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.161 W/kg


Left Head Cheek/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.233 V/m; Power Drift = 0.026 dB

Peak SAR (extrapolated) = 0.197 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.105 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.160 W/kg

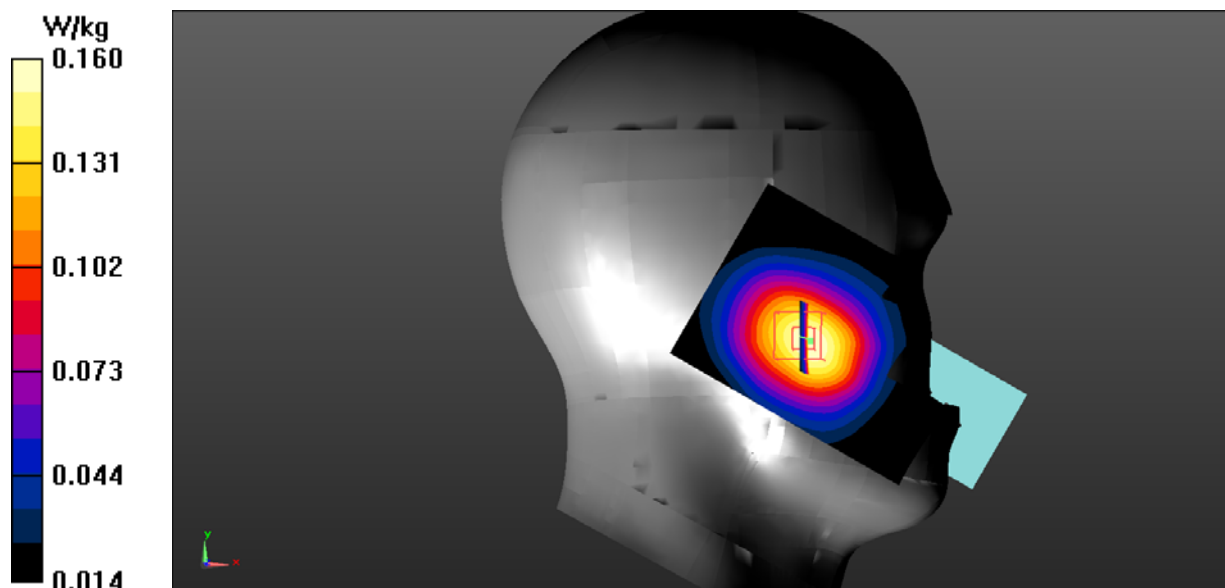

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.649$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Left Head Tilt/GSM 850 Mid/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0575 W/kg


Left Head Tilt/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.630 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.0700 W/kg

SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.040 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0565 W/kg

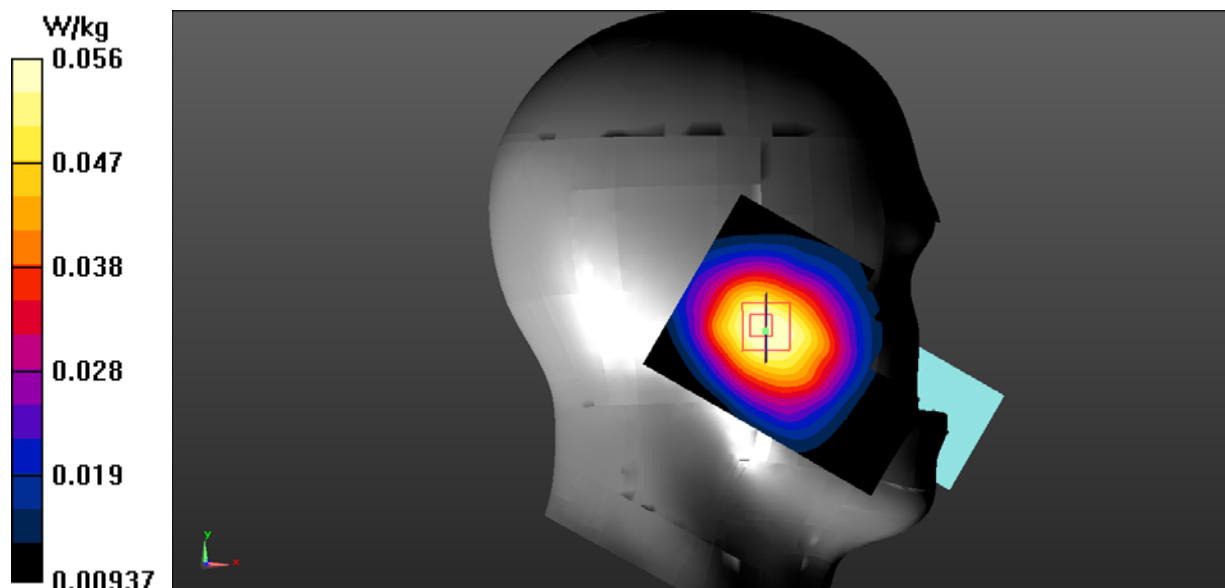

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 824.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.400$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 824.2 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Head Cheek/GSM 850 low/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.158 W/kg


Right Head Cheek/GSM 850 low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.813 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.150 W/kg; SAR(10 g) = 0.102 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.162 W/kg

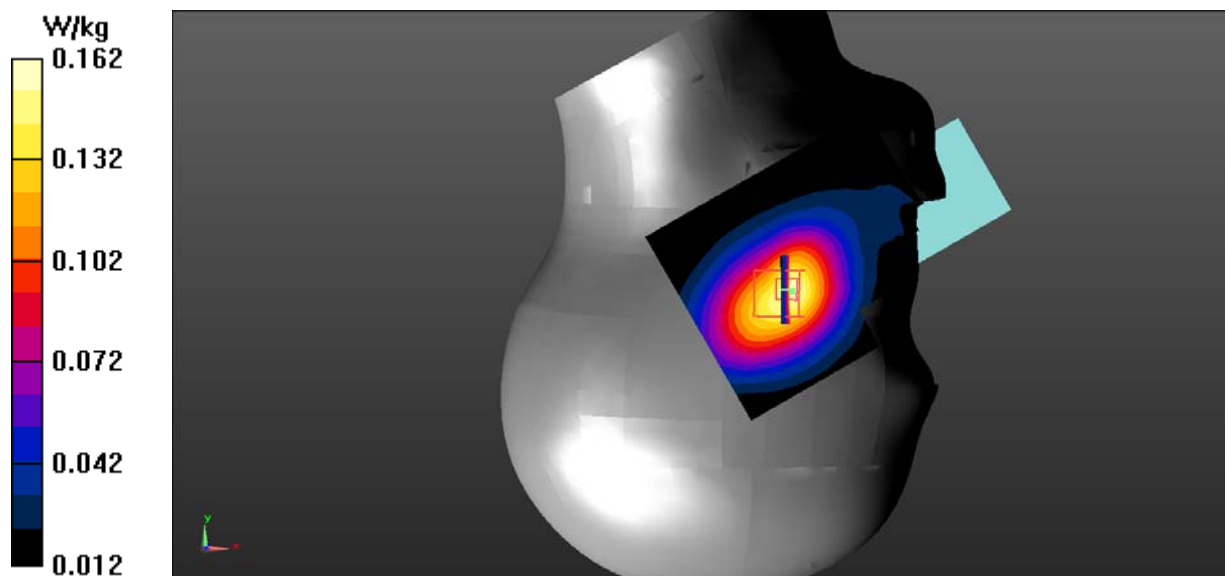

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.649$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Head Cheek/GSM 850 Mid/Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm,
 $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.196 W/kg


Right Head Cheek/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm,
 $dy=8$ mm, $dz=5$ mm

Reference Value = 4.673 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.127 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.201 W/kg

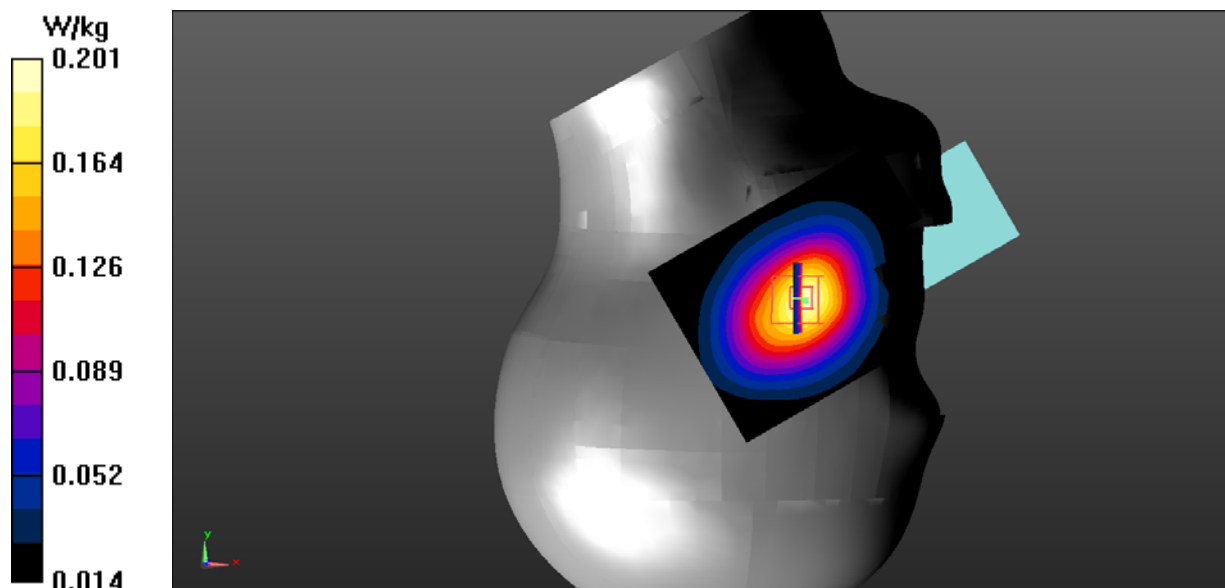

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 848.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.718$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 848.8 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Head Cheek/GSM 850 high/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.209 W/kg


Right Head Cheek/GSM 850 high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.739 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.269 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.135 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.212 W/kg

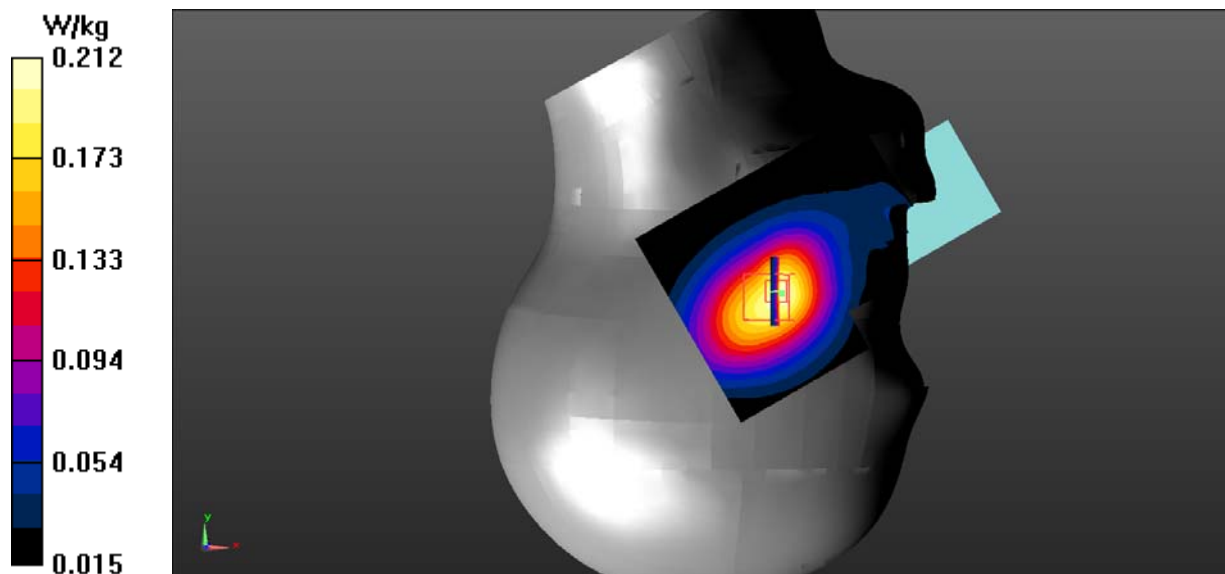

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.649$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Head Tilt/GSM 850 Mid/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0651 W/kg


Right Head Tilt/GSM 850 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.339 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.0840 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.046 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0665 W/kg

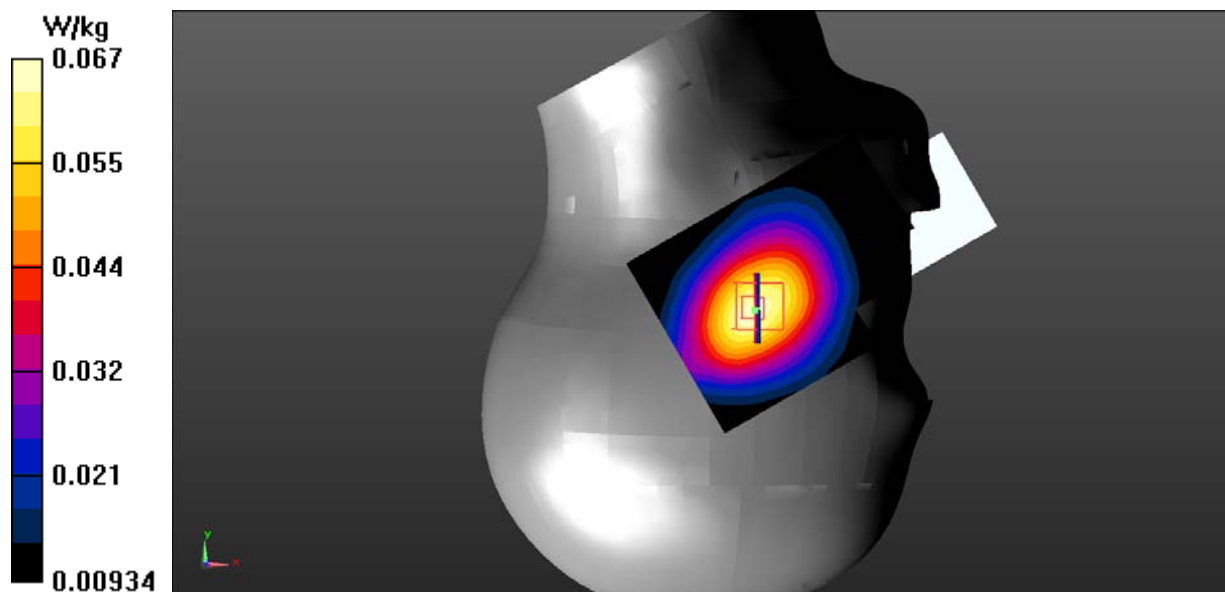

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 55.169$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Worn Back/GSM 850 Mid/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.347 W/kg


Body Worn Back/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.24 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.529 W/kg

SAR(1 g) = 0.305 W/kg; SAR(10 g) = 0.195 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.333 W/kg

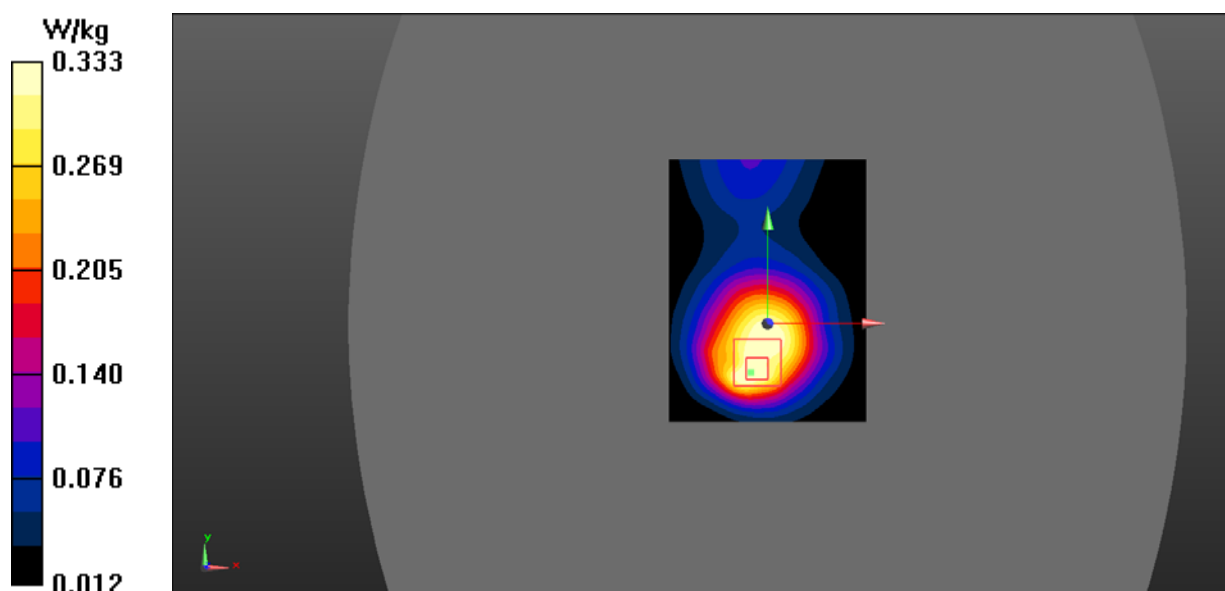

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.66
Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.969$ S/m; $\epsilon_r = 55.415$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 824.2 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Back/GSM 850 low/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.121 W/kg


Body Back/GSM 850 low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.18 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.183 W/kg

SAR(1 g) = 0.110 W/kg; SAR(10 g) = 0.071 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.119 W/kg

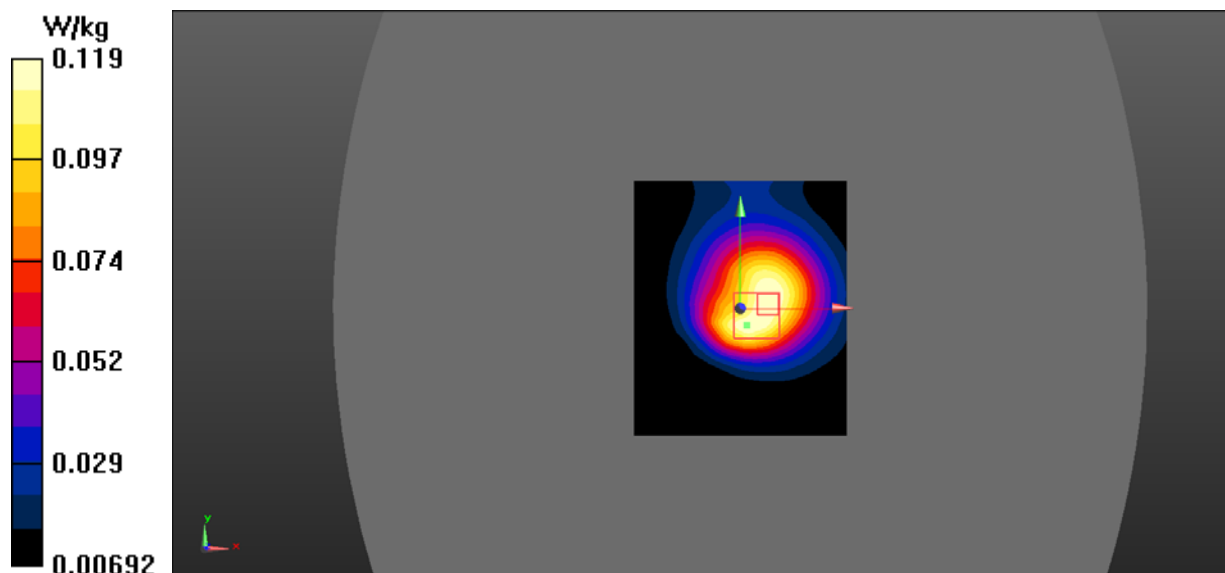

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.66
Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 55.169$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Back/GSM 850 Mid/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.395 W/kg


Body Back/GSM 850 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.49 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.662 W/kg

SAR(1 g) = 0.363 W/kg; SAR(10 g) = 0.221 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.392 W/kg

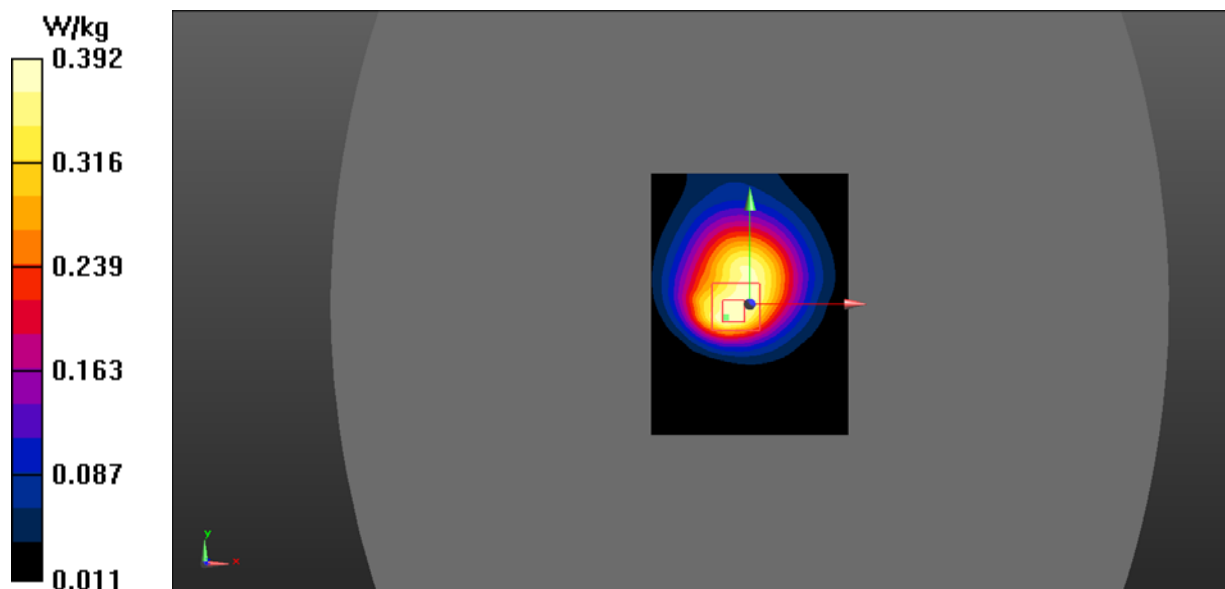

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.66
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.988$ S/m; $\epsilon_r = 54.993$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 848.8 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Back/GSM 850 high/Area Scan (101x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 0.208 W/kg


Body Back/GSM 850 high/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 13.17 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.118 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.204 W/kg

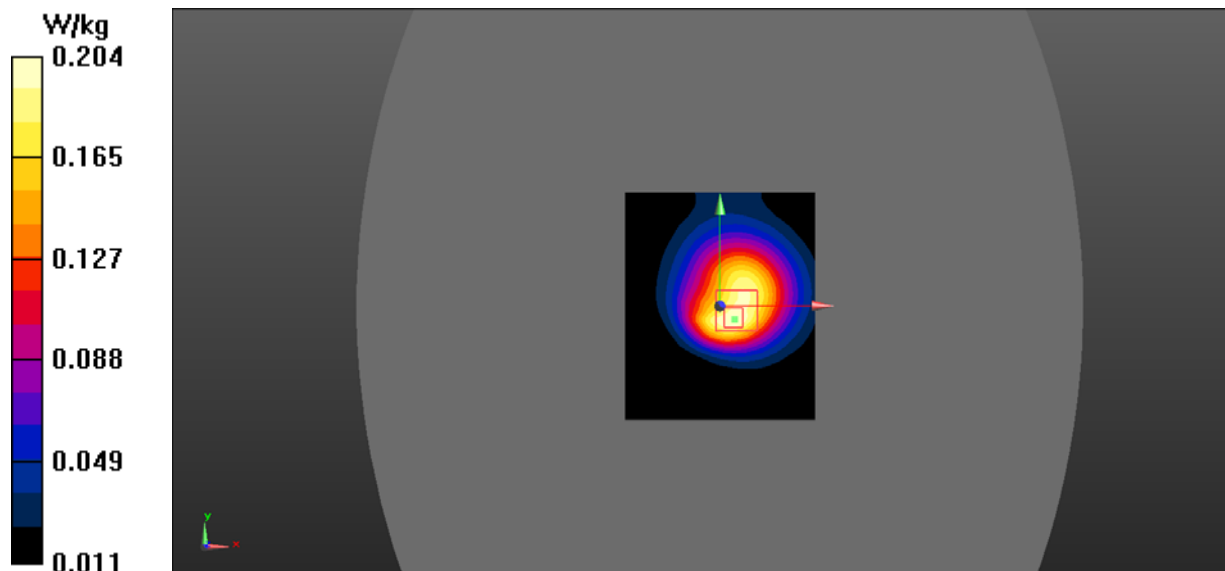

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GPRS-3 slots (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.66
Medium parameters used (interpolated): $f = 848.8$ MHz; $\sigma = 0.988$ S/m; $\epsilon_r = 54.993$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 848.8 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Bottom/GSM 850 High/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.320 W/kg


Body Bottom/GSM 850 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.28 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.477 W/kg

SAR(1 g) = 0.286 W/kg; SAR(10 g) = 0.159 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.315 W/kg

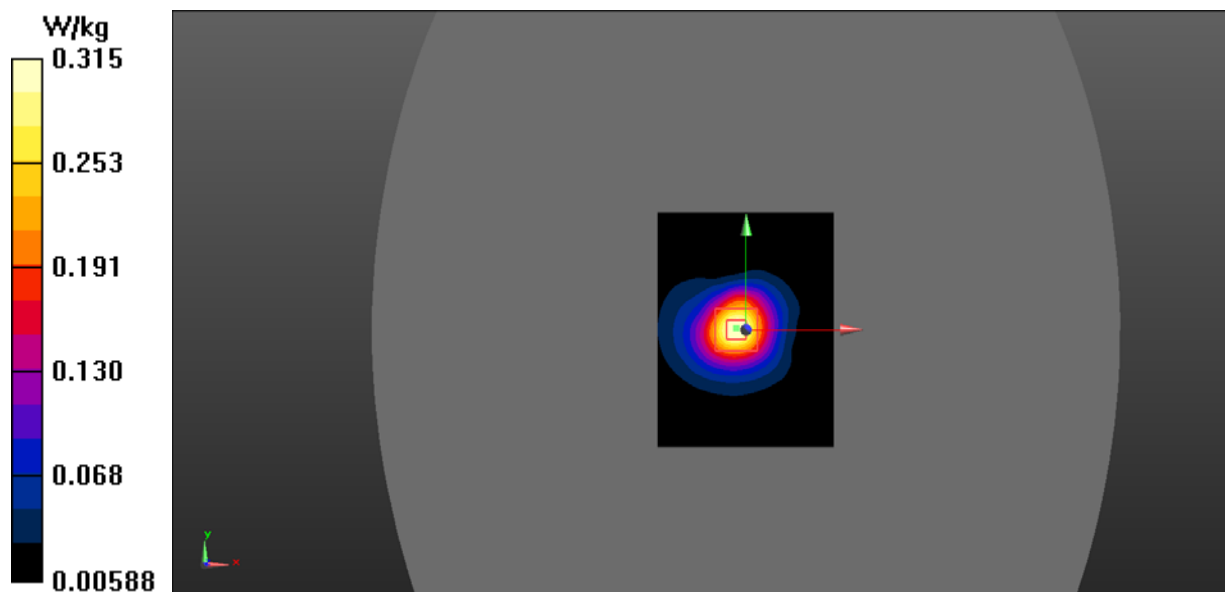

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.107$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Left Head Cheek/PCS 1900 Mid/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.782 W/kg


Left Head Cheek/PCS 1900 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.235 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.03 W/kg

SAR(1 g) = 0.708 W/kg; SAR(10 g) = 0.452 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.759 W/kg

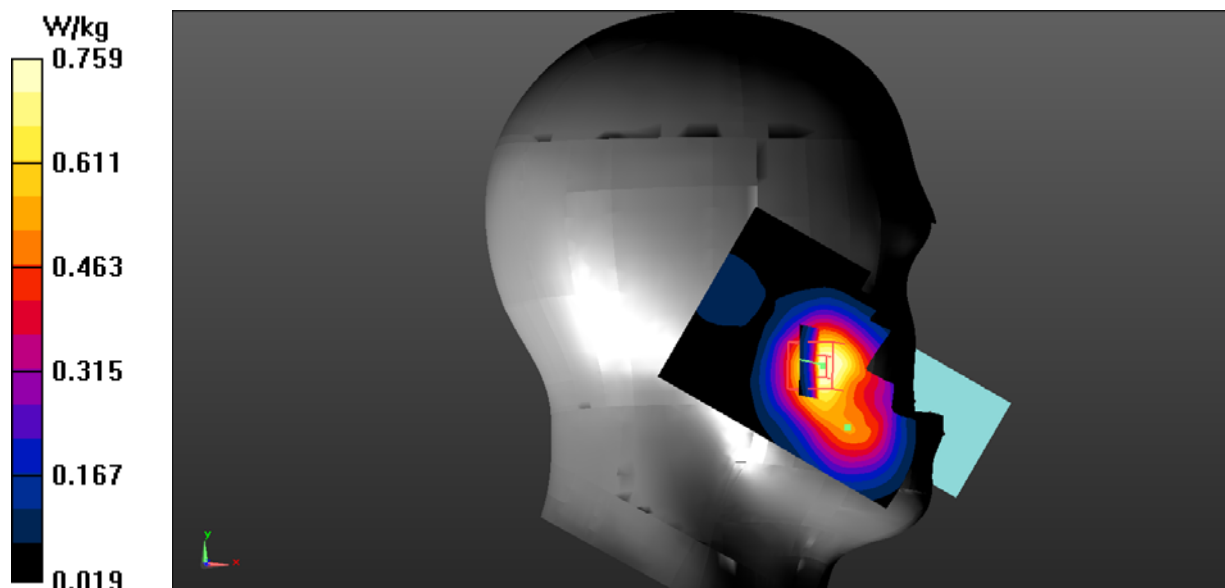

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.107$; $\rho = 1000$ kg/m³
Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Left Head Tilt/PCS 1900 Mid 2/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.191 W/kg


Left Head Tilt/PCS 1900 Mid 2/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.426 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.253 W/kg

SAR(1 g) = 0.175 W/kg; SAR(10 g) = 0.115 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.187 W/kg

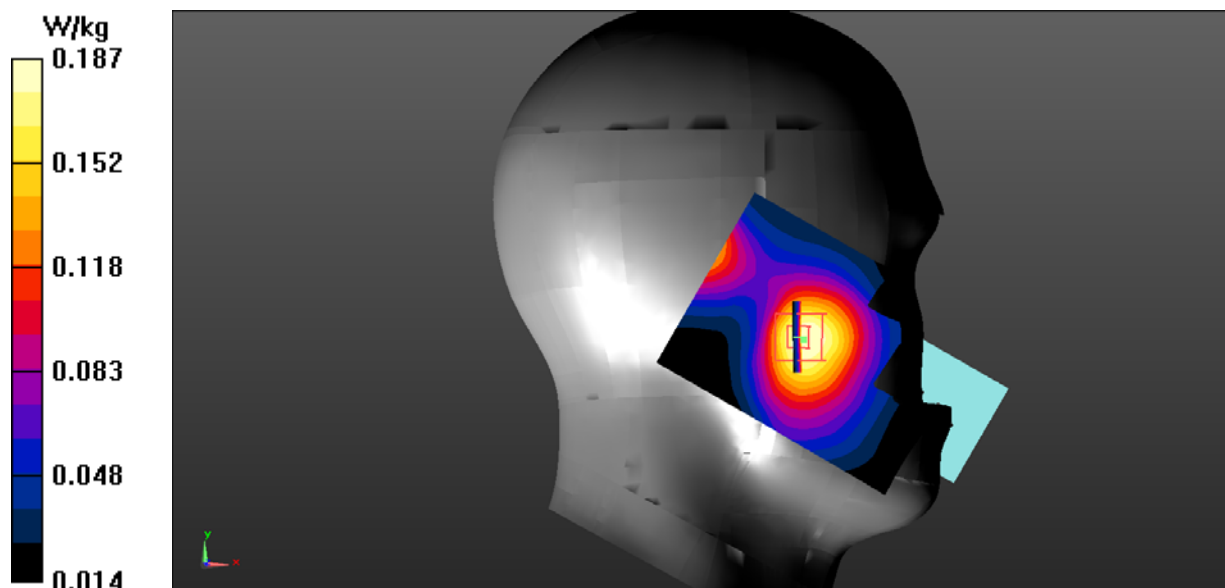

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.403$ S/m; $\epsilon_r = 39.841$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1850.2 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Head Cheek/PCS 1900 low/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.12 W/kg


Right Head Cheek/PCS 1900 low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.902 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.71 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.637 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.13 W/kg

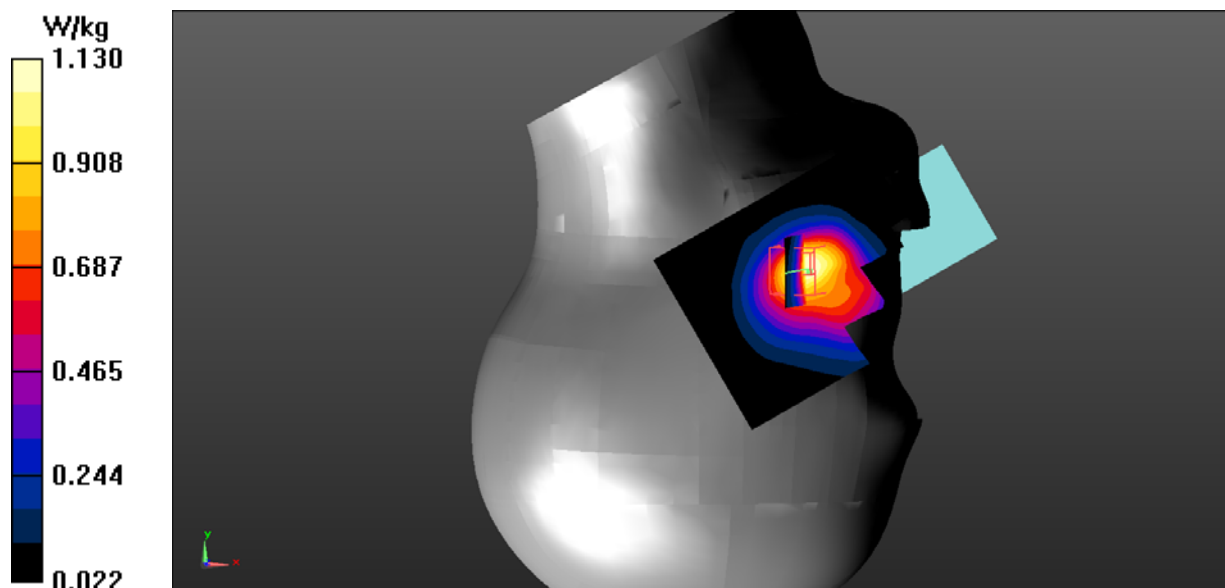

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101


Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.107$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Head Cheek/PCS 1900 Mid/Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm,
 $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.05 W/kg

Right Head Cheek/PCS 1900 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm,
 $dy=8$ mm, $dz=5$ mm
Reference Value = 5.210 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 1.58 W/kg
SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.558 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 1.07 W/kg

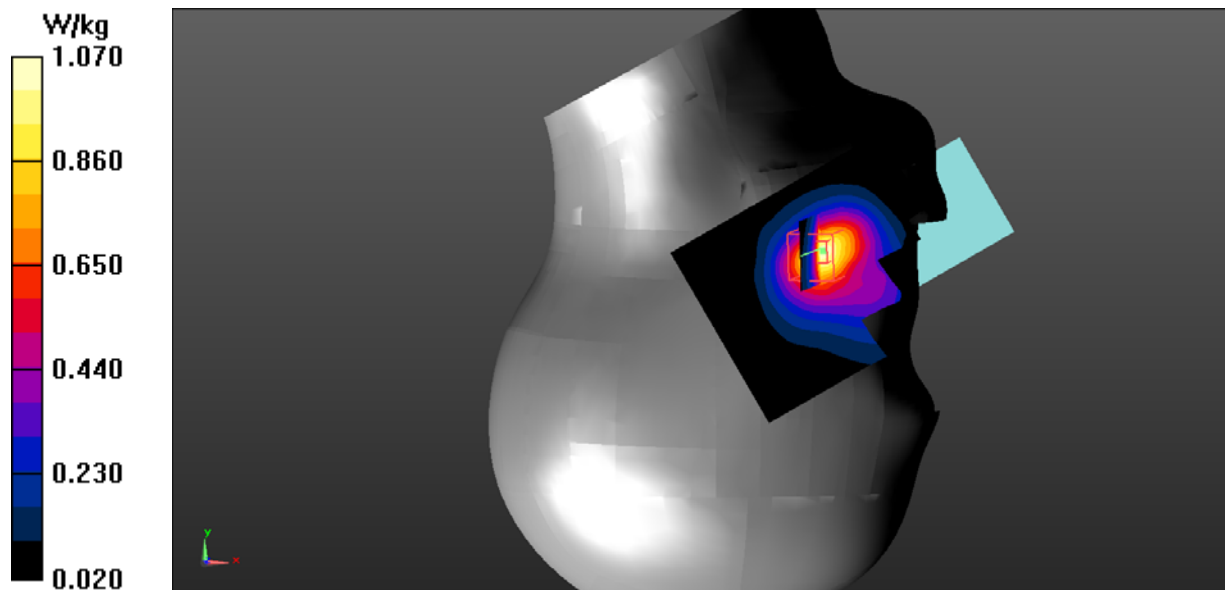

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 39.894$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1909.8 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Head Cheek/PCS 1900 high/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.966 W/kg


Right Head Cheek/PCS 1900 high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.729 V/m; Power Drift = 0.126 dB

Peak SAR (extrapolated) = 1.43 W/kg

SAR(1 g) = 0.901 W/kg; SAR(10 g) = 0.537 W/kg (SAR corrected for target medium).

Maximum value of SAR (measured) = 0.987 W/kg

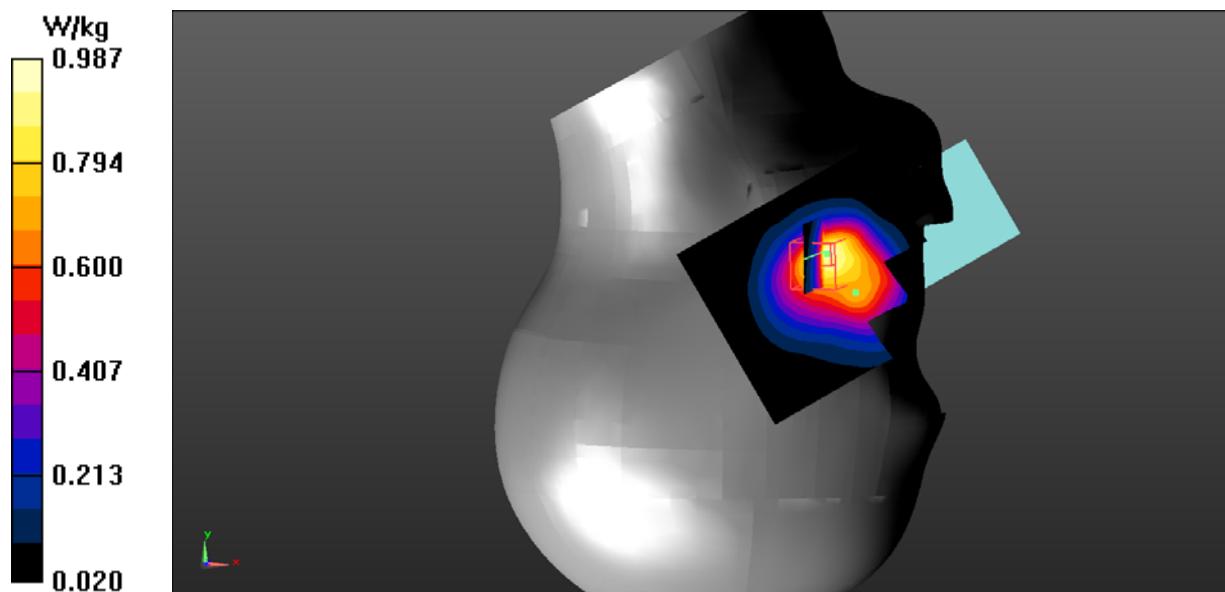

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.107$; $\rho = 1000$ kg/m³
Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Right Head Tilt/PCS 1900 Mid/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.166 W/kg


Right Head Tilt/PCS 1900 Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.656 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.153 W/kg; SAR(10 g) = 0.100 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.164 W/kg

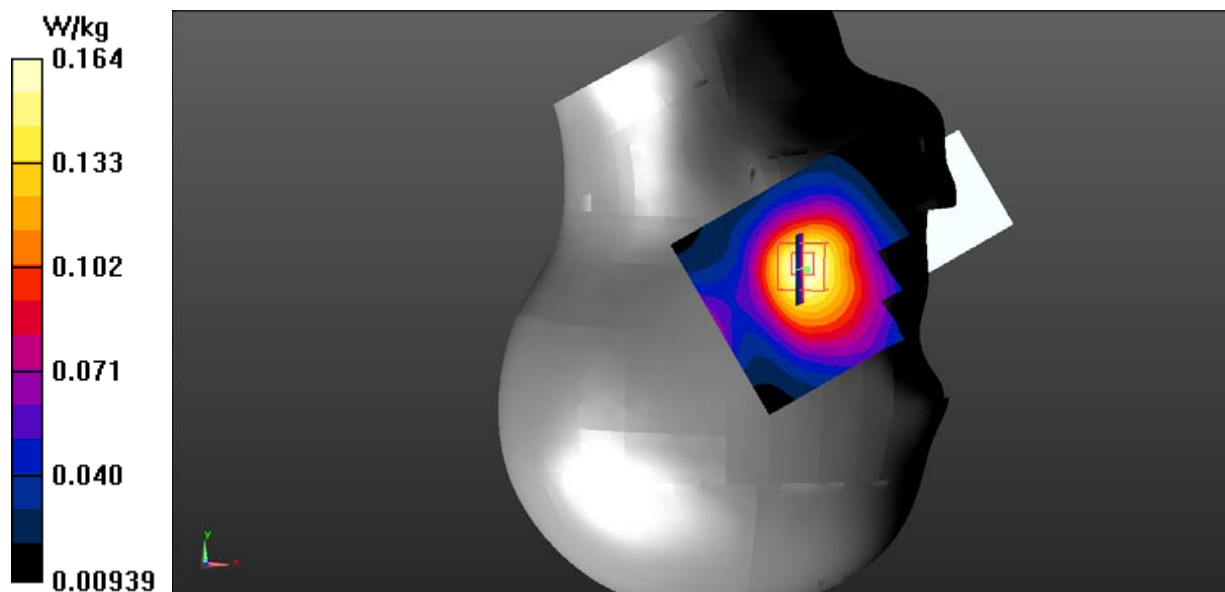

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 1850.2 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 53.394$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1850.2 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Worn Back/GSM 1900 Low/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.18 W/kg


Body Worn Back/GSM 1900 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.95 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.560 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.13 W/kg

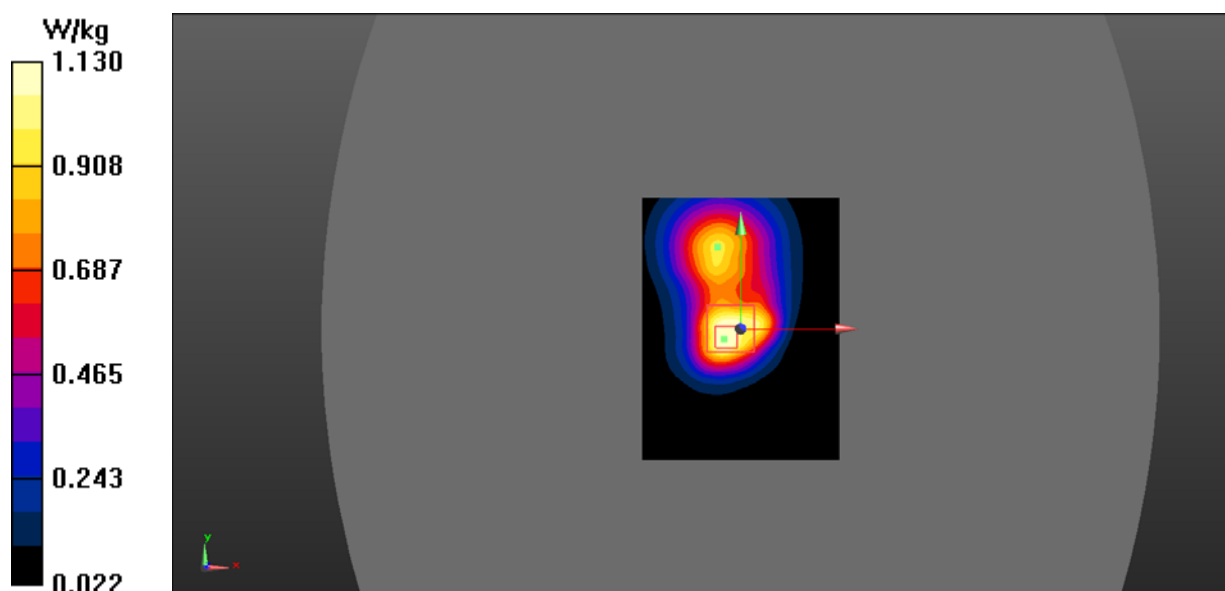

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz; Duty Cycle: 1:8
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 53.301$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Worn Back/GSM 1900 Mid/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.14 W/kg


Body Worn Back/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.60 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.86 W/kg

SAR(1 g) = 0.970 W/kg; SAR(10 g) = 0.528 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.07 W/kg

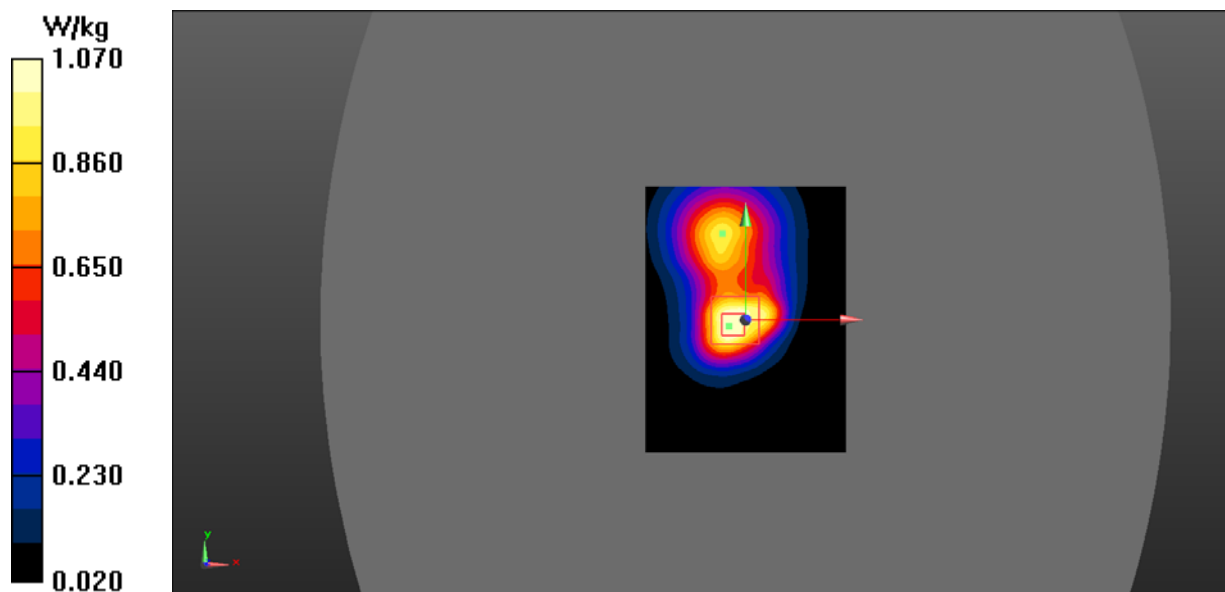

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GSM (0); Frequency: 1909.8 MHz; Duty Cycle: 1:8

Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.522$ S/m; $\epsilon_r = 53.335$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1909.8 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Worn Back/GSM 1900 High/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.871 W/kg


Body Worn Back/GSM 1900 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.23 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.46 W/kg

SAR(1 g) = 0.750 W/kg; SAR(10 g) = 0.405 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.821 W/kg

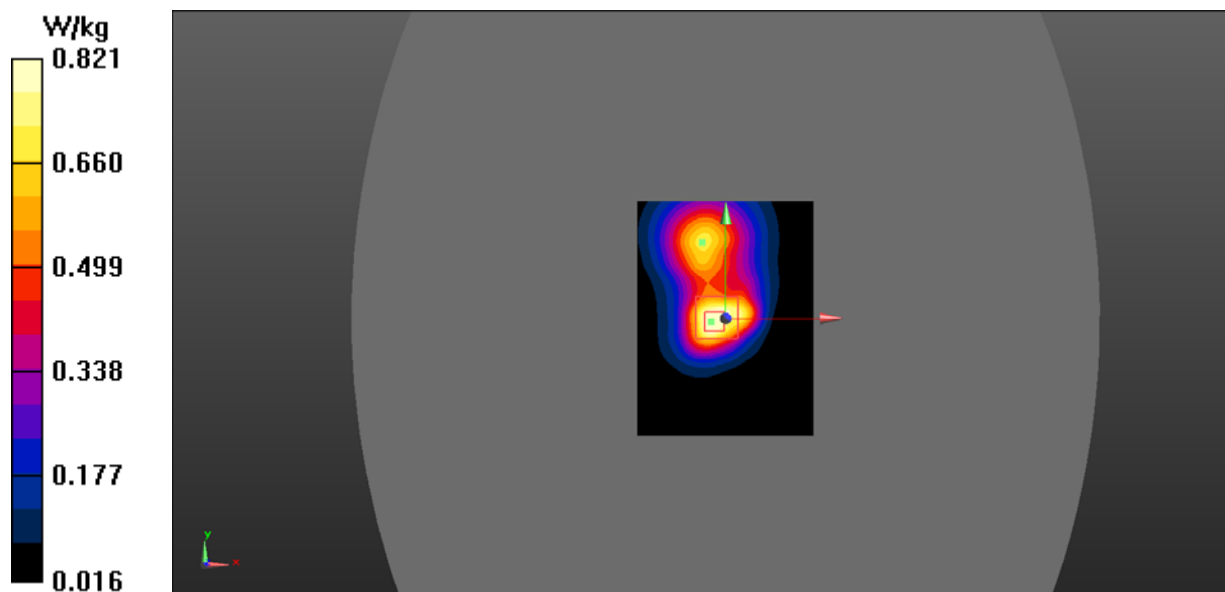

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2
Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 53.394$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1850.2 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Back/GSM 1900 Low/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.34 W/kg


Body Back/GSM 1900 Low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 23.74 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.575 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.20 W/kg

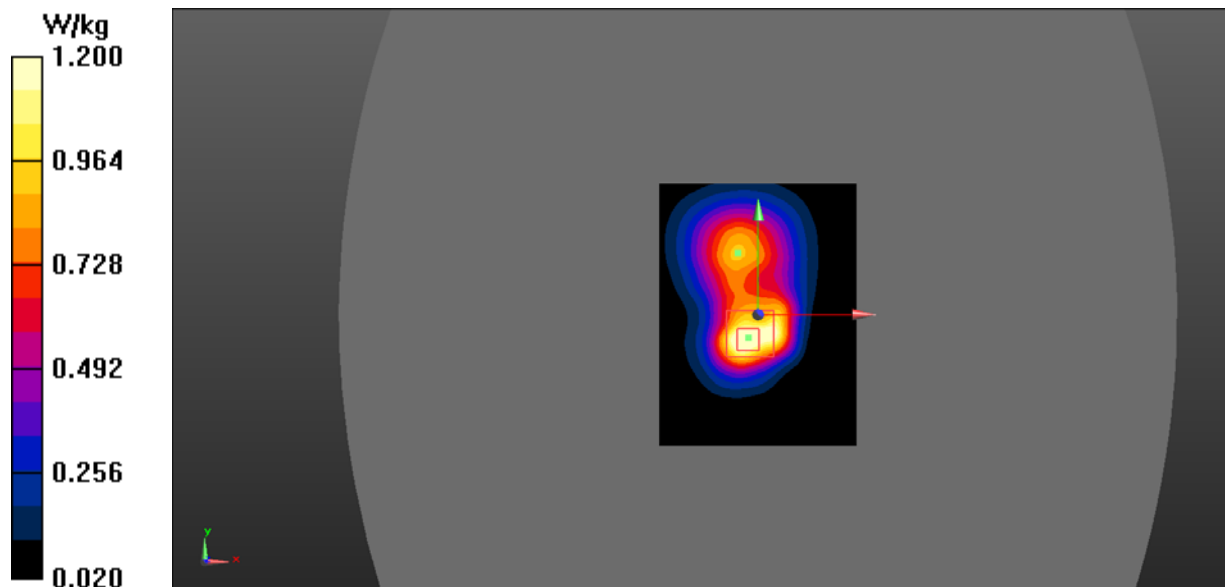

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 53.301$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Back/GSM 1900 Mid/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.33 W/kg


Body Back/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.34 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 2.37 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.647 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.32 W/kg

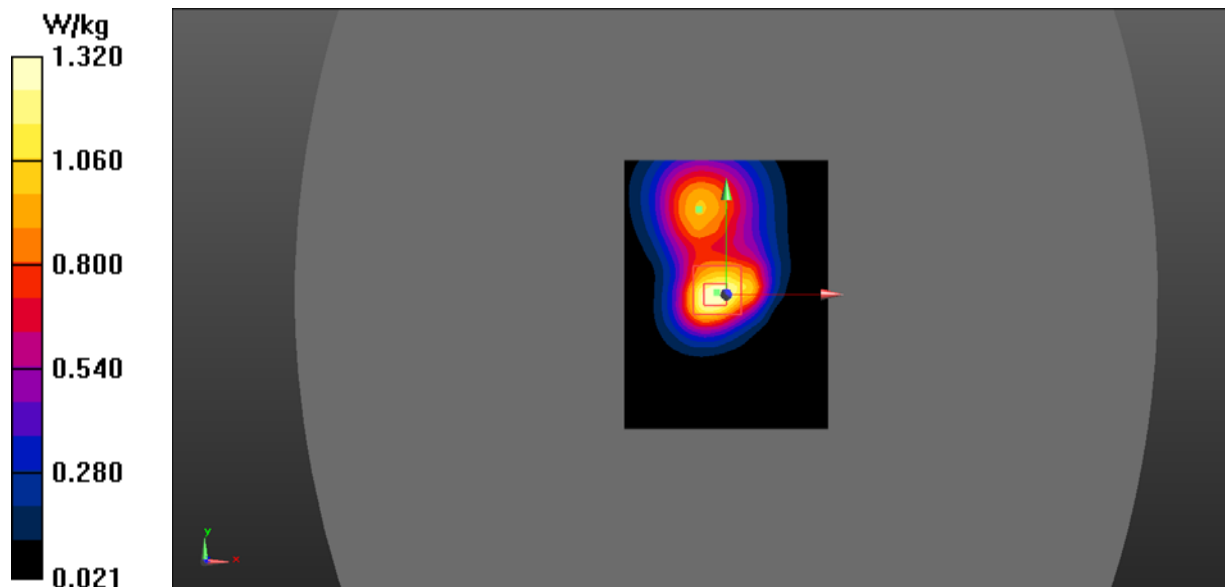

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2
Medium parameters used (interpolated): $f = 1909.8$ MHz; $\sigma = 1.522$ S/m; $\epsilon_r = 53.335$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1909.8 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Back/GSM 1900 High/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.40 W/kg


Body Back/GSM 1900 High/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 25.05 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.30 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.614 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 1.29 W/kg

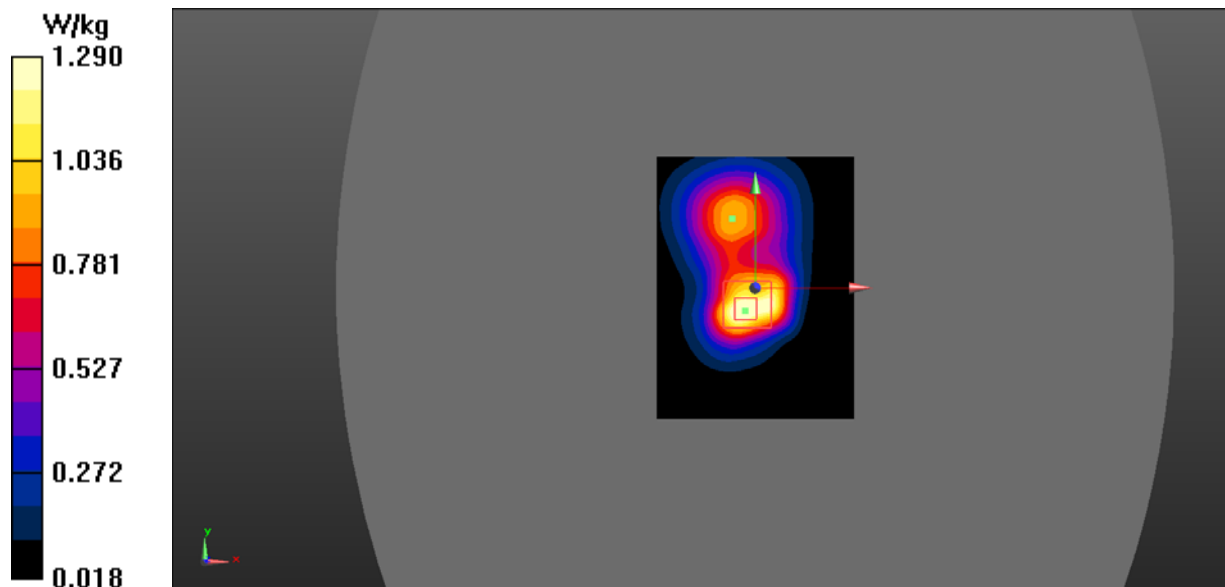

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, Generic GPRS-4 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:2
Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 53.301$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Bottom/GSM 1900 Mid/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.643 W/kg


Body Bottom/GSM 1900 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.53 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.576 W/kg; SAR(10 g) = 0.320 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.639 W/kg

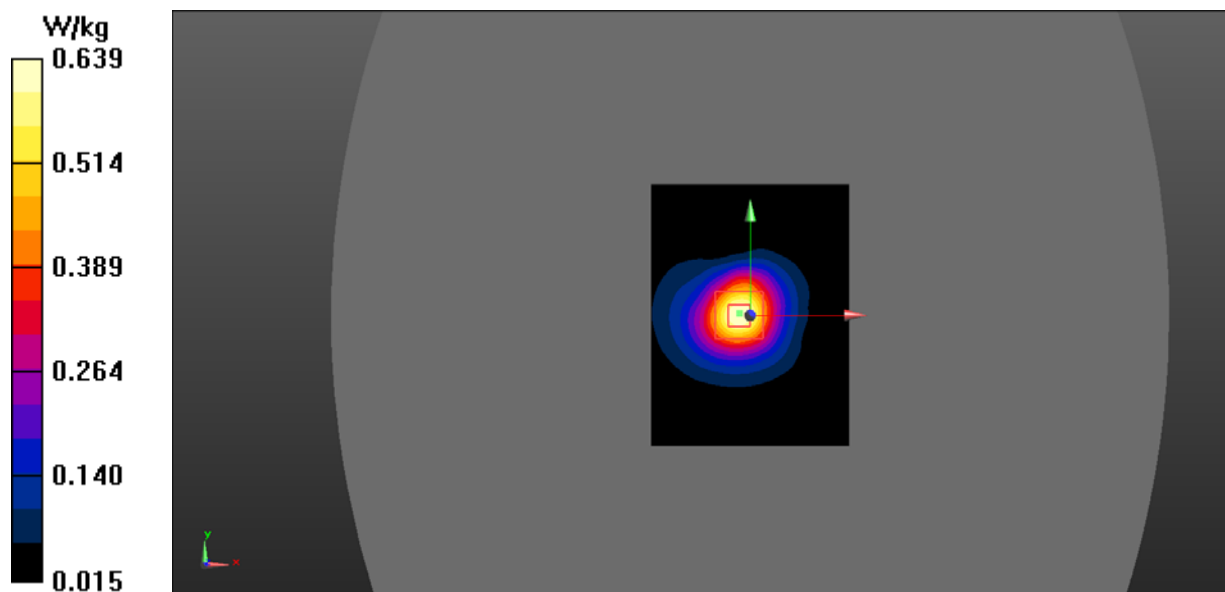

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 39.942$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1852.4 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head Left Cheek/WCDMA Band 2 low/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.244 W/kg


Head Left Cheek/WCDMA Band 2 low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.952 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.306 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.141 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.229 W/kg

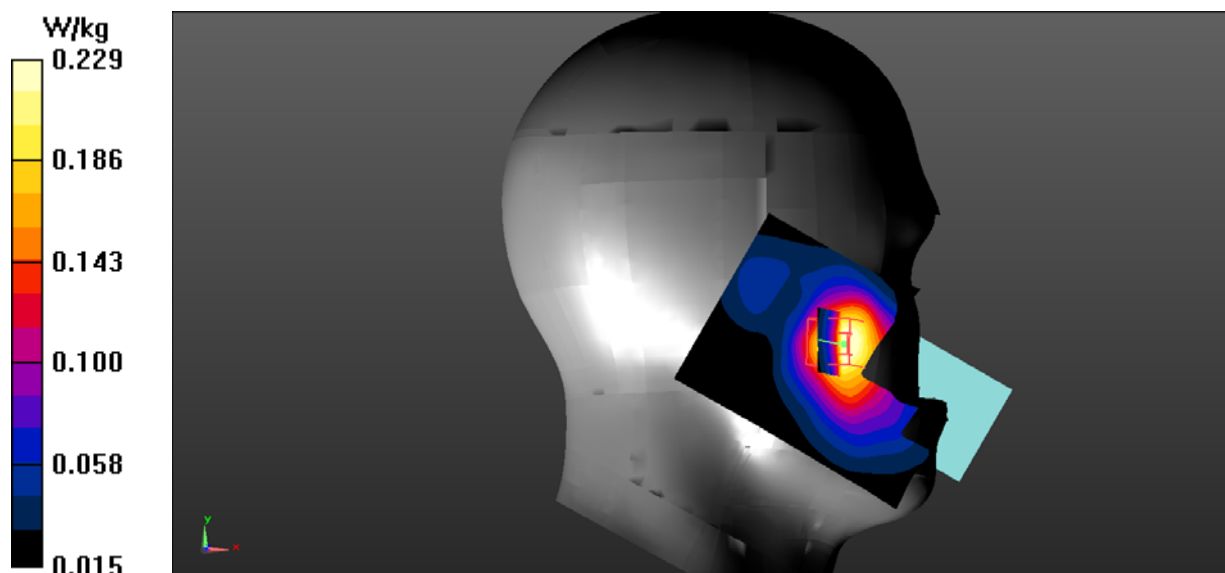

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.107$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head Left Cheek/WCDMA Band 2 Mid 2/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.313 W/kg

Head Left Cheek/WCDMA Band 2 Mid 2/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.924 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.392 W/kg

SAR(1 g) = 0.285 W/kg; SAR(10 g) = 0.182 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.306 W/kg

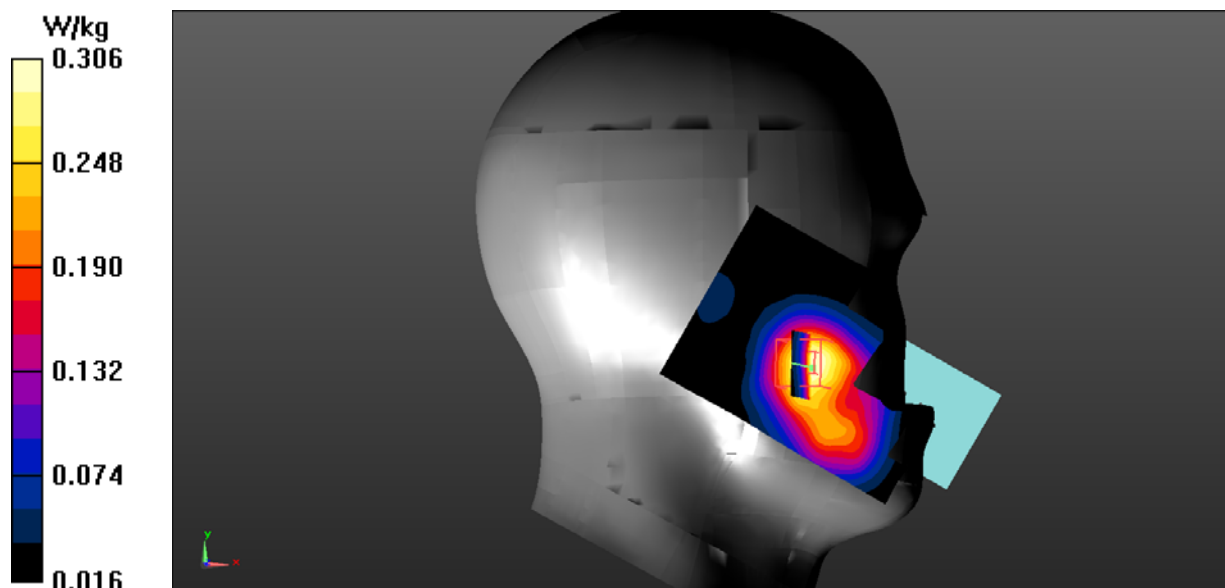

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 39.986$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1907.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head Left Cheek/WCDMA Band 2 high/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.325 W/kg


Head Left Cheek/WCDMA Band 2 high/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.822 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.437 W/kg

SAR(1 g) = 0.301 W/kg; SAR(10 g) = 0.193 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.323 W/kg

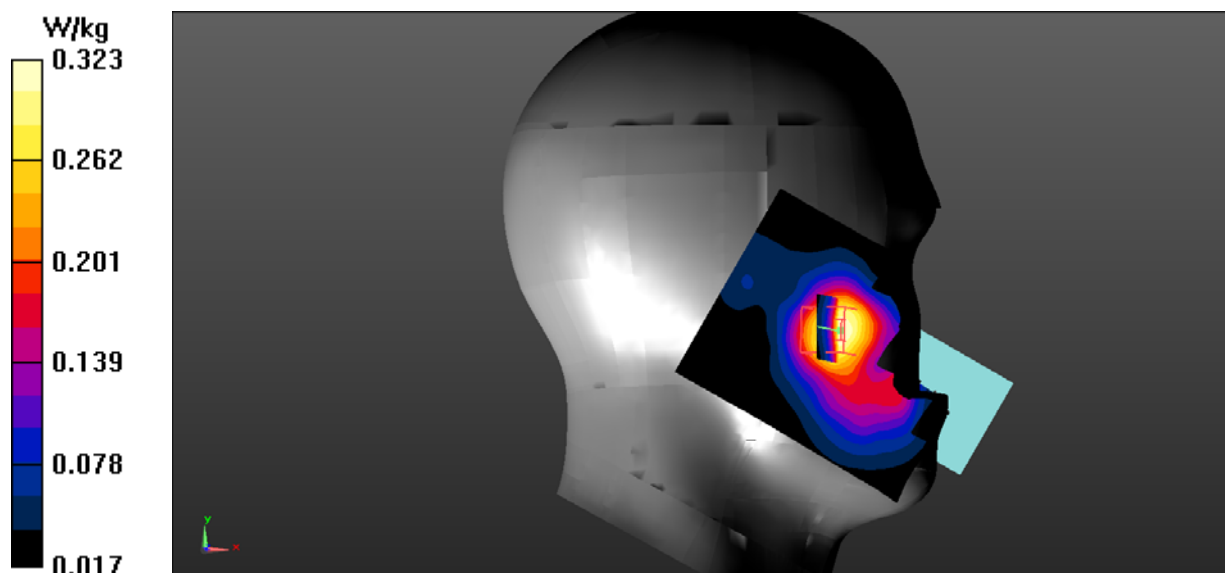

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.107$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head Left tilt/WCDMA Band 2 Mid/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0531 W/kg


Head Left tilt/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.717 V/m; Power Drift = -0.125 dB

Peak SAR (extrapolated) = 0.0740 W/kg

SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.031 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0510 W/kg

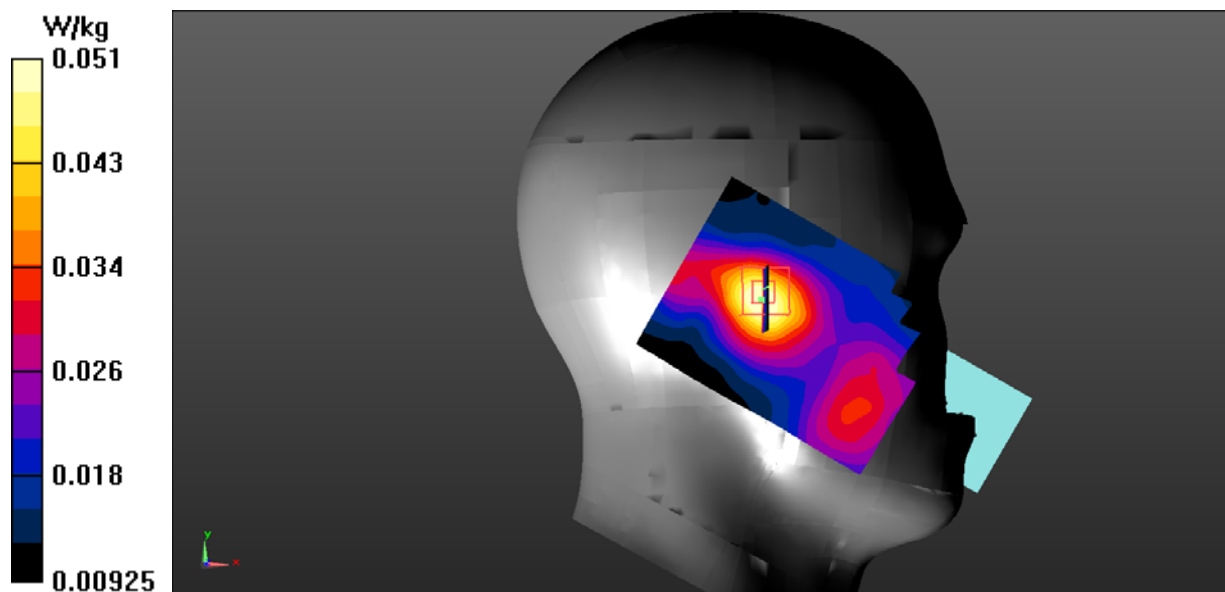

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.107$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head Right Cheek/WCDMA Band 2 Mid/Area Scan (101x131x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0746 W/kg

Head Right Cheek/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.124 V/m; Power Drift = 0.032 dB

Peak SAR (extrapolated) = 0.110 W/kg

SAR(1 g) = 0.071 W/kg; SAR(10 g) = 0.047 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0755 W/kg

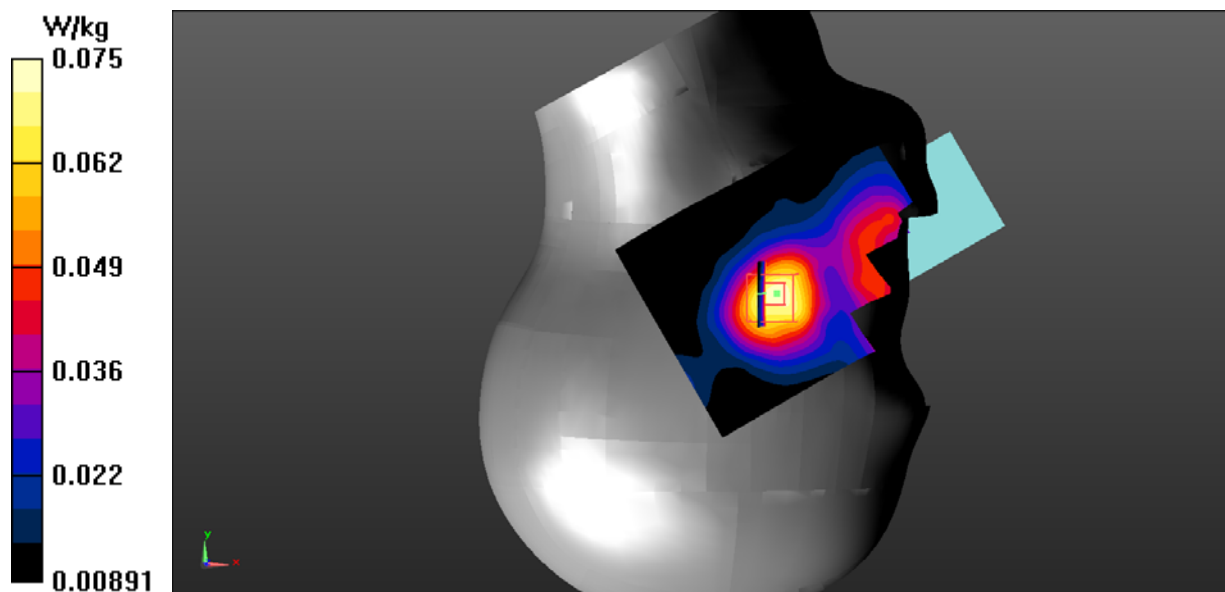

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.402$ S/m; $\epsilon_r = 40.107$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.91, 7.91, 7.91) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head Right tilt/WCDMA Band 2 Mid/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0341 W/kg


Head Right tilt/WCDMA Band 2 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.018 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.032 W/kg; SAR(10 g) = 0.022 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0339 W/kg

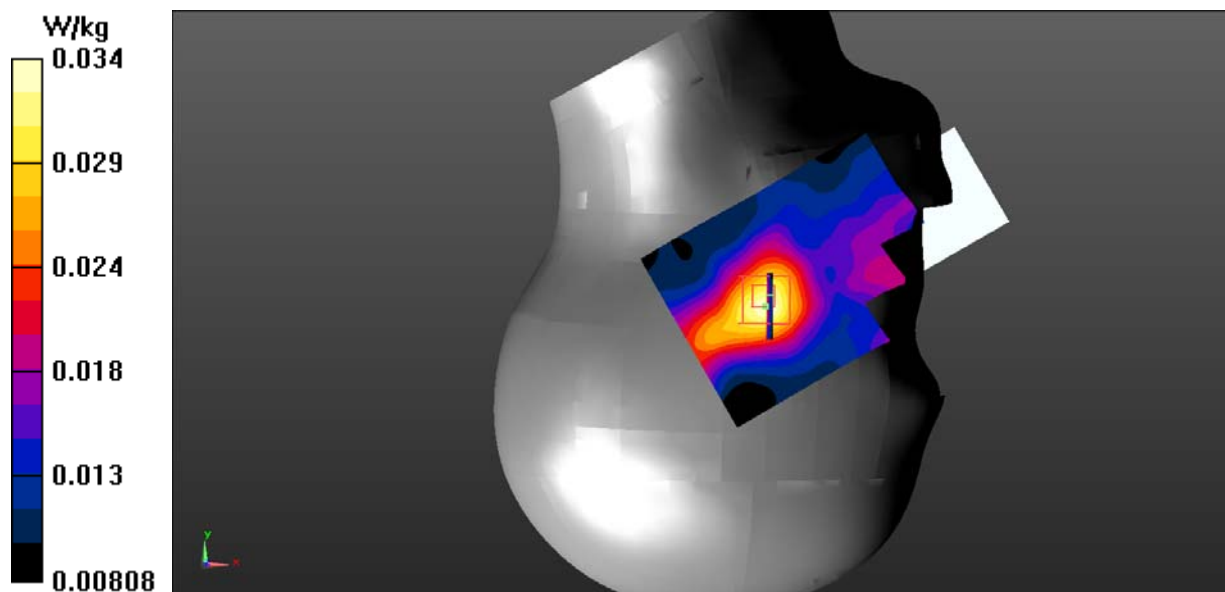

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.512$ S/m; $\epsilon_r = 53.394$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1852.4 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body back/WCDMA Band 2 Back low/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.382 W/kg


Body back/WCDMA Band 2 Back low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.31 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.633 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.184 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.378 W/kg

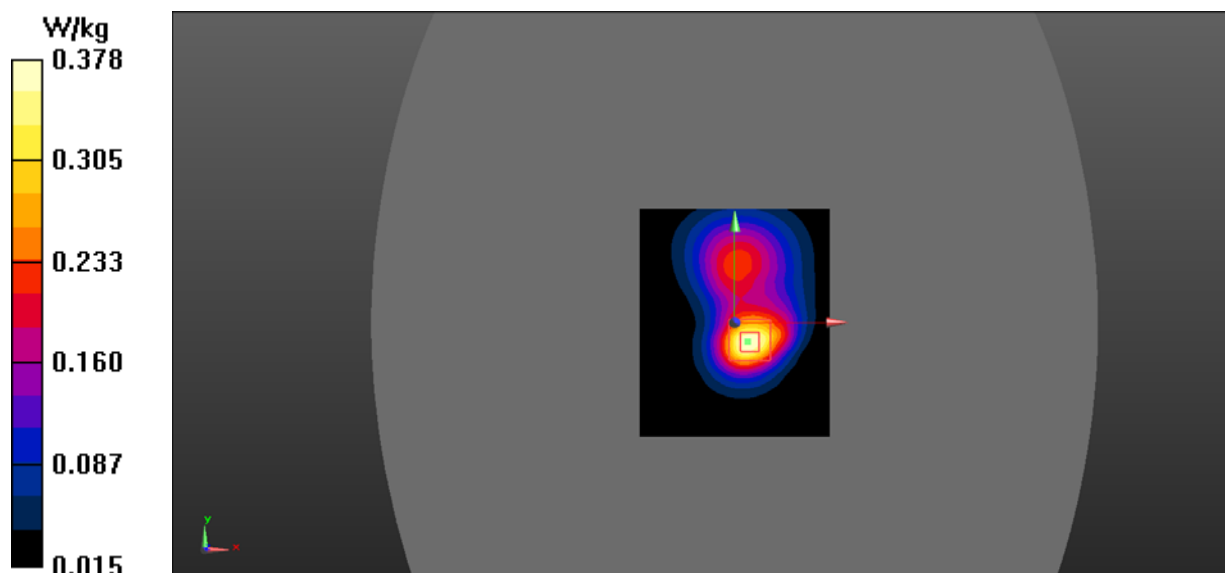

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 53.301$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body back/WCDMA Band 2 Back Mid/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.476 W/kg


Body back/WCDMA Band 2 Back Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.73 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.814 W/kg

SAR(1 g) = 0.423 W/kg; SAR(10 g) = 0.223 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.471 W/kg

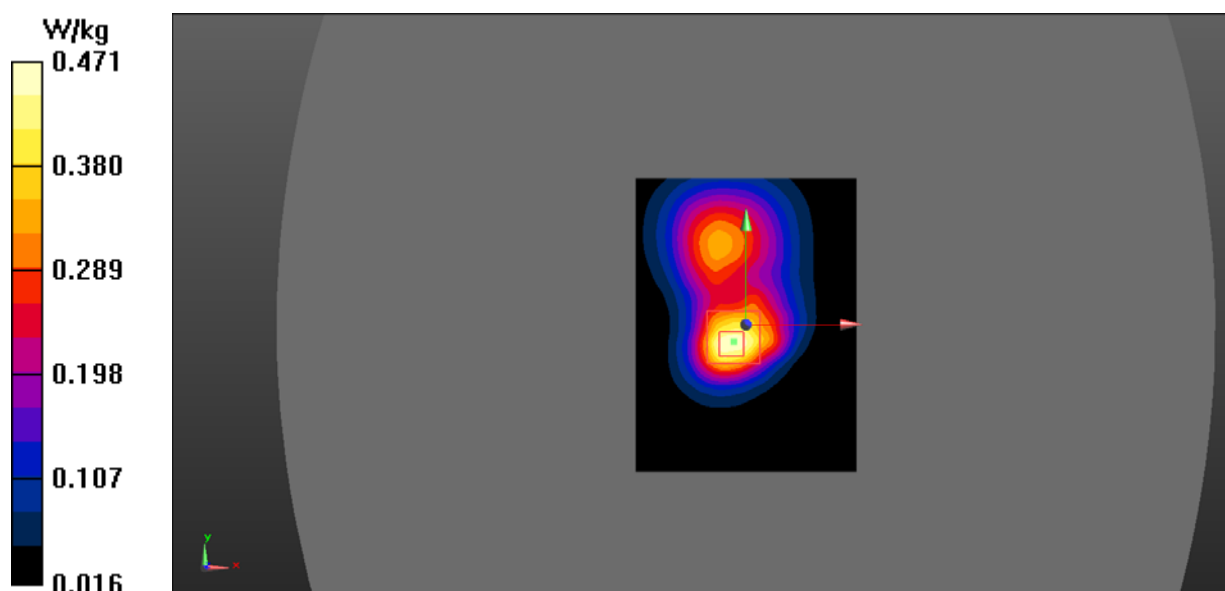

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1907.6$ MHz; $\sigma = 1.523$ S/m; $\epsilon_r = 53.335$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1907.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body back/WCDMA Band 2 Back high/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.515 W/kg


Body back/WCDMA Band 2 Back high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.74 V/m; Power Drift = -0.128 dB

Peak SAR (extrapolated) = 0.837 W/kg

SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.241 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.496 W/kg

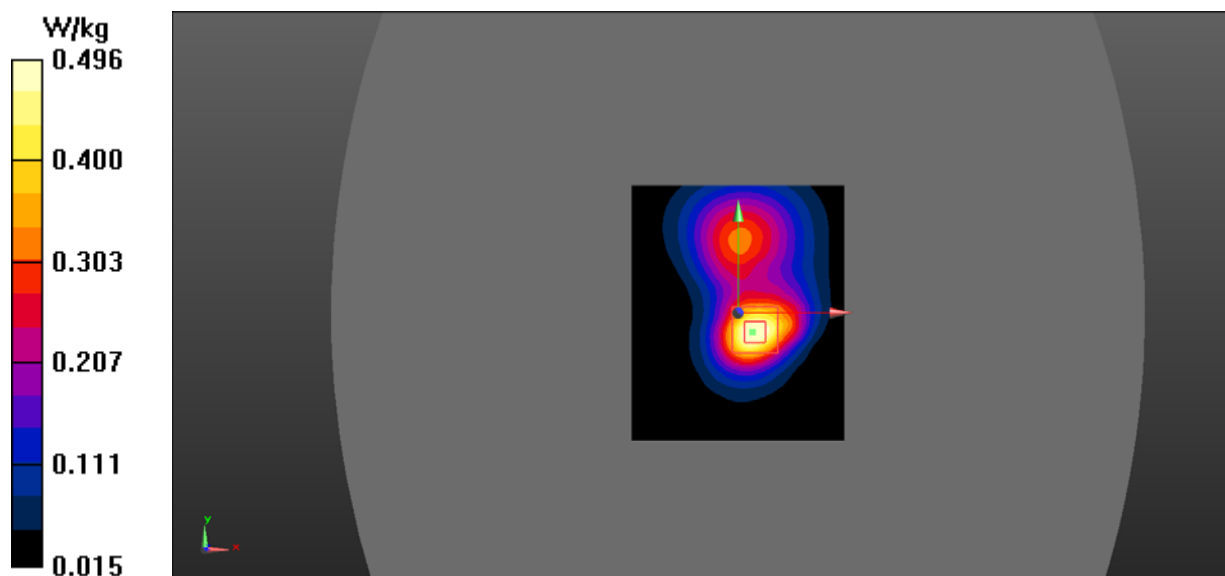

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 53.301$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(7.48, 7.48, 7.48) @ 1880 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Bottom/WCDMA Band 2 Bottom Mid/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.241 W/kg


Body Bottom/WCDMA Band 2 Bottom Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.730 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.361 W/kg

SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.116 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.236 W/kg

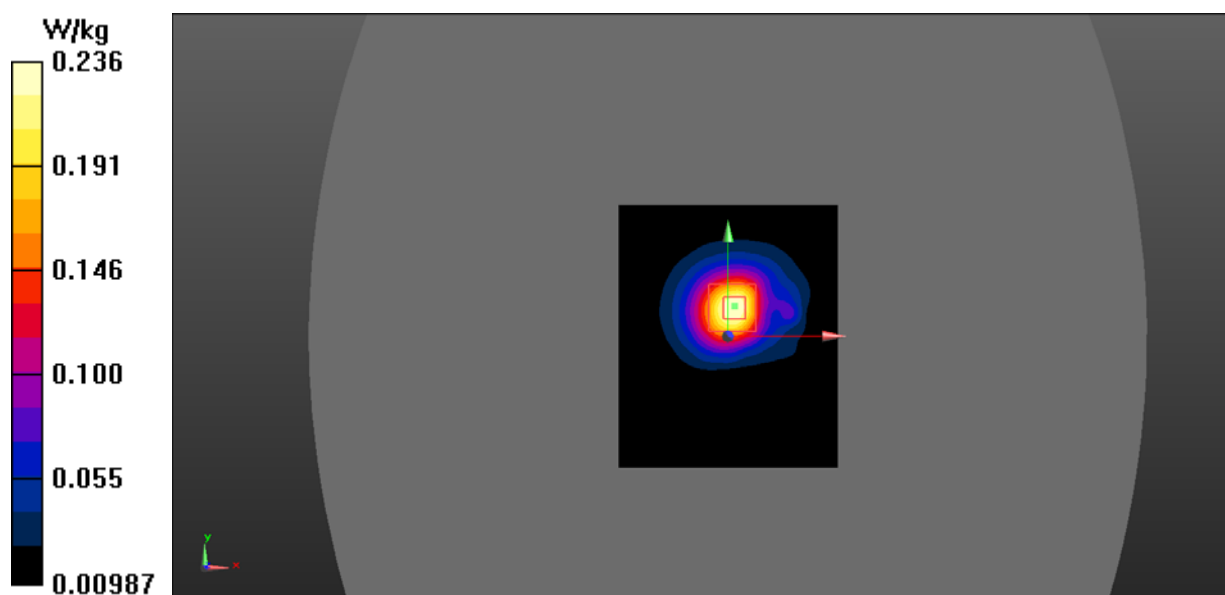

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.606$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 826.4 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head Left Cheek/WCDMA Band 5 low/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.368 W/kg


Head Left Cheek/WCDMA Band 5 low/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.918 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.628 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.205 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.374 W/kg

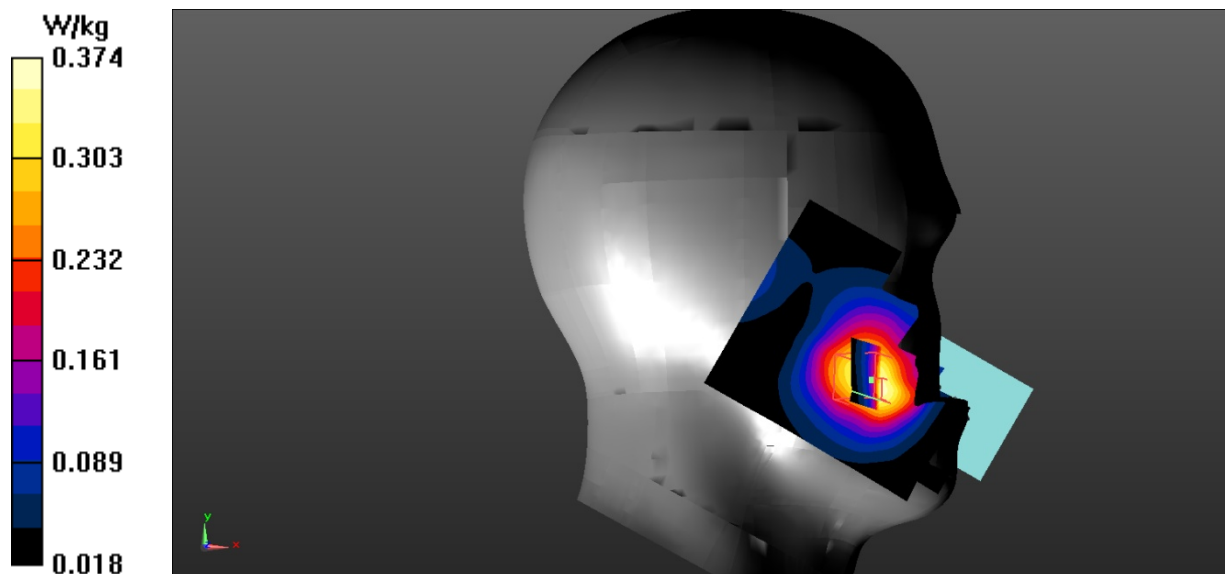

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.649$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head Left Cheek/WCDMA Band 5 Mid/Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.233 W/kg


Head Left Cheek/WCDMA Band 5 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 10.57 V/m; Power Drift = -0.23 dB

Peak SAR (extrapolated) = 0.347 W/kg

SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.165 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.278 W/kg

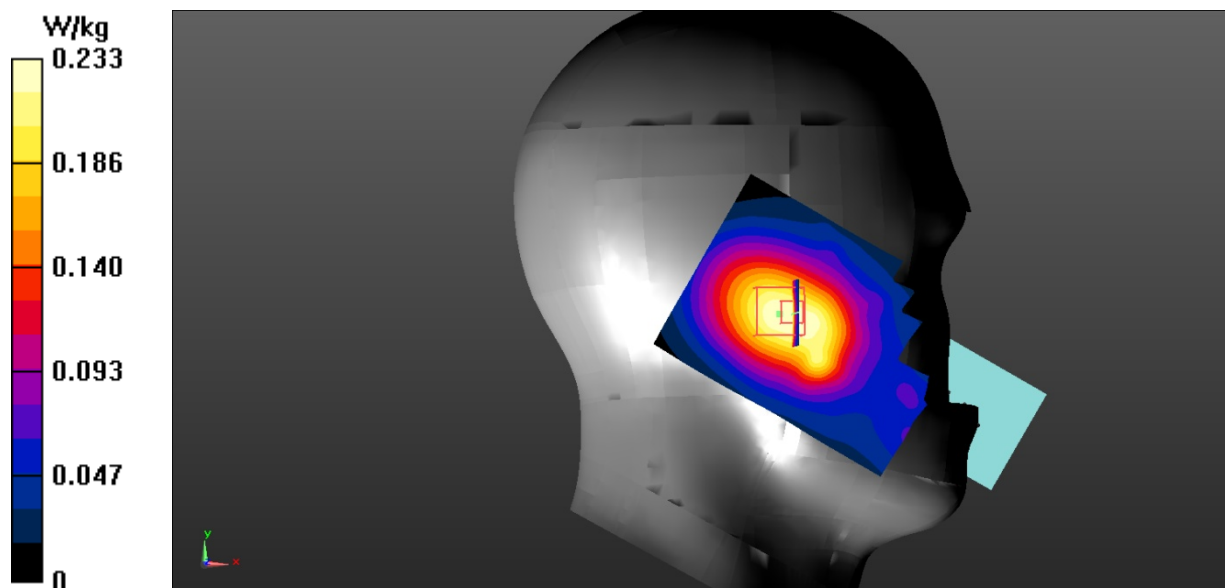

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 41.336$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 846.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head Left Cheek/WCDMA Band 5 high/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.271 W/kg


Head Left Cheek/WCDMA Band 5 high/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.076 V/m; Power Drift = -0.155 dB

Peak SAR (extrapolated) = 0.519 W/kg

SAR(1 g) = 0.281 W/kg; SAR(10 g) = 0.172 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.311 W/kg

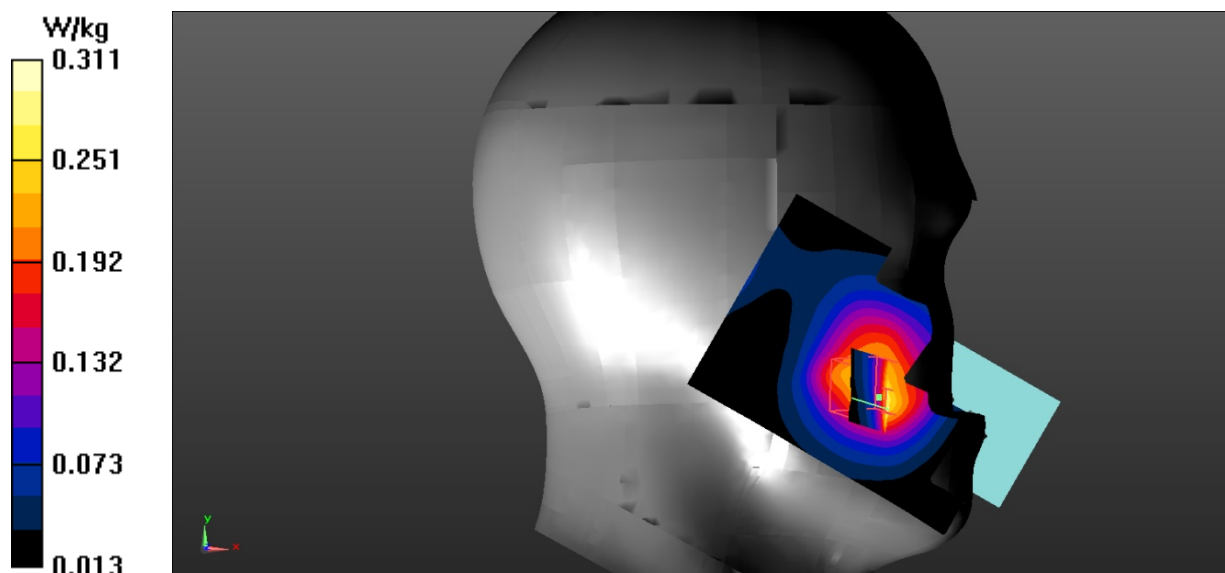

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.649$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head Left tilt/WCDMA Band 5 Mid/Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.108 W/kg


Head Left tilt/WCDMA Band 5 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.880 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.141 W/kg

SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.071 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.107 W/kg

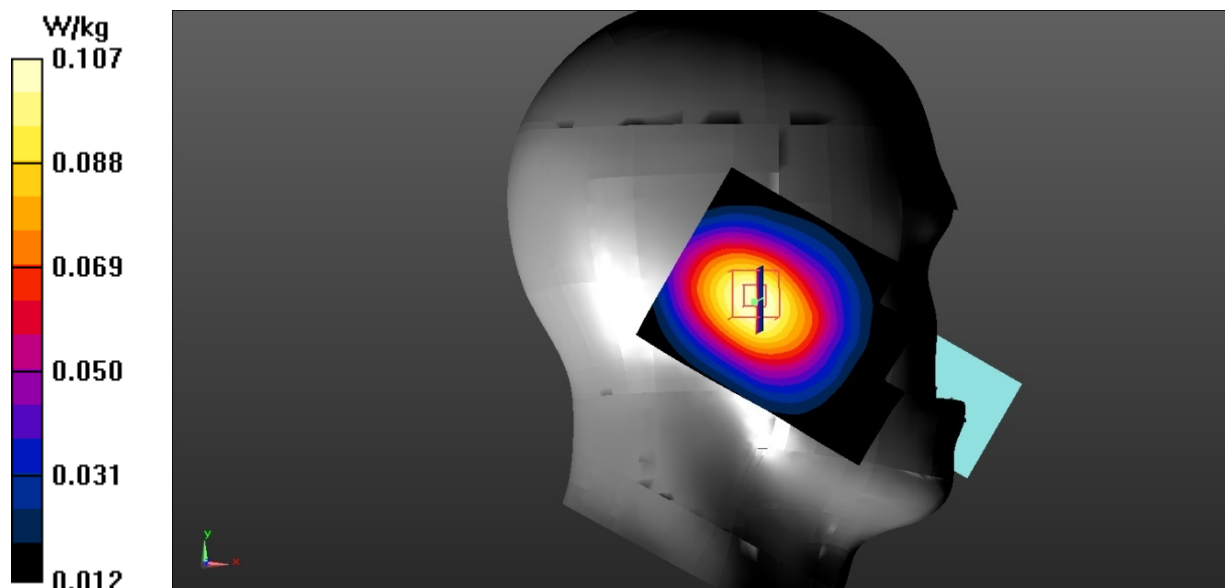

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.649$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head Right Cheek/WCDMA Band 5 Mid/Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.197 W/kg

Head Right Cheek/WCDMA Band 5 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid:


$dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 7.720 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.244 W/kg

SAR(1 g) = 0.184 W/kg; SAR(10 g) = 0.126 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.195 W/kg

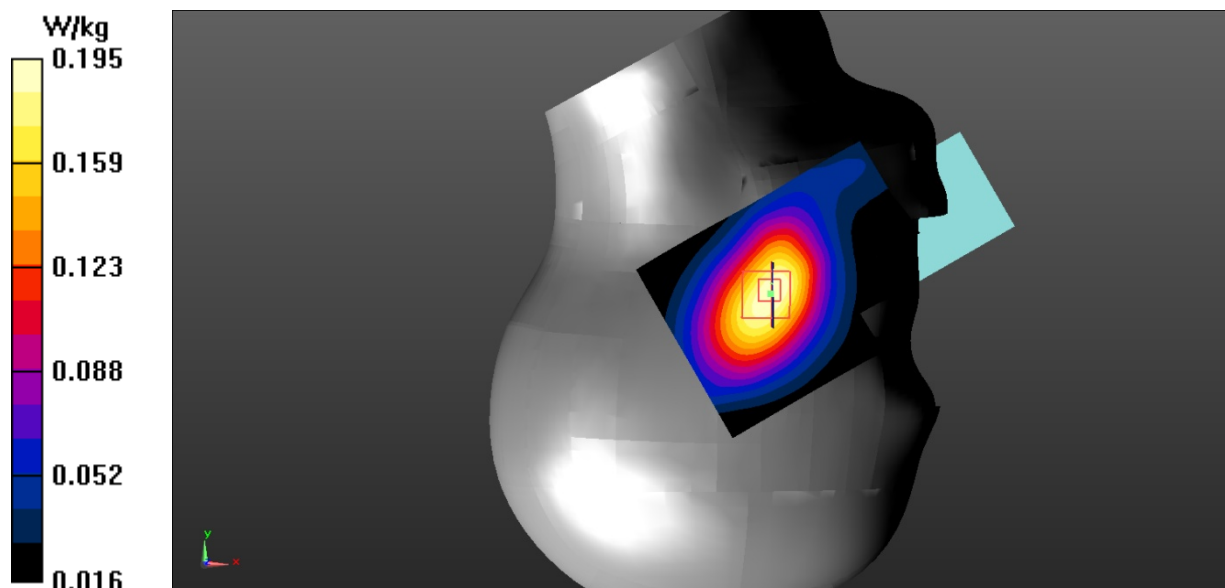

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.649$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.46, 9.46, 9.46) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: SAM-Twin V8.0 P1aP2a; Type: QD 000 P41 AA ; Serial: 1962
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Head Right tilt/WCDMA Band 5 Mid/Area Scan (91x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 0.0662 W/kg


Head Right tilt/WCDMA Band 5 Mid/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.423 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.0870 W/kg

SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.045 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.0678 W/kg

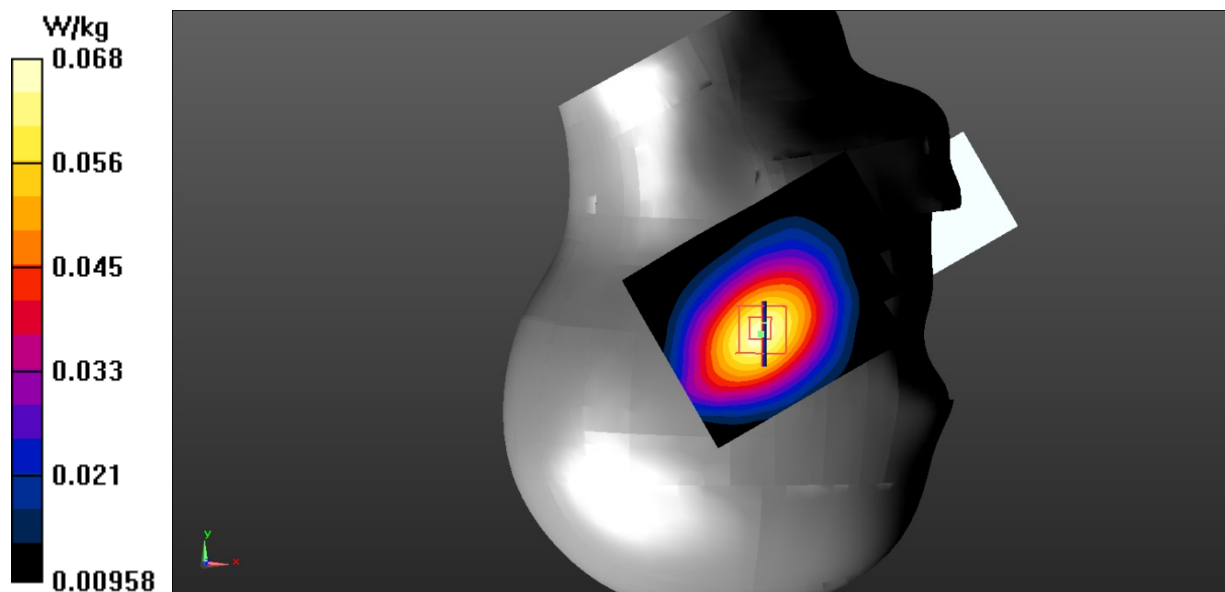

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101


Communication System: UID 0, WCDMA (0); Frequency: 826.4 MHz; Duty Cycle: 1:1
 Medium parameters used (interpolated): $f = 826.4$ MHz; $\sigma = 0.969$ S/m; $\epsilon_r = 55.310$; $\rho = 1000$ kg/m³
 Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 826.4 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body back/WCDMA Band 5 Back Low/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.474 W/kg

Body back/WCDMA Band 5 Back Low/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 20.84 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 0.761 W/kg
SAR(1 g) = 0.418 W/kg; SAR(10 g) = 0.263 W/kg (SAR corrected for target medium)
 Maximum value of SAR (measured) = 0.456 W/kg

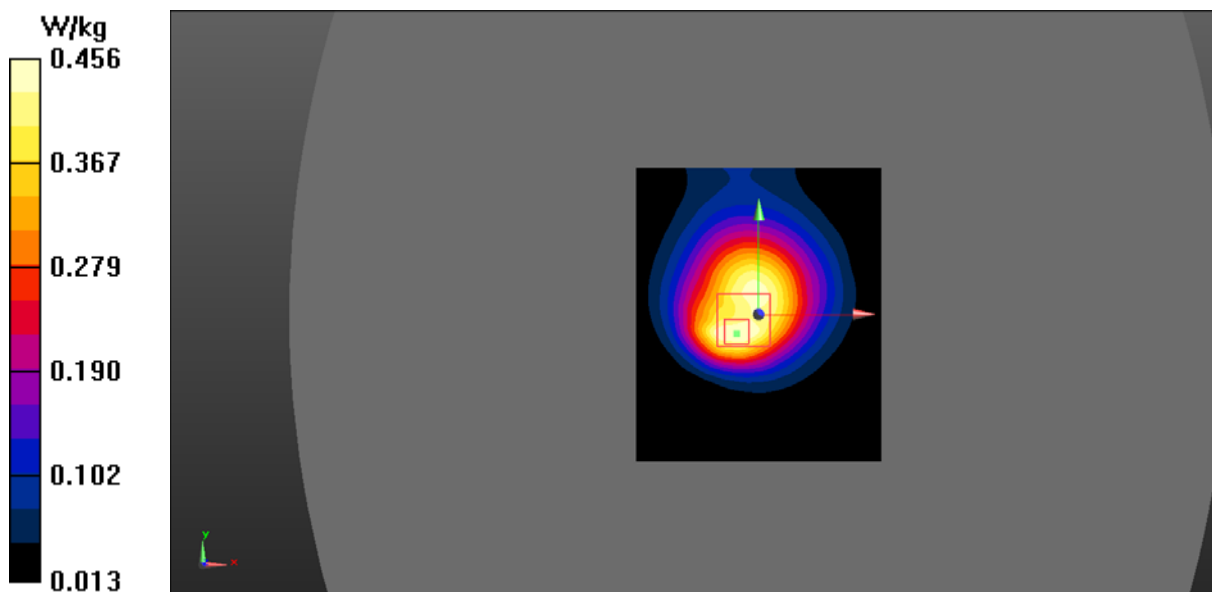

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 55.169$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body back/WCDMA Band 5 Back Mid 3/Area Scan (61x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.01 W/kg


Body back/WCDMA Band 5 Back Mid 3/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.46 V/m; Power Drift = 0.042 dB

Peak SAR (extrapolated) = 1.50 W/kg

SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.512 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.909 W/kg

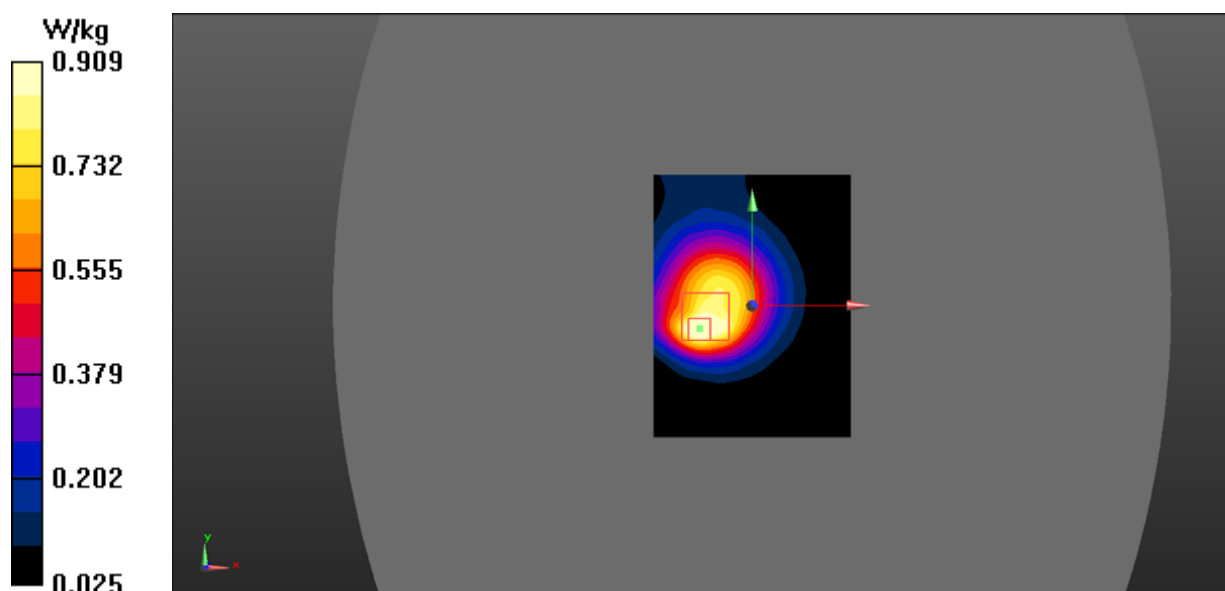

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 846.6$ MHz; $\sigma = 0.992$ S/m; $\epsilon_r = 55.042$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 846.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body back/WCDMA Band 5 Back high/Area Scan (101x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.761 W/kg


Body back/WCDMA Band 5 Back high/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.76 V/m; Power Drift = 0.27 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.676 W/kg; SAR(10 g) = 0.425 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.727 W/kg

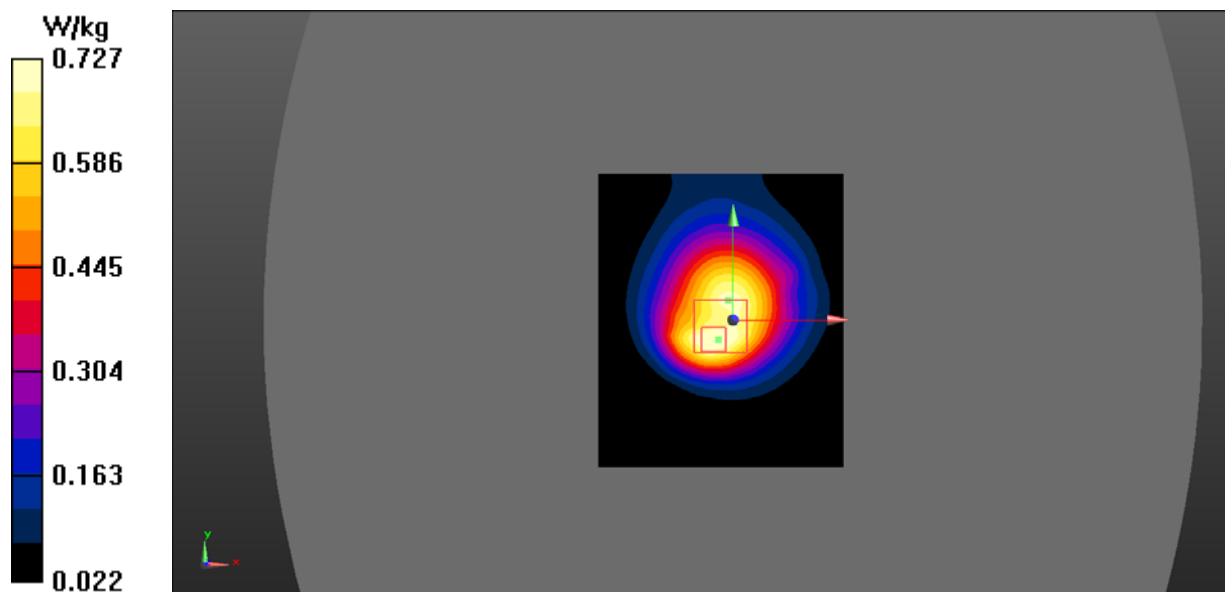

DUT: 3G Feature phone; Type: Prime-A1; Serial: 18101600101

Communication System: UID 0, WCDMA (0); Frequency: 836.6 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.977$ S/m; $\epsilon_r = 55.169$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN7522; ConvF(9.54, 9.54, 9.54) @ 836.6 MHz; Calibrated: 11/2/2018
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1562; Calibrated: 11/6/2018
- Phantom: ELI V8.0 P1aP2a; Type: QD OVA 004 AA; Serial: 2092
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Body Bottom/WCDMA Band 5 Bottom Mid/Area Scan (91x121x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.115 W/kg

Body Bottom/WCDMA Band 5 Bottom Mid/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.596 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.200 W/kg

SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.059 W/kg (SAR corrected for target medium)

Maximum value of SAR (measured) = 0.116 W/kg

