



A B C D E F

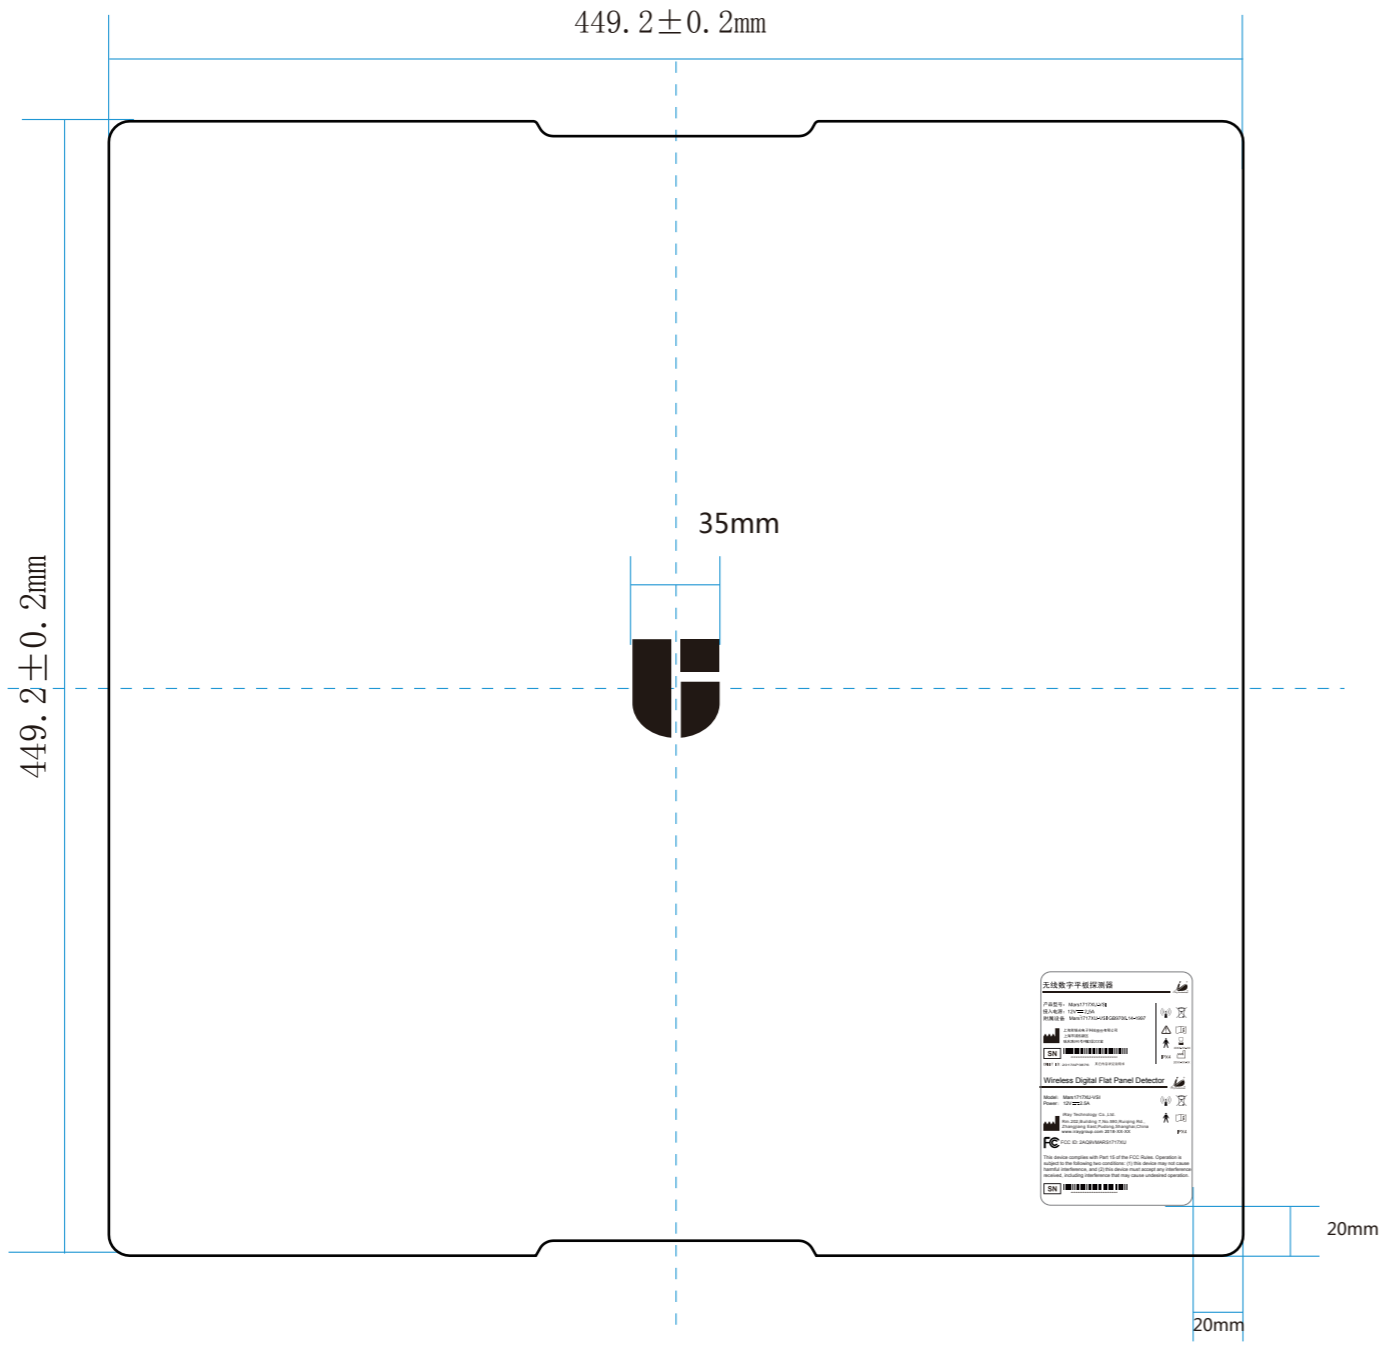

NOTE:

1. 尺寸：虚拟外围边框449.2\*449.2mm，公差如图所示；
2. PC磨砂，膜厚0.25mm，带背胶厚度0.4±0.1mm；
3. 复合膜满足《奕瑞碳板检测规范》的X射线相关要求，外观不可以有脏污，折痕，丝印清晰，不能有断线；
4. 符合RoHS要求；
5. 颜色说明：

外围尺寸		449.2*449.2mm
底色		白色哑光UI-WH001-S00 (参考 422-U1 91DS)
LOGO		丝印深银 UI-SV004-S00-SCP (参考RAL 9023)
标签		丝印灰色 (参考PANTONE 424C)

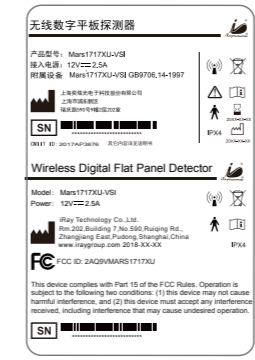

ITEM	CONTENTS OF CHANGE	M/D/Y	TOL ±	RANGE										
				M1	M2	S1	S2	P1	P2	C	B			
	公司网址变为“iraygroup”，修改FCC ID：“2AQ9VMARS1717XU”	11/15/18		0~6	0.05	0.1	0.15	0.2	0.05	0.1	0.5	0.15		
	公司名称增加“股份”，制造地址删除“张江高科技产业东区”	09/19/17		6~30	0.1	0.2	0.15	0.25	0.1	0.15	1	0.15		
A2	ECR:20170808-05/背胶由FT7515修改为3M6615	09/19/17		30~80	0.15	0.25	0.2	0.3	0.2	0.4	2	0.25		
A1	update(增加MIIT ID)	07/04/17		80~180	0.15	0.3	0.25	0.45	0.4	0.8	3	0.25		
A0	release	10/31/16		180~315	0.2	0.5	0.4	0.6	0.6	1.2	3	0.3		
ITEM	CONTENTS OF CHANGE	M/D/Y		315~800	0.3	0.8	0.7	1.1	0.8	1.5	4	0.5		

Material (or approved equivalent):	碳板贴膜	Finishing.		Treatment.		
General Tolerances to:	S1	Part No.	01185567			
Description	 Third Angle Projection	Drawn	陈向阳		李梦	
		Checked	余院生		潘炜	
		Standard	尹惠琴		Doc.Type	结构件
		Process	贺军		Mod.No	
Approved	黄翌敏		Scale	1:2		
 IRAY TECHNOLOGY Ltd		Doc.No.	045-321-29		Rev.	