


TEST REPORT

Reference No...... : WTD21D07074074W001 V1
FCC ID : 2AQA6-H6002A
Applicant..... : Shenzhen Intellirocks Tech. Co., Ltd.
Address..... : No. 2901-2904, 3002, Block C, Section 1, Chuangzhi Yuncheng Building, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Xili Street, Nanshan District, Shenzhen, Guangdong, China
Manufacturer : NanChang Innotech Homeshmart Co., Ltd
Address..... : 1st to 5th floor, 2-1#, Nanchang Small and Medium-sized Enterprises Entrepreneurship Incubation Base (Phase II), Guowei Industrial Park, No. 669 Huangtang E Rd, Linkong Economic Zone, Nanchang, Jiangxi, China
Product..... : Smart LED Bulb
Model(s) : H6002
Brand Name..... : 
Standards..... : FCC CFR47 Part 15.247
Date of Receipt sample : 2021-07-26
Date of Test : 2021-07-26 to 2021-07-29
Date of Issue..... : 2021-08-10
Test Result..... : Pass

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Testing Group Co., Ltd.

Address: No. 77, Houjie Section, Guantai Road, Houjie Town, Dongguan City, Guangdong, China
Tel: +86-769-2267 6998
Fax: +86-769-2267 6828

Compiled by:



Estel Qian / Project Engineer

Approved by:



Daniel Liu / Designated Reviewer

2 Contents

	Page
1 COVER PAGE.....	1
2 CONTENTS	2
3 REVISION HISTORY	3
4 GENERAL INFORMATION.....	4
4.1 GENERAL DESCRIPTION OF E.U.T.	4
4.2 DETAILS OF E.U.T.	4
4.3 TEST FACILITY.....	4
4.4 CHANNEL LIST.....	5
4.5 TEST MODE.....	6
5 TEST SUMMARY	7
6 EQUIPMENT USED DURING TEST	8
6.1 EQUIPMENTS LIST.....	8
6.2 DESCRIPTION OF SUPPORT UNITS	9
6.3 MEASUREMENT UNCERTAINTY	9
6.4 TEST EQUIPMENT CALIBRATION	9
7 EMC REQUIREMENTS FOR EMISSIONS.....	10
7.1 CONDUCTED EMISSIONS.....	10
7.2 E.U.T. OPERATION	10
7.3 TEST SETUP	10
7.4 MEASUREMENT DESCRIPTION	10
7.5 TEST RESULTS.....	11
8 RADIATED EMISSIONS.....	13
8.1 EUT OPERATION.....	13
8.2 TEST SETUP	14
8.3 SPECTRUM ANALYZER SETUP	15
8.4 TEST PROCEDURE	16
8.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	16
8.6 SUMMARY OF TEST RESULTS.....	17
9 DUTY CYCLE.....	29
10 BAND EDGE MEASUREMENT	31
10.1 TEST PRODUCE	31
10.2 TEST RESULT	32
11 6 DB BANDWIDTH AND 99% BANDWIDTH MEASUREMENT	34
11.1 TEST PROCEDURE:.....	34
11.2 TEST RESULT:	34
12 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	41
12.1 TEST PROCEDURE:.....	41
12.2 TEST RESULT:	42
13 POWER SPECTRAL DENSITY	47
13.1 TEST PROCEDURE:.....	47
13.2 TEST RESULT:	47
14 ANTENNA REQUIREMENT	52
15 RF EXPOSURE.....	52
16 PHOTOGRAPHS OF TEST SETUP AND EUT.....	52

3 Revision History

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTD21D07074074 W001	2021-07-26	2021-07-26 to 2021-07-29	2021-07-29	Original	-	Replaced
WTD21D07074074 W001 V1	2021-07-26	2021-07-26 to 2021-07-29	2021-08-10	Version 1	Updated	Valid

4 General Information

4.1 General Description of E.U.T.

Product:	Smart LED Bulb
Model(s):	H6002
Model Description:	N/A
Wi-Fi Specification:	2.4G-802.11b/g/n HT20
Bluetooth Version:	5.0
Hardware Version:	V1.0
Software Version:	1.00.10

4.2 Details of E.U.T.

Operation Frequency:	Wi-Fi: 802.11b/g/n HT20: 2412~2462MHz BLE:2402-2480MHz
Max. RF output power:	Wi-Fi: 17.94dBm BLE: 4.34dBm
Type of Modulation:	Wi-Fi: CCK, OFDM BLE: GFSK
Antenna installation:	Wi-Fi/BLE: internal permanent antenna
Antenna Gain:	Wi-Fi/BLE: 1.5dBi
Ratings:	120V~ 0.11A, 60Hz, 9W

4.3 Test Facility

The test facility has a test site registered with the following organizations:

ISED CAB identifier: CN0013. Test Firm Registration No.: 7760A.

Waltek Testing Group Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files. Registration number 7760A, October 15, 2016.

FCC Designation No.: CN1201. Test Firm Registration No.: 523476.

Waltek Testing Group Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration number 523476, September 10, 2019.

4.4 Channel List

WIFI

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

BT BLE

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
0	2402	1	2404	2	2406	3	2408
4	2410	5	2412	6	2414	7	2416
8	2418	9	2420	10	2422	11	2424
12	2426	13	2428	14	2430	15	2432
16	2434	17	2436	18	2438	19	2440
20	2442	21	2444	22	2446	23	2448
24	2450	25	2452	26	2454	27	2456
28	2458	29	2460	30	2462	31	2464
32	2466	33	2468	34	2470	35	2472
36	2474	37	2476	38	2478	39	2480

4.5 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
Power Spectral Density	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
6dB Bandwidth	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
Band Edge	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX
Transmitter Spurious Emissions	802.11b	1 Mbps	1/6/11	TX
	802.11g	6 Mbps	1/6/11	TX
	802.11n HT20	MCS0	1/6/11	TX

Table 2 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	BT BLE	1 Mbps	0/19/39	TX
Power Spectral Density	BT BLE	1 Mbps	0/19/39	TX
6dB Bandwidth	BT BLE	1 Mbps	0/19/39	TX
Band Edge	BT BLE	1 Mbps	0/19/39	TX
Transmitter Spurious Emissions	BT BLE	1 Mbps	0/19/39	TX

Note: Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product.

5 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.247(d) 15.205(a) 15.209(a)	PASS
Conducted Spurious Emissions	15.247(d)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3), (4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

6 Equipment Used during Test

6.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	EMI Test Receiver	R&S	ESCI	100947	2020-07-30	1Year
2	LISN	R&S	ENV216	101215	2020-07-30	1Year
3	Cable	Top	TYPE16(3.5M)	-	2020-07-30	1Year
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	EMI Test Receiver	R&S	ESCI	101155	2020-07-30	1Year
2	LISN	SCHWARZBECK	NSLK 8128	8128-289	2020-07-30	1Year
3	Limiter	York	MTS-IMP-136	261115-001-0024	2020-07-30	1Year
4	Cable	LARGE	RF300	-	2020-07-30	1Year
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	Spectrum Analyzer	R&S	FSP30	100091	2021-04-26	1Year
2	Amplifier	Agilent	8447D	2944A10178	2020-08-26	1Year
4	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2020-08-22	1Year
5	Coaxial Cable	Top	TYPE16(13M)	-	2021-04-26	1Year
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2021-04-30	1Year
7	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	2020-08-01	1Year
8	Broadband Pre-amplifier	COMPLIANCE	PAP-1G18	2004	2020-08-26	1Year
9	Coaxial Cable	ZT26-NJ-NJ-8M/FA	1GHz-18GHz	NA	2021-04-26	1Year
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	Test Receiver	R&S	ESCI	101296	2021-04-26	1Year
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2020-10-31	1Year
3	Active Loop Antenna	Com-Power Corp.	AL-130R	10160007	2021-04-29	1Year
4	Amplifier	ANRITSU	MH648A	M43381	2021-04-26	1Year
5	Cable	HUBER+SUHNER	CBL2	525178	2021-04-26	1Year
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date	Valid
1	Spectrum Analyzer	R&S	FSP30	100091	2021-04-26	1Year
2	Spectrum Analyzer	R&S	FSP40	100501	2020-07-30	1Year
3	Signal Analyzer	Agilent	N9010A	MY50520207	2021-04-19	1Year

6.2 Description of Support Units

Equipment	Manufacturer	Model No.	Series No.
/	/	/	/

6.3 Measurement Uncertainty

Parameter	Uncertainty
Conducted Emission	± 3.64dB (AC mains 150KHz~30MHz)
Radiated Spurious Emissions	± 5.08dB (Bilog antenna 30M~1000MHz)
	± 5.47 dB (Horn antenna 1000M~25000MHz)
Radio Frequency	± 1 x 10 ⁻⁷ Hz
RF Power	± 0.42 dB
RF Power Density	± 0.7dB
Conducted Spurious Emissions	± 2.76 dB (9kHz~26500MHz)
Confidence interval: 95%. Confidence factor: k=2	

6.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

7 EMC Requirements for Emissions

7.1 Conducted Emissions

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Limit:	


Frequency (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.5 to 5.0	56	46
5.0 to 30	60	50
*Decreases with the logarithm of the frequency.		

7.2 E.U.T. Operation

Operating Environment:	
Temperature	: 21.5°C
Humidity	: 52.2 % RH
Atmospheric Pressure	: 101.3kPa
EUT Operation:	Refer to section 4.5.

7.3 Test Setup

The conducted emission tests were performed using the setup accordance with the ANSI C6.10:213.

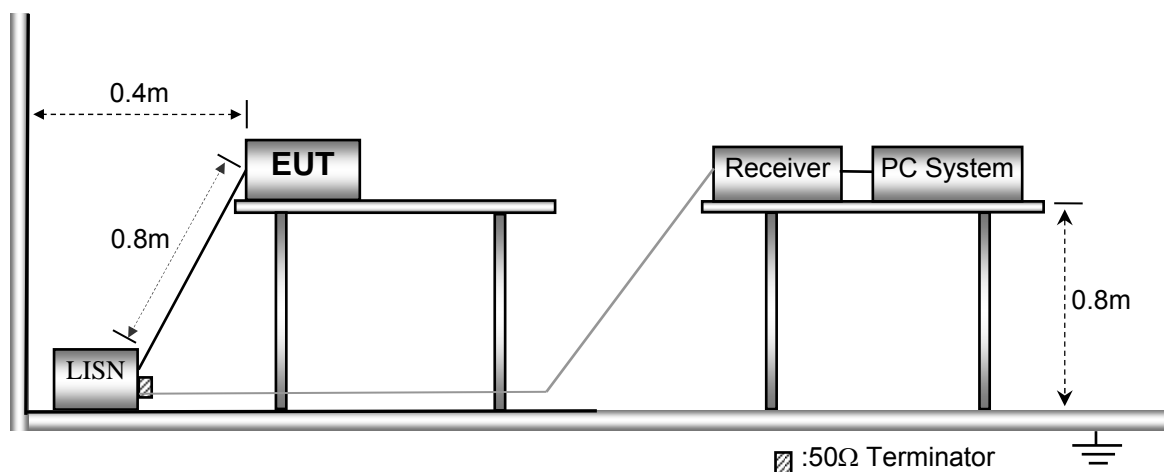


7.4 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.


7.5 Test Results

Live Line:

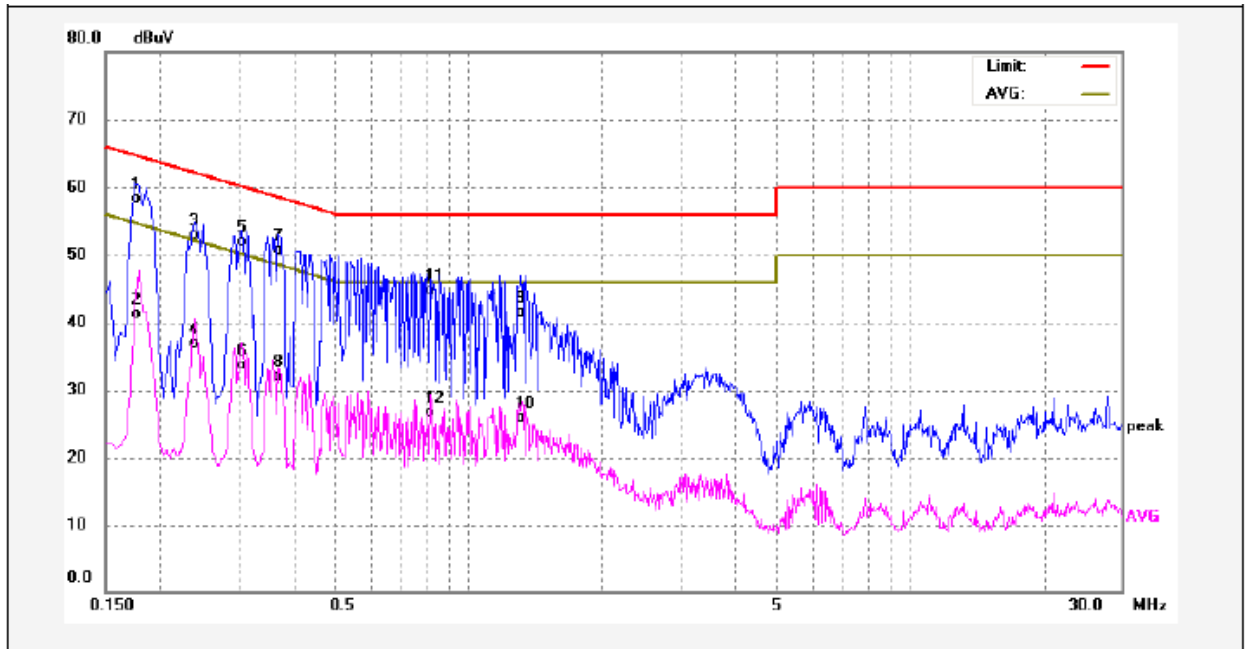

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1740	48.26	9.99	58.25	64.76	-6.51	QP	
2	0.1740	31.36	9.99	41.35	54.76	-13.41	AVG	
3	0.2380	42.82	9.99	52.81	62.16	-9.35	QP	
4	0.2380	26.95	9.99	36.94	52.16	-15.22	AVG	
5	0.3060	41.84	9.98	51.82	60.08	-8.26	QP	
6	0.3060	23.82	9.98	33.80	50.08	-16.28	AVG	
7	0.3700	40.67	10.03	50.70	58.50	-7.80	QP	
8	0.3700	22.00	10.03	32.03	48.50	-16.47	AVG	
9	1.3140	31.31	10.15	41.46	56.00	-14.54	QP	
10	1.3140	15.70	10.15	25.85	46.00	-20.15	AVG	
11	0.8139	34.63	10.11	44.74	56.00	-11.26	QP	
12	0.8139	16.64	10.11	26.75	46.00	-19.25	AVG	

Neutral Line:

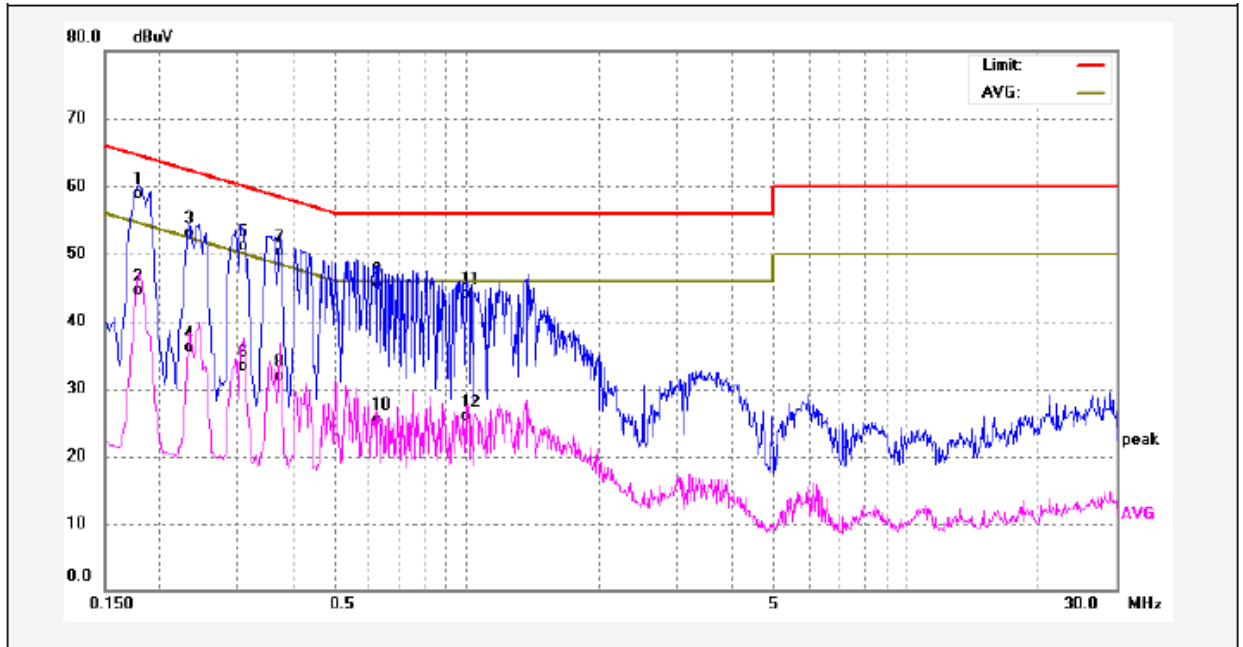

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1780	48.83	9.99	58.82	64.57	-5.75	QP	
2	0.1780	34.42	9.99	44.41	54.57	-10.16	AVG	
3	0.2340	43.18	10.00	53.18	62.30	-9.12	QP	
4	0.2340	26.03	10.00	36.03	52.30	-16.27	AVG	
5	0.3060	41.17	9.98	51.15	60.08	-8.93	QP	
6	0.3060	23.25	9.98	33.23	50.08	-16.85	AVG	
7	0.3740	40.33	10.03	50.36	58.41	-8.05	QP	
8	0.3740	21.82	10.03	31.85	48.41	-16.56	AVG	
9	0.6260	35.34	10.07	45.41	56.00	-10.59	QP	
10	0.6260	15.50	10.07	25.57	46.00	-20.43	AVG	
11	0.9900	33.98	10.15	44.13	56.00	-11.87	QP	
12	0.9900	15.78	10.15	25.93	46.00	-20.07	AVG	

8 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
 ANSI C63.10:2013
 Test Result: PASS
 Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	20log ^{(2400/F(kHz))} + 80
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	20log ^{(24000/F(kHz))} + 40
1.705 ~ 30	30	30	100 * 30	20log ⁽³⁰⁾ + 40
30 ~ 88	100	3	100	20log ⁽¹⁰⁰⁾
88 ~ 216	150	3	150	20log ⁽¹⁵⁰⁾
216 ~ 960	200	3	200	20log ⁽²⁰⁰⁾
Above 960	500	3	500	20log ⁽⁵⁰⁰⁾

8.1 EUT Operation

Operating Environment:

Temperature: 23.5 °C
 Humidity: 52.1 % RH
 Atmospheric Pressure: 101.2kPa


EUT Operation:

The test was performed in TX transmitting mode, the test data were shown in the report.


8.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

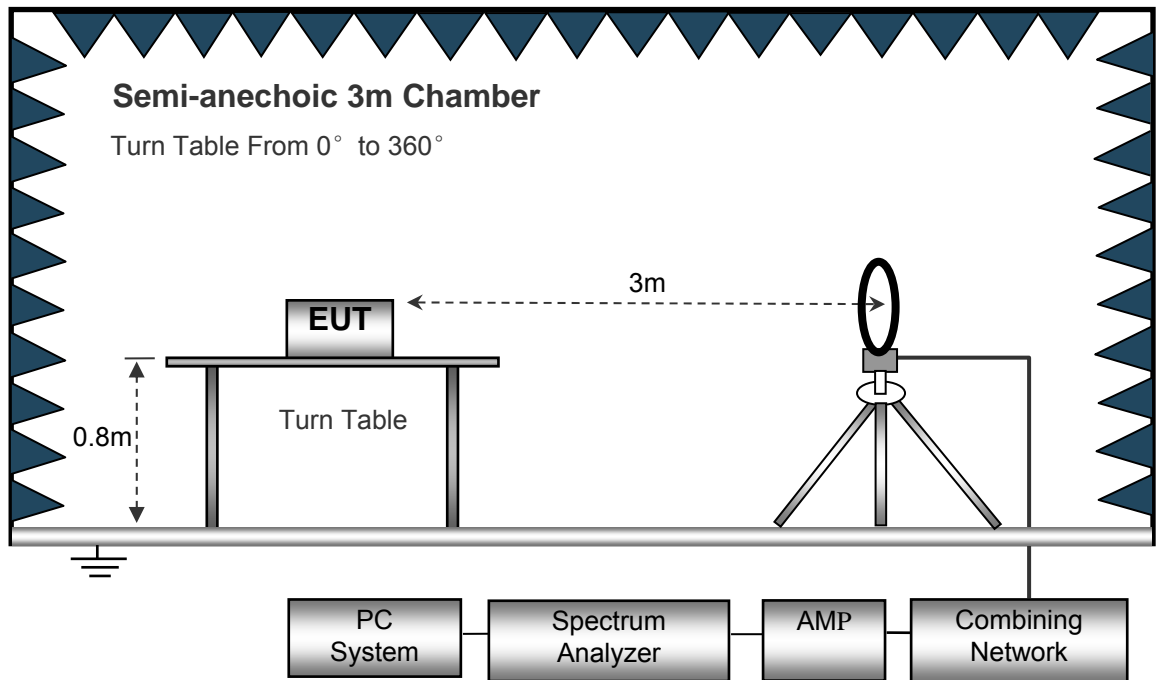

The test setup for emission measurement from 30 MHz to 1 GHz.

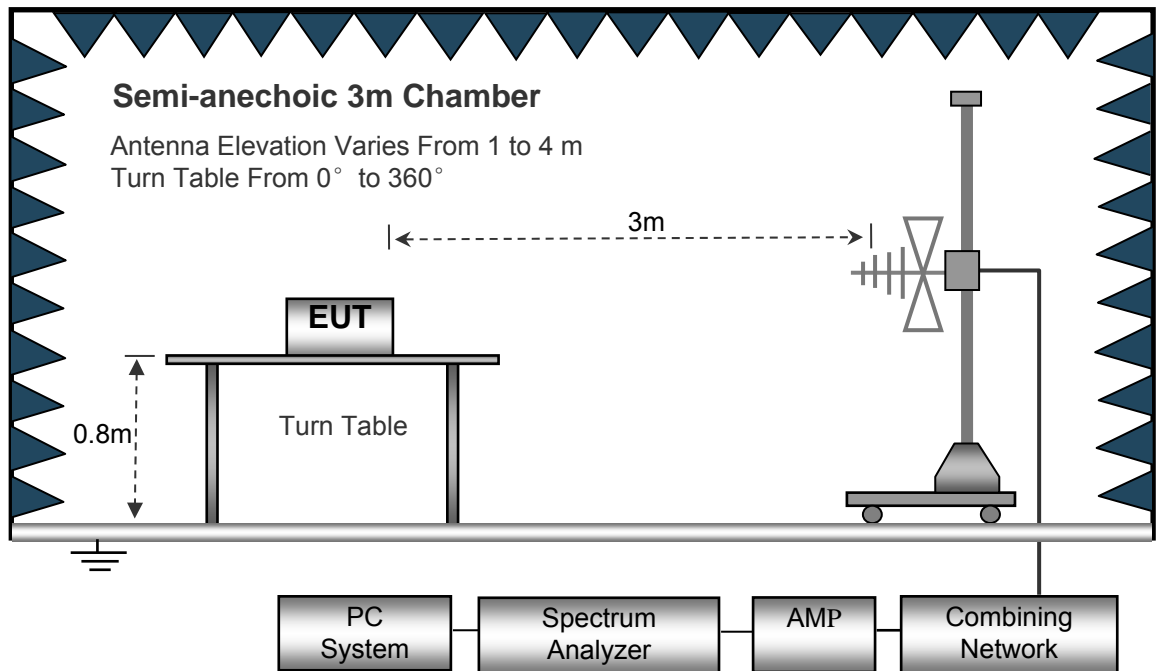

The test setup for emission measurement above 1 GHz.

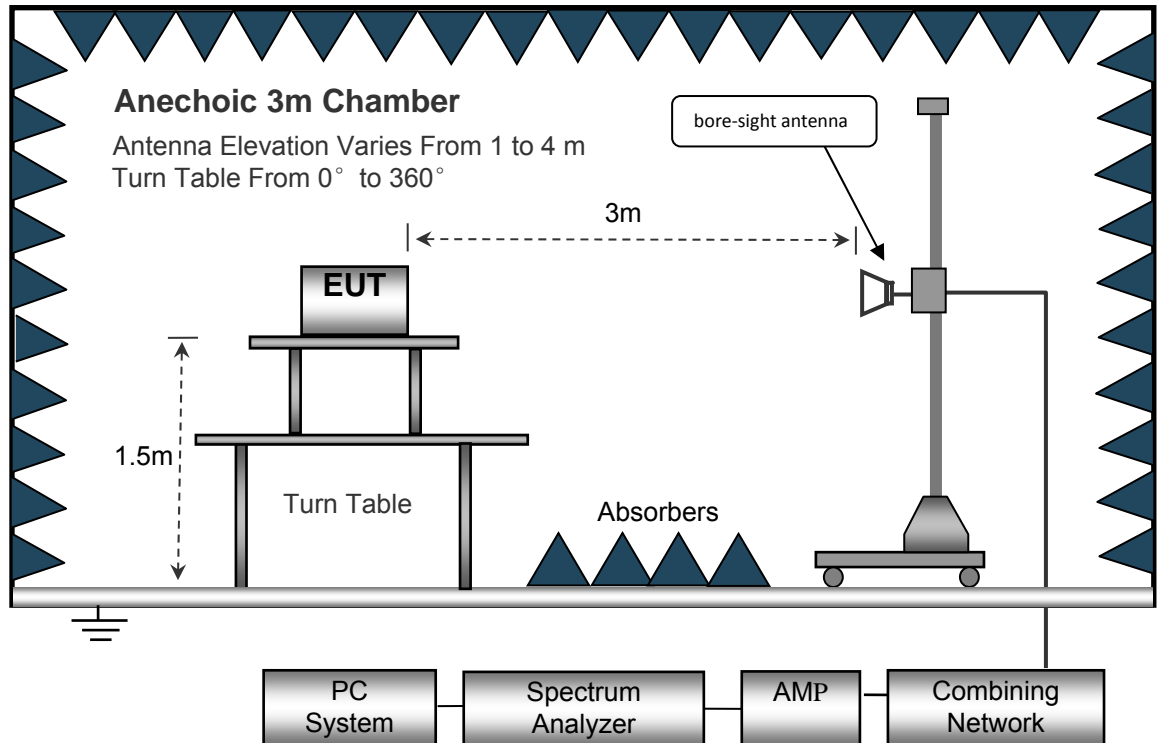

8.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

8.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane for below 1GHz and 1.5m for above 1GHz.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in Z axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used during radiated emissions above 1GHz measurement.

8.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

8.6 Summary of Test Results

Note: Lowest frequency generated in the device is 40MHz, frequency range of measurement should be above 30MHz.

Wi-Fi:

Test Frequency: 30MHz ~ 8GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Low Channel 2412MHz									
223.45	45.37	QP	246	1.7	H	-11.62	33.75	46.00	-12.25
223.45	29.18	QP	81	1.3	V	-11.62	17.56	46.00	-28.44
4824.00	52.43	PK	275	1.4	V	-1.06	51.37	74.00	-22.63
4824.00	43.35	Ave	275	1.4	V	-1.06	42.29	54.00	-11.71
7236.00	44.68	PK	265	1.5	H	1.33	46.01	74.00	-27.99
7236.00	45.81	Ave	265	1.5	H	1.33	47.14	54.00	-6.86
2327.38	45.88	PK	346	1.3	V	-13.19	32.69	74.00	-41.31
2327.38	37.08	Ave	346	1.3	V	-13.19	23.89	54.00	-30.11
2367.34	43.67	PK	186	1.6	H	-13.14	30.53	74.00	-43.47
2367.34	37.93	Ave	186	1.6	H	-13.14	24.79	54.00	-29.21
2498.93	44.61	PK	276	1.2	V	-13.08	31.53	74.00	-42.47
2498.93	37.68	Ave	276	1.2	V	-13.08	24.60	54.00	-29.40

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: Middle Channel 2437MHz									
223.45	46.56	QP	306	1.1	H	-11.62	34.94	46.00	-11.06
223.45	30.12	QP	267	1.9	V	-11.62	18.50	46.00	-27.50
4874.00	51.76	PK	252	1.1	V	-0.62	51.14	74.00	-22.86
4874.00	42.32	Ave	252	1.1	V	-0.62	41.70	54.00	-12.30
7311.00	44.71	PK	217	1.1	H	2.21	46.92	74.00	-27.08
7311.00	44.61	Ave	217	1.1	H	2.21	46.82	54.00	-7.18
2322.81	46.37	PK	117	1.9	V	-13.19	33.18	74.00	-40.82
2322.81	39.38	Ave	117	1.9	V	-13.19	26.19	54.00	-27.81
2379.00	43.28	PK	219	1.6	H	-13.14	30.14	74.00	-43.86
2379.00	36.22	Ave	219	1.6	H	-13.14	23.08	54.00	-30.92
2491.95	43.47	PK	124	1.8	V	-13.08	30.39	74.00	-43.61
2491.95	36.75	Ave	124	1.8	V	-13.08	23.67	54.00	-30.33

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11b: High Channel 2462MHz									
223.45	46.67	QP	9	1.5	H	-11.62	35.05	46.00	-10.95
223.45	29.62	QP	13	1.0	V	-11.62	18.00	46.00	-28.00
4924.00	52.44	PK	242	1.8	V	-0.24	52.20	74.00	-21.80
4924.00	40.95	Ave	242	1.8	V	-0.24	40.71	54.00	-13.29
7386.00	43.48	PK	300	1.9	H	2.84	46.32	74.00	-27.68
7386.00	45.94	Ave	300	1.9	H	2.84	48.78	54.00	-5.22
2323.78	45.49	PK	26	1.4	V	-13.19	32.30	74.00	-41.70
2323.78	38.36	Ave	26	1.4	V	-13.19	25.17	54.00	-28.83
2369.99	43.77	PK	255	1.6	H	-13.14	30.63	74.00	-43.37
2369.99	37.02	Ave	255	1.6	H	-13.14	23.88	54.00	-30.12
2485.77	43.73	PK	255	1.6	V	-13.08	30.65	74.00	-43.35
2485.77	37.89	Ave	255	1.6	V	-13.08	24.81	54.00	-29.19

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Low Channel 2412MHz									
223.45	46.32	QP	62	1.5	H	-11.62	34.70	46.00	-11.30
223.45	30.46	QP	51	1.5	V	-11.62	18.84	46.00	-27.16
4824.00	53.67	PK	124	1.8	V	-1.06	52.61	74.00	-21.39
4824.00	41.11	Ave	124	1.8	V	-1.06	40.05	54.00	-13.95
7236.00	43.36	PK	153	1.2	H	1.33	44.69	74.00	-29.31
7236.00	45.83	Ave	153	1.2	H	1.33	47.16	54.00	-6.84
2327.32	46.48	PK	39	1.8	V	-13.19	33.29	74.00	-40.71
2327.32	37.47	Ave	39	1.8	V	-13.19	24.28	54.00	-29.72
2360.72	44.17	PK	35	1.9	H	-13.14	31.03	74.00	-42.97
2360.72	36.12	Ave	35	1.9	H	-13.14	22.98	54.00	-31.02
2485.36	43.25	PK	148	1.5	V	-13.08	30.17	74.00	-43.83
2485.36	37.73	Ave	148	1.5	V	-13.08	24.65	54.00	-29.35

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: Middle Channel 2437MHz									
223.45	46.87	QP	117	1.4	H	-11.62	35.25	46.00	-10.75
223.45	31.53	QP	57	1.7	V	-11.62	19.91	46.00	-26.09
4874.00	52.69	PK	312	1.7	V	-0.62	52.07	74.00	-21.93
4874.00	40.19	Ave	312	1.7	V	-0.62	39.57	54.00	-14.43
7311.00	43.74	PK	170	1.1	H	2.21	45.95	74.00	-28.05
7311.00	45.80	Ave	170	1.1	H	2.21	48.01	54.00	-5.99
2348.34	46.36	PK	50	1.6	V	-13.19	33.17	74.00	-40.83
2348.34	39.61	Ave	50	1.6	V	-13.19	26.42	54.00	-27.58
2376.72	42.75	PK	129	1.6	H	-13.14	29.61	74.00	-44.39
2376.72	38.64	Ave	129	1.6	H	-13.14	25.50	54.00	-28.50
2499.29	43.77	PK	334	1.2	V	-13.08	30.69	74.00	-43.31
2499.29	38.98	Ave	334	1.2	V	-13.08	25.90	54.00	-28.10

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11g: High Channel 2462MHz									
223.45	46.64	QP	111	1.9	H	-11.62	35.02	46.00	-10.98
223.45	31.12	QP	13	2.0	V	-11.62	19.50	46.00	-26.50
4924.00	53.07	PK	243	1.2	V	-0.24	52.83	74.00	-21.17
4924.00	38.95	Ave	243	1.2	V	-0.24	38.71	54.00	-15.29
7386.00	44.75	PK	267	1.4	H	2.84	47.59	74.00	-26.41
7386.00	45.21	Ave	267	1.4	H	2.84	48.05	54.00	-5.95
2331.56	46.07	PK	84	1.5	V	-13.19	32.88	74.00	-41.12
2331.56	38.58	Ave	84	1.5	V	-13.19	25.39	54.00	-28.61
2371.39	44.33	PK	113	1.6	H	-13.14	31.19	74.00	-42.81
2371.39	36.31	Ave	113	1.6	H	-13.14	23.17	54.00	-30.83
2491.63	43.35	PK	277	1.3	V	-13.08	30.27	74.00	-43.73
2491.63	37.45	Ave	277	1.3	V	-13.08	24.37	54.00	-29.63

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11n HT20: Low Channel 2412MHz									
223.45	46.47	QP	197	1.8	H	-11.62	34.85	46.00	-11.15
223.45	29.99	QP	331	1.8	V	-11.62	18.37	46.00	-27.63
4824.00	53.04	PK	45	1.1	V	-1.06	51.98	74.00	-22.02
4824.00	37.79	Ave	45	1.1	V	-1.06	36.73	54.00	-17.27
7236.00	44.87	PK	57	1.1	H	1.33	46.20	74.00	-27.80
7236.00	43.78	Ave	57	1.1	H	1.33	45.11	54.00	-8.89
2335.98	46.53	PK	120	1.9	V	-13.19	33.34	74.00	-40.66
2335.98	38.97	Ave	120	1.9	V	-13.19	25.78	54.00	-28.22
2359.12	44.31	PK	319	1.7	H	-13.14	31.17	74.00	-42.83
2359.12	38.62	Ave	319	1.7	H	-13.14	25.48	54.00	-28.52
2495.87	44.23	PK	358	1.8	V	-13.08	31.15	74.00	-42.85
2495.87	37.48	Ave	358	1.8	V	-13.08	24.40	54.00	-29.60

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11n HT20: Middle Channel 2437MHz									
223.45	47.36	QP	331	1.3	H	-11.62	35.74	46.00	-10.26
223.45	28.84	QP	95	1.7	V	-11.62	17.22	46.00	-28.78
4874.00	51.67	PK	340	1.3	V	-0.62	51.05	74.00	-22.95
4874.00	37.65	Ave	340	1.3	V	-0.62	37.03	54.00	-16.97
7311.00	45.31	PK	249	2.0	H	2.21	47.52	74.00	-26.48
7311.00	43.01	Ave	249	2.0	H	2.21	45.22	54.00	-8.78
2328.74	45.26	PK	300	1.5	V	-13.19	32.07	74.00	-41.93
2328.74	39.49	Ave	300	1.5	V	-13.19	26.30	54.00	-27.70
2367.66	42.62	PK	94	1.1	H	-13.14	29.48	74.00	-44.52
2367.66	38.04	Ave	94	1.1	H	-13.14	24.90	54.00	-29.10
2489.47	42.60	PK	138	1.4	V	-13.08	29.52	74.00	-44.48
2489.47	38.30	Ave	138	1.4	V	-13.08	25.22	54.00	-28.78

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
11n HT20: High Channel 2462MHz									
223.45	46.30	QP	14	1.4	H	-11.62	34.68	46.00	-11.32
223.45	30.24	QP	214	1.9	V	-11.62	18.62	46.00	-27.38
4924.00	52.05	PK	270	1.9	V	-0.24	51.81	74.00	-22.19
4924.00	38.97	Ave	270	1.9	V	-0.24	38.73	54.00	-15.27
7386.00	46.36	PK	167	1.9	H	2.84	49.20	74.00	-24.80
7386.00	42.45	Ave	167	1.9	H	2.84	45.29	54.00	-8.71
2321.95	45.17	PK	228	1.8	V	-13.19	31.98	74.00	-42.02
2321.95	37.49	Ave	228	1.8	V	-13.19	24.30	54.00	-29.70
2386.29	42.36	PK	165	2.0	H	-13.14	29.22	74.00	-44.78
2386.29	38.02	Ave	165	2.0	H	-13.14	24.88	54.00	-29.12
2498.13	44.99	PK	36	1.6	V	-13.08	31.91	74.00	-42.09
2498.13	38.85	Ave	36	1.6	V	-13.08	25.77	54.00	-28.23

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

BLE:**Test Frequency: 30MHz ~ 8GHz**

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Low Channel 2402MHz									
269.33	35.79	QP	91	1.6	H	-13.35	22.44	46.00	-23.56
269.33	38.59	QP	99	1.7	V	-13.35	25.24	46.00	-20.76
4804.00	43.46	PK	254	1.5	V	-1.06	42.40	74.00	-31.60
4804.00	43.85	Ave	254	1.5	V	-1.06	42.79	54.00	-11.21
7206.00	46.12	PK	305	1.0	H	1.33	47.45	74.00	-26.55
7206.00	34.90	Ave	305	1.0	H	1.33	36.23	54.00	-17.77
2336.21	46.08	PK	36	1.2	V	-13.19	32.89	74.00	-41.11
2336.21	39.02	Ave	36	1.2	V	-13.19	25.83	54.00	-28.17
2376.24	43.25	PK	256	1.9	H	-13.14	30.11	74.00	-43.89
2376.24	37.20	Ave	256	1.9	H	-13.14	24.06	54.00	-29.94
2484.32	42.53	PK	282	1.4	V	-13.08	29.45	74.00	-44.55
2484.32	38.75	Ave	282	1.4	V	-13.08	25.67	54.00	-28.33

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK Middle Channel 2440MHz									
269.33	36.27	QP	100	1.9	H	-13.35	22.92	46.00	-23.08
269.33	37.57	QP	74	1.3	V	-13.35	24.22	46.00	-21.78
4880.00	43.46	PK	208	1.7	V	-0.62	42.84	74.00	-31.16
4880.00	43.92	Ave	208	1.7	V	-0.62	43.30	54.00	-10.70
7320.00	45.55	PK	304	1.5	H	2.21	47.76	74.00	-26.24
7320.00	35.13	Ave	304	1.5	H	2.21	37.34	54.00	-16.66
2312.03	46.28	PK	108	1.2	V	-13.19	33.09	74.00	-40.91
2312.03	38.52	Ave	108	1.2	V	-13.19	25.33	54.00	-28.67
2371.90	44.99	PK	241	1.2	H	-13.14	31.85	74.00	-42.15
2371.90	38.16	Ave	241	1.2	H	-13.14	25.02	54.00	-28.98
2488.13	43.86	PK	321	1.4	V	-13.08	30.78	74.00	-43.22
2488.13	38.56	Ave	321	1.4	V	-13.08	25.48	54.00	-28.52

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	Limit	Margin
				Height	Polar				
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
GFSK High Channel 2480MHz									
269.33	34.84	QP	84	1.0	H	-13.35	21.49	46.00	-24.51
269.33	38.46	QP	357	1.7	V	-13.35	25.11	46.00	-20.89
4960.00	44.62	PK	353	1.5	V	-0.24	44.38	74.00	-29.62
4960.00	43.39	Ave	353	1.5	V	-0.24	43.15	54.00	-10.85
7440.00	44.37	PK	119	1.1	H	2.84	47.21	74.00	-26.79
7440.00	36.29	Ave	119	1.1	H	2.84	39.13	54.00	-14.87
2328.15	46.98	PK	147	1.7	V	-13.19	33.79	74.00	-40.21
2328.15	39.78	Ave	147	1.7	V	-13.19	26.59	54.00	-27.41
2358.65	43.16	PK	82	1.4	H	-13.14	30.02	74.00	-43.98
2358.65	36.70	Ave	82	1.4	H	-13.14	23.56	54.00	-30.44
2484.69	42.17	PK	144	1.4	V	-13.08	29.09	74.00	-44.91
2484.69	36.20	Ave	144	1.4	V	-13.08	23.12	54.00	-30.88

Test Frequency: 8GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

9 Duty Cycle


Type of Modulation	On time ms	Period ms	Duty Cycle linear	Duty Cycle %	Duty Cycle Factor(dB)	Average Factor(dB)
GFSK	1000	1000	1.0	100	0	0
802.11b	12.44	12.60	0.99	98.73	0.06	-0.11
802.11g	2.0400	2.1960	0.93	92.90	0.32	-0.64
802.11n-HT20	1.8960	2.0640	0.92	91.86	0.37	-0.74

Remark:


Duty cycle=On Time/period;

Duty cycle factor= $10 \cdot \log(1/\text{Duty cycle})$;


Average factor= $20 \log_{10} \text{Duty cycle}$

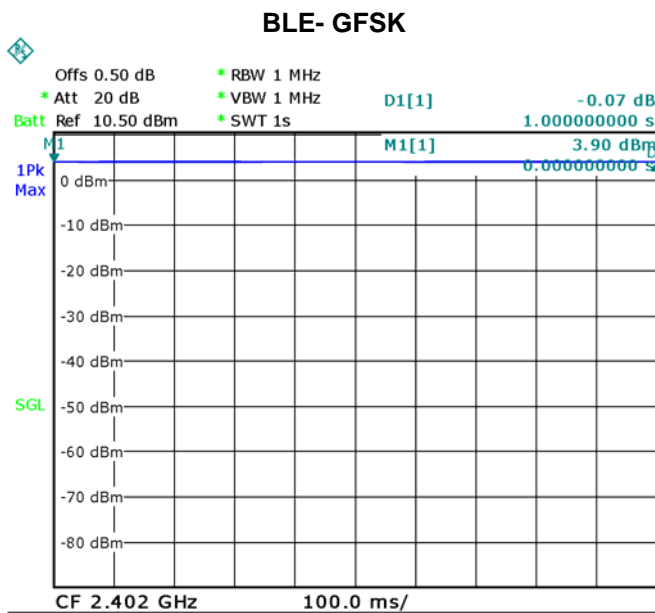


Wi-Fi 802.11b

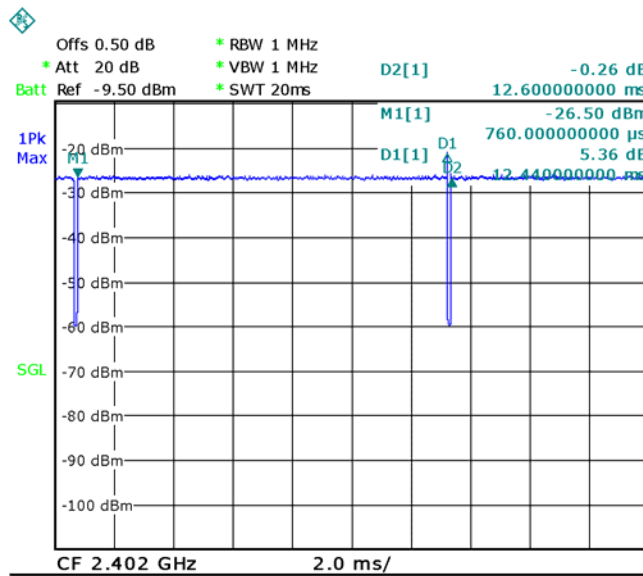

Wi-Fi 802.11g

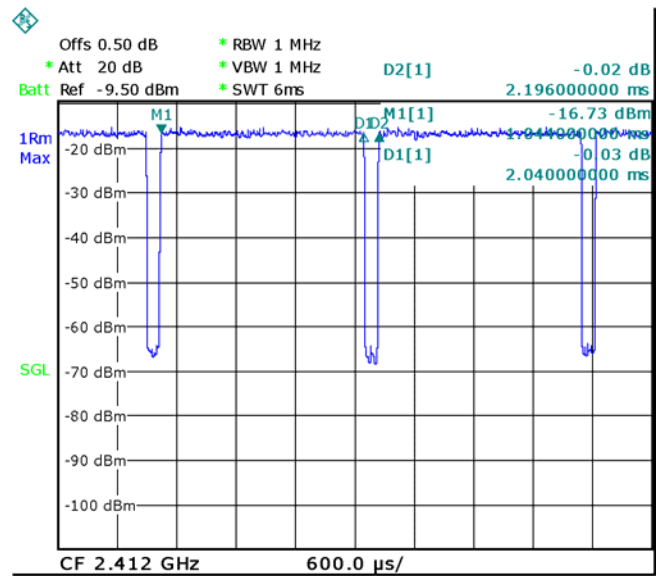

Wi-Fi 802.11n-HT20

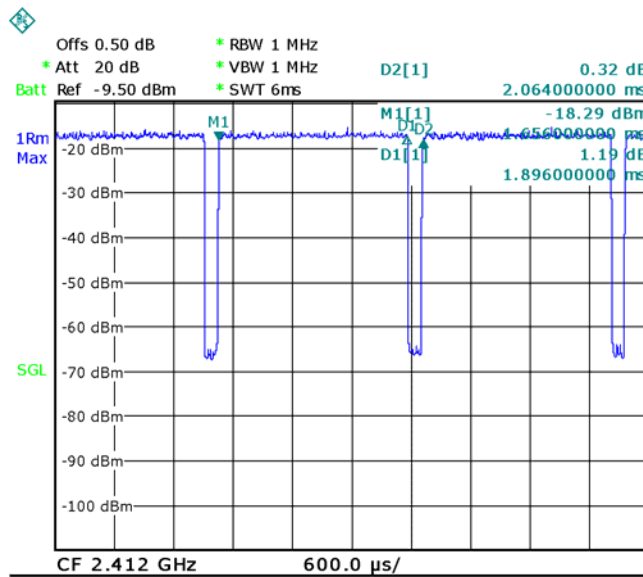

10 Band Edge Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
ANSI C63.10:2013

Test Limit: Regulation 15.247 (d), In any 100 kHz bandwidth outside the frequency band which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Mode: Transmitting

10.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

10.2 Test Result


Test result plots shown as follows:

Wi-Fi


TX 11b: Band edge-left side

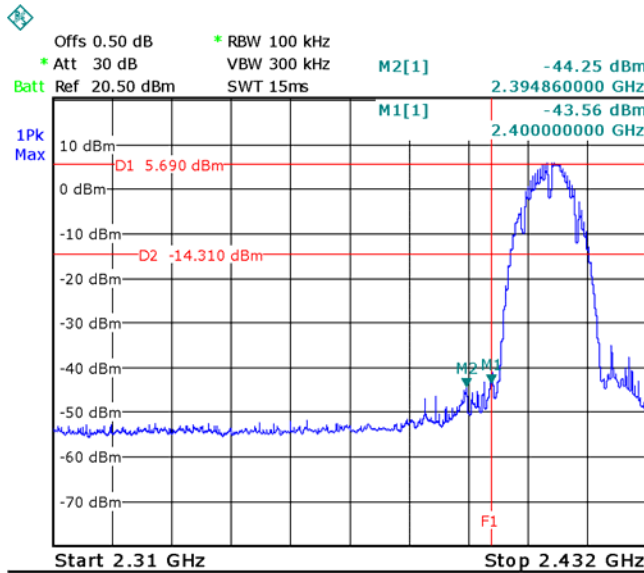


TX 11b: Band edge-right side

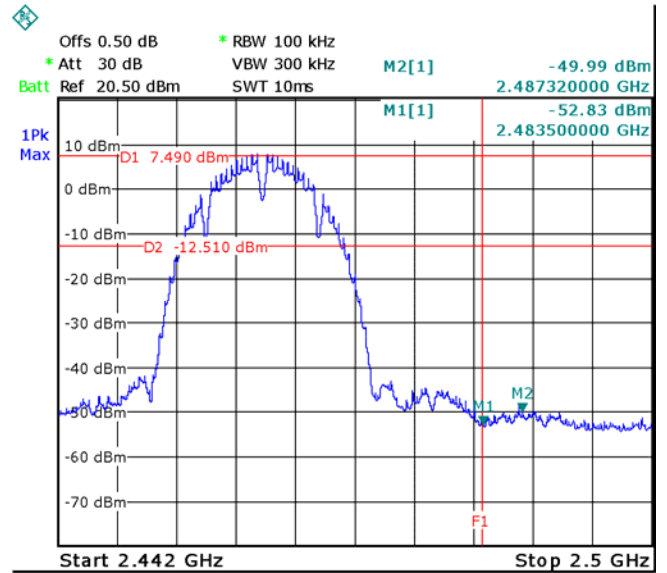


TX 11g: Band edge-left side

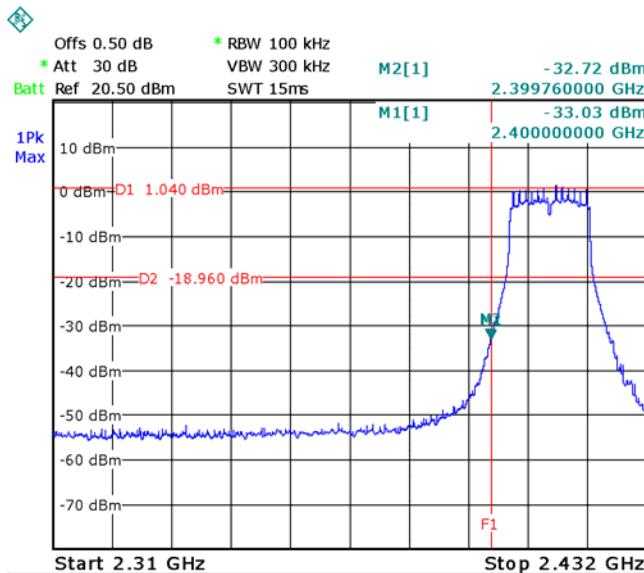


TX 11g: Band edge-right side

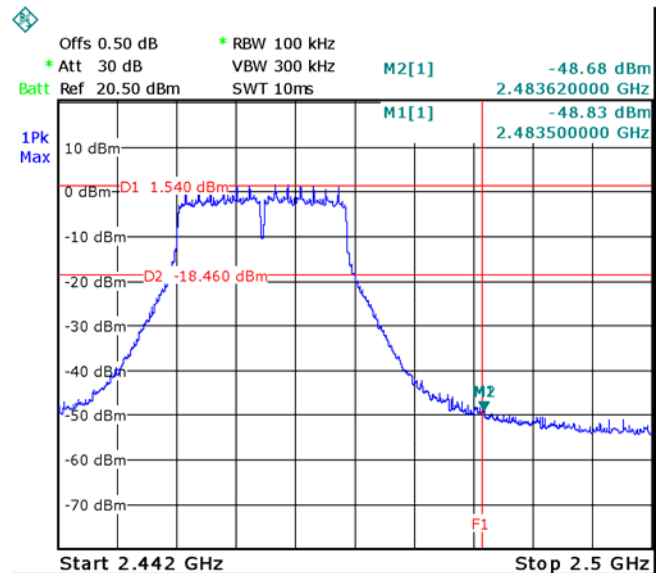

TX 11n HT20: Band edge-left side

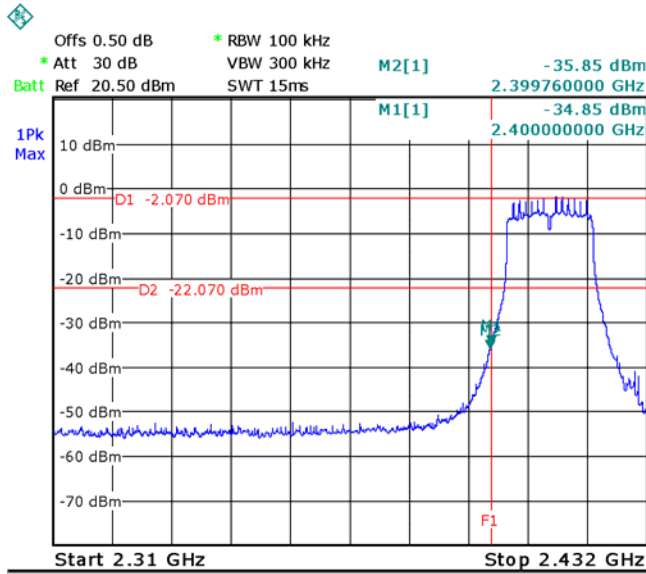


TX 11n HT20: Band edge-right side

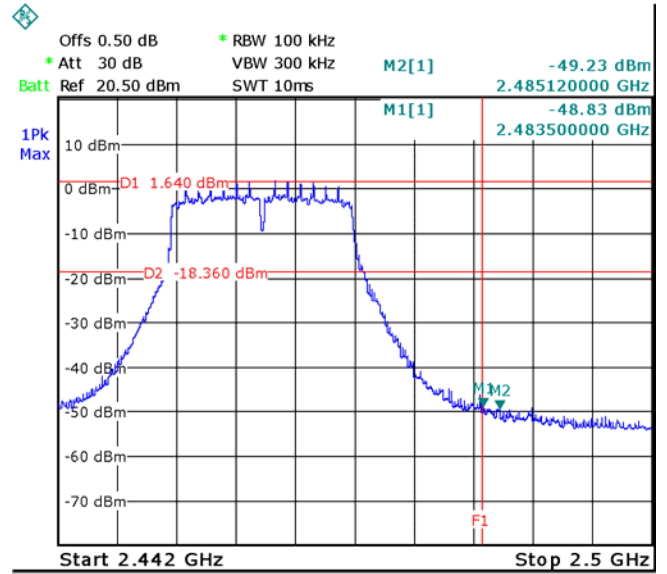


BLE

BLE: Band edge-left side

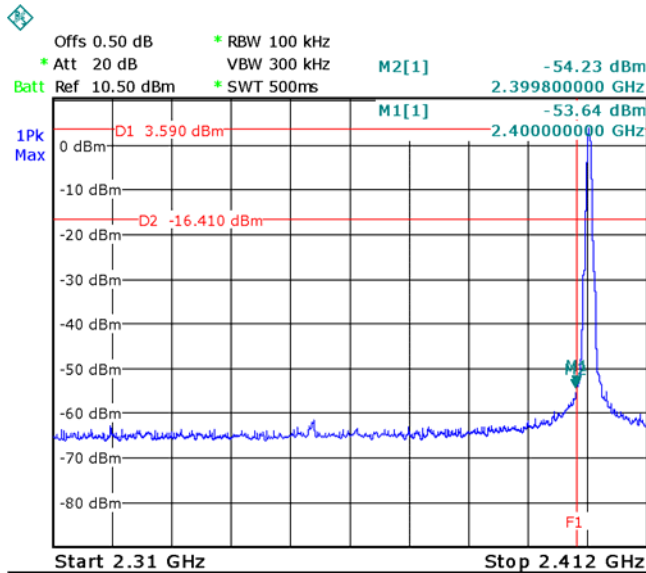

BLE: Band edge-right side

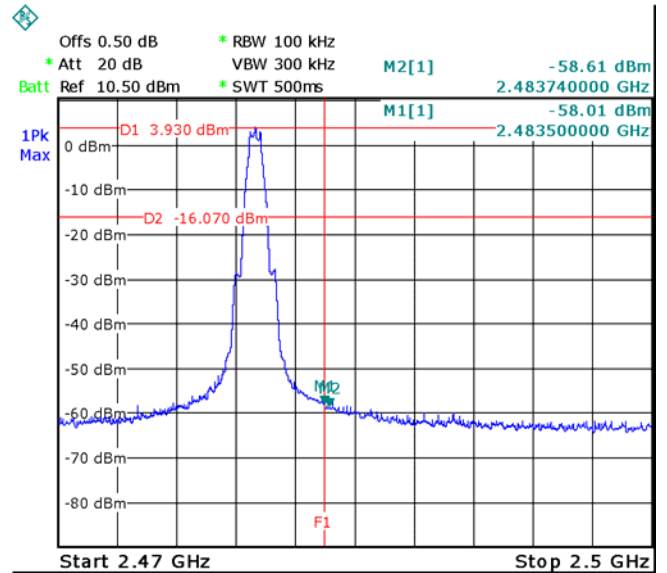

11 6 dB Bandwidth and 99% Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;

ANSI C63.10:2013

11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

11.2 Test Result:

Operation mode	Test Channel	6dB Bandwidth (MHz)	99% Bandwidth (MHz)
TX 11b	Channel 1	9.070	13.796
	Channel 6	9.102	13.796
	Channel 11	9.006	13.796
TX 11g	Channel 1	16.367	17.066
	Channel 6	16.467	16.916
	Channel 11	16.417	17.016
TX 11n HT20	Channel 1	17.407	18.054
	Channel 6	17.623	18.108
	Channel 11	17.407	18.108
BLE	Channel 0	0.664	1.024
	Channel 19	0.658	1.030
	Channel 39	0.652	1.036



Test result plot:

Wi-Fi



6 dB Bandwidth

99% Bandwidth

Mode: TX 11b channel 1

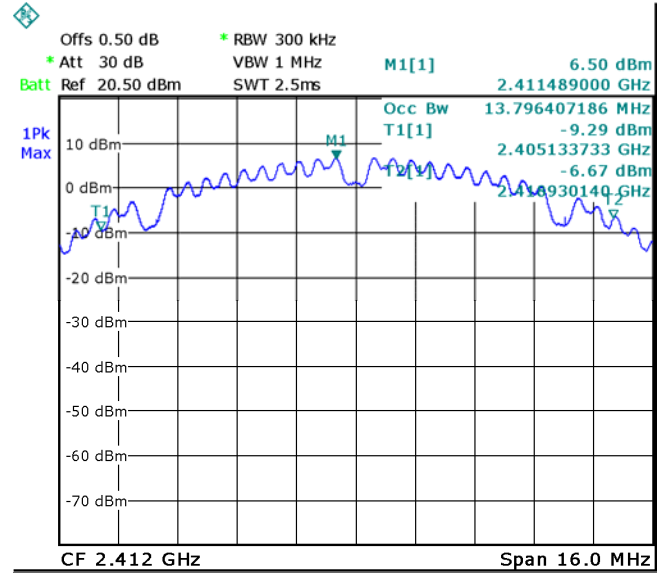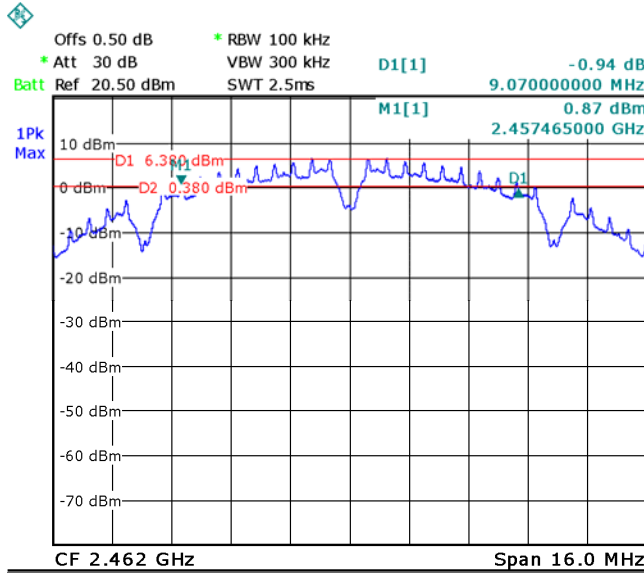



Mode: TX 11b channel 6

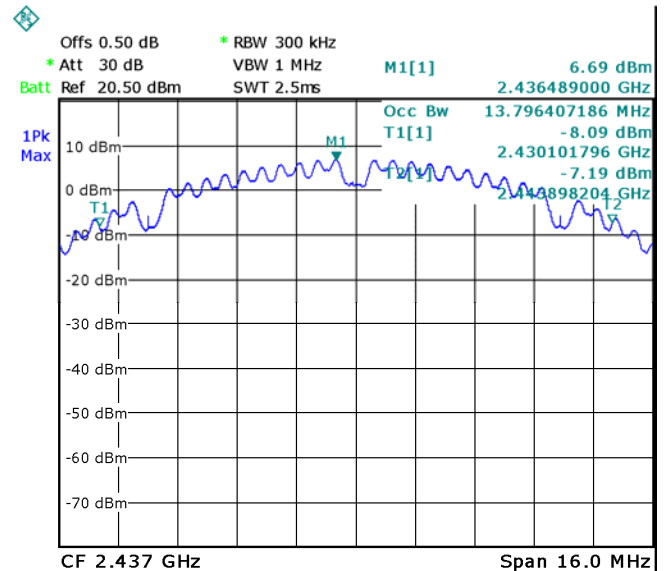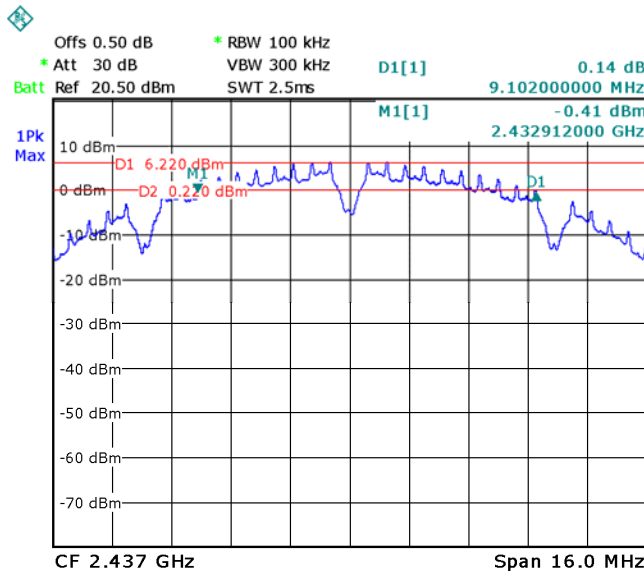



6 dB Bandwidth

99% Bandwidth

Mode: TX 11b channel 11

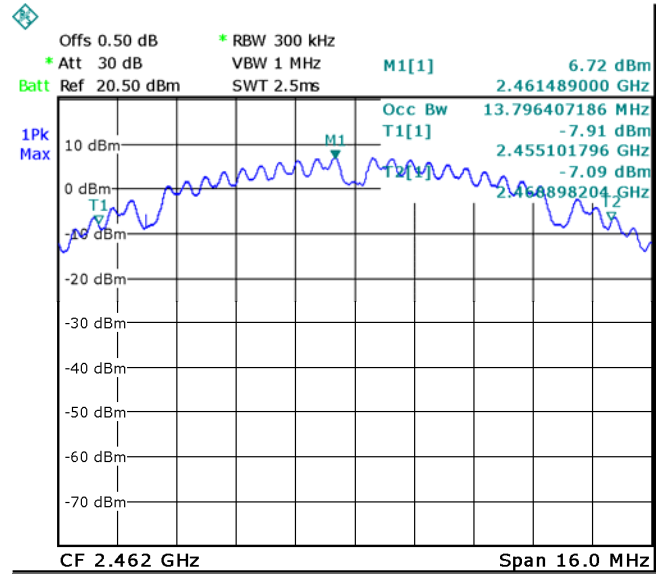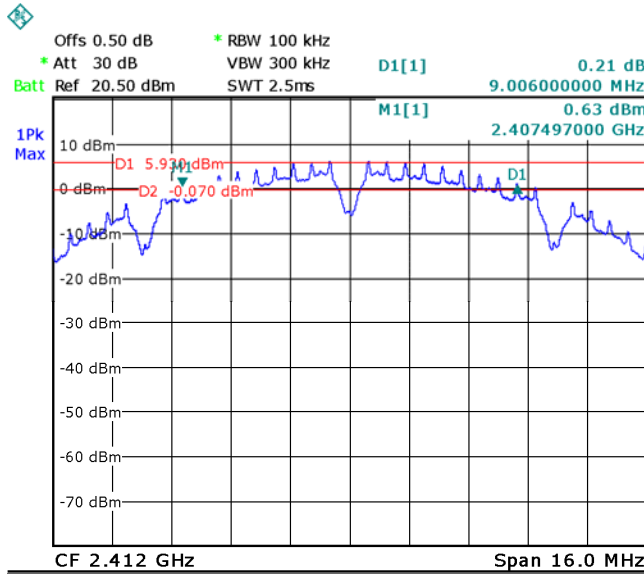



Mode: TX 11g channel 1

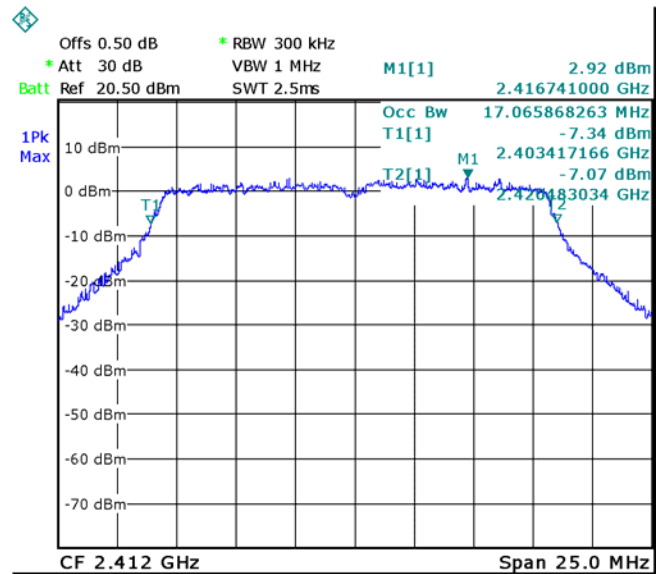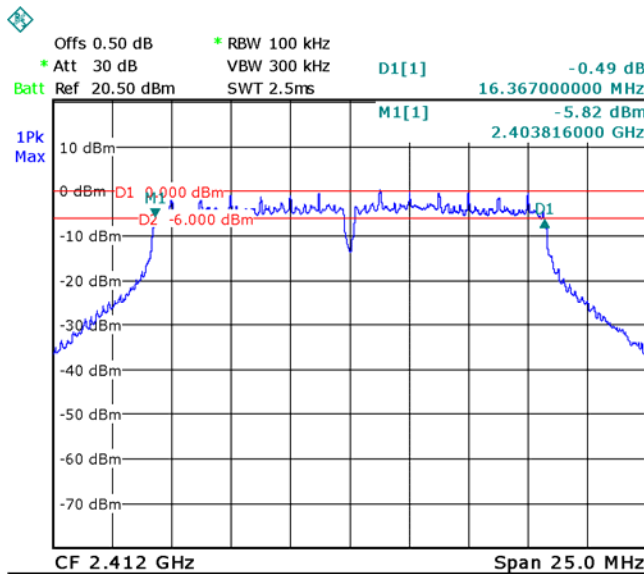



6 dB Bandwidth

99% Bandwidth

Mode: TX 11g channel 6

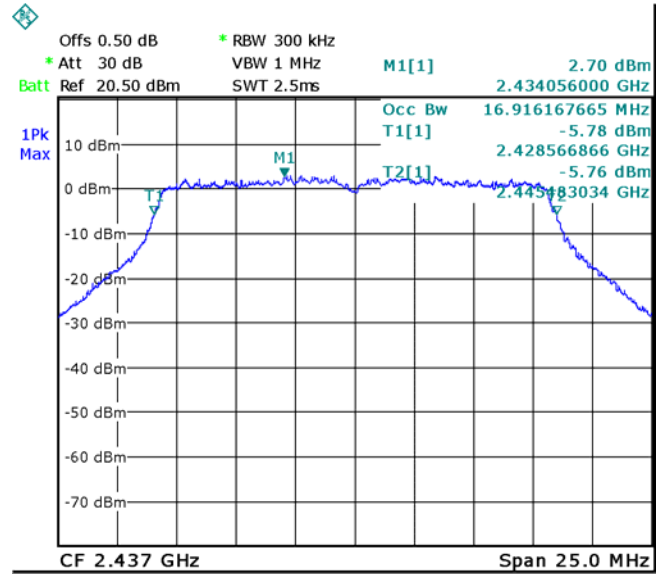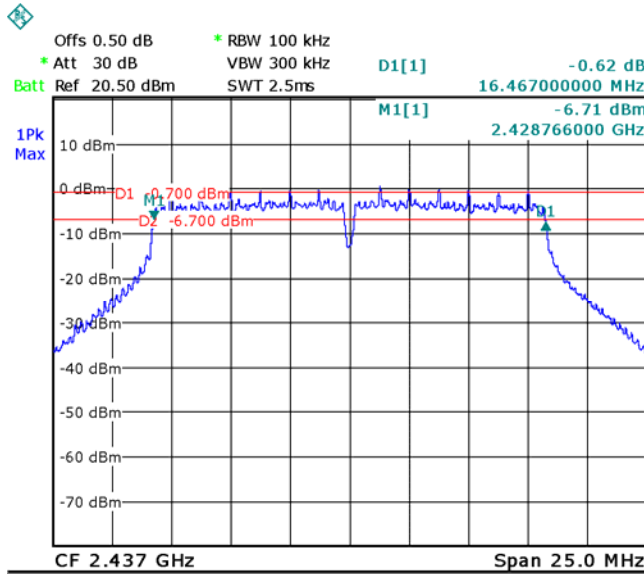



Mode: TX 11g channel 11

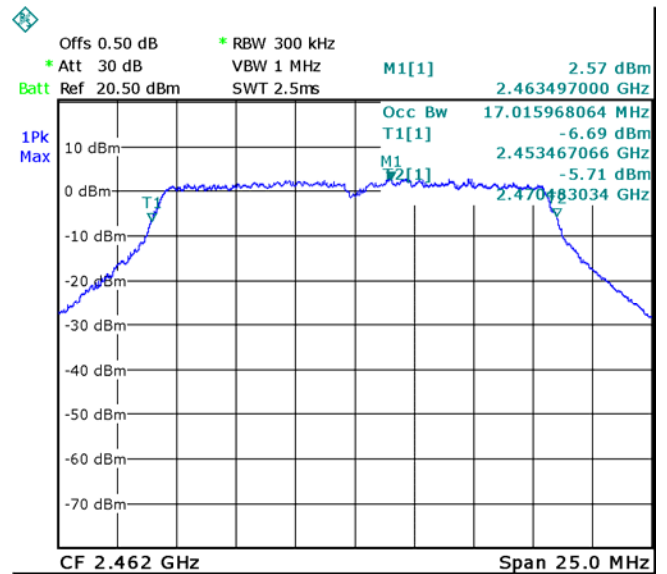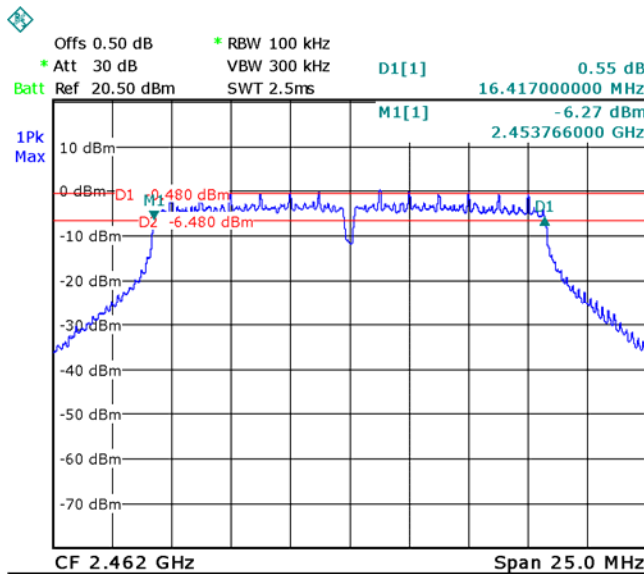



6 dB Bandwidth

99% Bandwidth

Mode: TX 11n HT20 channel 1

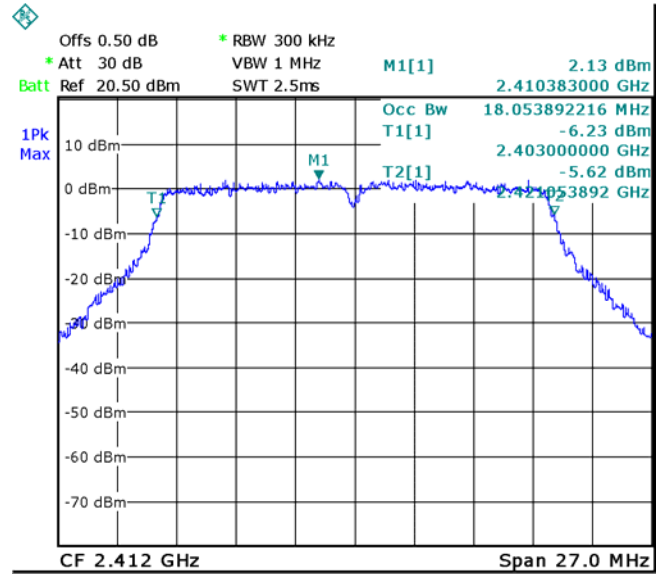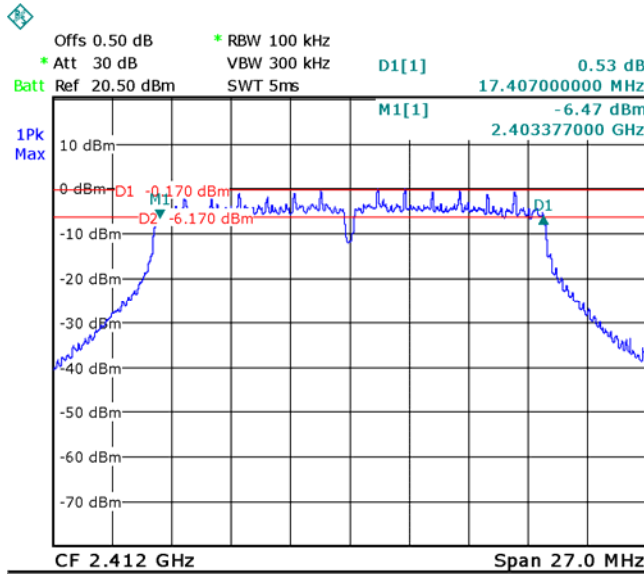



Mode: TX 11n HT20 channel 3

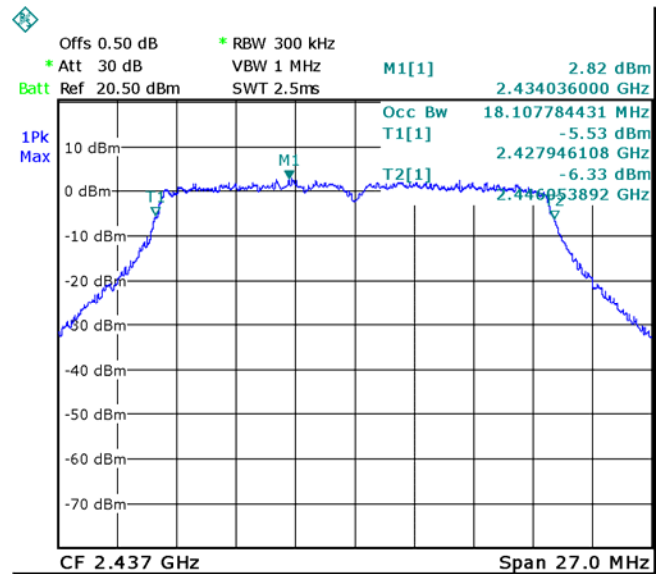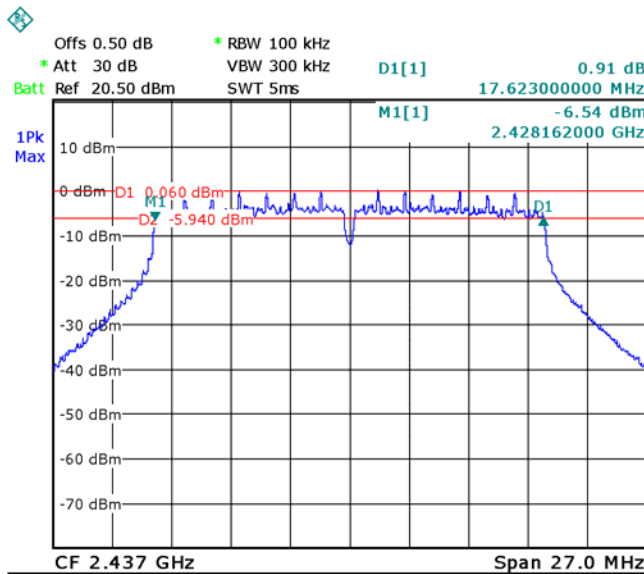

6 dB Bandwidth

99% Bandwidth

Mode: TX 11n HT20 channel 11

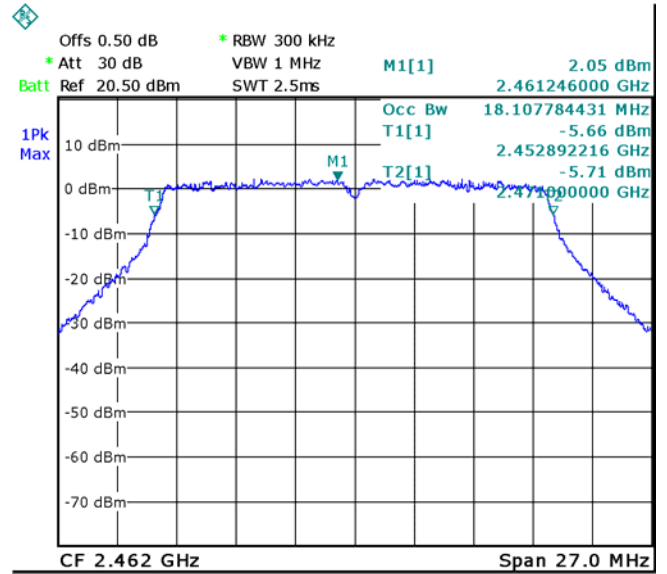
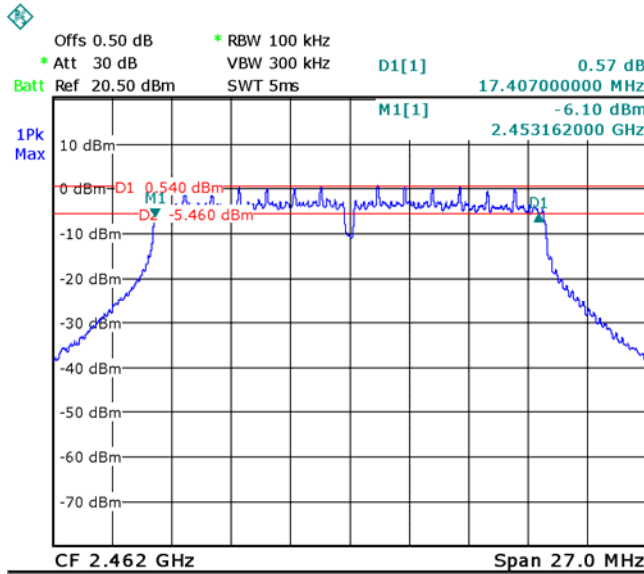


BLE

6 dB Bandwidth

99% Bandwidth



Mode: TX GFSK channel 0

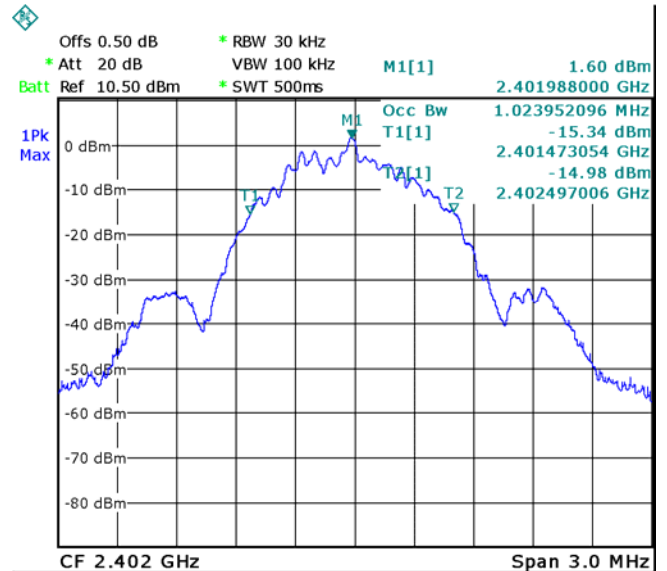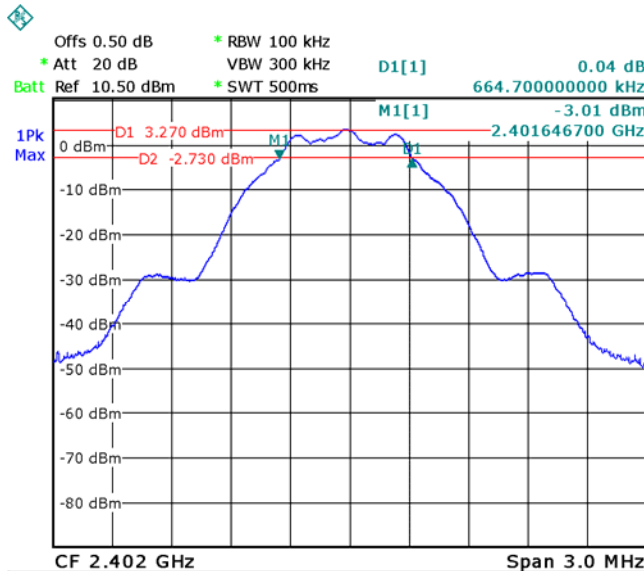



6 dB Bandwidth

99% Bandwidth

Mode: TX GFSK channel 19

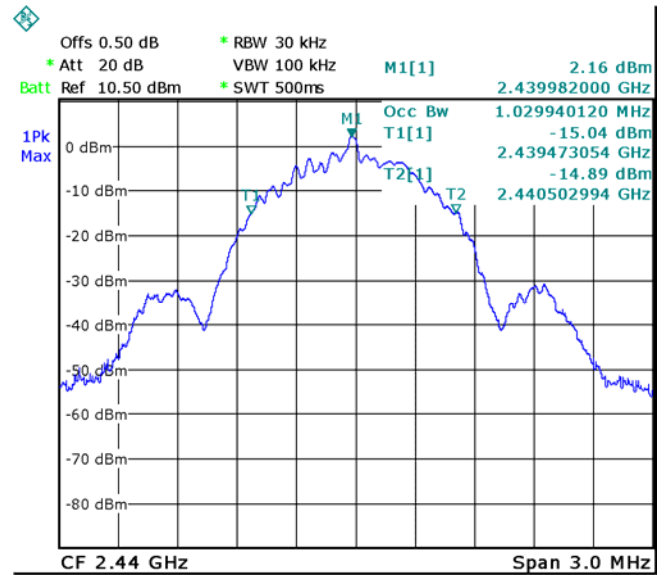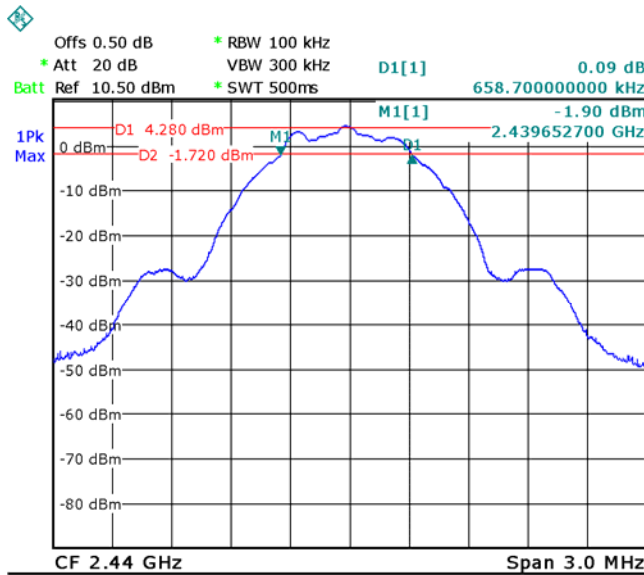

Mode: TX GFSK channel 39

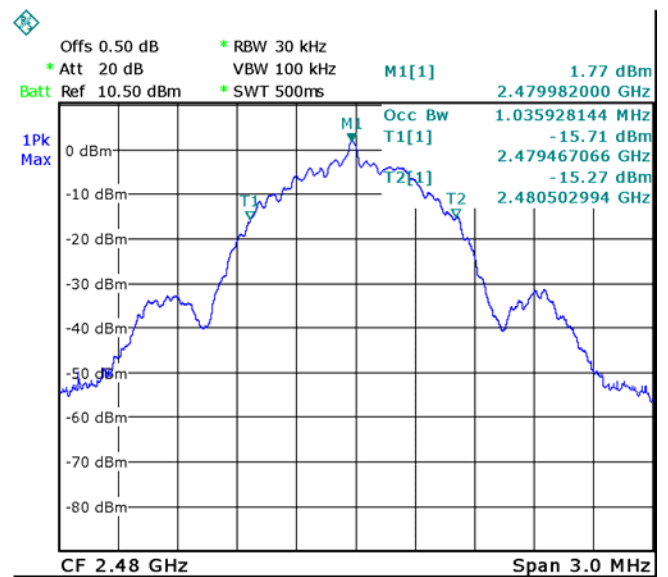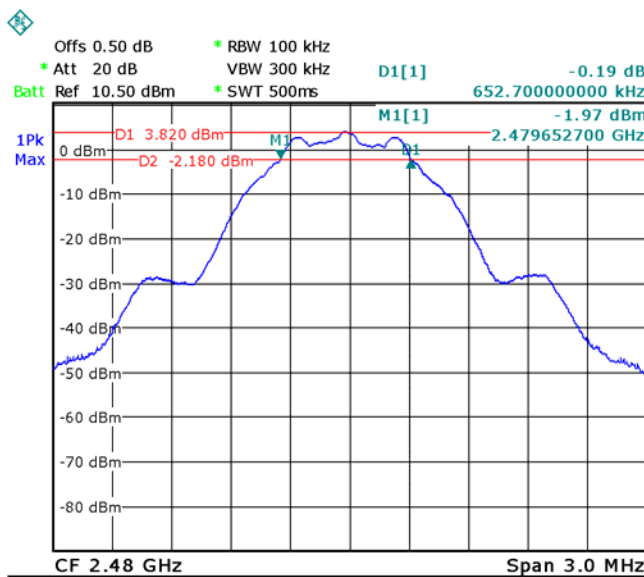

12 Maximum Peak conducted Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
ANSI C63.10:2013

12.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019

section 8.3.1.1 (For BLE)

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW \geq DTS bandwidth.
- b) Set VBW ≥ 3 RBW.
- c) Set span $\geq 3 \times$ RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

section 8.3.1.2 (For WIFI)

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- a) Set the RBW = 1% to 5% of the OBW, not to exceed 1 MHz..
- b) Set the VBW $\geq 3 \times$ RBW
- c) Set the span $\geq 1.5 \times$ OBW.
- d) Detector = RMS.
- e) Sweep time = auto couple.
- f) trigger = free run.
- g) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$. (This gives bin-to-bin spacing $\geq \text{RBW} / 2$, so that narrowband signals are not lost between frequency bins.)
- h) Trace average at least 100 traces in power averaging (rms) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.


12.2 Test Result:

Operation mode	Channel Frequency (MHz)	Maximum Peak Output Power (dBm)	Limit
TX 11b	Low-2412	17.72	1W/30dBm
	Middle-2437	17.94	1W/30dBm
	High-2462	17.85	1W/30dBm
TX 11g	Low-2412	15.96	1W/30dBm
	Middle-2437	16.19	1W/30dBm
	High-2462	16.33	1W/30dBm
TX 11n HT20	Low-2412	15.61	1W/30dBm
	Middle-2437	16.30	1W/30dBm
	High-2462	16.13	1W/30dBm
BLE	Low-2402	3.70	1W/30dBm
	Middle-2440	4.34	1W/30dBm
	High-2480	4.02	1W/30dBm


Test Plot:

Wi-Fi


Mode: TX 11b channel 1

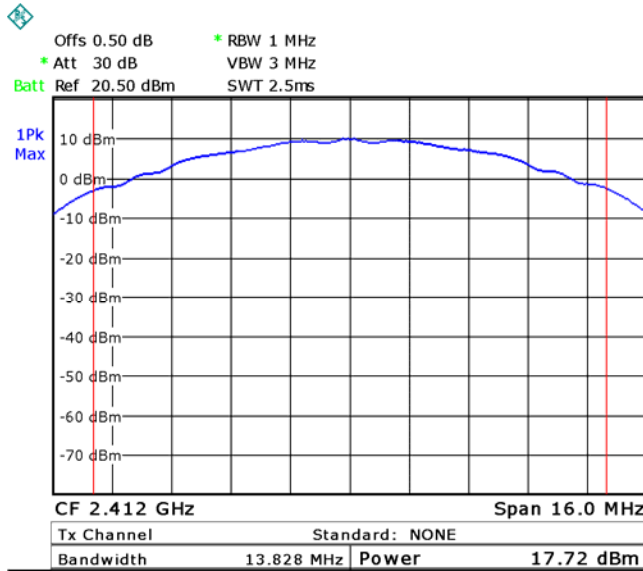


Mode: TX 11b channel 6

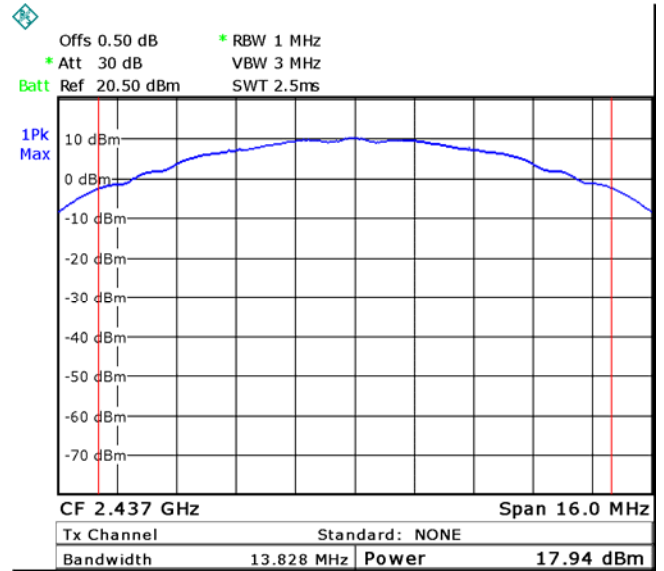


Mode: TX 11b channel 11

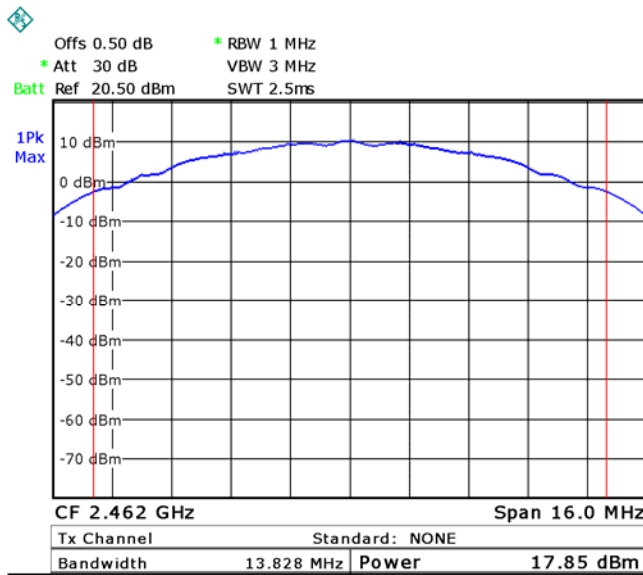


Mode: TX 11g channel 1

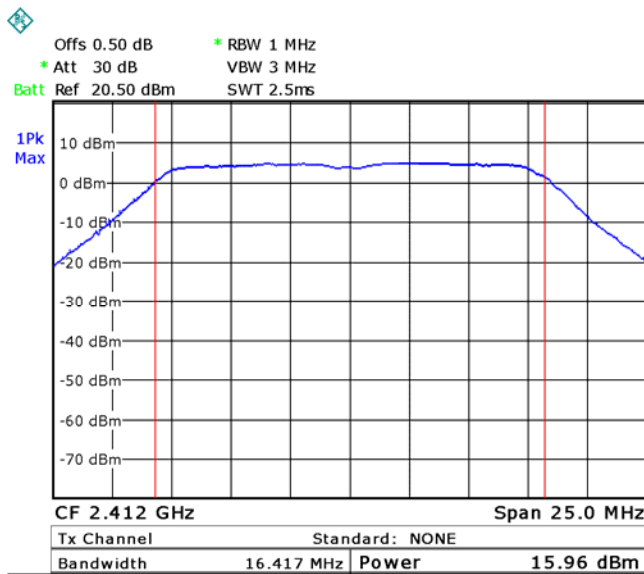


Mode: TX 11g channel 6

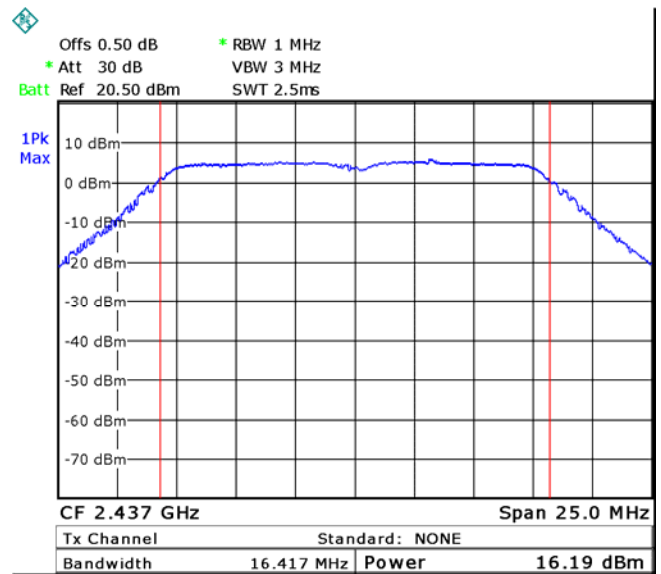


Mode: TX 11g channel 11

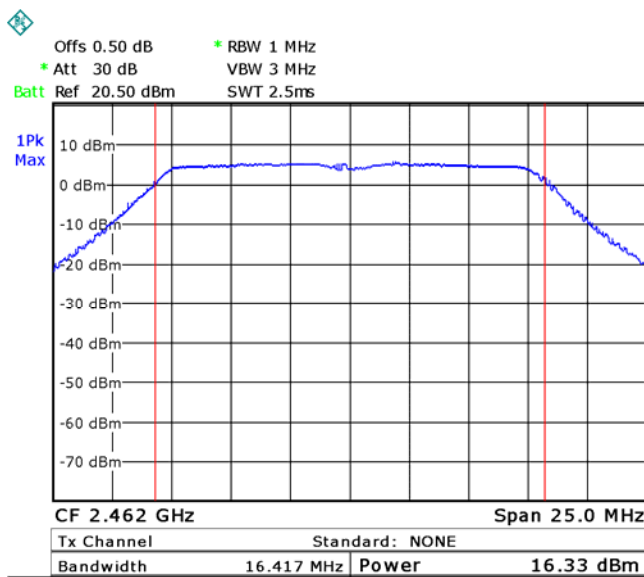


Mode: TX 11n HT20 channel 1

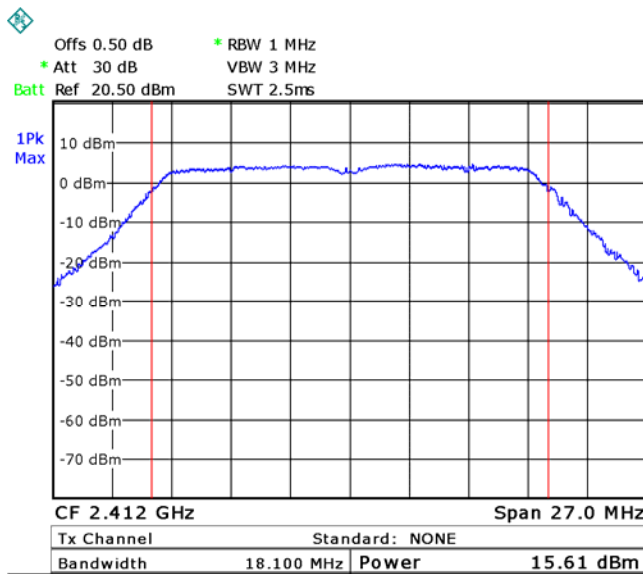

Mode: TX 11n HT20 channel 6

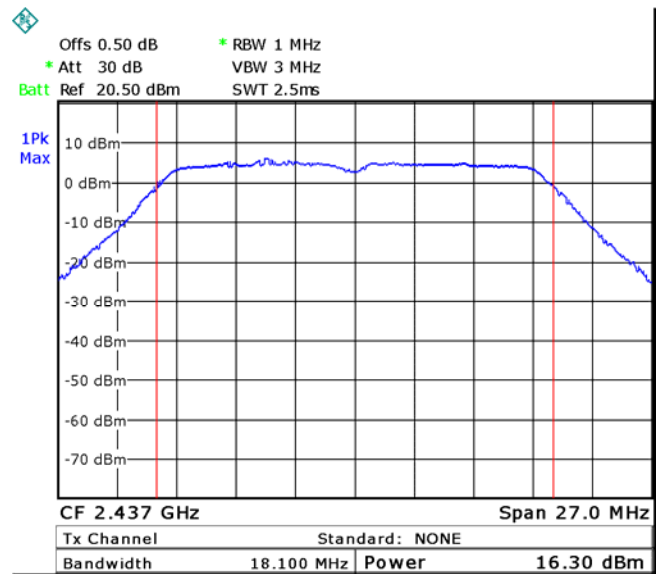


Mode: TX 11n HT20 channel 11

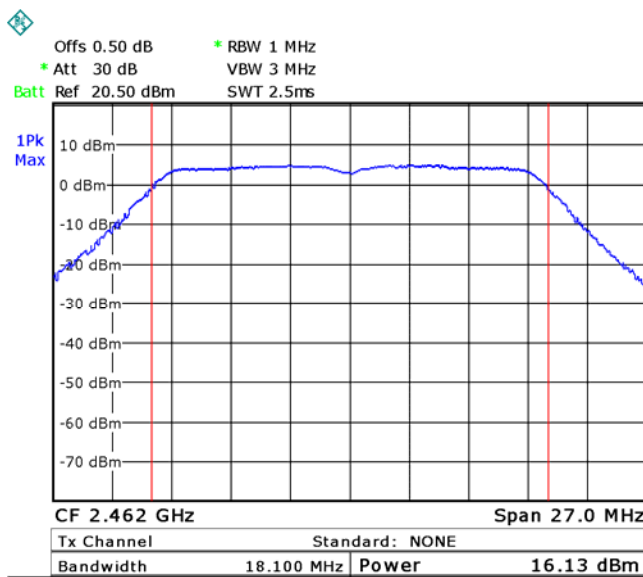


BLE


Mode: TX GFSK channel 0

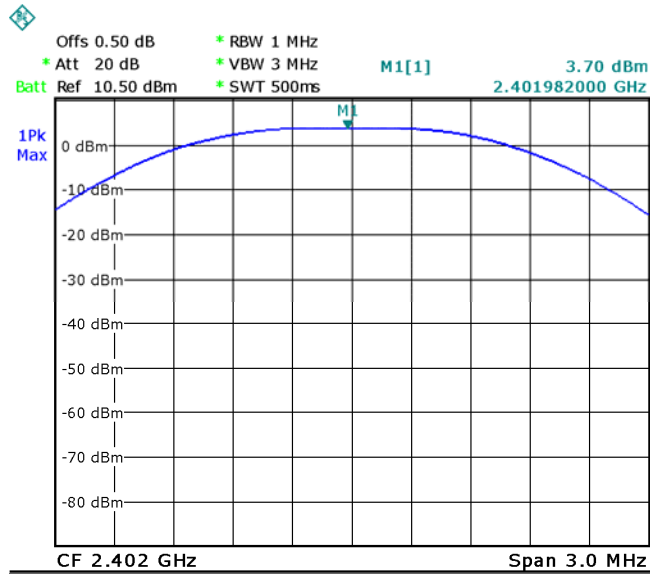

Mode: TX GFSK channel 19

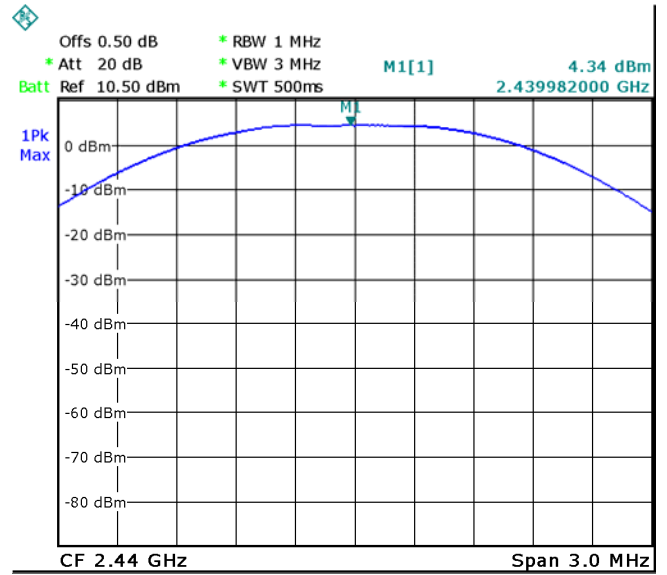

Mode: TX GFSK channel 39

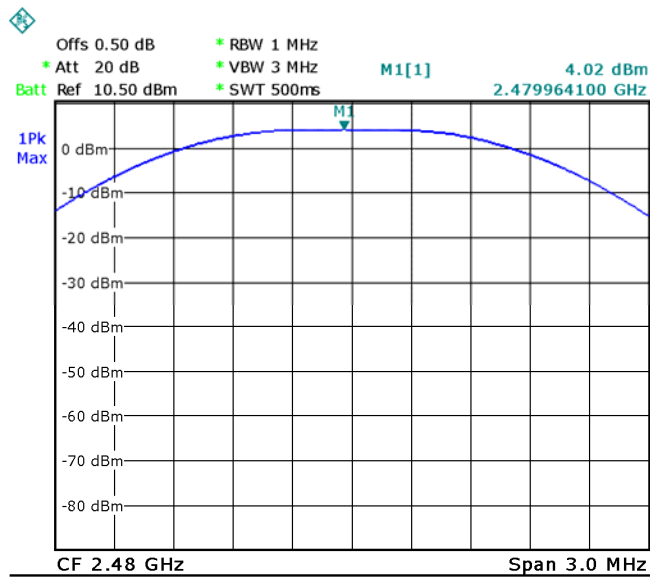

13 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019;
ANSI C63.10:2013

13.1 Test Procedure:

KDB 558074 D01 15.247 Meas Guidance v05r02, April 2, 2019 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


13.2 Test Result:

Operation mode	Channel Frequency (MHz)	Power Spectral (dBm per 3kHz)	Limit
TX 11b	Low-2412	-8.02	8dBm per 3kHz
	Middle-2437	-7.50	8dBm per 3kHz
	High-2462	-7.36	8dBm per 3kHz
TX 11g	Low-2412	-15.02	8dBm per 3kHz
	Middle-2437	-14.53	8dBm per 3kHz
	High-2462	-13.23	8dBm per 3kHz
TX 11n HT20	Low-2412	-15.06	8dBm per 3kHz
	Middle-2437	-13.97	8dBm per 3kHz
	High-2462	-13.77	8dBm per 3kHz
BLE	Low-2402	-10.89	8dBm per 3kHz
	Middle-2440	-11.19	8dBm per 3kHz
	High-2480	-11.83	8dBm per 3kHz


Test Plot:

Wi-Fi


Mode: TX 11b channel 1

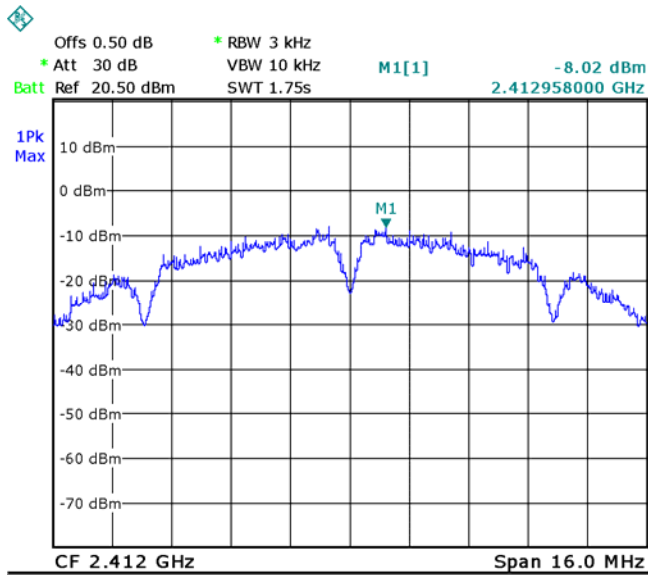


Mode: TX 11b channel 6

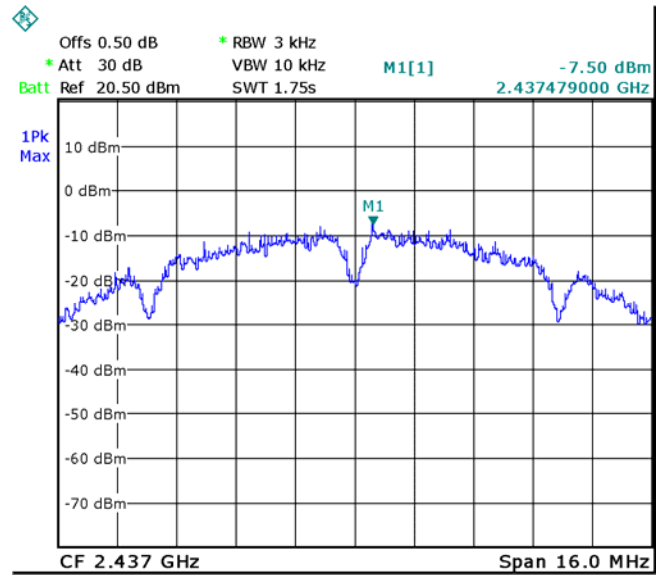


Mode: TX 11b channel 11

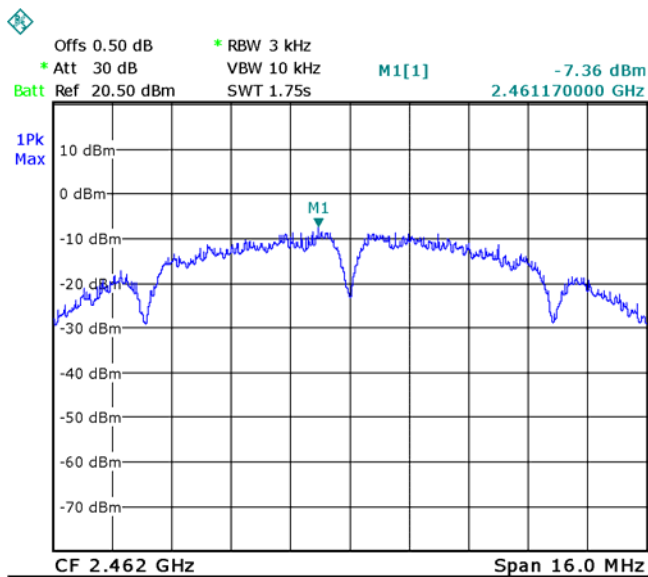


Mode: TX 11g channel 1

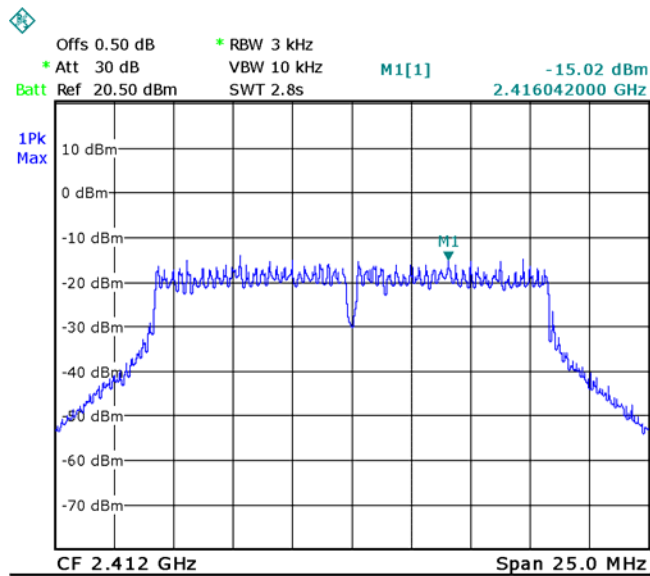


Mode: TX 11g channel 6

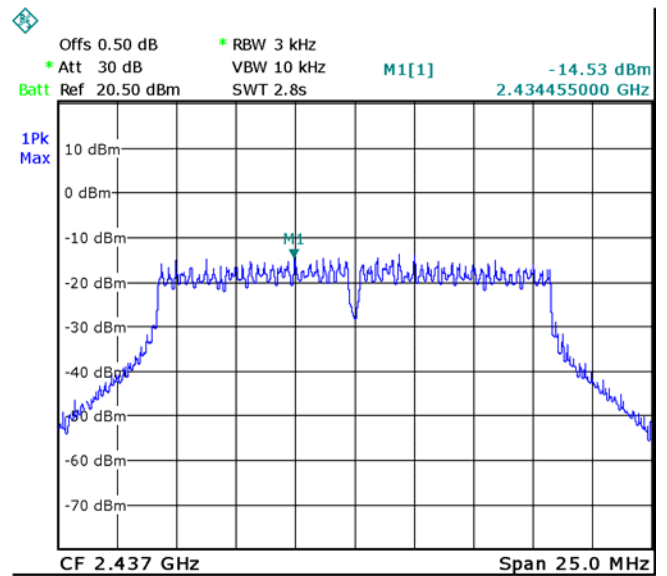


Mode: TX 11g channel 11

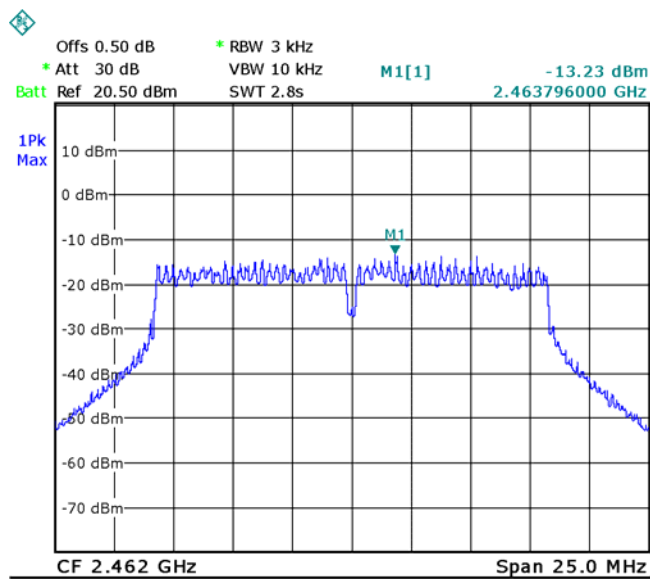


Mode: TX 11n HT20 channel 1

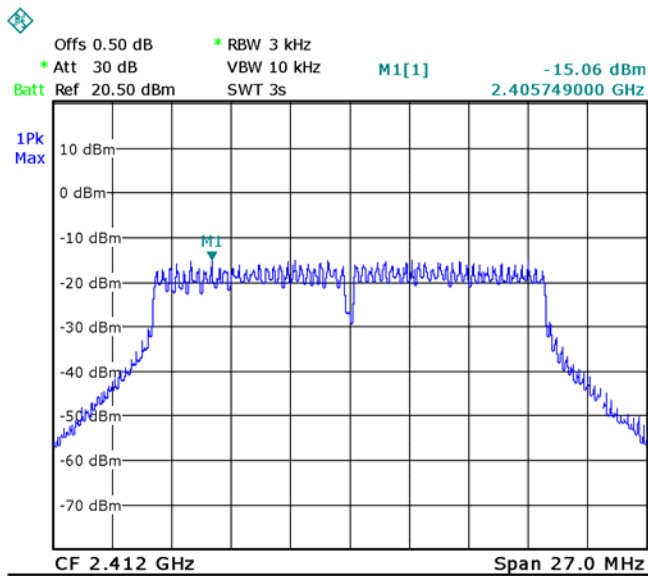

Mode: TX 11n HT20 channel 6

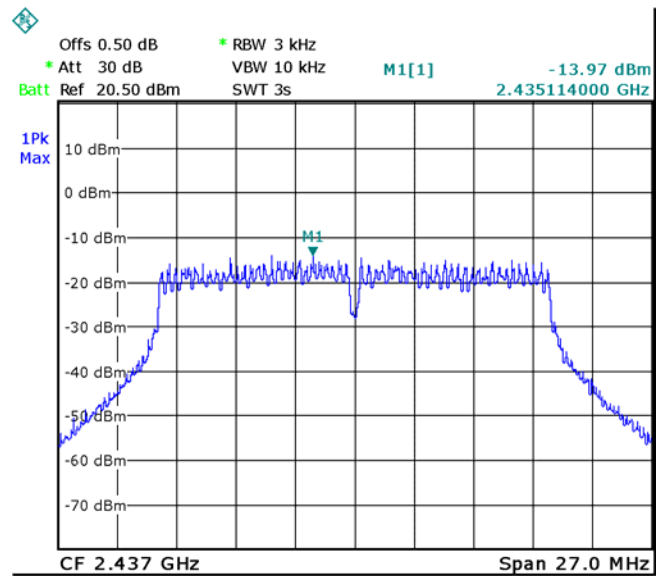


Mode: TX 11n HT20 channel 11

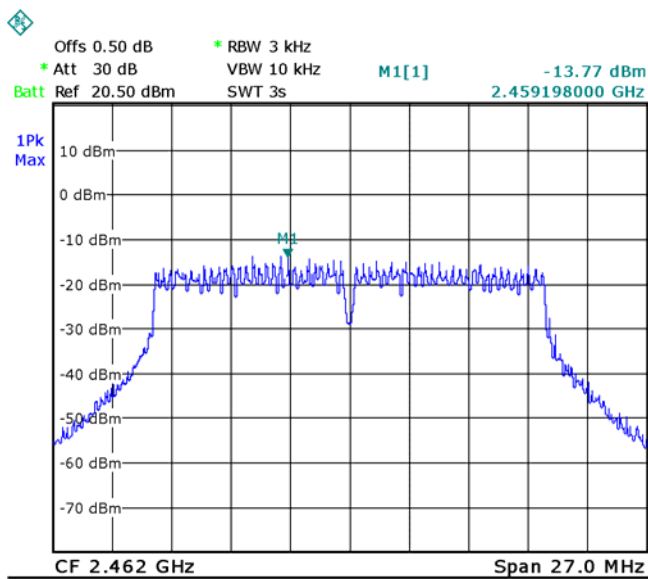


BLE


Mode: TX GFSK channel 0

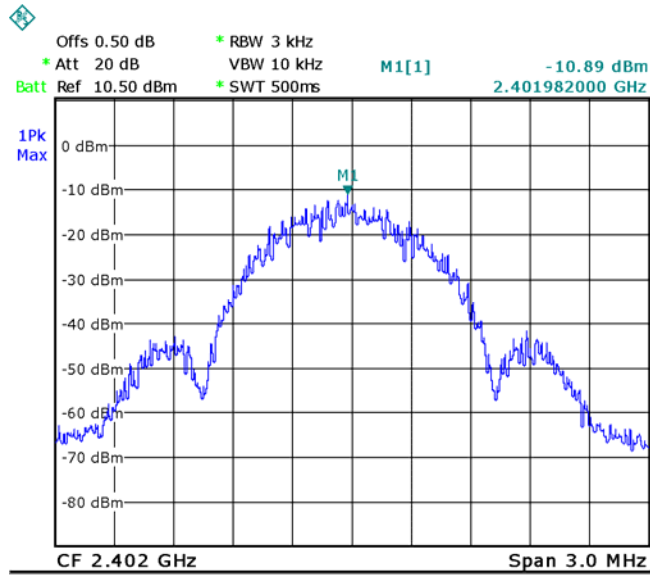

Mode: TX GFSK channel 19

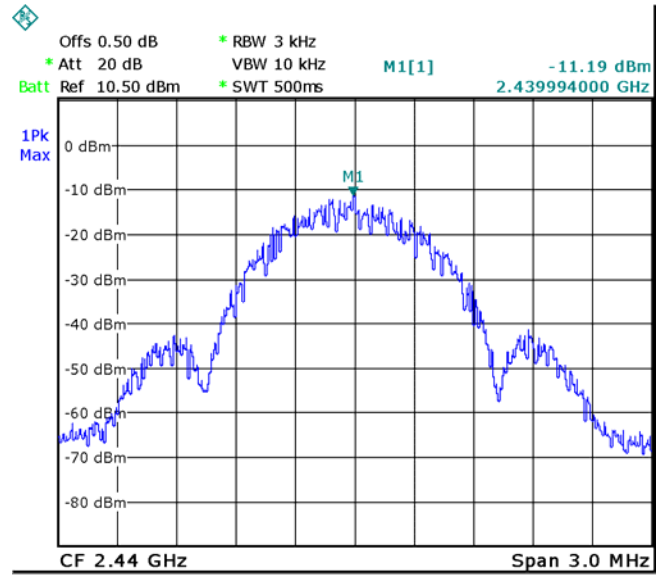

Mode: TX GFSK channel 39

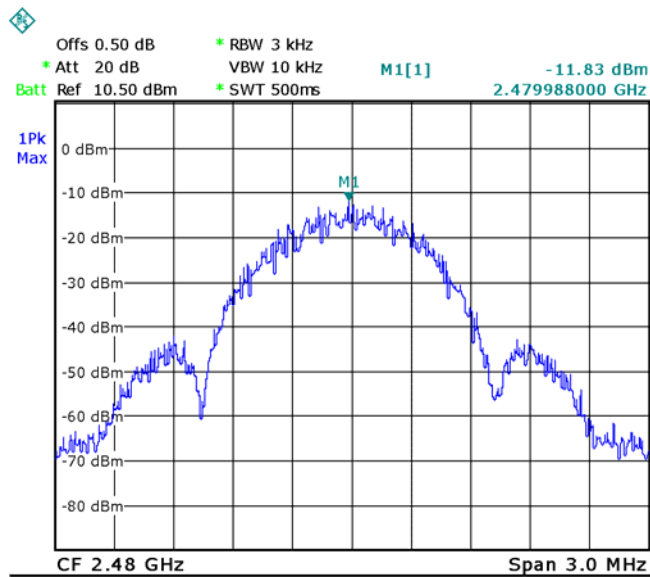

14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has an integrated antenna fulfil the requirement of this section.

Note: Please refer to EUT photos for more details.

15 RF Exposure

Note: Please refer to RF Exposure Report: WTD21D07074074W002.

16 Photographs of test setup and EUT.

Note: Please refer to appendix: Appendix-H6002-Photos.

=====**End of Report**=====