

TEST REPORT

Applicant Name : Shenzhen Intellirocks Tech. Co., Ltd.
Address : No.2901-2904, 3002, Block C, Section 1, Chuangzhi Yuncheng Building, Liuxian Avenue, Xili Community, Xili Street, Nanshan District, Shenzhen, Guangdong, China
Report Number : SZNS211220-65747E-RF-00
FCC ID: 2AQA6-H7150

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Govee Smart Dehumidifier
Model No.: H7150
Multiple Model(s) No.: N/A
Trade Mark: N/A
Date Received: 2021/12/20
Date of Test: 2021/12/30~2022/01/13
Report Date: 2022/01/20

| | |
|--------------|-------|
| Test Result: | Pass* |
|--------------|-------|

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:



Ting Lü
EMC Engineer

Approved By:



Robert Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "*" .

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "**". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

| | |
|--|-----------|
| GENERAL INFORMATION | 4 |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 4 |
| OBJECTIVE | 4 |
| TEST METHODOLOGY | 4 |
| MEASUREMENT UNCERTAINTY..... | 5 |
| SYSTEM TEST CONFIGURATION | 6 |
| DESCRIPTION OF TEST CONFIGURATION | 6 |
| EQUIPMENT MODIFICATIONS | 7 |
| EUT EXERCISE SOFTWARE | 7 |
| DUTY CYCLE | 7 |
| SUPPORT EQUIPMENT LIST AND DETAILS | 7 |
| EXTERNAL I/O CABLE..... | 7 |
| BLOCK DIAGRAM OF TEST SETUP | 8 |
| SUMMARY OF TEST RESULTS | 9 |
| TEST EQUIPMENT LIST | 10 |
| FCC §15.247 (I) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) | 12 |
| APPLICABLE STANDARD | 12 |
| RESULT | 12 |
| FCC §15.203 - ANTENNA REQUIREMENT | 13 |
| APPLICABLE STANDARD | 13 |
| ANTENNA CONNECTOR CONSTRUCTION | 13 |
| FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS | 14 |
| APPLICABLE STANDARD | 14 |
| EUT SETUP | 14 |
| EMI TEST RECEIVER SETUP..... | 14 |
| TEST PROCEDURE | 14 |
| TRANSD FACTOR & MARGIN CALCULATION..... | 15 |
| TEST DATA | 15 |
| FCC §15.209, §15.205 & §15.247(D) - SPURIOUS EMISSIONS | 18 |
| APPLICABLE STANDARD | 18 |
| EUT SETUP | 18 |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP | 19 |
| TEST PROCEDURE | 19 |
| FACTOR & MARGIN CALCULATION | 19 |
| TEST DATA | 19 |
| FCC §15.247(A) (2) – 6 DB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH | 28 |
| APPLICABLE STANDARD | 28 |
| TEST PROCEDURE | 28 |
| TEST DATA | 28 |
| FCC §15.247(B) (3) - MAXIMUM CONDUCTED OUTPUT POWER | 29 |
| APPLICABLE STANDARD | 29 |
| TEST PROCEDURE | 29 |
| TEST DATA | 29 |

FCC §15.247(D) – 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE30
 APPLICABLE STANDARD30
 TEST PROCEDURE30
 TEST DATA30

FCC §15.247(E) - POWER SPECTRAL DENSITY.....31
 APPLICABLE STANDARD31
 TEST PROCEDURE31
 TEST DATA31

APPENDIX WI-FI.....32
 APPENDIX A: DTS BANDWIDTH32
 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH36
 APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER40
 APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY41
 APPENDIX E: BAND EDGE MEASUREMENTS.....45
 APPENDIX F: DUTY CYCLE47

APPENDIX BLE.....48
 APPENDIX A: DTS BANDWIDTH48
 APPENDIX B: OCCUPIED CHANNEL BANDWIDTH50
 APPENDIX C: MAXIMUM CONDUCTED PEAK OUTPUT POWER.....52
 APPENDIX D: MAXIMUM POWER SPECTRAL DENSITY53
 APPENDIX E: BAND EDGE MEASUREMENTS.....55
 APPENDIX F: DUTY CYCLE56

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

| | |
|-------------------------------------|---|
| Frequency Range | BLE: 2402-2480MHz Wi-Fi: 2412-2462MHz |
| Maximum Conducted Peak Output Power | BLE: 5.74dBm Wi-Fi: 14.07dBm(802.11b), 13.22dBm(802.11g) 14.11dBm(802.11n20) |
| Modulation Technique | BLE: GFSK Wi-Fi: DSSS, OFDM |
| Antenna Specification* | 2.0 dBi (provided by the applicant) |
| Voltage Range | AC 120V 60Hz |
| Sample serial number | SZNS211220-65747E-RF-S1 for Conducted and Radiation Emissions SZNS211220-65747E-RF-S2 for RF Conducted Test (Assigned by ATC) |
| Sample/EUT Status | Good condition |

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission's rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

And KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

| Parameter | | Uncertainty |
|------------------------------------|-----------------|------------------------|
| Occupied Channel Bandwidth | | 5% |
| RF Frequency | | 0.082×10^{-7} |
| RF output power, conducted | | 0.73dB |
| Unwanted Emission, conducted | | 1.6dB |
| AC Power Lines Conducted Emissions | | 2.72dB |
| Emissions, Radiated | 9kHz - 30MHz | 2.66dB |
| | 30MHz - 1GHz | 4.28dB |
| | 1GHz - 18GHz | 4.98dB |
| | 18GHz - 26.5GHz | 5.06dB |
| | 26.5GHz - 40GHz | 4.72dB |
| Temperature | | 1°C |
| Humidity | | 6% |
| Supply voltages | | 0.4% |

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

For 802.11b, 802.11g, 802.11n-HT20 mode, total 11 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1 | 2412 | 8 | 2447 |
| 2 | 2417 | 9 | 2452 |
| 3 | 2422 | 10 | 2457 |
| 4 | 2427 | 11 | 2462 |
| 5 | 2432 | / | / |
| 6 | 2437 | / | / |
| 7 | 2442 | / | / |

802.11b, 802.11g and 802.11n-HT20 mode was tested with Channel 1, 6 and 11.

For BLE mode, 40 channels are provided to testing:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0 | 2402 | 20 | 2442 |
| 1 | 2404 | 21 | 2444 |
| 2 | 2406 | 22 | 2446 |
| 3 | 2408 | 23 | 2448 |
| 4 | 2410 | 24 | 2450 |
| 5 | 2412 | 25 | 2452 |
| 6 | 2414 | 26 | 2454 |
| 7 | 2416 | 27 | 2456 |
| 8 | 2418 | 28 | 2458 |
| 9 | 2420 | 29 | 2460 |
| 10 | 2422 | 30 | 2462 |
| 11 | 2424 | 31 | 2464 |
| 12 | 2426 | 32 | 2466 |
| 13 | 2428 | 33 | 2468 |
| 14 | 2430 | 34 | 2470 |
| 15 | 2432 | 35 | 2472 |
| 16 | 2434 | 36 | 2474 |
| 17 | 2436 | 37 | 2476 |
| 18 | 2438 | 38 | 2478 |
| 19 | 2440 | 39 | 2480 |

EUT was tested with Channel 0, 19 and 39.

Equipment Modifications

No modification was made to the EUT tested.

EUT Exercise Software

For BLE, “RTLBTAPP.exe”* software was used to test.

For Wi-Fi, “UI_mptool.exe”* software was used to test.

Power level as below:

| Mode | Data rate | Power Level* | | |
|--------------|-----------|--------------|----------------|--------------|
| | | Low Channel | Middle Channel | High Channel |
| 802.11b | 1Mbps | 63 | 63 | 63 |
| 802.11g | 6Mbps | 63 | 63 | 63 |
| 802.11n-HT20 | MCS0 | 63 | 63 | 63 |
| BLE 1M | 1Mbps | default | | |

The software and power level was provided by the applicant.

Duty cycle

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.

Support Equipment List and Details


| Manufacturer | Description | Model | Serial Number |
|--------------|-------------|-------|---------------|
| / | / | / | / |

External I/O Cable


| Cable Description | Length (m) | From Port | To |
|-------------------------------------|------------|-----------|------|
| Un-shielding Un-Detachable AC Cable | 1.7 | EUT | LISN |

Block Diagram of Test Setup

For conducted emission:

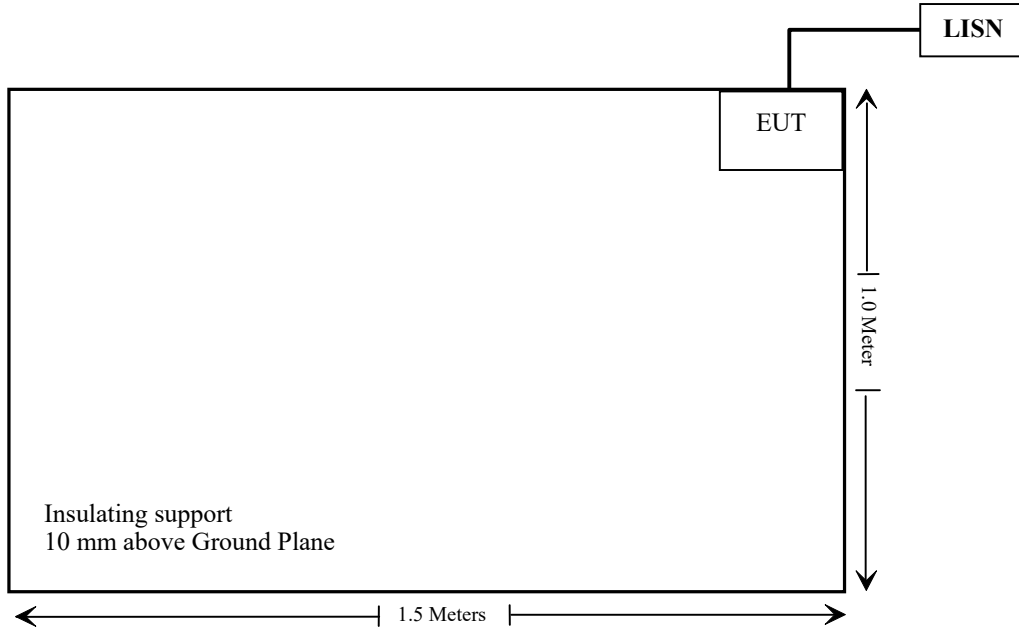

For radiated emission:

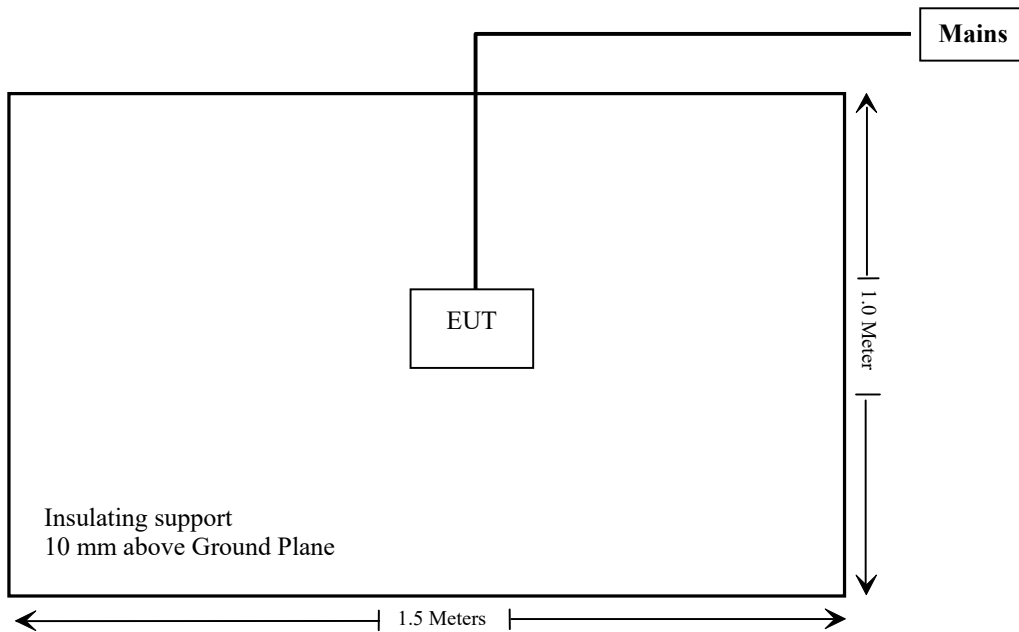

SUMMARY OF TEST RESULTS

| FCC Rules | Description of Test | Result |
|---------------------------------|--|---------------|
| §15.247 (i), §2.1091 | Maximum Permissible Exposure(MPE) | Compliant |
| §15.203 | Antenna Requirement | Compliant |
| §15.207 (a) | AC Line Conducted Emissions | Compliant |
| §15.205, §15.209, §15.247(d) | Spurious Emissions | Compliant |
| §15.247 (a)(2) | 6 dB Emission Bandwidth & Occupied Bandwidth | Compliant |
| §15.247(b)(3) | Maximum Conducted Output Power | Compliant |
| §15.247(d) | 100 kHz Bandwidth of Frequency Band Edge | Compliant |
| §15.247(e) | Power Spectral Density | Compliant |

TEST EQUIPMENT LIST

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|--|-------------------|-------------------|---------------|------------------|----------------------|
| Conducted Emissions Test | | | | | |
| Rohde& Schwarz | EMI Test Receiver | ESCI | 100784 | 2021/12/13 | 2022/12/12 |
| Rohde & Schwarz | L.I.S.N. | ENV216 | 101314 | 2021/12/13 | 2022/12/12 |
| Anritsu Corp | 50 Coaxial Switch | MP59B | 6100237248 | 2021/12/13 | 2022/12/12 |
| Unknown | RF Coaxial Cable | No.17 | N0350 | 2021/12/14 | 2022/12/13 |
| Conducted Emission Test Software: e3 19821b (V9) | | | | | |
| Radiated Emissions Test | | | | | |
| Rohde& Schwarz | Test Receiver | ESR | 102725 | 2021/12/13 | 2022/12/12 |
| Rohde&Schwarz | Spectrum Analyzer | FSV40 | 101949 | 2021/12/13 | 2022/12/12 |
| SONOMA INSTRUMENT | Amplifier | 310 N | 186131 | 2021/11/09 | 2022/11/08 |
| A.H. Systems, inc. | Preamplifier | PAM-0118P | 135 | 2021/11/09 | 2022/11/08 |
| Quinstar | Amplifier | QLW-18405536-J0 | 15964001002 | 2021/11/11 | 2022/11/10 |
| Schwarzbeck | Bilog Antenna | VULB9163 | 9163-323 | 2021/07/06 | 2024/07/05 |
| Schwarzbeck | Horn Antenna | BBHA9120D | 9120D-1067 | 2020/01/05 | 2023/01/04 |
| Schwarzbeck | HORN ANTENNA | BBHA9170 | 9170-359 | 2020/01/05 | 2023/01/04 |
| Radiated Emission Test Software: e3 19821b (V9) | | | | | |
| Unknown | RF Coaxial Cable | No.10 | N050 | 2021/12/14 | 2022/12/13 |
| Unknown | RF Coaxial Cable | No.11 | N1000 | 2021/12/14 | 2022/12/13 |
| Unknown | RF Coaxial Cable | No.12 | N040 | 2021/12/14 | 2022/12/13 |
| Unknown | RF Coaxial Cable | No.13 | N300 | 2021/12/14 | 2022/12/13 |
| Unknown | RF Coaxial Cable | No.14 | N800 | 2021/12/14 | 2022/12/13 |
| Unknown | RF Coaxial Cable | No.15 | N600 | 2021/12/14 | 2022/12/13 |
| Unknown | RF Coaxial Cable | No.16 | N650 | 2021/12/14 | 2022/12/13 |
| Wainwright | High Pass Filter | WHKX3.6/18 G-10SS | 5 | 2021/12/14 | 2022/12/13 |

| Manufacturer | Description | Model | Serial Number | Calibration Date | Calibration Due Date |
|-------------------|-------------------|----------|---------------|------------------|----------------------|
| RF Conducted Test | | | | | |
| Rohde & Schwarz | Spectrum Analyzer | FSV-40 | 101495 | 2021/12/13 | 2022/12/12 |
| Tonscend | RF Control Unit | JS0806-2 | 19G8060182 | 2021/07/06 | 2022/07/05 |

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.247 (i) & §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart 15.247 (i) and subpart 2.1091 systems operating under the provisions of this section shall be operated in a manner that ensures the public is not exposed to RF energy level in excess of the communication guidelines.

Limits for General Population/Uncontrolled Exposure

| Limits for General Population/Uncontrolled Exposure | | | | |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz) | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm ²) | Averaging Time (Minutes) |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |

f = frequency in MHz

* = Plane-wave equivalent power density

Result

Calculated Formulary:

Predication of MPE limit at a given distance

$$S = \frac{PG}{4\pi R^2}$$

S = power density (in appropriate units, e.g. mW/cm²)

P = power input to the antenna (in appropriate units, e.g., mW).

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain.

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm)

| Mode | Frequency (MHz) | Antenna Gain | | Tune up conducted power | | Evaluation Distance (cm) | Power Density (mW/cm ²) | MPE Limit (mW/cm ²) |
|-------|-----------------|--------------|-----------|-------------------------|-------|--------------------------|-------------------------------------|---------------------------------|
| | | (dBi) | (numeric) | (dBm) | (mW) | | | |
| BLE | 2402-2480 | 2 | 1.58 | 6.0 | 3.98 | 20 | 0.0013 | 1 |
| Wi-Fi | 2412-2462 | 2 | 1.58 | 14.5 | 28.18 | 20 | 0.0089 | 1 |

Note: the BLE and Wi-Fi cannot transmit at same time.

To maintain compliance with the FCC's RF exposure guidelines, place the equipment at least 20cm from nearby persons.

Result: Compliance

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has one internal antenna arrangement, which was permanently attached and the antenna gain is 2.0dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliance.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC§15.207

EUT Setup

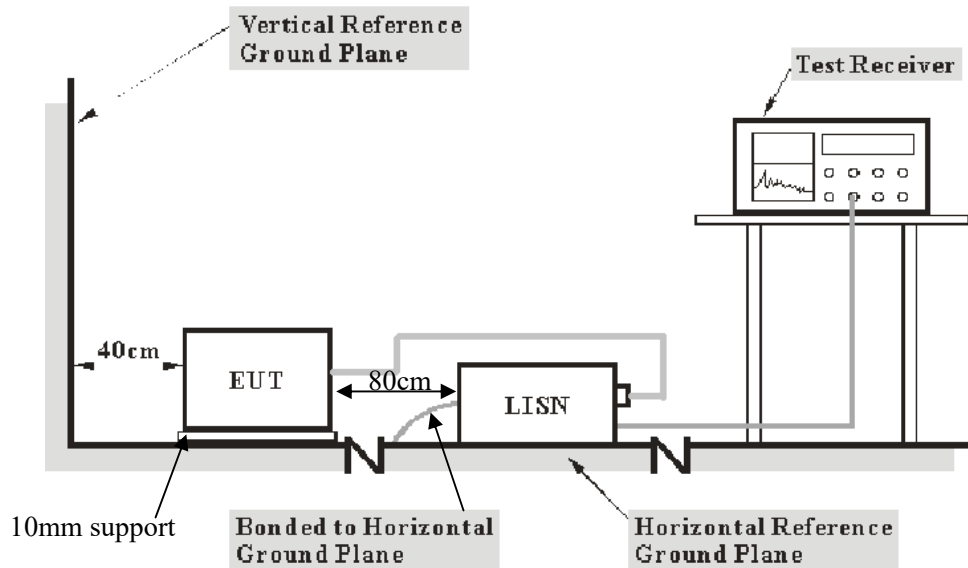

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz |

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Over limit} &= \text{Result} - \text{Limit} \\ \text{Result} &= \text{reading level} + \text{Transd Factor} \end{aligned}$$

Test Data


Environmental Conditions

| | |
|---------------------------|-----------|
| Temperature: | 23 °C |
| Relative Humidity: | 60 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Bin Duan on 2021-12-31.

EUT operation mode: Transmitting (the worst case is 802.11b Mode, High channel)


AC 120V/60 Hz, Line

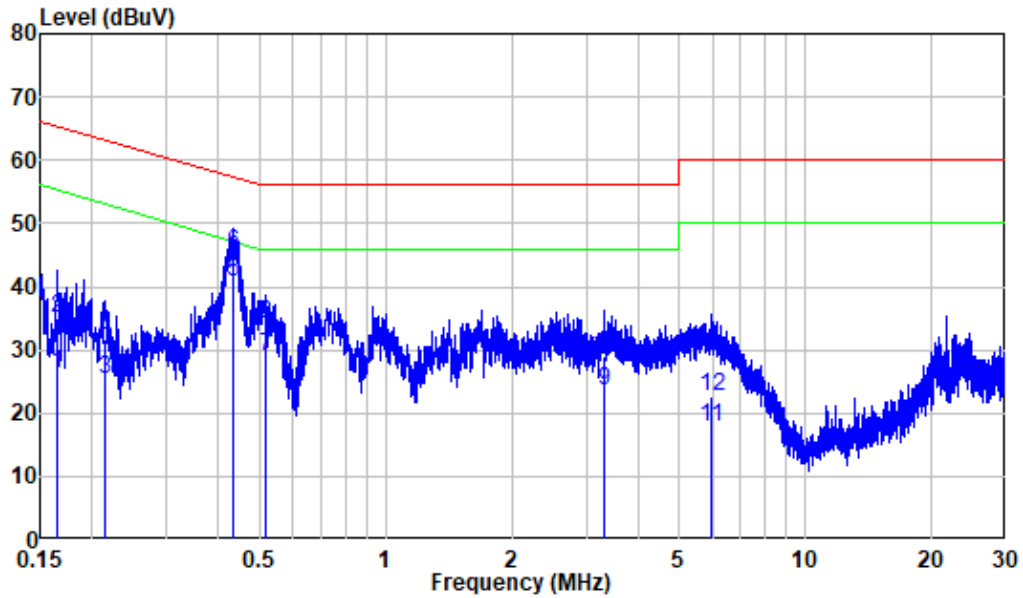

Site : Shielding Room
 Condition: Line
 Model : H7150
 Power : AC 120V 60Hz

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|----|-------|--------|------------|-------|------------|------------|---------|
| | MHz | dB | dBuV | dBuV | dBuV | dB | |
| 1 | 0.165 | 9.87 | 16.47 | 26.34 | 55.21 | -28.87 | Average |
| 2 | 0.165 | 9.87 | 25.09 | 34.96 | 65.21 | -30.25 | QP |
| 3 | 0.213 | 9.80 | 15.47 | 25.27 | 53.07 | -27.80 | Average |
| 4 | 0.213 | 9.80 | 21.90 | 31.70 | 63.07 | -31.37 | QP |
| 5 | 0.432 | 9.80 | 31.05 | 40.85 | 47.21 | -6.36 | Average |
| 6 | 0.432 | 9.80 | 35.62 | 45.42 | 57.21 | -11.79 | QP |
| 7 | 0.518 | 9.81 | 19.13 | 28.94 | 46.00 | -17.06 | Average |
| 8 | 0.518 | 9.81 | 24.20 | 34.01 | 56.00 | -21.99 | QP |
| 9 | 3.304 | 9.93 | 13.60 | 23.53 | 46.00 | -22.47 | Average |
| 10 | 3.304 | 9.93 | 18.96 | 28.89 | 56.00 | -27.11 | QP |
| 11 | 5.957 | 10.03 | 7.92 | 17.95 | 50.00 | -32.05 | Average |
| 12 | 5.957 | 10.03 | 12.72 | 22.75 | 60.00 | -37.25 | QP |

AC 120V/60 Hz, Neutral

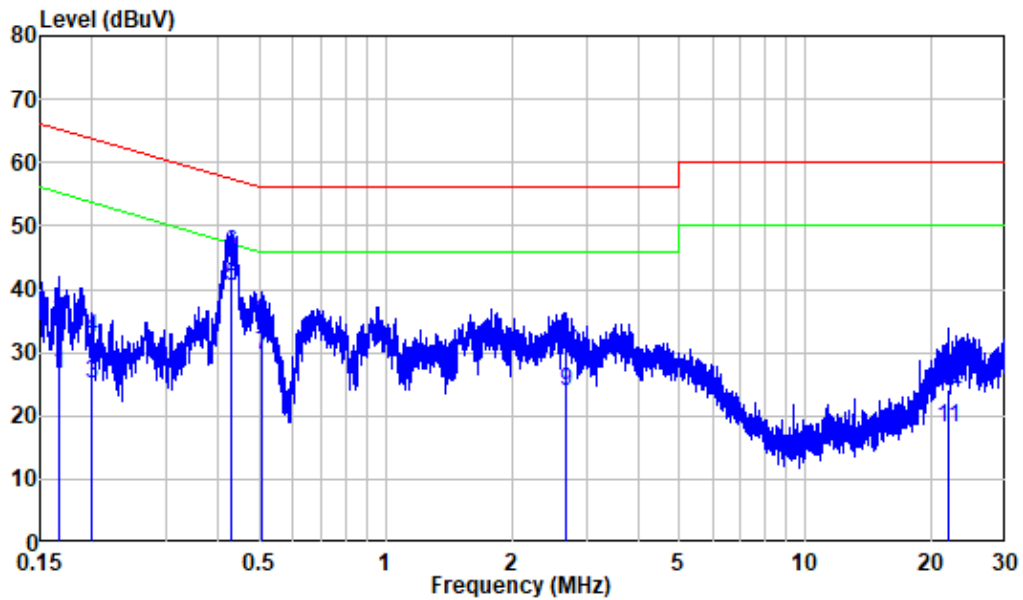

Site : Shielding Room
 Condition: Neutral
 Model : H7150
 Power : AC 120V 60Hz

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|----|--------|--------|------------|-------|------------|------------|---------|
| | MHz | dB | dBuV | dBuV | dBuV | dB | |
| 1 | 0.166 | 9.94 | 16.57 | 26.51 | 55.16 | -28.65 | Average |
| 2 | 0.166 | 9.94 | 25.15 | 35.09 | 65.16 | -30.07 | QP |
| 3 | 0.200 | 10.00 | 15.05 | 25.05 | 53.61 | -28.56 | Average |
| 4 | 0.200 | 10.00 | 22.38 | 32.38 | 63.61 | -31.23 | QP |
| 5 | 0.427 | 9.92 | 30.44 | 40.36 | 47.32 | -6.96 | Average |
| 6 | 0.427 | 9.92 | 35.63 | 45.55 | 57.32 | -11.77 | QP |
| 7 | 0.505 | 9.90 | 19.58 | 29.48 | 46.00 | -16.52 | Average |
| 8 | 0.505 | 9.90 | 24.81 | 34.71 | 56.00 | -21.29 | QP |
| 9 | 2.691 | 9.97 | 13.86 | 23.83 | 46.00 | -22.17 | Average |
| 10 | 2.691 | 9.97 | 19.89 | 29.86 | 56.00 | -26.14 | QP |
| 11 | 21.830 | 10.24 | 7.80 | 18.04 | 50.00 | -31.96 | Average |
| 12 | 21.830 | 10.24 | 13.89 | 24.13 | 60.00 | -35.87 | QP |


FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

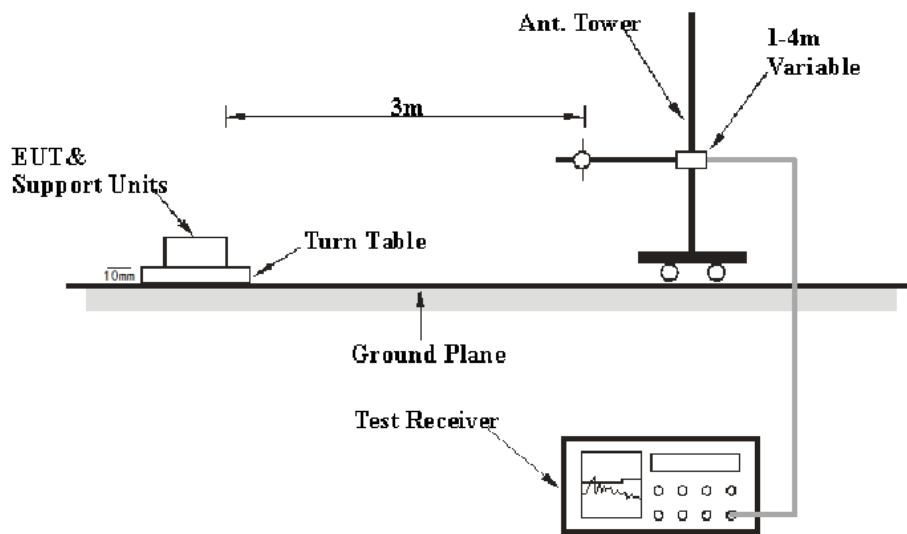

Above 1GHz:

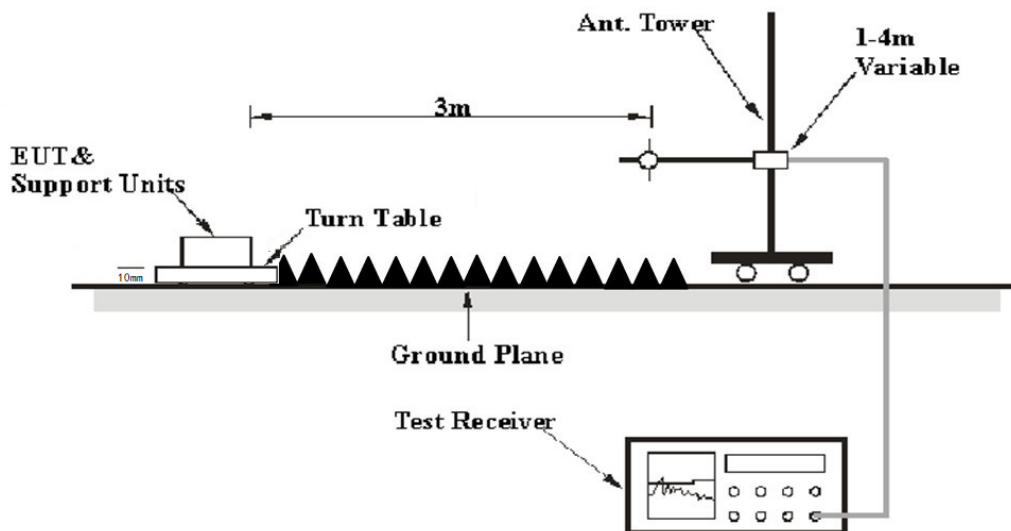

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range | RBW | Video B/W | IF B/W | Measurement |
|-------------------|---------|-------------------------|---------|-------------|
| 30 MHz – 1000 MHz | 100 kHz | 300 kHz | 120 kHz | QP |
| Above 1 GHz | 1MHz | 3 MHz | / | PK |
| | 1MHz | 10 Hz ^{Note 1} | / | Average |
| | 1MHz | > 1/T ^{Note 2} | / | Average |

Note 1: when duty cycle is no less than 98%

Note 2: when duty cycle is less than 98%

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over limit or Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a over limit/margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Over limit/Margin} &= \text{Result/Corrected Amplitude} - \text{Limit} \\ \text{Result/Corrected Amplitude} &= \text{Reading} + \text{Factor} \end{aligned}$$

Test Data

Environmental Conditions


| | |
|---------------------------|--------------|
| Temperature: | 24.7~25.1 °C |
| Relative Humidity: | 51~64 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Bin Deng on 2021-12-31 for below 1GHz, from 2021-12-30 to 2022-01-12 for above 1GHz.

EUT operation mode: Transmitting

30MHz-1GHz: (the worst case is 802.11G Mode, High channel)


Horizontal

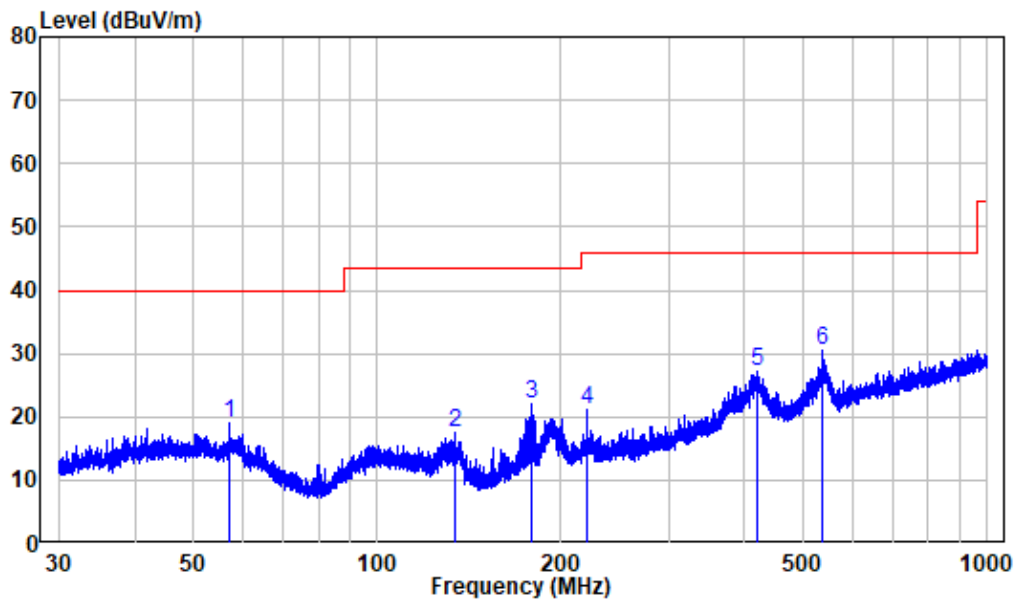

Site : chamber
 Condition: 3m Horizontal
 Job No. : SZNS211220-65747E-RF

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 57.267 | -10.01 | 28.97 | 18.96 | 40.00 | -21.04 | Peak |
| 2 | 133.853 | -14.98 | 32.60 | 17.62 | 43.50 | -25.88 | Peak |
| 3 | 179.308 | -12.84 | 35.00 | 22.16 | 43.50 | -21.34 | Peak |
| 4 | 220.327 | -11.40 | 32.57 | 21.17 | 46.00 | -24.83 | Peak |
| 5 | 418.557 | -6.16 | 33.23 | 27.07 | 46.00 | -18.93 | Peak |
| 6 | 537.589 | -4.16 | 34.57 | 30.41 | 46.00 | -15.59 | Peak |

Vertical

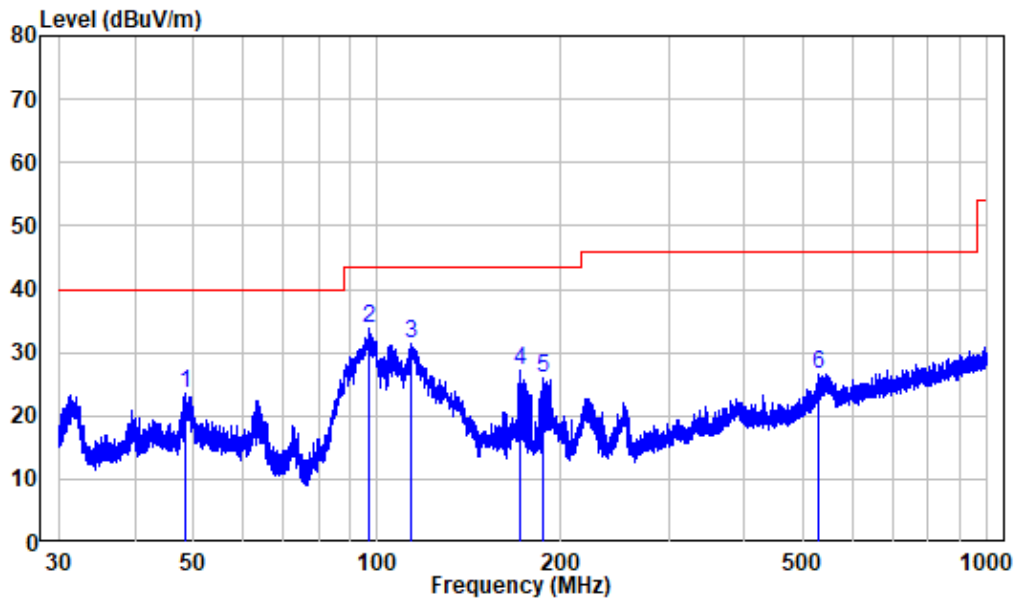

Site : chamber
 Condition: 3m VERTICAL
 Job No. : SZNS211220-65747E-RF

| | Freq | Factor | Read Level | Level | Limit Line | Over Limit | Remark |
|---|---------|--------|------------|--------|------------|------------|--------|
| | MHz | dB/m | dBuV | dBuV/m | dBuV/m | dB | |
| 1 | 48.395 | -9.98 | 33.46 | 23.48 | 40.00 | -16.52 | Peak |
| 2 | 96.690 | -12.29 | 46.02 | 33.73 | 43.50 | -9.77 | Peak |
| 3 | 113.615 | -12.53 | 44.05 | 31.52 | 43.50 | -11.98 | Peak |
| 4 | 170.868 | -13.49 | 40.60 | 27.11 | 43.50 | -16.39 | Peak |
| 5 | 187.096 | -11.93 | 37.95 | 26.02 | 43.50 | -17.48 | Peak |
| 6 | 529.637 | -4.55 | 31.15 | 26.60 | 46.00 | -19.40 | Peak |

1-25 GHz:**BLE:**

| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB/m) | Corrected Amplitude (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|------------------------|----------------|----------|------------------|------------|-------------|-------------------------|------------------------------|----------------|-------------|
| | Reading (dBμV) | PK/QP/AV | | Height (m) | Polar (H/V) | | | | |
| BLE 1M, Low Channel | | | | | | | | | |
| 2310 | 67.99 | PK | 45 | 1.7 | H | -7.24 | 60.75 | 74 | -13.25 |
| 2310 | 54.65 | AV | 45 | 1.7 | H | -7.24 | 47.41 | 54 | -6.59 |
| 2310 | 68.15 | PK | 116 | 2.1 | V | -7.24 | 60.91 | 74 | -13.09 |
| 2310 | 54.72 | AV | 116 | 2.1 | V | -7.24 | 47.48 | 54 | -6.52 |
| 2390 | 68.84 | PK | 346 | 2.2 | H | -7.22 | 61.62 | 74 | -12.38 |
| 2390 | 56.18 | AV | 346 | 2.2 | H | -7.22 | 48.96 | 54 | -5.04 |
| 2390 | 68.86 | PK | 18 | 1.1 | V | -7.22 | 61.64 | 74 | -12.36 |
| 2390 | 55.72 | AV | 18 | 1.1 | V | -7.22 | 48.50 | 54 | -5.50 |
| 4804 | 54.36 | PK | 278 | 1.6 | H | -3.51 | 50.85 | 74 | -23.15 |
| 4804 | 54.22 | PK | 48 | 1.6 | V | -3.51 | 50.71 | 74 | -23.29 |
| BLE 1M, Middle Channel | | | | | | | | | |
| 4880 | 54.98 | PK | 118 | 1.3 | H | -3.38 | 51.6 | 74 | -22.40 |
| 4880 | 54.81 | PK | 291 | 1.3 | V | -3.38 | 51.43 | 74 | -22.57 |
| BLE 1M, High Channel | | | | | | | | | |
| 2483.5 | 69.52 | PK | 15 | 2.1 | H | -7.20 | 62.32 | 74 | -11.68 |
| 2483.5 | 56.48 | AV | 15 | 2.1 | H | -7.20 | 49.28 | 54 | -4.72 |
| 2483.5 | 69.19 | PK | 287 | 1.7 | V | -7.20 | 61.99 | 74 | -12.01 |
| 2483.5 | 56.59 | AV | 287 | 1.7 | V | -7.20 | 49.39 | 54 | -4.61 |
| 2500 | 69.21 | PK | 303 | 1.8 | H | -7.18 | 62.03 | 74 | -11.97 |
| 2500 | 55.76 | AV | 303 | 1.8 | H | -7.18 | 48.58 | 54 | -5.42 |
| 2500 | 68.57 | PK | 156 | 2 | V | -7.18 | 61.39 | 74 | -12.61 |
| 2500 | 55.68 | AV | 156 | 2 | V | -7.18 | 48.5 | 54 | -5.50 |
| 4960 | 55.23 | PK | 8 | 1.7 | H | -3.01 | 52.22 | 74 | -21.78 |
| 4960 | 54.04 | PK | 300 | 1.7 | V | -3.01 | 51.03 | 74 | -22.97 |

Wi-Fi:

| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB/m) | Corrected Amplitude (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|-------------------------|----------------|----------|------------------|------------|-------------|-------------------------|------------------------------|----------------|-------------|
| | Reading (dBμV) | PK/QP/AV | | Height (m) | Polar (H/V) | | | | |
| 802.11B, Low Channel | | | | | | | | | |
| 2310 | 68.79 | PK | 48 | 1.9 | H | -7.24 | 61.55 | 74 | -12.45 |
| 2310 | 52.98 | AV | 48 | 1.9 | H | -7.24 | 45.74 | 54 | -8.26 |
| 2310 | 68.40 | PK | 4 | 1.6 | V | -7.24 | 61.16 | 74 | -12.84 |
| 2310 | 53.91 | AV | 4 | 1.6 | V | -7.24 | 46.67 | 54 | -7.33 |
| 2390 | 68.24 | PK | 119 | 1.3 | H | -7.22 | 61.02 | 74 | -12.98 |
| 2390 | 54.30 | AV | 119 | 1.3 | H | -7.22 | 47.08 | 54 | -6.92 |
| 2390 | 68.21 | PK | 157 | 1.9 | V | -7.22 | 60.99 | 74 | -13.01 |
| 2390 | 54.09 | AV | 157 | 1.9 | V | -7.22 | 46.87 | 54 | -7.13 |
| 4824 | 54.59 | PK | 122 | 1.4 | H | -3.52 | 51.07 | 74 | -22.93 |
| 4824 | 53.98 | PK | 301 | 1.4 | V | -3.52 | 50.46 | 74 | -23.54 |
| 802.11B, Middle Channel | | | | | | | | | |
| 4874 | 56.03 | PK | 105 | 1.4 | H | -3.42 | 52.61 | 74 | -21.39 |
| 4874 | 54.45 | PK | 244 | 1.4 | V | -3.42 | 51.03 | 74 | -22.97 |
| 802.11B, High Channel | | | | | | | | | |
| 2483.5 | 70.29 | PK | 340 | 2 | H | -7.20 | 63.09 | 74 | -10.91 |
| 2483.5 | 55.70 | AV | 340 | 2 | H | -7.20 | 48.5 | 54 | -5.50 |
| 2483.5 | 68.90 | PK | 89 | 2.2 | V | -7.20 | 61.7 | 74 | -12.30 |
| 2483.5 | 54.94 | AV | 89 | 2.2 | V | -7.20 | 47.74 | 54 | -6.26 |
| 2500 | 69.38 | PK | 243 | 1.6 | H | -7.18 | 62.2 | 74 | -11.80 |
| 2500 | 54.86 | AV | 243 | 1.6 | H | -7.18 | 47.68 | 54 | -6.32 |
| 2500 | 69.15 | PK | 152 | 2 | V | -7.18 | 61.97 | 74 | -12.03 |
| 2500 | 54.29 | AV | 152 | 2 | V | -7.18 | 47.11 | 54 | -6.89 |
| 4924 | 54.62 | PK | 193 | 1.7 | H | -3.16 | 51.46 | 74 | -22.54 |
| 4924 | 54.84 | PK | 270 | 1.7 | V | -3.16 | 51.68 | 74 | -22.32 |

| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB/m) | Corrected Amplitude (dB μ V/m) | Limit (dB μ V/m) | Margin (dB) |
|-------------------------|----------------------|----------|------------------|------------|-------------|-------------------------|------------------------------------|----------------------|-------------|
| | Reading (dB μ V) | PK/QP/AV | | Height (m) | Polar (H/V) | | | | |
| 802.11G, Low Channel | | | | | | | | | |
| 2310 | 67.89 | PK | 287 | 1.1 | H | -7.24 | 60.65 | 74 | -13.35 |
| 2310 | 53.98 | AV | 287 | 1.1 | H | -7.24 | 46.74 | 54 | -7.26 |
| 2310 | 67.76 | PK | 278 | 2.2 | V | -7.24 | 60.52 | 74 | -13.48 |
| 2310 | 52.95 | AV | 278 | 2.2 | V | -7.24 | 45.71 | 54 | -8.29 |
| 2390 | 68.46 | PK | 29 | 1.4 | H | -7.22 | 61.24 | 74 | -12.76 |
| 2390 | 55.18 | AV | 29 | 1.4 | H | -7.22 | 47.96 | 54 | -6.04 |
| 2390 | 67.84 | PK | 330 | 2.4 | V | -7.22 | 60.62 | 74 | -13.38 |
| 2390 | 54.13 | AV | 330 | 2.4 | V | -7.22 | 46.91 | 54 | -7.09 |
| 4824 | 54.06 | PK | 174 | 1.5 | H | -3.52 | 50.54 | 74 | -23.46 |
| 4824 | 54.18 | PK | 309 | 1.5 | V | -3.52 | 50.66 | 74 | -23.34 |
| 802.11G, Middle Channel | | | | | | | | | |
| 4874 | 54.70 | PK | 267 | 1.6 | H | -3.42 | 51.28 | 74 | -22.72 |
| 4874 | 55.19 | PK | 350 | 1.6 | V | -3.42 | 51.77 | 74 | -22.23 |
| 802.11G, High Channel | | | | | | | | | |
| 2483.5 | 69.31 | PK | 281 | 2.1 | H | -7.20 | 62.11 | 74 | -11.89 |
| 2483.5 | 54.58 | AV | 281 | 2.1 | H | -7.20 | 47.38 | 54 | -6.62 |
| 2483.5 | 69.78 | PK | 322 | 1.6 | V | -7.20 | 62.58 | 74 | -11.42 |
| 2483.5 | 54.88 | AV | 322 | 1.6 | V | -7.20 | 47.68 | 54 | -6.32 |
| 2500 | 68.65 | PK | 60 | 1.7 | H | -7.18 | 61.47 | 74 | -12.53 |
| 2500 | 54.35 | AV | 60 | 1.7 | H | -7.18 | 47.17 | 54 | -6.83 |
| 2500 | 70.08 | PK | 87 | 2.2 | V | -7.18 | 62.9 | 74 | -11.10 |
| 2500 | 54.20 | AV | 87 | 2.2 | V | -7.18 | 47.02 | 54 | -6.98 |
| 4924 | 54.60 | PK | 228 | 1.7 | H | -3.16 | 51.44 | 74 | -22.56 |
| 4924 | 53.56 | PK | 66 | 1.7 | V | -3.16 | 50.40 | 74 | -23.60 |

| Frequency (MHz) | Receiver | | Turntable Degree | Rx Antenna | | Corrected Factor (dB/m) | Corrected Amplitude (dBμV/m) | Limit (dBμV/m) | Margin (dB) |
|---------------------------|----------------|----------|------------------|------------|-------------|-------------------------|------------------------------|----------------|-------------|
| | Reading (dBμV) | PK/QP/AV | | Height (m) | Polar (H/V) | | | | |
| 802.11N20, Low Channel | | | | | | | | | |
| 2310 | 67.21 | PK | 30 | 2.3 | H | -7.24 | 59.97 | 74 | -14.03 |
| 2310 | 53.15 | AV | 30 | 2.3 | H | -7.24 | 45.91 | 54 | -8.09 |
| 2310 | 67.80 | PK | 82 | 1.7 | V | -7.24 | 60.56 | 74 | -13.44 |
| 2310 | 52.95 | AV | 82 | 1.7 | V | -7.24 | 45.71 | 54 | -8.29 |
| 2390 | 71.07 | PK | 24 | 1.1 | H | -7.22 | 63.85 | 74 | -10.15 |
| 2390 | 55.41 | AV | 24 | 1.1 | H | -7.22 | 48.19 | 54 | -5.81 |
| 2390 | 68.01 | PK | 346 | 1.5 | V | -7.22 | 60.79 | 74 | -13.21 |
| 2390 | 54.32 | AV | 346 | 1.5 | V | -7.22 | 47.10 | 54 | -6.90 |
| 4824 | 55.09 | PK | 346 | 1.7 | H | -3.52 | 51.57 | 74 | -22.43 |
| 4824 | 54.56 | PK | 4 | 1.7 | V | -3.52 | 51.04 | 74 | -22.96 |
| 802.11N20, Middle Channel | | | | | | | | | |
| 4874 | 54.81 | PK | 311 | 1.1 | H | -3.42 | 51.39 | 74 | -22.61 |
| 4874 | 54.43 | PK | 137 | 1.1 | V | -3.42 | 51.01 | 74 | -22.99 |
| 802.11N20, High Channel | | | | | | | | | |
| 2483.5 | 72.84 | PK | 162 | 1.1 | H | -7.20 | 65.64 | 74 | -8.36 |
| 2483.5 | 55.83 | AV | 162 | 1.1 | H | -7.20 | 48.63 | 54 | -5.37 |
| 2483.5 | 69.06 | PK | 313 | 1.4 | V | -7.20 | 61.86 | 74 | -12.14 |
| 2483.5 | 54.87 | AV | 313 | 1.4 | V | -7.20 | 47.67 | 54 | -6.33 |
| 2500 | 69.46 | PK | 289 | 1.7 | H | -7.18 | 62.28 | 74 | -11.72 |
| 2500 | 54.50 | AV | 289 | 1.7 | H | -7.18 | 47.32 | 54 | -6.68 |
| 2500 | 69.11 | PK | 152 | 2.3 | V | -7.18 | 61.93 | 74 | -12.07 |
| 2500 | 54.24 | AV | 152 | 2.3 | V | -7.18 | 47.06 | 54 | -6.94 |
| 4924 | 53.85 | PK | 307 | 1.7 | H | -3.16 | 50.69 | 74 | -23.31 |
| 4924 | 54.73 | PK | 154 | 1.7 | V | -3.16 | 51.57 | 74 | -22.43 |

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading


Margin = Corrected. Amplitude - Limit

The other spurious emission which is 20dB to the limit was not recorded.


The test result of peak was less than the limit of average, so just peak values were recorded.

1-18 GHz:

**Pre-scan for
802.11 b Middle Channel
Horizontal**

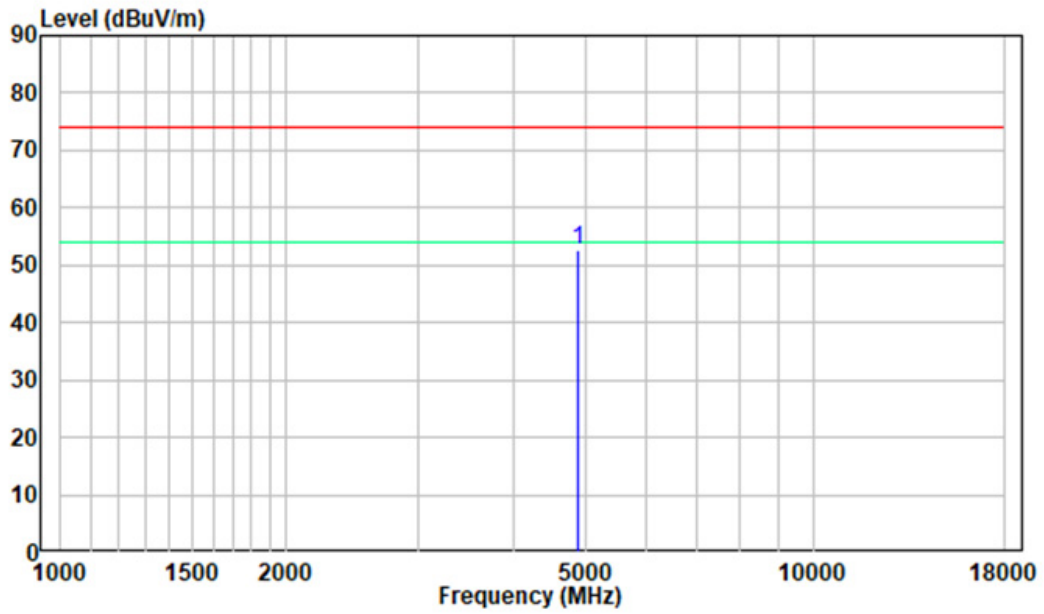


Vertical

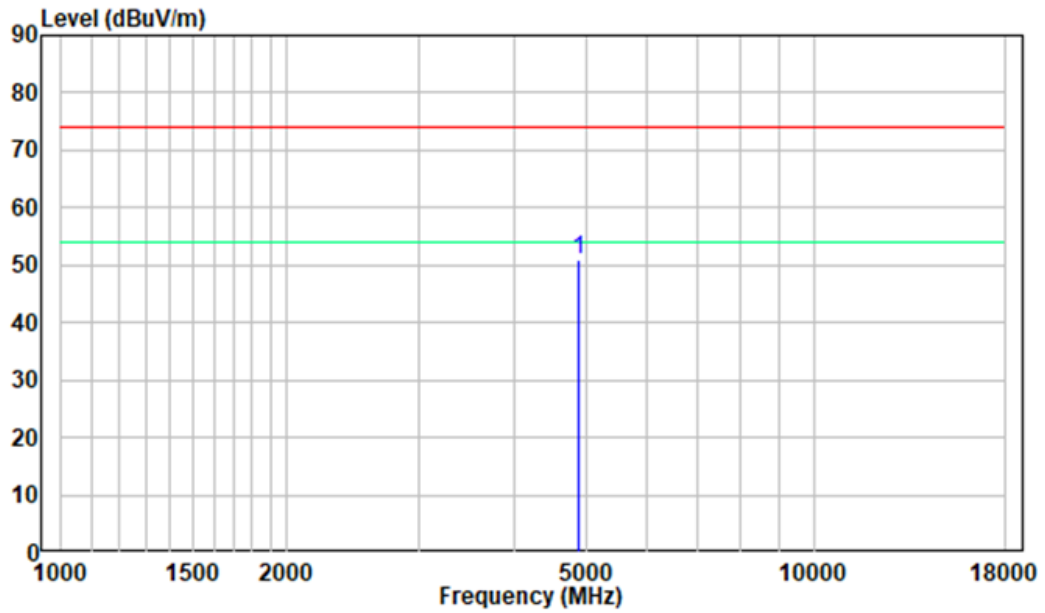


18 -25GHz:

**Pre-scan for
802.11 b Middle Channel
Horizontal**

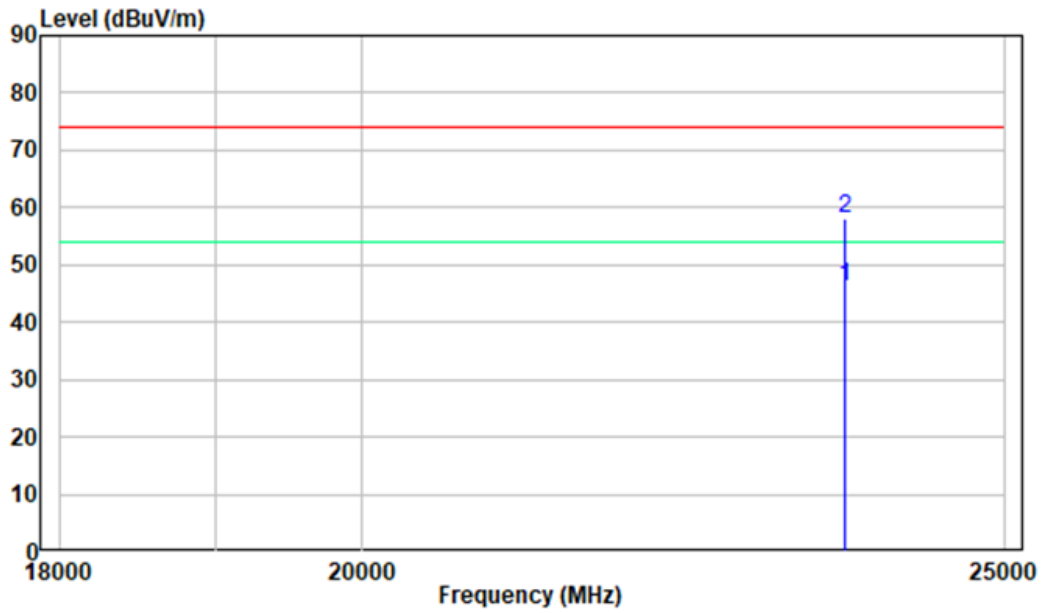

Vertical

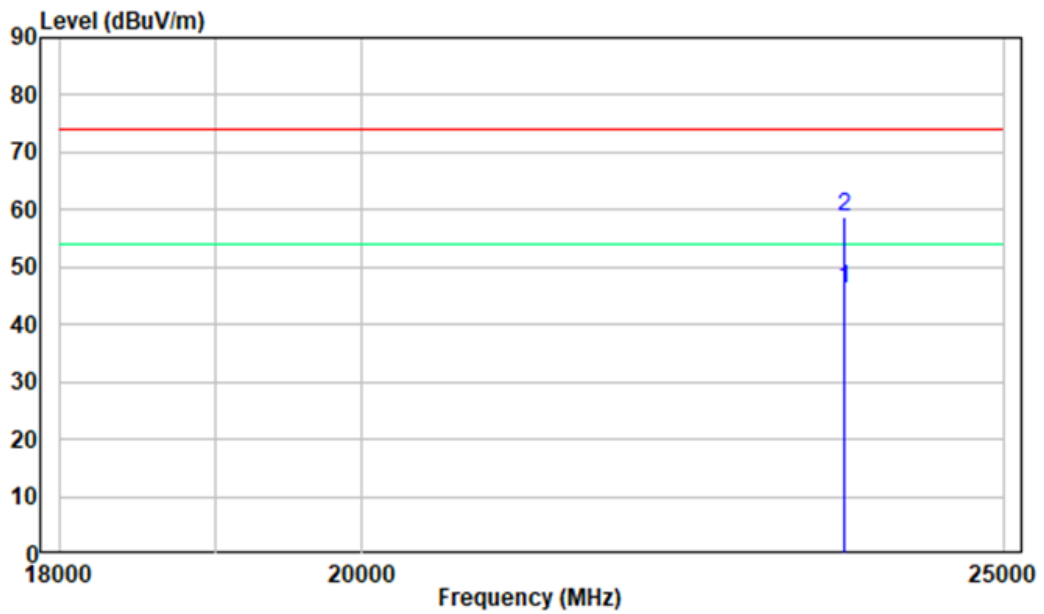


FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH & OCCUPIED BANDWIDTH

Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 6 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.



Test Data

Environmental Conditions

| | |
|---------------------------|------------|
| Temperature: | 24.2~27 °C |
| Relative Humidity: | 57~62 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Paul Liu on 2021-12-31 and 2022-01-13.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.



Note: the RF Control Unit has a built-in power sensor.

Test Data

Environmental Conditions

| | |
|---------------------------|------------|
| Temperature: | 24.2~27 °C |
| Relative Humidity: | 57~62 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Paul Liu on 2021-12-31 and 2022-01-13.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(d) – 100 kHz BANDWIDTH OF FREQUENCY BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.



Test Data

Environmental Conditions

| | |
|---------------------------|------------|
| Temperature: | 24.2~27 °C |
| Relative Humidity: | 57~62 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Paul Liu on 2021-12-31 and 2022-01-13.

EUT operation mode: Transmitting

Test Result: Compliant.

Please refer to the Appendix Wi-Fi and Appendix BLE.


FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
2. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
3. Set the VBW $\geq 3 \times \text{RBW}$.
4. Set the span to 1.5 times the DTS bandwidth.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



Test Data

Environmental Conditions

| | |
|---------------------------|------------|
| Temperature: | 24.2~27 °C |
| Relative Humidity: | 57~62 % |
| ATM Pressure: | 101.0 kPa |

The testing was performed by Paul Liu on 2021-12-31 and 2022-01-13.

EUT operation mode: Transmitting


Test Result: Compliant. Please refer to the Appendix Wi-Fi and Appendix BLE.




APPENDIX Wi-Fi




Appendix A: DTS Bandwidth Test Result

| Test Mode | Antenna | Channel | DTS BW [MHz] | Limit[MHz] | Verdict |
|-----------|---------|---------|--------------|------------|---------|
| 11B | Ant1 | 2412 | 9.160 | 0.5 | PASS |
| | | 2437 | 9.160 | 0.5 | PASS |
| | | 2462 | 9.160 | 0.5 | PASS |
| 11G | Ant1 | 2412 | 16.640 | 0.5 | PASS |
| | | 2437 | 16.640 | 0.5 | PASS |
| | | 2462 | 16.640 | 0.5 | PASS |
| 11N20SISO | Ant1 | 2412 | 17.800 | 0.5 | PASS |
| | | 2437 | 17.880 | 0.5 | PASS |
| | | 2462 | 17.840 | 0.5 | PASS |

Test Graphs

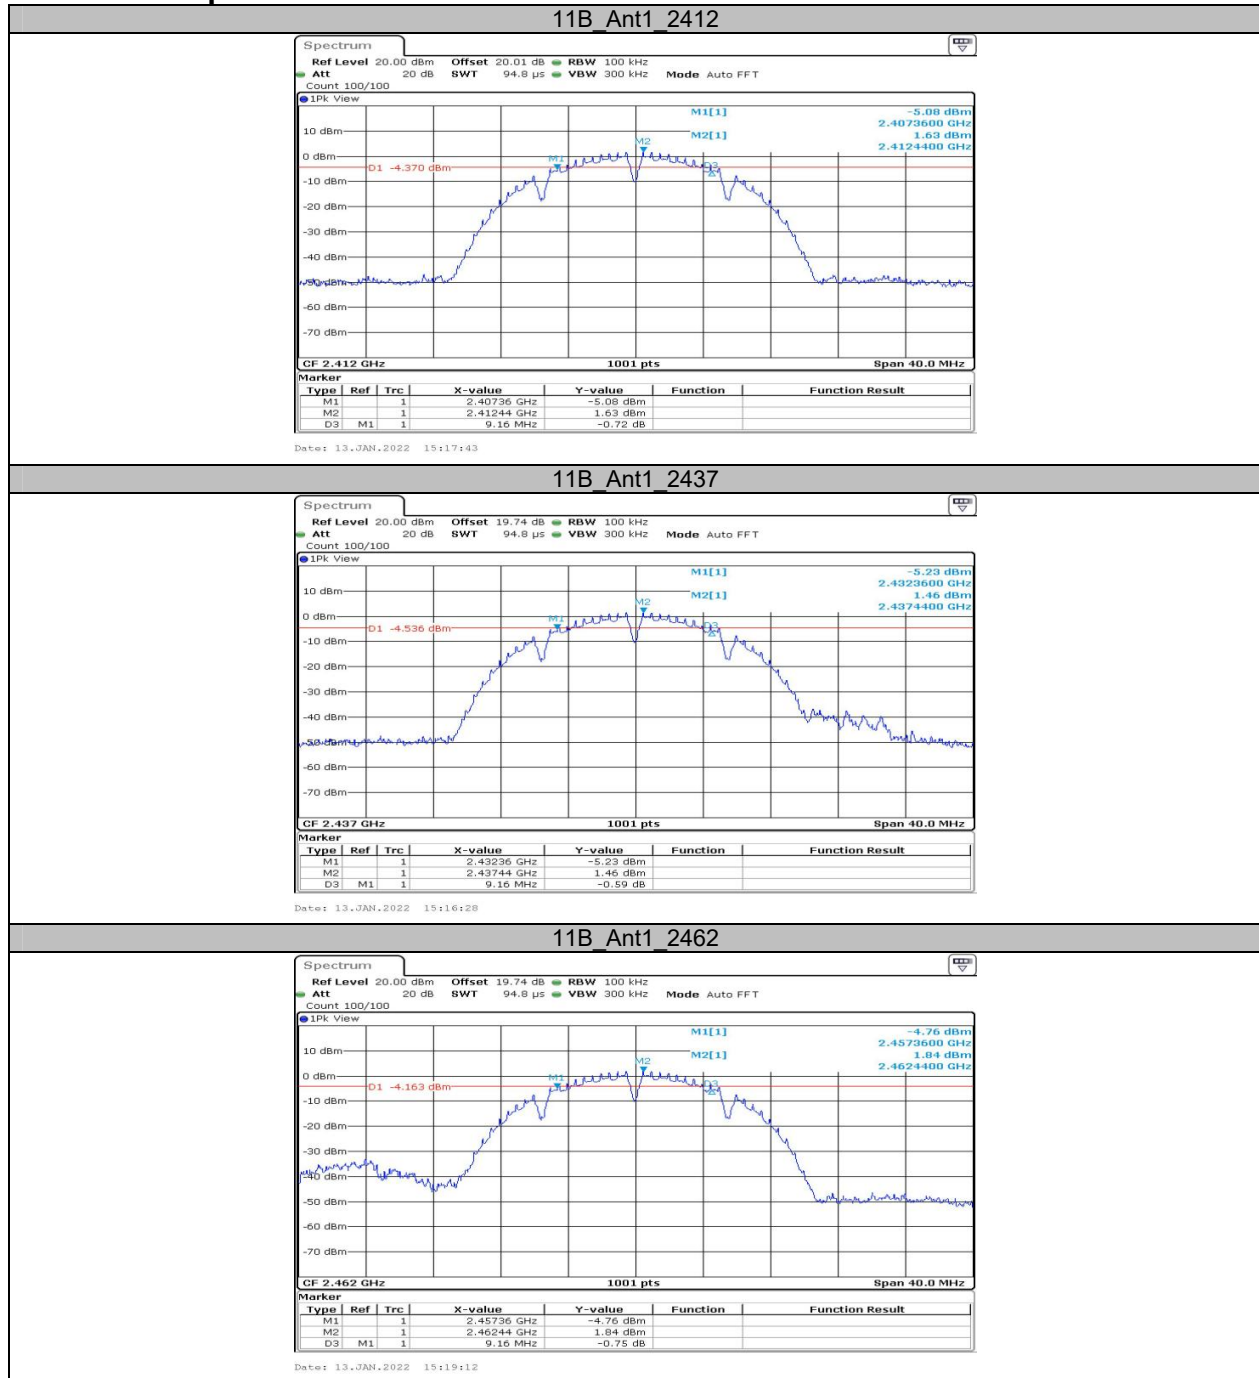

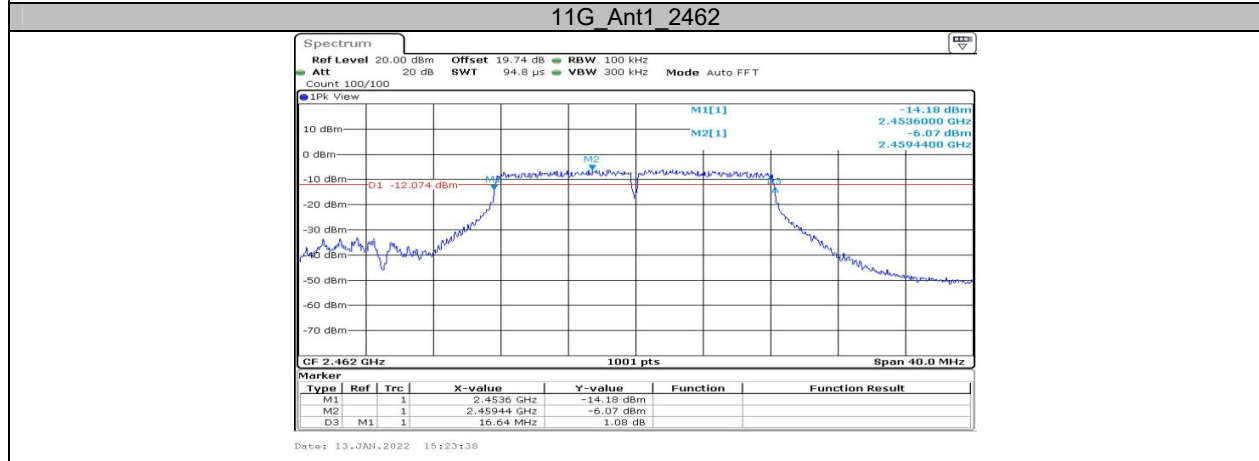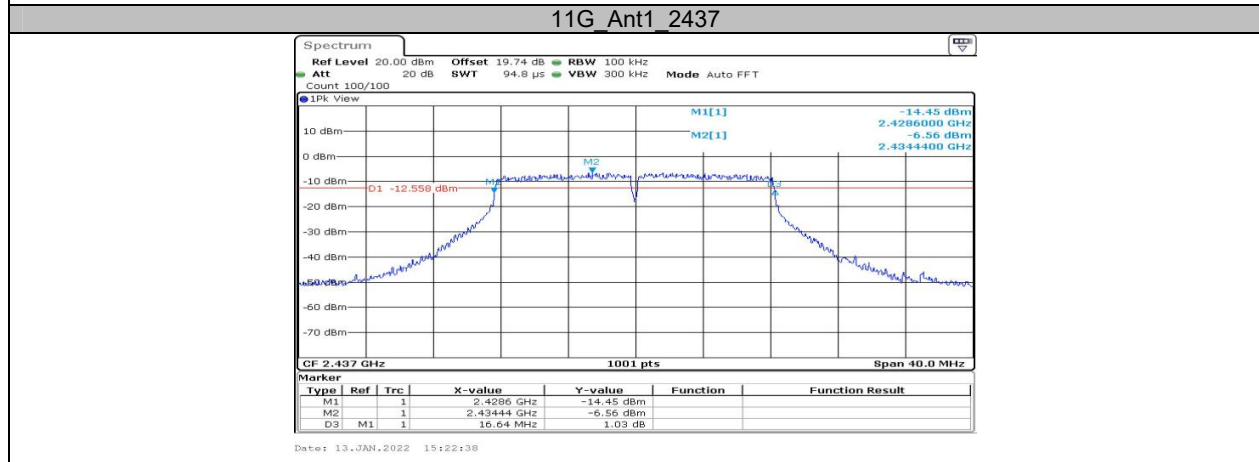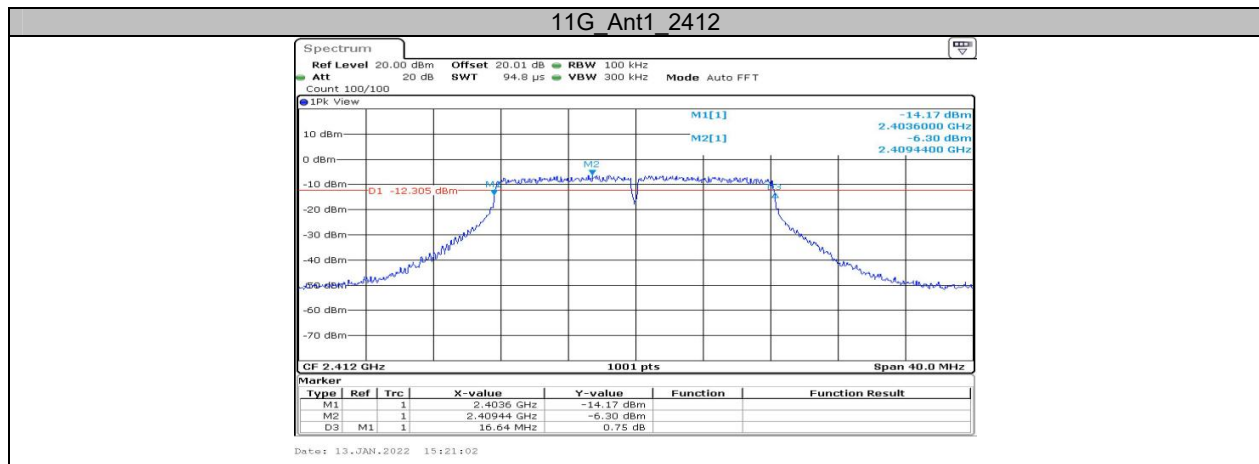


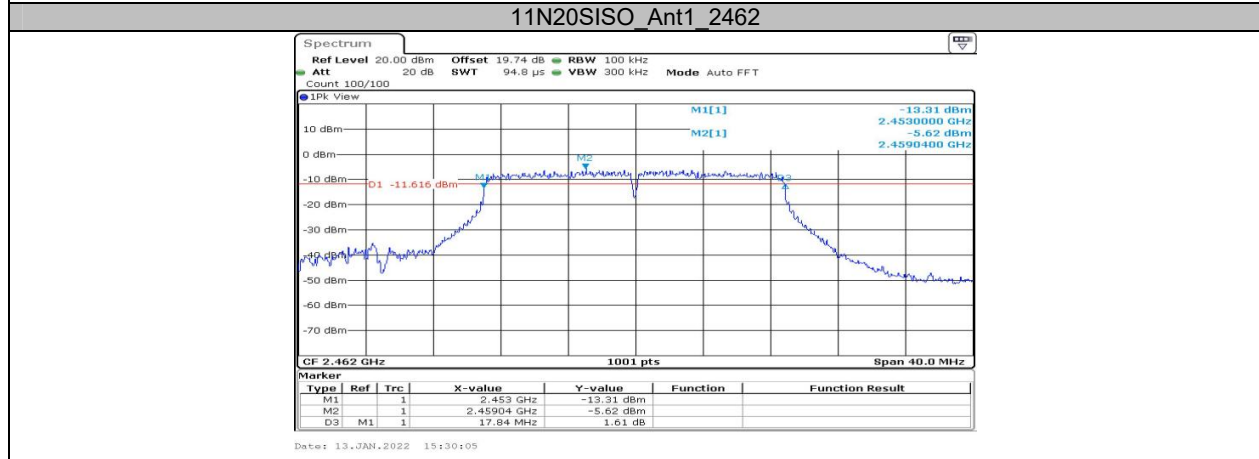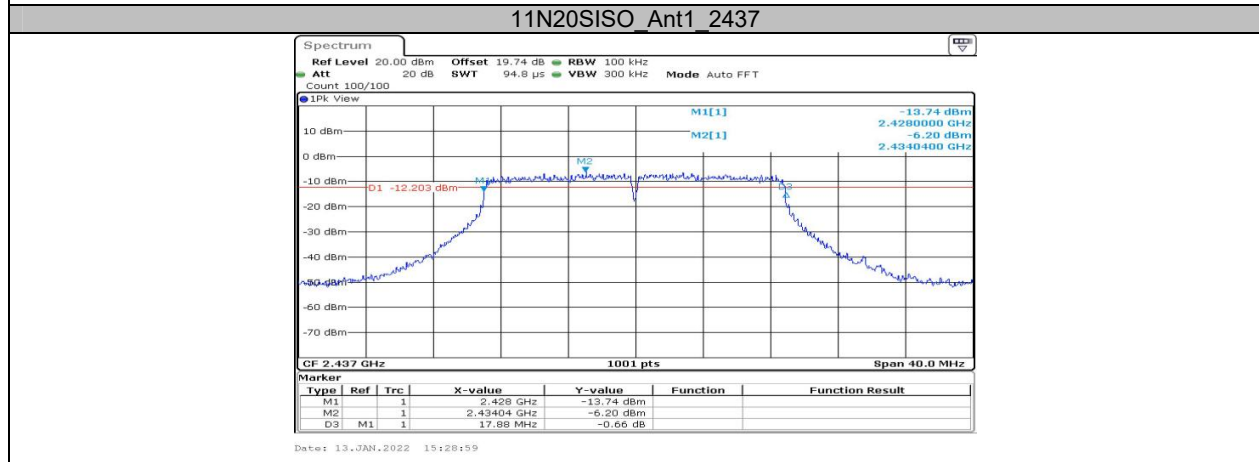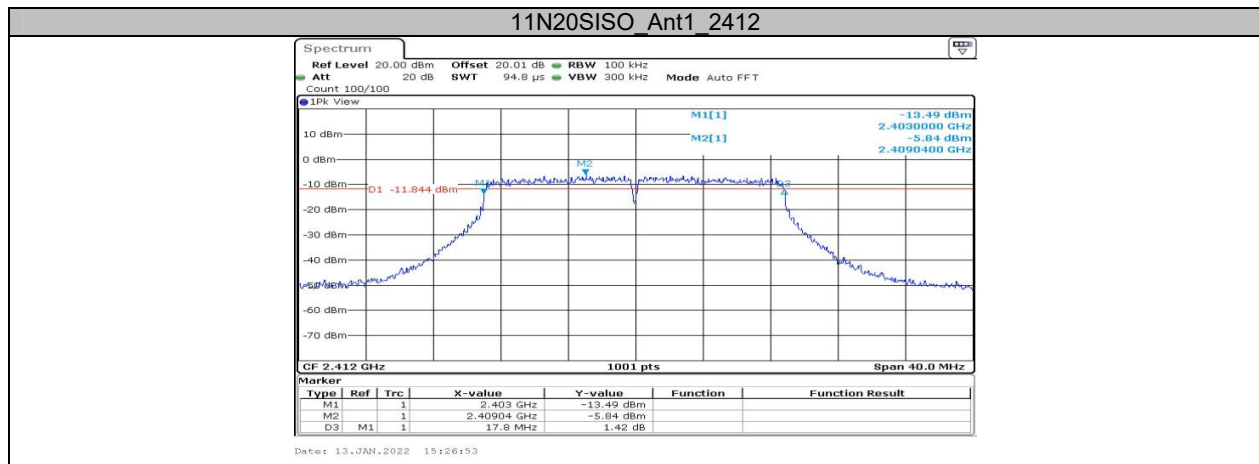



**Appendix B: Occupied Channel Bandwidth
Test Result**

| Test Mode | Antenna | Channel | OCB [MHz] | Limit[MHz] | Verdict |
|-----------|---------|---------|-----------|------------|---------|
| 11B | Ant1 | 2412 | 14.066 | --- | PASS |
| | | 2437 | 14.226 | --- | PASS |
| | | 2462 | 14.106 | --- | PASS |
| 11G | Ant1 | 2412 | 17.542 | --- | PASS |
| | | 2437 | 17.582 | --- | PASS |
| | | 2462 | 17.582 | --- | PASS |
| 11N20SISO | Ant1 | 2412 | 18.462 | --- | PASS |
| | | 2437 | 18.462 | --- | PASS |
| | | 2462 | 18.462 | --- | PASS |

Test Graphs

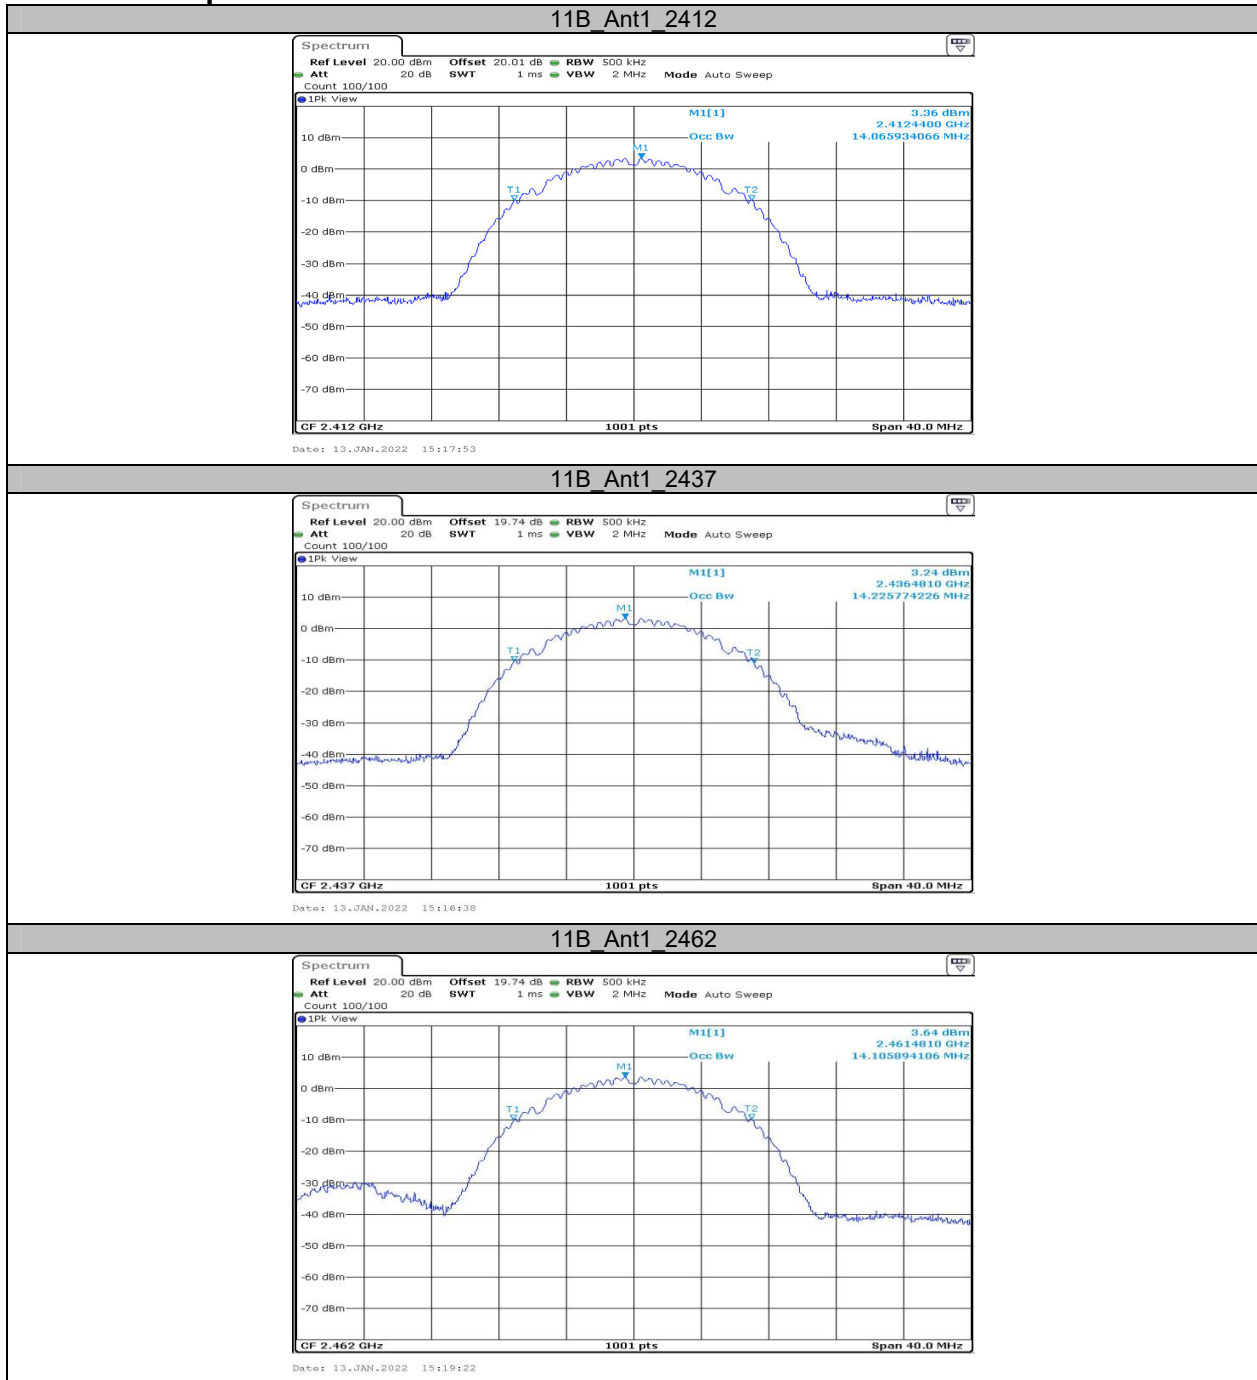

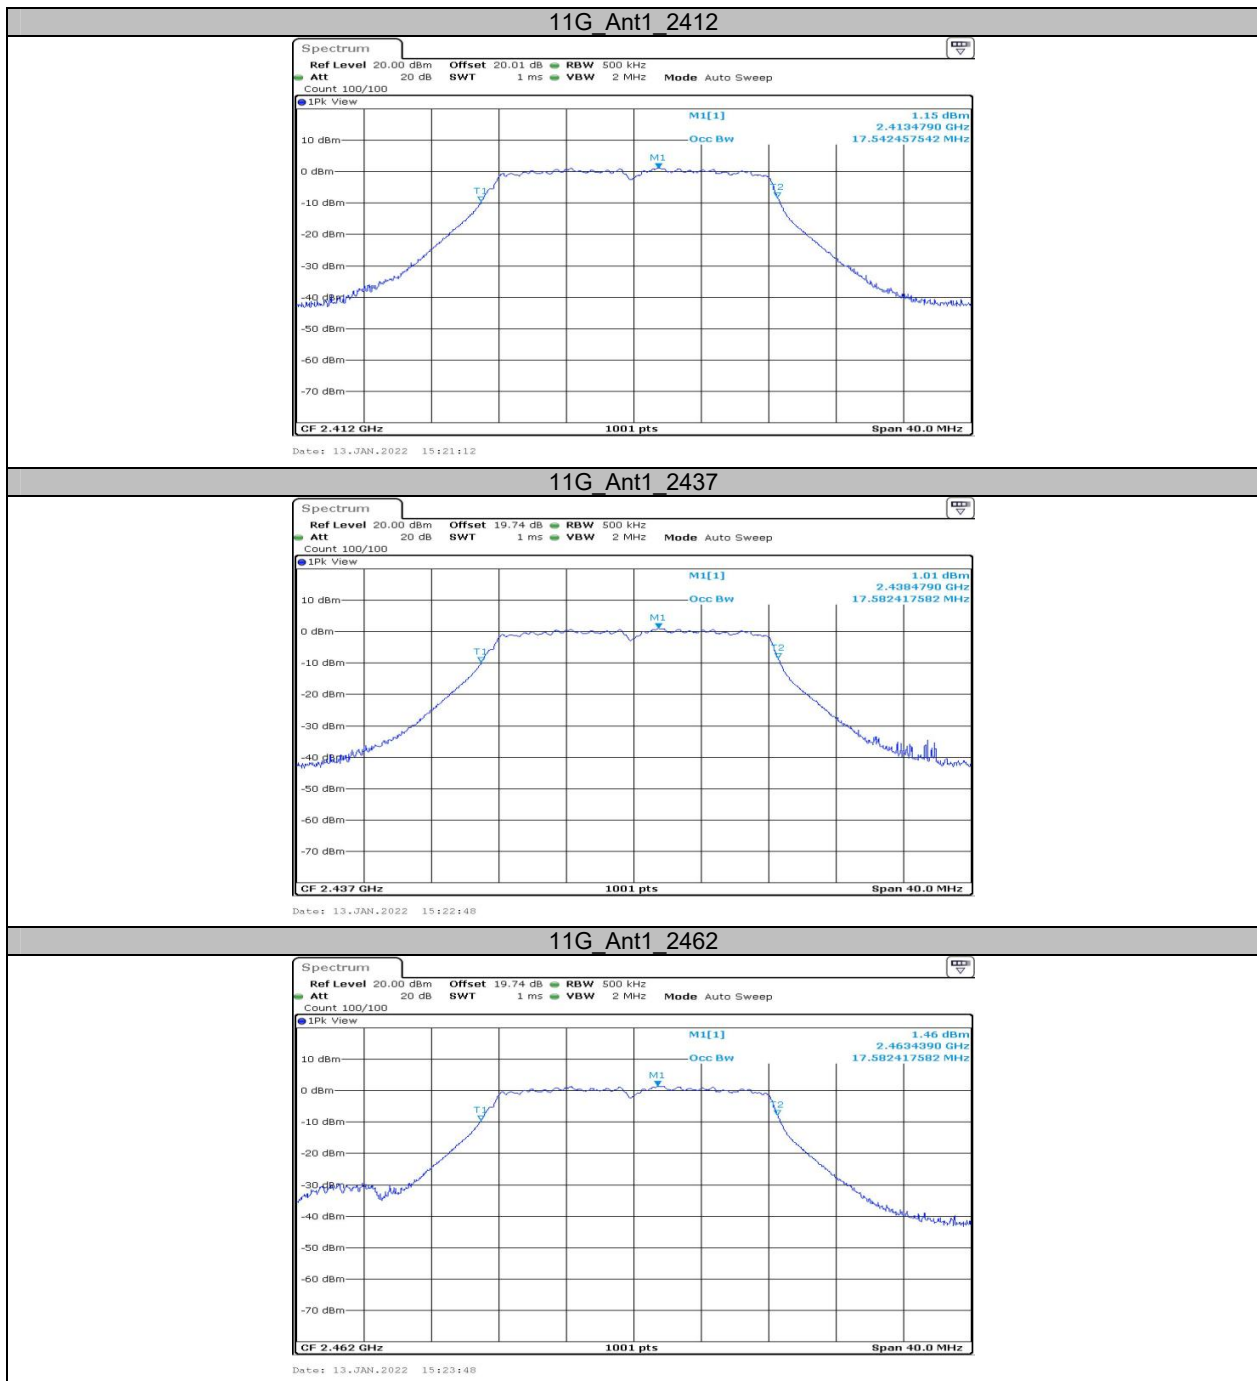

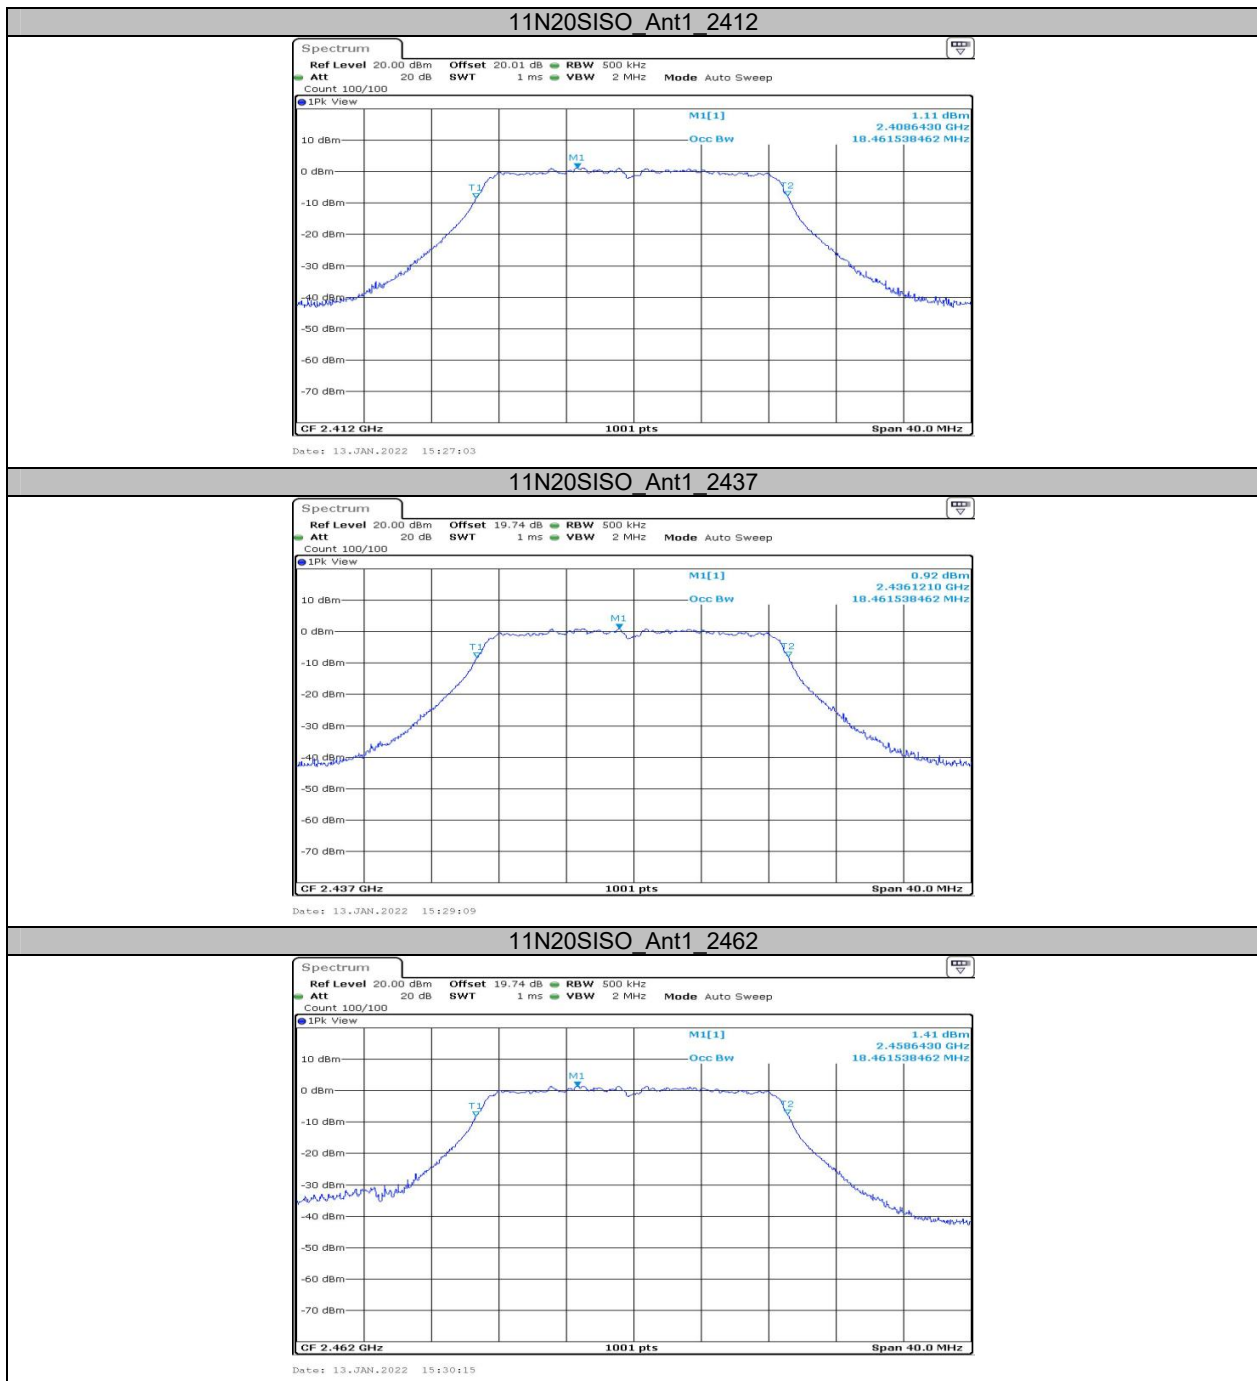


**Appendix C: Maximum conducted peak output power
Test Result**




| Test Mode | Antenna | Channel | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|---------|-------------|------------|---------|
| 11B | Ant1 | 2412 | 13.64 | ≤30 | PASS |
| | | 2437 | 13.89 | ≤30 | PASS |
| | | 2462 | 14.07 | ≤30 | PASS |
| 11G | Ant1 | 2412 | 12.91 | ≤30 | PASS |
| | | 2437 | 13.10 | ≤30 | PASS |
| | | 2462 | 13.22 | ≤30 | PASS |
| 11N20SISO | Ant1 | 2412 | 13.61 | ≤30 | PASS |
| | | 2437 | 14.11 | ≤30 | PASS |
| | | 2462 | 14.07 | ≤30 | PASS |


**Appendix D: Maximum power spectral density
Test Result**

| Test Mode | Antenna | Channel | Result[dBm/3kHz] | Limit[dBm/3kHz] | Verdict |
|-----------|---------|---------|------------------|-----------------|---------|
| 11B | Ant1 | 2412 | -18.98 | ≤8 | PASS |
| | | 2437 | -19.15 | ≤8 | PASS |
| | | 2462 | -18.73 | ≤8 | PASS |
| 11G | Ant1 | 2412 | -20.78 | ≤8 | PASS |
| | | 2437 | -21.02 | ≤8 | PASS |
| | | 2462 | -20.49 | ≤8 | PASS |
| 11N20SISO | Ant1 | 2412 | -20.24 | ≤8 | PASS |
| | | 2437 | -20.33 | ≤8 | PASS |
| | | 2462 | -19.88 | ≤8 | PASS |


Test Graphs

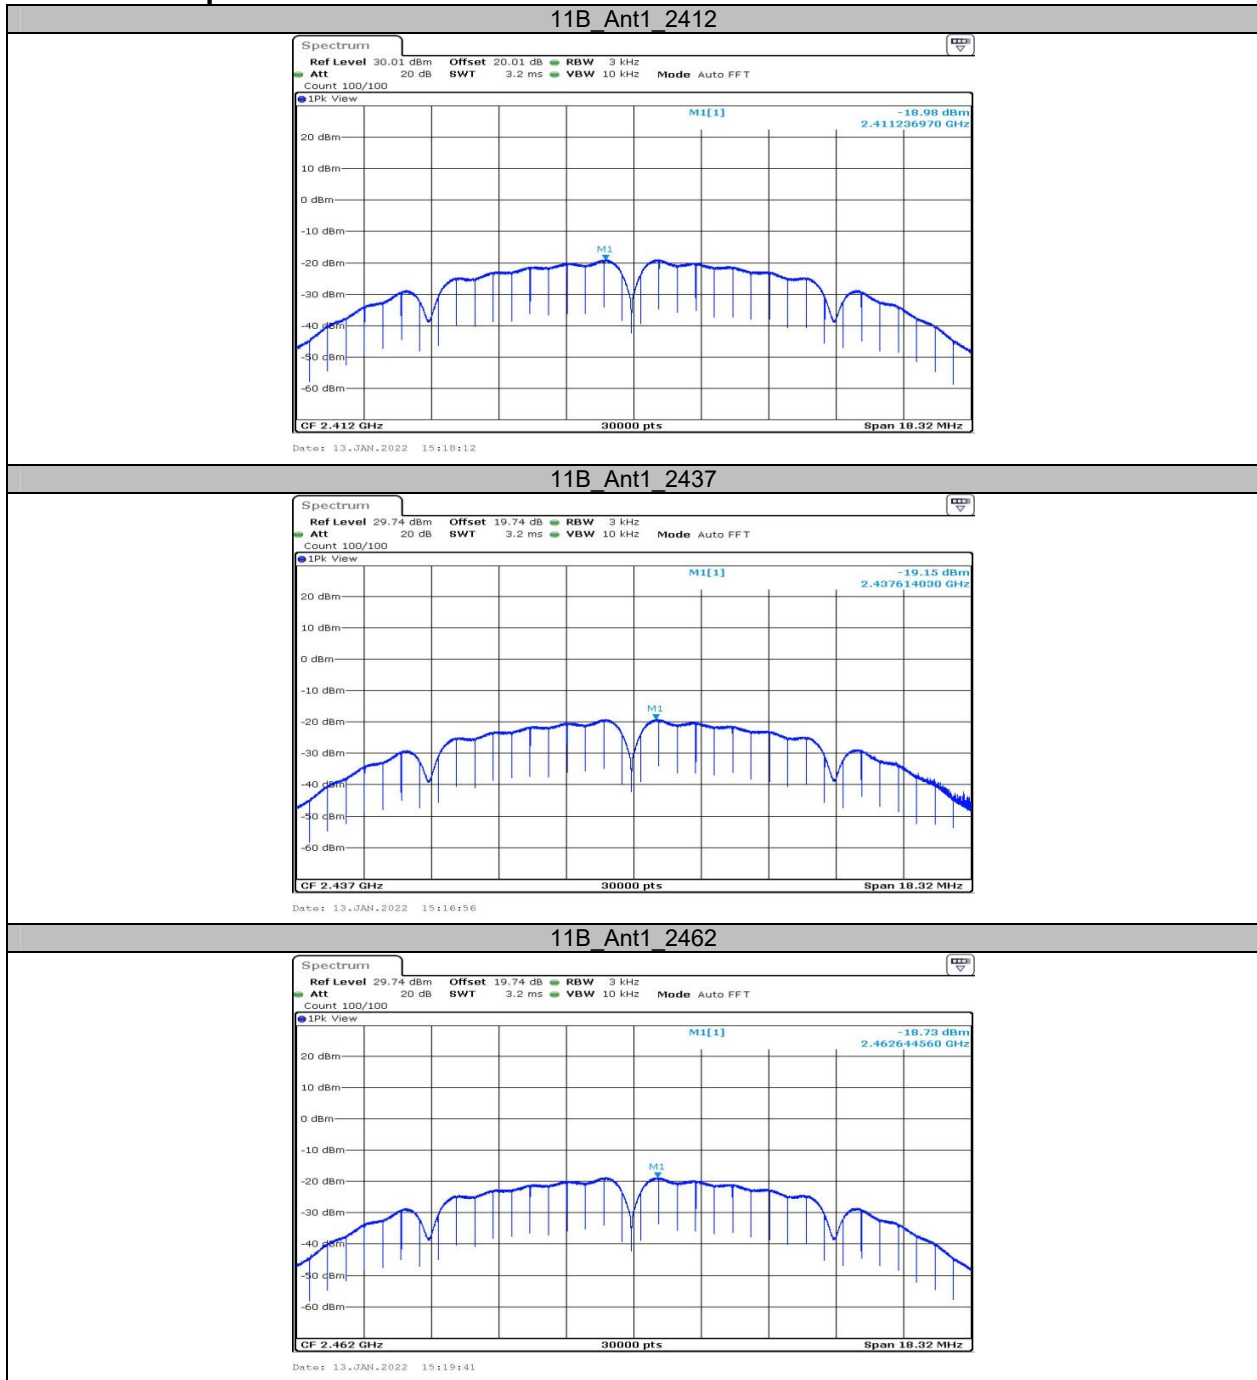

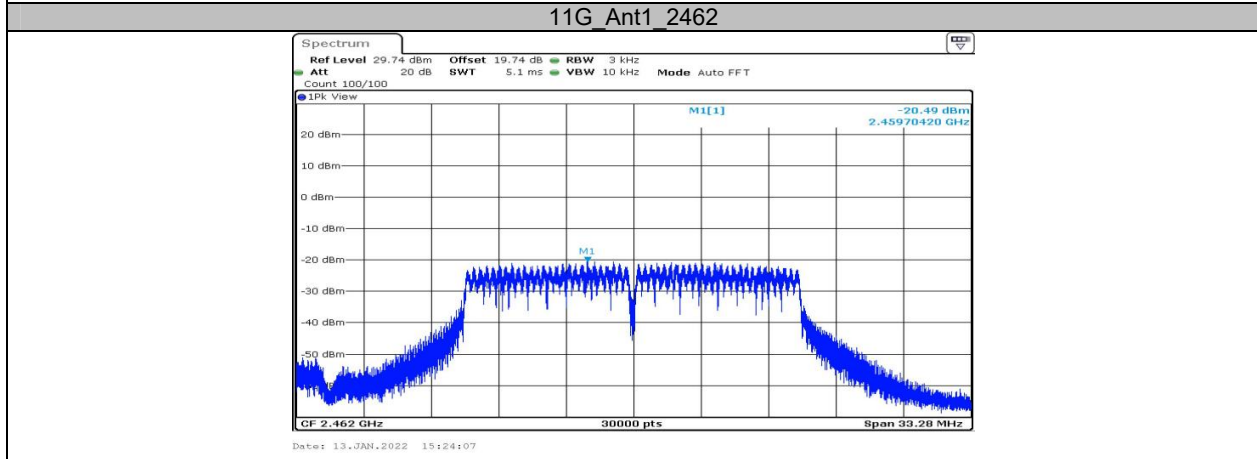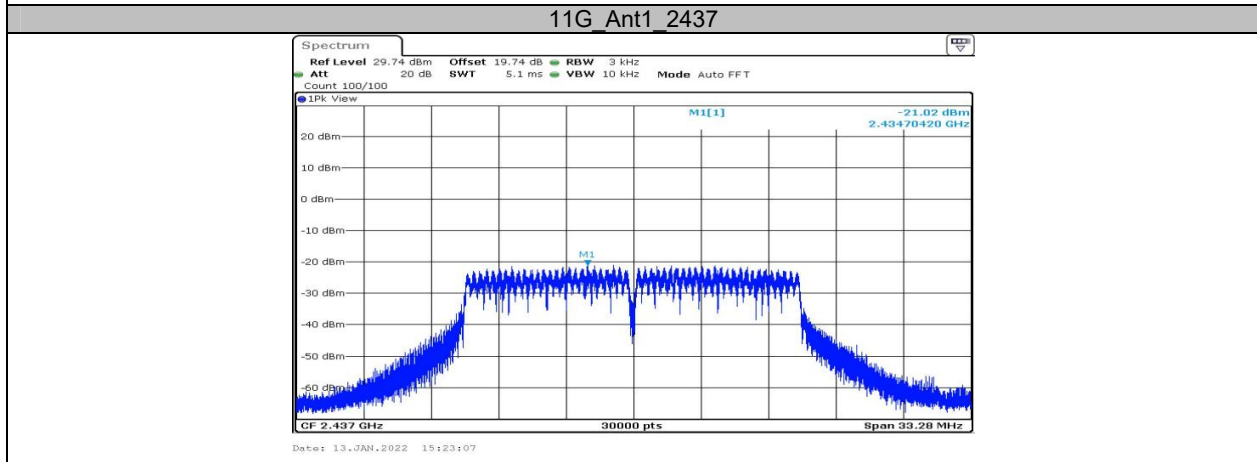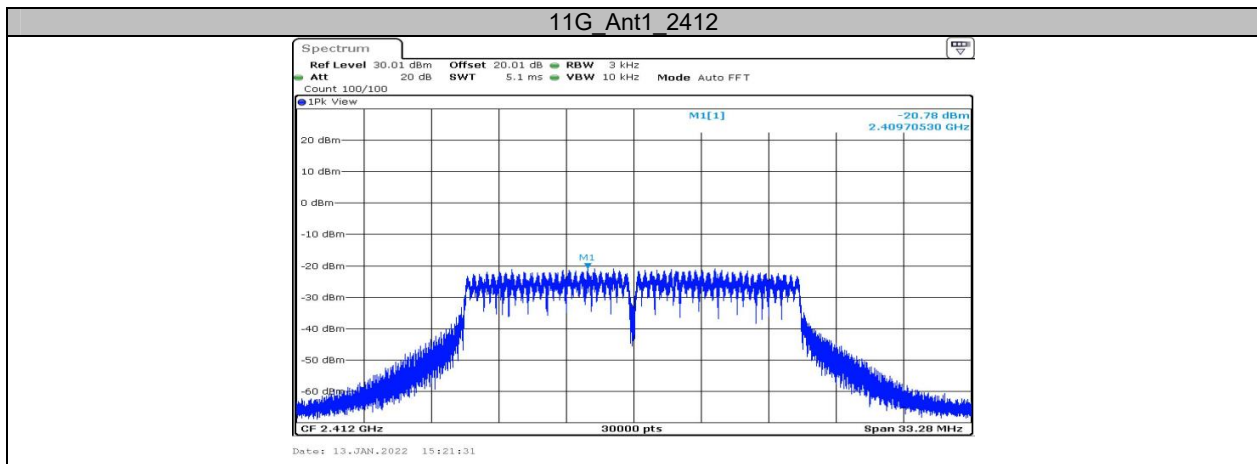

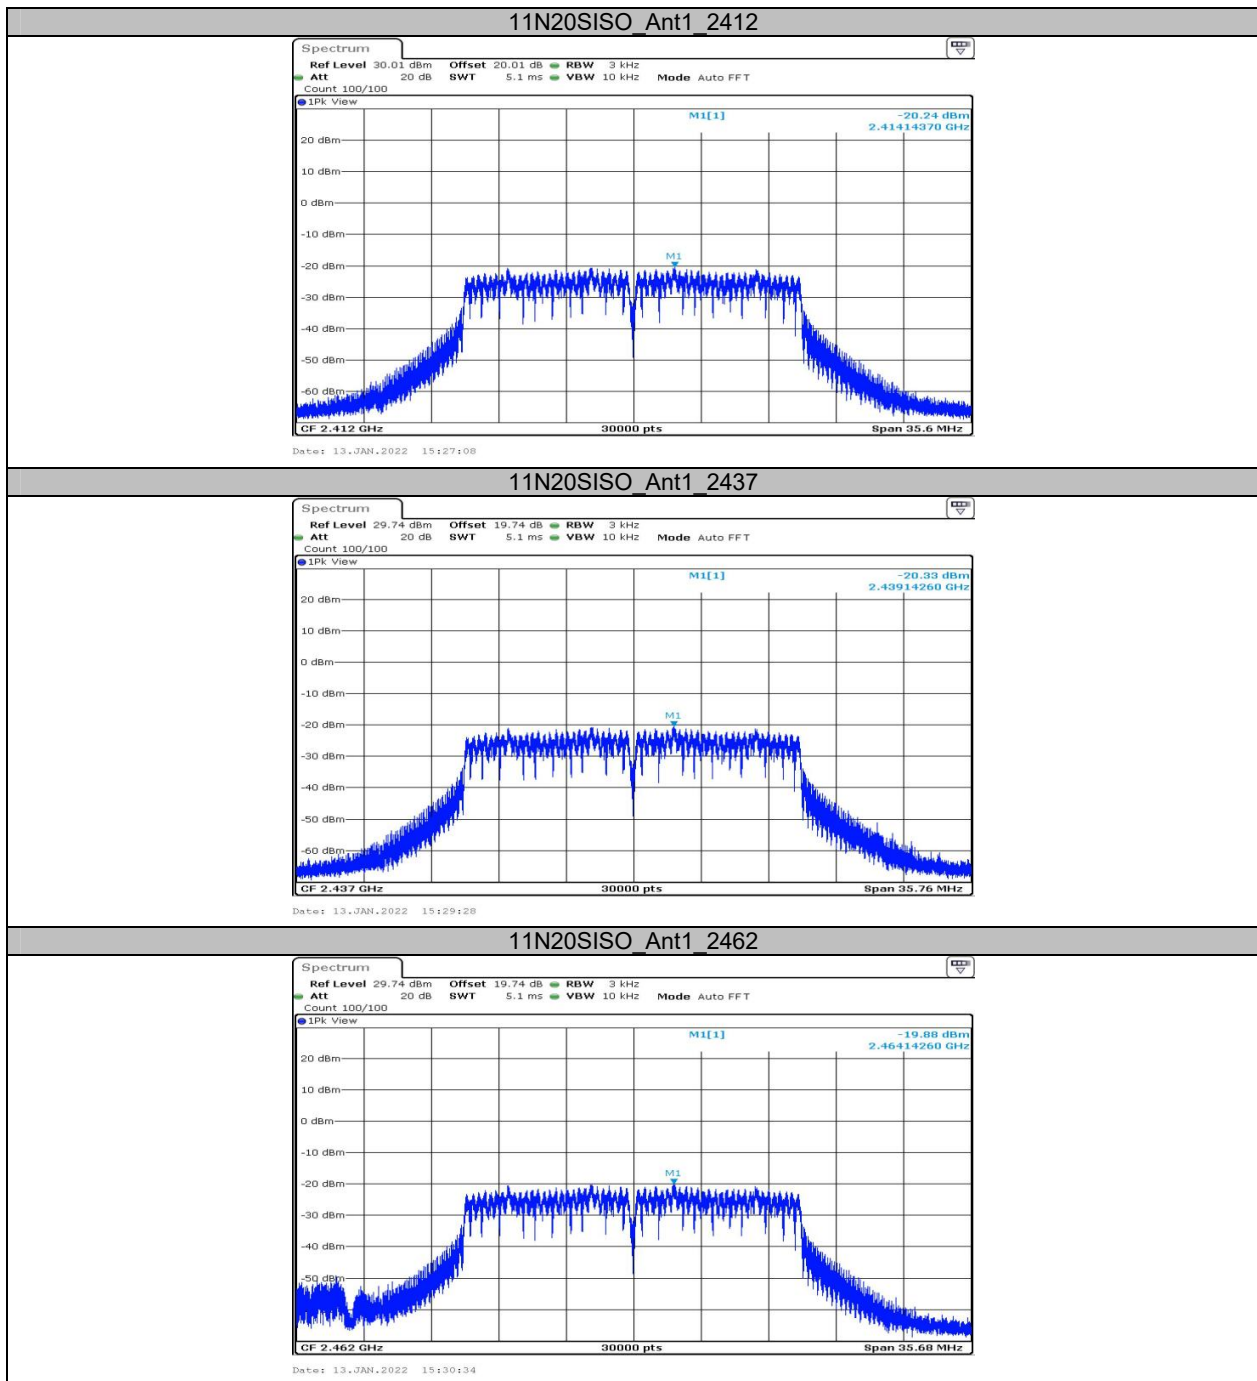

Appendix E: Band edge measurements Test Graphs

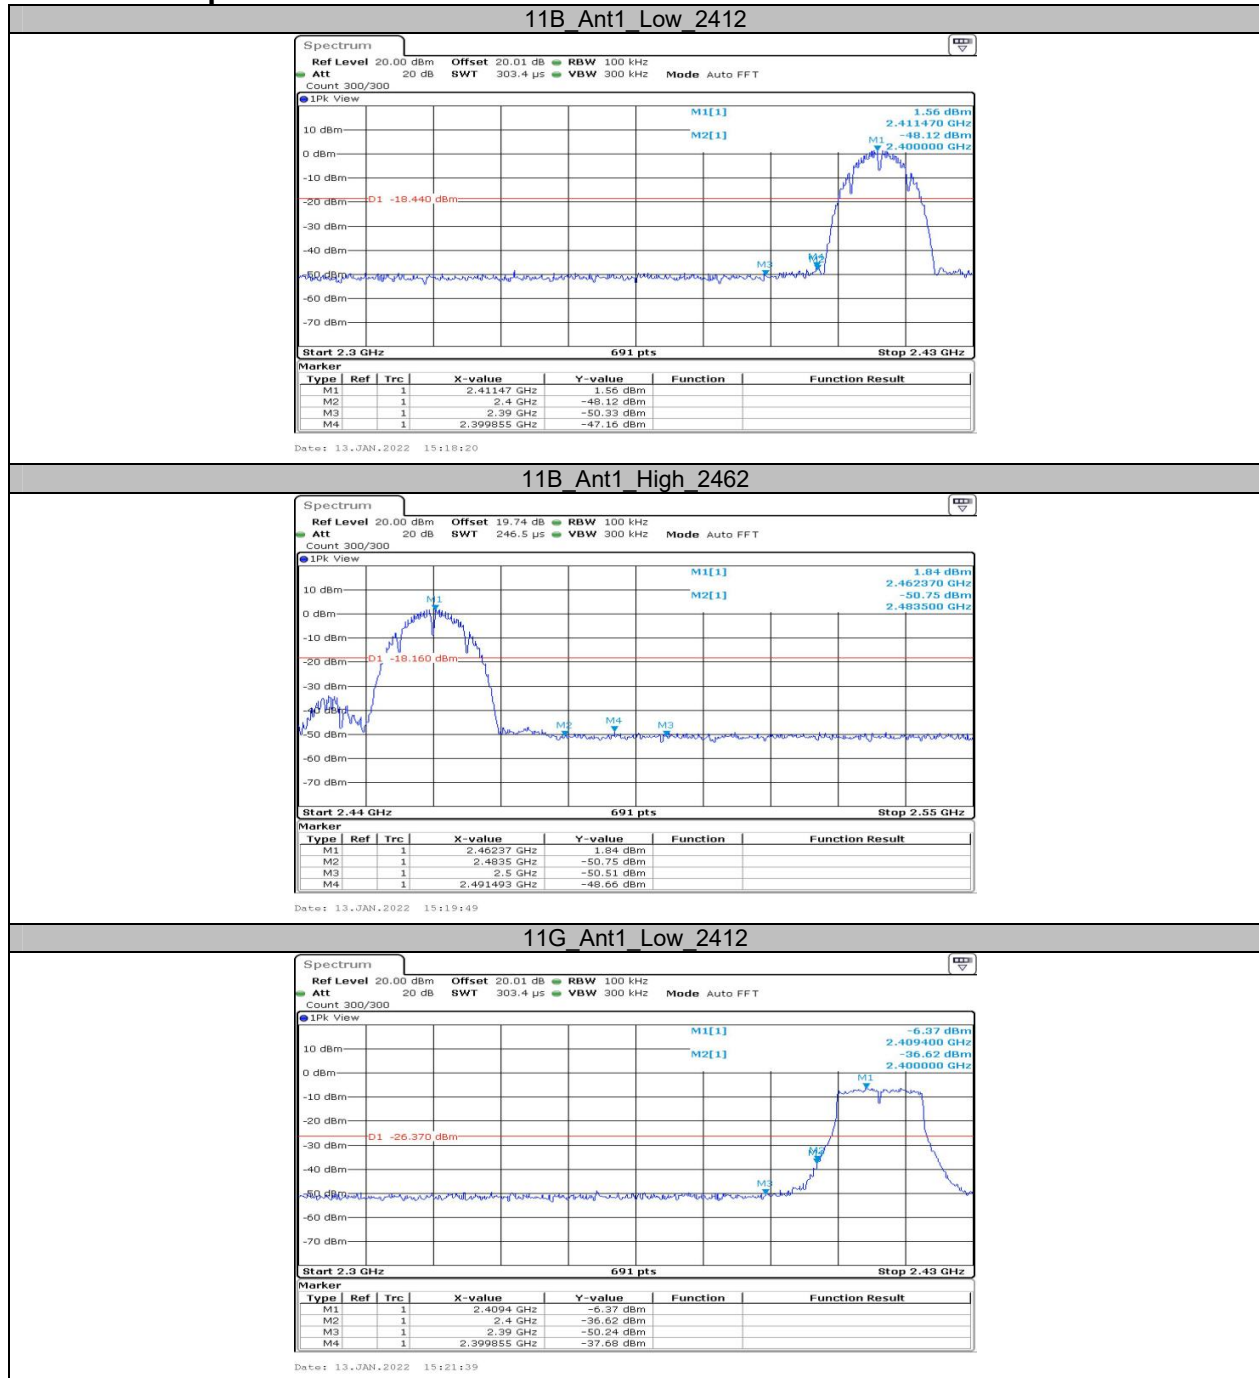




Appendix F: Duty Cycle Test Result

| Test Mode | Antenna | Channel | Transmission Duration [ms] | Transmission Period [ms] | Duty Cycle [%] |
|-----------|---------|---------|----------------------------|--------------------------|----------------|
| 11B | Ant1 | 2437 | 30.00 | 30.00 | 100.00 |
| 11G | Ant1 | 2437 | 30.00 | 30.00 | 100.00 |
| 11N20SISO | Ant1 | 2437 | 30.00 | 30.00 | 100.00 |

Test Graphs

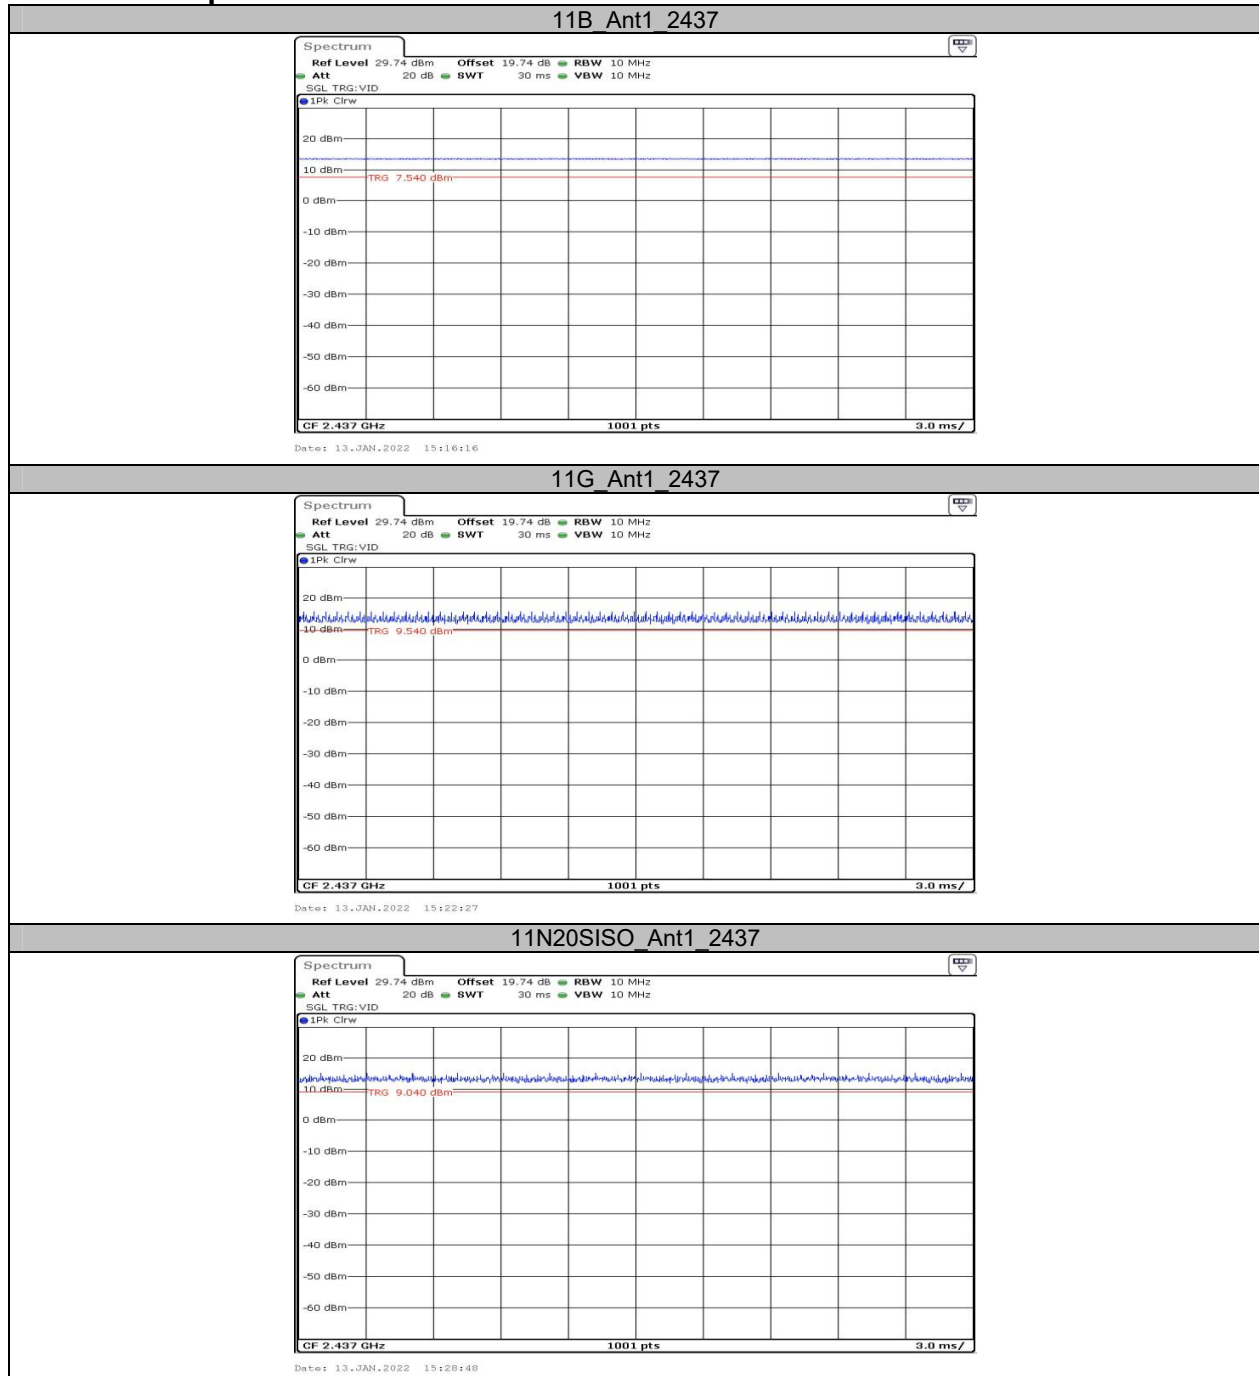

APPENDIX BLE

Appendix A: DTS Bandwidth Test Result

| Test Mode | Antenna | Channel | DTS BW [MHz] | Limit[MHz] | Verdict |
|-----------|---------|---------|--------------|------------|---------|
| BLE_1M | Ant1 | 2402 | 0.660 | 0.5 | PASS |
| | | 2440 | 0.656 | 0.5 | PASS |
| | | 2480 | 0.660 | 0.5 | PASS |


Test Graphs



**Appendix B: Occupied Channel Bandwidth
Test Result**

| Test Mode | Antenna | Channel | OCB [MHz] | Limit[MHz] | Verdict |
|-----------|---------|---------|-----------|------------|---------|
| BLE_1M | Ant1 | 2402 | 1.019 | --- | PASS |
| | | 2440 | 1.027 | --- | PASS |
| | | 2480 | 1.023 | --- | PASS |

Test Graphs

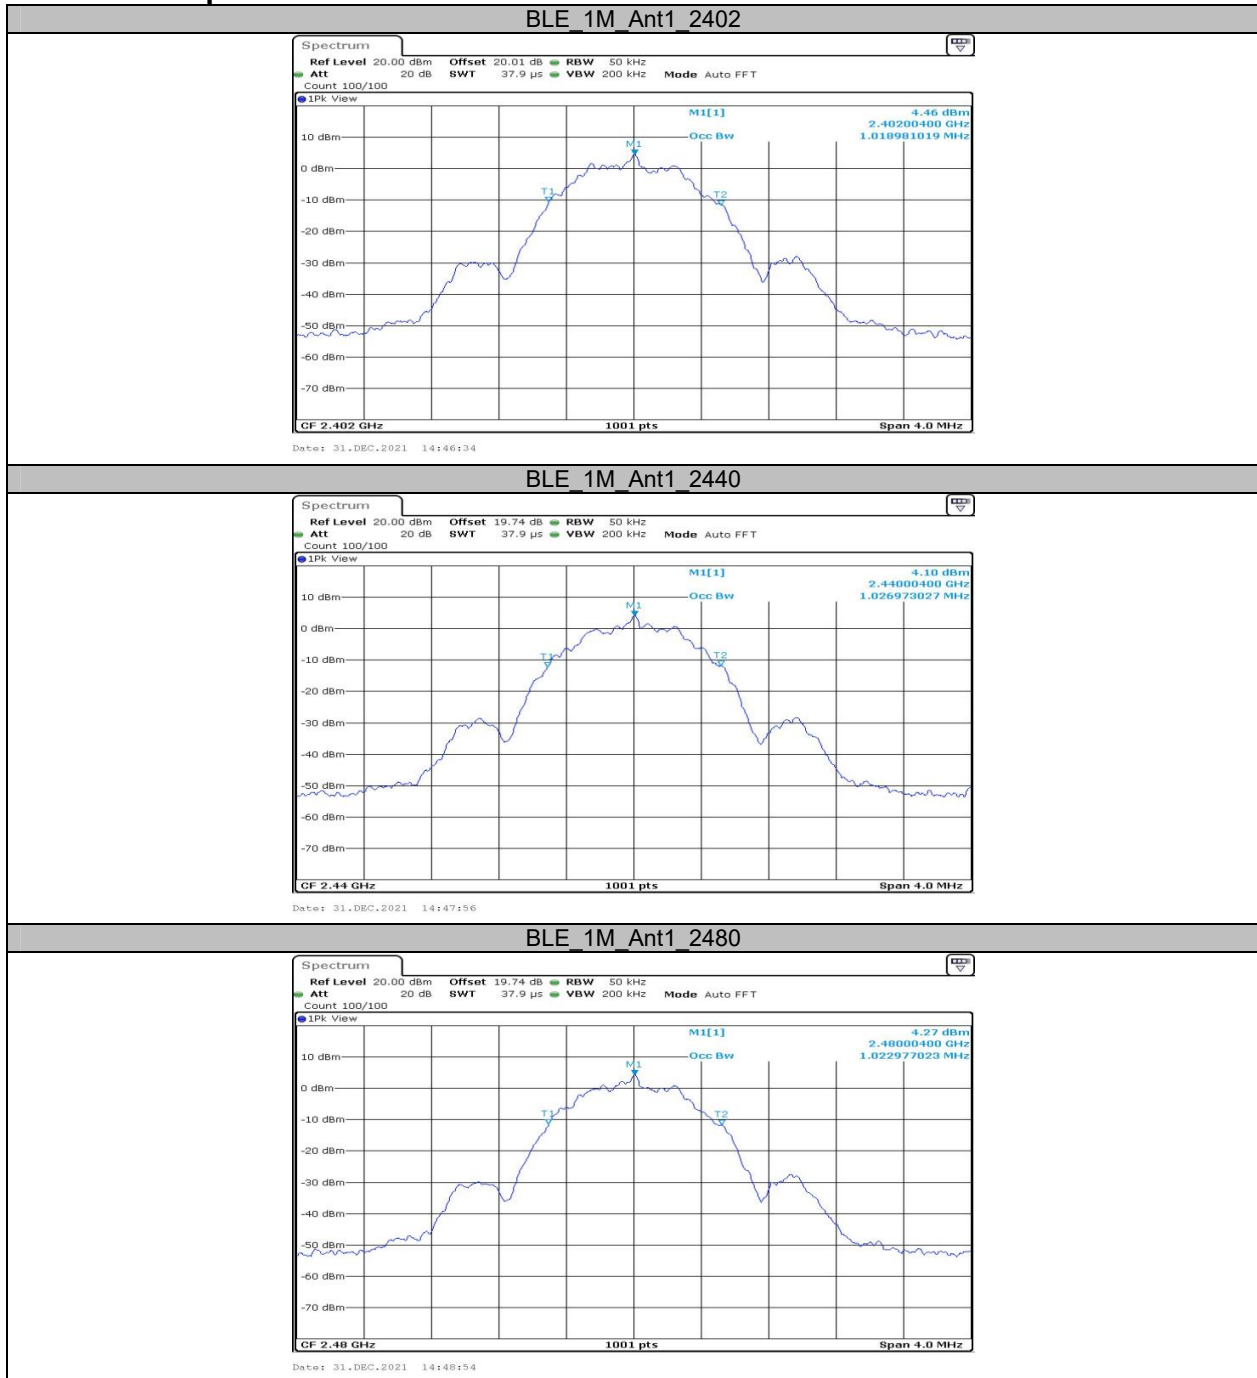


**Appendix C: Maximum conducted Peak output power
Test Result**

| Test Mode | Antenna | Channel | Result[dBm] | Limit[dBm] | Verdict |
|-----------|---------|---------|-------------|------------|---------|
| BLE_1M | Ant1 | 2402 | 5.66 | ≤30 | PASS |
| | | 2440 | 5.59 | ≤30 | PASS |
| | | 2480 | 5.74 | ≤30 | PASS |


**Appendix D: Maximum power spectral density
Test Result**

| Test Mode | Antenna | Channel | Result[dBm/3kHz] | Limit[dBm/3kHz] | Verdict |
|-----------|---------|---------|------------------|-----------------|---------|
| BLE_1M | Ant1 | 2402 | -10.11 | ≤8 | PASS |
| | | 2440 | -10.12 | ≤8 | PASS |
| | | 2480 | -9.99 | ≤8 | PASS |

Test Graphs

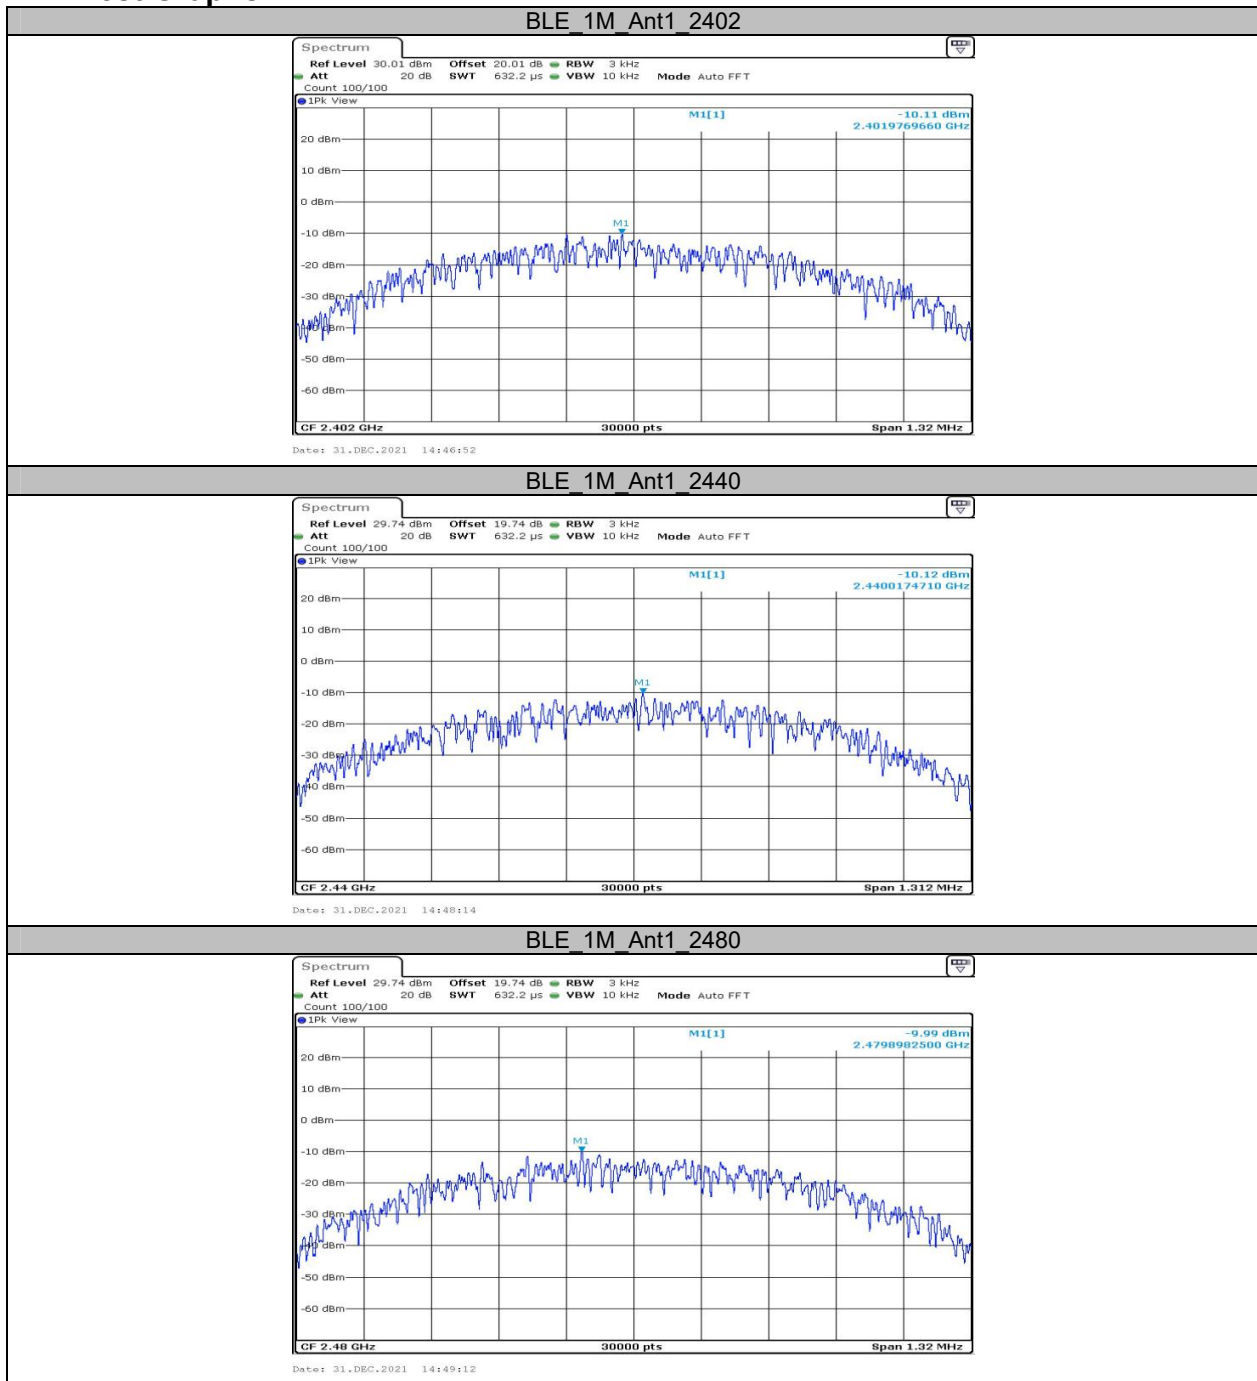


Appendix E: Band edge measurements Test Graphs

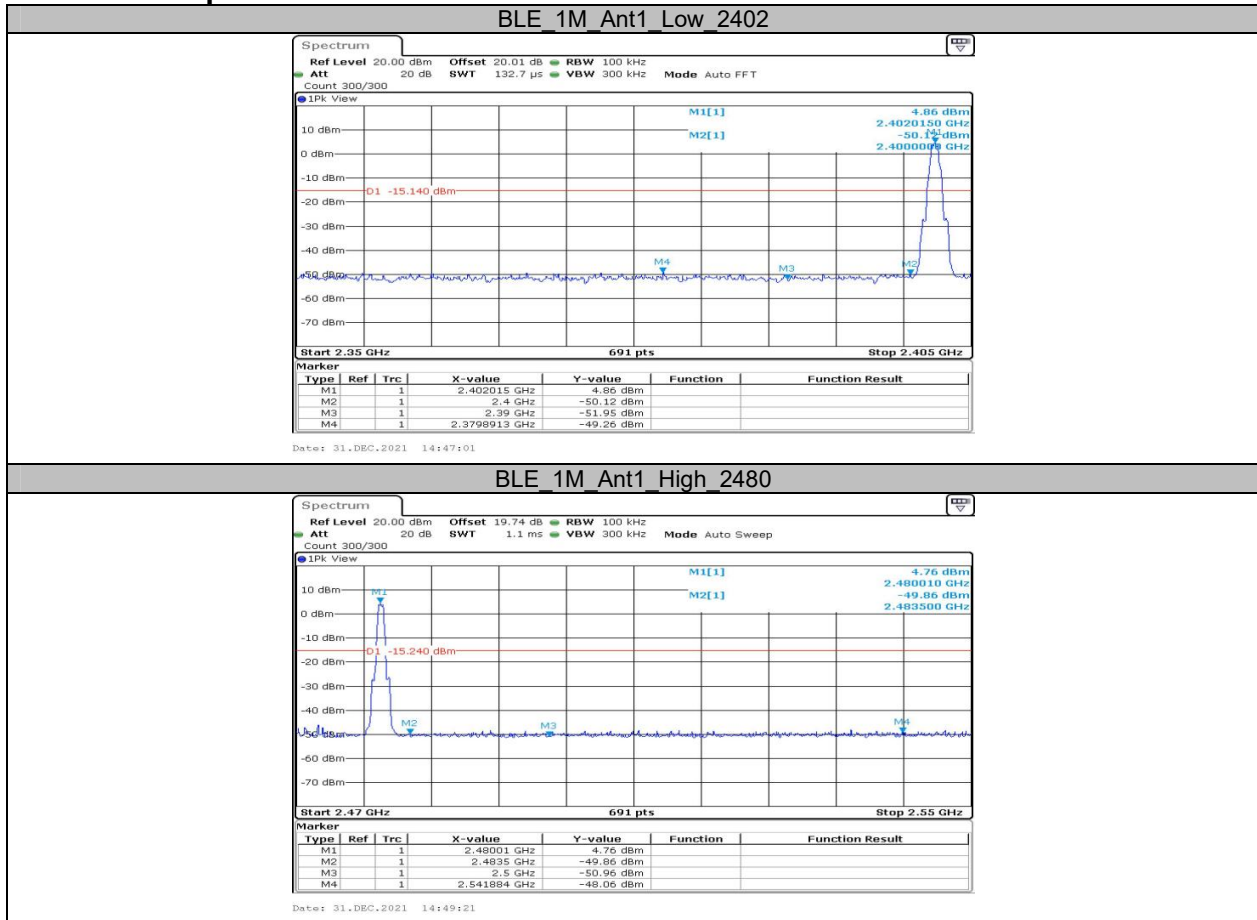

Appendix F: Duty Cycle Test Result

| TestMode | Antenna | Channel | Transmission Duration [ms] | Transmission Period [ms] | Duty Cycle [%] |
|----------|---------|---------|----------------------------|--------------------------|----------------|
| BLE_1M | Ant1 | 2440 | 0.40 | 0.63 | 63.49 |

Test Graphs

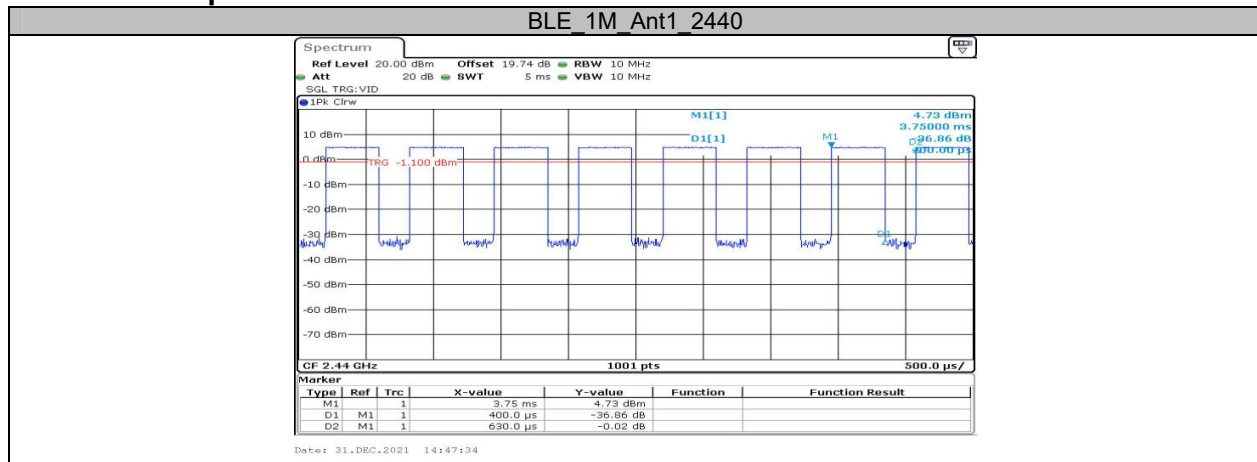

***** END OF REPORT *****