



# FCC TEST REPORT

**Test report  
On Behalf of  
Shenzhen Simo Electronics Co., Ltd  
For  
Mini Wireless Stereo Earphone With Bluetooth  
Wireless Technology  
Model No.: MBH530  
  
FCC ID: 2AQARMBH530**

**Prepared for :** Shenzhen Simo Electronics Co., Ltd  
#201, 2and Building, 3rd Industrial Park, Xin Sheng Industrial Park, XinSheng  
Community, Long Cheng Street, Long Gang District, ShenZhen

**Prepared By :** Shenzhen HUAK Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China

**Date of Test:** Aug. 31, 2018 ~ Sep. 05, 2018  
**Date of Report:** Sep. 11, 2018  
**Report Number:** HUAK180830938E



### TEST RESULT CERTIFICATION

**Applicant's name** ..... : Shenzhen Simo Electronics Co., Ltd  
 #201, 2and Building, 3rd Industrial Park, Xin Sheng Industrial Park,  
**Address** ..... : XinSheng Community, Long Cheng Street, Long Gang District,  
 ShenZhen  
**Manufacture's Name** ..... : Shenzhen Simo Electronics Co., Ltd  
 #201, 2and Building, 3rd Industrial Park, Xin Sheng Industrial Park,  
**Address** ..... : XinSheng Community, Long Cheng Street, Long Gang District,  
 ShenZhen

**Product description**

**Trade Mark** ..... : MAGNAVOX Craig  
**Product Name** ..... : Mini Wireless Stereo Earphone With Bluetooth Wireless  
 Technology  
**Model and/or type reference** : MBH530  
**Series Model** ..... : CBH530  
**Difference Description** ..... : All the same except for the model name.

**Standards** ..... : FCC Rules and Regulations Part 15 Subpart C Section 15.249  
 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** ..... :  
**Date (s) of performance of tests** ..... : Aug. 31, 2018 ~ Sep. 05, 2018  
**Date of Issue** ..... : Sep. 11, 2018  
**Test Result** ..... : **Pass**

Testing Engineer : Gary Qian  
 (Gary Qian)

Technical Manager : Eden Hu  
 (Eden Hu)

Authorized Signatory : Jason Zhou  
 (Jason Zhou)



<b>TABLE OF CONTENTS</b>	<b>PAGE</b>
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 . GENERAL DESCRIPTION OF EUT	5
2.2 . CARRIER FREQUENCY OF CHANNELS	6
2.3 . OPERATION OF EUT DURING TESTING	6
2.4 . DESCRIPTION OF TEST SETUP	7
2.5. EQUIPMENT USED IN EUT SYSTEM	7
2.6. MEASUREMENT INSTRUMENTS LIST	8
3 . CONDUCTED EMISSIONS TEST	9
3.1. LIMITS OF LINE CONDUCTED EMISSION TEST	9
3.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	9
3.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	10
3.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	10
3.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	10
4. RADIATED EMISSION TEST	11
4.1TEST LIMIT	11
4.2. MEASUREMENT PROCEDURE	12
4.3. TEST SETUP	14
4.4. TEST RESULT	16
5. BAND EDGE	37
5.1. MEASUREMENT PROCEDURE	37
5.2 TEST SETUP	37
5.3 RADIATED TEST RESULT	38
6. OCCUPIED BANDWIDTH MEASUREMENT	42
6.1. MEASUREMENT PROCEDURE	42
6.2. TEST SET-UP	42
6.3. LIMITS AND MEASUREMENT RESULTS	42
7. ANTENNA REQUIREMENT	49
8. PHOTOGRAPH OF TEST	50
9. PHOTOGRAPHS OF EUT	52



## 1. TEST SUMMARY

### 1.1. TEST PROCEDURES AND RESULTS

DESCRIPTION OF TEST	RESULT
CONDUCTED EMISSIONS TEST	N/A
RADIATED EMISSION TEST	COMPLIANT
BAND EDGE	COMPLIANT
OCCUPIED BANDWIDTH MEASUREMENT	COMPLIANT
ANTENNA REQUIREMENT	COMPLIANT

Note: N/A means it's not applicable to this item.

### 1.2. TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,  
Fuhai Street, Bao'an District, Shenzhen City, China

Designation Number: : CN1229

Test Firm Registration Number : 616276

### 1.3. MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2



## 2. GENERAL INFORMATION

### 2.1. GENERAL DESCRIPTION OF EUT

<b>Operation Frequency</b>	2.402 GHz to 2.480GHz
<b>Bluetooth Version</b>	V4.2
<b>Modulation</b>	BR <input checked="" type="checkbox"/> GFSK, EDR <input checked="" type="checkbox"/> $\pi$ /4-DQPSK, <input checked="" type="checkbox"/> 8DPSK BLE <input type="checkbox"/> GFSK
<b>Number of channels</b>	79 for BR/EDR
<b>Hardware Version</b>	V1.0
<b>Software Version</b>	V1.0
<b>Antenna Designation</b>	Ceramic Antenna
<b>Antenna Gain</b>	0dBi
<b>Power Supply</b>	DC 3.7V by battery
Note: 1. The BT function of EUT didn't work when charging. 2. The EUT comprises left and right channel headsets, both are the same and have been tested. Only the test data of left headset recorded in this report.	



## 2.2. CARRIER FREQUENCY OF CHANNELS

### BR/EDR Channel List

Frequency Band	Channel Number	Frequency
2400~2483.5MHz	0	2402MHz
	1	2403MHz
	:	:
	38	2440 MHz
	39	2441 MHz
	40	2442 MHz
	:	:
	77	2479 MHz
	78	2480 MHz

## 2.3. OPERATION OF EUT DURING TESTING

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel $\pi/4$ -DQPSK
5	Middle channel $\pi/4$ -DQPSK
6	High channel $\pi/4$ -DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	BT Link(Hopping mode)

**Note:**

1. All the test modes can be supply by battery, only the result of the worst case was recorded in the report, if no other cases.
2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
3. The EUT used fully-charged battery when tested.




### 2.4. DESCRIPTION OF TEST SETUP

Configure 1: (Normal hopping)



Configure 2: (Control continuous TX)

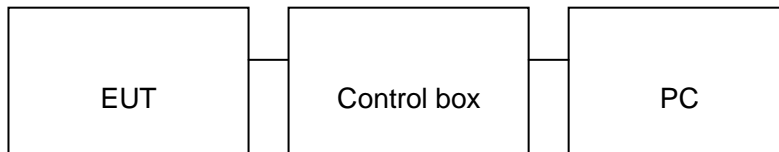

### 2.5. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Mfr/Brand	Model/Type No.	Remark
1	Mini Wireless Stereo Earphone With Bluetooth Wireless Technology	MAGNAVOX Craig	MBH530	EUT
2	Battery	N/A	401214	Accessory
3	PC	APPLE	A1465	A.E
4	Control box	DOFLY	N/A	A.E
5	IPOD	APPLE	A1367	A.E
6	USB Cable	N/A	1m unshielded	A.E

**2.6. MEASUREMENT INSTRUMENTS LIST****TEST EQUIPMENT OF RADIATED EMISSION TEST**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
2.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
4.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
5.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
6.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
7.	Broad-band Horn Antenna	Schwarzbeck	LB-180400-KF	HKE-031	Dec. 28, 2017	1 Year
8.	Pre-amplifier	EMCI	EMC051845SE	HKE-015	Dec. 28, 2017	1 Year
9.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
10.	Filter (2.4-2.483GHz)	Micro-tronics	087	--	N/A	N/A
11.	Radiation Cable 1	MXT	HK1	R05	N/A	N/A
12.	Radiation Cable 2	MXT	HK1	R06	N/A	N/A



### 3. CONDUCTED EMISSIONS TEST


#### 3.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.( dBuV)	Average( dBuV)
150kHz~500kHz	66-56	56-46
500kHz~5MHz	56	46
5MHz~30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

#### 3.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

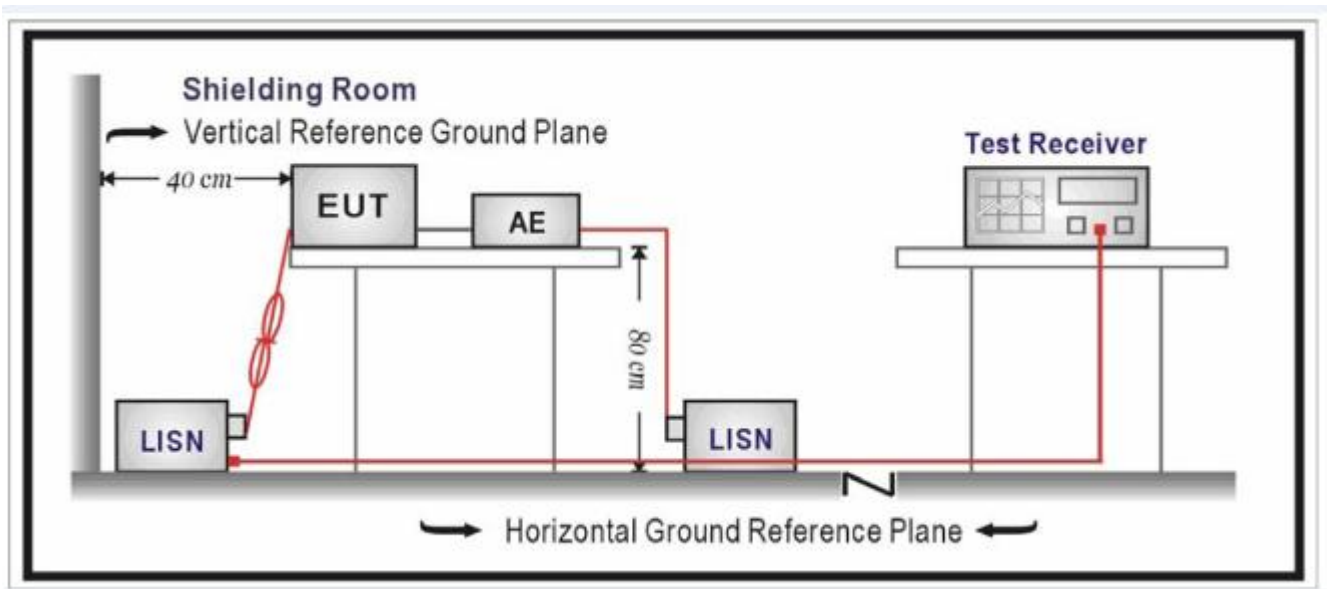



### 3.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
2. Support equipment, if needed, was placed as per ANSI C63.10-2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013.
4. All support equipments received AC120V/60Hz power from a LISN, if any.
5. The EUT received DC charging voltage by adapter or PC which received 120V/60Hz power by a LISN.
6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.
9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

### 3.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less  $-2\text{dB}$  to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
3. The test data of the worst case condition(s) was reported on the Summary Data page.

### 3.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A

Note: The BT function of EUT didn't work when charging.



## 4. RADIATED EMISSION TEST

### 4.1 TEST LIMIT

#### Standard FCC15.249

Fundamental Frequency	Field Strength of Fundamental (millivolts/meter)	Field Strength of Harmonics (microvolts/meter)
900-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

#### Standard FCC 15.209

Frequency (MHz)	Distance Meters	Field Strengths Limit	
		$\mu$ V/m	dB( $\mu$ V)/m
0.009 ~ 0.490	300	2400/F(kHz)	---
0.490 ~ 1.705	30	24000/F(kHz)	---
1.705 ~ 30	30	30	---
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
960 ~ 1000	3	500	54.0
Above 1000	3	Other:74.0 dB( $\mu$ V)/m (Peak) 54.0 dB( $\mu$ V)/m (Average)	

Remark: (1) Emission level  $\text{dB}\mu\text{V} = 20 \log \text{Emission level } \mu\text{V/m}$   
 (2) The smaller limit shall apply at the cross point between two frequency bands.  
 (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.



## 4.2. MEASUREMENT PROCEDURE

1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak & AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)




The following table is the setting of spectrum analyzer and receiver.


<b>Spectrum Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	Fundamental: 2.4~2.483GHz RBW 2MHz/ VBW 6MHz for Peak, RBW 2MHz/ VBW 10Hz for Average Harmonics: 1GHz~25GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average
<b>Receiver Parameter</b>	<b>Setting</b>
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

### 4.3. TEST SETUP


Radiated Emission Test-Setup Frequency Below 30MHz

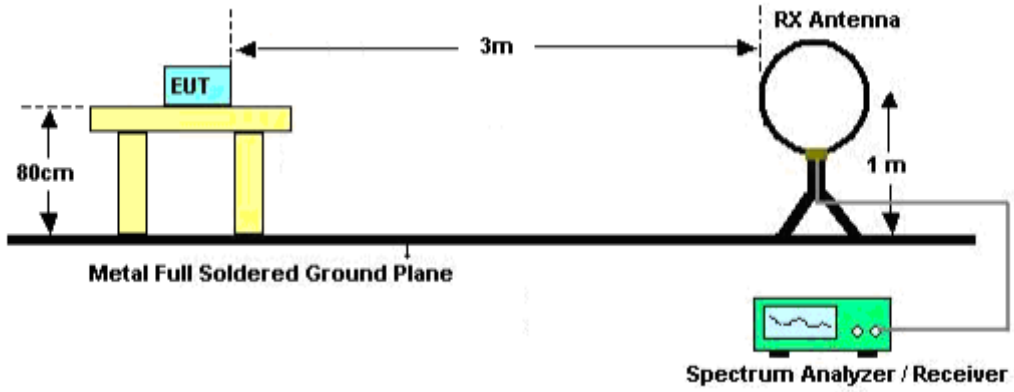

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

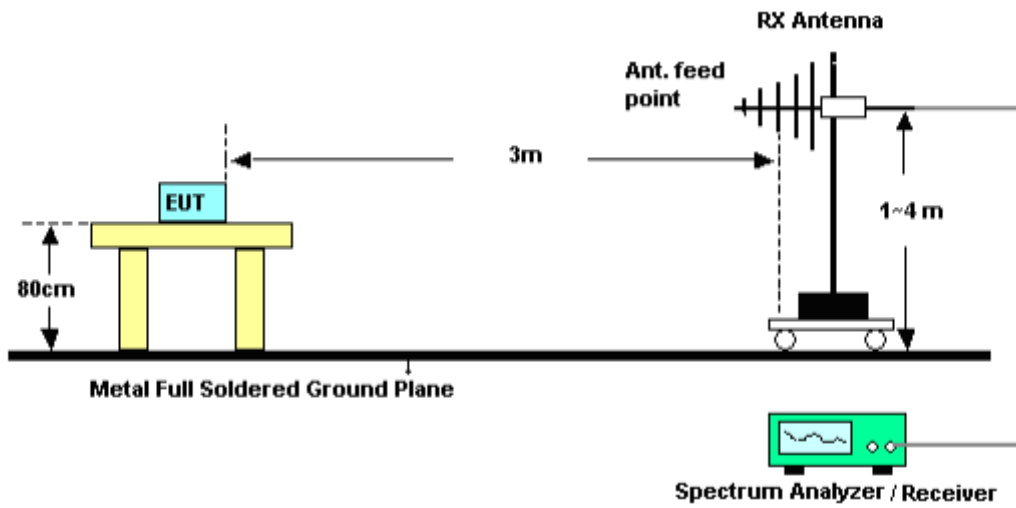

### RADIATED EMISSION TEST SETUP ABOVE 1000MHz

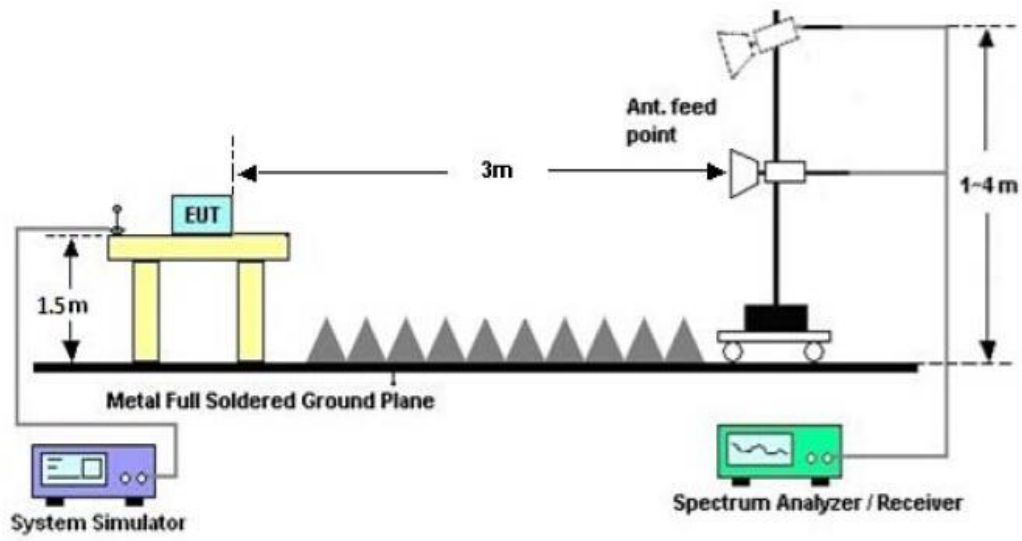



**4.4. TEST RESULT**

**FOR BR/EDR**


**(Worst modulation: GFSK)**

**RADIATED EMISSION BELOW 30MHz**

No emission found between lowest internal used/generated frequencies to 30MHz.

**RADIATED EMISSION BELOW 1GHz**

**RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL**

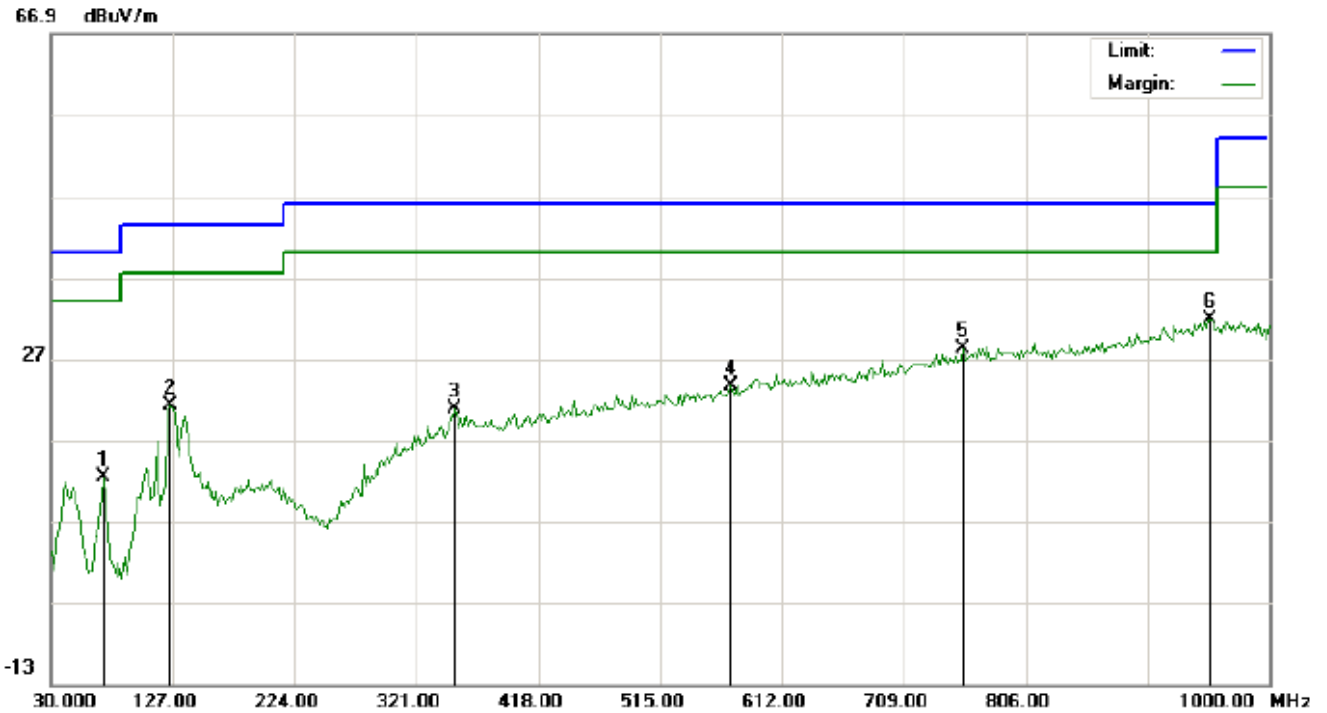


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		72.0333	4.14	8.28	12.42	40.00	-27.58	peak			
2		125.3833	12.82	8.37	21.19	43.50	-22.31	peak			
3		351.7167	1.98	18.75	20.73	46.00	-25.27	peak			
4		571.5833	0.55	23.02	23.57	46.00	-22.43	peak			
5		755.8832	1.51	26.71	28.22	46.00	-17.78	peak			
6	*	953.1167	1.86	29.97	31.83	46.00	-14.17	peak			

**RESULT: PASS**





RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

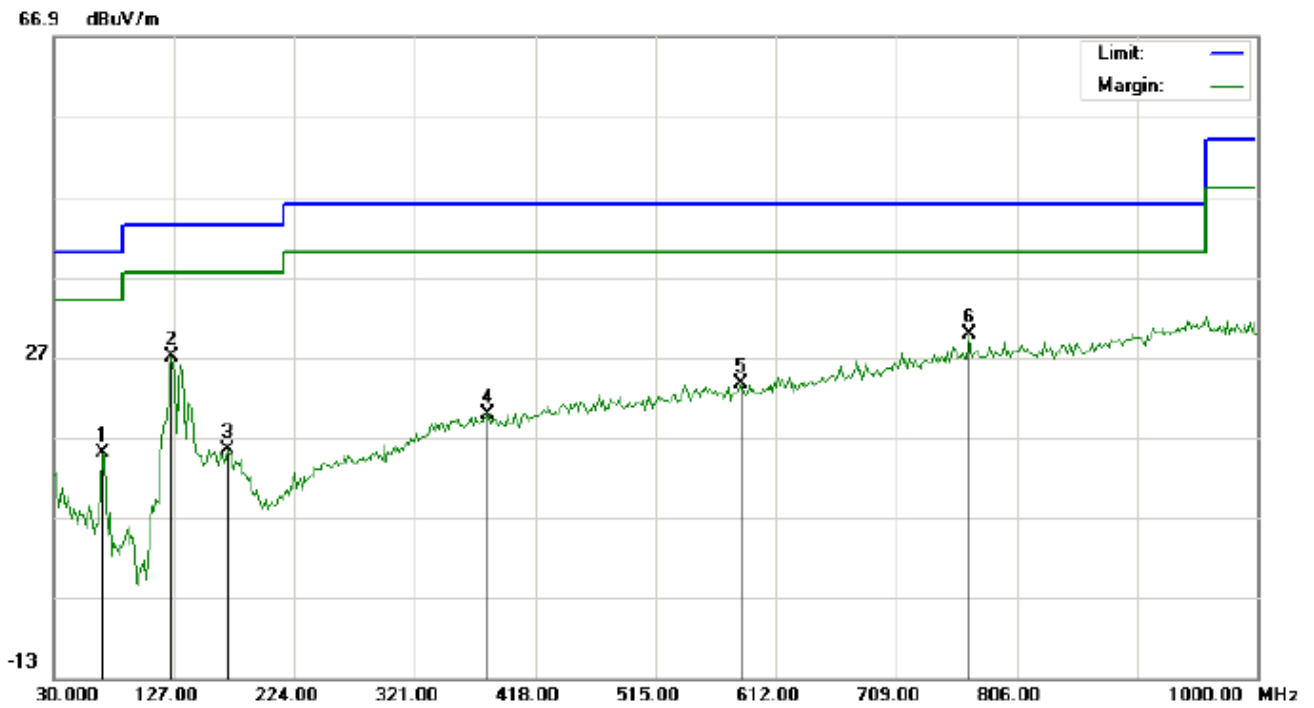

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		68.8000	10.36	4.73	15.09	40.00	-24.91	peak			
2		125.3833	17.96	9.10	27.06	43.50	-16.44	peak			
3		170.6500	0.73	14.66	15.39	43.50	-28.11	peak			
4		379.2000	0.94	18.93	19.87	46.00	-26.13	peak			
5		584.5167	1.04	22.65	23.69	46.00	-22.31	peak			
6	*	767.2000	3.00	26.87	29.87	46.00	-16.13	peak			


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

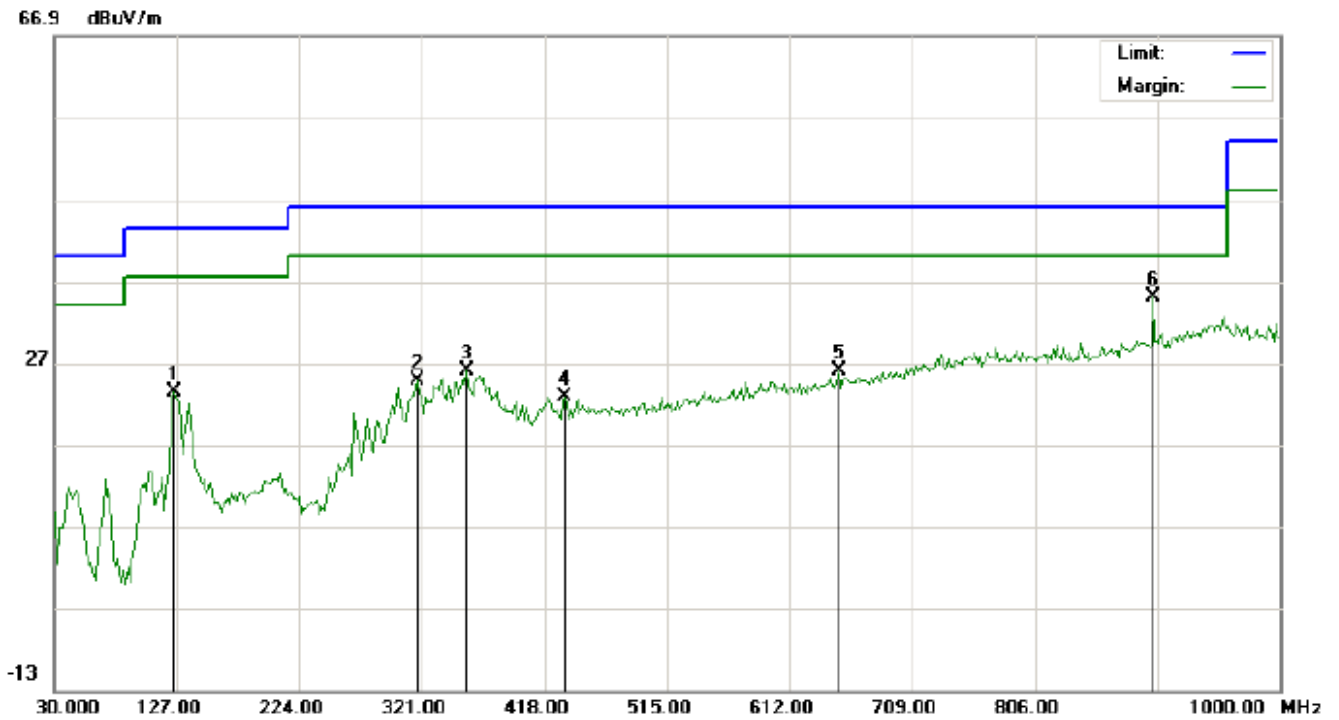


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		125.3833	15.12	8.37	23.49	43.50	-20.01	peak			
2		317.7667	8.23	16.59	24.82	46.00	-21.18	peak			
3		356.5667	7.15	18.78	25.93	46.00	-20.07	peak			
4		434.1667	2.79	20.11	22.90	46.00	-23.10	peak			
5		650.8000	2.13	23.87	26.00	46.00	-20.00	peak			
6	*	899.7667	6.34	28.60	34.94	46.00	-11.06	peak			

RESULT: PASS



RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

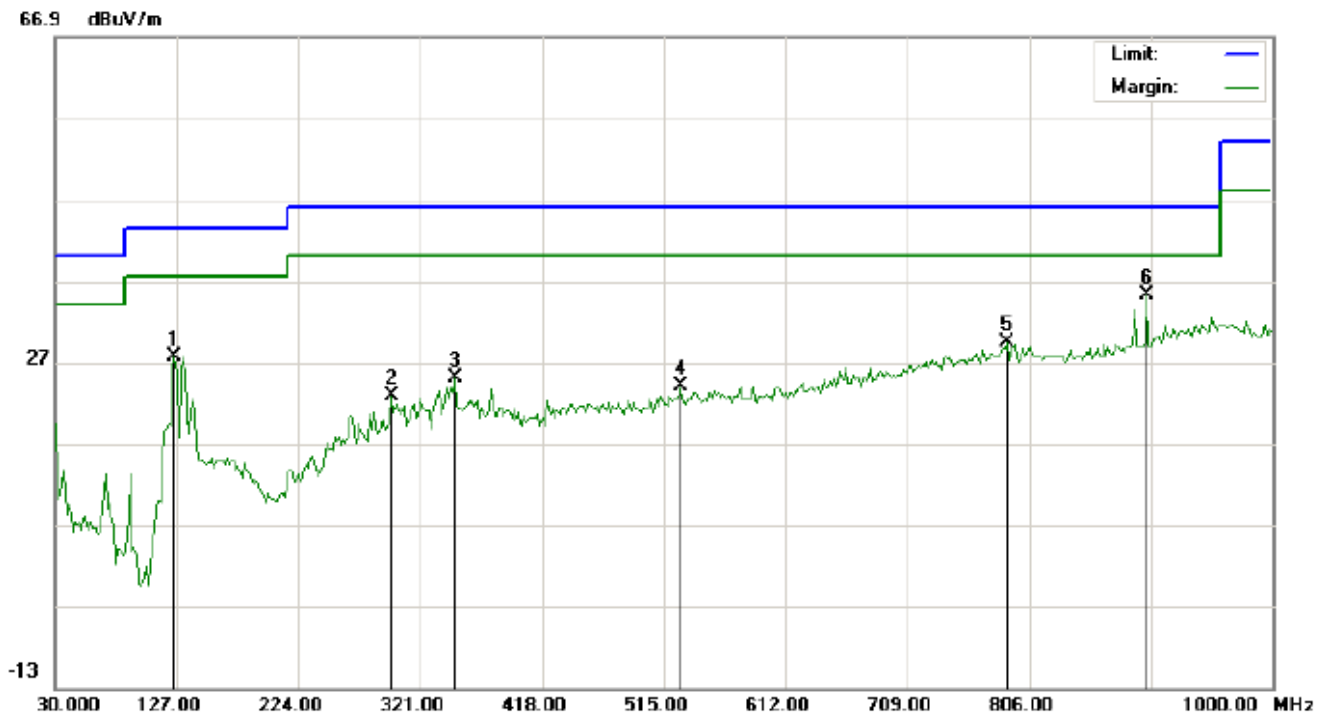

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		125.3833	18.54	9.10	27.64	43.50	-15.86	peak			
2		298.3667	7.48	15.36	22.84	46.00	-23.16	peak			
3		348.4833	6.42	18.64	25.06	46.00	-20.94	peak			
4		527.9333	2.07	21.88	23.95	46.00	-22.05	peak			
5		788.2167	2.20	27.16	29.36	46.00	-16.64	peak			
6	*	899.7667	6.63	28.60	35.23	46.00	-10.77	peak			


**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.



RADIATED EMISSION TEST- (30MHZ-1GHZ)-HIGH CHANNEL-HORIZONTAL

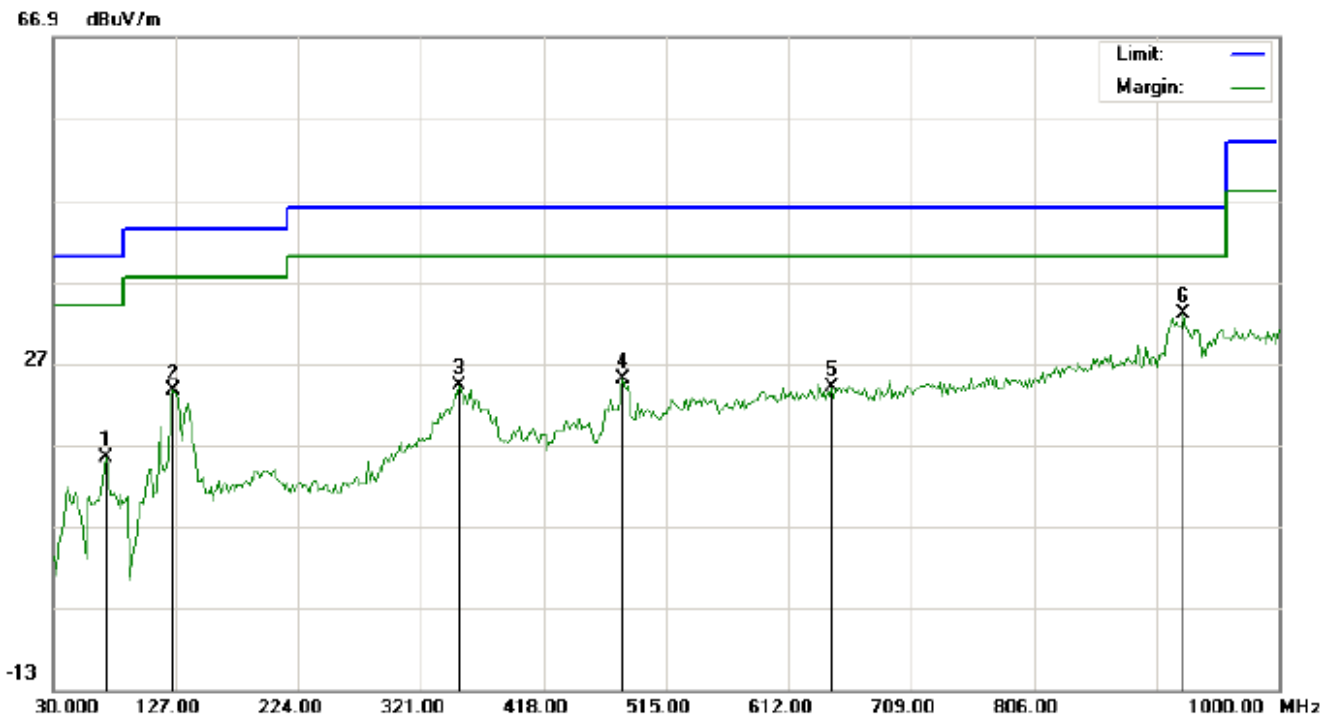


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		72.0332	7.14	8.28	15.42	40.00	-24.58	peak			
2		125.3833	15.32	8.37	23.69	43.50	-19.81	peak			
3		351.7167	5.48	18.75	24.23	46.00	-21.77	peak			
4		481.0500	4.02	20.93	24.95	46.00	-21.05	peak			
5		645.9500	0.11	23.84	23.95	46.00	-22.05	peak			
6	*	924.0167	3.76	29.28	33.04	46.00	-12.96	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

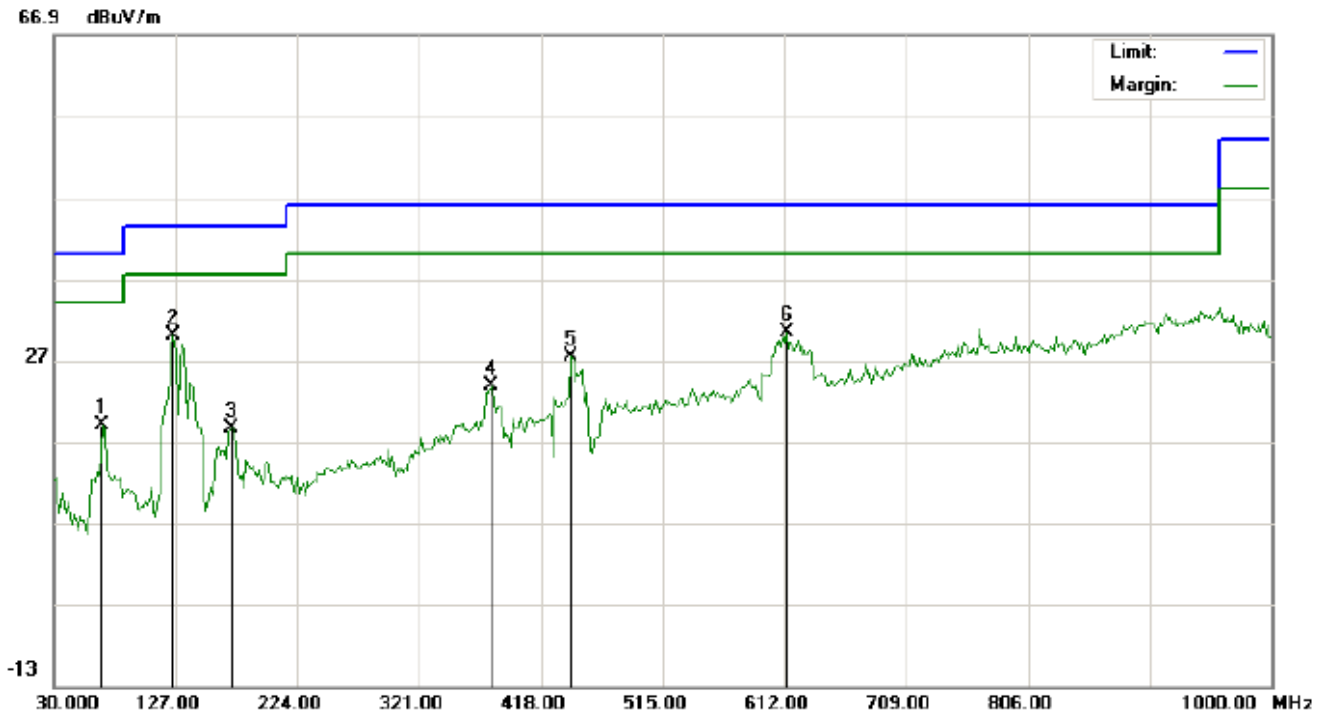

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		68.7999	14.36	4.73	19.09	40.00	-20.91	peak			
2	*	125.3833	20.96	9.10	30.06	43.50	-13.44	peak			
3		172.2666	3.95	14.56	18.51	43.50	-24.99	peak			
4		379.1999	4.94	18.93	23.87	46.00	-22.13	peak			
5		442.2500	6.99	20.35	27.34	46.00	-18.66	peak			
6		613.6167	7.36	23.04	30.40	46.00	-15.60	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.


2. The "Factor" value can be calculated automatically by software of measurement system.



**RADIATED EMISSION ABOVE 1GHz  
FOR BR/EDR  
(Worst modulation: GFSK)**

**For Fundamental**

RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL

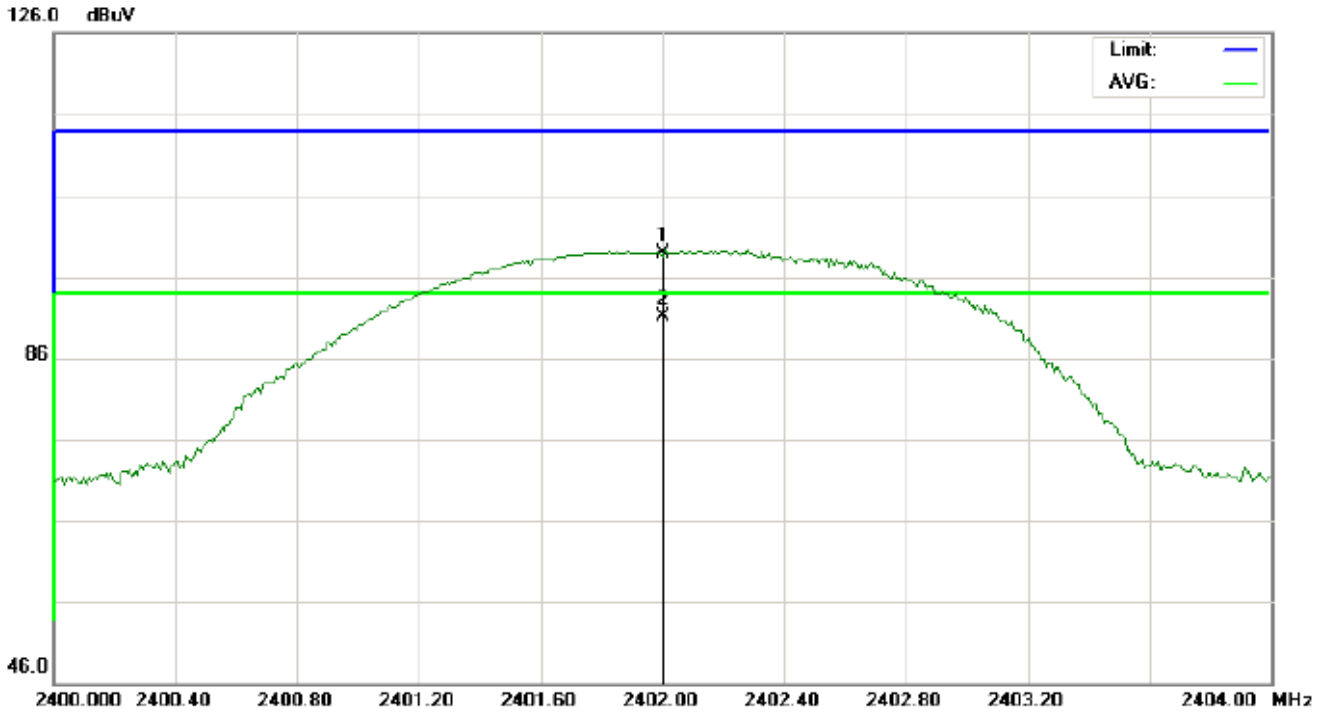


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2402.000	85.47	13.46	98.93	114.00	-15.07	peak			
2	*	2402.000	77.55	13.46	91.01	94.00	-2.99	AVG	100	83	

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

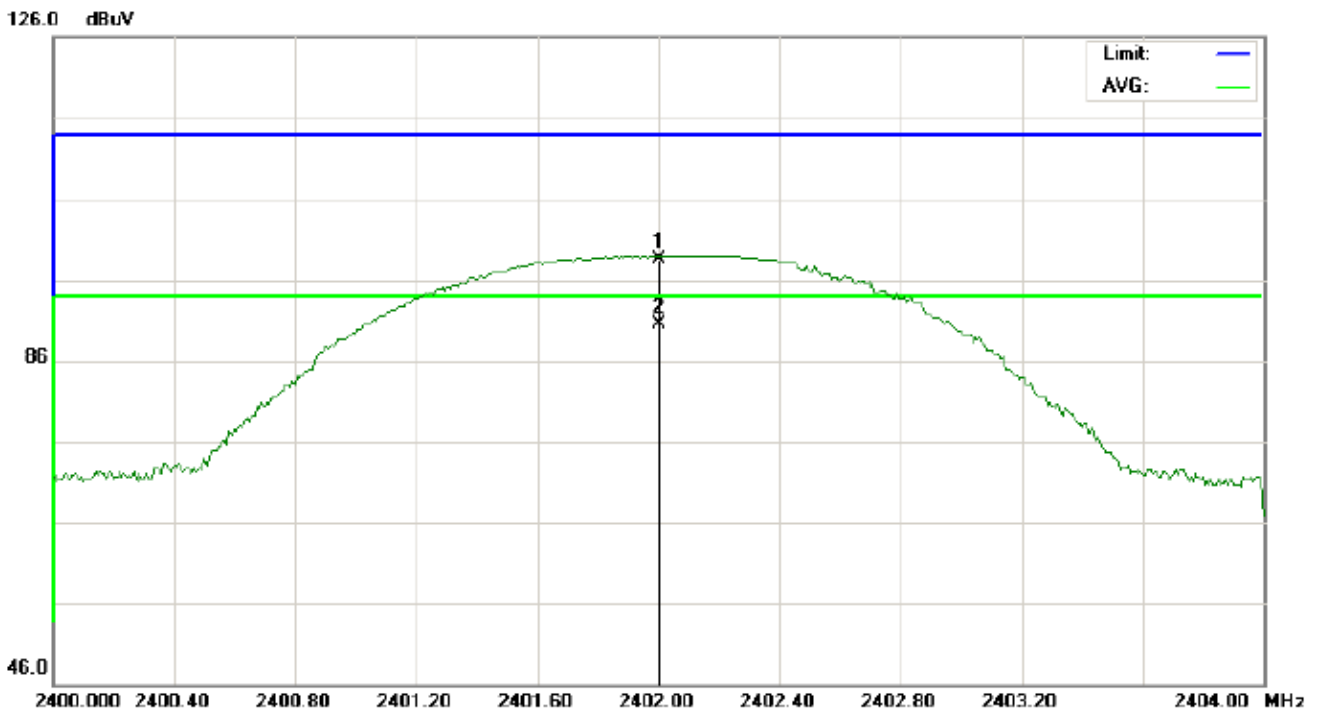


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2402.000	84.99	13.46	98.45	114.00	-15.55	peak			
2	*	2402.000	77.03	13.46	90.49	94.00	-3.51	AVG	100	212	

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL-HORIZONTAL

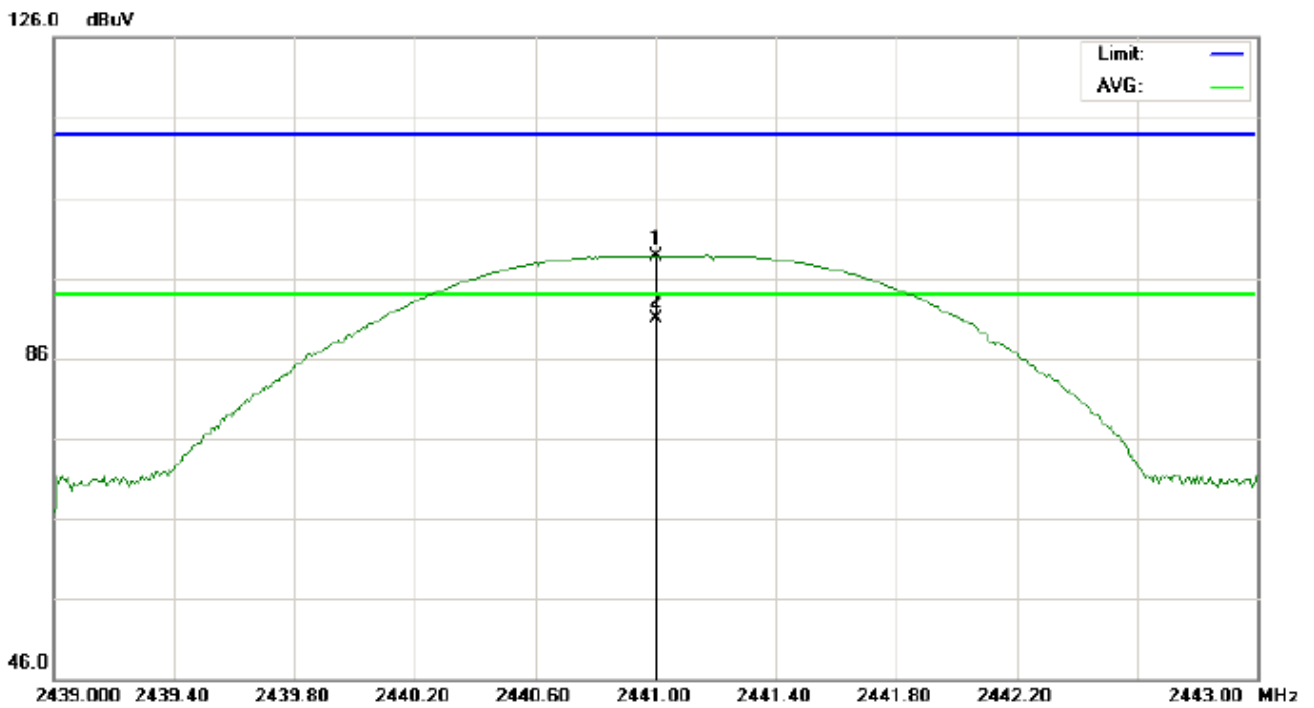

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2441.000	84.89	13.88	98.77	114.00	-15.23	peak			
2	*	2441.000	76.99	13.88	90.87	94.00	-3.13	AVG	100	90	


**RESULT: PASS**





RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

126.0 dBuV

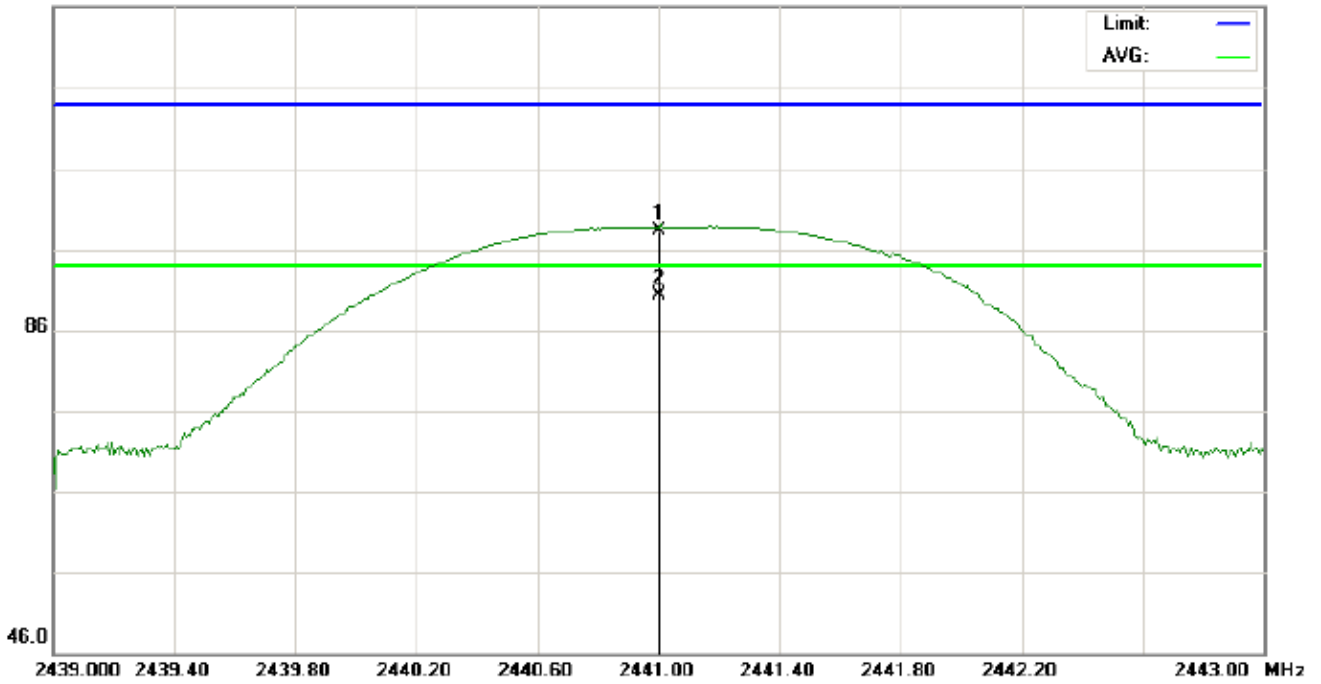


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2441.000	84.46	13.88	98.34	114.00	-15.66	peak			
2	*	2441.000	76.47	13.88	90.35	94.00	-3.65	AVG	100	215	

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

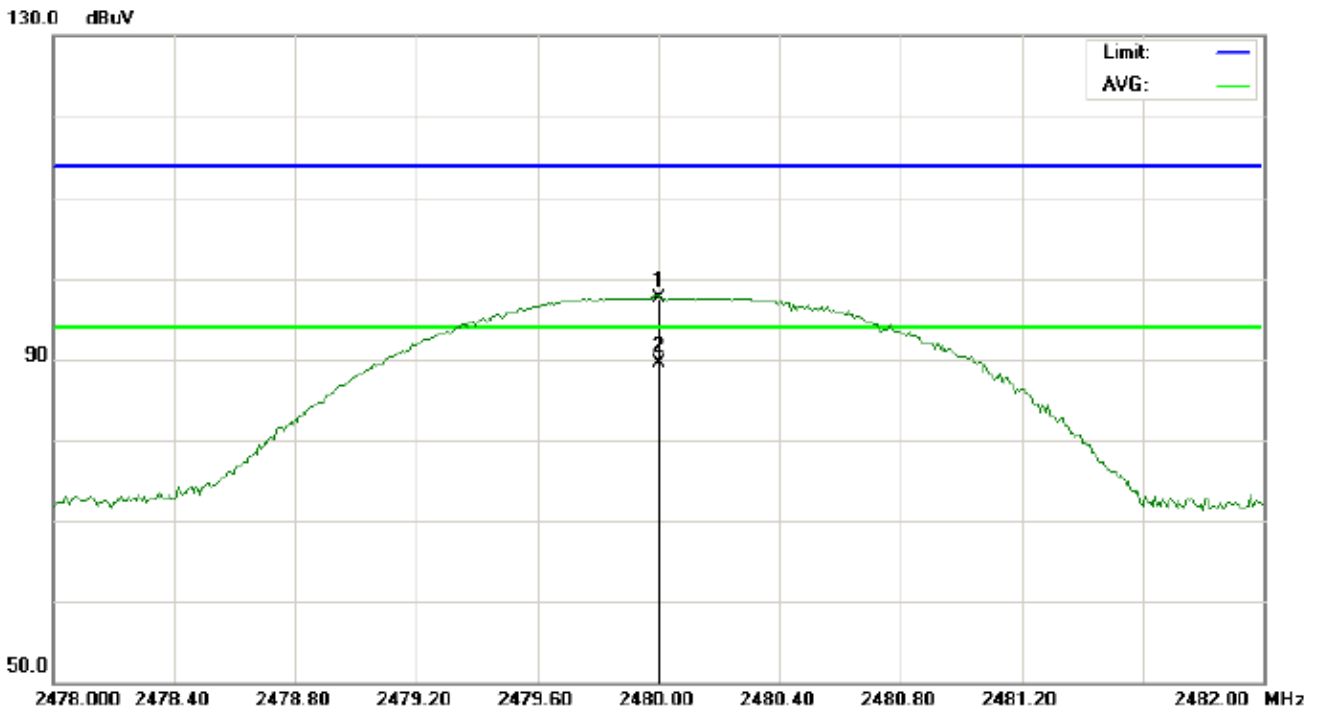


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2480.000	83.44	14.11	97.55	114.00	-16.45	peak			
2	*	2480.000	75.44	14.11	89.55	94.00	-4.45	AVG	100	134	

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

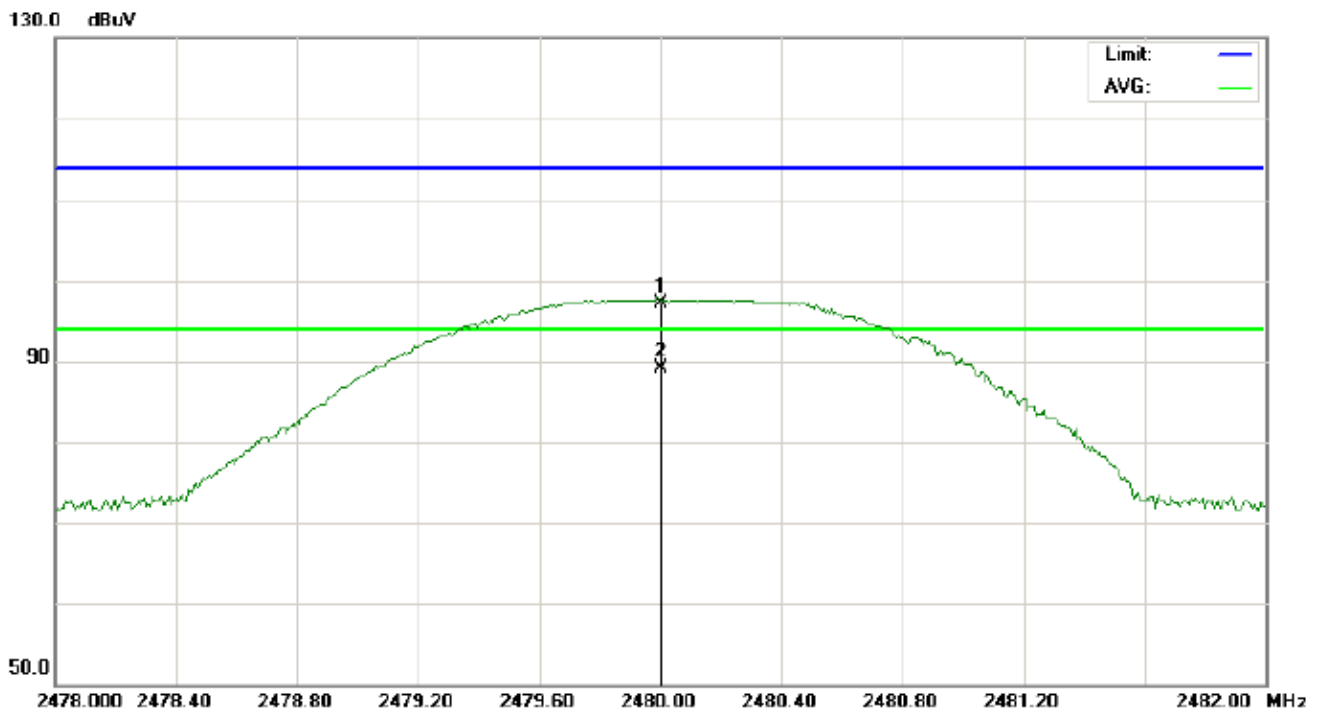

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		cm	degree	
1		2480.000	82.97	14.11	97.08	114.00	-16.92	peak			
2	*	2480.000	74.99	14.11	89.10	94.00	-4.90	AVG	100	206	

**RESULT: PASS**

**Note:** Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

**Field strength of the fundamental signal****1Mbps Result:****Peak value**

<b>Frequency</b>	<b>Reading Level</b>	<b>Factor</b>	<b>Measurement</b>	<b>Limit</b>	<b>Over</b>	<b>Antenna</b>
<b>(MHz)</b>	<b>(dBuv)</b>	<b>(dB/m)</b>	<b>(dBuv/m)</b>	<b>(dBuv/m)</b>	<b>(dB)</b>	<b>Polarization</b>
2402	85.47	13.46	98.93	114	-15.07	Horizontal
2402	84.99	13.46	98.45	114	-15.55	Vertical
2441	84.89	13.88	98.77	114	-15.23	Horizontal
2441	84.46	13.88	98.34	114	15.66	Vertical
2480	83.44	14.11	97.55	114	-16.45	Horizontal
2480	82.97	14.11	97.08	114	-16.92	Vertical

**Average value**

<b>Frequency</b>	<b>Reading Level</b>	<b>Factor</b>	<b>Measurement</b>	<b>Limit</b>	<b>Over</b>	<b>Antenna</b>
<b>(MHz)</b>	<b>(dBuv)</b>	<b>(dB/m)</b>	<b>(dBuv/m)</b>	<b>(dBuv/m)</b>	<b>(dB)</b>	<b>Polarization</b>
2402	77.55	13.46	91.01	94	-2.99	Horizontal
2402	77.03	13.46	90.49	94	-3.51	Vertical
2441	76.99	13.88	90.87	94	-3.13	Horizontal
2441	76.47	13.88	90.35	94	-3.65	Vertical
2480	75.44	14.11	89.55	94	-4.45	Horizontal
2480	74.99	14.11	89.10	94	-4.90	Vertical

**2Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	85.01	13.46	98.47	114	-15.53	Horizontal
2402	84.58	13.46	98.04	114	-15.96	Vertical
2441	84.48	13.88	98.36	114	-15.64	Horizontal
2441	84.02	13.88	97.90	114	-16.10	Vertical
2480	82.97	14.11	97.08	114	-16.92	Horizontal
2480	82.51	14.11	96.62	114	-17.38	Vertical

**Average value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	77.05	13.46	90.51	94	-3.49	Horizontal
2402	76.53	13.46	89.99	94	-4.01	Vertical
2441	76.52	13.88	90.40	94	-3.60	Horizontal
2441	75.98	13.88	89.86	94	-4.14	Vertical
2480	74.94	14.11	89.05	94	-4.95	Horizontal
2480	74.58	14.11	88.69	94	-5.31	Vertical

**3Mbps Result:****Peak value**

Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	84.55	13.46	98.01	114	-15.99	Horizontal
2402	84.10	13.46	97.56	114	-16.44	Vertical
2441	84.02	13.88	97.90	114	-16.10	Horizontal
2441	83.61	13.88	97.49	114	-16.51	Vertical
2480	82.50	14.11	96.61	114	-17.39	Horizontal
2480	82.05	14.11	96.16	114	-17.84	Vertical

**Average value**


Frequency	Reading Level	Factor	Measurement	Limit	Over	Antenna
(MHz)	(dBuv)	(dB/m)	(dBuv/m)	(dBuv/m)	(dB)	Polarization
2402	76.60	13.46	90.06	94	-3.94	Horizontal
2402	76.13	13.46	89.59	94	-4.41	Vertical
2441	76.07	13.88	89.95	94	-4.05	Horizontal
2441	75.57	13.88	89.45	94	-4.55	Vertical
2480	74.48	14.11	88.59	94	-5.41	Horizontal
2480	74.10	14.11	88.21	94	-5.79	Vertical



**FOR BR/EDR**  
**(Worst modulation: GFSK)**

**For Harmonics**

**RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL-HORIZONTAL**

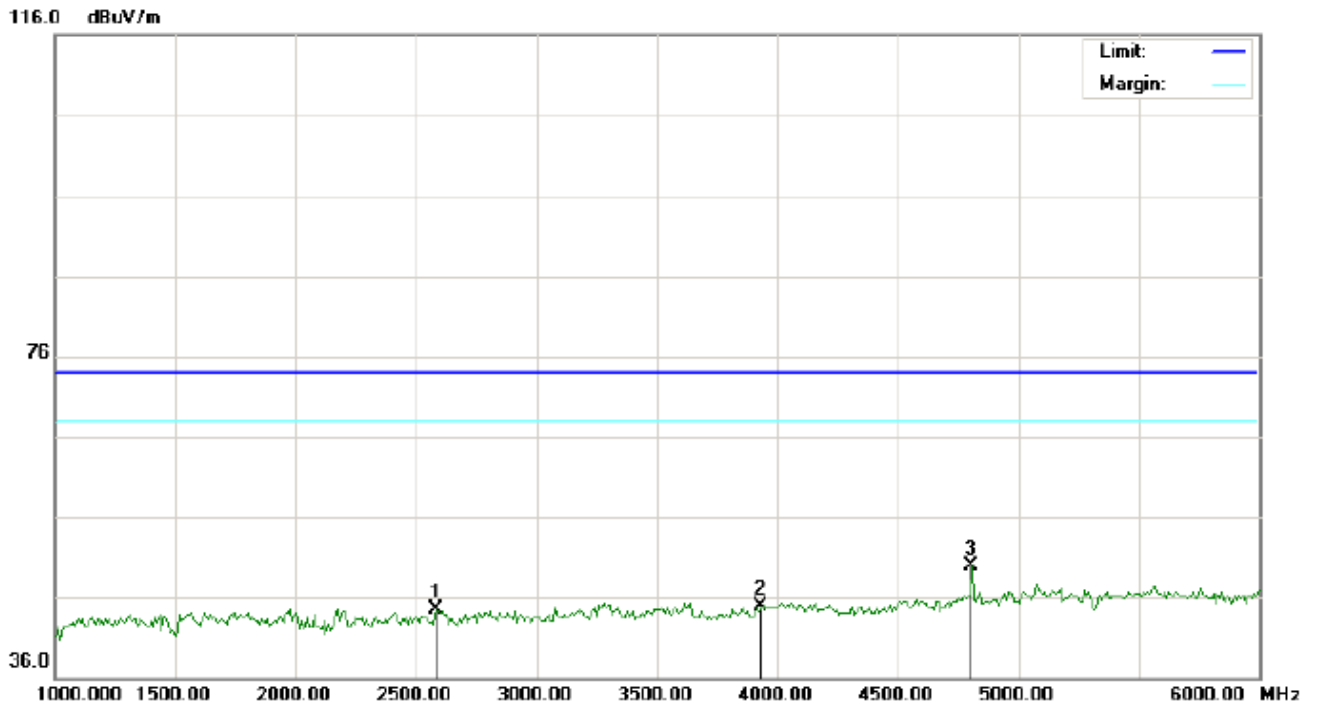


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2583.333	33.87	10.63	44.50	74.00	-29.50	peak			
2		3933.333	30.04	14.78	44.82	74.00	-29.18	peak			
3	*	4804.000	42.21	7.69	49.90	74.00	-24.10	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-LOW CHANNEL- VERTICAL

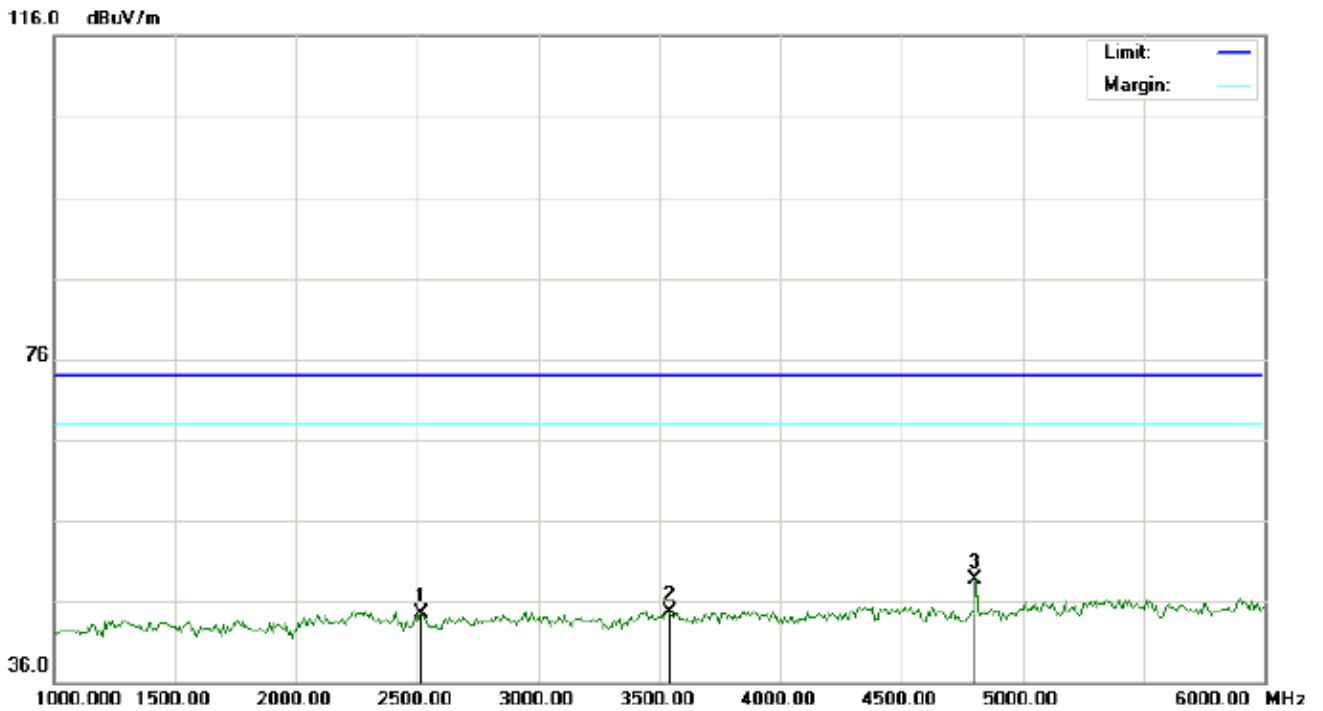


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2516.667	34.06	10.47	44.53	74.00	-29.47	peak			
2		3541.667	32.32	12.37	44.69	74.00	-29.31	peak			
3	*	4804.000	41.05	7.69	48.74	74.00	-25.26	peak			

RESULT: PASS





RADIATED EMISSION TEST- (ABOVE 1GHZ)-MIDDLE CHANNEL-HORIZONTAL

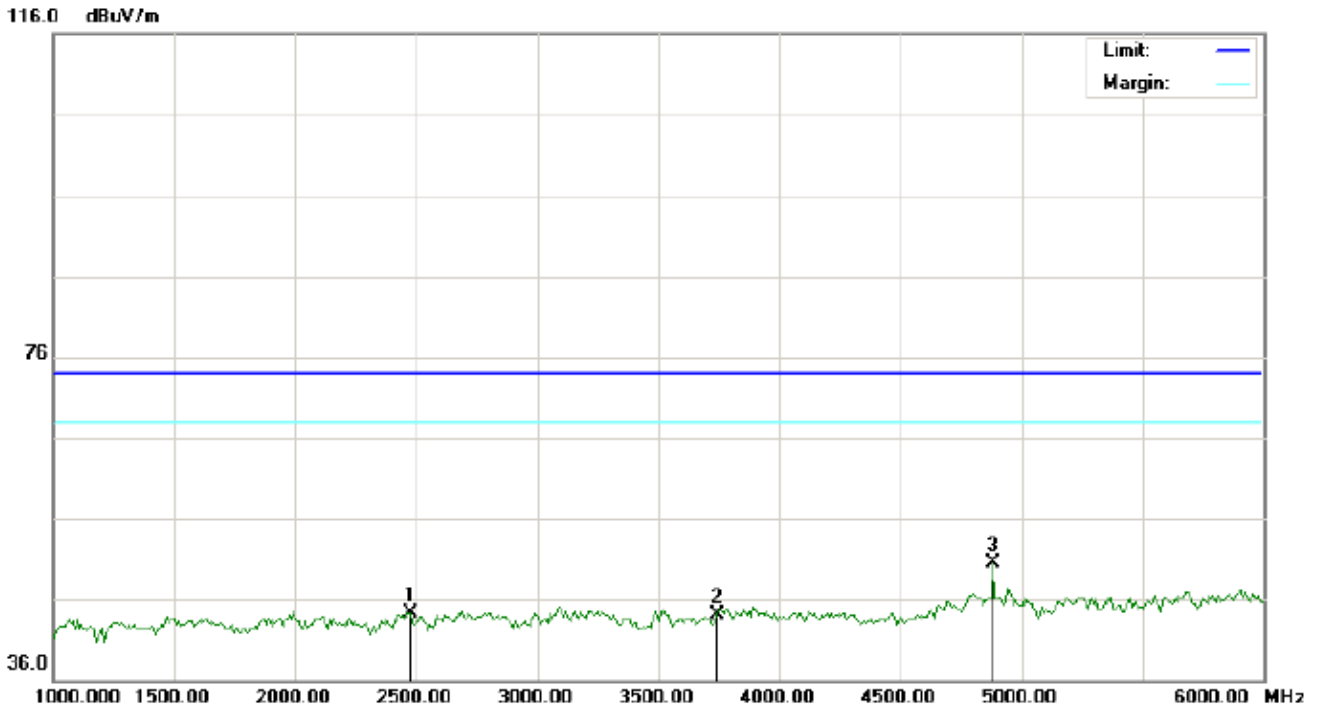


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1		2475.000	33.98	10.40	44.38	74.00	-29.62	peak	cm	degree	
2		3741.667	30.45	13.60	44.05	74.00	-29.95	peak			
3	*	4882.000	42.66	7.89	50.55	74.00	-23.45	peak			

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-MIDDLE CHANNEL- VERTICAL

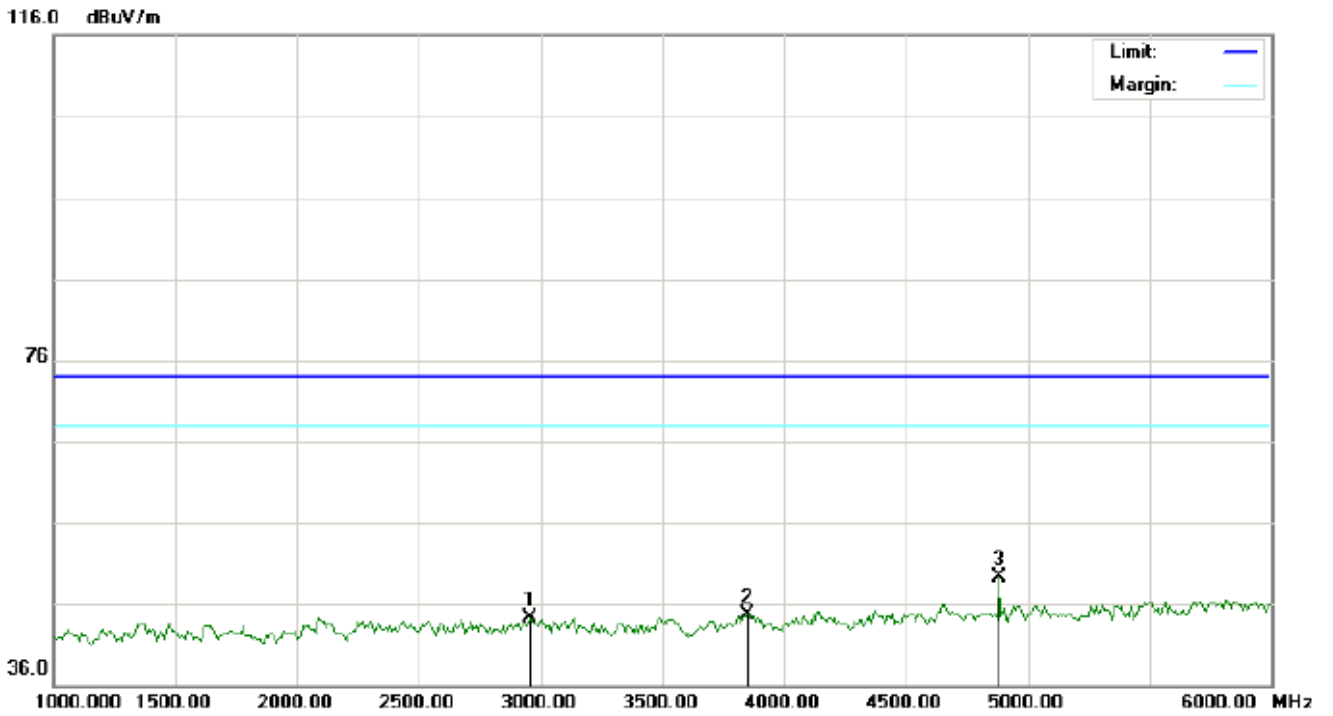


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		2958.333	32.77	11.54	44.31	74.00	-29.69	peak			
2		3850.000	30.43	14.27	44.70	74.00	-29.30	peak			
3	*	4882.000	41.39	7.89	49.28	74.00	-24.72	peak			

RESULT: PASS



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL-HORIZONTAL

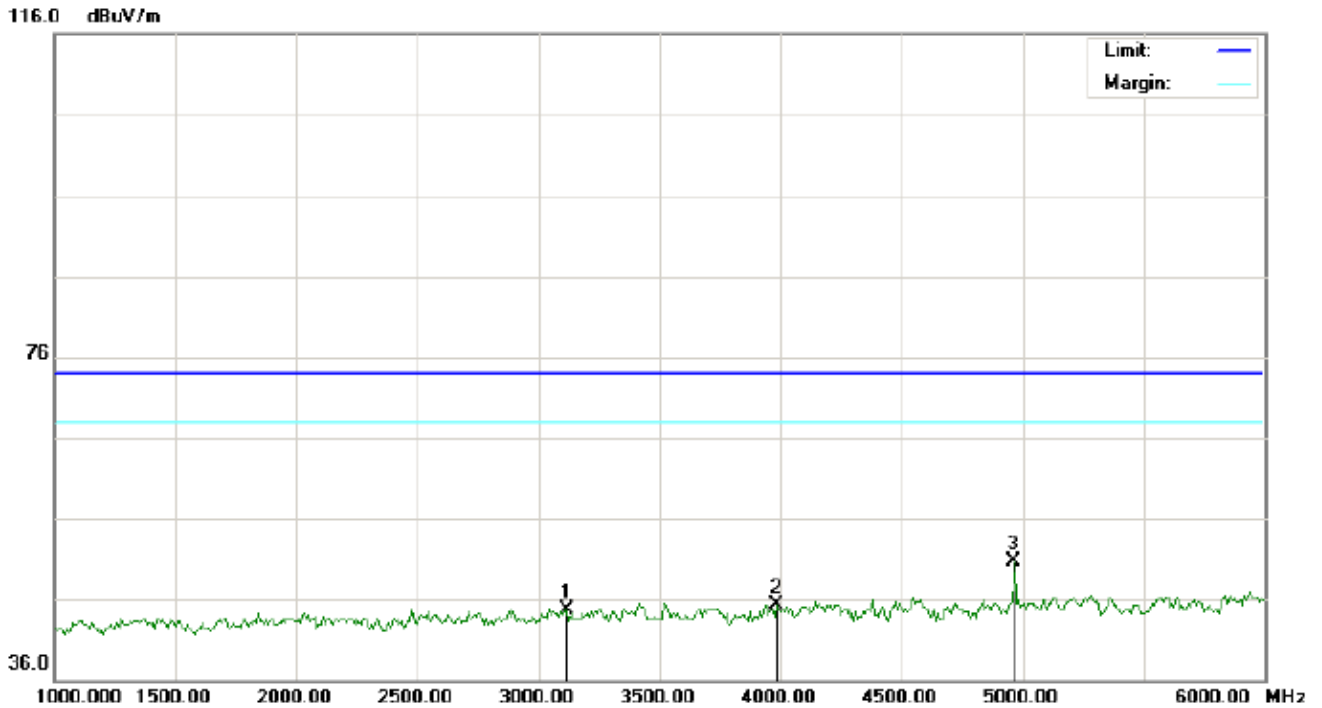


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		3116.667	33.05	11.75	44.80	74.00	-29.20	peak			
2		3983.333	30.30	15.09	45.39	74.00	-28.61	peak			
3	*	4960.000	42.60	8.09	50.69	74.00	-23.31	peak			

**RESULT: PASS**



RADIATED EMISSION TEST- (ABOVE 1GHz)-HIGH CHANNEL- VERTICAL

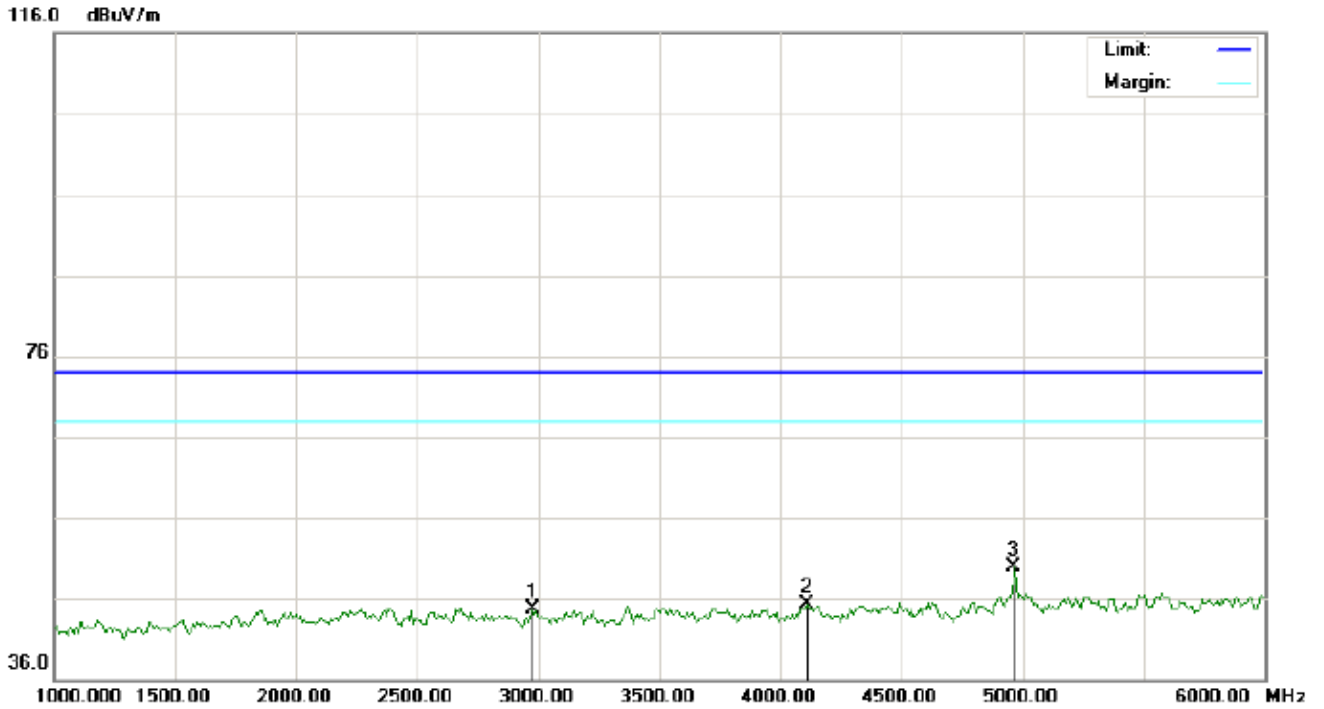

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2975.000	33.20	11.58	44.78	74.00	-29.22	peak			
2		4108.333	31.91	13.39	45.30	74.00	-28.70	peak			
3	*	4960.000	41.91	8.09	50.00	74.00	-24.00	peak			

**RESULT: PASS**

**Note:** 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

## 5. BAND EDGE


### 5.1. MEASUREMENT PROCEDURE

1. The EUT operates at hopping-off test mode. The lowest or highest channels are tested to verify the largest transmission and spurious emissions power at the continuous transmission mode.
2. Max hold the trace of the setup 1, and the EUT operates at hopping-on test mode to verify the largest spurious emissions power.
3. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission.

Start frequency(MHz)	Stop frequency(MHz)
2200	2405
2478	2500

### 5.2 TEST SETUP


RADIATED EMISSION TEST SETUP

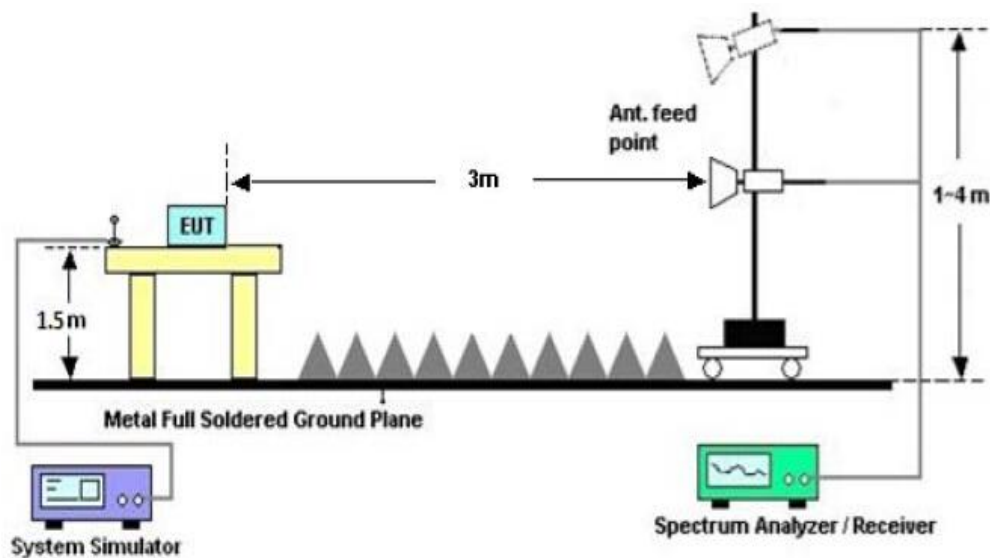



**5.3 RADIATED TEST RESULT  
FOR BR/EDR  
(Worst modulation: GFSK)**


TEST PLOT OF BAND EDGE FOR LOW CHANNEL-Horizontal

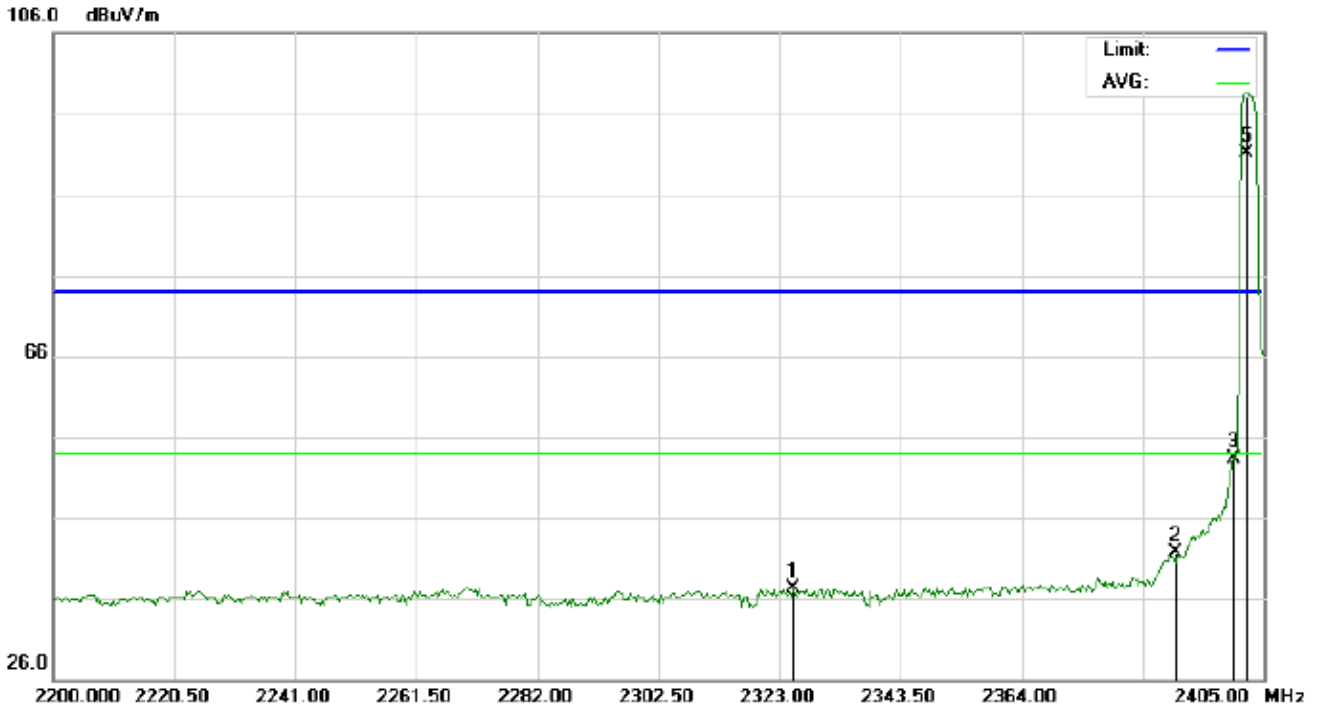

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2325.392	23.74	13.46	37.20	74.00	-36.80	peak			
2		2390.000	28.17	13.46	41.63	74.00	-32.37	peak			
3		2400.000	39.94	13.46	53.40	74.00	-20.60	peak			
4	X	2402.000	85.45	13.46	98.91	74.00	24.91	peak			
5	*	2402.000	77.57	13.46	91.03	54.00	37.03	AVG	100	99	




TEST PLOT OF BAND EDGE FOR LOW CHANNEL -Vertical

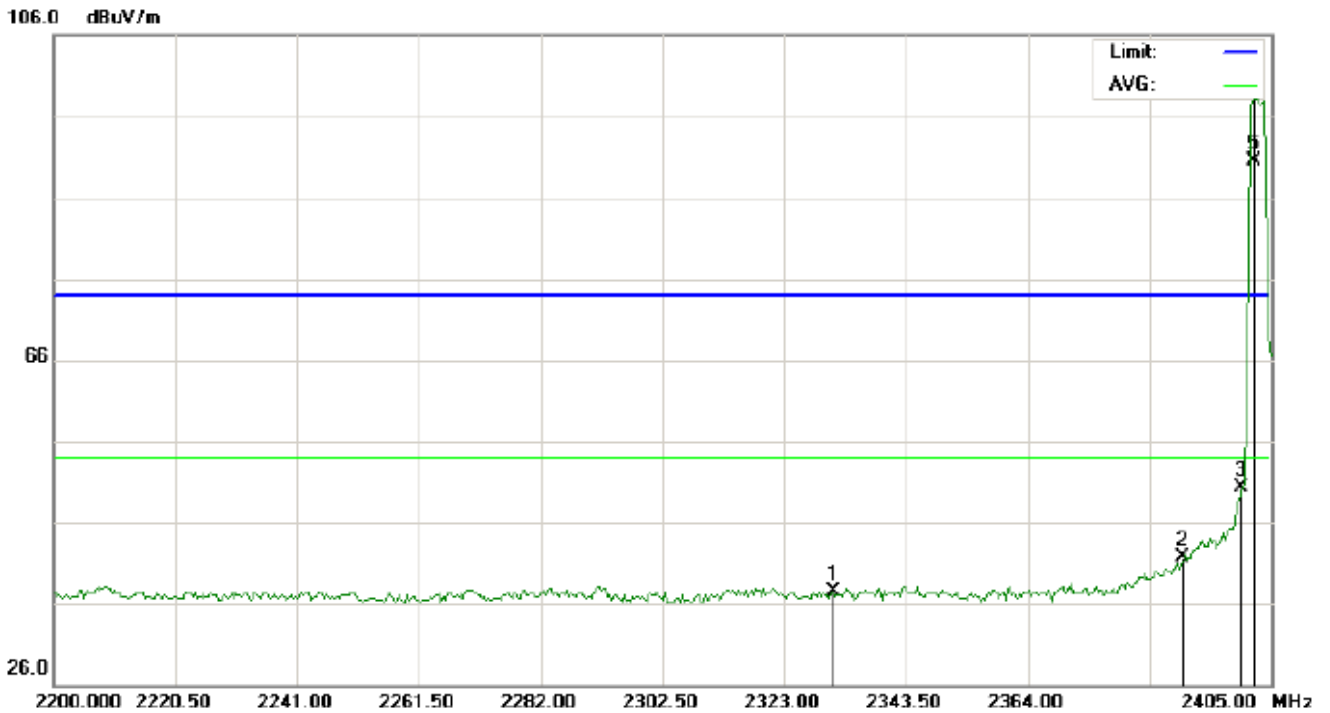

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		2331.200	24.05	13.46	37.51	74.00	-36.49	peak			
2		2390.000	28.17	13.46	41.63	74.00	-32.37	peak			
3		2400.000	36.94	13.46	50.40	74.00	-23.60	peak			
4	X	2402.000	84.96	13.46	98.42	74.00	24.42	peak			
5	*	2402.000	77.04	13.46	90.50	54.00	36.50	AVG	100	333	



TEST PLOT OF BAND EDGE FOR HIGH CHANNEL -Horizontal

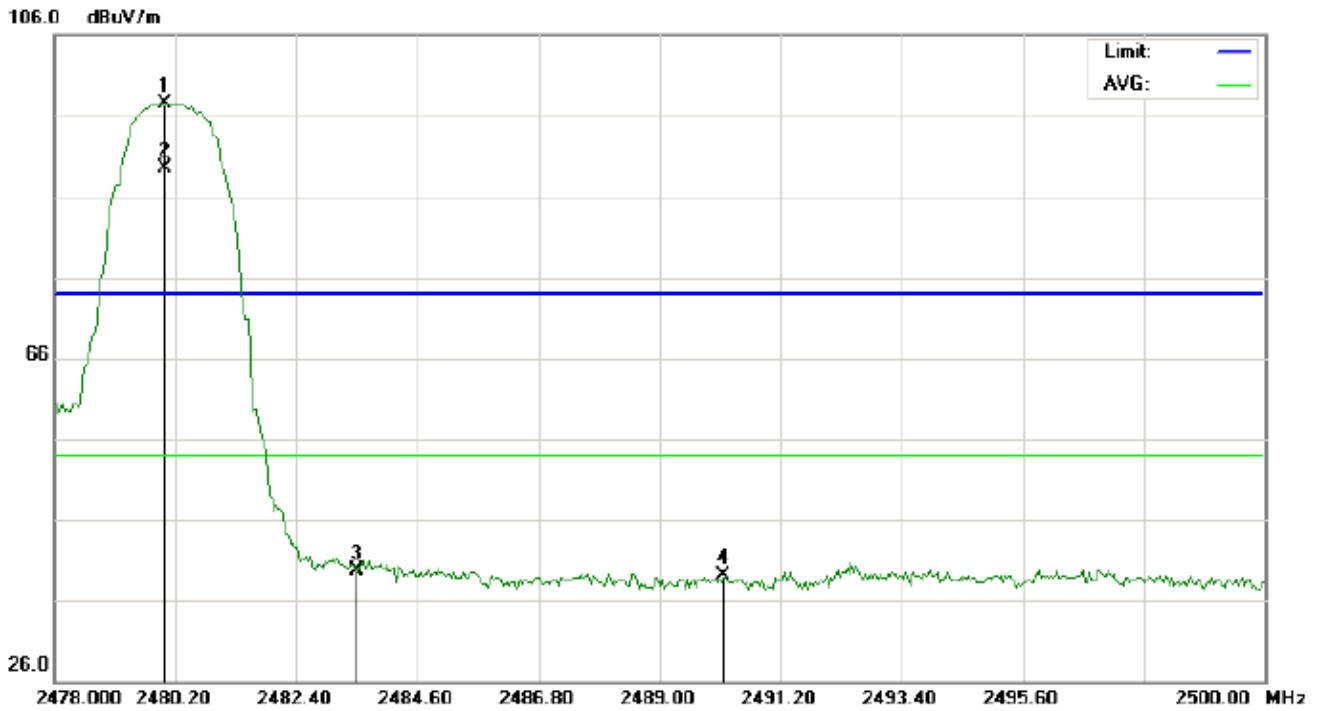


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
1	X	2480.000	83.40	14.11	97.51	74.00	23.51	peak			
2	*	2480.000	75.41	14.11	89.52	54.00	35.52	AVG	100	132	
3		2483.500	25.66	14.13	39.79	74.00	-34.21	peak			
4		2490.173	24.99	14.17	39.16	74.00	-34.84	peak			





TEST PLOT OF BAND EDGE FOR HIGH CHANNEL-Vertical

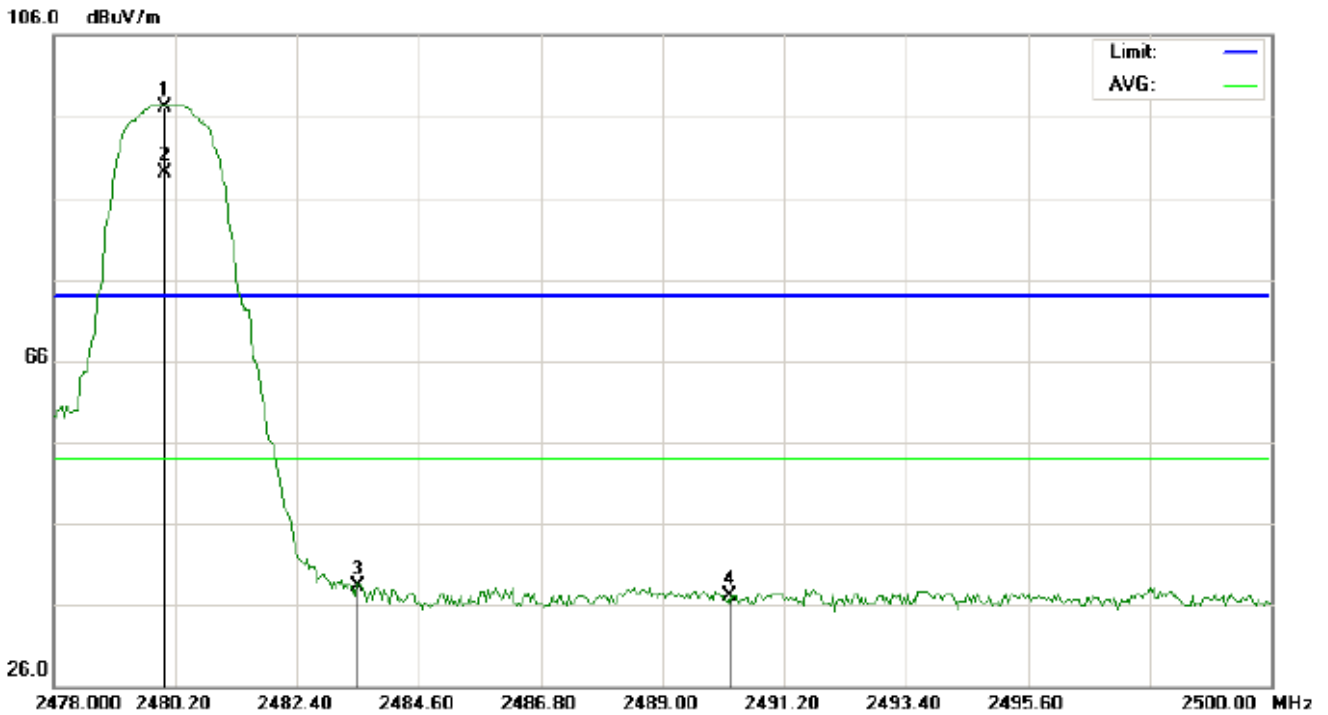

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1	X	2480.000	82.93	14.11	97.04	74.00	23.04	peak			
2	*	2480.000	75.02	14.11	89.13	54.00	35.13	AVG	100	250	
3		2483.500	24.22	14.13	38.35	74.00	-35.65	peak			
4		2490.210	22.98	14.17	37.15	74.00	-36.85	peak			

**RESULT: PASS**

**Note:** Factor=Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.


Hopping on mode and Hopping off mode have been tested, but only worst case reported.

## 6. OCCUPIED BANDWIDTH MEASUREMENT

### 6.1. MEASUREMENT PROCEDURE

1. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
2. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel  
 $RBW \geq 1\%$  of the 20 dB bandwidth,  $VBW \geq 3RBW$ ; Sweep = auto; Detector function = peak
3. Set SPA Trace 1 Max hold, then View.

### 6.2. TEST SET-UP

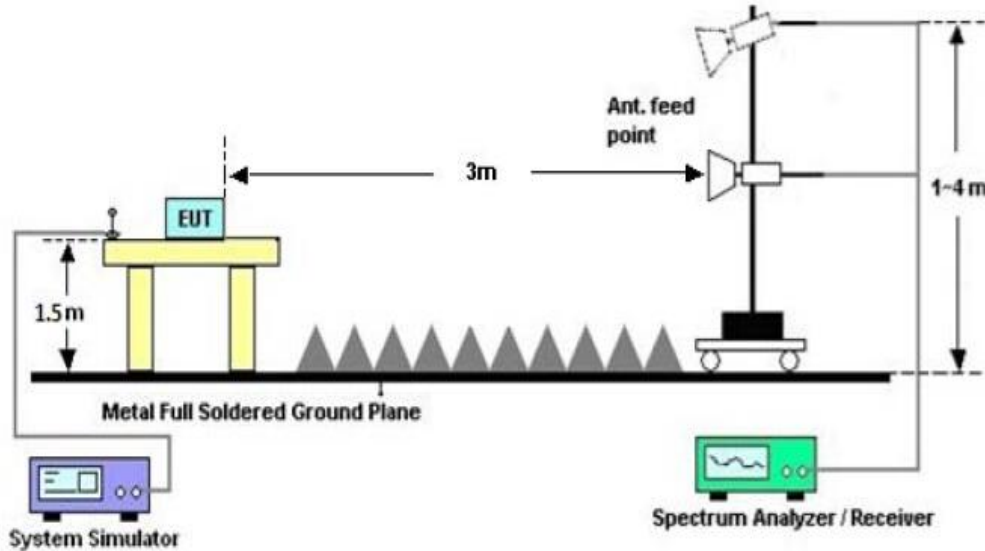


### 6.3. LIMITS AND MEASUREMENT RESULTS FOR BR/EDR


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	0.958	1.118	PASS
	Middle Channel	0.956	1.116	PASS
	High Channel	0.954	1.117	PASS



TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

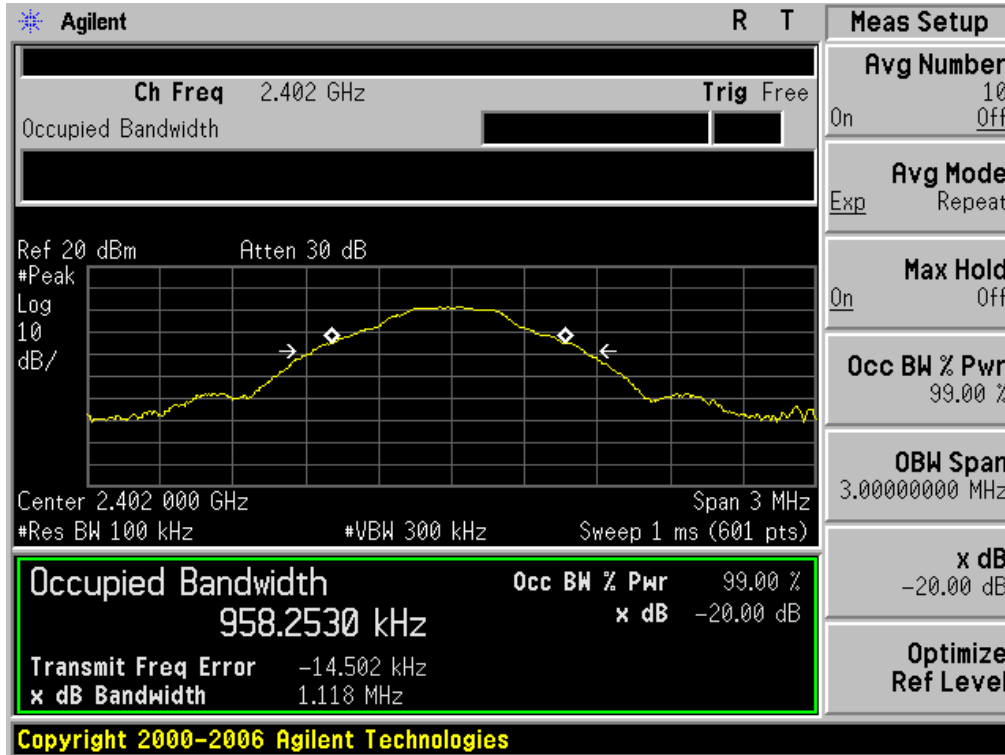


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

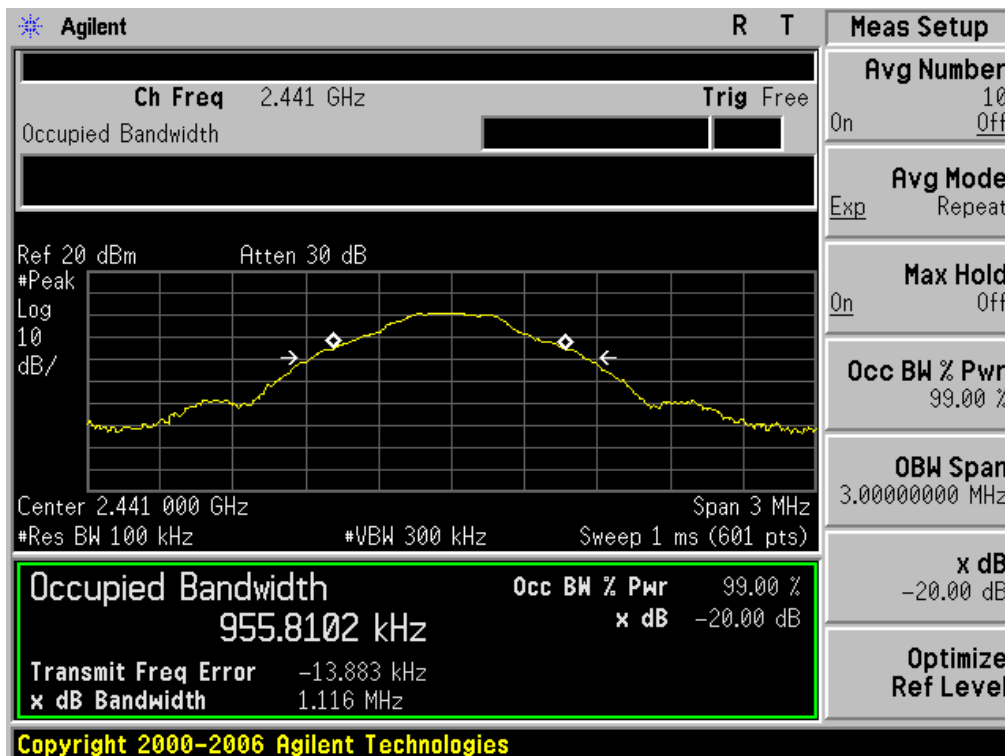




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

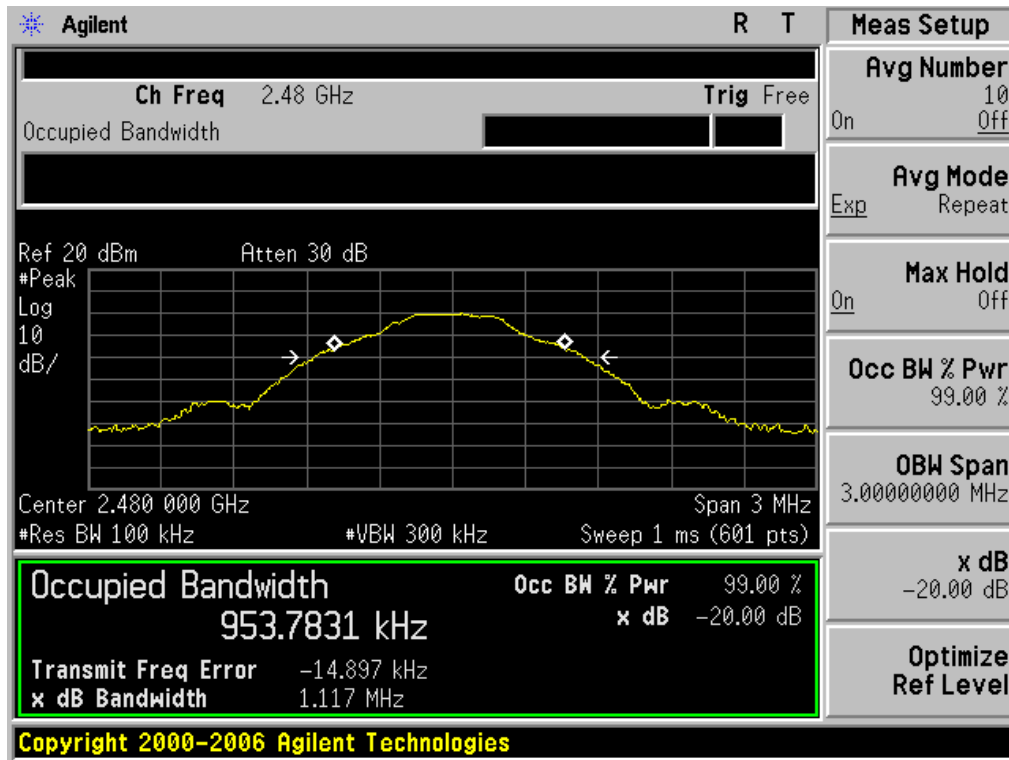




BLUETOOTH 2MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.229	1.387	PASS
	Middle Channel	1.227	1.391	PASS
	High Channel	1.227	1.387	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

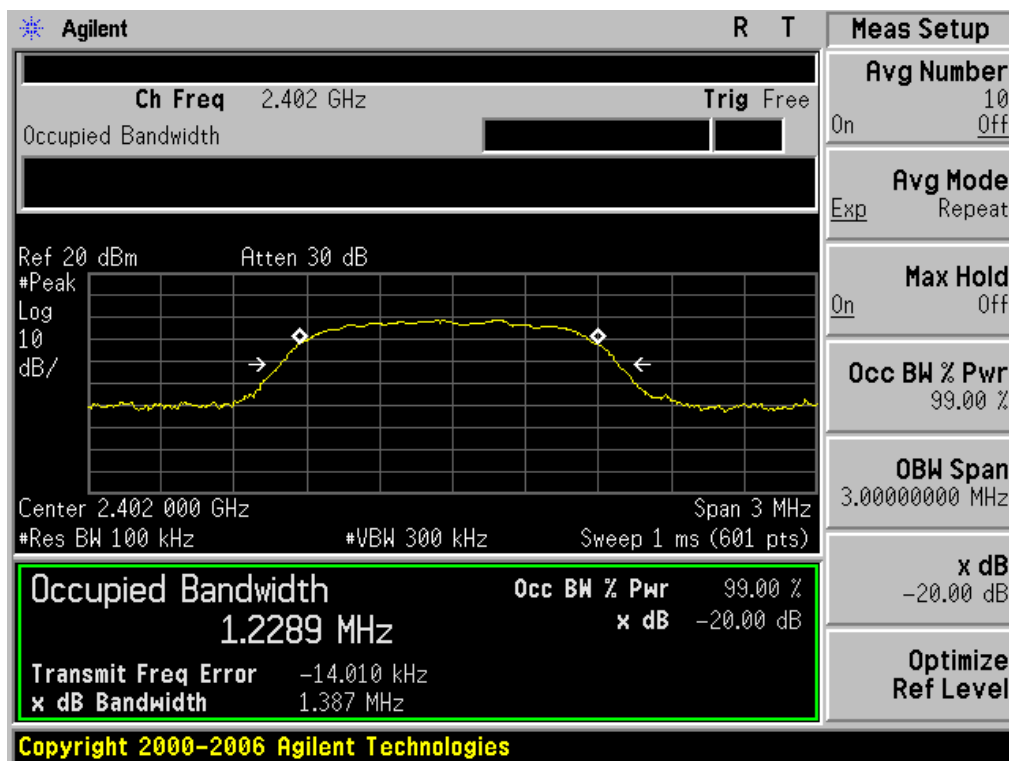




### TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

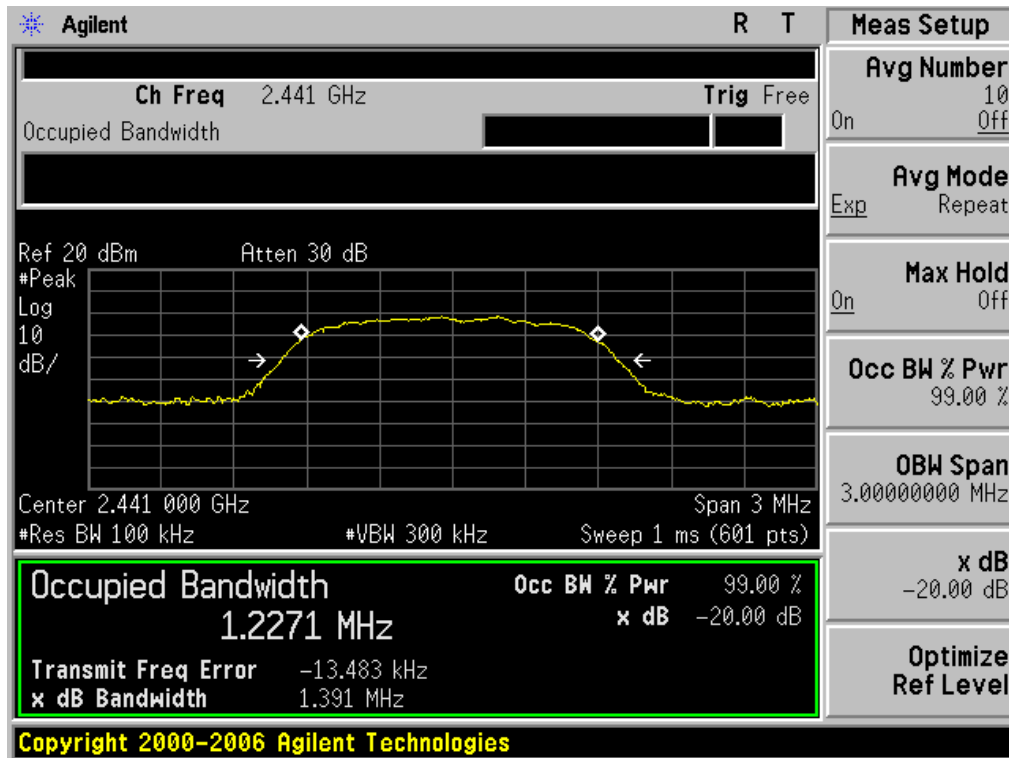


### TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

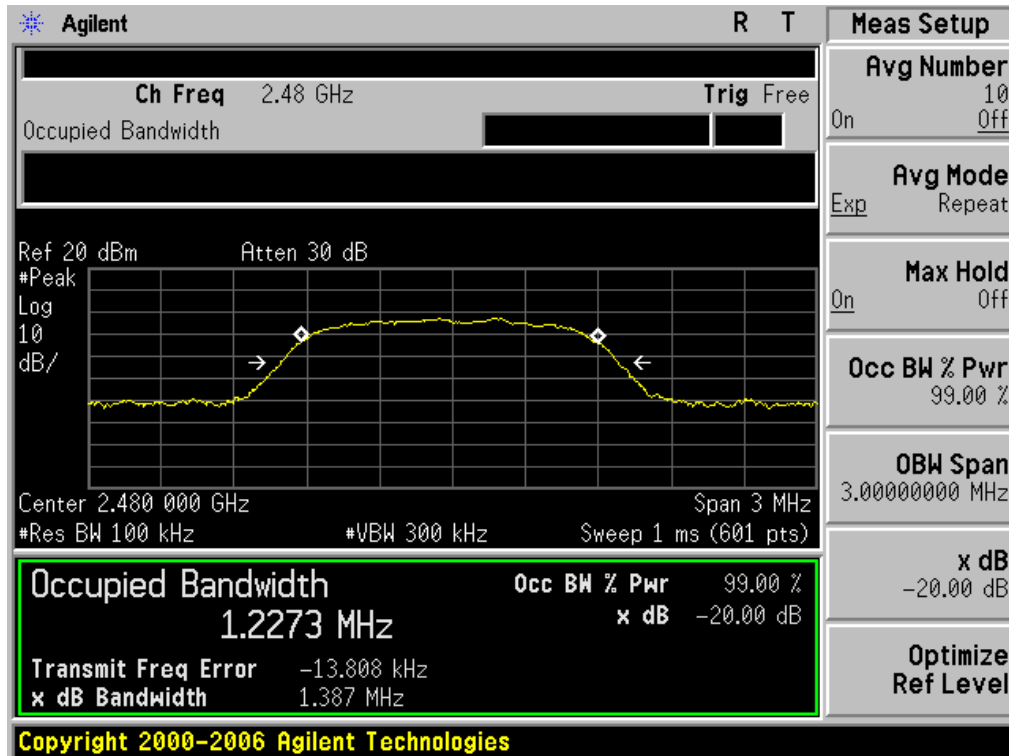




BLUETOOTH 3MBPS LIMITS AND MEASUREMENT RESULT				
Applicable Limits	Measurement Result			
	Test Data (MHz)			Result
		99%OBW (MHz)	-20dB BW(MHz)	
N/A	Low Channel	1.246	1.421	PASS
	Middle Channel	1.245	1.426	PASS
	High Channel	1.248	1.422	PASS

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

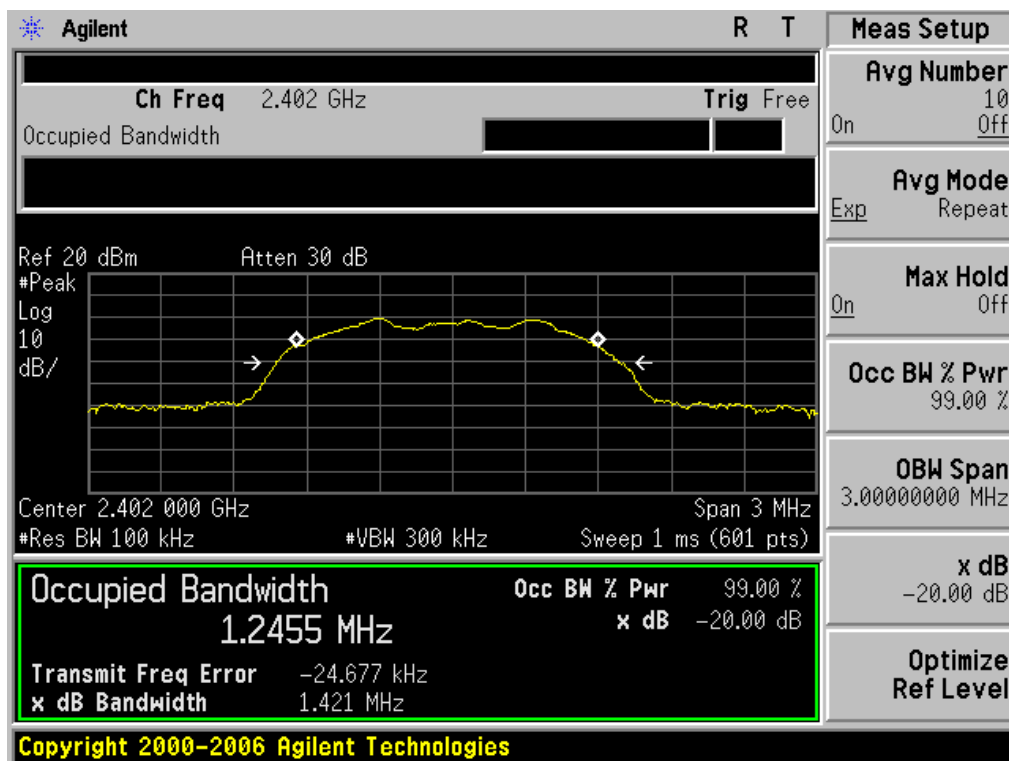




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

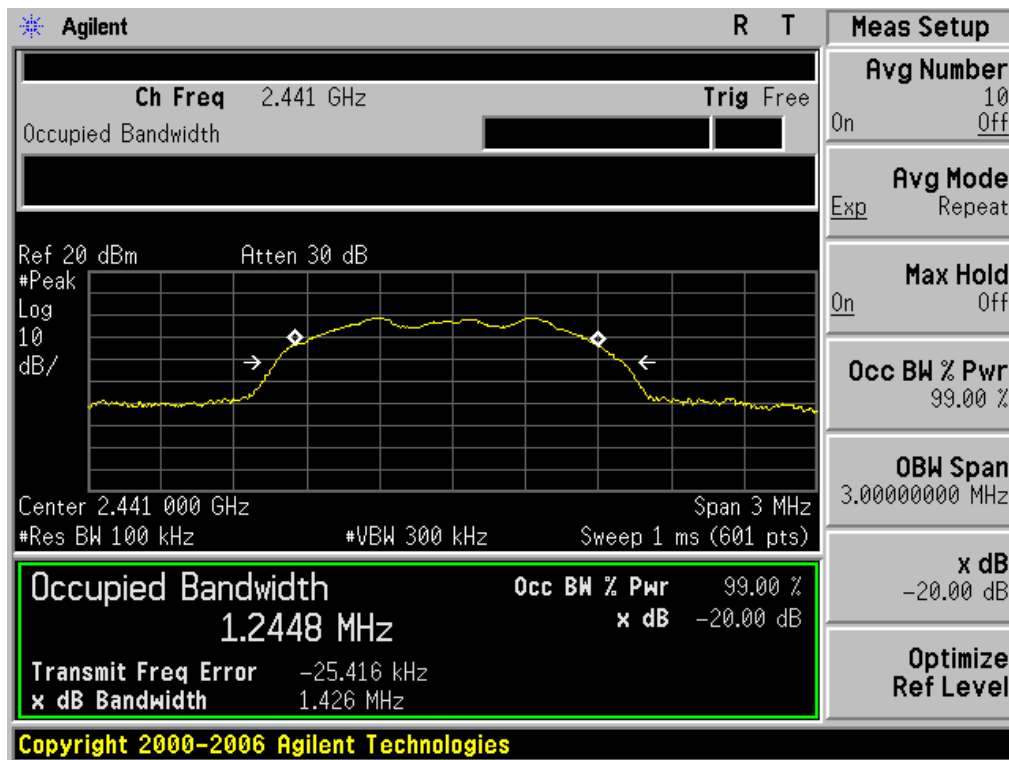

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

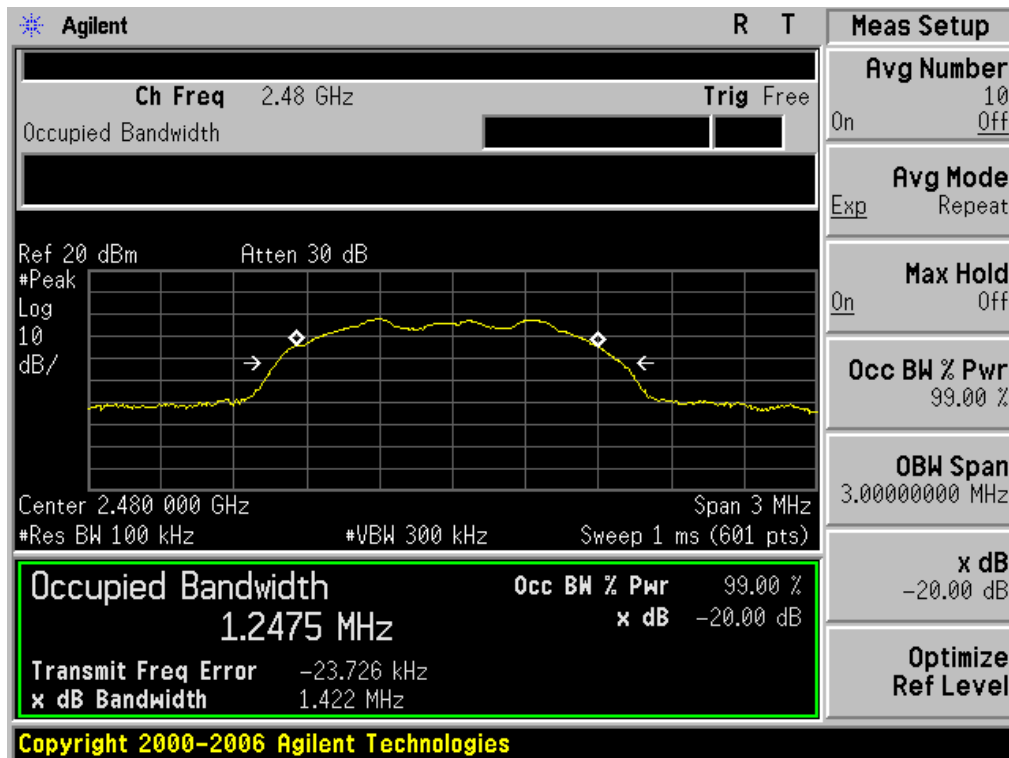



## 7. ANTENNA REQUIREMENT


### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### Refer to statement below for compliance.



The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### ANTENNA

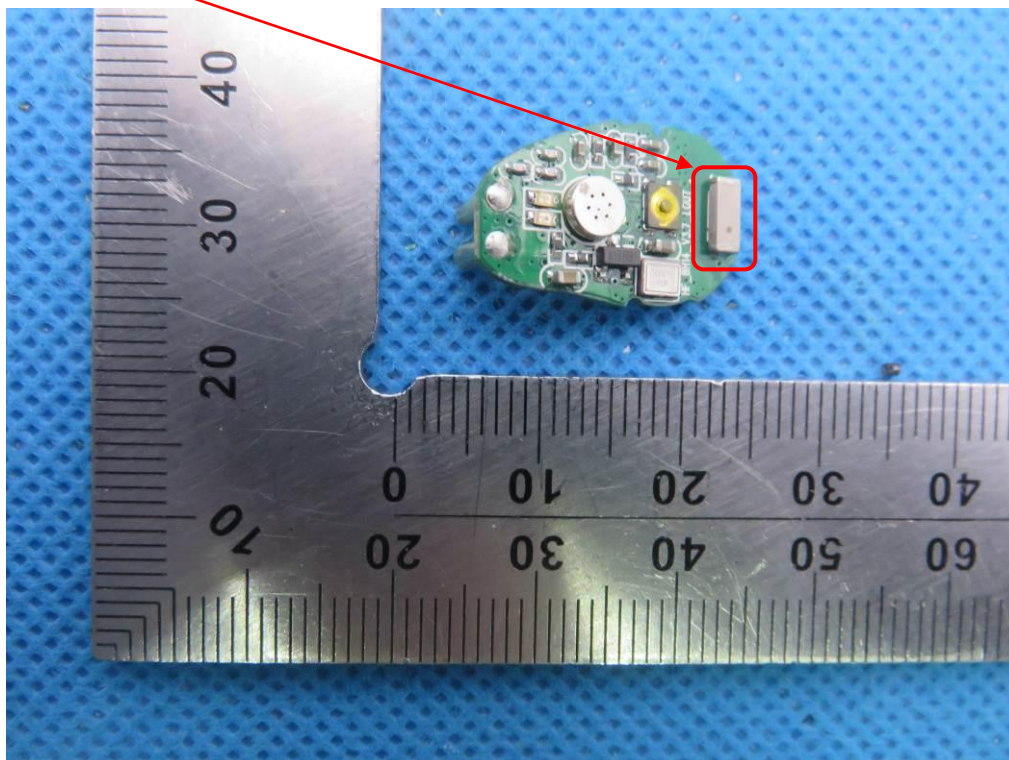

## 8. PHOTOGRAPH OF TEST

FCC RADIATED EMISSION TEST SETUP

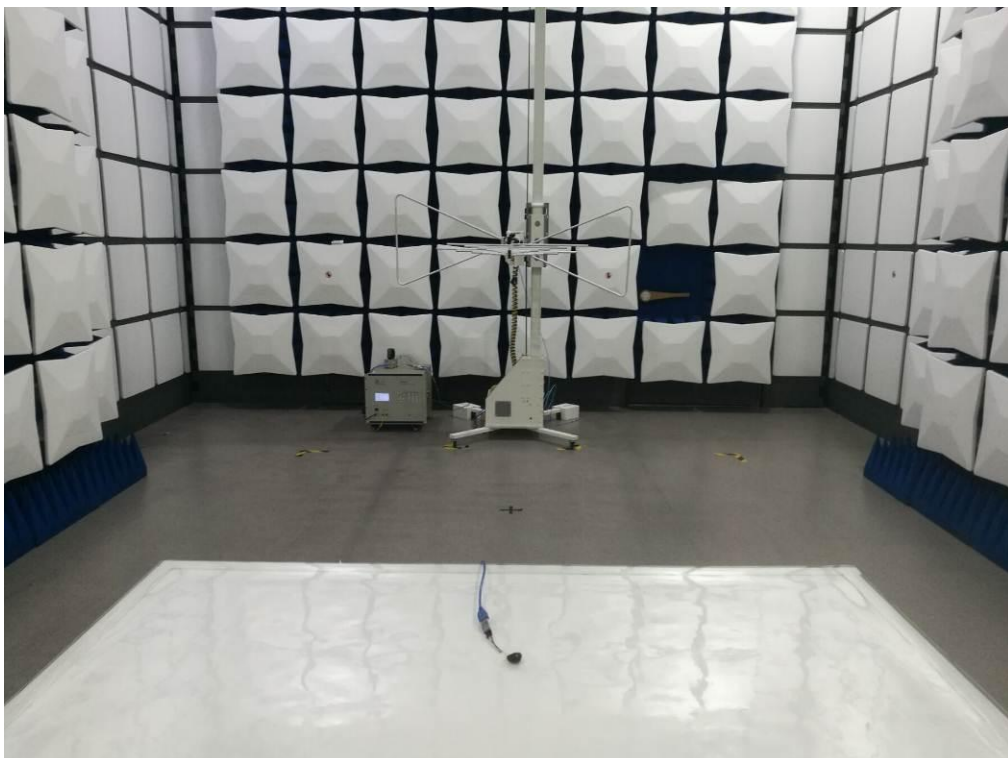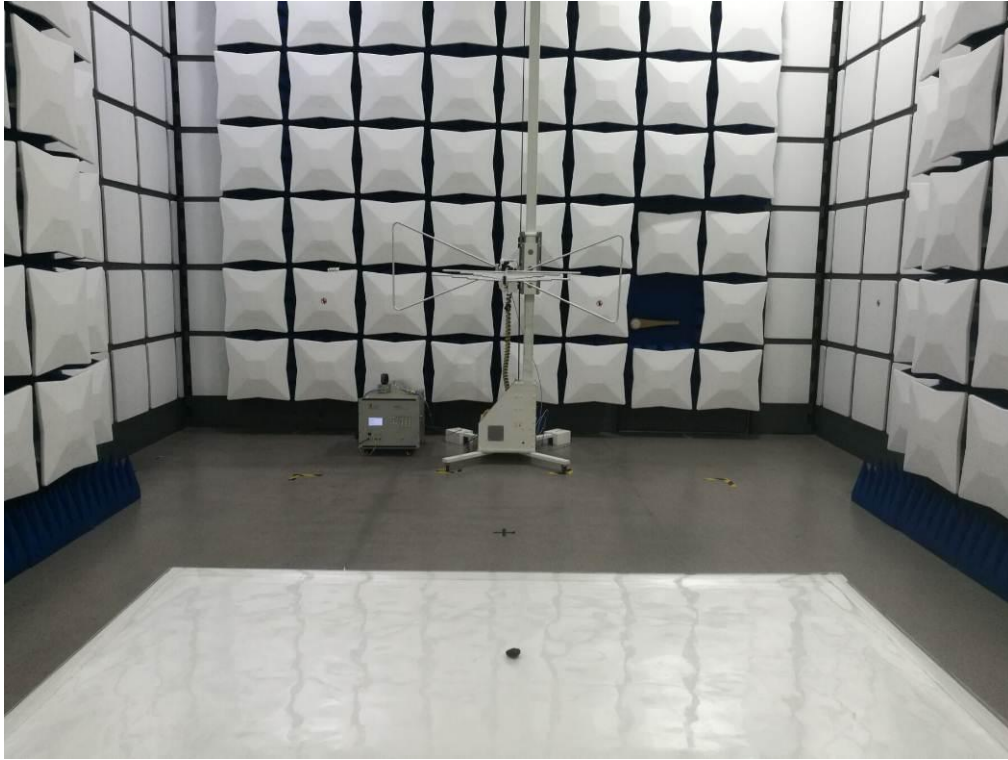



### 9. PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT




RIGHT VIEW OF EUT




VIEW OF EUT (PORT)



**Left**  
**OPEN VIEW OF EUT**

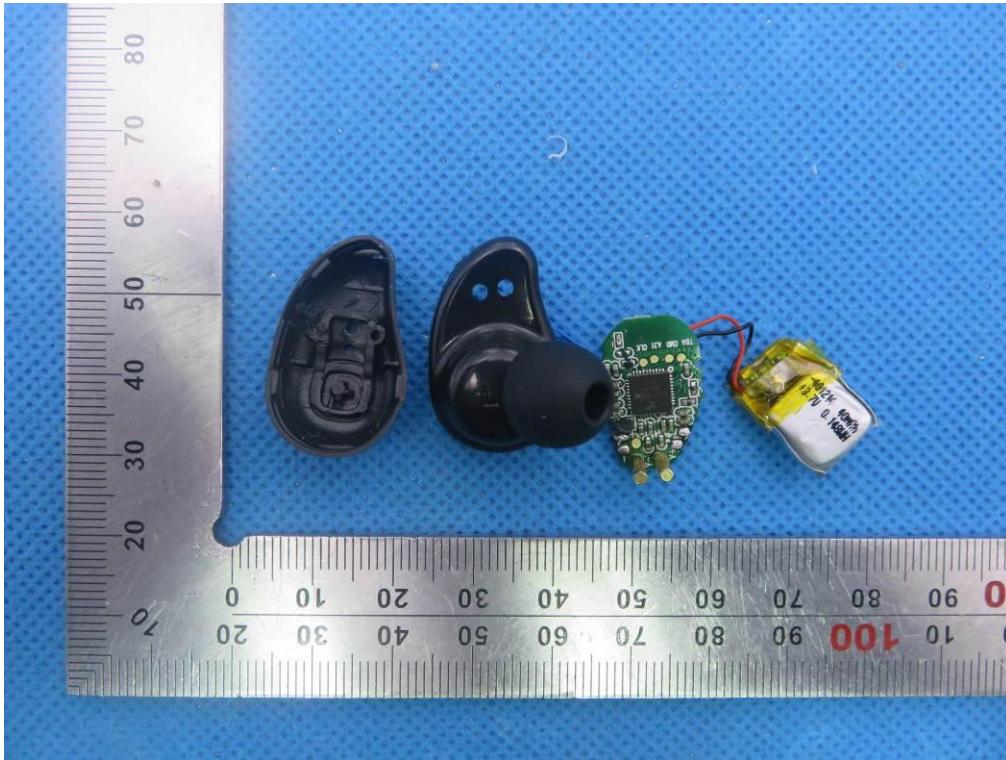


**VIEW OF BATTERY**

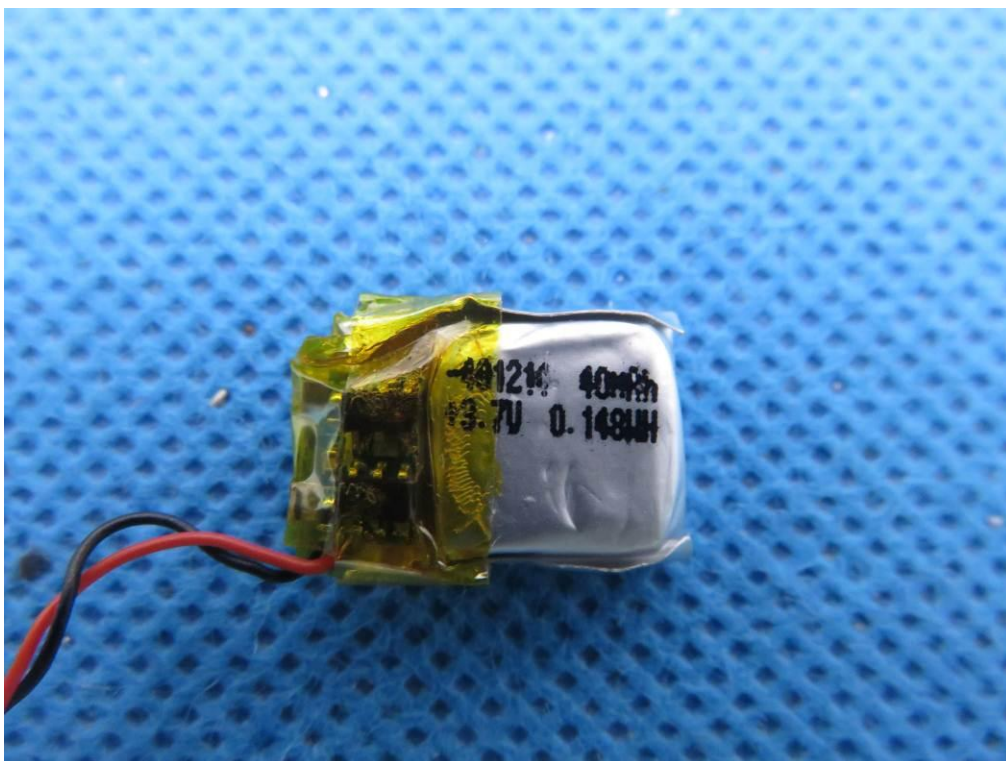





INTERNAL VIEW OF EUT-1

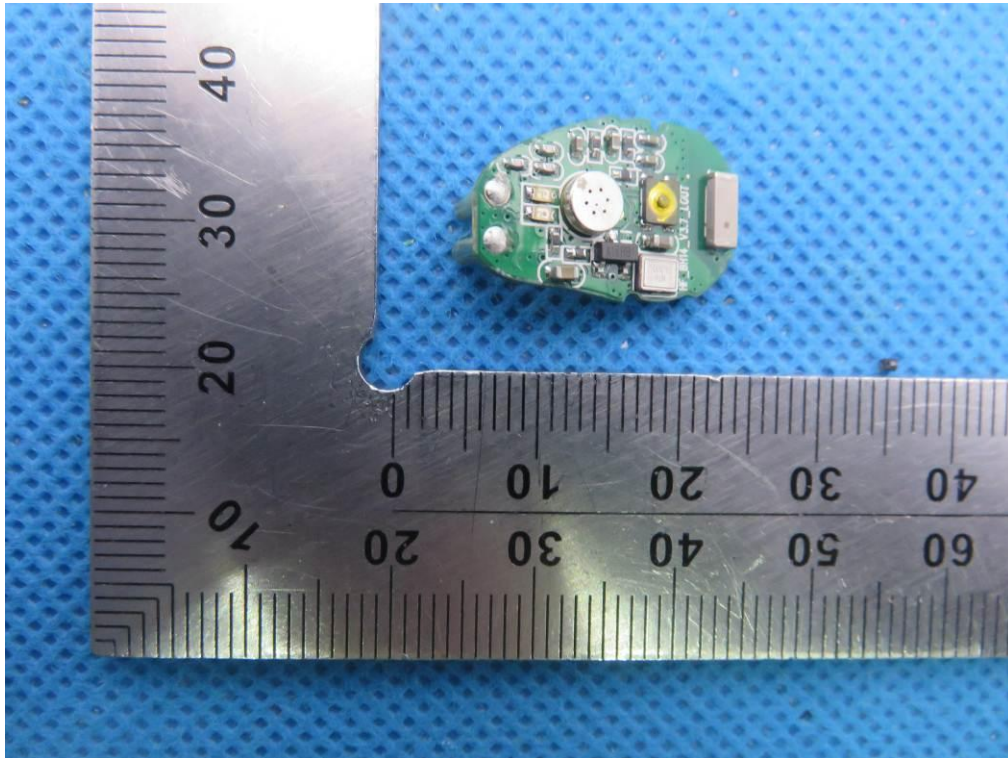

INTERNAL VIEW OF EUT-2

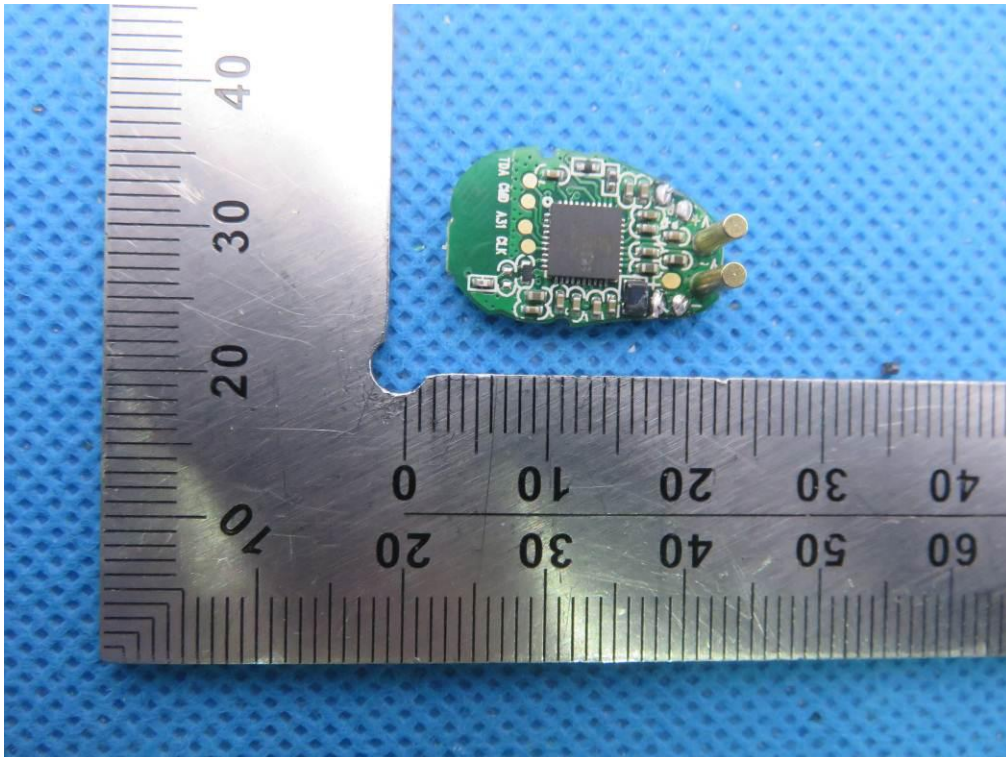

INTERNAL VIEW OF EUT-3

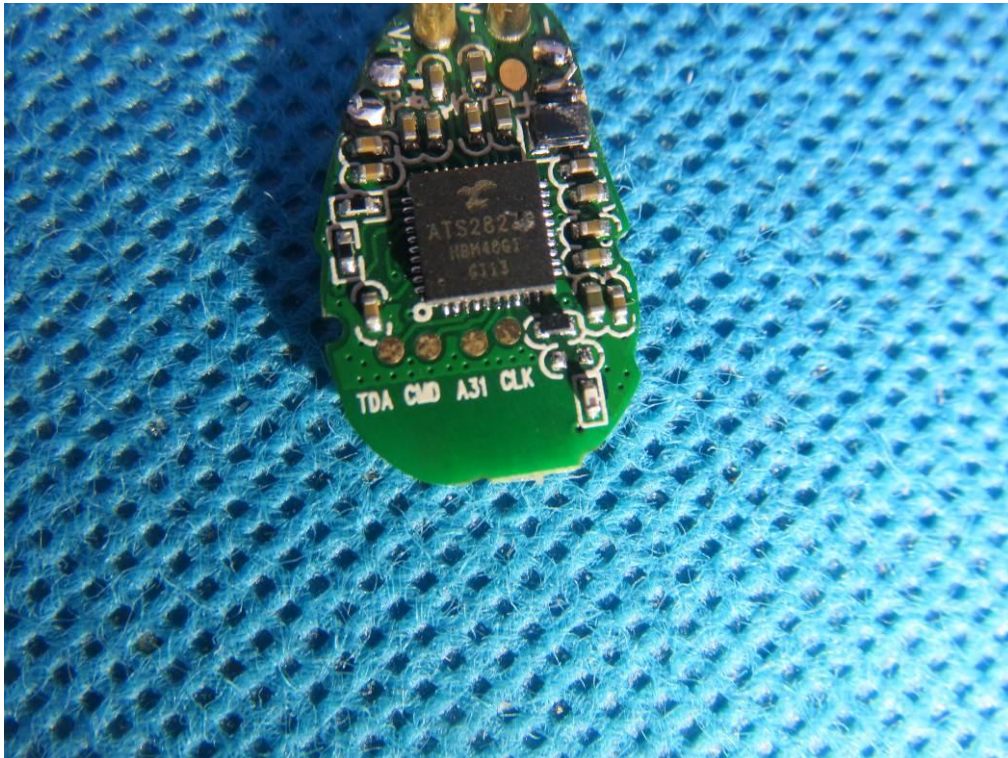


Right


OPEN VIEW OF EUT




VIEW OF BATTERY

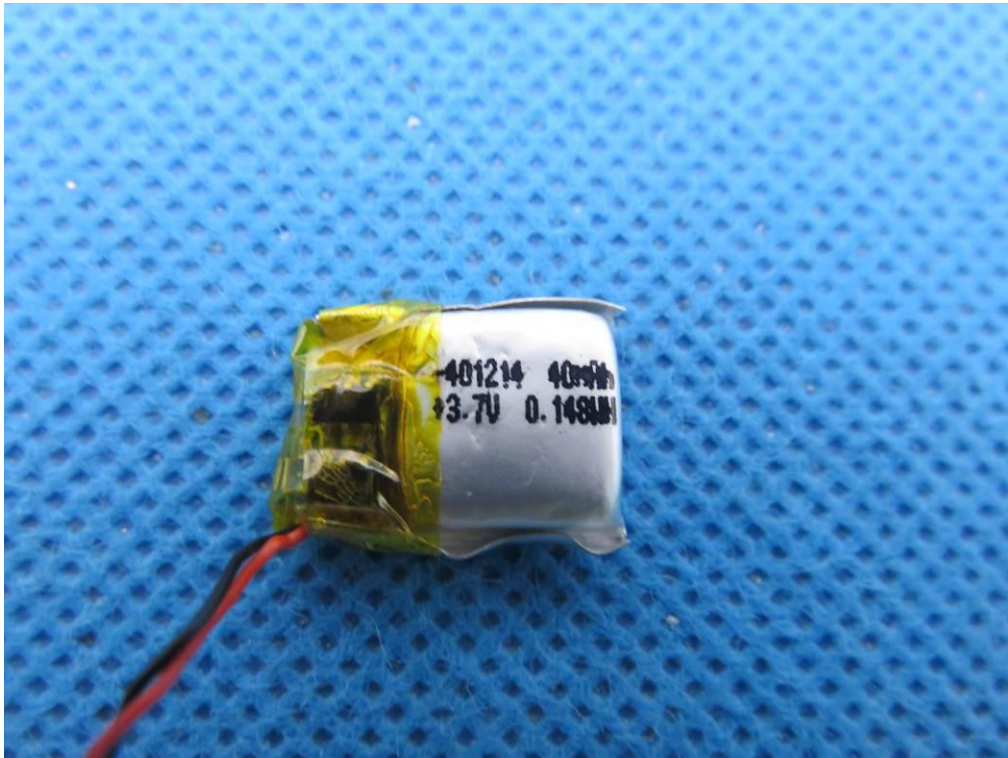


INTERNAL VIEW OF EUT-1

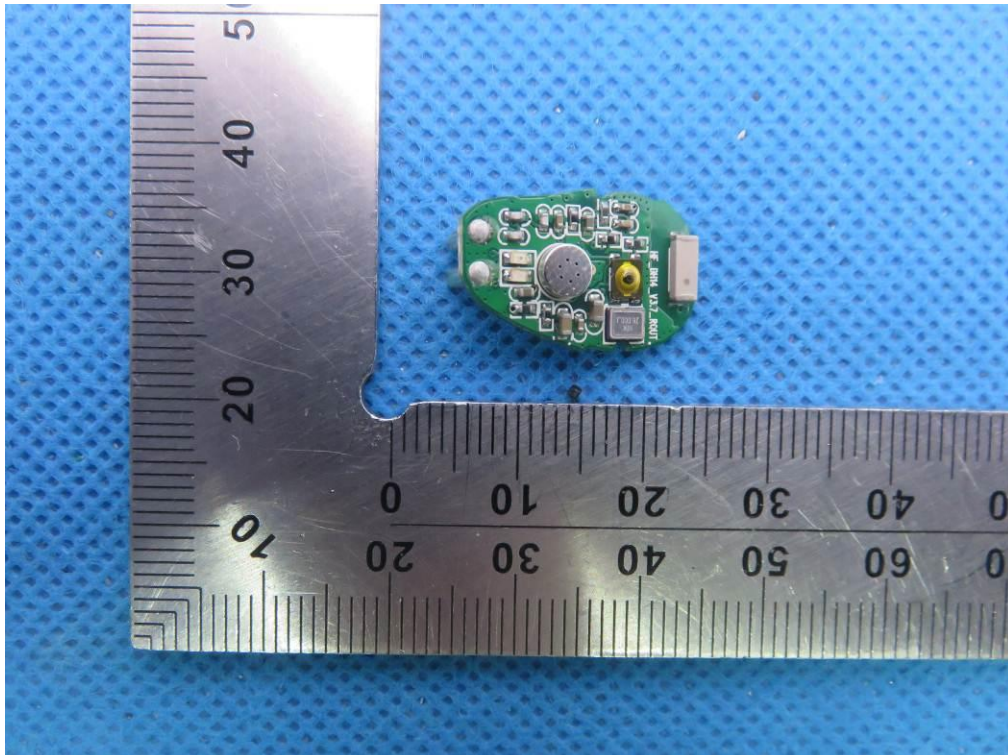

INTERNAL VIEW OF EUT-2

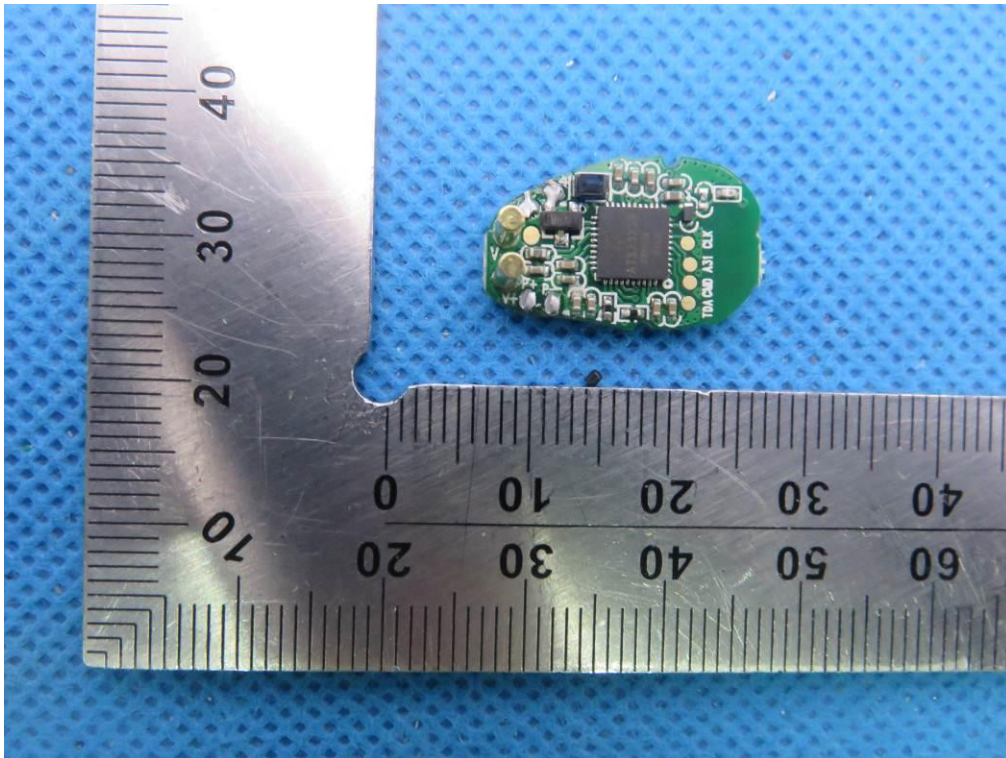

INTERNAL VIEW OF EUT-3

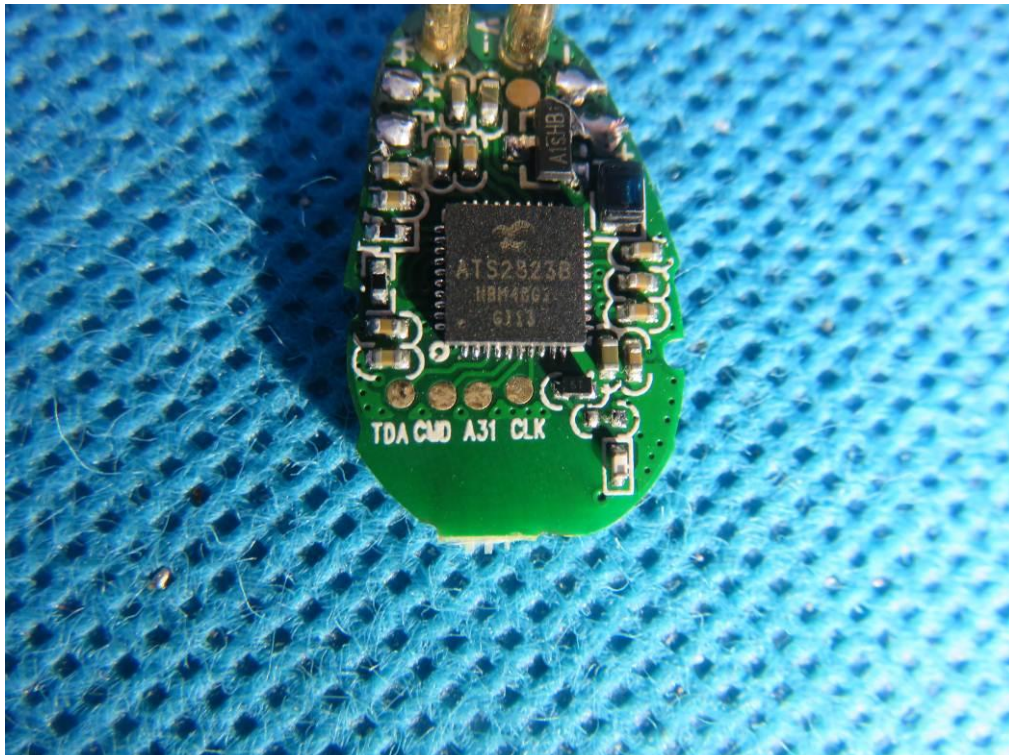



**Charging Dock**  
VIEW OF EUT (Port)-1



VIEW OF EUT (Port)-2



---END OF REPORT---