

FCC Part 15.249

TEST REPORT

For

Zhejiang Yihe Sanitary Ware Co., Ltd.

District A, No. 102 East Taihe Road, Haimen street, Jiaojiang, Taizhou, Zhejiang, China

FCC ID: 2AQBGR-C13

Report Type:
Original Report

Product Type:
Remote Control

Report Producer : Jojo Lu

Report Number : RLK221222001RF01

Report Date : 2023-02-13

Reviewed By: David Hsu *David.Hsu*

Prepared By:

Bay Area Compliance Laboratories Corp.(Linkou Laboratory)

No. 6, Wende 2Rd., Guishan Dist., Taoyuan City 33382,

Taiwan (R.O.C.)

Tel: +886 (3)3961072; Fax: +886 (3) 3961027

www.bacl.com.tw

Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
0.0	RLK221222001	RLK221222001RF01	2023-02-13	Original Report	Jojo Lu

TABLE OF CONTENTS

1	General Information	4
1.1	Product Description for Equipment under Test (EUT)	4
1.2	Objective	5
1.3	Related Submittal(s)/Grant(s).....	5
1.4	Test Methodology.....	5
1.5	Statement of Compliance	5
1.6	Measurement Uncertainty	5
1.7	Environmental Conditions.....	6
1.8	Test Facility	6
2	System Test Configuration	7
2.1	Description of Test Configuration.....	7
2.2	Equipment Modifications	7
2.3	EUT Exercise Software	7
2.4	Support Equipment List and Details.....	7
2.5	External Cable List and Details.....	7
1.9	Block Diagram of Test Setup	8
3	Summary of Test Results	9
4	Test Equipment List and Details.....	10
5	FCC §1.1307(b)(3)(i) – RF EXPOSURE	11
5.1	Applicable Standard	11
5.2	RF Exposure Evaluation Result.....	12
6	FCC §15.203 – Antenna Requirements	13
6.1	Applicable Standard	13
6.2	Antenna Information	13
7	FCC §15.207(a) – AC Line Conducted Emissions.....	14
7.1	Applicable Standard.....	14
7.2	EUT Setup.....	14
7.3	EMI Test Receiver Setup.....	15
7.4	Test Procedure.....	15
7.5	Factor & Over Limit	15
7.6	Test Results	15
8	FCC §15.209, §15.205 , §15.249 - Radiated Emissions	16
8.1	Applicable Standard.....	16
8.2	EUT Setup.....	16
8.3	EMI Test Receiver & Spectrum Analyzer Setup.....	17
8.4	Test Procedure.....	17
8.5	Factor & Over Limit	17
8.6	Test Results Summary	17
8.7	Test Results	18
9	FCC §15.215(c) – 20 dB Bandwidth Testing.....	24
9.1	Applicable Standard.....	24
9.2	Test Procedure.....	24
9.3	Test Results	24

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Applicant	Zhejiang Yihe Sanitary Ware Co., Ltd.
	District A, No. 102 East Taihe Road, Haimen street, Jiaojiang, Taizhou, Zhejiang, China
Manufacturer	Zhejiang Yihe Sanitary Ware Co., Ltd.
	District A, No. 102 East Taihe Road, Haimen street, Jiaojiang, Taizhou, Zhejiang, China
Brand(Trade) Name	N/A
Product (Equipment)	Remote Control
Main Model Name	RC13
Frequency Range	2404~2480 MHz
Modulation Technique	GFSK
Antenna Specification	PCB Antenna / 1.08 dBi
Power Operation (Voltage Range)	<input type="checkbox"/> AC <input type="checkbox"/> Adapter <input type="checkbox"/> By AC Power Cord <input type="checkbox"/> PoE
	<input checked="" type="checkbox"/> DC Type 3V <input checked="" type="checkbox"/> Battery <input type="checkbox"/> DC Power Supply <input type="checkbox"/> External from USB Cable <input type="checkbox"/> External DC Adapter
	<input type="checkbox"/> Host System
Received Date	2022-12-22
Date of Test	2022-12-27~2022-12-29

*All measurement and test data in this report was gathered from production sample serial number: RLK221222001-01.

Assigned by BACL, Linkou Laboratory.

1.2 Objective

This report is prepared on behalf of *Zhejiang Yihe Sanitary Ware Co., Ltd.* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communication Commission's rules.

1.3 Related Submittal(s)/Grant(s)

N/A.

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

1.5 Statement of Compliance

Decision Rule: No, (The test results do not include MU judgment)

The measurement results in this report were performed at Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification. Bay Area Compliance Laboratories Corp. (Linkou Laboratory) is not responsible for the authenticity of the information provided by the applicant that affects the test results.

1.6 Measurement Uncertainty

Parameter		Uncertainty
Emissions Bandwidth		+/- 0.09%
Unwanted Emissions, conducted		+/- 0.77 dBm
Emissions, radiated	30 MHz~1GHz	+/- 5.48 dB
	1 GHz~18 GHz	+/- 5.53 dB
	18 GHz~40 GHz	+/- 4.45 dB
Temperature		+/- 1.27 °C
Humidity		+/- 3 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty

1.7 Environmental Conditions

Test Site	Test Data	Temperature (°C)	Relative Humidity (%)	ATM Pressure (hPa)	Test Engineer
Radiation Spurious Emissions	2022/12/28~2022/12/29	17.0~17.2	58~60	1010	Alex Huang
20 dB Emission Bandwidth	2022/12/27	17.2	58	1010	Allen Cheng

1.8 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Linkou Laboratory) to collect test data is located on

No.6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.).

Bay Area Compliance Laboratories Corp. (Linkou Laboratory) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3546) by Mutual Recognition Agreement (MRA). The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database. The FCC Registration No.: 0027578244. Designation No.: TW1119. The Test Firm Registration No.: 311381.

2 System Test Configuration

2.1 Description of Test Configuration

The system was configured for testing in an engineering mode, which was provided by manufacturer.

The engineering mode was configured the system transmitting with maximum power.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2404	33	2443
1	2405	--	--
2	2406	--	--
3	2407	62	2478
--	--	63	2479
32	2442	64	2480

Tested with channel 1, 32 and 64.

2.2 Equipment Modifications

No modification was made to the EUT.

2.3 EUT Exercise Software

No test software was used.

Test Frequency	Low	Mid	High
Power Level Setting	Default	Default	Default

2.4 Support Equipment List and Details

N/A

2.5 External Cable List and Details


N/A

1.9 Block Diagram of Test Setup


See test photographs attached in setup photos for the actual connections between EUT and support equipment.

Radiation:

Below 1GHz:

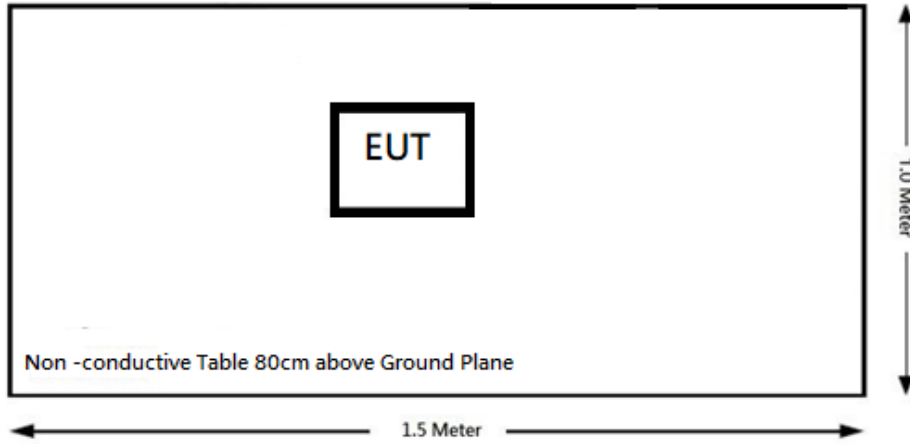

Above 1GHz:

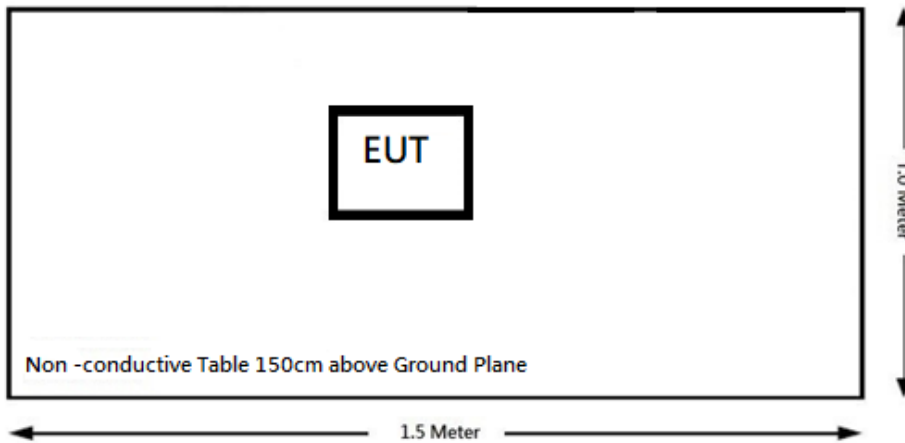

Conducted



3 Summary of Test Results

FCC Rules	Description of Test	Results
§15.203	Antenna Requirement	Compliance
§15.207 (a)	AC Line Conducted Emissions	Not applicable
§15.205, §15.209, §15.249	Radiated Emissions	Compliance
§15.215 (c)	20 dB Emission Bandwidth	Compliance

Not applicable: Device only supports battery.

4 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation 3M Room (966-A)					
Bilog Antenna with 6 dB Attenuator	SUNOL SCIENCES & EMCI	JB3 & N-6-06	A111513 & AT-N0668	2022/4/11	2023/4/10
Horn Antenna	ETS-Lindgren	3115	109141	2022/7/13	2023/7/12
Horn Antenna	ETS-Lindgren	3160-09	123852	2022/7/15	2023/7/14
Preamplifier	A.H. Systems	PAM-1840P	551122	2022/3/23	2023/3/22
Preamplifier	A.H. Systems	PAM-0118P	470	2022/3/23	2023/3/22
ESR EMI Test Receiver	Rohde & Schwarz	ESR3	102448	2022/3/18	2023/3/17
Spectrum Analyzer	Rohde & Schwarz	FSV40	101457	2022/09/13	2023/09/12
Microflex Cable (0.9m)	UTIFLEX	W6103	LKTE381	2022/6/30	2023/6/29
Microflex Cable (2m)	EMCI	EMC106-SM- SM-2000	180515	2022/8/5	2023/8/4
Microflex Cable (8m)	UTIFLEX	UFA210A-1- 3149-300300	MFR 64639 232490-001	2022/8/5	2023/8/4
Software	AUDIX	E3 V9	E3LK-01	N.C.R	N.C.R
Conducted Room					
Spectrum Analyzer	Rohde & Schwarz	FSV40	1321.3008K40- 101938-Gt	2022/12/07	2023/12/06
Cable	MTJ	MT40S	620620- MT40S-100	2022/12/23	2023/12/22

***Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirements

5 FCC §1.1307(b)(3)(i) – RF EXPOSURE

5.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1307(b)(3)(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission’s guidelines.

For single RF sources (*i.e.*, any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

(A) The available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption may not be used in conjunction with other exemption criteria other than those in paragraph (b)(3)(ii)(A) of this section. Medical implant devices may only use this exemption and that in paragraph (b)(3)(ii)(A);

(B) Or the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold *Pth* (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). *Pth* is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	1,920 R ² .
1.34-30	3,450 R ² /f ² .
30-300	3.83 R ² .
300-1,500	0.0128 R ² f.
1,500-100,000	19.2R ² .

5.2 RF Exposure Evaluation Result

Calculate the EIRP from the radiated field strength in the far field using Equation

$$EIRP = E_{Meas} + 20 \log(d_{Meas}) - 104.7$$

$$EIRP = 87.47 \text{ dB}\mu\text{V/m} - 95.2 = -7.73 \text{ dBm}$$

$$EIRP \text{ Tune-up power} = -7.5 \text{ dBm}$$

Project info

Band	Freq (MHz)	Tune-up power (dBm)	Distances (mm)	Tune-up power (mW)	ERP (dBm)	ERP (mW)
SRD	2480	-7.5	5	0.18	-9.65	0.11

Option A

The available maximum time-averaged power is no more than 1 mW

Band	Freq (MHz)	Result Option A
SRD	2480	exempt

Result: The device meets the exemption requirement.

6 FCC §15.203 – Antenna Requirements

6.1 Applicable Standard

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used.

6.2 Antenna Information

Manufacturer	Type	Antenna Gain
RFsister	PCB Antenna	1.08 dBi

The EUT has 1 internal antenna, which was permanently attached, fulfill the requirement of this section.

Please refer to the EUT photos.

Result: Compliance.

7 FCC §15.207(a) – AC Line Conducted Emissions

7.1 Applicable Standard

According to §15.207


For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μH/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 2}
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency.

Note 2: A linear average detector is required

7.2 EUT Setup

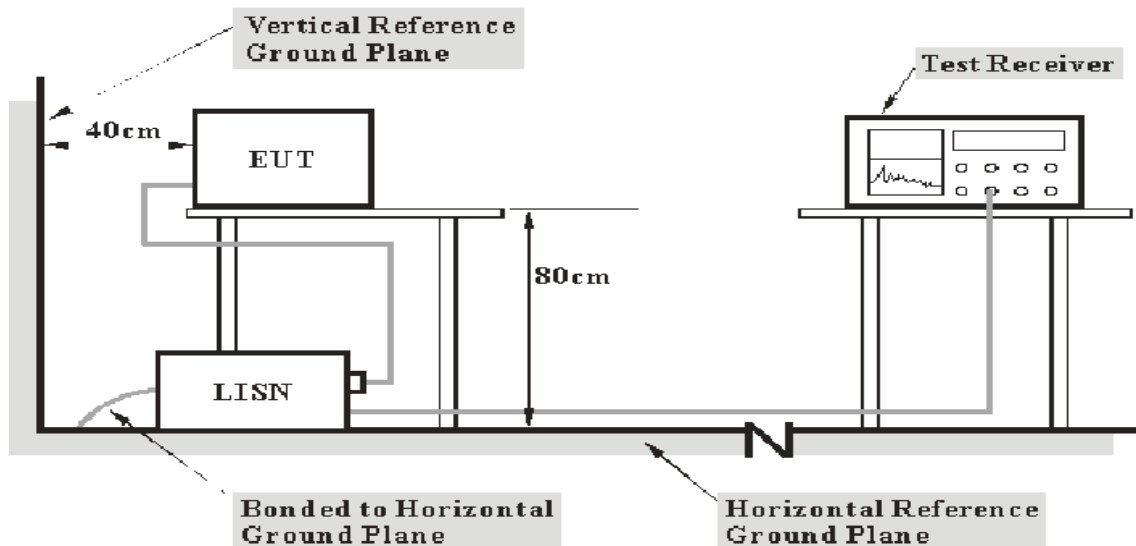

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

7.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	IF B/W
150kHz – 30MHz	9kHz

7.4 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

7.5 Factor & Over Limit

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit line. For example, an over limit of -7 dB means the emission is 7 dB below the limit line. The equation for Over Limit calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$

7.6 Test Results

Not applicable: Device only supports battery.

8 FCC §15.209, §15.205 , §15.249 - Radiated Emissions

8.1 Applicable Standard

As per FCC§15.249 (a), except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (millivolts/meter)
920-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

As per FCC§15.249 (c), Field strength limits are specified at a distance of 3 meters.


(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

8.2 EUT Setup

Below 1 GHz:

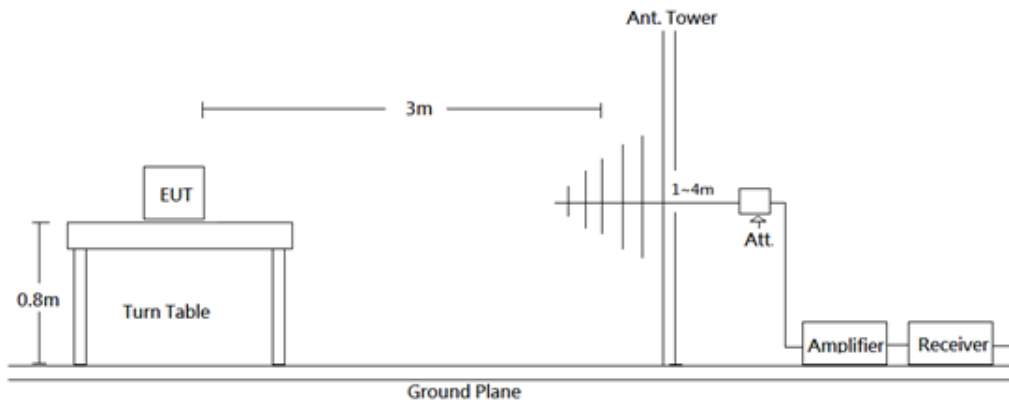

Above 1 GHz:

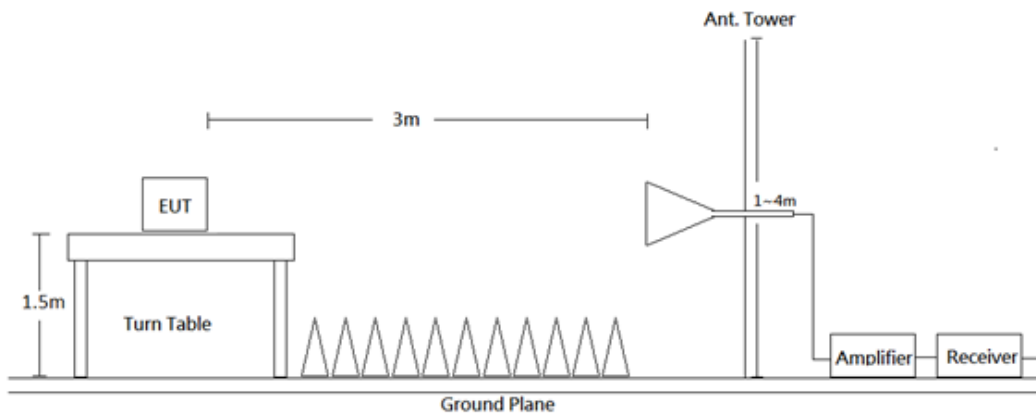

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.249 limits.

8.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Detector	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	QP		QP
Above 1 GHz	1 MHz	3 MHz	PK		PK
	1 MHz	3 MHz	RMS	>98%	Ave
	1 MHz	1/T	PK	<98%	Ave

8.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

8.5 Factor & Over Limit

The Factor is calculated by adding the Antenna Factor and Cable Loss, and Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} + \text{Amplifier Gain}$$

The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit line. For example, The Over Limit of -7 dB means the emission is 7 dB below the limit line. The equation for margin calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$

8.6 Test Results Summary


According to the data in the following table, the EUT complied with the FCC §15.209 Limit.

8.7 Test Results

Test Mode: Transmitting

(Pre-scan with three orthogonal axis, and worse case as Z axis.)

30MHz-1GHz:

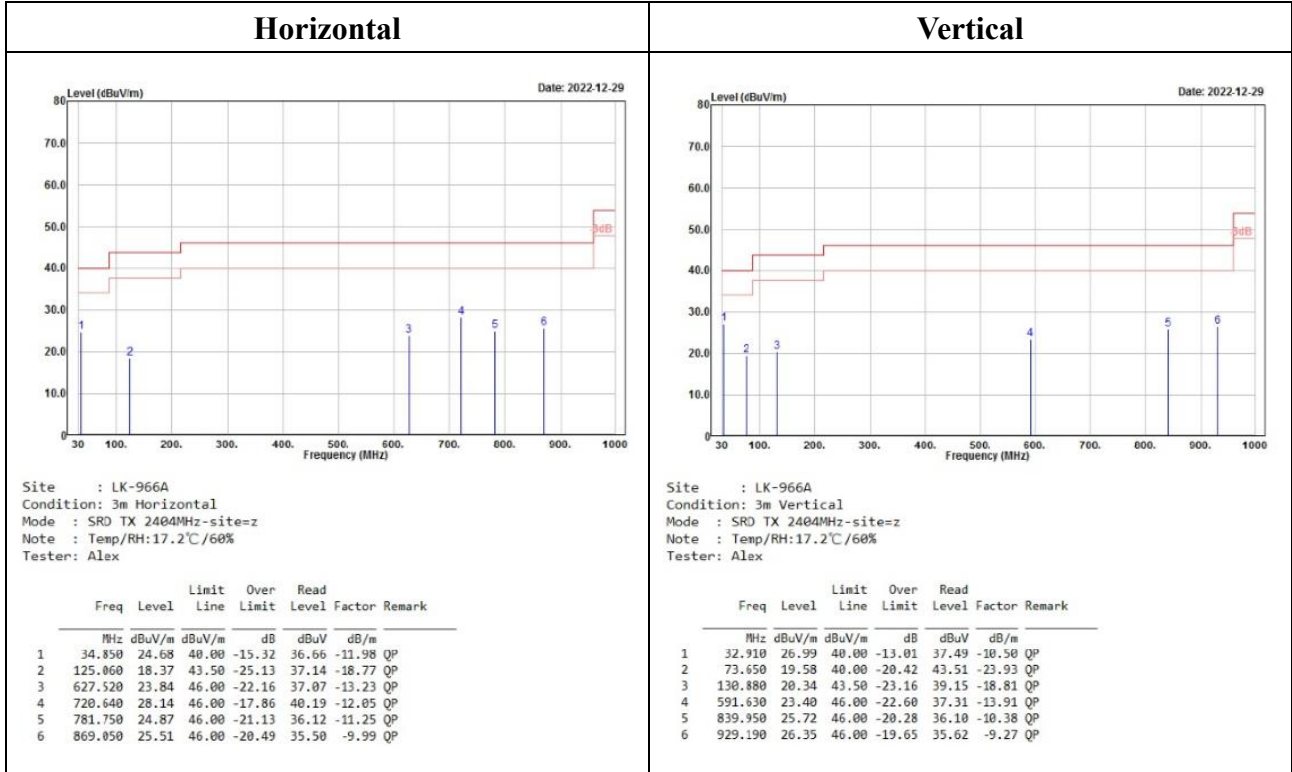

Level = Read Level + Factor


Over Limit = Level- Limit Line

Factor = Antenna Factor + Cable Loss – Amplifier Gain

Fundamental:

Low channel


Horizontal

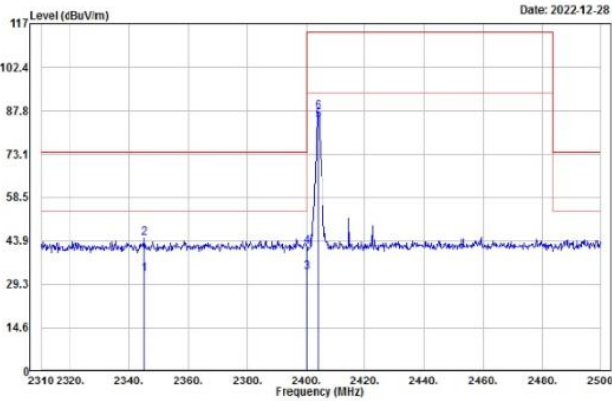

Site : LK-966A
 Condition: 3m Horizontal
 Mode : SRD TX 2404MHz-site=z
 Note : Temp/RH:17.0°C/58%
 Tester: Alex

	Limit	Over	Read		
Freq	Level	Line	Limit	Level	Factor Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m
1	2345.150	32.70	54.00	-21.30	42.17 -9.47 Average
2	2345.150	44.59	74.00	-29.41	54.06 -9.47 Peak
3	2400.000	33.38	54.00	-20.62	42.63 -9.25 Average
4	2400.000	41.82	74.00	-32.18	51.07 -9.25 Peak
5	2404.000	84.69	94.00	-9.31	93.92 -9.23 Average
6	2404.000	87.47	114.00	-26.53	96.70 -9.23 Peak

Vertical

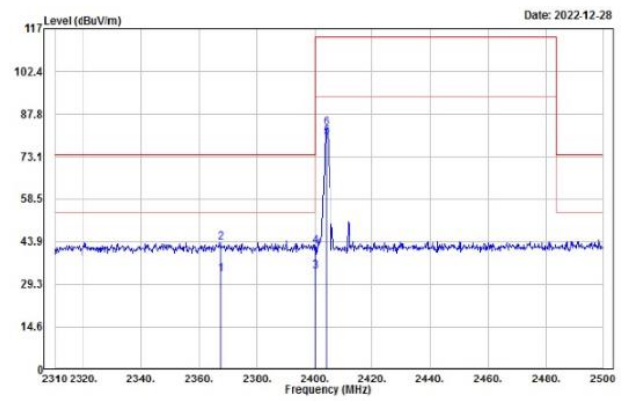


Site : LK-966A
 Condition: 3m Vertical
 Mode : SRD TX 2404MHz-site=z
 Note : Temp/RH:17.0°C/58%
 Tester: Alex

	Limit	Over	Read		
Freq	Level	Line	Limit	Level	Factor Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m
1	2367.570	32.60	54.00	-21.40	41.97 -9.37 Average
2	2367.570	43.58	74.00	-30.42	52.95 -9.37 Peak
3	2400.000	33.64	54.00	-20.36	42.89 -9.25 Average
4	2400.000	42.28	74.00	-31.72	51.53 -9.25 Peak
5	2404.000	79.91	94.00	-14.09	89.14 -9.23 Average
6	2404.000	82.98	114.00	-31.02	92.21 -9.23 Peak

Middle channel


Horizontal

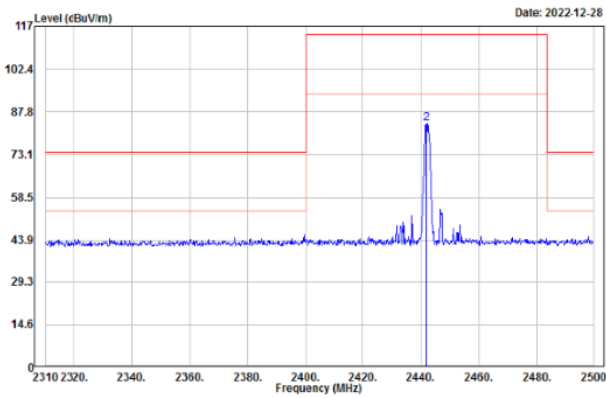

Site : LK-966A
 Condition: 3m Horizontal
 Mode : SRD TX 2442MHz-site=z
 Note : Temp/RH:17.0°C/58%
 Tester: Alex


	Limit	Over	Read		
Freq	Level	Line	Limit	Level	Factor Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m
1	2442.000	79.75	94.00	-14.25	88.83 -9.08 Average
2	2442.000	83.57	114.00	-30.43	92.65 -9.08 Peak

Vertical

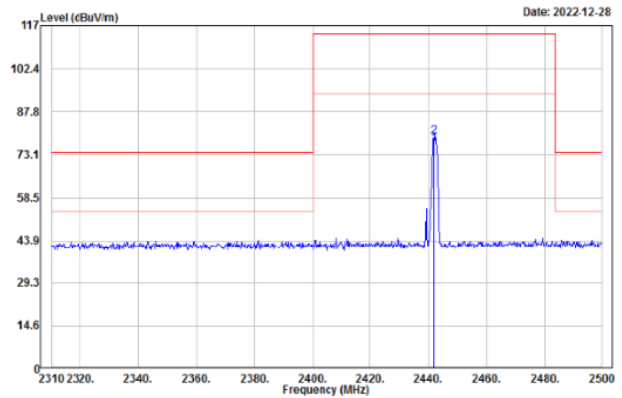

Site : LK-966A
 Condition: 3m Vertical
 Mode : SRD TX 2442MHz-site=z
 Note : Temp/RH:17.0°C/58%
 Tester: Alex

	Limit	Over	Read		
Freq	Level	Line	Limit	Level	Factor Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m
1	2442.000	76.59	94.00	-17.41	85.67 -9.08 Average
2	2442.000	79.12	114.00	-34.88	88.20 -9.08 Peak

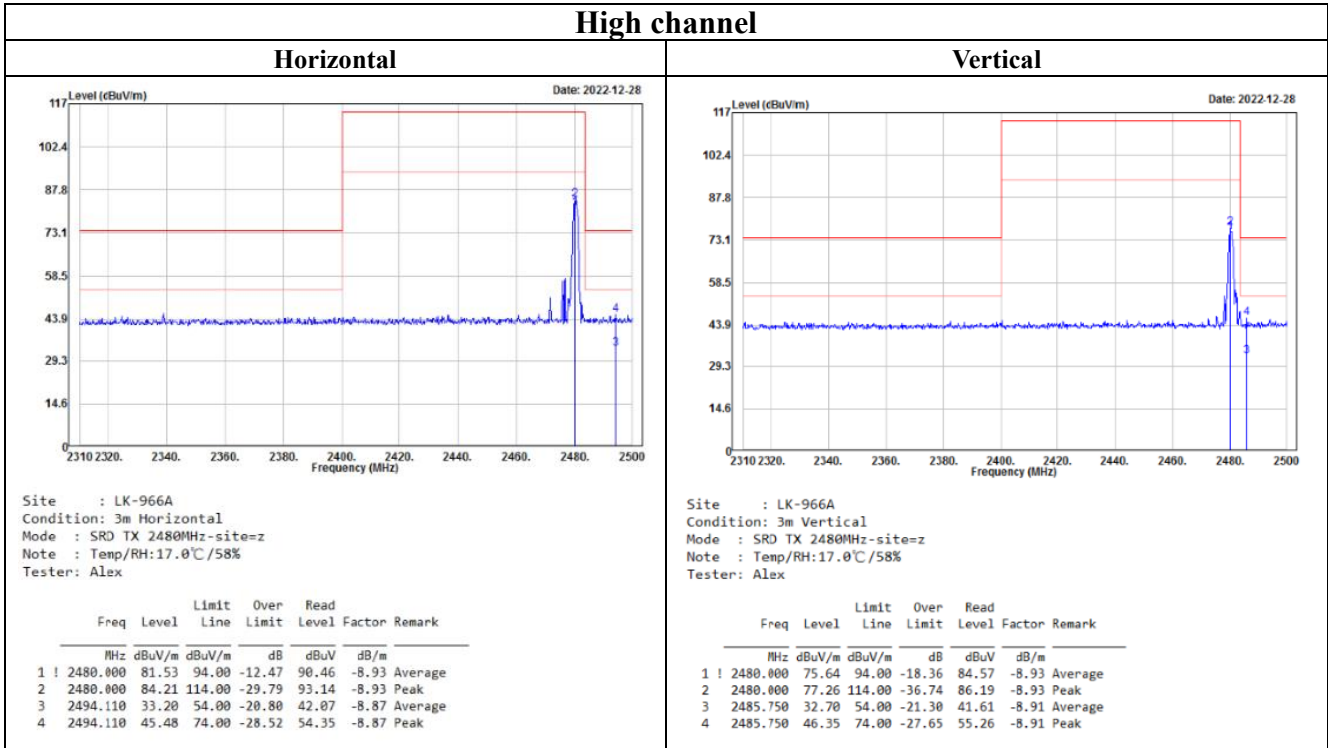

Level = Read Level + Factor


Over Limit = Level- Limit Line

Factor = Antenna Factor + Cable Loss – Amplifier Gain

Above 1GHz
1GHz-18GHz:

Low channel


Horizontal

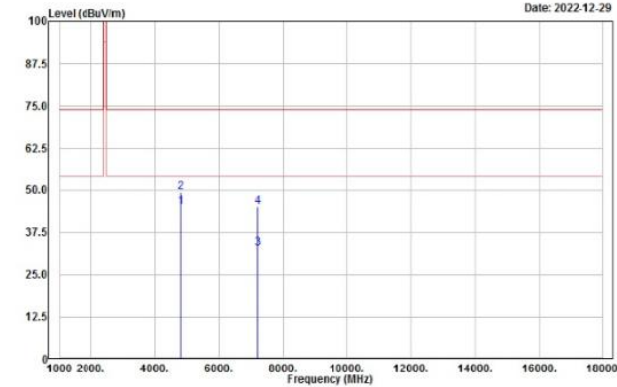

Site : LK-966A
Condition: 3m Horizontal
Mode : SRD TX 2404MHz-site=z
Note : Temp/RH:17.2°C/60%
Tester: Alex

Line	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4808.000	44.94	54.00	-9.06	47.34	-2.40	Average
2	4808.000	49.43	74.00	-24.57	51.83	-2.40	Peak
3	7212.000	32.69	54.00	-21.31	29.78	2.91	Average
4	7212.000	45.00	74.00	-29.00	42.09	2.91	Peak

Vertical

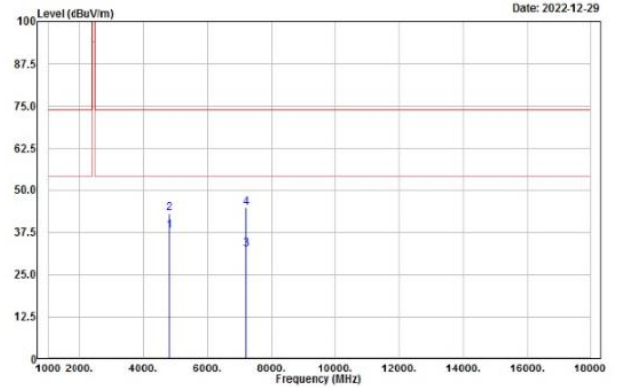


Site : LK-966A
Condition: 3m Vertical
Mode : SRD TX 2404MHz-site=z
Note : Temp/RH:17.2°C/60%
Tester: Alex

Line	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4808.000	37.89	54.00	-16.11	40.29	-2.40	Average
2	4808.000	42.96	74.00	-31.04	45.36	-2.40	Peak
3	7212.000	32.52	54.00	-21.48	29.61	2.91	Average
4	7212.000	44.79	74.00	-29.21	41.88	2.91	Peak

Middle channel


Horizontal

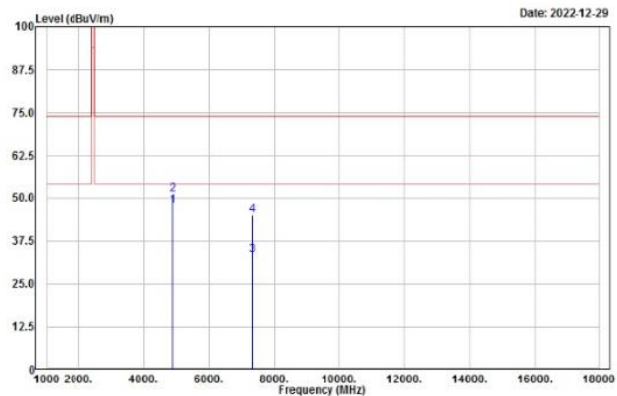

Site : LK-966A
Condition: 3m Horizontal
Mode : SRD TX 2442MHz-site=z
Note : Temp/RH:17.2°C/60%
Tester: Alex


Line	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	47.66	54.00	-6.34	49.85	-2.19	Average
2	4884.000	50.91	74.00	-23.09	53.10	-2.19	Peak
3	7326.000	33.25	54.00	-20.75	29.97	3.28	Average
4	7326.000	44.97	74.00	-29.03	41.69	3.28	Peak

Vertical

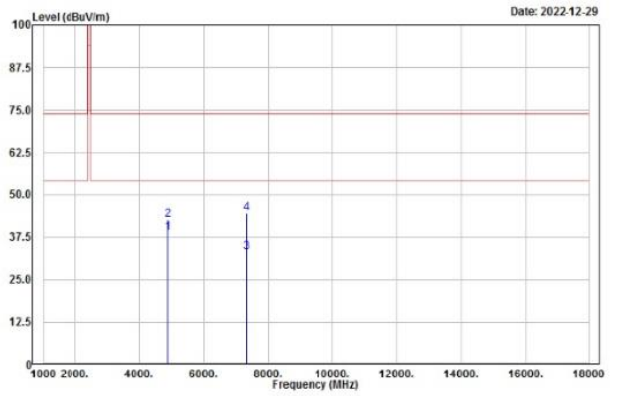

Site : LK-966A
Condition: 3m Vertical
Mode : SRD TX 2442MHz-site=z
Note : Temp/RH:17.2°C/60%
Tester: Alex

Line	Freq	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	
1	4884.000	38.65	54.00	-15.35	40.84	-2.19	Average
2	4884.000	42.53	74.00	-31.47	44.72	-2.19	Peak
3	7326.000	32.94	54.00	-21.06	29.66	3.28	Average
4	7326.000	44.48	74.00	-29.52	41.20	3.28	Peak

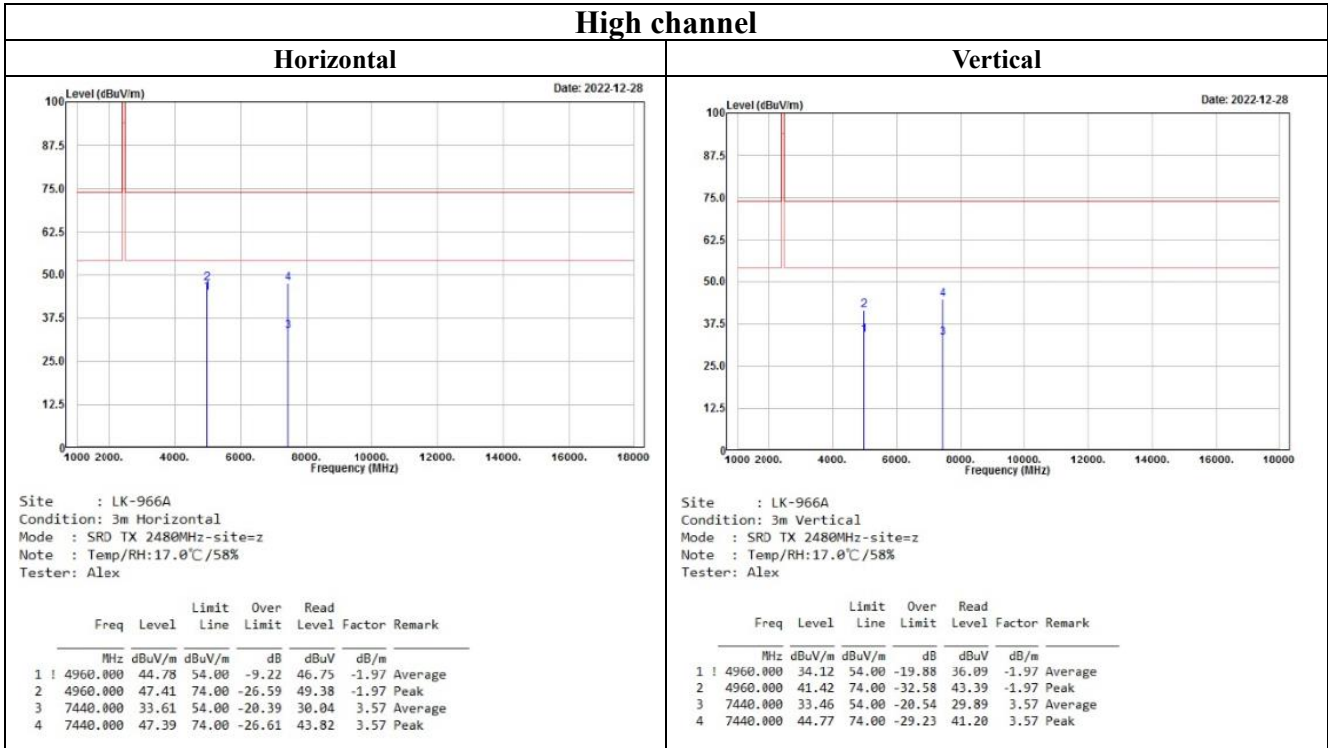


Level = Read Level + Factor

Over Limit = Level- Limit Line

Factor = Antenna Factor + Cable Loss – Amplifier Gain


18GHz-26.5GHz:

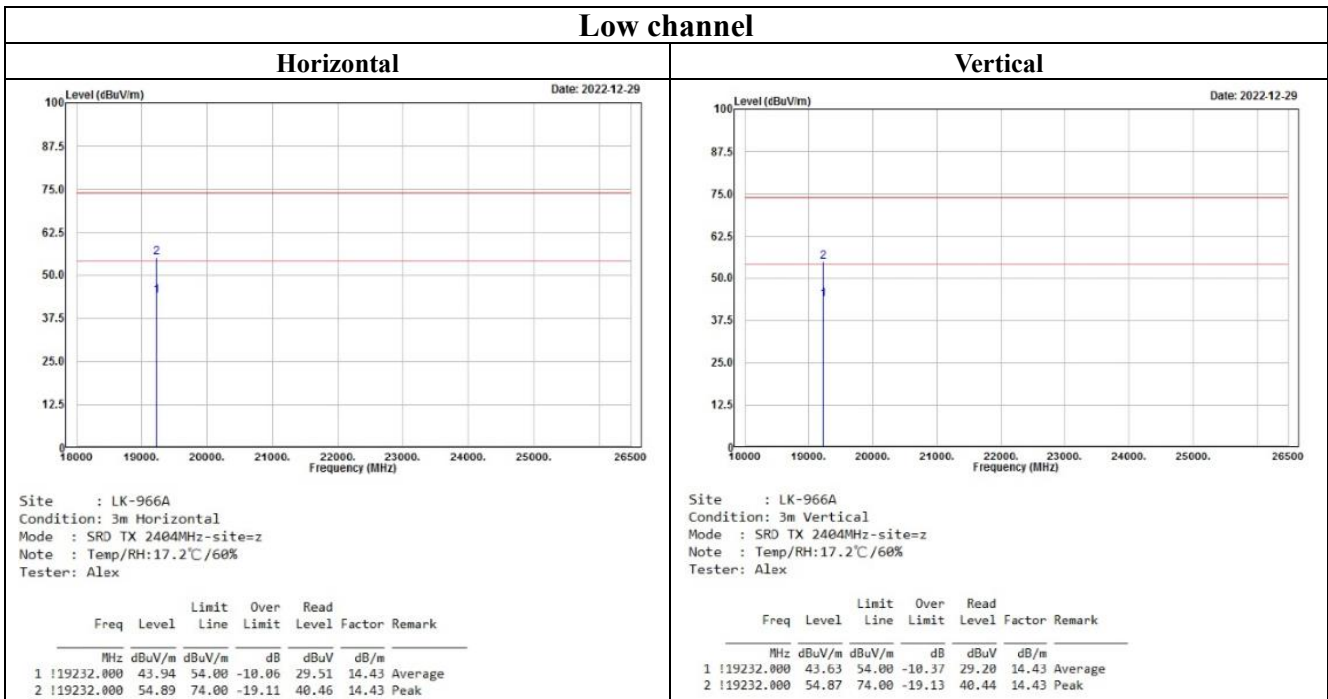

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

Middle channel


Horizontal

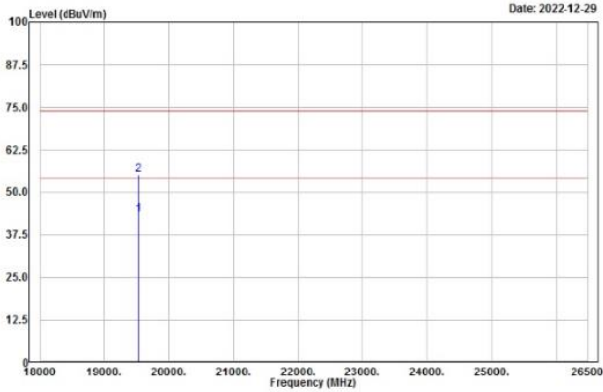

Site : LK-966A
 Condition: 3m Horizontal
 Mode : SRD TX 2442MHz-site=z
 Note : Temp/RH:17.2°C/60%
 Tester: Alex

Freq	Level	Limit	Over	Read	Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	19536.000	43.36	54.00	-10.64	29.49	13.87	Average
2	19536.000	54.92	74.00	-19.08	41.05	13.87	Peak

Vertical

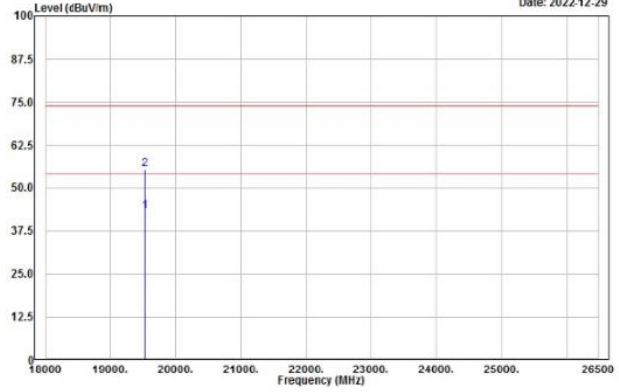


Site : LK-966A
 Condition: 3m Vertical
 Mode : SRD TX 2442MHz-site=z
 Note : Temp/RH:17.2°C/60%
 Tester: Alex

Freq	Level	Limit	Over	Read	Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	19536.000	43.12	54.00	-10.88	29.25	13.87	Average
2	19536.000	55.25	74.00	-18.75	41.38	13.87	Peak

High channel


Horizontal

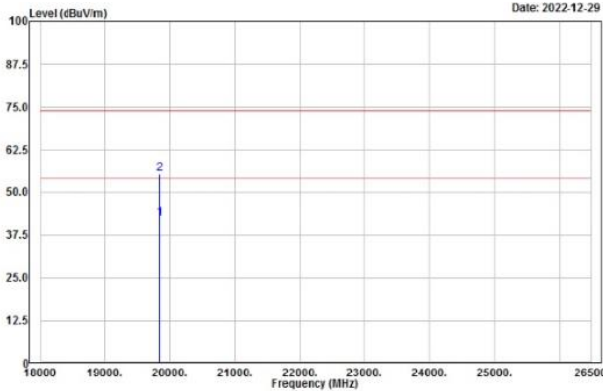

Site : LK-966A
 Condition: 3m Horizontal
 Mode : SRD TX 2480MHz-site=z
 Note : Temp/RH:17.2°C/60%
 Tester: Alex

Freq	Level	Limit	Over	Read	Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	19840.000	42.35	54.00	-11.65	29.34	13.01	Average
2	19840.000	55.16	74.00	-18.84	42.15	13.01	Peak

Vertical

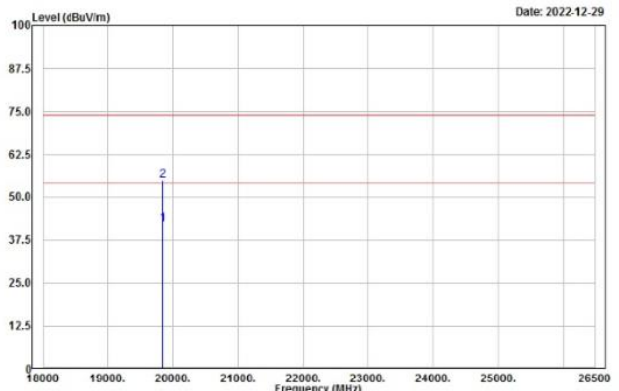

Site : LK-966A
 Condition: 3m Vertical
 Mode : SRD TX 2480MHz-site=z
 Note : Temp/RH:17.2°C/60%
 Tester: Alex

Freq	Level	Limit	Over	Read	Level	Factor	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		
1	19840.000	42.13	54.00	-11.87	29.12	13.01	Average
2	19840.000	54.76	74.00	-19.24	41.75	13.01	Peak

Level = Read Level + Factor

Over Limit = Level- Limit Line

Factor = Antenna Factor + Cable Loss – Amplifier Gain

Spurious emissions more than 20 dB below the limit were not reported

9 FCC §15.215(c) – 20 dB Bandwidth Testing

9.1 Applicable Standard

Intentional radiators operating under the alternative provisions to the general emission limits, as contained in § 15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

9.2 Test Procedure


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

9.3 Test Results


Channel	Frequency (MHz)	20 dB Emission Bandwidth (kHz)
Low	2404	584.4
Middle	2442	563.4
High	2480	590.4

Please refer to the following plots

Low Channel

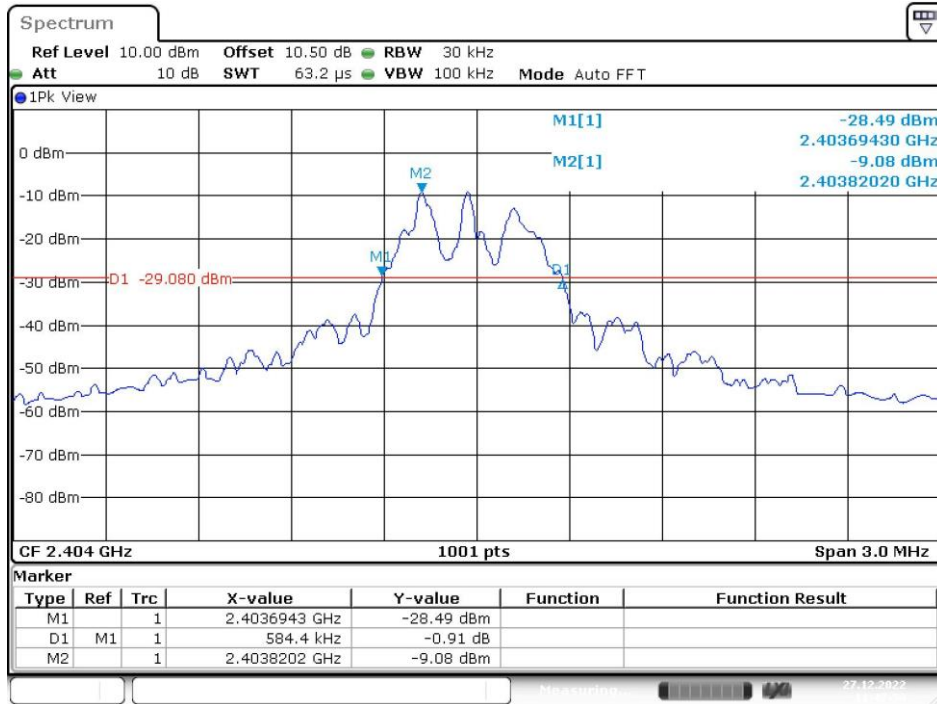


Middle Channel

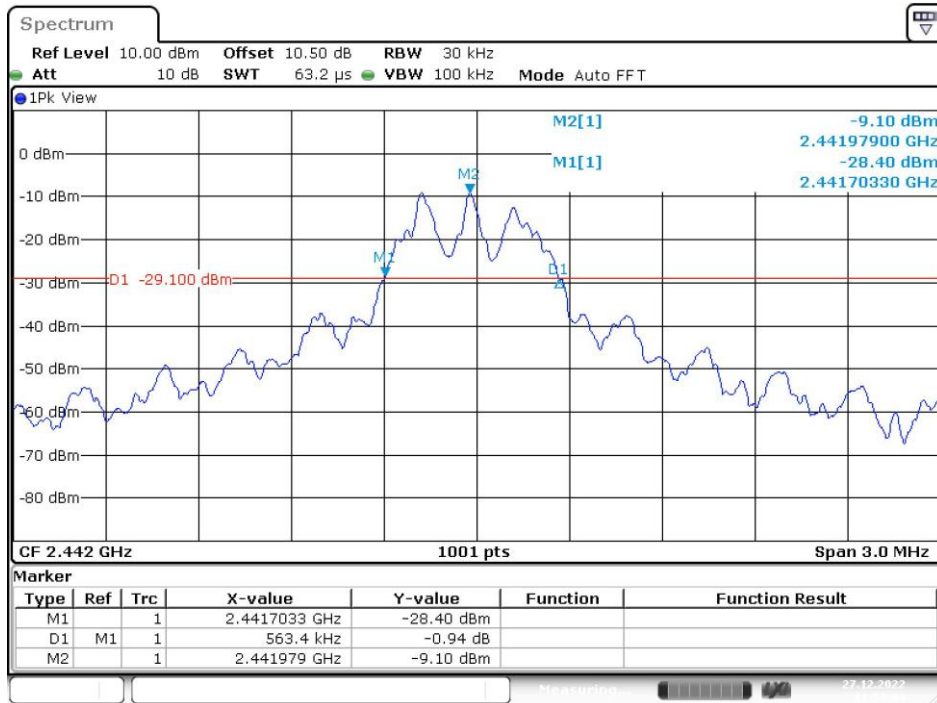

Note: It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory)

High Channel

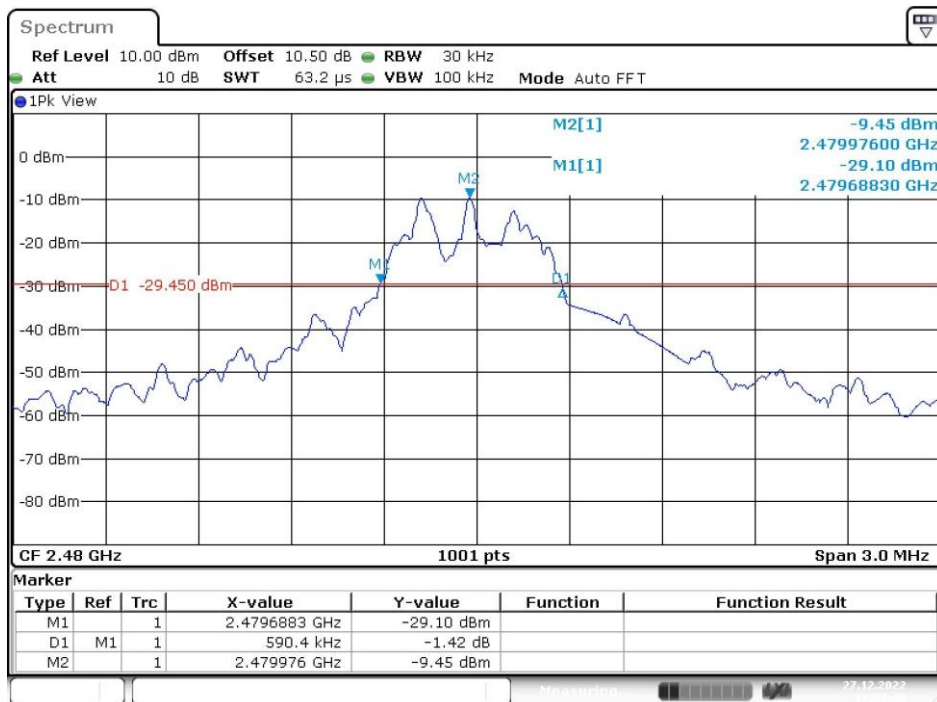

Date: 27.DEC.2022 11:53:40

***** END OF REPORT *****