

FCC Test Report

Client Name : Ugreen Group Limited

Client Address : Ugreen Building, Longcheng Industrial Park,
Longguanxi Road, Longhua, ShenZhen, China

Product Name : Magnetic Wireless Car Charger

Report Date : Dec. 21, 2022

Shenzhen Anbotek Compliance Laboratory Limited



Contents

| | |
|--|----|
| 1. General Information..... | 5 |
| 1.1. Client Information..... | 5 |
| 1.2. Description of Device (EUT)..... | 5 |
| 1.3. Auxiliary Equipment Used During Test..... | 6 |
| 1.4. Test Equipment List..... | 6 |
| 1.5. Measurement Uncertainty..... | 6 |
| 1.6. Description of Test Facility..... | 6 |
| 2. Measurement and Result..... | 7 |
| 2.1. Requirements..... | 7 |
| 2.2. Test Setup..... | 8 |
| 2.3. Test Procedure..... | 9 |
| 2.4. Test Result..... | 9 |
| APPENDIX I -- TEST SETUP PHOTOGRAPH..... | 12 |
| APPENDIX II -- EXTERNAL PHOTOGRAPH..... | 12 |
| APPENDIX III -- INTERNAL PHOTOGRAPH..... | 12 |



TEST REPORT

Applicant : Ugreen Group Limited
Manufacturer : Ugreen Group Limited
Product Name : Magnetic Wireless Car Charger
Model No. : CD345, 15120, 15120P, 15120X, 15120A, 15120B, 15120U, 15120JP
Trade Mark : **UGREEN**
Rating(s) : Input: 5V \equiv 2A, 9V \equiv 2A, 12V \equiv 2A
Output: 5W; 7.5W; 10W; 15W
Test Standard(s) : **FCC Part 1.1310, 1.1307(b)**
Test Method(s) : **KDB680106 D01 RF Exposure Wireless Charging Apps v03r01**
TCB Workshop November 2019

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 1.1307 & KDB680106 D01 requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Nov. 21, 2022

Date of Test

Nov. 21 ~ 30, 2022

Prepared By

Tu Tu Hong

(TuTu Hong)

Approved & Authorized Signer

Kingkong Jin

(Kingkong Jin)



Revision History

| Report Version | Description | Issued Date |
|----------------|-----------------|---------------|
| R00 | Original Issue. | Dec. 21, 2022 |
| | | |
| | | |



1. General Information

1.1. Client Information

| | |
|--------------|--|
| Applicant | : Ugreen Group Limited |
| Address | : Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, Shenzhen, China |
| Manufacturer | : Ugreen Group Limited |
| Address | : Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, Shenzhen, China |
| Factory | : Shenzhen Powerqi Technology Co., Ltd. |
| Address | : 2th Floor, A4 Building, A4 Block, Fangxin Science & Tech. Park, Longgang District, Shenzhen, China |

1.2. Description of Device (EUT)

| | |
|---|---|
| Product Name | : Magnetic Wireless Car Charger |
| Model No. | : CD345, 15120, 15120P, 15120X, 15120A, 15120B, 15120U, 15120JP (Note: All samples are the same except the model number, so we prepare "CD345" for test only.) |
| Trade Mark | : UGREEN |
| Test Power Supply | : DC 12V (Note: During the test, pre-scan all test voltages and only show the test data of the worst case (DC 12V) in this Report.) |
| Test Sample No. | : 1-2-1(Normal Sample), 1-2-2(Engineering Sample) |
| Adapter | : N/A |
| RF Specification | |
| Operation Frequency | : 111-205kHz |
| Modulation Type | : FSK |
| Antenna Type | : Inductive loop coil Antenna |
| Antenna Gain(Peak) | : 0 dBi (Provided by customer) |
| Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual. | |



1.3. Auxiliary Equipment Used During Test

| Description | Rating(s) |
|-------------|---------------------------------------|
| iPhone | Manufacturer: Apple M/N: iPhone 11 |

1.4. Test Equipment List

| Item | Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal. Interval |
|------|--------------------------------------|--------------|-----------|------------|---------------|---------------|
| 1 | Electric and Magnetic field Analyzer | NARDA | EHP-200A | 180ZX10202 | Oct. 17, 2022 | 1 Year |

1.5. Measurement Uncertainty

| | | |
|-----------------------------|---|-----------------|
| Magnetic Field Reading(A/m) | : | +/-0.04282(A/m) |
| Electric Field Reading(V/m) | : | +/-0.03679(V/m) |

1.6. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China. 518128



2. Measurement and Result

2.1. Requirements

According to the item 5.b) of KDB 680106 D01v03:

Inductive wireless power transfer applications that meet all of the following requirements are excluded from submitting an RF exposure evaluation.


- 1) Power transfer frequency is less than 1 MHz
- 2) Output power from each primary coil is less than or equal to 15 watts.
- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils
- 4) Client device is inserted in or placed directly in contact with the transmitter
- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)
- 6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Limits For Maximum Permissible Exposure (MPE)

| Frequency range (MHz) | Electric field strength (V/m) | Magnetic field strength (A/m) | Power density (mW/cm ²) | Averaging time (minutes) |
|---|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| (A) Limits for Occupational/Controlled Exposures | | | | |
| 0.3-3.0 | 614 | 1.63 | *(100) | 6 |
| 3.0-30 | 1842/f | 4.89/f | *(900/f ²) | 6 |
| 30-300 | 61.4 | 0.163 | 1.0 | 6 |
| 300-1500 | / | / | f/300 | 6 |
| 1500-100,000 | / | / | 5 | 6 |
| (B) Limits for General Population/Uncontrolled Exposure | | | | |
| 0.3-1.34 | 614 | 1.63 | *(100) | 30 |
| 1.34-30 | 824/f | 2.19/f | *(180/f ²) | 30 |
| 30-300 | 27.5 | 0.073 | 0.2 | 30 |
| 300-1500 | / | / | f/1500 | 30 |
| 1500-100,000 | / | / | 1.0 | 30 |
| F=frequency in MHz *=Plane-wave equivalent power density RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m). | | | | |




2.2. Test Setup

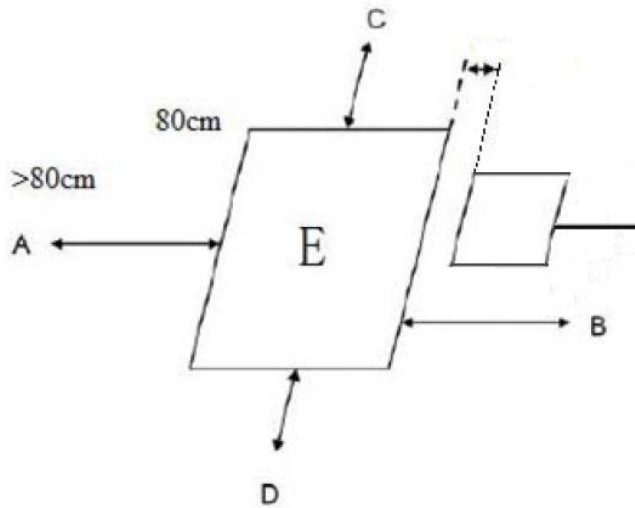

Note:

H-field data are taken along all three axes the device, from 0 cm to 10 cm, in 2 cm minimum increment measured from the edge of the device, with one axis coincident with the axis of the main coil.

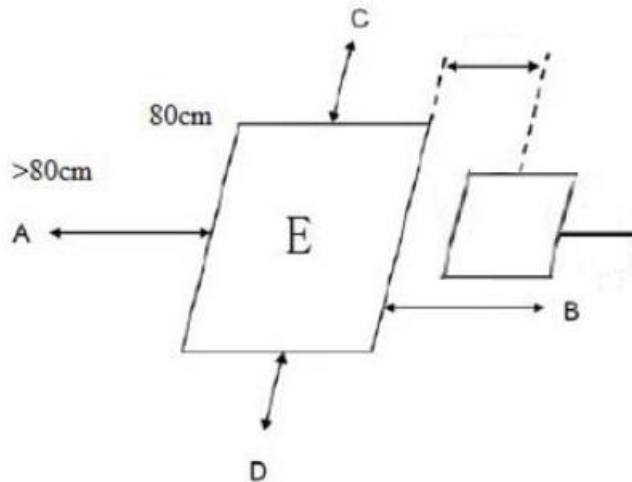

Note: Measurements should be made at 15 cm surrounding the EUT and 20cm above the top surface of the EUT. (probe radius is 4.75cm)



2.3. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at required test distance (from 0 cm to 10 cm, in 2 cm minimum increment) which is between the edge/top surface of the charger and the edge of probe.
and the measurement probe was placed at required test distance 15cm and 20cm which is between the edge of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points
(A, B, C, D, E) were completed.(A is the right, B is the back, C is the left, D is the front, and E is the top.)
- 4) The EUT was measured according to the dictates of TCB Workshop November 2019 and KDB 680106 D01 v03r01.

Remark;

The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

2.4. Test Result

2.4.1. Equipment Approval Considerations item 5.b of KDB 680106 D01 v03.

- 1) Power transfer frequency is less than 1 MHz
 - The device operate in the frequency range 111-205kHz.
- 2) Output power from each primary coil is less than 15 watts
 - The maximum output power of the primary coil is 15W.
- 3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils
 - The transfer system including a charging system with only single primary coils is to detect and allow only between individual pairs of coils.
- 4) Client device is inserted in or placed directly in contact with the transmitter
 - Client device is placed directly in contact with the transmitter.
- 5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion)
 - The EUT is a Mobile exposure conditions
- 6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.
 - Conducted the measurement with the required distance and the test results please refer to the section 2.4.



2.4.2. Environmental evaluation and exposure limit according to FCC CFR 47 part 1, 1.1307(b), 1.1310

| | | | |
|--------------|----------|--------------------|--------|
| Temperature: | 22.5°C | Relative Humidity: | 49 % |
| Pressure: | 1012 hPa | Test Voltage: | DC 12V |

Between the edge/top surface of the charger and the edge of probe

H-Field Strength:

| Test distance | Battery power | Frequency Range (kHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Reference Limit (A/m) | Limits Test (A/m) |
|---------------|---------------|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 0cm | 1% | 111-205 | 0.627 | 0.416 | 0.384 | 0.399 | 0.364 | 0.815 | 1.63 |
| | 50% | 111-205 | 0.669 | 0.453 | 0.426 | 0.437 | 0.408 | 0.815 | 1.63 |
| | 99% | 111-205 | 0.668 | 0.449 | 0.425 | 0.428 | 0.409 | 0.815 | 1.63 |
| | Stand-by | 111-205 | 0.663 | 0.453 | 0.425 | 0.433 | 0.404 | 0.815 | 1.63 |
| 2cm | 1% | 111-205 | 0.536 | 0.345 | 0.293 | 0.369 | 0.317 | 0.815 | 1.63 |
| | 50% | 111-205 | 0.529 | 0.340 | 0.291 | 0.364 | 0.315 | 0.815 | 1.63 |
| | 99% | 111-205 | 0.515 | 0.330 | 0.274 | 0.346 | 0.296 | 0.815 | 1.63 |
| | Stand-by | 111-205 | 0.530 | 0.332 | 0.283 | 0.357 | 0.308 | 0.815 | 1.63 |
| 4cm | 1% | 111-205 | 0.469 | 0.298 | 0.281 | 0.309 | 0.290 | 0.815 | 1.63 |
| | 50% | 111-205 | 0.467 | 0.298 | 0.282 | 0.310 | 0.297 | 0.815 | 1.63 |
| | 99% | 111-205 | 0.444 | 0.266 | 0.255 | 0.276 | 0.268 | 0.815 | 1.63 |
| | Stand-by | 111-205 | 0.475 | 0.306 | 0.285 | 0.309 | 0.295 | 0.815 | 1.63 |
| 6cm | 1% | 111-205 | 0.415 | 0.251 | 0.211 | 0.268 | 0.229 | 0.815 | 1.63 |
| | 50% | 111-205 | 0.394 | 0.237 | 0.206 | 0.264 | 0.216 | 0.815 | 1.63 |
| | 99% | 111-205 | 0.407 | 0.265 | 0.230 | 0.288 | 0.247 | 0.815 | 1.63 |
| | Stand-by | 111-205 | 0.411 | 0.310 | 0.282 | 0.334 | 0.293 | 0.815 | 1.63 |
| 8cm | 1% | 111-205 | 0.327 | 0.197 | 0.190 | 0.218 | 0.190 | 0.815 | 1.63 |
| | 50% | 111-205 | 0.358 | 0.231 | 0.216 | 0.253 | 0.227 | 0.815 | 1.63 |
| | 99% | 111-205 | 0.408 | 0.276 | 0.271 | 0.297 | 0.266 | 0.815 | 1.63 |
| | Stand-by | 111-205 | 0.329 | 0.204 | 0.196 | 0.219 | 0.200 | 0.815 | 1.63 |
| 10cm | 1% | 111-205 | 0.258 | 0.161 | 0.143 | 0.172 | 0.144 | 0.815 | 1.63 |
| | 50% | 111-205 | 0.200 | 0.198 | 0.170 | 0.212 | 0.179 | 0.815 | 1.63 |
| | 99% | 111-205 | 0.280 | 0.179 | 0.155 | 0.190 | 0.165 | 0.815 | 1.63 |
| | Stand-by | 111-205 | 0.279 | 0.168 | 0.150 | 0.190 | 0.160 | 0.815 | 1.63 |



Between the edge of the charger and the geometric center of probe

H-Field Strength at 15 cm surrounding the EUT and 20cm above the top surface of the EUT

| Battery power | Frequency Range (kHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Reference Limit (A/m) | Limits Test (A/m) |
|---------------|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------------|-------------------|
| 1% | 111-205 | 0.147 | 0.087 | 0.072 | 0.101 | 0.077 | 0.815 | 1.63 |
| 50% | 111-205 | 0.124 | 0.069 | 0.055 | 0.080 | 0.064 | 0.815 | 1.63 |
| 99% | 111-205 | 0.157 | 0.099 | 0.087 | 0.102 | 0.087 | 0.815 | 1.63 |
| Stand-by | 111-205 | 0.103 | 0.141 | 0.098 | 0.099 | 0.078 | 0.815 | 1.63 |

Note: All modulation and situation(full load, half load and empty load) has been tested,only the worst situation (full load 15W) was recorded in the report.



APPENDIX I -- TEST SETUP PHOTOGRAPH

Please refer to separated files Appendix I -- Test Setup Photograph_MPE

APPENDIX II -- EXTERNAL PHOTOGRAPH

Please refer to separated files Appendix II -- External Photograph

APPENDIX III -- INTERNAL PHOTOGRAPH

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

