

ANTENNA TEST REPORT

产品名称	CM816
------	-------

Summary

ITEM	SPEC.
Model Name	BT 2.4 GHz
MAX. GAIN	-2.09dBi
Polarization	Horizontal
Impedance	50 Ω
Antenna Type	PCB 板载天线
Manufacturer	

Antenna Photo & Length (mm)




位号	①	②	③
数值	2pF	1.8nH	NC

电性能测试结果


天线指标						
序号	检验项目	单位	性能指标要求	检验结果		判 决
1	频率范围	MHz	2412-2483	2400-2483		OK
2	增益	dBi	/	2400	-2.22	
				2440	-2.4	
				2480	-2.86	
4	回波损耗	dB	≤ -10	2400	-11.68	
				2440	-21.5	
				2480	-9.48	
4	驻波比	dB	/	2400	1.70	
				2440	1.17	
				2480	1.99	

回波损耗 Log Mag S11

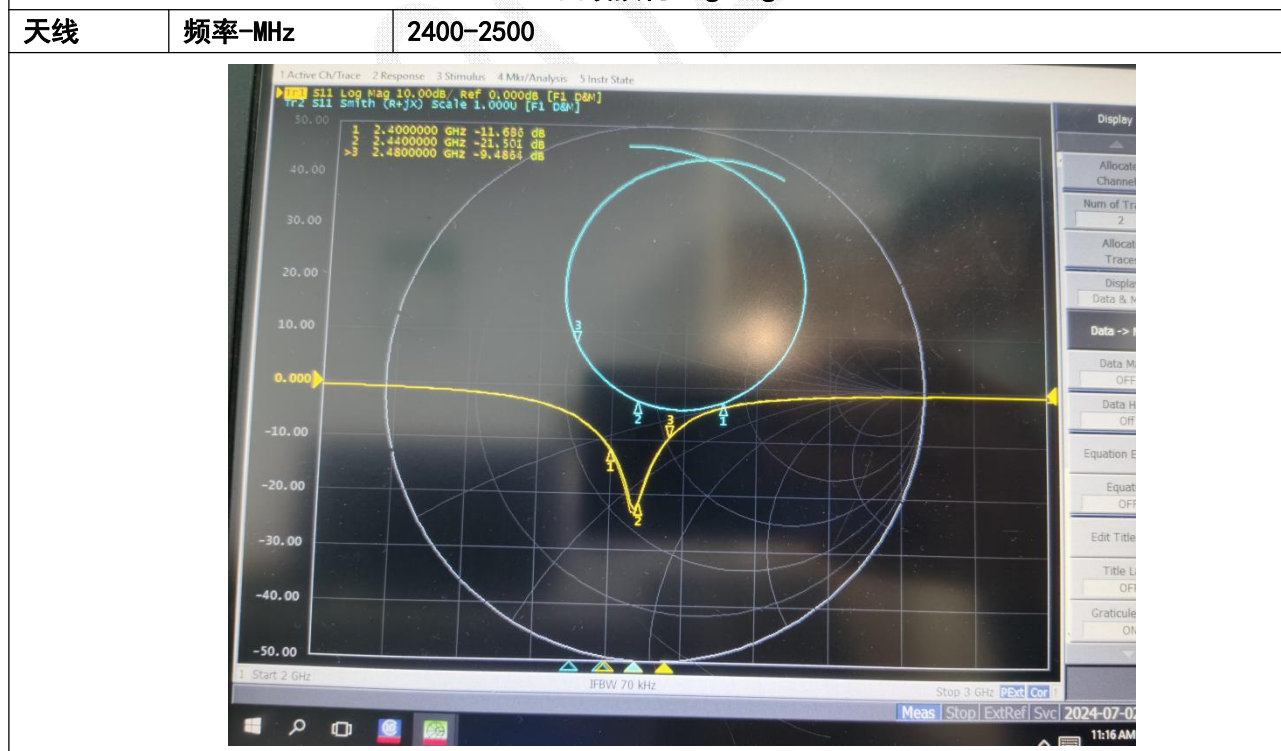

驻波比 SWR


天线	频率-MHz	2400-2500
-----------	---------------	------------------

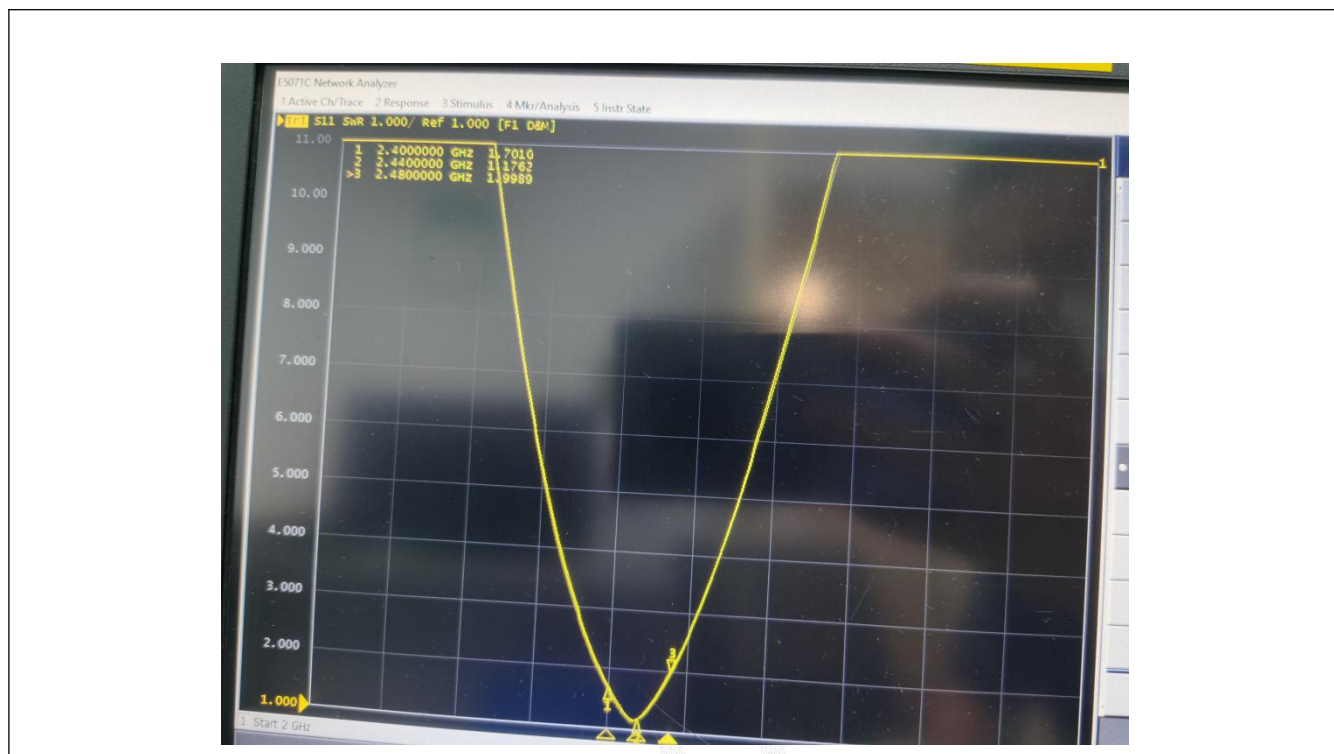


辐射参数测试

天线


辐射方向图 (2.4G)

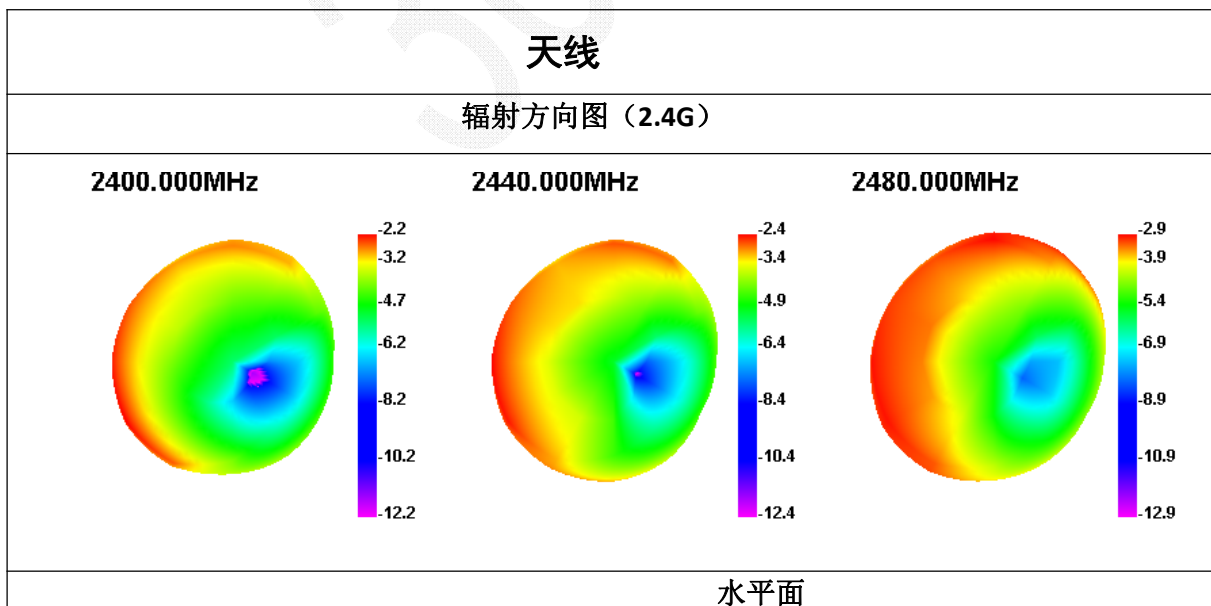


2400.000MHz H



2440.000MHz H




2480.000MHz H




垂直面


2400.000MHz E1

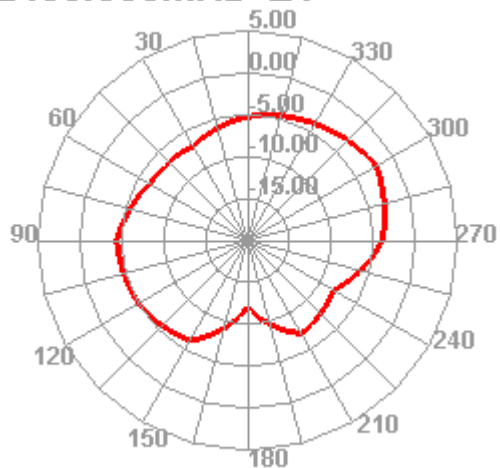


2400.000MHz E2

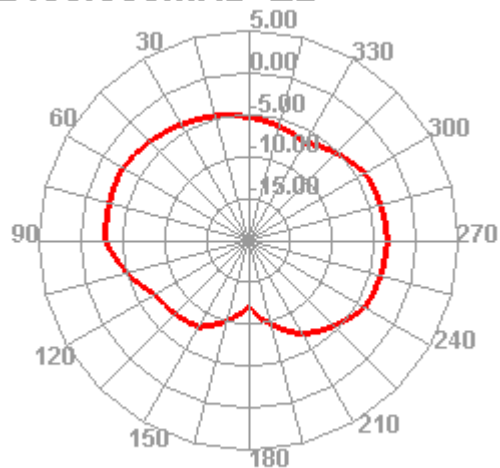


2440.000MHz E1

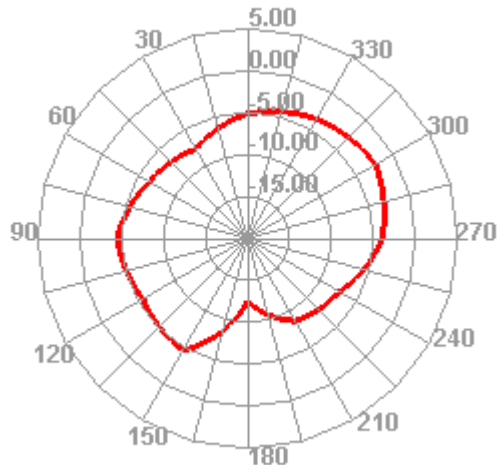

2440.000MHz E2

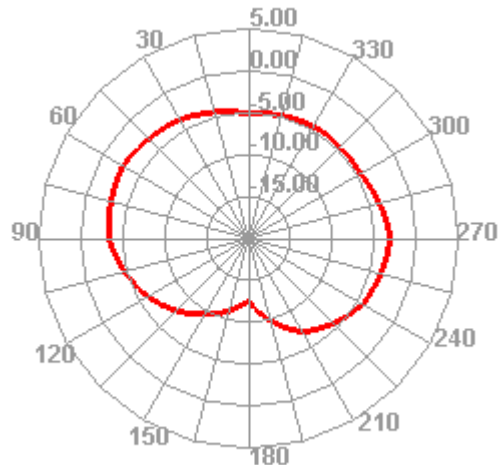

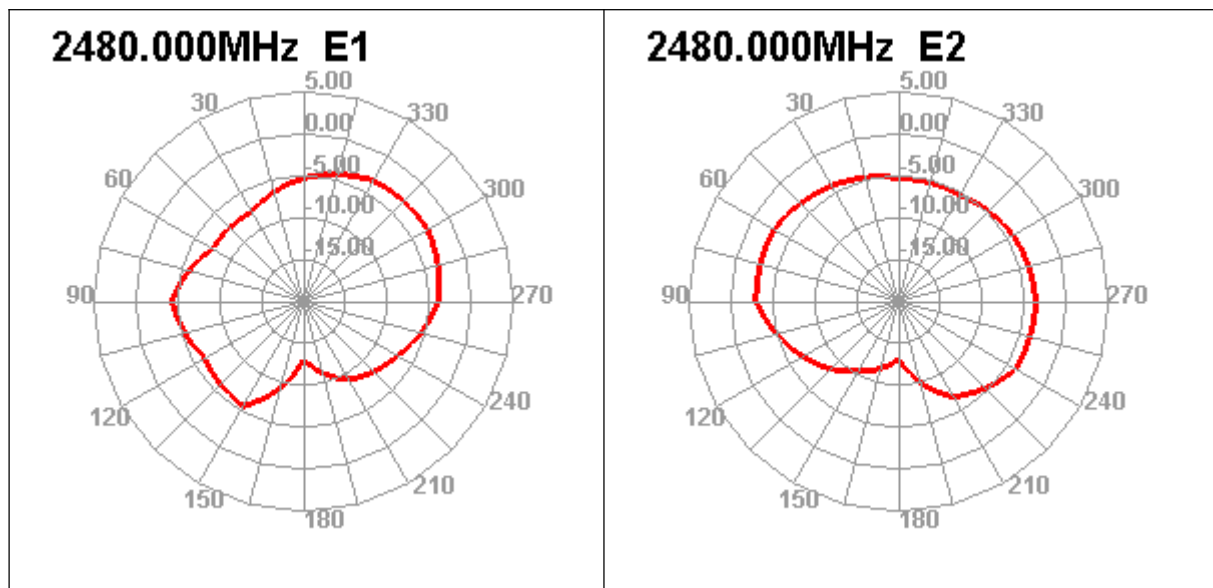

天线无源效率

Frequency	E Total. dB(dBi)	Efficiency(%)
2400MHz	-2.22	33.81
2410MHz	-2.09	34.07
2420MHz	-2.13	34.07
2430MHz	-2.35	33.36
2440MHz	-2.4	34.04
2450MHz	-2.51	34.7
2460MHz	-2.38	35.52
2470MHz	-2.78	33.07
2480MHz	-2.86	32.51
2490MHz	-2.39	35.24
2500MHz	-2.55	32.49