裁切线	辅助线
压痕线	牙 刀
V 槽线	画 线
半穿刀	

■外表面视图 □内表面视图

版本	变更描述	变更日期	设计者
A01	初始发行	2023.07.24	李雪嫚

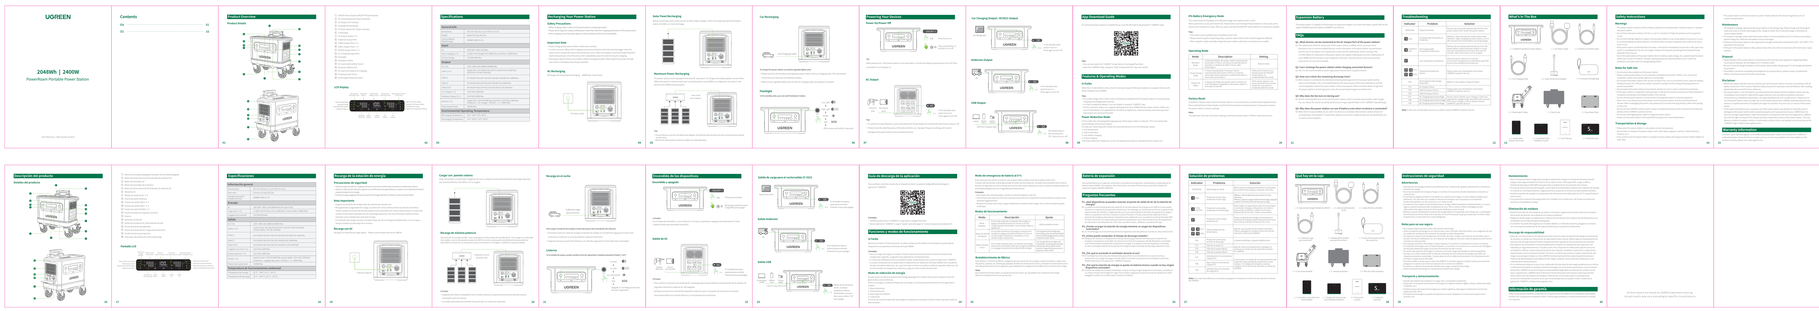

备注:

1. 材质：105g双铜
2. 表面处理：覆哑膜
3. 印刷颜色：4C+1专 PANTONE 3415C
4. 成型尺寸：160x120mm
5. 尺寸公差：±1 mm
6. 印刷偏位：<=0.5 mm
7. 套印偏位：<=0.35 mm
8. 成型工艺：风琴折
9. **所有成品及辅料符合欧盟包装指令94/62/EC,美国TPCH,欧盟REACH**
10. 印刷油墨（成品）矿物油含量需满足MOSH(C16-C35)小于0.1%；MOAH（1-7芳香环）小于0.1%；MOAH（3-7芳香环）小于0.0001%。

SELECT			V						
Dim \ TOL.	A	B	C	EPS	EPE	EPP	BAG	CTN	LABEL
0~6	0.05	0.05	0.10						0.20
6~30	0.10	0.15	0.20	0.50	0.50	0.50	3.00		0.20
30~120	0.15	0.20	0.30	0.50	0.50	0.50	5.00	1.00	0.25
120~300	0.20	0.30	0.40	1.00	1.00	1.00	10.00	1.00	0.30
300~450	0.25	0.40	0.50	2.00	2.00	2.00	15.00	2.00	0.50
450~600	0.30	0.50	0.60	3.00	3.00	3.00	20.00	3.00	0.80
DRAFT TOLERANCE			± 0.20°		CRITICAL DIM. MARK				*

SCALE 1:1

SHEET 1/1

UNIT mm

UGREEN 绿联 深圳市绿联科技股份有限公司

物料名称: GS2200 15355说明书

产品名称	料号	项目工程师	核准
GS2200 2200W 智能户外电源		王帅兵	曾李同

版本	变更描述	变更日期	设计者
A01	初始发行	2022/11/29	张雪峰
A02	删除相关不适用的FCC警示语，更改成型工艺	2022/12/2	张雪峰

裁切线　辅助线
压痕线　牙　刀
V槽线　画　线
半穿刀

■外表面视图　□内表面视图

定向市场：

移动储能电源（美+加拿大）　说明卡

封面

背面

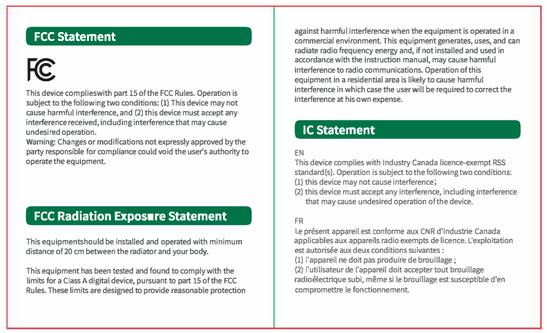

FCC Statement

This device complieswith part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement

This equipmentshould be installed and operated with minimum distance of 20 cm between the radiator and your body.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

IC Statement

EN
This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:
(1) this device may not cause interference;
(2) this device must accept any interference, including interference that may cause undesired operation of the device.

FR
Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :
(1) l'appareil ne doit pas produire de brouillage ;
(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

正面

CAN ICES-003(A) / NMB-003(A)
This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Cet équipement est conforme aux limites d' exposition aux rayonnements de la IC établies pour unenvironnement non contrôlé. Cet équipement doit être installé et fonctionner à au moins 20cm de distance d'un radiateur ou de votre corps. Cet émetteur ne doit pas être co-localisé ni fonctionner en conjonction avec une autre antenne ou un autre émetteur.

03.BB.00000.UG.0203.15

User Instruction

UGREEN

备注：
1. 材质：80g白牛皮纸
2. 表面处理：正面过哑胶
3. 印刷颜色：1C+1专 ■Pantone 3415C
4. 成型尺寸：58x70mm
5. 展开尺寸：174x70mm
6. 尺寸公差：±0.5 mm
7. 印刷偏位：<=0.5 mm
8. 套印偏位：<=0.35 mm
9. 成型工艺：对折
10. 所有成品及辅料符合欧盟包装指令94/62/EC，美国TPCH，欧盟REACH
11.印刷油墨（成品）矿物油含量需满足MOSH(C15-C36)小于0.1%；
MOAH（1-7芳香环）小于0.1%；MOAH（3-7芳香环）小于0.0001%

SELECT			V							
Dim \ TOL.	A	B	C	EPS	EPE	EPP	BAG	CTN	LABEL	
0~6	0.05	0.05	0.10						0.20	
6~30	0.10	0.15	0.20	0.50	0.50	0.50	3.00		0.20	
30~120	0.15	0.20	0.30	0.50	0.50	0.50	5.00	1.00	0.25	
120~300	0.20	0.30	0.40	1.00	1.00	1.00	10.00	1.00	0.30	
300~450	0.25	0.40	0.50	2.00	2.00	2.00	15.00	2.00	0.50	
450~600	0.30	0.50	0.60	3.00	3.00	3.00	20.00	3.00	0.80	
DRAFT TOLERANCE			± 0.20°	CRITICAL DIM. MARK					*	

SCALE 1:1
SHEET 1/1
UNIT mm

UGREEN 绿联 深圳市绿联科技股份有限公司

物料名称：（外贸说明卡K1）移动储能电源（美+加拿大）

产品名称	料号	项目工程师	核准
		/	何艳芳