



中国认可
国际互认
检测
TESTING
CNAS L6791

TEST REPORT

Applicant: Ugreen Group Limited
Address: UGREEN Building, Longcheng Industrial Park
Longguanxi Road, Longhua, ShenZhen, China
Equipment Type: Multi-mode Wireless Keyboard
Model Name: K356 (refer to section 2.3)
Brand Name: **UGREEN**
FCC ID: 2AQI5-K356
Test Standard: 47 CFR Part 15 Subpart C
(refer to section 3.1)
Sample Arrival Date: Nov. 29, 2023
Test Date: Nov. 30, 2023 - Dec. 06, 2023
Date of Issue: Dec. 19, 2023

ISSUED BY:

Shenzhen BALUN Technology Co., Ltd.

Tested by: Julie Zhu

Checked by: Ye Hongji

Approved by: Hanson Lin

(Vice General Manager)

Revision History		
Version	Issue Date	Revisions
<u>Rev. 01</u>	<u>Dec. 19, 2023</u>	<u>Initial Issue</u>

TABLE OF CONTENTS

1	GENERAL INFORMATION	4
1.1	Test Laboratory	4
1.2	Test Location	4
2	PRODUCT INFORMATION	5
2.1	Applicant Information	5
2.2	Manufacturer Information	5
2.3	General Description for Equipment under Test (EUT)	5
2.4	Technical Information	6
3	SUMMARY OF TEST RESULTS	7
3.1	Test Standards	7
3.2	Verdict	7
4	GENERAL TEST CONFIGURATIONS	8
4.1	Test Environments	8
4.2	Test Equipment List	8
4.3	Test Software List	9
4.4	Measurement Uncertainty	9
4.5	Description of Test Setup	9
4.6	Measurement Results Explanation Example	12
5	TEST ITEMS	13
5.1	Antenna Requirements	13
5.2	Number of Hopping Frequency	14
5.3	Peak Output Power	15
5.4	Occupied Bandwidth	17
5.5	Carrier Frequency Separation	20

5.6	Time of Occupancy (Dwell time)	22
5.7	Conducted Spurious Emission & Authorized-band band-edge	23
5.8	Conducted Emission	27
5.9	Radiated Spurious Emission	30
5.10	Band Edge (Restricted-band band-edge).....	40
ANNEX A	TEST SETUP PHOTOS	43
1	Radiated Test Photo.....	43
2	Conducted Test Photo.....	46
3	Conducted Emissions.....	46
ANNEX B	EUT EXTERNAL PHOTOS	48
ANNEX C	EUT INTERNAL PHOTOS	52

1 GENERAL INFORMATION

1.1 Test Laboratory

Name	Shenzhen BALUN Technology Co., Ltd.
Address	Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Phone Number	+86 755 6685 0100

1.2 Test Location

Name	Shenzhen BALUN Technology Co., Ltd.
Location	<input checked="" type="checkbox"/> Block B, 1/F, Baisha Science and Technology Park, Shahe Xi Road, Nanshan District, Shenzhen, Guangdong Province, P. R. China
	<input type="checkbox"/> 1/F, Building B, Ganghongji High-tech Intelligent Industrial Park, No. 1008, Songbai Road, Yangguang Community, Xili Sub-district, Nanshan District, Shenzhen, Guangdong Province, P. R. China
Accreditation Certificate	The laboratory is a testing organization accredited by FCC as a accredited testing laboratory. The designation number is CN1196.

2 PRODUCT INFORMATION

2.1 Applicant Information

Applicant	Ugreen Group Limited
Address	UGREEN Building, Longcheng Industrial Park Longguanxi Road, Longhua, ShenZhen, China

2.2 Manufacturer Information

Manufacturer	Ugreen Group Limited
Address	UGREEN Building, Longcheng Industrial Park Longguanxi Road, Longhua, ShenZhen, China

2.3 General Description for Equipment under Test (EUT)

EUT Name	Multi-mode Wireless Keyboard
Model Name Under Test	K356
Series Model Name	35307, 35308, 35309, 35072, 35073
Description of Model name differentiation	All models are same with electrical parameters and internal circuit structure, but only differ in color and model name. (this information provided by the applicant)
Hardware Version	V1.1
Software Version	J0B
Dimensions (Approx.)	N/A
Weight (Approx.)	N/A

2.4 Technical Information

Network and Wireless connectivity	Bluetooth (BLE), 2.4G ISM Band
-----------------------------------	--------------------------------

The requirement for the following technical information of the EUT was tested in this report:

Modulation Technology	FHSS
Modulation Type	GFSK
Product Type	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable <input type="checkbox"/> Fix Location
Transfer Rate	1 Mbps
Frequency Range	The frequency range used is 2402 MHz – 2480 MHz; The frequency block is 2400 MHz to 2483.5 MHz.
Number of Channel	40
Tested Channel	Low channel (2402 MHz), Middle channel(2440 MHz), High channel (2480 MHz)
Antenna Type	PCB Antenna
Antenna Gain	-1.46 dBi
Adaptive or non-adaptive	Non-Adaptive
The Max RF Output power	-0.14 dBm

Channel List

Number	Frequency (MHz)	Number	Frequency (MHz)	Number	Frequency (MHz)
1	2402(Low)	15	2430	29	2458
2	2404	16	2432	30	2460
3	2406	17	2434	31	2462
4	2408	18	2436	32	2464
5	2410	19	2438	33	2466
6	2412	20	2440(Middle)	34	2468
7	2414	21	2442	35	2470
8	2416	22	2444	36	2472
9	2418	23	2446	37	2474
10	2420	24	2448	38	2476
11	2422	25	2450	39	2478
12	2424	26	2452	40	2480(High)
13	2426	27	2454	--	--
14	2428	28	2456	--	--

Note: The modulation is GFSK with FHSS, there are total 40 channels (frequency range is 2402-2480MHz, channel step is 2MHz, totally 40 channels). In this report, the equipment select the lowest, middle and highest channel from 40 channels, Which are 2402 MHz, 2440 MHz and 2480 MHz. The more information please refer to the manufacturer's instructions.

3 SUMMARY OF TEST RESULTS

3.1 Test Standards

No.	Identity	Document Title
1	47 CFR Part 15, Subpart C	Intentional radiators of radio frequency equipment
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices
3 ☆	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for compliance measurements on digital transmission system, frequency hopping spread spectrum system, and hybrid system devices operating under section 15.247 of the FCC rules

3.2 Verdict

No.	Description	FCC Part No.	Test Result	Verdict
1	Antenna Requirement	15.203	--	Pass ^{Note}
2	Number of Hopping Frequency	15.247(a)	5.2.4	Pass
3	Peak Output Power	15.247(b)	5.3.4	Pass
4	Occupied Bandwidth	15.247(a)	5.4.4	Pass
5	Hopping Frequency Separation	15.247(a)	5.5.4	Pass
6	Time of Occupancy (Dwell time)	15.247(a)	5.6.4	Pass
7	Conducted Spurious Emission & Authorized-band band-edge	15.247(d)	5.7.4	Pass
8	Conducted Emission	15.207	5.8.4	Pass
9	Radiated Spurious Emission	15.209 15.247(d)	5.9.4	Pass
10	Band Edge (Restricted-band band-edge)	15.209 15.247(d)	5.10.4	Pass

Note: The EUT has a permanently and irreplaceable attached antenna, which complies with the requirement FCC 15.203.

4 GENERAL TEST CONFIGURATIONS

4.1 Test Environments

During the measurement, the normal environmental conditions were within the listed ranges:

Relative Humidity	47% to 63%	
Atmospheric Pressure	100 kPa to 102 kPa	
Temperature	NT (Normal Temperature)	+21.9°C to +23.3°C
Working Voltage of the EUT	NV (Normal Voltage)	3.0 V

4.2 Test Equipment List

Description	Manufacturer	Model	Serial No.	Cal. Date	Cal. Due
Spectrum Analyzer	KEYSIGHT	N9020A	MY50330200	2023.05.16	2024.05.15
Spectrum Analyzer	ROHDE&SCHWARZ	FSV-40	101544	2022.12.28	2023.12.27
Spectrum Analyzer	KEYSIGHT	N9020A	MY52510065	2023.09.05	2024.09.04
Signaling Unit	ROHDE&SCHWARZ	CMW500	171150	2023.06.19	2024.06.18
Test Antenna-Horn	SCHWARZBECK	BBHA 9120D	01631	2022.02.03	2025.02.02
Test Antenna-Horn	A-INFO	LB-180400KF	J211060273	2021.07.02	2024.07.01
Anechoic Chamber	RAINFORD	9m*6m*6m	144	2022.02.19	2024.09.03
Amplifier	COM-MV	ZT30-1000M	18110850	2023.09.05	2024.09.04
Amplifier	COM-MV	LSCX_LNA1-12G-01	180602	2023.09.05	2024.09.04
Amplifier	COM-MV	XKu_LNA7-18G-01	180601	2023.09.05	2024.09.04
Amplifier	COM-MV	KA LNA18 40G-01	18050001	2022.12.07	2023.12.06
EMI Receiver	Agilent	N9038A	MY55330120	2023.09.05	2024.09.04
Test Antenna-Bi-Log	SCHWARZBECK	VULB 9168	9168-00867	2022.04.12	2025.04.11
Anechoic Chamber	YiHeng	9m*6m*6m	142	2022.02.19	2024.08.18
Amplifier	COM-MV	ZT30-1000M	B2017119081	2023.09.05	2024.09.04
EMI Receiver	ROHDE&SCHWARZ	ESRP	101036	2023.09.05	2024.09.04
Test Antenna-Loop	SCHWARZBECK	FMZB 1519	1519-037	2021.04.16	2024.04.15
Anechoic Chamber	EMC Electronic Co., Ltd	20.10*11.60*7.35m	130	2021.08.15	2024.08.14
EMI Receiver	KEYSIGHT	N9010B	MY57110309	2023.09.05	2024.09.04
LISN	SCHWARZBECK	NSLK 8127	8127-687	2023.05.16	2024.05.15
Shielded Enclosure	YiHeng Electronic Co., Ltd	3.5m*3.1m*2.8m	112	2022.02.19	2025.02.18

4.3 Test Software List

Description	Manufacturer	Software Version	Serial No.	Applicable test Setup
BL410R	BALUN	V2.1.1.488	N/A	The section 4.5.1
BL410E	BALUN	V22.930	N/A	The section 4.5.2&4.5.3&4.5.4&4.5.5

4.4 Measurement Uncertainty

The following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2.

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Parameters	Uncertainty
Occupied Channel Bandwidth	2.8%
RF output power, conducted	1.28 dB
Power Spectral Density, conducted	1.30 dB
Unwanted Emissions, conducted	1.84 dB
All emissions, radiated	5.36 dB
Temperature	0.8°C
Humidity	4%

4.5 Description of Test Setup

4.5.1 For Antenna Port Test

Conducted value (dBm) = Measurement value (dBm) + cable loss (dB)

For example: the measurement value is 10 dBm and the cable 0.5dBm used, then the final result of EUT:

Conducted value (dBm) = 10 dBm + 0.5 dB = 10.5 dBm




(Diagram 1)

4.5.2. For AC Power Supply Port Test




(Diagram 2)

4.5.3. For Radiated Test (Below 30 MHz)

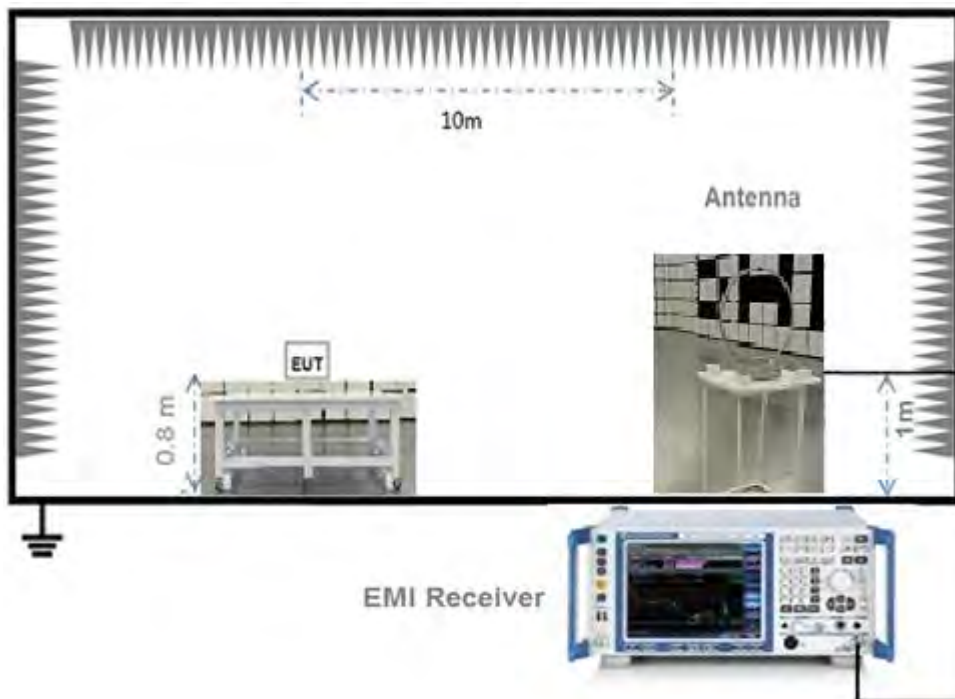


(Diagram 3)

4.5.4. For Radiated Test (30 MHz-1 GHz)

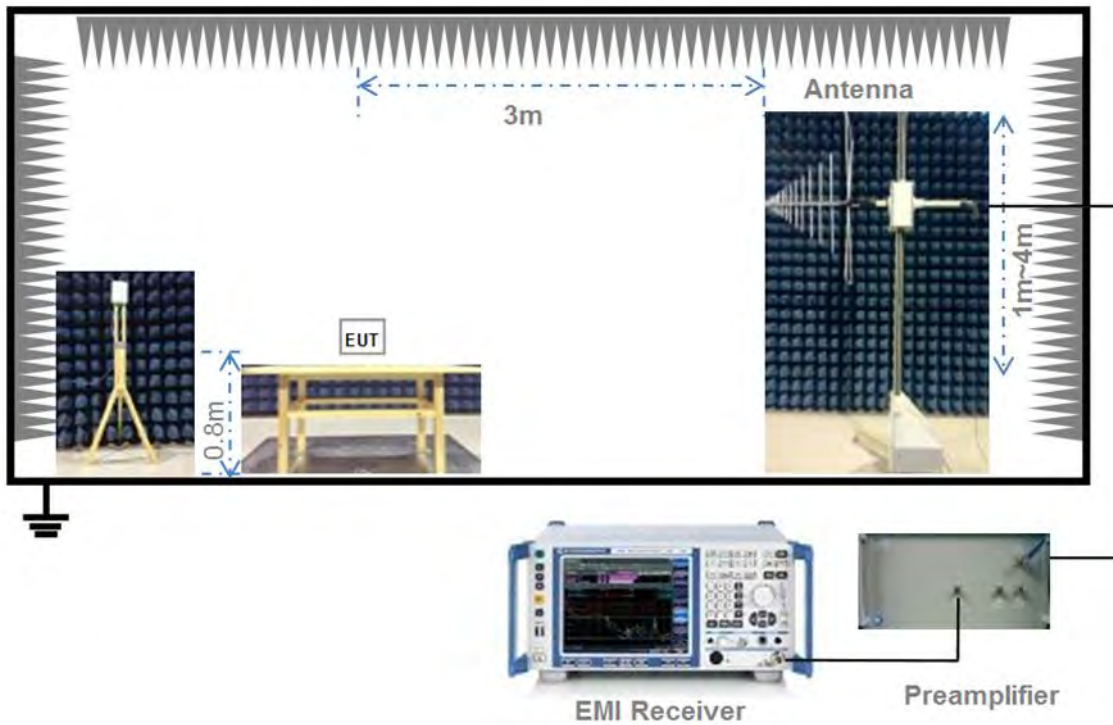

(Diagram 4)

4.5.5. For Radiated Test (Above 1 GHz)

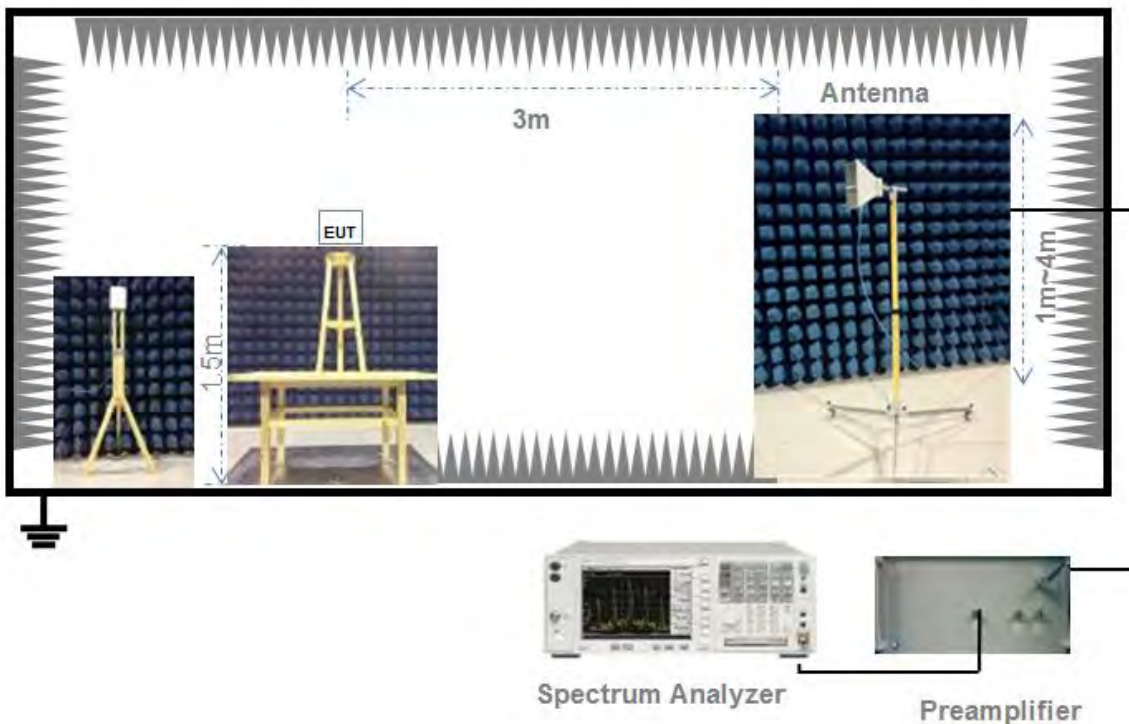

(Diagram 5)

4.6 Measurement Results Explanation Example

4.6.1 For conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

4.6.2 For radiated band edges and spurious emission test:

Per part 15.35(c), the EUT Bluetooth average emission level could be determined by the peak emission level applying duty cycle correction factor, to represent averaging over the whole pulse train.

The average level is derived from the peak level corrected with "Duty cycle correction factor".

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + Duty cycle correction factor (dB)

Duty cycle correction factor (dB) = $20 * \log(\text{Duty cycle})$.

Duty cycle = on time / 100 milliseconds

On time = dwell time * hopping number in 100 ms

For example: bluetooth with dwell time 2.9 ms and 3 hops in 100 ms, then

Duty cycle correction factor (dB) = $20 * \log((2.9 * 3) / 100) = -21.21 \text{ dB}$

Following shows an average computation example with duty cycle correction factor = -21.21 dB, and the peak emission level is 45.61 dBuV/m.

Example:

Average Emission Level (dBuV/m) = Peak Emission Level (dBuV/m) + duty cycle correction factor (dB)
= $45.61 + (-21.21) = 24.4 \text{ (dBuV/m)}$

5 TEST ITEMS

5.1 Antenna Requirements

5.1.1 Relevant Standards

FCC §15.203 & 15.247(b); RSS-247, 5.4 (6)

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, § 15.213, § 15.217, § 15.219, or § 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

If directional gain of transmitting antennas is greater than 6 dBi, the power shall be reduced by the same level in dB comparing to gain minus 6 dBi. For the fixed point-to-point operation, the power shall be reduced by one dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

5.1.2 Antenna Anti-Replacement Construction

The Antenna Anti-Replacement as following method:

Protected Method	Description
The antenna is embedded in the product.	The antenna is welded on the mainboard, can't be replaced by the consumer

Reference Documents	Item
Photo	Please refer to the EUT Photo documents.

5.1.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

5.2 Number of Hopping Frequency

5.2.1 Limit

FCC §15.247(a) (1) (iii)

Frequency hopping systems operating in the 2400 MHz to 2483.5 MHz bands shall use at least 15 hopping frequencies.

5.2.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize


5.2.4 Test Result

Test Data

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Verdict
GFSK	2400 - 2483.5	40	15	Pass

Test plots

GFSK 2.4 GHz ~ 2.4835 GHz

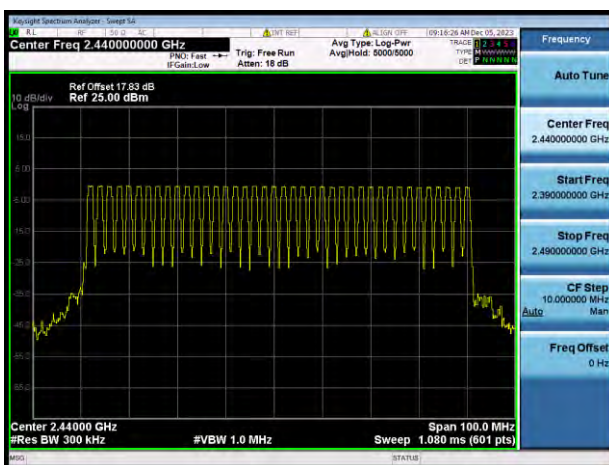

5.3 Peak Output Power

5.3.1 Test Limit

FCC § 15.247(b)

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

5.3.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.3.3 Test Procedure

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel

RBW > the 20 dB bandwidth of the emission being measured

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

5.3.4 Test Result

Peak Power Test Data


Channel	Measured Output Peak Power		Limit		Verdict
	dBm	mW	dBm	mW	
Low	-0.14	0.97	30	1000	Pass
Middle	-0.27	0.94			Pass
High	-0.57	0.88			Pass

Test plots


GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL

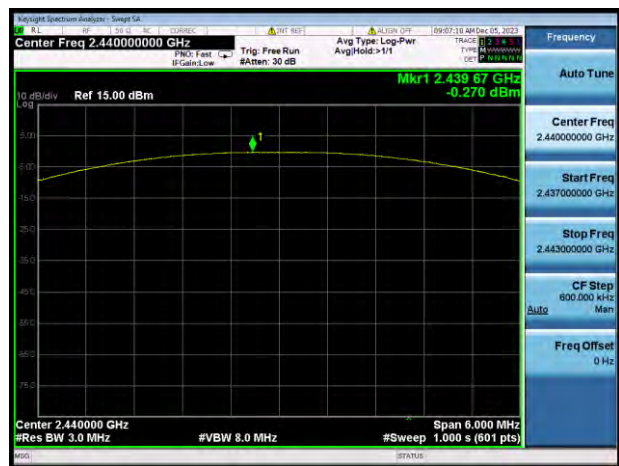

GFSK HIGH CHANNEL

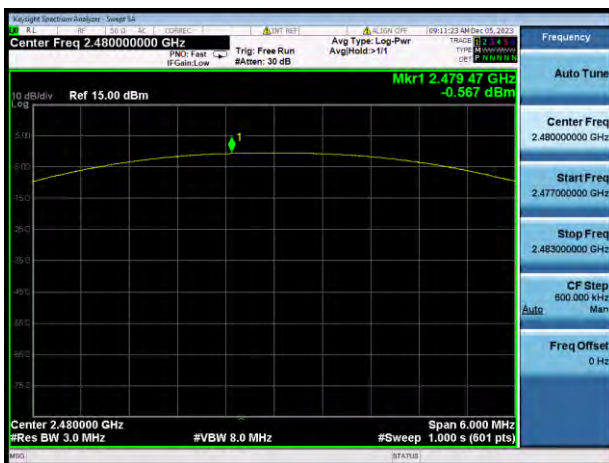

5.4 Occupied Bandwidth

5.4.1 Limit

FCC §15.247(a)

Measurement of the 20dB bandwidth of the modulated signal.

5.4.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate, Allow the trace to stabilize.

5.4.4 Test Result

Test Data

Test Mode	GFSK	
Channel	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
Low Channel	1.095000	1.020300
Middle Channel	1.100000	1.023000
High Channel	1.100000	1.024900

Test plots

20 dB Bandwidth

GFSK LOW CHANNEL



GFSK MIDDLE CHANNEL




GFSK HIGH CHANNEL



99% Bandwidth

GFSK LOW CHANNEL

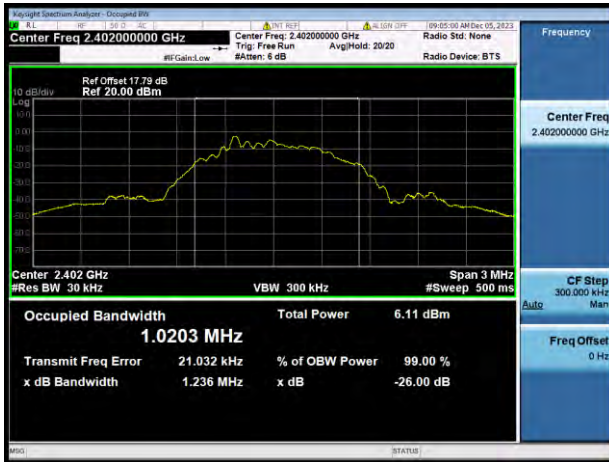

GFSK MIDDLE CHANNEL



GFSK HIGH CHANNEL



5.5 Carrier Frequency Separation

5.5.1 Limit

FCC §15.247(a)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

5.5.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) \geq 1% of the span

Video (or Average) Bandwidth (VBW) \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

5.5.4 Test Result

Test Data

Mode	Frequency separation (MHz)	2/3 of the 20 dB Bandwidth (MHz)	Verdict
GFSK	2.000	0.733	Pass

Test Plots

GFSK



5.6 Time of Occupancy (Dwell time)

5.6.1 Limit

FCC §15.247(a)

Frequency hopping systems in the 2400 MHz - 2483.5 MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

5.6.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.6.3 Test Procedure

The average time of occupancy on any channel within the Period can be calculated with formulas:

$$\{\text{Total of Dwell}\} = \{\text{Pulse Time}\} * \{\text{Number of Hopping Frequency in Period}\}$$

$$\{\text{Period}\} = 0.4s * \{\text{Number of Hopping Frequency}\}$$

The middle channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.

5.6.4 Test Result



Test Data

GFSK			
Pulse Width (ms)	Total of Dwell (ms)	Limit (sec)	Verdict
0.413	264.512	0.4	Pass

Test Plots

Pulse Width

1s

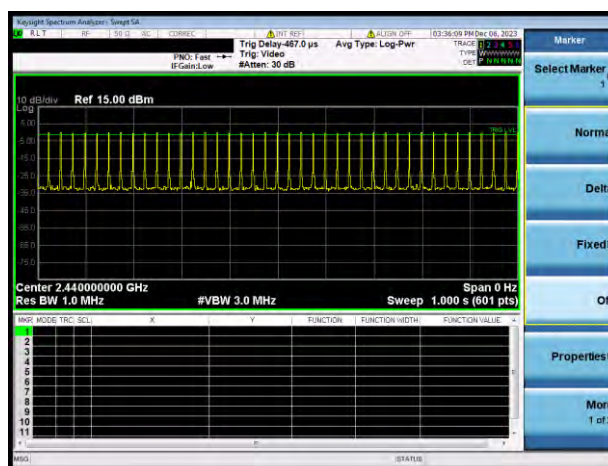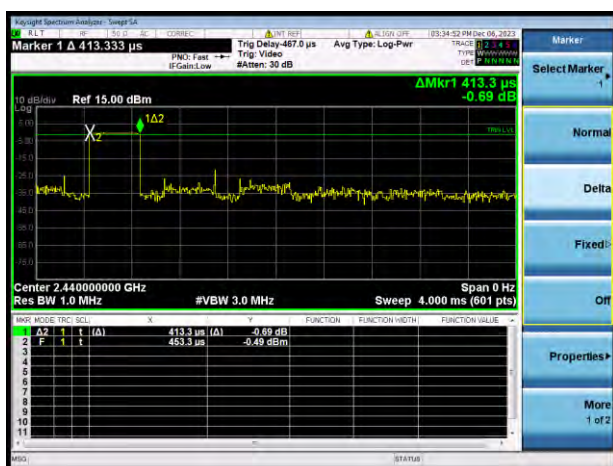

5.7 Conducted Spurious Emission & Authorized-band band-edge

5.7.1 Limit

FCC §15.247(d); RSS-247, 5.5

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.7.2 Test Setup

See section 4.5.1 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize

5.7.4 Test Result

Test Data

GFSK Mode:


GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
Low	-23.96	-0.53	-20.53	Pass
Middle	-24.22	-0.69	-20.69	Pass
High	-24.35	-1.00	-21.00	Pass

Hopping Mode:

GFSK				
Channel	Measured Max. Out of Band Emission (dBm)	Limit (dBm)		Verdict
		Carrier Level	Calculated 20 dBc Limit	
GFSK	-23.64	-0.38	-20.38	Pass

Test Plots

GFSK LOW CHANNEL, CARRIER LEVEL

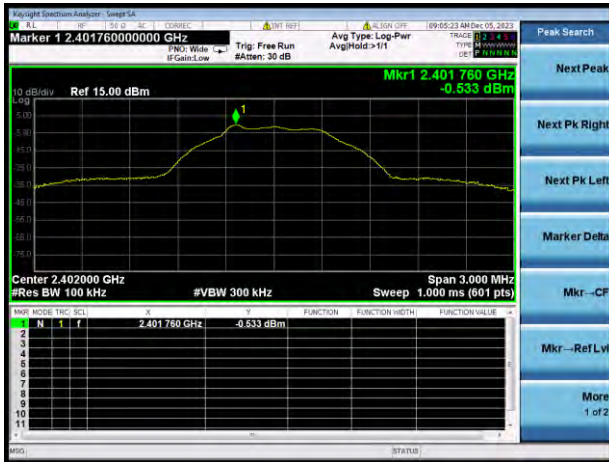


GFSK LOW CHANNEL, BAND EDGE



GFSK LOW CHANNEL, SPURIOUS 30 MHz ~ 3 GHz



GFSK LOW CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

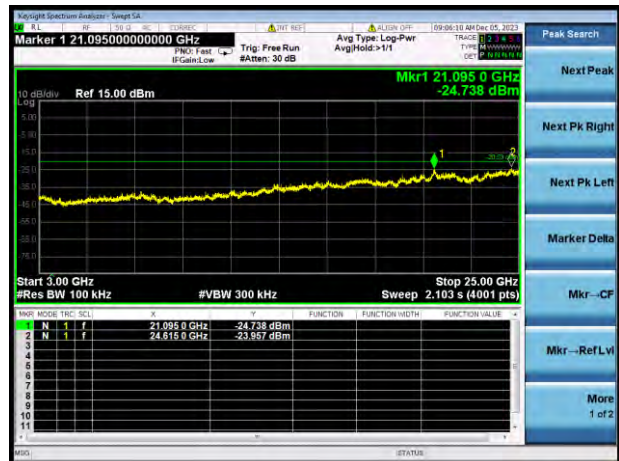


GFSK MIDDLE CHANNEL, CARRIER LEVEL



GFSK MIDDLE CHANNEL, SPURIOUS 30 MHz ~ 3 GHz



GFSK MIDDLE CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

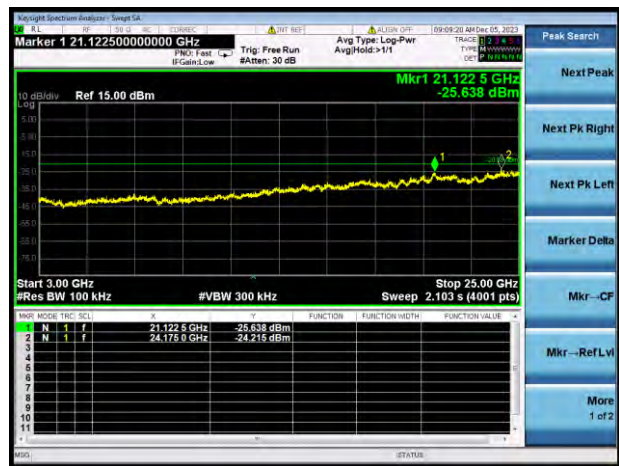


GFSK HIGH CHANNEL, CARRIER LEVEL




GFSK HIGH CHANNEL, BAND EDGE




GFSK HIGH CHANNEL, SPURIOUS 30 MHz ~ 3 GHz

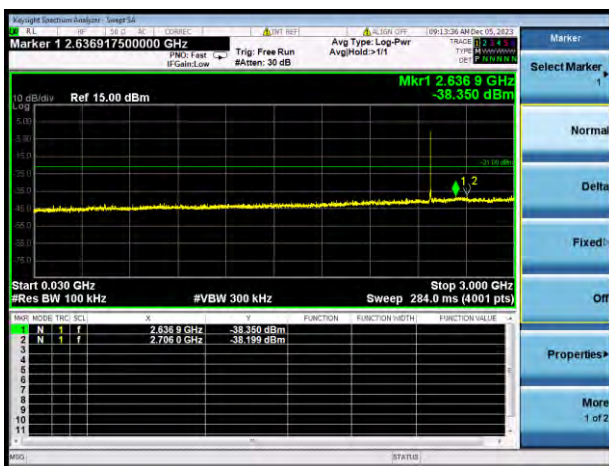


GFSK HIGH CHANNEL, SPURIOUS 3 GHz ~ 25 GHz

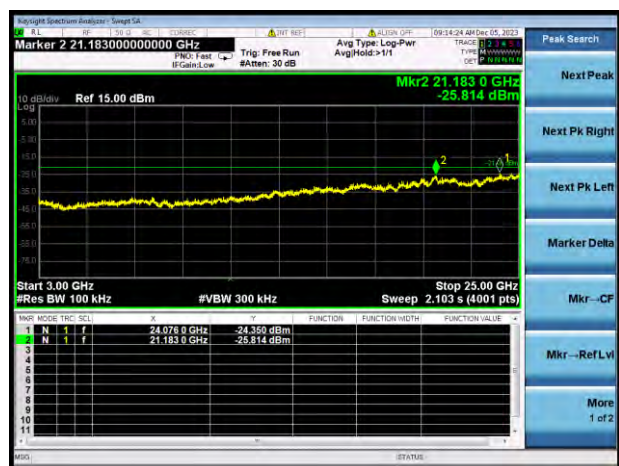

GFSK HOPPING, CARRIER LEVEL

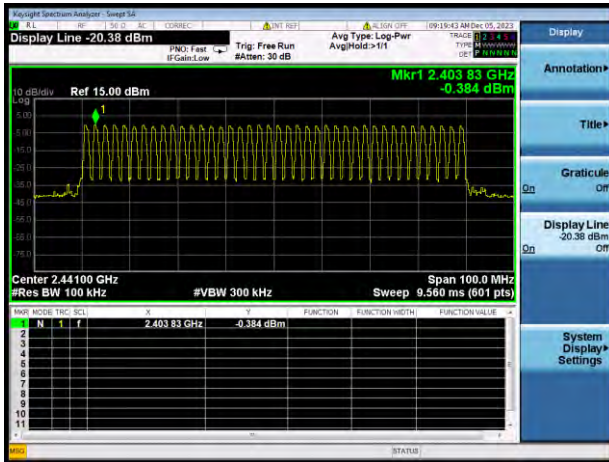


GFSK HOPPING BAND EDGE (LOW)

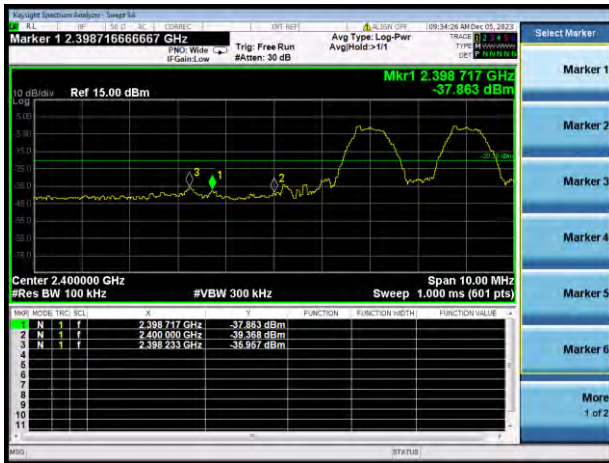


GFSK HOPPING BAND EDGE (HIGH)



GFSK Hopping Mode, SPURIOUS
30 MHz ~ 3 GHz

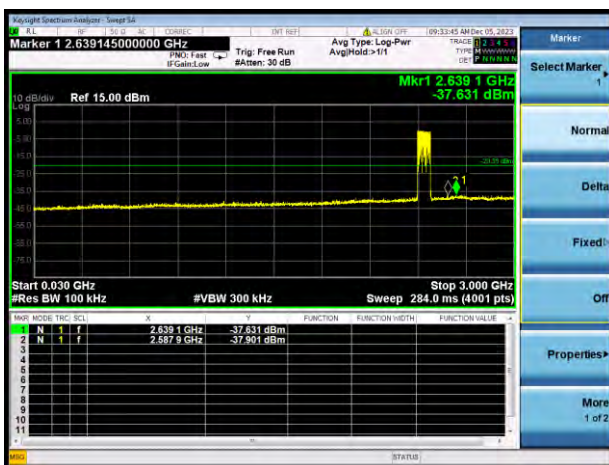

GFSK Hopping Mode, SPURIOUS
3GHz ~ 25 GHz

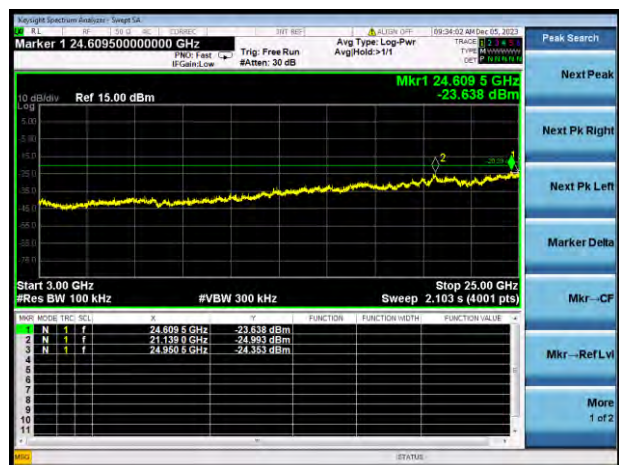

5.8 Conducted Emission

5.8.1 Limit

FCC §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
0.50 - 30	60	50

5.8.2 Test Setup

See section 4.5.2 for test setup description for the AC power supply port. The photo of test setup please refer to ANNEX A.

5.8.3 Test Procedure

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

5.8.4 Test Result

Note ¹: The EUT was tested in connected the laptop and dongle test mode.


Note ²: Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a nominal 120 VAC, 60 Hz and 240 VAC, 50 Hz) for which the device is capable of operation. So, The configuration 120 VAC, 60 Hz and 240 VAC, 50 Hz were tested respectively, but only the worst configuration (120 VAC, 60 Hz) shown here.

Note ³: Results (dBuV) = Original reading level of Spectrum Analyzer (dBuV) + Factor (dB)

Test Data and Plots

PHASE L


CE Test case_FCC_CE_FCC PART 15C

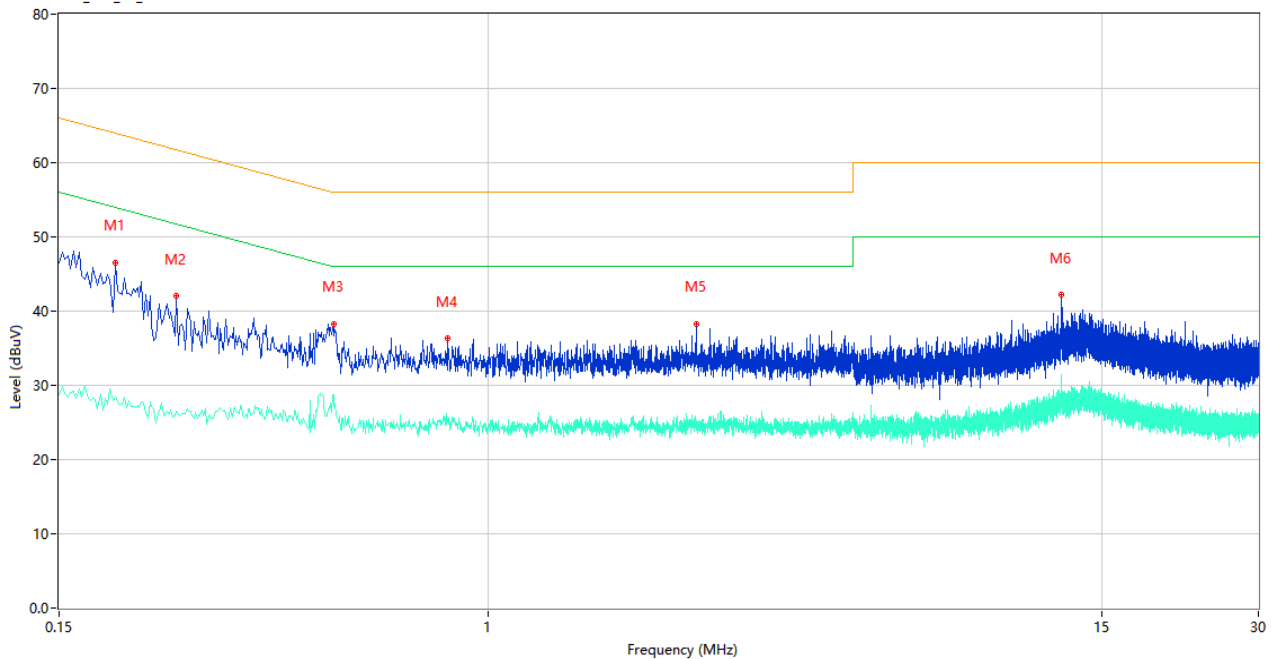

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.192	46.43	9.77	63.95	17.52	Peak	L	Pass
1**	0.192	28.38	9.77	53.95	25.57	AV	L	Pass
2	0.252	42.06	9.77	61.69	19.63	Peak	L	Pass
2**	0.252	26.53	9.77	51.69	25.16	AV	L	Pass
3	0.504	38.29	9.98	56.00	17.71	Peak	L	Pass
3**	0.504	28.67	9.98	46.00	17.33	AV	L	Pass
4	0.836	36.35	10.60	56.00	19.65	Peak	L	Pass
4**	0.836	25.11	10.60	46.00	20.89	AV	L	Pass
5	2.506	38.32	10.15	56.00	17.68	Peak	L	Pass
5**	2.506	25.03	10.15	46.00	20.97	AV	L	Pass
6	12.554	42.17	10.69	60.00	17.83	Peak	L	Pass
6**	12.554	29.87	10.69	50.00	20.13	AV	L	Pass

PHASE N

CE Test case_FCC_CE_FCC PART 15C

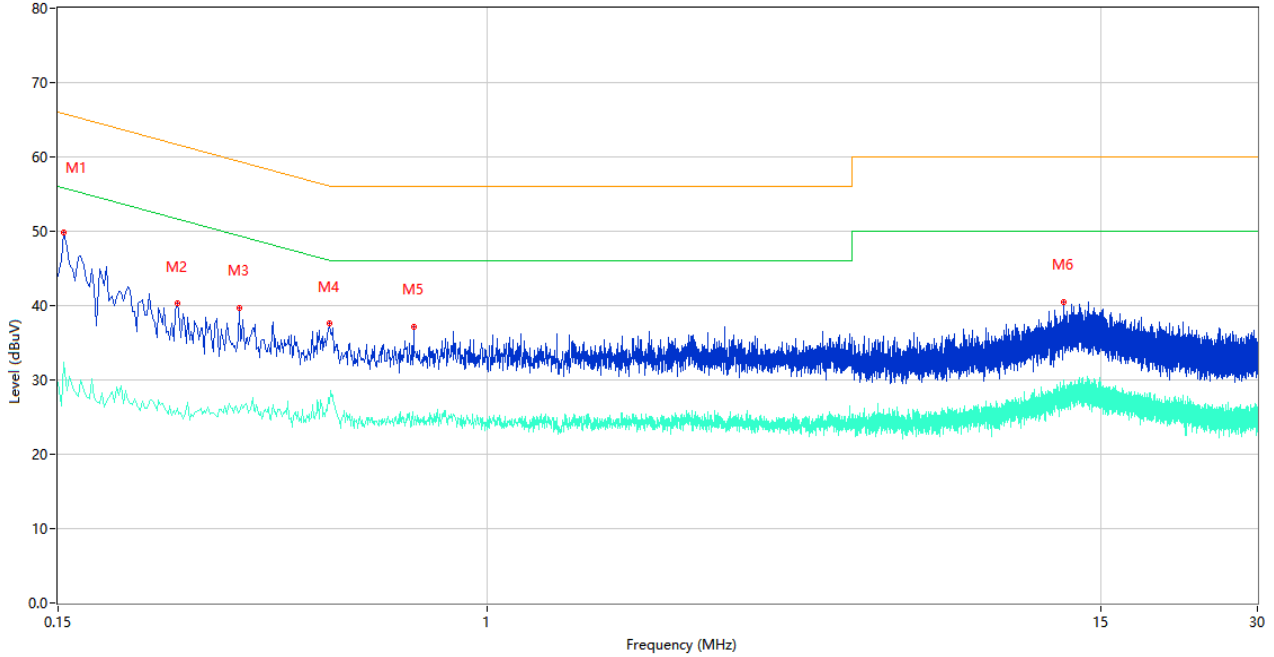

No.	Frequency (MHz)	Results (dBuV)	Factor (dB)	Limit (dBuV)	Margin (dB)	Detector	Line	Verdict
1	0.154	49.84	9.78	65.78	15.94	Peak	N	Pass
1**	0.154	32.39	9.78	55.78	23.39	AV	N	Pass
2	0.254	40.30	9.77	61.63	21.33	Peak	N	Pass
2**	0.254	26.22	9.77	51.63	25.41	AV	N	Pass
3	0.334	39.69	10.44	59.35	19.66	Peak	N	Pass
3**	0.334	25.79	10.44	49.35	23.56	AV	N	Pass
4	0.498	37.55	9.98	56.03	18.48	Peak	N	Pass
4**	0.498	26.79	9.98	46.03	19.24	AV	N	Pass
5	0.722	37.15	10.44	56.00	18.85	Peak	N	Pass
5**	0.722	24.56	10.44	46.00	21.44	AV	N	Pass
6	12.748	40.50	10.55	60.00	19.50	Peak	N	Pass
6**	12.748	29.87	10.55	50.00	20.13	AV	N	Pass

5.9 Radiated Spurious Emission

5.9.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

1. Field Strength (dB $\mu\text{V}/\text{m}$) = $20 \cdot \log[\text{Field Strength } (\mu\text{V}/\text{m})]$.
2. In the emission tables above, the tighter limit applies at the band edges.
3. For Above 1000 MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
4. For above 1000 MHz, limit field strength of harmonics: 54dB $\mu\text{V}/\text{m}@3\text{m}$ (AV) and 74dB $\mu\text{V}/\text{m}@3\text{m}$ (PK).

5.9.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.9.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.9.4 Test Result

Note ¹: The symbol of "--" in the table which means not application.

Note ²: For the test data above 1 GHz, according the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ³: The EUT was tested in connected the laptop and dongle test mode.


Note ⁴: Results (dBuV/m) = Original reading level of Spectrum Analyzer (dBuV/m) + Factor (dB)

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.

Test Data and Plots

30 MHz to 1 GHz, ANT H


RE Test case_FCC Part 15C_FCC Part 15C-30MHz-1GHz

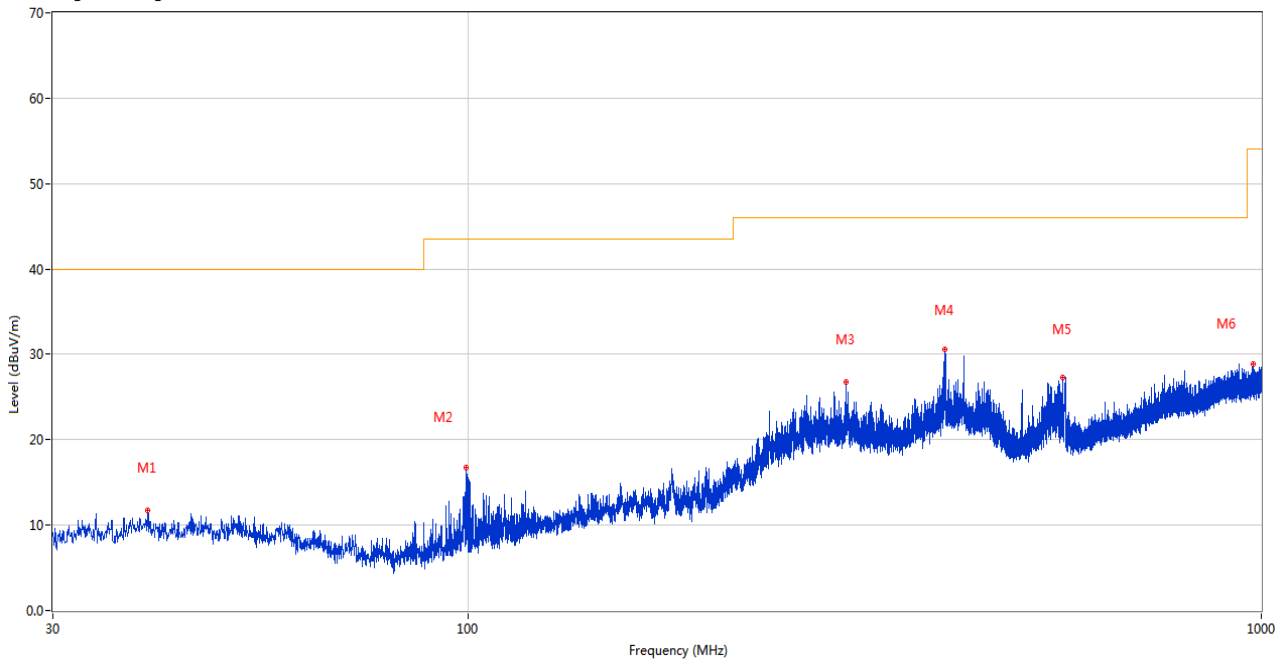

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.458	11.70	-26.49	40.0	28.30	Peak	201.00	100	Horizontal	Pass
2	99.646	16.78	-29.59	43.5	26.72	Peak	247.00	200	Horizontal	Pass
3	299.369	26.75	-24.61	46.0	19.25	Peak	244.00	100	Horizontal	Pass
4	399.279	30.61	-21.37	46.0	15.39	Peak	98.00	100	Horizontal	Pass
5	562.142	27.29	-17.61	46.0	18.71	Peak	79.00	200	Horizontal	Pass
6	976.575	28.83	-11.18	54.0	25.17	Peak	360.00	100	Horizontal	Pass

30 MHz to 1 GHz, ANT V

RE Test case_FCC Part 15C_FCC Part 15C-30MHz-1GHz

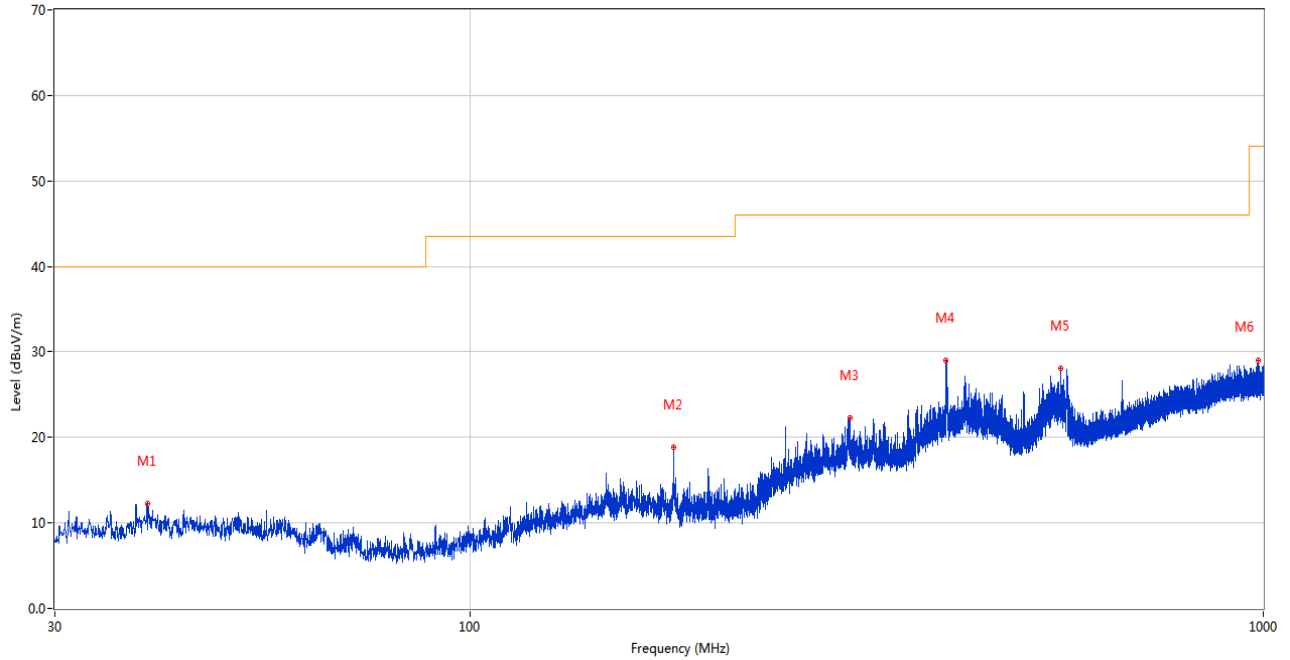

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	39.215	12.20	-26.53	40.0	27.80	Peak	12.00	200	Vertical	Pass
2	180.641	18.81	-27.29	43.5	24.69	Peak	204.00	200	Vertical	Pass
3	301.066	22.22	-24.61	46.0	23.78	Peak	245.00	200	Vertical	Pass
4	398.600	28.97	-21.42	46.0	17.03	Peak	349.00	100	Vertical	Pass
5	555.449	28.06	-18.03	46.0	17.94	Peak	146.00	200	Vertical	Pass
6	984.286	29.00	-11.29	54.0	25.00	Peak	260.00	100	Vertical	Pass


Test Data and Plots

Note 1: The marked spikes near 2400 MHz with circle should be ignored because they are Fundamental signal.

Note 2: The spurious from 18GHz-25GHz is noise only, do not show on the report.

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

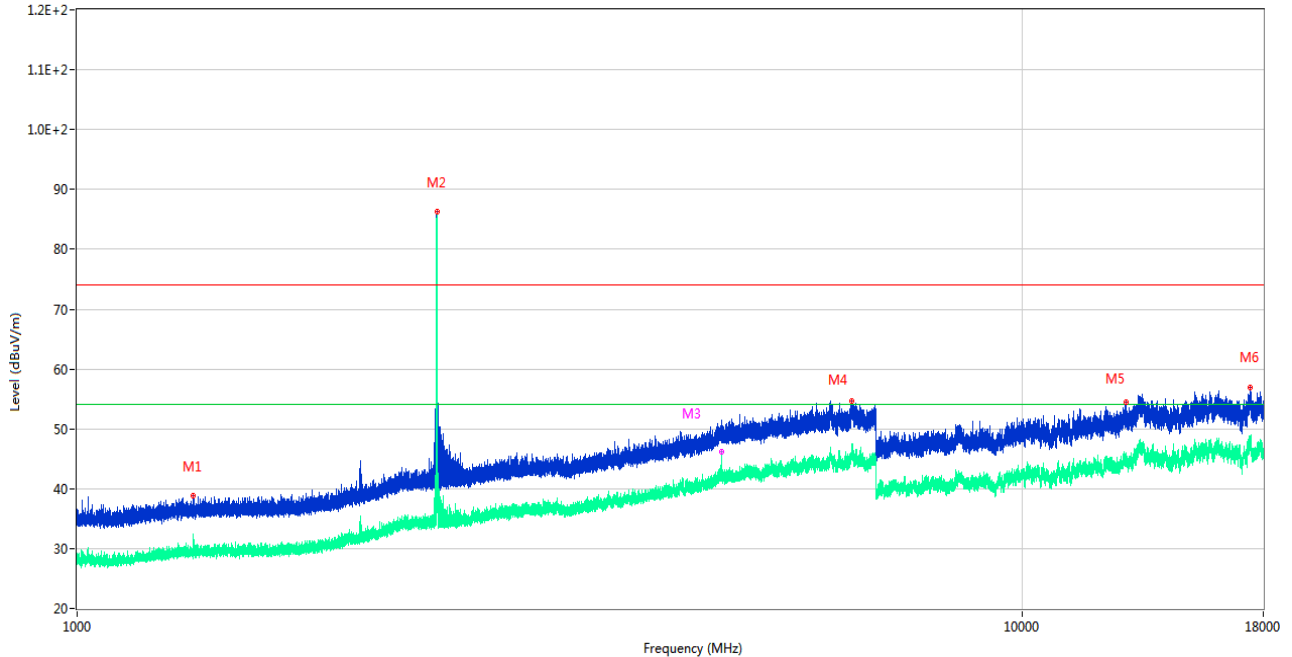

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1328.000	38.82	-17.66	74.0	35.18	Peak	160.00	200	Horizontal	Pass
1**	1328.000	32.39	-17.66	54.0	21.61	AV	160.00	200	Horizontal	Pass
2	2402.200	86.25	-12.43	74.0	-12.25	Peak	240.00	200	Horizontal	N/A
2**	2402.200	85.91	-12.43	54.0	-31.91	AV	240.00	200	Horizontal	N/A
3	4804.200	51.52	-3.16	74.0	22.48	Peak	73.00	150	Horizontal	Pass
3**	4804.200	46.26	-3.16	54.0	7.74	AV	73.00	150	Horizontal	Pass
4	6609.400	54.71	1.57	74.0	19.29	Peak	295.00	200	Horizontal	Pass
4**	6609.400	46.72	1.57	54.0	7.28	AV	295.00	200	Horizontal	Pass
5	12889.650	54.43	1.58	74.0	19.57	Peak	340.00	100	Horizontal	Pass
5**	12889.650	44.67	1.58	54.0	9.33	AV	340.00	100	Horizontal	Pass
6	17420.925	56.99	3.73	74.0	17.01	Peak	360.00	400	Horizontal	Pass
6**	17420.925	48.14	3.73	54.0	5.86	AV	360.00	400	Horizontal	Pass

GFSK LOW CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

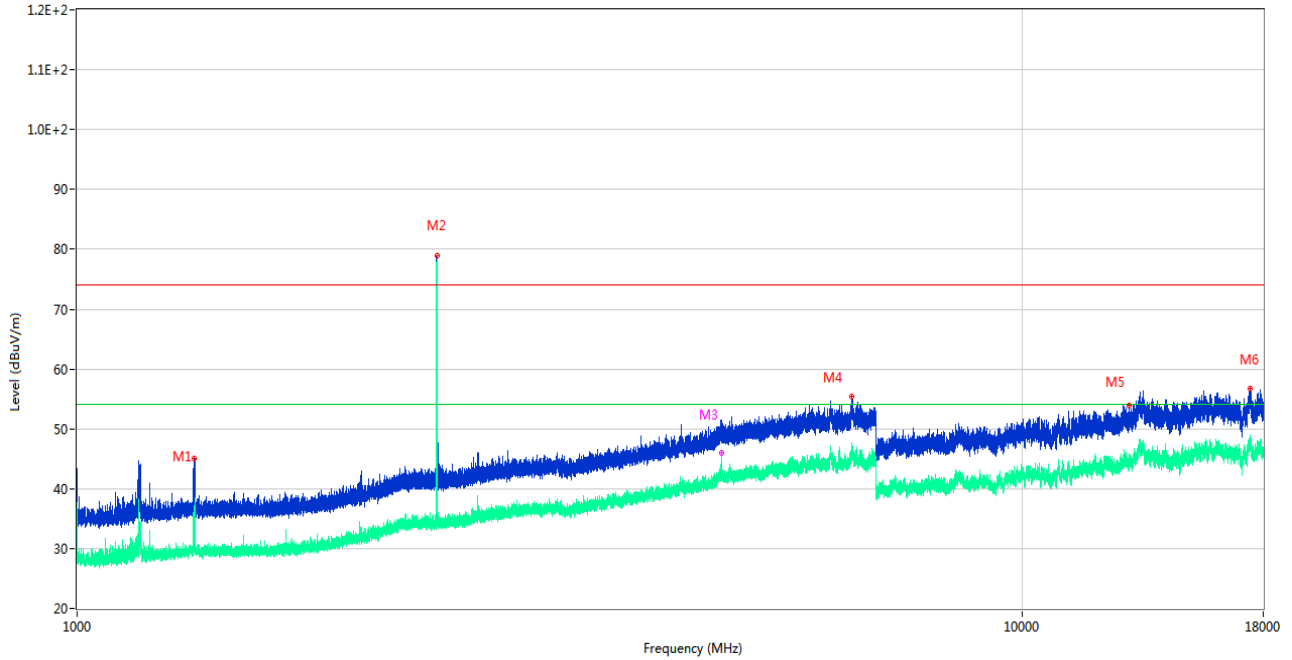

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1331.000	45.02	-17.48	74.0	28.98	Peak	27.00	100	Vertical	Pass
1**	1331.000	30.86	-17.48	54.0	23.14	AV	27.00	100	Vertical	Pass
2	2402.000	78.98	-12.46	74.0	-4.98	Peak	153.00	100	Vertical	N/A
2**	2402.000	78.87	-12.46	54.0	-24.87	AV	153.00	100	Vertical	N/A
3	4804.400	50.19	-3.18	74.0	23.81	Peak	276.00	150	Vertical	Pass
3**	4804.400	45.93	-3.18	54.0	8.07	AV	276.00	150	Vertical	Pass
4	6607.000	55.39	1.48	74.0	18.61	Peak	360.00	200	Vertical	Pass
4**	6607.000	46.20	1.48	54.0	7.80	AV	360.00	200	Vertical	Pass
5	12975.487	53.93	0.93	74.0	20.07	Peak	325.00	200	Vertical	Pass
5**	12975.487	43.95	0.93	54.0	10.05	AV	325.00	200	Vertical	Pass
6	17428.802	56.65	3.49	74.0	17.35	Peak	94.00	300	Vertical	Pass
6**	17428.802	47.56	3.49	54.0	6.44	AV	94.00	300	Vertical	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

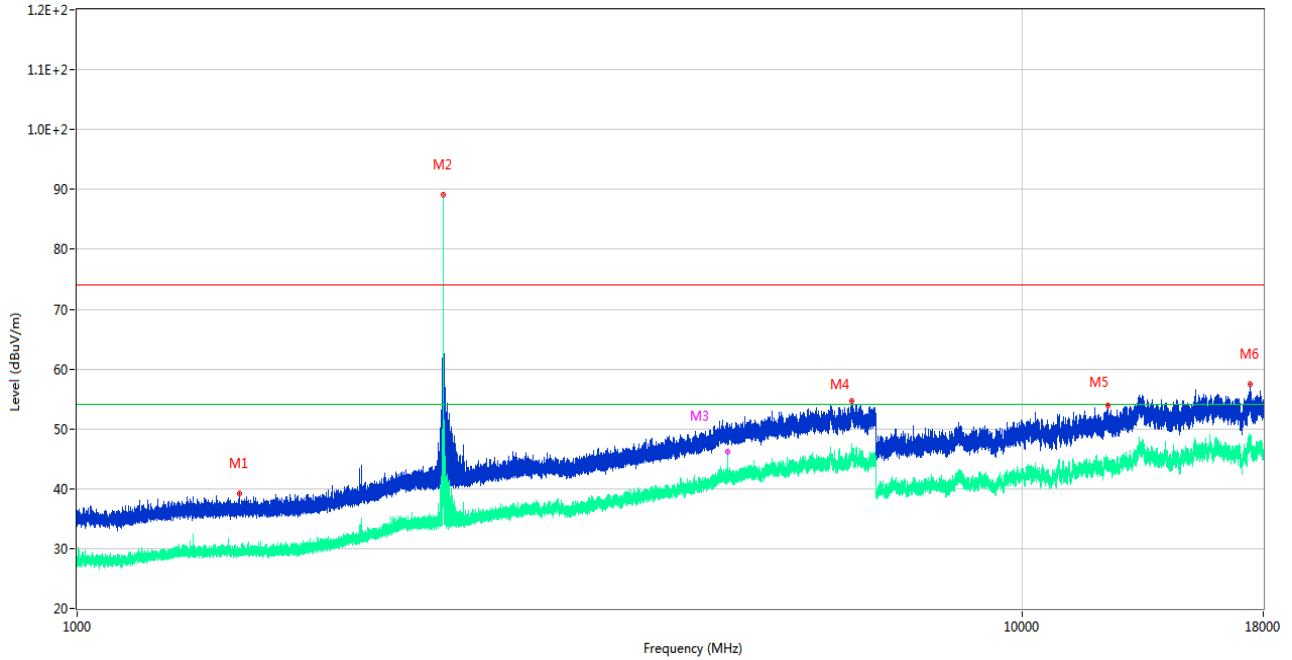

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1486.700	39.29	-17.65	74.0	34.71	Peak	201.00	200	Horizontal	Pass
1**	1486.700	29.81	-17.65	54.0	24.19	AV	201.00	200	Horizontal	Pass
2	2440.000	89.16	-12.41	74.0	-15.16	Peak	249.00	200	Horizontal	N/A
2**	2440.000	88.81	-12.41	54.0	-34.81	AV	249.00	200	Horizontal	N/A
3	4880.200	50.12	-3.36	74.0	23.88	Peak	93.00	150	Horizontal	Pass
3**	4880.200	46.22	-3.36	54.0	7.78	AV	93.00	150	Horizontal	Pass
4	6609.600	54.58	1.55	74.0	19.42	Peak	93.00	200	Horizontal	Pass
4**	6609.600	46.76	1.55	54.0	7.24	AV	93.00	200	Horizontal	Pass
5	12328.813	53.83	1.42	74.0	20.17	Peak	292.00	100	Horizontal	Pass
5**	12328.813	45.14	1.42	54.0	8.86	AV	292.00	100	Horizontal	Pass
6	17428.537	57.47	3.50	74.0	16.53	Peak	137.00	200	Horizontal	Pass
6**	17428.537	47.74	3.50	54.0	6.26	AV	137.00	200	Horizontal	Pass

GFSK MIDDLE CHANNEL 1 GHz to 18 GHz, ANT V


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

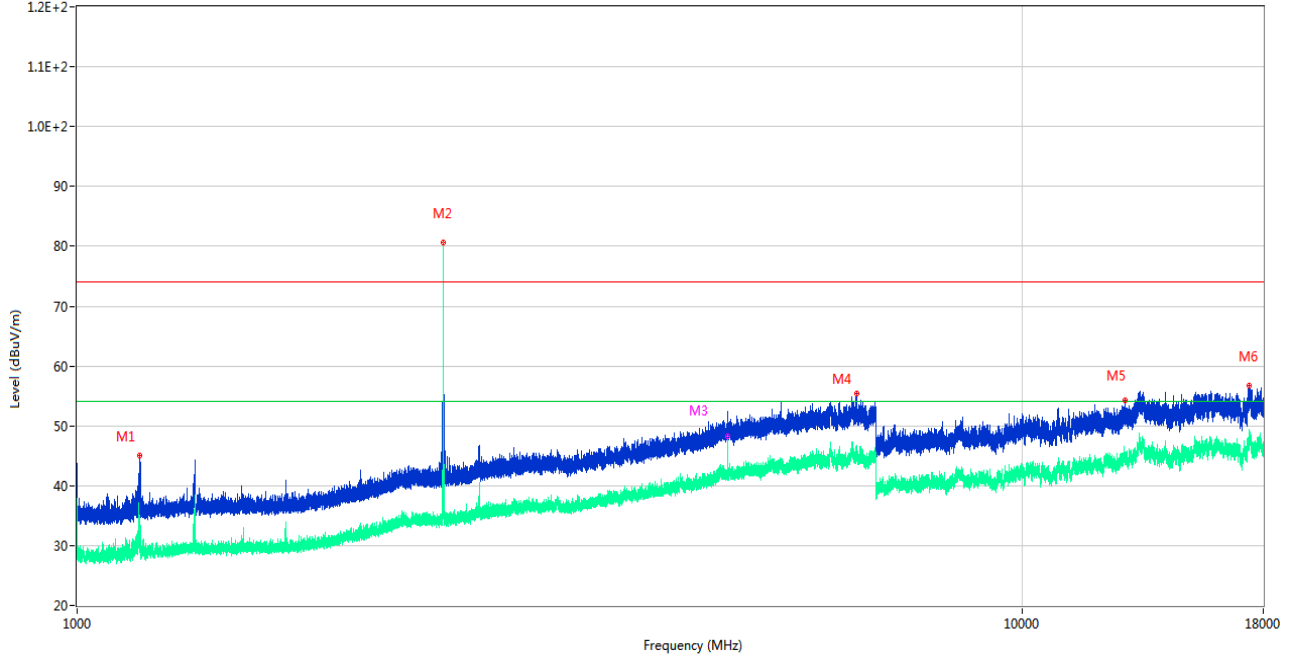

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1163.700	45.14	-17.96	74.0	28.86	Peak	63.00	100	Vertical	Pass
1**	1163.700	32.37	-17.96	54.0	21.63	AV	63.00	100	Vertical	Pass
2	2440.000	80.62	-12.41	74.0	-6.62	Peak	161.00	100	Vertical	N/A
2**	2440.000	80.51	-12.41	54.0	-26.51	AV	161.00	100	Vertical	N/A
3	4880.000	52.31	-3.37	74.0	21.69	Peak	268.00	150	Vertical	Pass
3**	4880.000	48.30	-3.37	54.0	5.70	AV	268.00	150	Vertical	Pass
4	6683.800	55.38	0.07	74.0	18.62	Peak	140.00	200	Vertical	Pass
4**	6683.800	44.80	0.07	54.0	9.20	AV	140.00	200	Vertical	Pass
5	12852.638	54.34	1.39	74.0	19.66	Peak	245.00	200	Vertical	Pass
5**	12852.638	44.50	1.39	54.0	9.50	AV	245.00	200	Vertical	Pass
6	17409.901	56.70	3.44	74.0	17.30	Peak	54.00	100	Vertical	Pass
6**	17409.901	47.76	3.44	54.0	6.24	AV	54.00	100	Vertical	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT H


RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

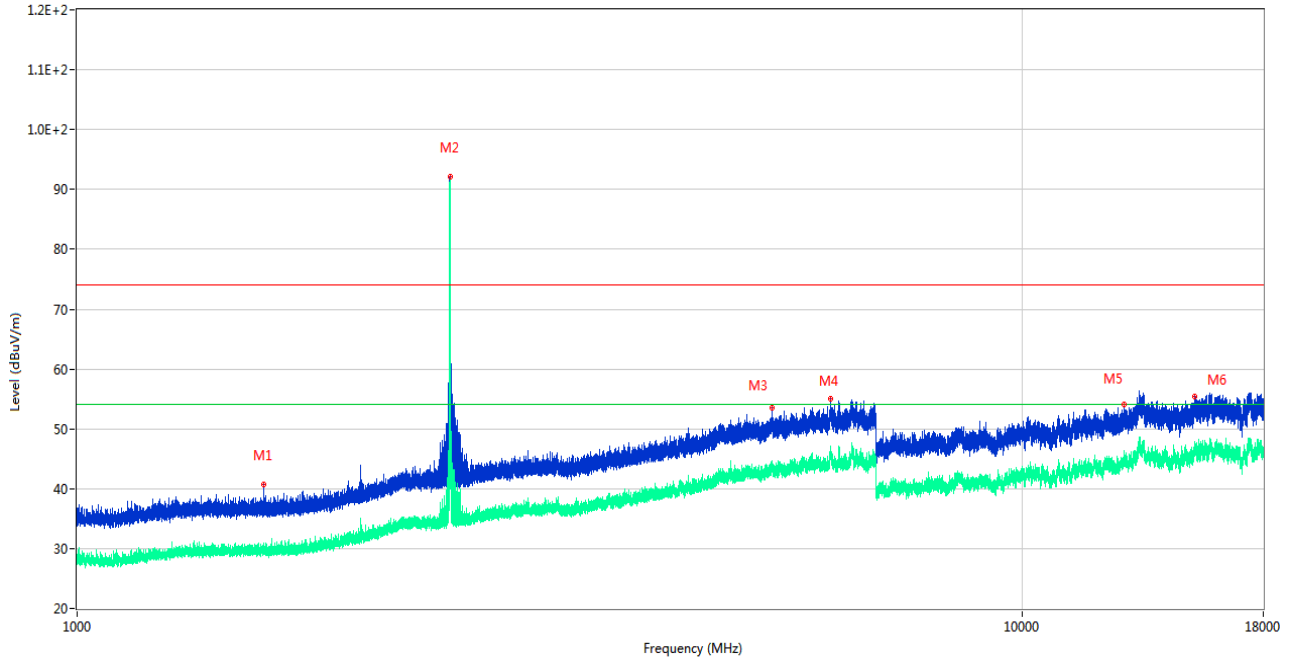

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1575.900	40.69	-17.51	74.0	33.31	Peak	66.00	100	Horizontal	Pass
1**	1575.900	29.88	-17.51	54.0	24.12	AV	66.00	100	Horizontal	Pass
2	2480.000	92.09	-12.02	74.0	-18.09	Peak	248.00	100	Horizontal	N/A
2**	2480.000	91.72	-12.02	54.0	-37.72	AV	248.00	100	Horizontal	N/A
3	5437.000	53.46	-1.59	74.0	20.54	Peak	213.00	150	Horizontal	Pass
3**	5437.000	43.40	-1.59	54.0	10.60	AV	213.00	150	Horizontal	Pass
4	6269.800	55.04	0.43	74.0	18.96	Peak	190.00	400	Horizontal	Pass
4**	6269.800	45.56	0.43	54.0	8.44	AV	190.00	400	Horizontal	Pass
5	12836.888	54.11	1.29	74.0	19.89	Peak	189.00	200	Horizontal	Pass
5**	12836.888	44.43	1.29	54.0	9.57	AV	189.00	200	Horizontal	Pass
6	15229.575	55.35	0.88	74.0	18.65	Peak	323.00	150	Horizontal	Pass
6**	15229.575	46.89	0.88	54.0	7.11	AV	323.00	150	Horizontal	Pass

GFSK HIGH CHANNEL 1 GHz to 18 GHz, ANT V

RE Test case_FCC Part 15C_FCC 15.247(2.4G)_1GHz-18GHz

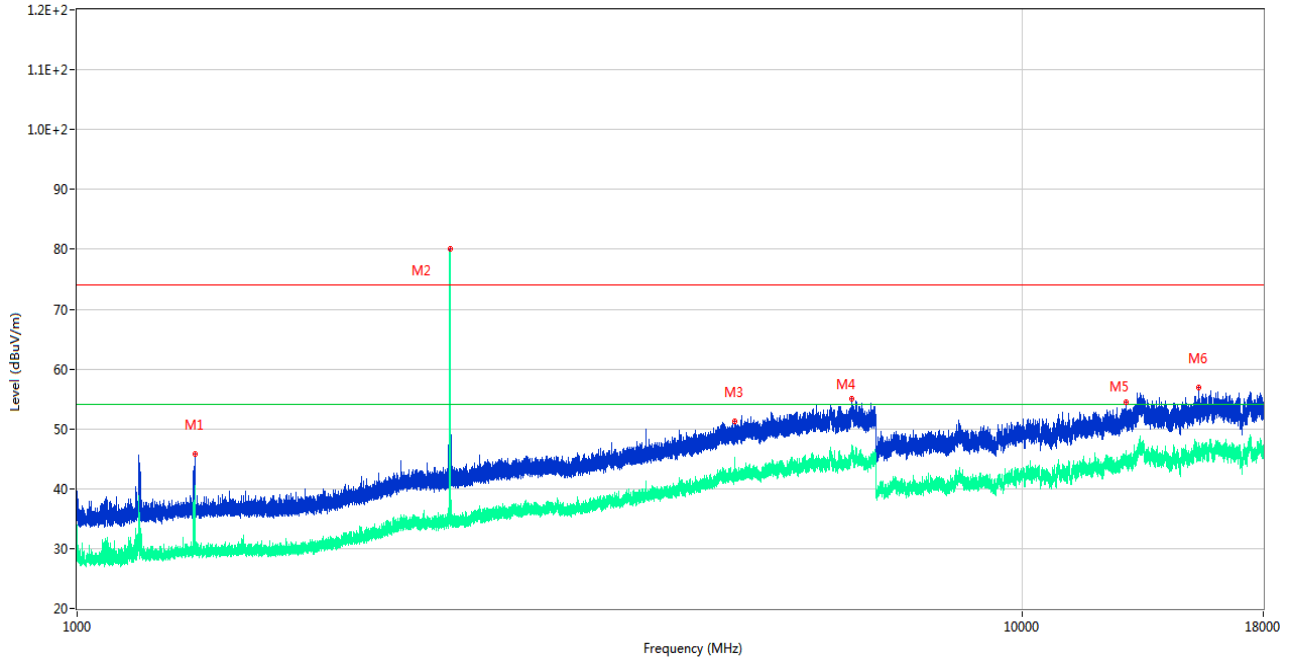

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	1332.800	45.74	-17.52	74.0	28.26	Peak	61.00	300	Vertical	Pass
1**	1332.800	33.55	-17.52	54.0	20.45	AV	61.00	300	Vertical	Pass
2	2480.100	80.08	-12.02	74.0	-6.08	Peak	168.00	200	Vertical	N/A
2**	2480.100	79.94	-12.02	54.0	-25.94	AV	168.00	200	Vertical	N/A
3	4963.200	51.20	-2.96	74.0	22.80	Peak	181.00	100	Vertical	Pass
3**	4963.200	41.79	-2.96	54.0	12.21	AV	181.00	100	Vertical	Pass
4	6604.000	55.00	1.01	74.0	19.00	Peak	148.00	100	Vertical	Pass
4**	6604.000	46.91	1.01	54.0	7.09	AV	148.00	100	Vertical	Pass
5	12895.950	54.50	1.55	74.0	19.50	Peak	130.00	400	Vertical	Pass
5**	12895.950	44.68	1.55	54.0	9.32	AV	130.00	400	Vertical	Pass
6	15396.787	56.88	0.70	74.0	17.12	Peak	339.00	200	Vertical	Pass
6**	15396.787	46.62	0.70	54.0	7.38	AV	339.00	200	Vertical	Pass

5.10 Band Edge (Restricted-band band-edge)

5.10.1 Limit

FCC §15.209&15.247(d)

Radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

5.10.2 Test Setup

See section 4.5.3 to 4.5.5 for test setup description for the antenna port. The photo of test setup please refer to ANNEX A.

5.10.3 Test Procedure

The measurement frequency range is from 9 kHz to the 10th harmonic of the fundamental frequency. The Turn Table is actuated to turn from 0° to 360°, and both horizontal and vertical polarizations of the Test Antenna are used to find the maximum radiated power. Mid channels on all channel bandwidth verified. Only the worst RB size/offset presented.

The power of the EUT transmitting frequency should be ignored.

All Spurious Emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported, Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

5.10.4 Test Result

Note ¹: The lowest and highest channels are tested to verify the band edge emissions. Please refer to the following the plots for emissions values.


Note ²: The test data all are tested in the vertical and horizontal antenna which the trace is max hold. So these plots have shown the worst case.

Note ³: According the ANSI C63.10-2013, where limits are specified for both average and peak (or quasi-peak) detector functions, if the peak (or quasi-peak) measured value complies with the average limit, it is unnecessary to perform an average measurement.

Note ⁴: The Level (dBuV/m) has been corrected by factor.


Test Data

GFSK LOW CHANNEL

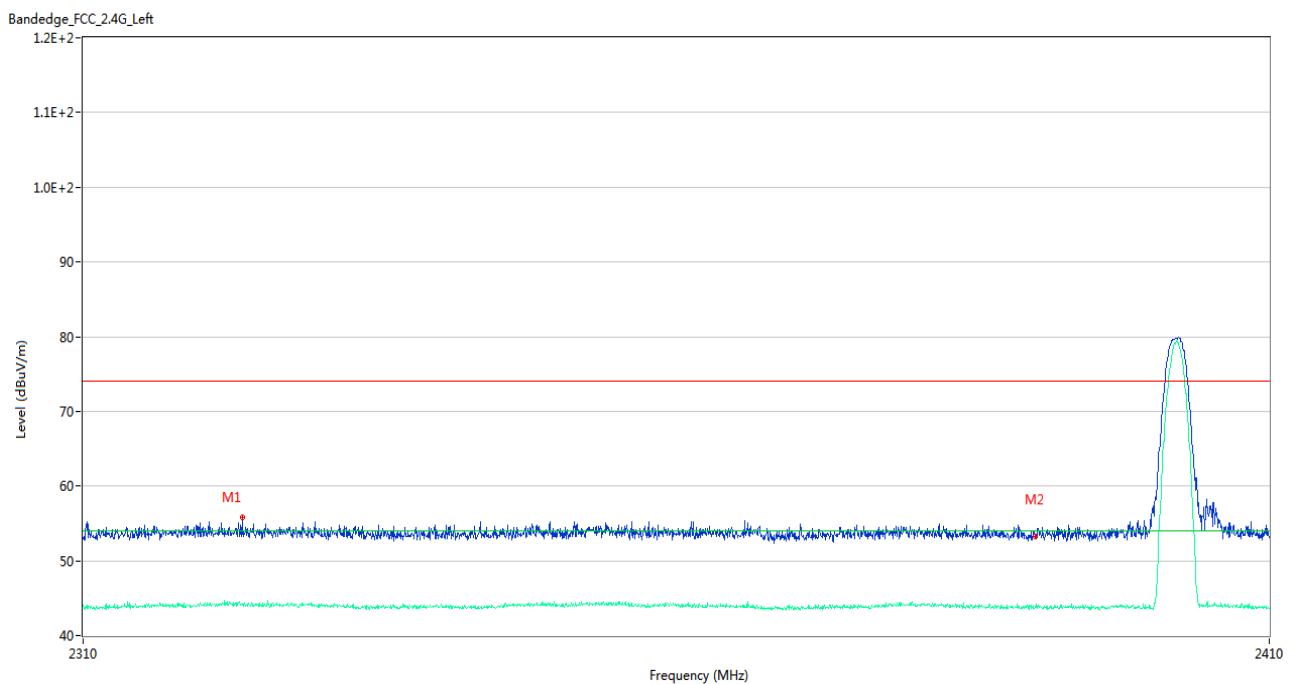

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2323.150	55.89	-0.65	74.0	18.11	Peak	222.00	200	Horizontal	Pass
1**	2323.150	44.19	-0.65	54.0	9.81	AV	222.00	200	Horizontal	Pass
2	2389.950	53.20	-0.59	74.0	20.80	Peak	21.00	200	Horizontal	Pass
2**	2389.950	43.73	-0.59	54.0	10.27	AV	21.00	200	Horizontal	Pass

GFSK HIGH CHANNEL

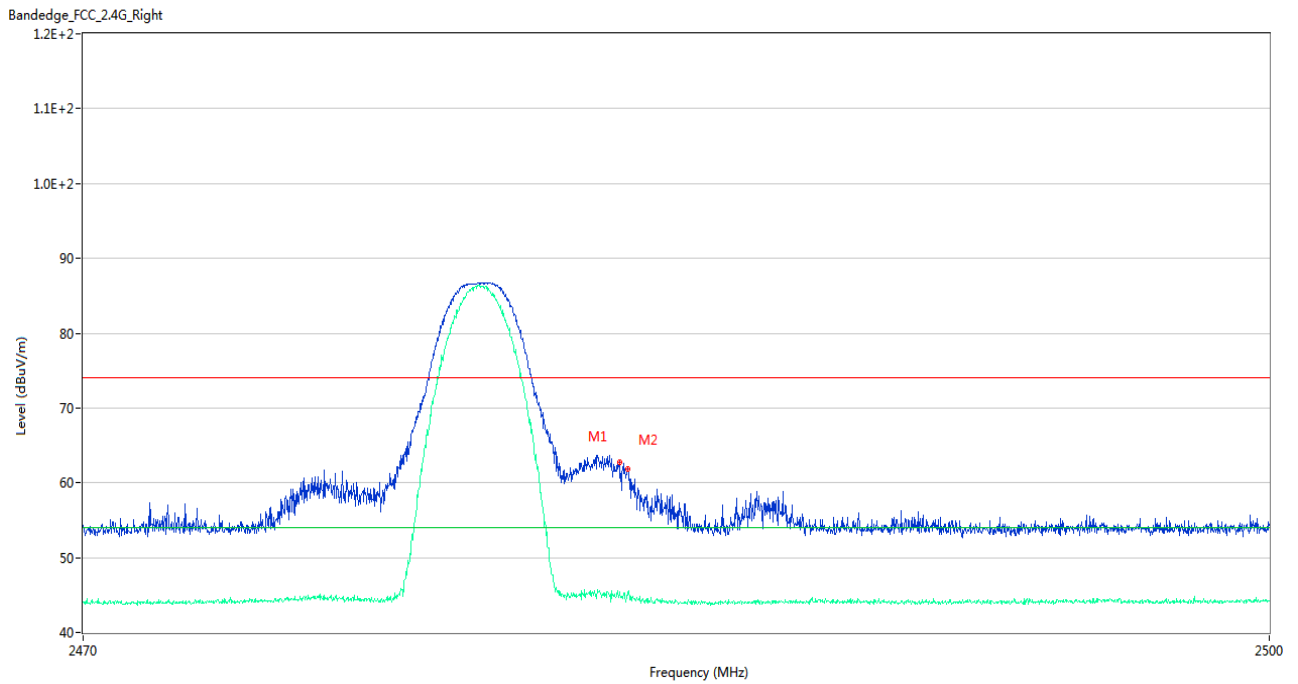


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB)	Limit (dBuV/m)	Margin (dB)	Detector	Table (Degree)	Height (cm)	Antenna	Verdict
1	2483.515	62.76	-0.05	74.0	11.24	Peak	244.00	100	Horizontal	Pass
1**	2483.515	45.39	-0.05	54.0	8.61	AV	244.00	100	Horizontal	Pass
2	2483.725	61.91	-0.07	74.0	12.09	Peak	254.00	150	Horizontal	Pass
2**	2483.725	45.04	-0.07	54.0	8.96	AV	254.00	150	Horizontal	Pass

ANNEX A TEST SETUP PHOTOS

1 Radiated Test Photo

Below 30MHz

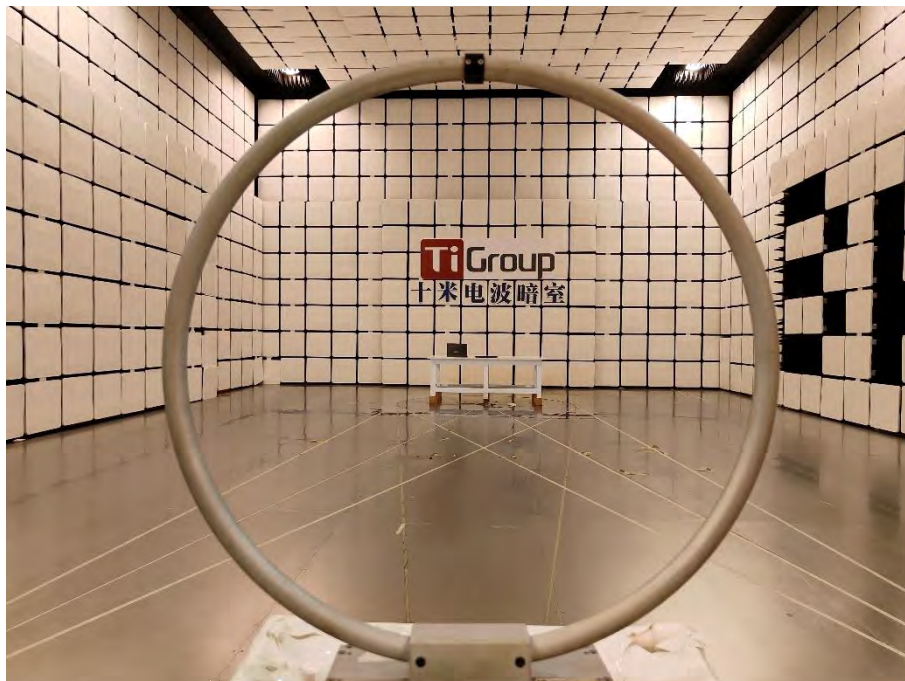

Close-up




30MHz-1GHz




Close-up



Above 1GHz

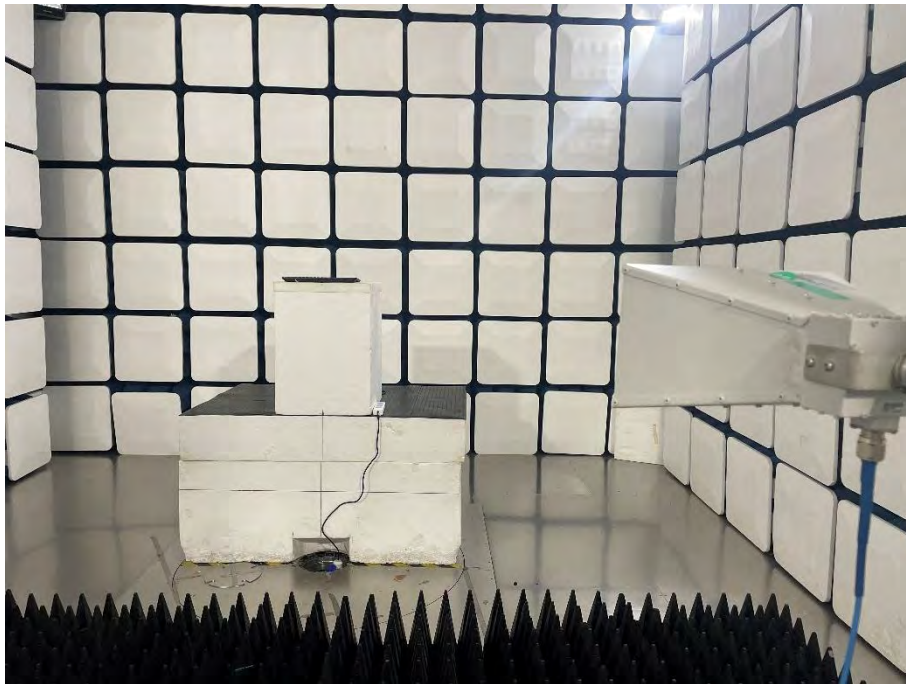

Close-up

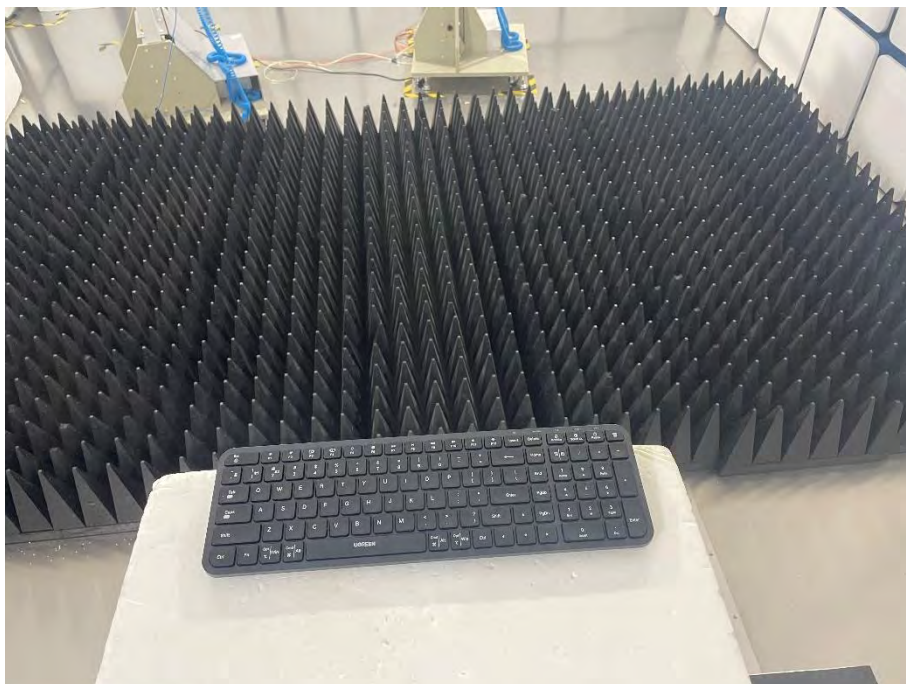

2 Conducted Test Photo

Conducted Test



3 Conducted Emissions

Test Photo 1




Test Photo 2




ANNEX B EUT EXTERNAL PHOTOS

FRONT VIEW OF EUT

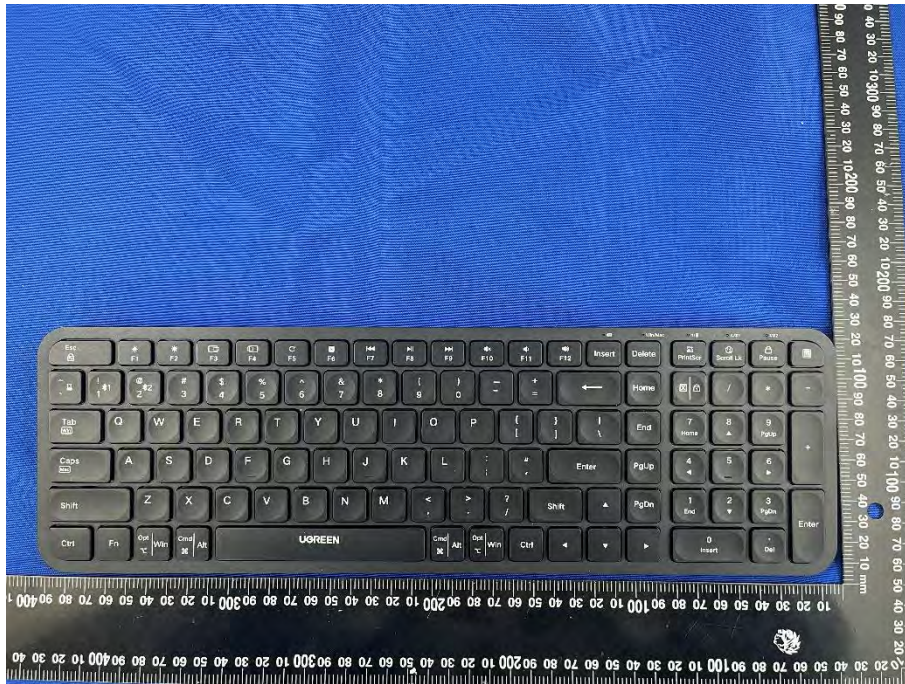

REAR VIEW OF EUT

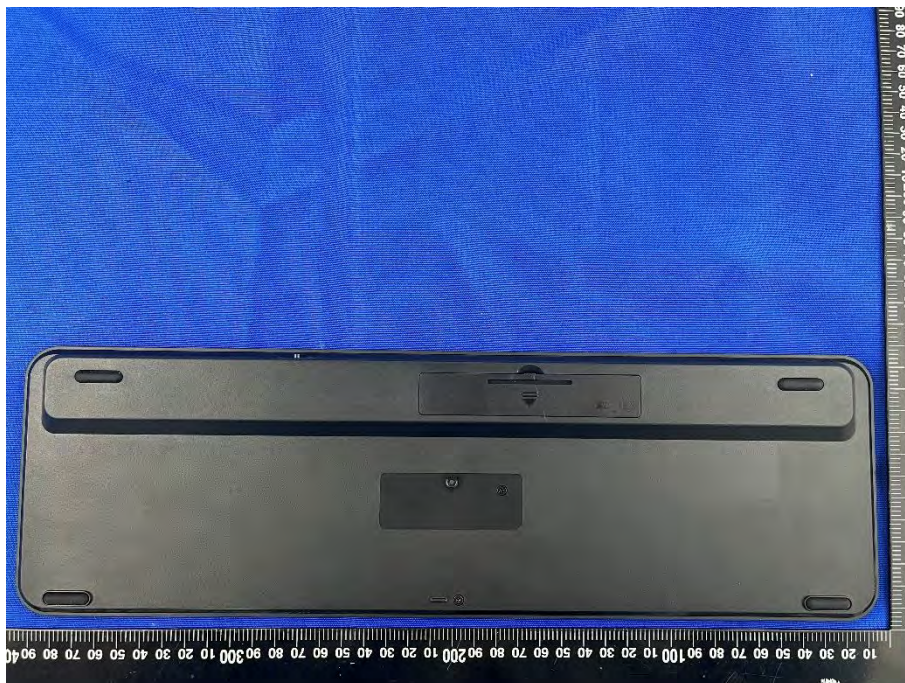

LEFT VIEW OF EUT



RIGHT VIEW OF EUT




TOP VIEW OF EUT



BOTTOM VIEW OF EUT



Accessory-Dongle

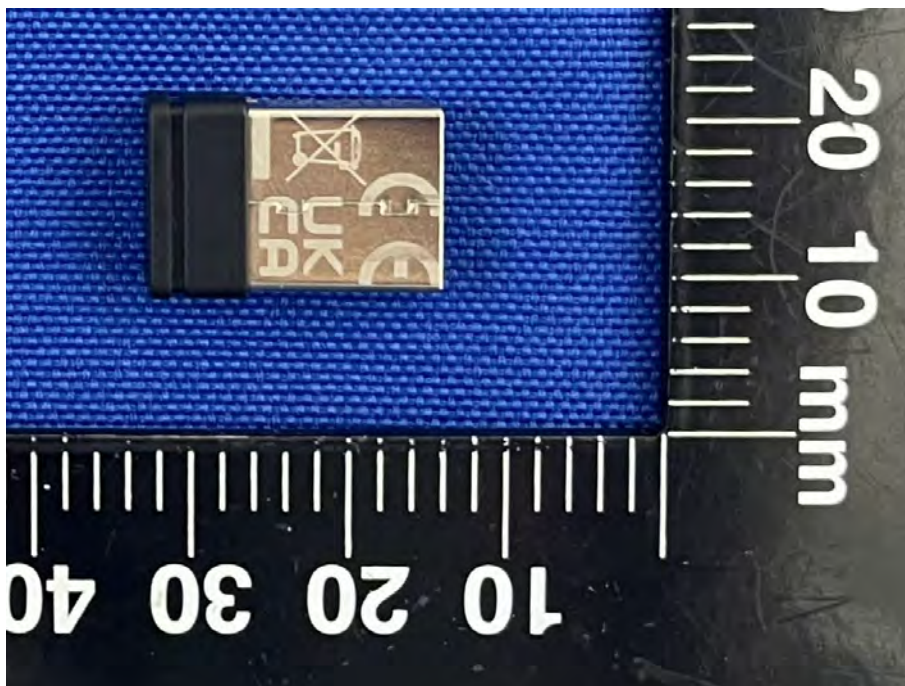


FRONT VIEW OF EUT




ANNEX C EUT INTERNAL PHOTOS


EUT UNCOVER VIEW 1

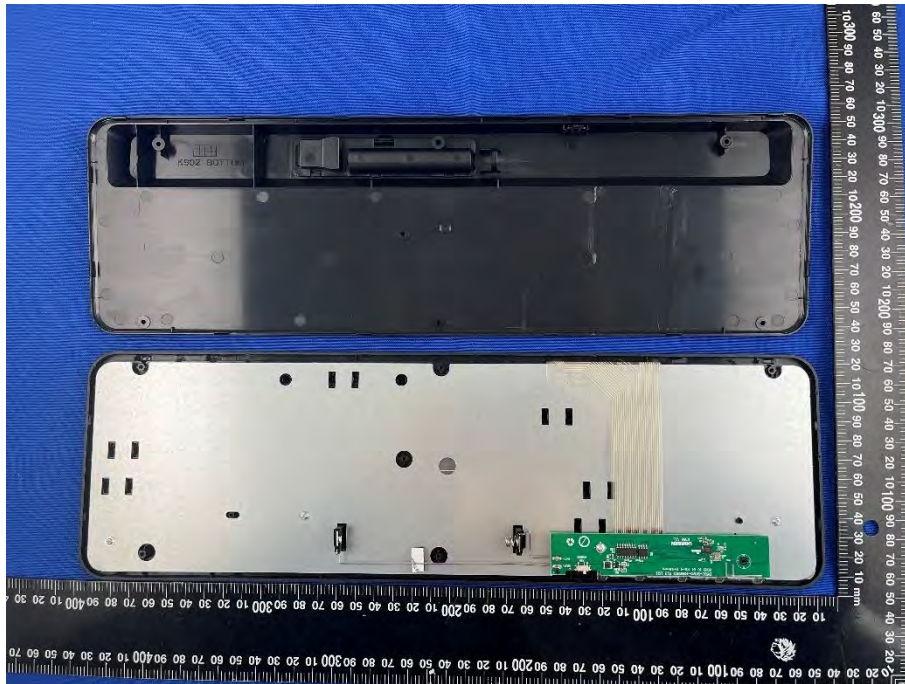


EUT UNCOVER VIEW 2

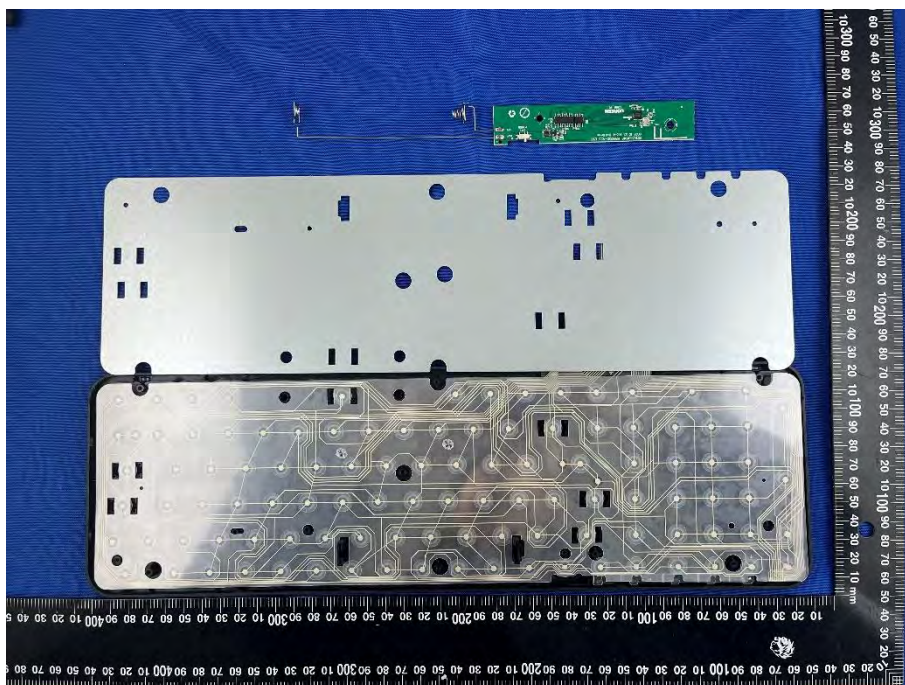

MAIN BOARD TOP VIEW

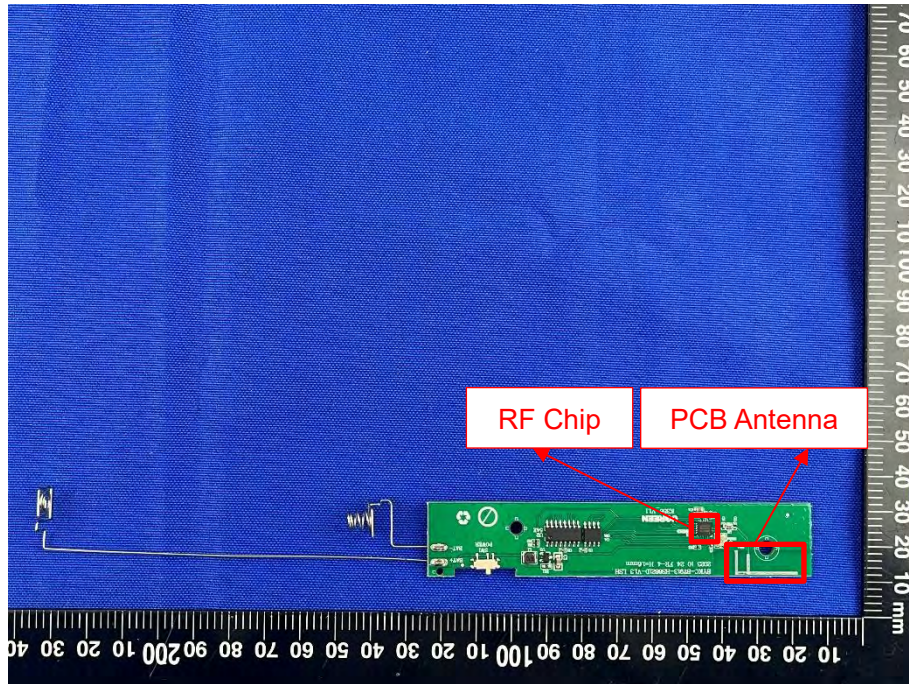

MAIN BOARD REAR VIEW

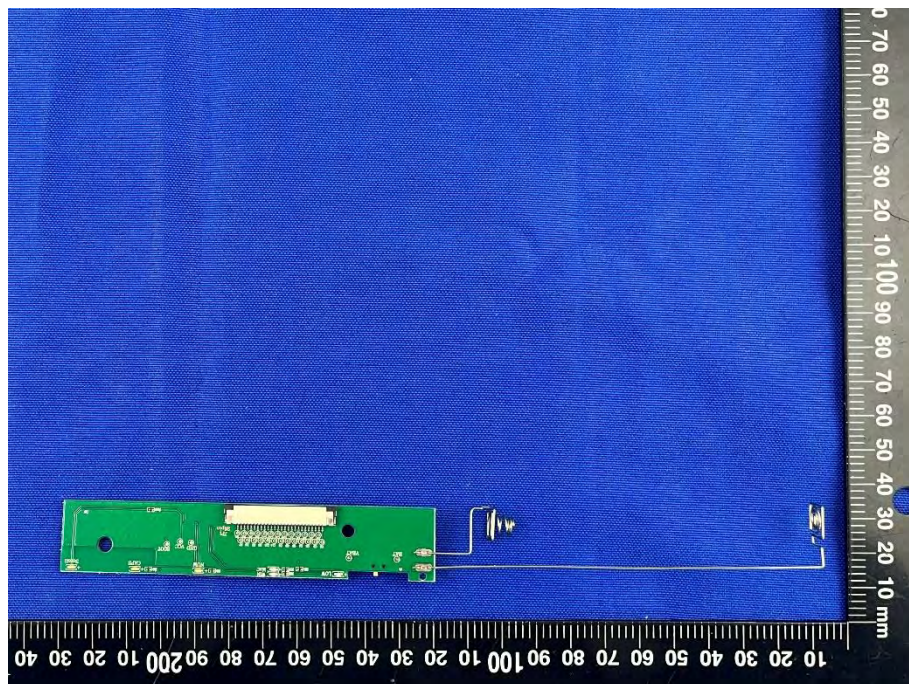

Statement

1. The laboratory guarantees the scientificity, accuracy and impartiality of the test, and is responsible for all the information in the report, except the information provided by the customer. The customer is responsible for the impact of the information provided on the validity of the results.
2. The report without China inspection body and laboratory Mandatory Approval (CMA) mark has no effect of proving to the society.
3. For the report with CNAS mark or A2LA mark, the items marked with "☆" are not within the accredited scope.
4. This report is invalid if it is altered, without the signature of the testing and approval personnel, or without the "inspection and testing dedicated stamp" or test report stamp.
5. The test data and results are only valid for the tested samples provided by the customer.
6. This report shall not be partially reproduced without the written permission of the laboratory.
7. Any objection shall be raised to the laboratory within 30 days after receiving the report.

--END OF REPORT--