

# TEST REPORT

Report No.: BCTC2408197638-2E

---

Applicant: Ugreen Group Limited

---

Product Name: Magnetic Wireless Power Bank

---

Test Model: PB764

---

Tested Date: 2024-08-14 to 2024-08-21

---

Issued Date: 2024-08-21

---

**Shenzhen BCTC Testing Co., Ltd.**



# FCC ID:2AQI5-PB764

Product Name: Magnetic Wireless Power Bank  
Trademark: **UGREEN**  
Model/Type Reference: PB764  
Prepared For: Ugreen Group Limited  
Address: Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China  
Manufacturer: Ugreen Group Limited  
Address: Ugreen Building, Longcheng Industrial Park, Longguanxi Road, Longhua, ShenZhen, China  
Prepared By: Shenzhen BCTC Testing Co., Ltd.  
Address: 1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: 2024-08-14  
Sample Tested Date: 2024-08-14 to 2024-08-21  
Issue Date: 2024-08-21  
Report No.: BCTC2408197638-2E  
Test Standards: FCC CFR 47 part1, 1.1307(b), 1.1310  
KDB 680106 D01 Wireless Power Transfer v04  
Test Results: PASS

Tested by:



Kelsey Tan/ Project Handler

Approved by:



Zero Zhou/Reviewer

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Testing Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.




## Table Of Content

	Page
Test Report Declaration	
1. Version .....	4
2. Product Information .....	5
2.1 Product Information .....	5
2.2 Support Equipment .....	6
2.3 Test Mode .....	6
3. Test Facility And Test Instrument Used.....	7
3.1 Test Facility.....	7
3.2 Test Instrument Used.....	7
4. Method Of Measurement.....	8
4.1 Applicable Standard.....	8
4.2 Block Diagram Of Test Setup.....	8
4.3 Limit .....	9
4.4 Test procedure.....	9
4.5 Equipment Approval Considerations.....	10
4.6 E and H field Strength .....	11
5. Photographs Of Test Set-Up .....	18

(Note: N/A Means Not Applicable)


BCTC  
 BCTC  
 PPR  
 Report

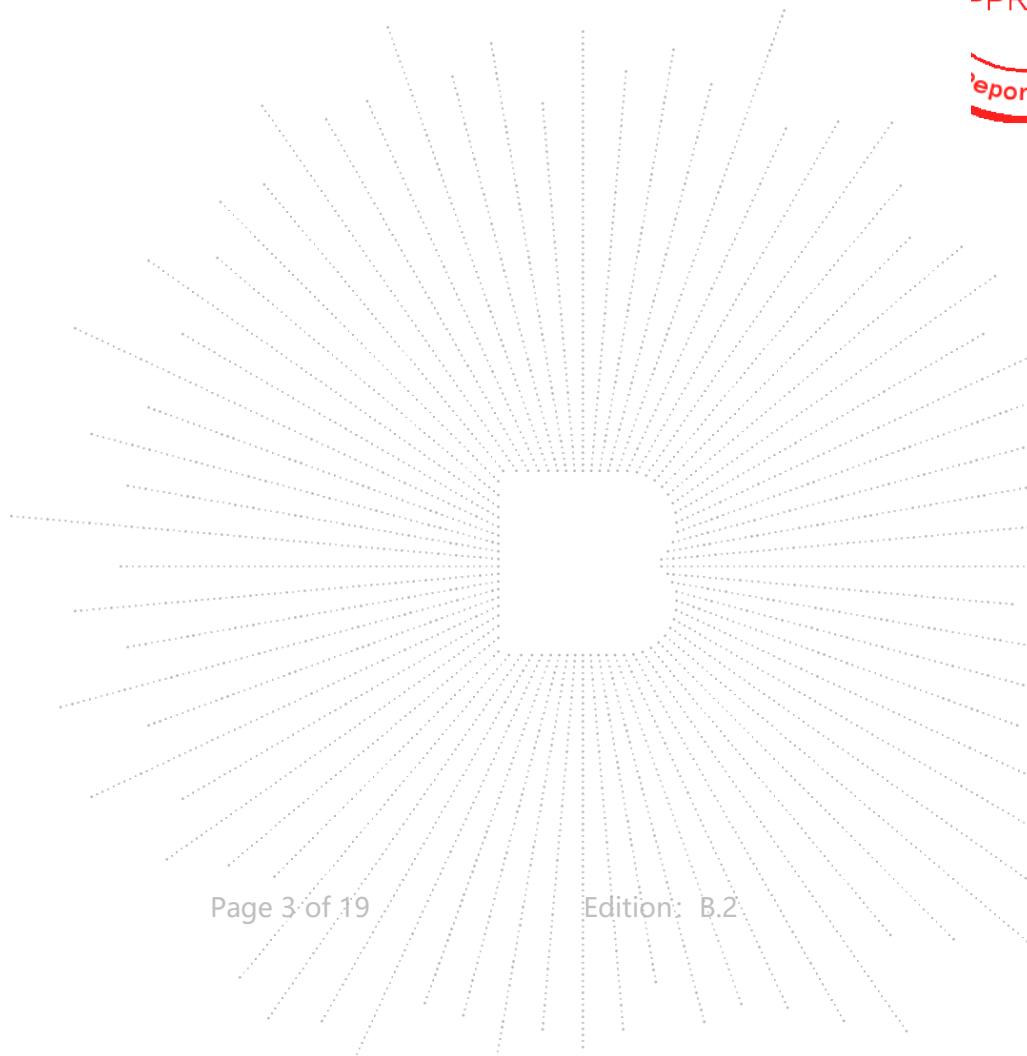

**1. Version**

Report No.	Issue Date	Description	Approved
BCTC2408197638-2E	2024-08-21	Original	Valid

TEC  
TC  
OVB  
t See

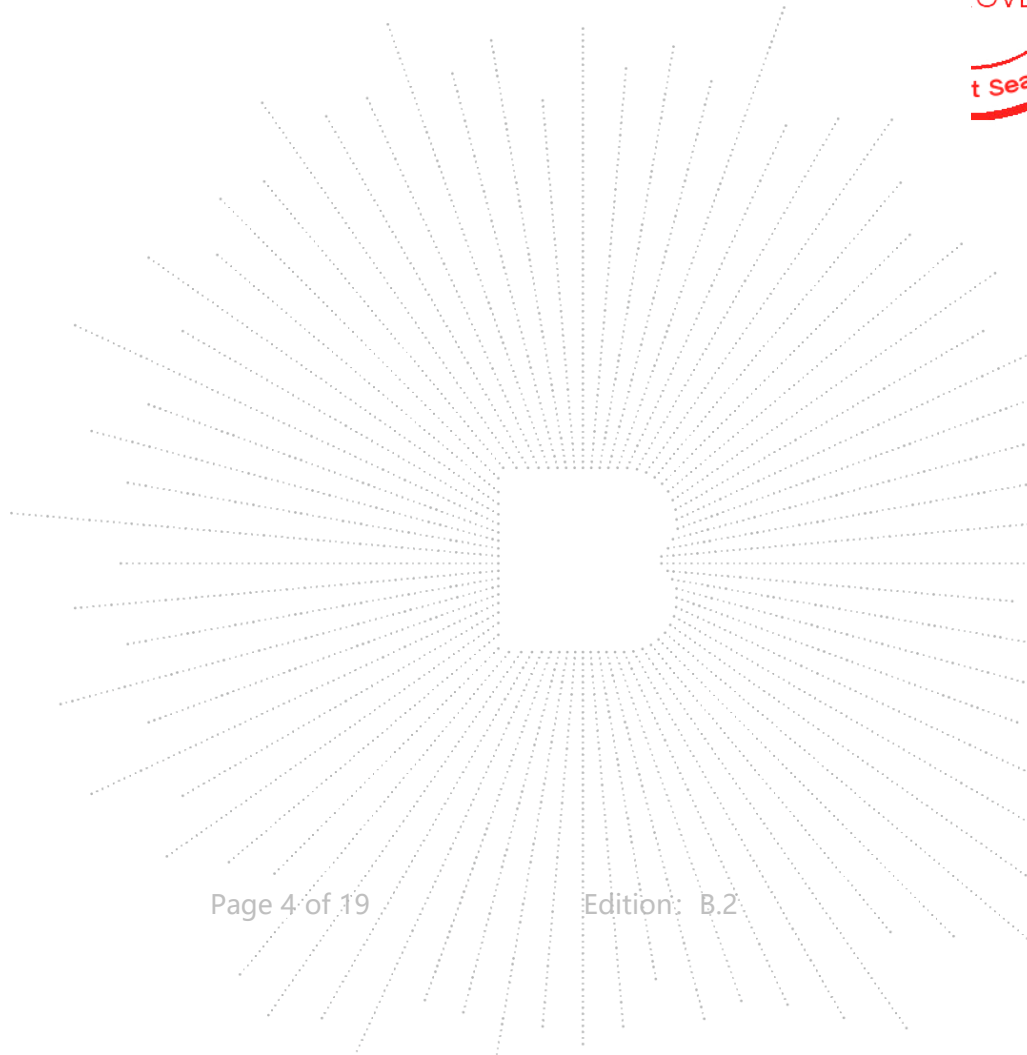

## 2. Product Information

### 2.1 Product Information

Model/Type Reference: PB764  
 P/N code Differences: All the P/N code and test models are the same circuit and RF module, except for the appearance color and sales platform.  
 Hardware Version: A1  
 Software Version: V1  
 Operation Frequency: 5W+7.5W: 112kHz-148.5kHz  
 15W: 360kHz  
 Modulation: FSK  
 Antenna installation: loop coil antenna  
 Ratings: USB-C (IN) Input:5V $\overline{=}$ 3A/9V $\overline{=}$ 2.22A  
 USB-C(OUT) Output:5V $\overline{=}$ 2.4A/5V $\overline{=}$ 3A/9V $\overline{=}$ 2.22A/12V $\overline{=}$ 1.67A  
 Wireless Charging Output Power:15W Max  
 Cell Capacity: 10000mAh (2\*5000mAh)  
 Rated Capacity: 6000mAh (TYP 5V 2.4A)  
 Rated Energy: 36Wh (3.6V 10000mAh)

**Remark:**

- P/N code in the below table, for marketing purpose, will be marked on the marking plate.

45329	45329P	45329X	45329A	45329B	45329C	45329U	45329JP	45329ZD
45337	45337P	45337X	45337A	45337B	45337C	45337U	45337JP	45337ZD



## 2.2 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Magnetic Wireless Power Bank	<b>UGREEN</b>	PB764	N/A	EUT
E-2	Adapter	UGREEN	CD226	N/A	Auxiliary
E-3	Dummy load	N/A	DL01	N/A	Auxiliary

### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

## 2.3 Test Mode

AC Mode	Mode 1	USB-C IN 1:(5V $\overline{=}$ 3A)+ Wireless charge 5W
	Mode 2	USB-C IN 1:( 9V $\overline{=}$ 2.22A)+ Wireless charge 7.5W
DC Mode	Mode 3	Wireless charge 5W
	Mode 4	Wireless charge 7.5W
	Mode 5	Wireless charge 15W

Note: All test mode were tested and passed, only shows the worst case mode which were recorded in this report.



### 3. Test Facility And Test Instrument Used

#### 3.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Testing Co., Ltd. Address:1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

FCC Test Firm Registration Number: 712850

A2LA certificate registration number is: CN1212

ISED Registered No.: 23583

ISED CAB identifier: CN0017

#### 3.2 Test Instrument Used

EMF Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Electromagnet -ic radiation tester	Wavecontrol	SMP160	19SN0980	May 25, 2024	May 24, 2025
Electromagnet -ic field probe	Wavecontrol	WP400-3	20WP120082	May 16, 2024	May 15, 2025
Software	Frad	EZ-EMC	EMC-CON 3A1	\	\




## 4. Method Of Measurement

### 4.1 Applicable Standard


According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1093 RF exposure is calculated. According KDB680106 D01v04: RF Exposure Wireless Charging v04.

### 4.2 Block Diagram Of Test Setup

A:

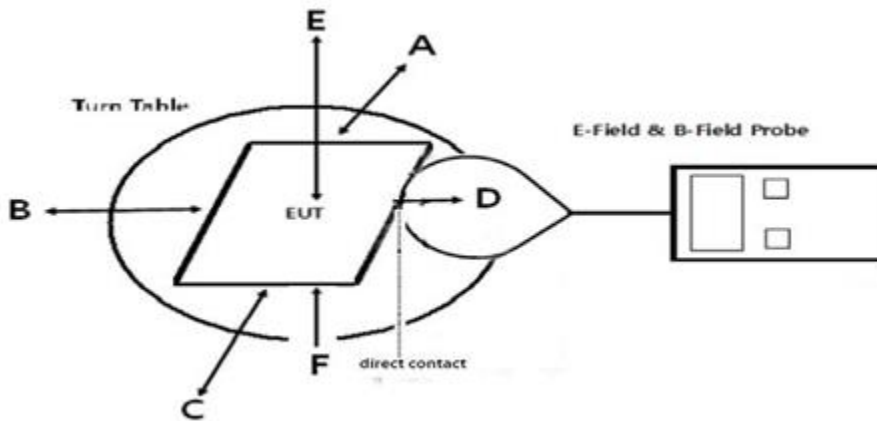

B:

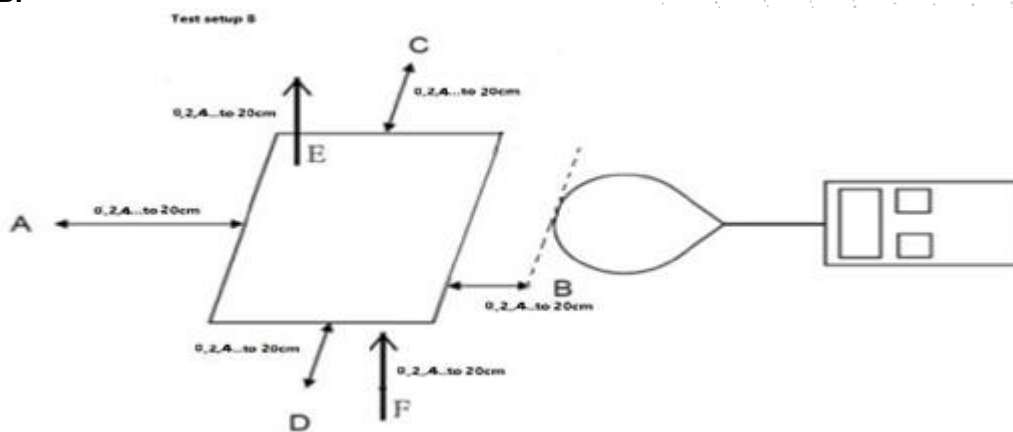



### 4.3 Limit

Limits for Occupational / Controlled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

Limits for General Population / Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180 / f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1	30

### 4.4 Test procedure

- a) The RF exposure test was performed in anechoic chamber.
- b) The measurement probe was placed at 0 cm surrounding the device for test setup A; and the measurement Probe was placed from 0 cm to 20 cm, in 2 cm maximum increment measured from the edge of the device For the test setup B.
- c) The highest emission level was recorded and compared with limit as soon as measurement of each
- d) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E , F) were completed.
- d) The EUT was measured according to the dictates of KDB680106 D01v04.
- f) Remark: The EUT's test position A, B, C, D , E and F is valid for the E and H field measurements.

#### 4.5 Equipment Approval Considerations

The EUT does comply with item 5(b) of KDB 680106 D01v04

1) Power transfer frequency is less than 1MHz

Yes, the device operate in the frequency range from 112-148.5kHz and 360kHz.

2) Output power from each primary coil is less than or equal to 15 watts.

Yes, the maximum output power of the primary coil is 15W.

3) A client device providing the maximum permitted load is placed in physical contact with the transmitter.

Yes, client device is placed directly in contact with the transmitter.

4) Only § 2.1091-Mobile exposure conditions apply

No, the EUT is portable condition assessment

5) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1.

Yes, Conform to

6) For systems with more than one radiating structure, the conditions specified in (5) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time.

Yes, confirm.

#### 4.6 E and H field Strength

We measured the H-Field Strength of 20cm, 22cm and 24cm, and recorded the test data of the worst 20cm.

Mobile: Test Mode 2 (the worst mode)

H-Field Strength at 20 cm surrounding the EUT and 20cm above the top surface of the EUT

Frequency Range (MHz)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position Top(uT)
0.112-0.1485	0.0163	0.0066	0.0072	0.0112	0.0068	0.0071

Frequency Range (MHz)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position Top(A/m)	50% Limits Test (A/m)	Limits Test (A/m)
0.112-0.1485	0.0130	0.0063	0.0063	0.0085	0.0050	0.0055	0.815	1.63

Note:  $A/m = uT \div 1.25$

Portable: Test Mode 5 (the worst mode)

H-Field Strength at 20 cm surrounding the EUT and 20cm above the top surface of the EUT

Frequency Range (MHz)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position Top(uT)
0.360	0.0178	0.0080	0.0084	0.0118	0.0083	0.0075

Frequency Range (MHz)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position Top(A/m)	50% Limits Test (A/m)	Limits Test (A/m)
0.360	0.0142	0.0064	0.0067	0.0094	0.0066	0.0060	0.815	1.63

Note:  $A/m = uT \div 1.25$



Mobile: Test Mode 3 (the worst mode)  
 Transmitter Battery level: 100% battery

H-Filed Strength at (distance from 2cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)
2	0.1384	0.1040	0.0928	0.1158	0.0563	0.0566
4	0.0530	0.0323	0.0341	0.0371	0.0226	0.0211
6	0.0244	0.0136	0.0163	0.0191	0.0128	0.0111
8	0.0188	0.0081	0.0111	0.0131	0.0081	0.0080
10	0.0184	0.0071	0.0102	0.0125	0.0075	0.0071
12	0.0184	0.0071	0.0103	0.0121	0.0071	0.0076
14	0.0179	0.0072	0.0107	0.0128	0.0070	0.0081
16	0.0176	0.0075	0.0112	0.0127	0.0069	0.0070
18	0.0185	0.0071	0.0110	0.0122	0.0077	0.0080
20	0.0186	0.0077	0.0112	0.0129	0.0083	0.0080

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
2	0.1107	0.0832	0.0742	0.0926	0.0450	0.0453	1.63
4	0.0424	0.0258	0.0273	0.0297	0.0181	0.0169	1.63
6	0.0195	0.0109	0.0130	0.0153	0.0102	0.0089	1.63
8	0.0150	0.0065	0.0089	0.0105	0.0065	0.0064	1.63
10	0.0147	0.0057	0.0082	0.0100	0.0060	0.0057	1.63
12	0.0147	0.0057	0.0082	0.0097	0.0057	0.0061	1.63
14	0.0143	0.0058	0.0086	0.0102	0.0056	0.0065	1.63
16	0.0141	0.0060	0.0090	0.0102	0.0055	0.0056	1.63
18	0.0148	0.0057	0.0088	0.0098	0.0062	0.0064	1.63
20	0.0149	0.0062	0.0090	0.0103	0.0066	0.0064	1.63

Note:  $A/m = uT/1.25$

Using Biot-Savart Law, the value of 2cm can be estimated through the test results of 4cm:

Distance: 2cm

Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0.1440	0.0883	0.0893	0.1000	0.0552	0.0527	1.63

Agreement Ratio

Distance: 2cm

Transmitter Battery level: 100% battery						
Test Position	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)
Measure Value (A/m)	0.1113	0.0830	0.0740	0.0928	0.0456	0.0463
Valuation(A/m)	0.1440	0.0883	0.0893	0.1000	0.0552	0.0527
Agreement ratio	25.06	7.39	20.28	7.05	18.53	19.06
Limit	30%	30%	30%	30%	30%	30%
Test result	Pass	Pass	Pass	Pass	Pass	Pass

Using Biot-Savart Law, the value of 4cm can be estimated through the test results of 6cm:

Distance: 4cm

Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0.0483	0.0297	0.0285	0.0379	0.0202	0.0205	1.63

Agreement Ratio


Distance: 4cm

Transmitter Battery level: 100% battery						
Test Position	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)
Measure Value (A/m)	0.0432	0.0265	0.0268	0.0300	0.0182	0.0174
Valuation(A/m)	0.0483	0.0297	0.0285	0.0379	0.0202	0.0205
Agreement ratio	10.34	6.30	12.74	22.22	23.94	27.66
Limit	30%	30%	30%	30%	30%	30%
Test result	Pass	Pass	Pass	Pass	Pass	Pass

As the model is sufficient, the value of 0cm can be estimated through the results of 2 cm

Using Biot-Savart Law, the value of 0cm can be estimated through the test results of 2cm:  
Distance: 0cm

Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0.8582	0.6400	0.5706	0.7156	0.1857	0.1885	1.63
Test result: Pass						

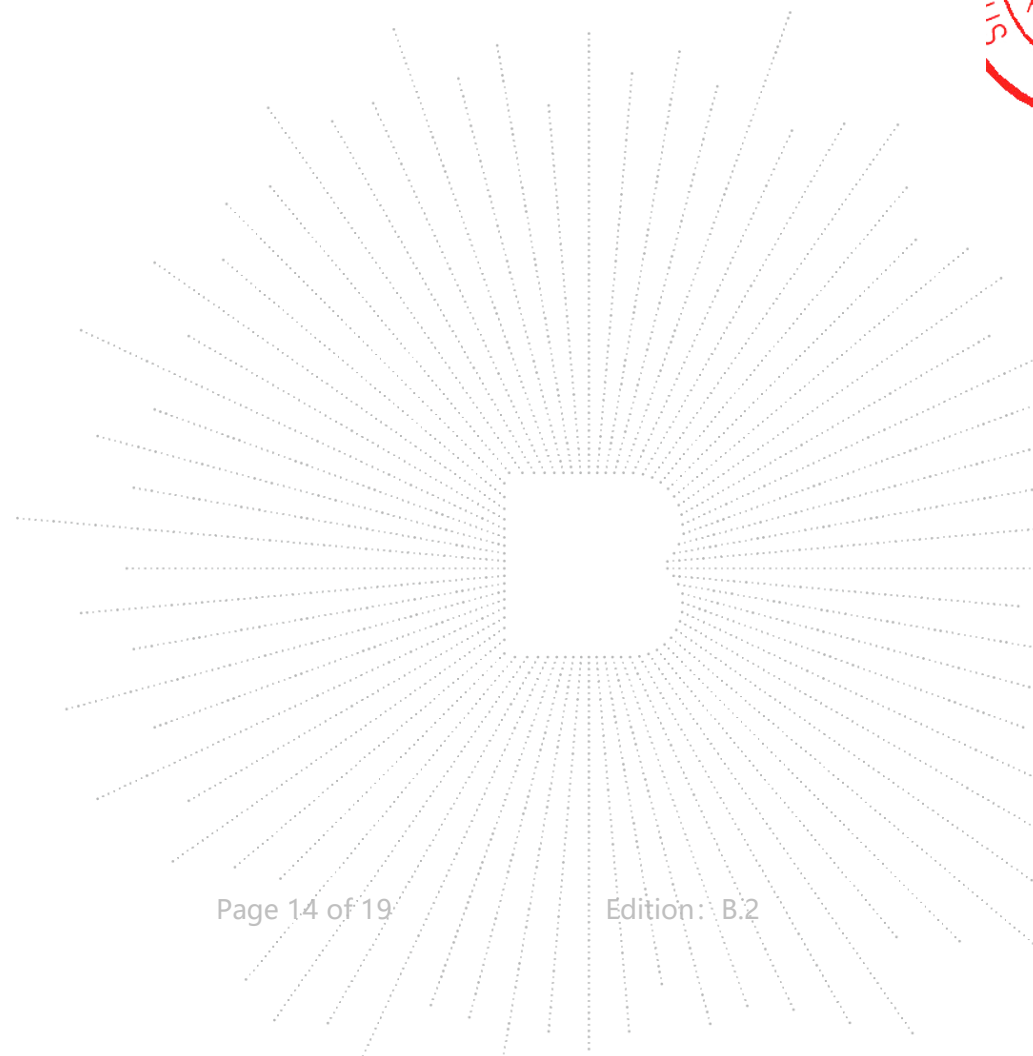

Portable: Test Mode 5 (the worst mode)  
 Transmitter Battery level: 100% battery

H-Filed Strength at (distance from 2cm to 20cm at 2cm iteration) surrounding the EUT (A/m)

Test distance (cm)	Test Position A(uT)	Test Position B(uT)	Test Position C(uT)	Test Position D(uT)	Test Position E(uT)	Test Position F(uT)
2	0.1396	0.1046	0.0925	0.1159	0.0574	0.0573
4	0.0539	0.0338	0.0340	0.0373	0.0228	0.0229
6	0.0254	0.0153	0.0164	0.0198	0.0125	0.0130
8	0.0196	0.0103	0.0105	0.0144	0.0078	0.0093
10	0.0188	0.0091	0.0107	0.0133	0.0075	0.0085
12	0.0195	0.0100	0.0102	0.0136	0.0071	0.0082
14	0.0192	0.0100	0.0102	0.0138	0.0072	0.0081
16	0.0188	0.0099	0.0097	0.0142	0.0065	0.0080
18	0.0197	0.0103	0.0099	0.0137	0.0068	0.0084
20	0.0194	0.0098	0.0098	0.0133	0.0078	0.0086

Test distance (cm)	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
2	0.1117	0.0837	0.0740	0.0927	0.0459	0.0458	1.63
4	0.0431	0.0270	0.0272	0.0298	0.0182	0.0183	1.63
6	0.0203	0.0122	0.0131	0.0158	0.0100	0.0104	1.63
8	0.0157	0.0082	0.0084	0.0115	0.0062	0.0074	1.63
10	0.0150	0.0073	0.0086	0.0106	0.0060	0.0068	1.63
12	0.0156	0.0080	0.0082	0.0109	0.0057	0.0066	1.63
14	0.0154	0.0080	0.0082	0.0110	0.0058	0.0065	1.63
16	0.0150	0.0079	0.0078	0.0114	0.0052	0.0064	1.63
18	0.0158	0.0082	0.0079	0.0110	0.0054	0.0067	1.63
20	0.0155	0.0078	0.0078	0.0106	0.0062	0.0069	1.63

Note:  $A/m = uT/1.25$

BCTC  
 APP  
 Rep

Using Biot-Savart Law, the value of 2cm can be estimated through the test results of 4cm:

Distance: 2cm

Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0.1437	0.0901	0.0907	0.0995	0.0553	0.0555	1.63

Agreement Ratio

Distance: 2cm

Transmitter Battery level: 100% battery						
Test Position	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)
Measure Value (A/m)	0.1117	0.0837	0.0740	0.0927	0.0459	0.0458
Valuation(A/m)	0.1437	0.0901	0.0907	0.0995	0.0553	0.0555
Agreement ratio	25.06	7.39	20.28	7.05	18.53	19.06
Limit	30%	30%	30%	30%	30%	30%
Test result	Pass	Pass	Pass	Pass	Pass	Pass

Using Biot-Savart Law, the value of 4cm can be estimated through the test results of 6cm:

Distance: 4cm

Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0.0478	0.0288	0.0309	0.0373	0.0232	0.0242	1.63

Agreement Ratio

Distance: 4cm

Transmitter Battery level: 100% battery						
Test Position	Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)
Measure Value (A/m)	0.0431	0.0270	0.0272	0.0298	0.0182	0.0183
Valuation(A/m)	0.0478	0.0288	0.0309	0.0373	0.0232	0.0242
Agreement ratio	10.34	6.30	12.74	22.22	23.94	27.66
Limit	30%	30%	30%	30%	30%	30%
Test result	Pass	Pass	Pass	Pass	Pass	Pass




As the model is sufficient, the value of 0cm can be estimated through the results of 2 cm

Using Biot-Savart Law, the value of 0cm can be estimated through the test results of 2cm:  
Distance: 0cm

Test Position A(A/m)	Test Position B(A/m)	Test Position C(A/m)	Test Position D(A/m)	Test Position E(A/m)	Test Position F(A/m)	Limits (A/m)
0.8613	0.6452	0.5706	0.7150	0.1870	0.1866	1.63
Test result: Pass						

RES  
FC  
VE  
seal

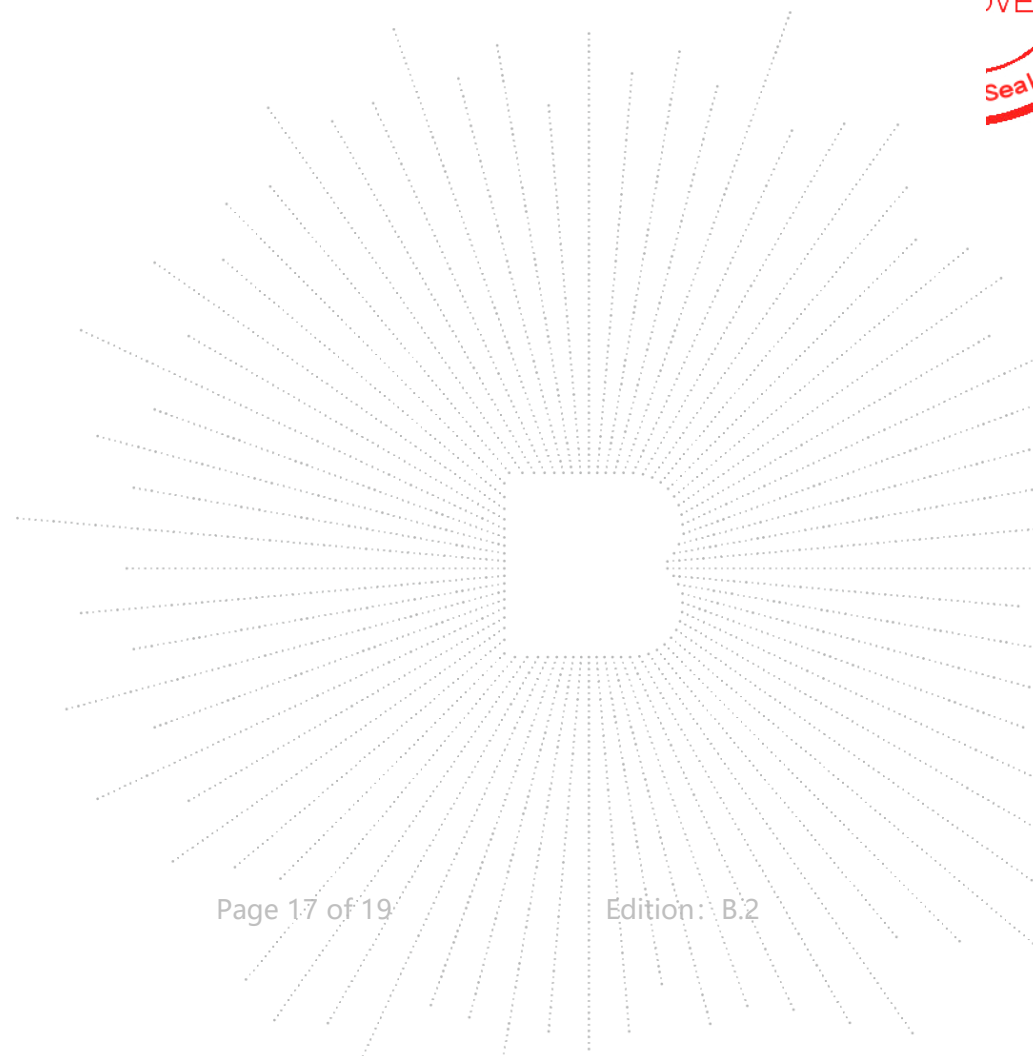

**5. Photographs Of Test Set-Up**



**STATEMENT**

1. The equipment lists are traceable to the national reference standards.
2. The test report can not be partially copied unless prior written approval is issued from our lab.
3. The test report is invalid without the "special seal for inspection and testing".
4. The test report is invalid without the signature of the approver.
5. The test process and test result is only related to the Unit Under Test.
6. Sample information is provided by the client and the laboratory is not responsible for its authenticity.
7. The quality system of our laboratory is in accordance with ISO/IEC17025.
8. If there is any objection to this test report, the client should inform issuing laboratory within 15 days from the date of receiving test report.

**Address:**

1-2/F., Building B, Pengzhou Industrial Park, No.158, Fuyuan 1st Road, Zhancheng, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

TEL: 400-788-9558

P.C.: 518103

FAX: 0755-33229357

Website: <http://www.chnbctc.com>

Consultation E-mail: [bctc@bctc-lab.com.cn](mailto:bctc@bctc-lab.com.cn)

Complaint/Advice E-mail: [advice@bctc-lab.com.cn](mailto:advice@bctc-lab.com.cn)

\*\*\*\*\* END \*\*\*\*\*

CO., LTD.