

# FCC TEST REPORT

Client Name : Fusion Sport Proprietary Limited  
Address : 76 Neon Street Sumner Park, QLD4074, 4000-4999,  
Australia  
Product Name : Smartspeed PRO V3  
Date : Sept. 07, 2021

**Shenzhen Anbotek Compliance Laboratory Limited**



# Contents

1. General Information.....	5
1.1. Client Information.....	5
1.2. Description of Device (EUT).....	5
1.3. Auxiliary Equipment Used During Test.....	6
1.4. Description of Test Modes.....	6
1.5. List of channels.....	6
1.6. Description Of Test Setup.....	7
1.7. Test Equipment List.....	8
1.8. Measurement Uncertainty.....	9
1.9. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	16
4.3. Test Procedure.....	17
4.4. Test Data.....	18
5. Maximum Peak Output Power Test.....	26
5.1. Test Standard and Limit.....	26
5.2. Test Setup.....	26
5.3. Test Procedure.....	26
5.4. Test Data.....	26
6. 6DB Occupy Bandwidth Test.....	29
6.1. Test Standard and Limit.....	29
6.2. Test Setup.....	29
6.3. Test Procedure.....	29
6.4. Test Data.....	29
7. Power Spectral Density Test.....	32
7.1. Test Standard and Limit.....	32
7.2. Test Setup.....	32
7.3. Test Procedure.....	32
7.4. Test Data.....	32
8. 100kHz Bandwidth of Frequency Band Edge Requirement.....	35
8.1. Test Standard and Limit.....	35
8.2. Test Setup.....	35

8.3. Test Procedure..... 35

8.4. Test Data..... 35

9. Antenna Requirement..... 39

9.1. Test Standard and Requirement..... 39

9.2. Antenna Connected Construction..... 39

APPENDIX I -- TEST SETUP PHOTOGRAPH..... 40

APPENDIX II -- EXTERNAL PHOTOGRAPH..... 42

APPENDIX III -- INTERNAL PHOTOGRAPH..... 46

# TEST REPORT

Applicant : Fusion Sport Proprietary Limited  
Manufacturer : Fusion Sport Proprietary Limited  
Product Name : Smartspeed PRO V3  
Model No. : Smartspeed PRO V3  
Trade Mark : FUSION SPORT  
Rating(s) : Input:12V, 3000mA (via adapter input: 100-240V~ 50/60Hz, 0.8A; with 7.2V  
4500mAh, Battery inside)

**Test Standard(s) : FCC Part15 Subpart C, Section 15.247**

**Test Method(s) : ANSI C63.10: 2020, KDB558074 D01 DTS Meas Guidance v05r02**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Receipt

Jul. 28, 2021

Date of Test

Jul. 28~Aug.30, 2021

Prepared By



(Ella Liang)

Approved & Authorized Signer



(Kingkong Jin)

# 1. General Information

## 1.1. Client Information

Applicant	:	Fusion Sport Proprietary Limited
Address	:	76 Neon Street Sumner Park, QLD4074, 4000-4999, Australia
Manufacturer	:	Fusion Sport Proprietary Limited
Address	:	76 Neon Street Sumner Park, QLD4074, 4000-4999, Australia
Factory	:	Fusion Sport Proprietary Limited
Address	:	76 Neon Street Sumner Park, QLD4074, 4000-4999, Australia

## 1.2. Description of Device (EUT)

Product Name	:	Smartspeed PRO V3
Model No.	:	Smartspeed PRO V3
Trade Mark	:	FUSION SPORT
Test Power Supply	:	AC 120V, 60Hz for adapter/ AC 240V, 60Hz for adapter/ DC 7.2V Battery inside
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Product Description	Operation Frequency:	2405~2480MHz
	Number of Channel:	16 Channels
	Modulation Type:	QPSK
	Antenna Type:	FPC Antenna
	Antenna Gain(Peak):	4 dBi
	Adapter:	Input: AC 100~240V, 50/60Hz Output:12V=3000mA
<b>Remark:</b> 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		

### 1.3. Auxiliary Equipment Used During Test

N/A	
-----	--

### 1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description	
Mode 1	CH11	TX+ Charging Mode/ TX Only
Mode 2	CH19	
Mode 3	CH26	

Note:

(1) The measurements are performed at the highest, middle, lowest available channels.



### 1.5. List of channels

Channel	Freq. (MHz)	Channel	Freq. (MHz)
11	2405	21	2455
12	2410	22	2460
13	2415	23	2465
14	2420	24	2470
15	2425	25	2475
16	2430	26	2480
17	2435		
18	2440		
19	2445		
20	2450		

Note:

1. The engineering test program was provided and the EUT was programmed to be in continuously transmitting mode.
2. EUT built-in battery-powered, fully-charged battery use of the test battery.

### 1.6. Description Of Test Setup

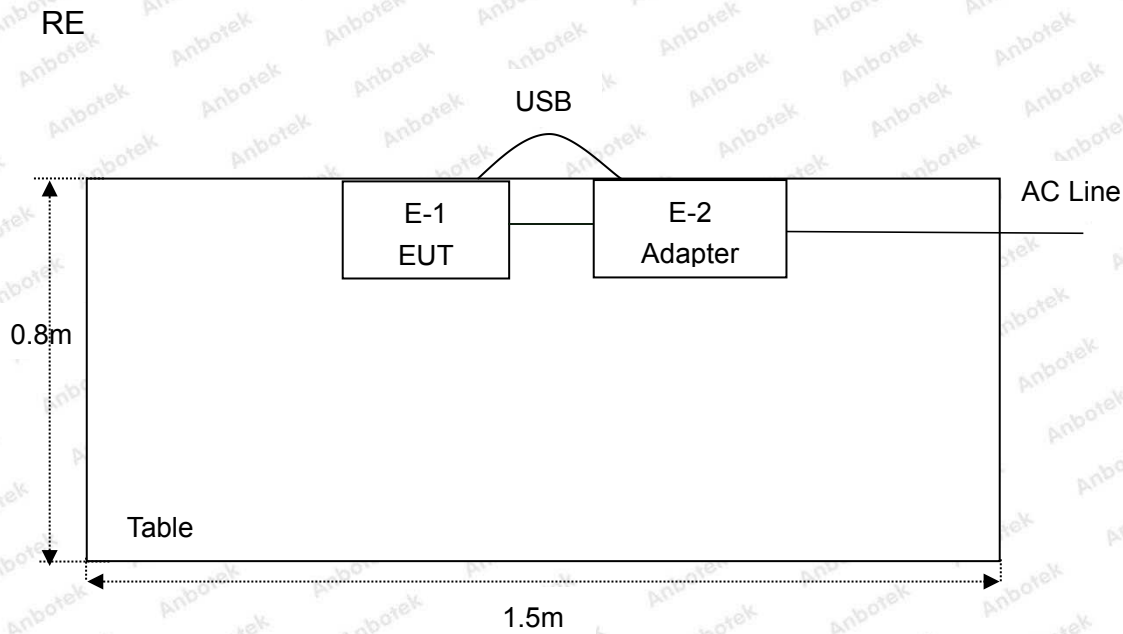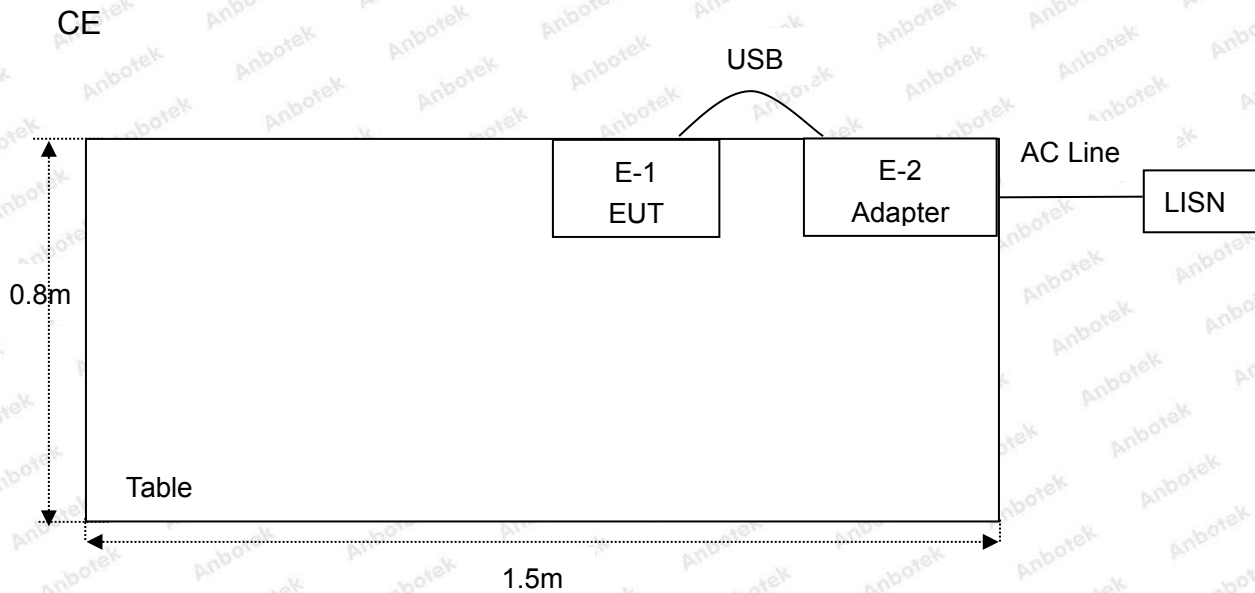

## 1.7. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400-K F	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Oct. 26, 2020	1 Year



**1.8. Measurement Uncertainty**

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

**1.9. Description of Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

**FCC-Registration No.: 184111**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

**ISED-Registration No.: 8058A**

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

**Test Location**

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

## 2. Summary of Test Results


Standard Section	Test Item	Result
15.203/15.247(c)	Antenna Requirement	PASS
15.207	Conducted Emission	PASS
15.205/15.209	Spurious Emission	PASS
15.247(b)(3)	Conducted Peak Output Power	PASS
15.247(a)(2)	6dB Occupied Bandwidth	PASS
15.247(e)	Power Spectral Density	PASS
15.247(d)	Band Edge	PASS
<b>Remark:</b> "N/A" is an abbreviation for Not Applicable.		

### 3. Conducted Emission Test

#### 3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
<b>Remark:</b> (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

#### 3.2. Test Setup

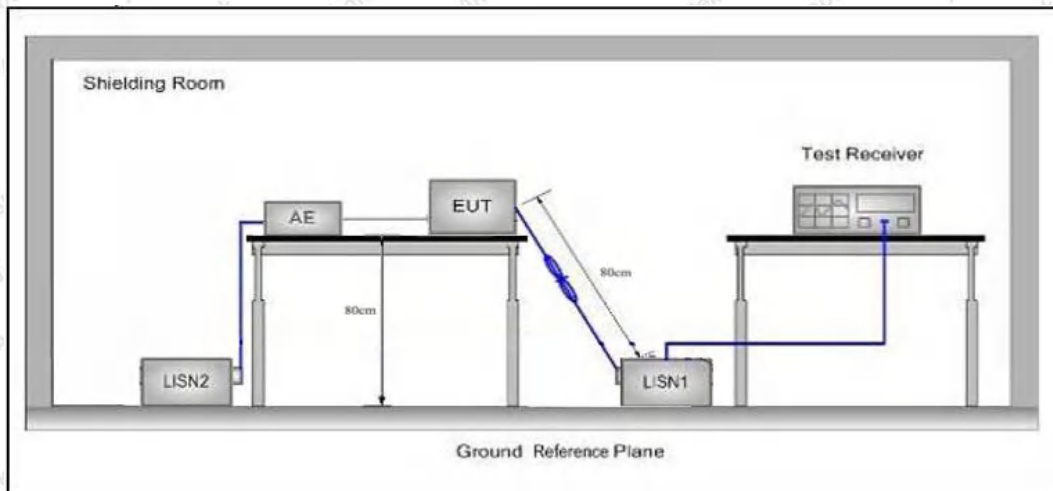

#### 3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10: 2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

#### 3.4. Test Data

During the test, pre-scan all modes, and found the “Low CH” which is the worst case, only the worst case is recorded in the report.

**Conducted Emission Test Data**


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 24.7°C Hum.: 45%

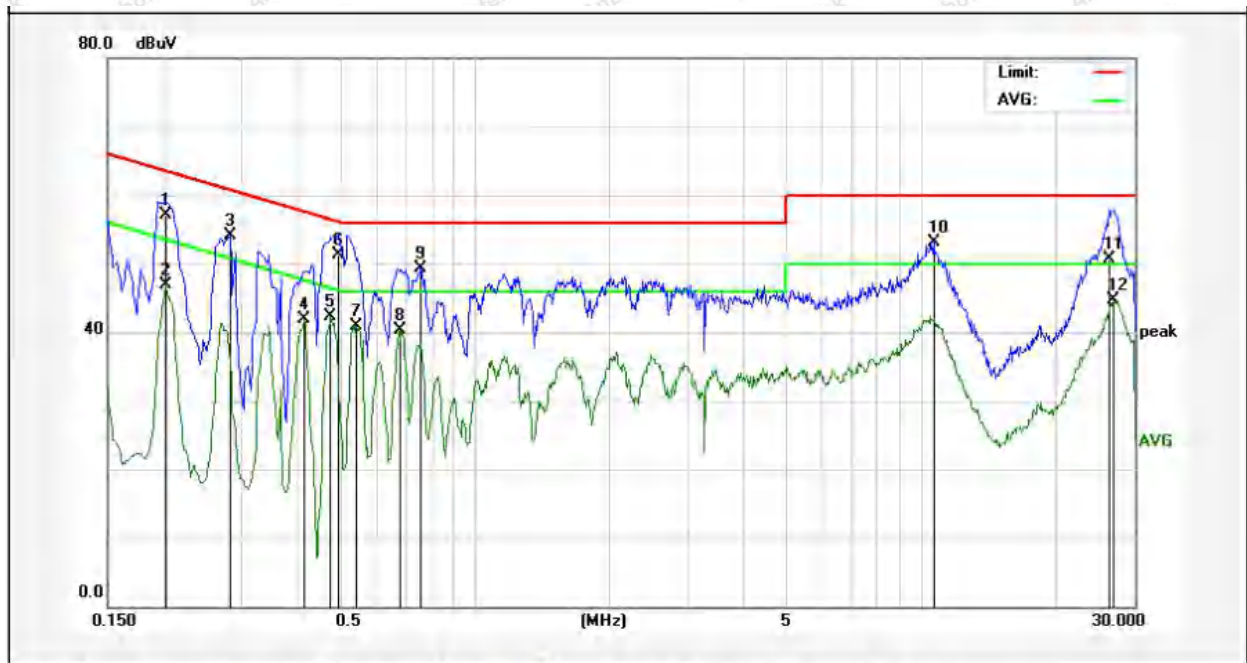

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2020	37.27	19.90	57.17	63.52	-6.35	QP	
2	0.2020	27.03	19.90	46.93	53.52	-6.59	AVG	
3	0.2819	34.22	19.89	54.11	60.76	-6.65	QP	
4	0.4138	22.04	19.94	41.98	47.57	-5.59	AVG	
5	0.4737	22.36	19.97	42.33	46.45	-4.12	AVG	
6	0.4940	31.32	19.98	51.30	56.10	-4.80	QP	
7	0.5420	20.95	19.99	40.94	46.00	-5.06	AVG	
8	0.6780	20.26	20.03	40.29	46.00	-5.71	AVG	
9	0.7580	29.28	20.06	49.34	56.00	-6.66	QP	
10	10.6420	32.79	20.33	53.12	60.00	-6.88	QP	
11	26.2820	30.48	20.28	50.76	60.00	-9.24	QP	
12	26.9817	24.45	20.28	44.73	50.00	-5.27	AVG	

### Conducted Emission Test Data


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 120V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 24.7°C Hum.: 45%

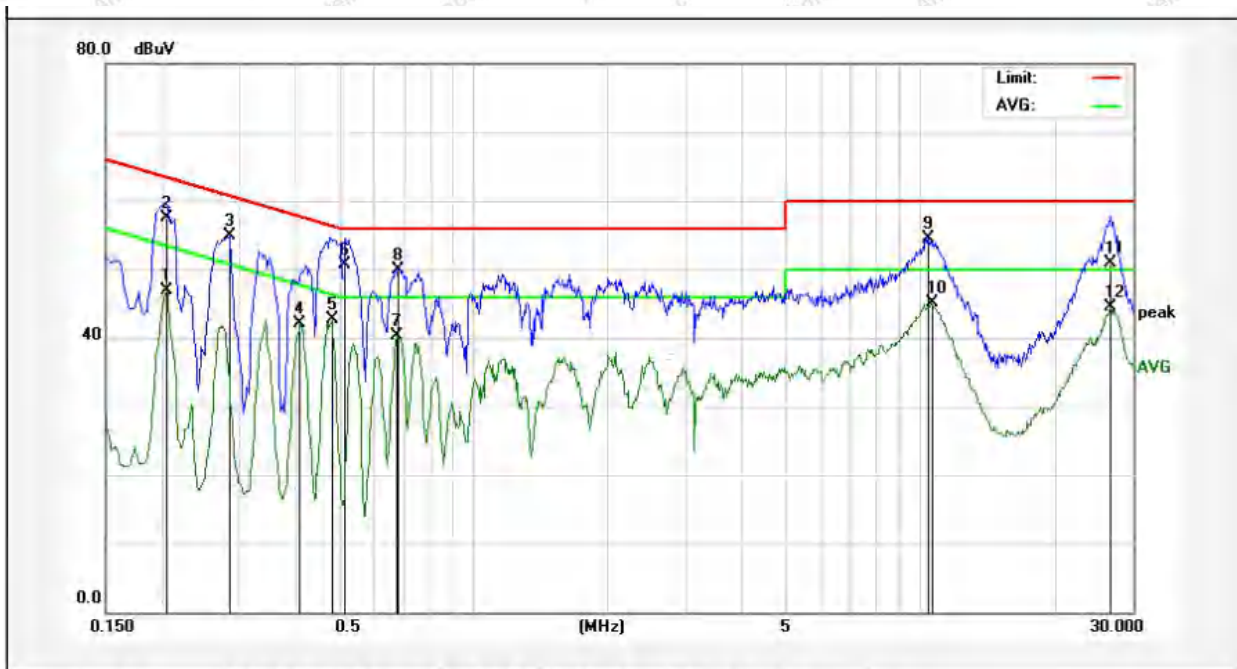

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.2058	26.94	19.90	46.84	53.37	-6.53	AVG	
2	0.2060	37.65	19.90	57.55	63.36	-5.81	QP	
3	0.2860	34.95	19.89	54.84	60.64	-5.80	QP	
4	0.4097	22.18	19.94	42.12	47.65	-5.53	AVG	
5	0.4818	22.65	19.97	42.62	46.31	-3.69	AVG	
6	0.5180	30.64	19.99	50.63	56.00	-5.37	QP	
7	0.6740	20.34	20.03	40.37	46.00	-5.63	AVG	
8	0.6820	29.94	20.03	49.97	56.00	-6.03	QP	
9	10.4619	34.10	20.33	54.43	60.00	-5.57	QP	
10	10.5656	24.75	20.33	45.08	50.00	-4.92	AVG	
11	26.7860	30.59	20.28	50.87	60.00	-9.13	QP	
12	26.7860	24.25	20.28	44.53	50.00	-5.47	AVG	

**Conducted Emission Test Data**


Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Live Line  
 Tem.: 24.7°C Hum.: 45%

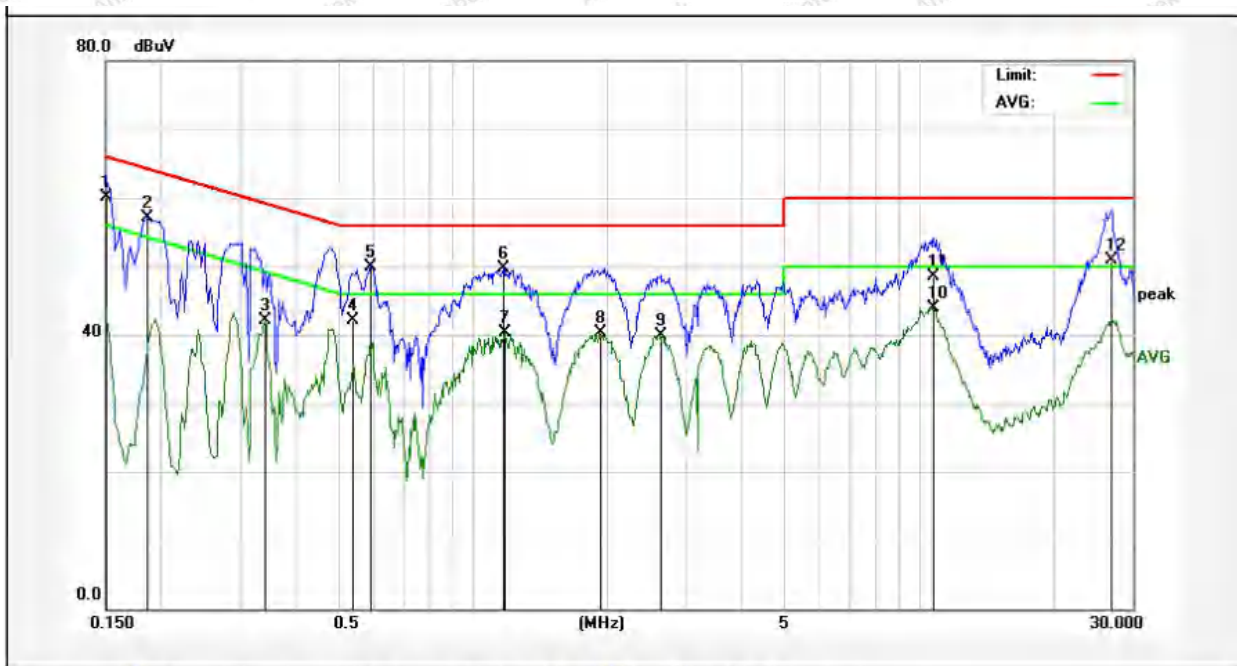

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	40.23	19.90	60.13	65.99	-5.86	QP	
2	0.1859	37.22	19.90	57.12	64.21	-7.09	QP	
3	0.3420	22.12	19.91	42.03	49.15	-7.12	AVG	
4	0.5380	22.21	19.99	42.20	46.00	-3.80	AVG	
5	0.5899	29.91	20.01	49.92	56.00	-6.08	QP	
6	1.1700	29.56	20.12	49.68	56.00	-6.32	QP	
7	1.1780	20.09	20.12	40.21	46.00	-5.79	AVG	
8	1.9220	20.26	20.14	40.40	46.00	-5.60	AVG	
9	2.6220	19.79	20.15	39.94	46.00	-6.06	AVG	
10	10.6820	23.67	20.33	44.00	50.00	-6.00	AVG	
11	10.7540	28.21	20.33	48.54	60.00	-11.46	QP	
12	26.8620	30.63	20.28	50.91	60.00	-9.09	QP	

**Conducted Emission Test Data**

Test Site: 1# Shielded Room  
 Operating Condition: Mode 1  
 Test Specification: AC 240V, 60Hz for adapter  
 Comment: Neutral Line  
 Tem.: 24.7°C Hum.: 45%

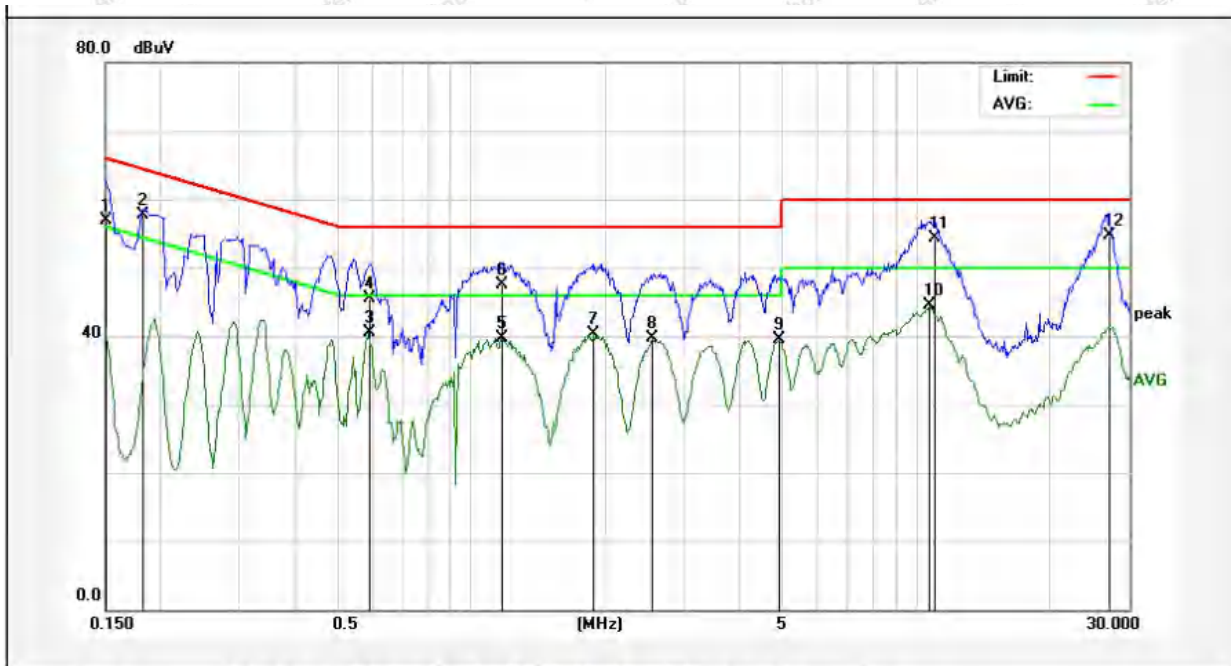

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	37.10	19.90	57.00	65.99	-8.99	QP	
2	0.1819	37.71	19.90	57.61	64.39	-6.78	QP	
3	0.5858	20.44	20.01	40.45	46.00	-5.55	AVG	
4	0.5899	25.56	20.01	45.57	56.00	-10.43	QP	
5	1.1618	19.67	20.12	39.79	46.00	-6.21	AVG	
6	1.1700	27.48	20.12	47.60	56.00	-8.40	QP	
7	1.8818	20.26	20.14	40.40	46.00	-5.60	AVG	
8	2.5499	19.64	20.15	39.79	46.00	-6.21	AVG	
9	4.9218	19.32	20.20	39.52	46.00	-6.48	AVG	
10	10.6859	24.21	20.33	44.54	50.00	-5.46	AVG	
11	10.9660	33.92	20.32	54.24	60.00	-5.76	QP	
12	27.0660	34.37	20.28	54.65	60.00	-5.35	QP	

## 4. Radiation Spurious Emission and Band Edge

### 4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

**Remark:**

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

### 4.2. Test Setup

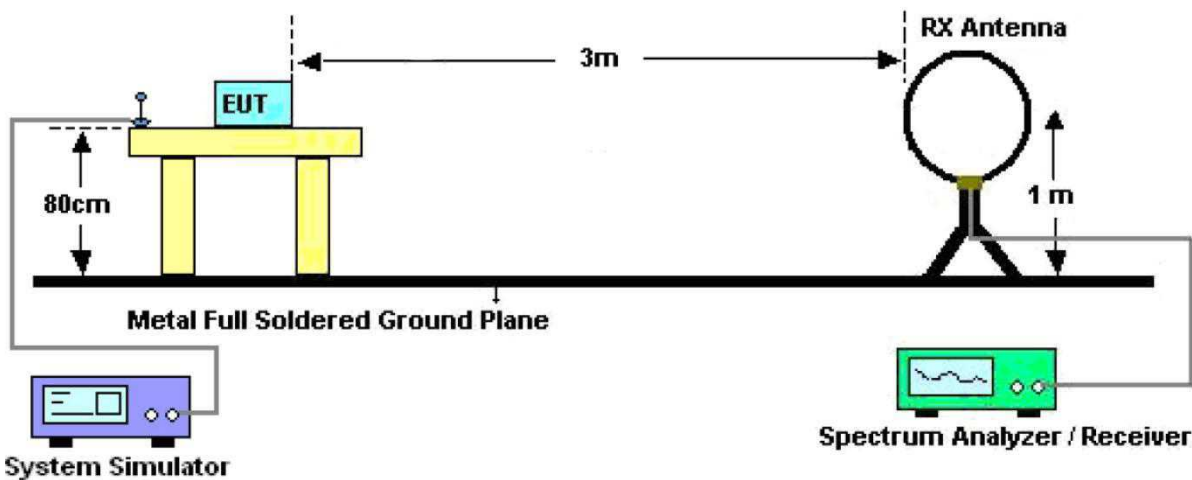


Figure 1. Below 30MHz



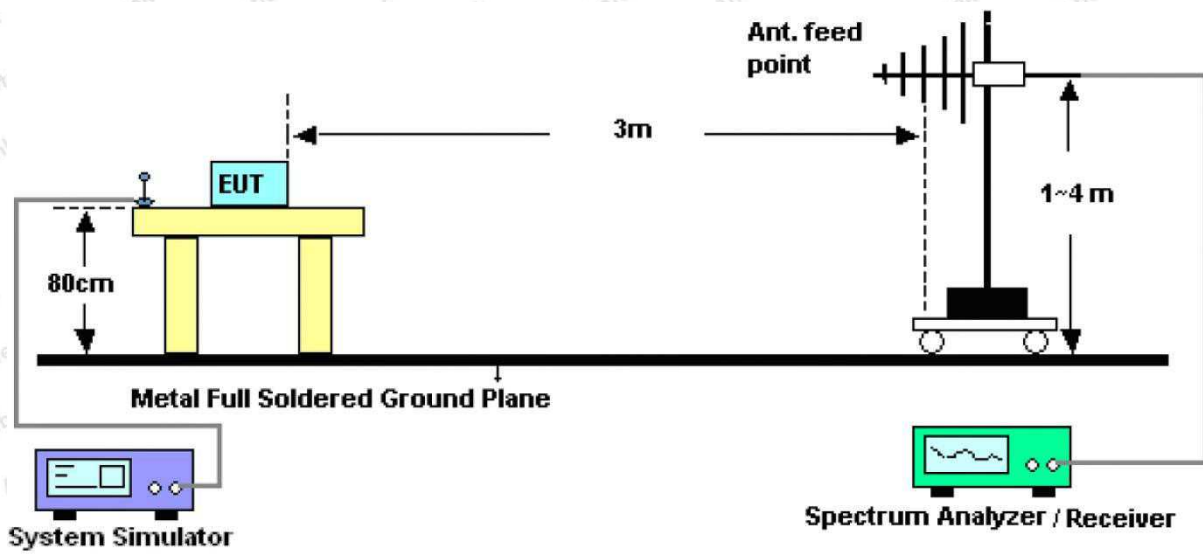


Figure 2. 30MHz to 1GHz

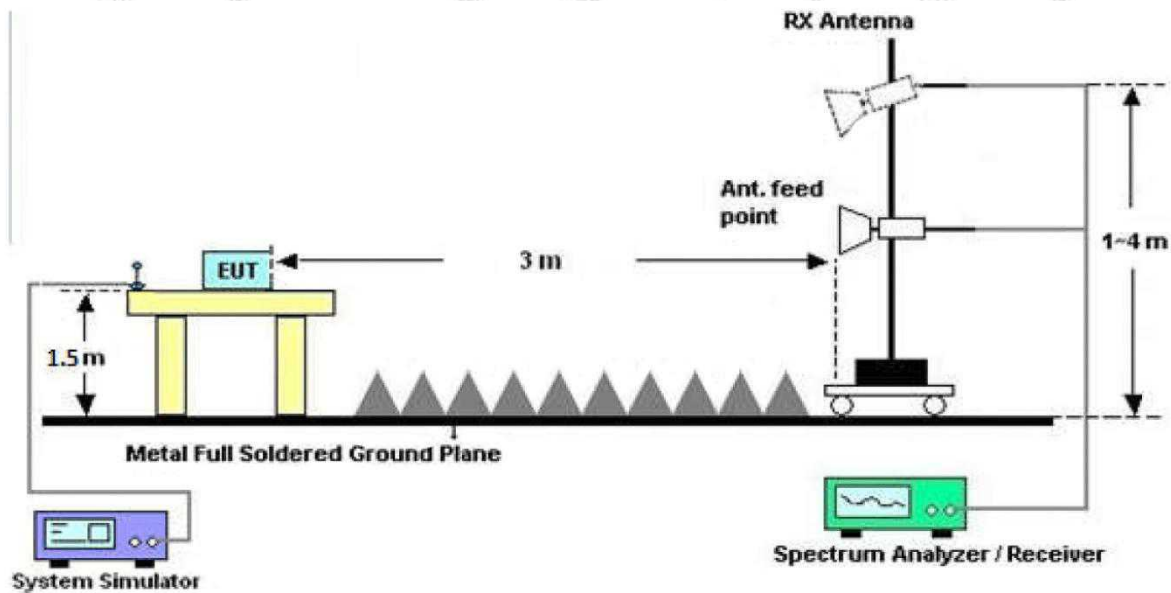


Figure 3. Above 1 GHz

### 4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9\*6\*6 Chamber. The device is evaluated in xyz orientation.

For the radiated emission test above 1GHz:

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW =30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW =300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For above 1GHz, Set the spectrum analyzer as:

RBW =1MHz, VBW =1MHz, Detector= Peak, Trace mode= Max hold, Sweep- auto couple.

RBW =1MHz, VBW =10Hz, Detector= Average, Trace mode= Max hold, Sweep- auto couple.

#### 4.4. Test Data


##### PASS

During the test, pre-scan all the modes, and found the Low channel(TX+Charging Mode) which is the worst case, only the worst case is recorded in the report.

The test results of 9kHz-30MHz was attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Test Results (30~1000MHz)**

Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Polarization: Horizontal  
 Temp.(°C)/Hum.(%RH): 23.6°C/48%RH

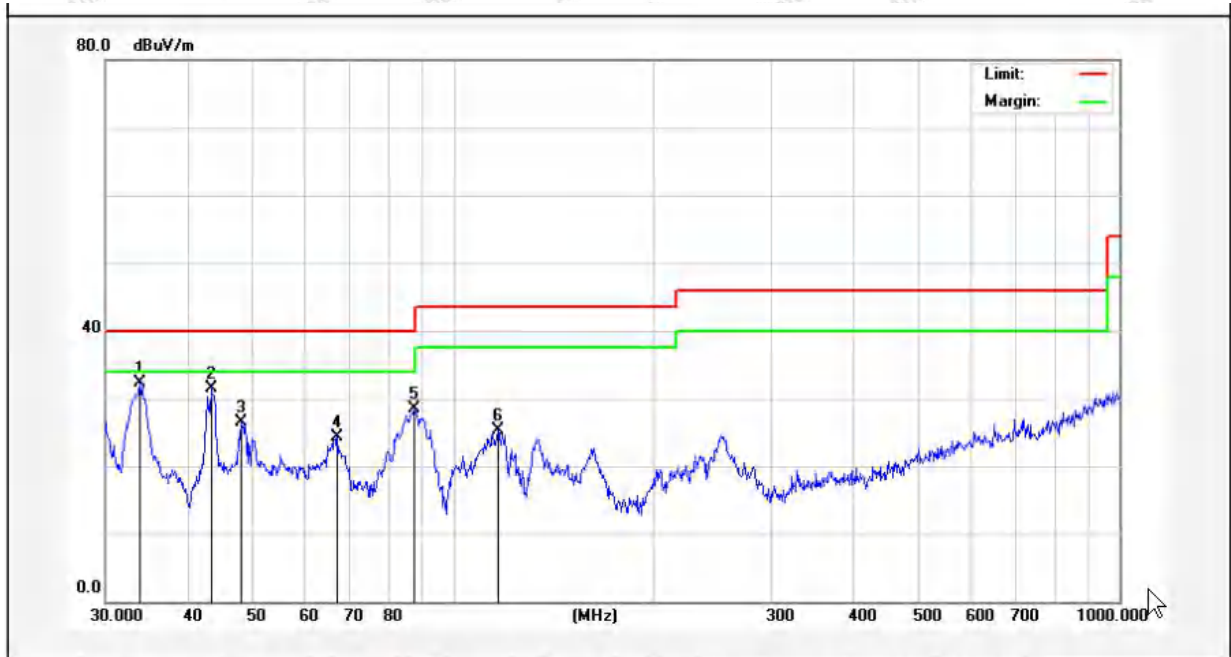

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	33.7986	50.26	-18.04	32.22	40.00	-7.78	QP	100	0	
2	43.2017	46.14	-14.54	31.60	40.00	-8.40	QP	100	360	
3	47.9938	41.15	-14.61	26.54	40.00	-13.46	QP	100	0	
4	66.9668	43.36	-19.11	24.25	40.00	-15.75	QP	100	360	
5	87.1115	48.87	-20.41	28.46	40.00	-11.54	QP	100	0	
6	116.5400	47.07	-21.70	25.37	43.50	-18.13	QP	100	360	

**Test Results (30~1000MHz)**

Test Mode: Mode 1  
 Power Source: AC 120V, 60Hz for adapter  
 Polarization: Vertical  
 Temp.(°C)/Hum.(%RH): 23.6°C/48%RH



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	33.0949	49.68	-16.62	33.06	40.00	-6.94	QP	100	0	
2	43.9658	43.89	-14.00	29.89	40.00	-10.11	QP	100	360	
3	48.1625	46.93	-14.58	32.35	40.00	-7.65	QP	100	0	
4	50.4089	45.34	-14.99	30.35	40.00	-9.65	QP	100	360	
5	87.1115	47.40	-16.38	31.02	40.00	-8.98	QP	100	0	
6	120.2766	48.11	-17.96	30.15	43.50	-13.35	QP	100	360	

**Test Results (1GHz-25GHz)**

Test Mode: CH11	Test channel: Lowest
-----------------	----------------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	27.16	15.27	42.43	74.00	-31.57	Vertical
7215.00	28.32	18.09	46.41	74.00	-27.59	Vertical
9620.00	29.14	23.76	52.90	74.00	-21.10	Vertical
12025.00	*			74.00		Vertical
14430.00	*			74.00		Vertical
4810.00	27.53	15.27	42.80	74.00	-31.20	Horizontal
7215.00	28.49	18.09	46.58	74.00	-27.42	Horizontal
9620.00	28.23	23.76	51.99	74.00	-22.01	Horizontal
12025.00	*			74.00		Horizontal
14430.00	*			74.00		Horizontal

**Average value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4810.00	16.54	15.27	31.81	54.00	-22.19	Vertical
7215.00	17.35	18.09	35.44	54.00	-18.56	Vertical
9620.00	18.16	23.76	41.92	54.00	-12.08	Vertical
12025.00	*			54.00		Vertical
14430.00	*			54.00		Vertical
4810.00	15.88	15.27	31.15	54.00	-22.85	Horizontal
7215.00	17.55	18.09	35.64	54.00	-18.36	Horizontal
9620.00	17.54	23.76	41.30	54.00	-12.70	Horizontal
12025.00	*			54.00		Horizontal
14430.00	*			54.00		Horizontal

**Test Results (1GHz-25GHz)**

Test Mode: CH19	Test channel: Middle
-----------------	----------------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	27.18	15.42	42.60	74.00	-31.40	Vertical
7335.00	28.17	18.02	46.19	74.00	-27.81	Vertical
9780.00	28.15	23.80	51.95	74.00	-22.05	Vertical
12225.00	*			74.00		Vertical
14670.00	*			74.00		Vertical
4890.00	27.23	15.42	42.65	74.00	-31.35	Horizontal
7335.00	28.48	18.02	46.50	74.00	-27.50	Horizontal
9780.00	27.93	23.80	51.73	74.00	-22.27	Horizontal
12225.00	*			74.00		Horizontal
14670.00	*			74.00		Horizontal

**Average value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4890.00	16.27	15.42	31.69	54.00	-22.31	polarization
7335.00	17.45	18.02	35.47	54.00	-18.53	Vertical
9780.00	18.02	23.80	41.82	54.00	-12.18	Vertical
12225.00	*			54.00		Vertical
14670.00	*			54.00		Vertical
4890.00	15.79	15.42	31.21	54.00	-22.79	Vertical
7335.00	17.11	18.02	35.13	54.00	-18.87	Horizontal
9780.00	18.05	23.80	41.85	54.00	-12.15	Horizontal
12225.00	*			54.00		Horizontal
14670.00	*			54.00		Horizontal

**Test Results (1GHz-25GHz)**

Test Mode: CH26	Test channel: Highest
-----------------	-----------------------

**Peak value:**

Frequency (MHz)	Read Level (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	27.45	15.58	43.03	74.00	-30.97	Vertical
7440.00	28.18	17.93	46.11	74.00	-27.89	Vertical
9920.00	28.70	23.83	52.53	74.00	-21.47	Vertical
12400.00	*			74.00		Vertical
14880.00	*			74.00		Vertical
4960.00	27.30	15.58	42.88	74.00	-31.12	Horizontal
7440.00	28.51	17.93	46.44	74.00	-27.56	Horizontal
9920.00	28.61	23.83	52.44	74.00	-21.56	Horizontal
12400.00	*			74.00		Horizontal
14880.00	*			74.00		Horizontal


**Average value:**

Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	polarization
4960.00	17.39	15.58	32.97	54.00	-21.03	Vertical
7440.00	18.46	17.93	36.39	54.00	-17.61	Vertical
9920.00	18.57	23.83	42.40	54.00	-11.60	Vertical
12400.00				54.00		Vertical
14880.00				54.00		Vertical
4960.00	17.23	15.58	32.81	54.00	-21.19	Horizontal
7440.00	18.48	17.93	36.41	54.00	-17.59	Horizontal
9920.00	17.95	23.83	41.78	54.00	-12.22	Horizontal
12400.00	*			54.00		Horizontal
14880.00	*			54.00		Horizontal


Remark:

1. Level =Read level + Factor
2. "\*" means the test results were attenuated more than 20dB below the permissible limits, so the results don't record in the report.

**Radiated Band Edge:**

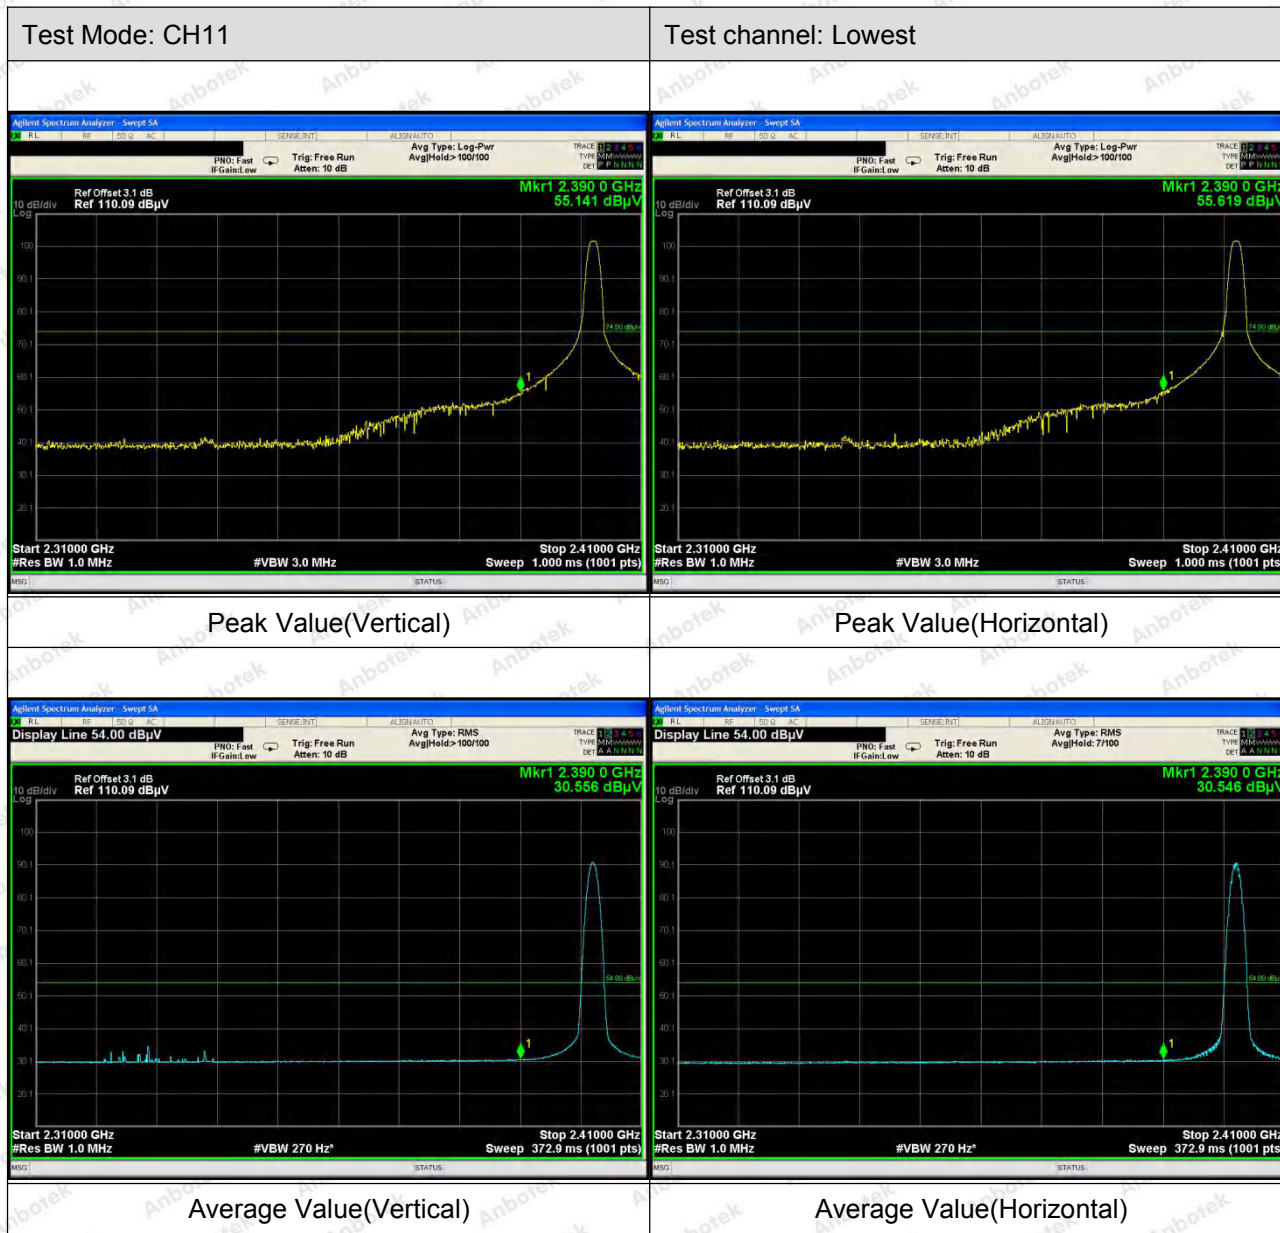



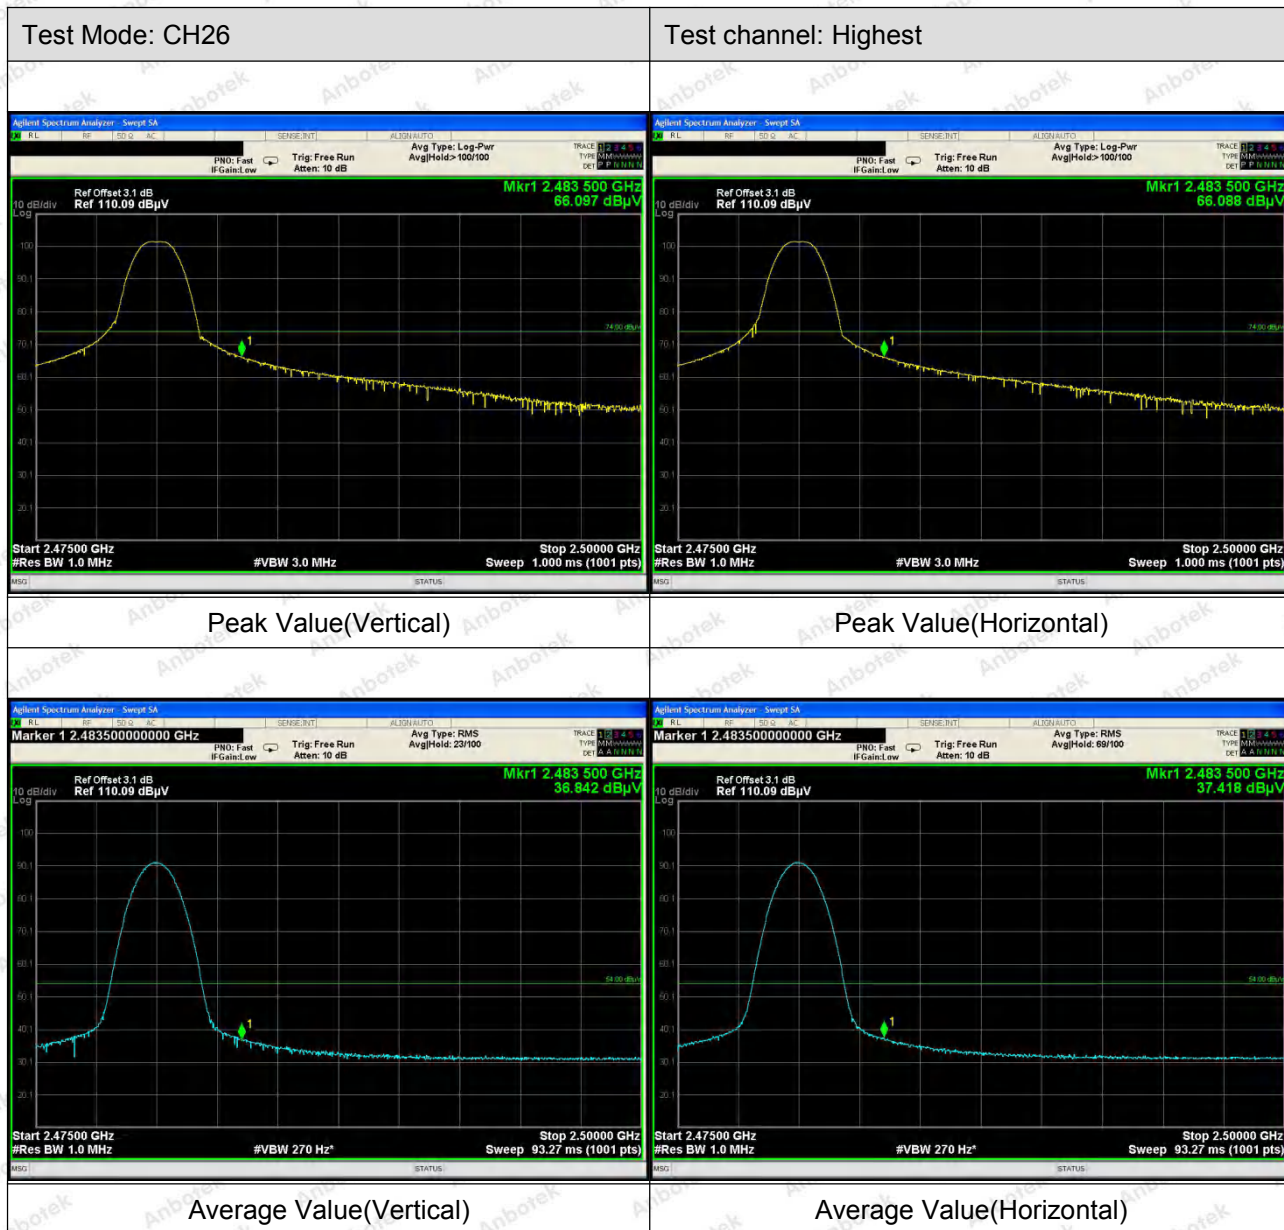


## 5. Maximum Peak Output Power Test

### 5.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	30dBm

### 5.2. Test Setup



### 5.3. Test Procedure

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

1. Set the RBW  $\geq$  DTS bandwidth.
2. Set the VBW  $\geq 3 \times$  RBW.
3. Set the span  $\geq 3 \times$  RBW.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

### 5.4. Test Data

Test Item	: Max. peak output power	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 7.2V Battery inside	Temperature	: 25°C
Test Result	: PASS	Humidity	: 55%RH

Channel Frequency (MHz)	Peak Power output (dBm)	Limit (dBm)	Results
2405	6.870	30	PASS
2445	6.548	30	PASS
2480	5.947	30	PASS



CH: Low



CH: Middle

### Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
 Tel: (86) 755-26066440 Fax: (86) 755-26014772 Email: service@anbotek.com

Code:AB-RF-05-a

Hotline  
 400-003-0500  
 www.anbotek.com




CH: High

## 6. 6DB Occupy Bandwidth Test

### 6.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(2)
Test Limit	>500kHz

### 6.2. Test Setup




### 6.3. Test Procedure

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as:  
 RBW = 100kHz, VBW $\geq$ 3\*RBW =300kHz,  
 Detector= Peak  
 Trace mode= Max hold.  
 Sweep- auto couple.
4. Mark the peak frequency and -6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.


### 6.4. Test Data

Test Item	: 6dB Bandwidth	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 7.2V Battery inside	Temperature	: 23.5°C
Test Result	: PASS	Humidity	: 54%RH


Channel	Frequency(MHz)	Bandwidth (kHz)	Limit (kHz)	Results
Low	2405	1561	>500	PASS
Middle	2445	1617		PASS
High	2480	1631		PASS

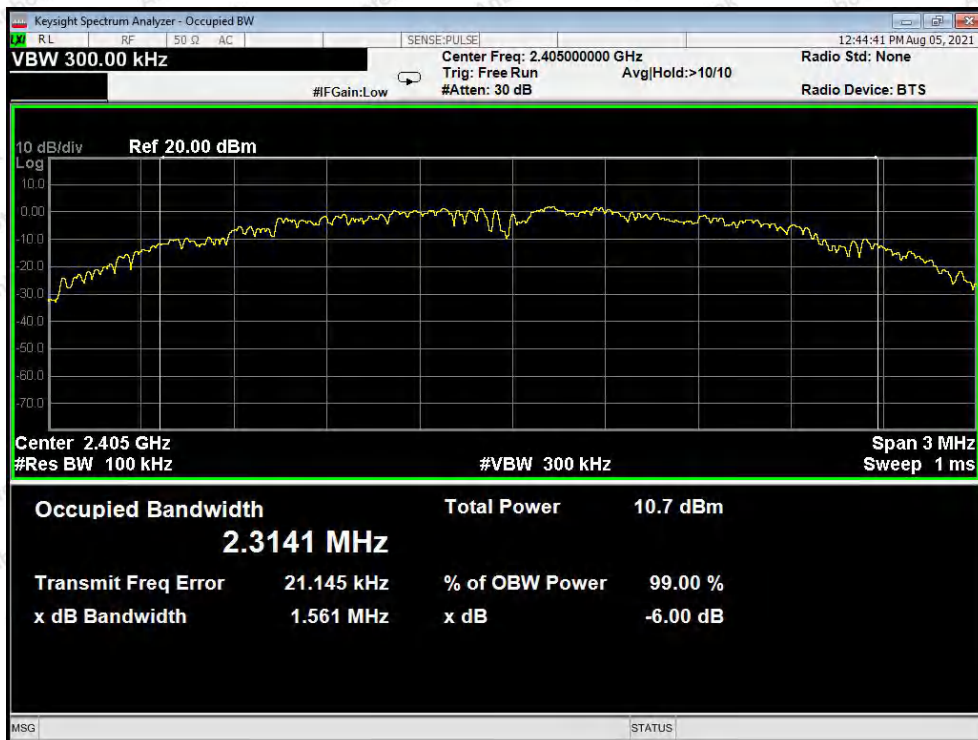

CH: Low

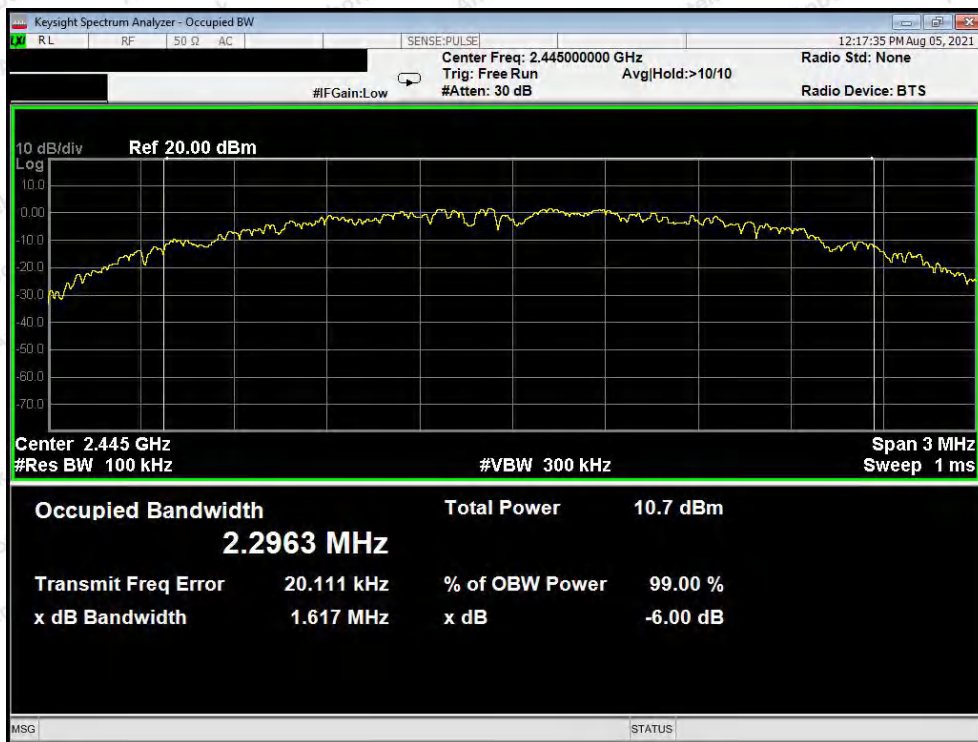

CH: Middle

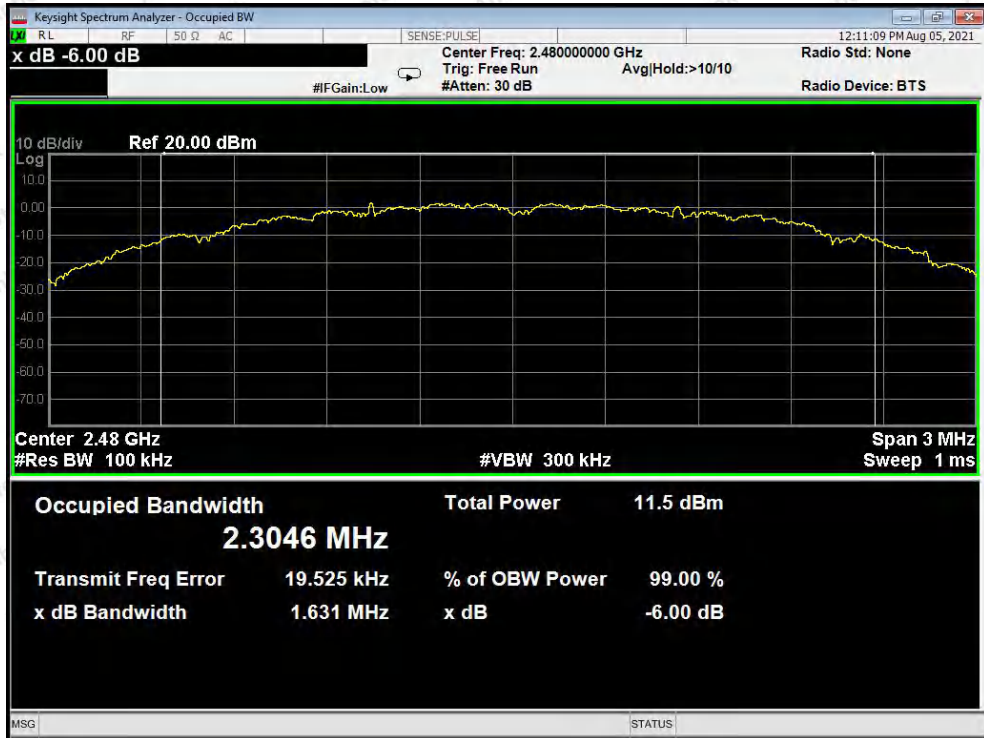


CH: High

## 7. Power Spectral Density Test

### 7.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (e)
Test Limit	8dBm/3KHz

### 7.2. Test Setup



### 7.3. Test Procedure


1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3kHz, VBW = 10kHz, Span = 1.5xDTSS BW
3. Record the max. reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

### 7.4. Test Data


Test Item	: Power Spectral Density	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 7.2V Battery inside	Temperature	: 23.5°C
Test Result	: PASS	Humidity	: 54%RH

Channel	Frequency (MHz)	PSD (dBm/3KHz)	Limit (dBm/3KHz)	Results
Low	2405	-4.377	8.00	PASS
Middle	2445	-3.770	8.00	PASS
High	2480	-4.300	8.00	PASS




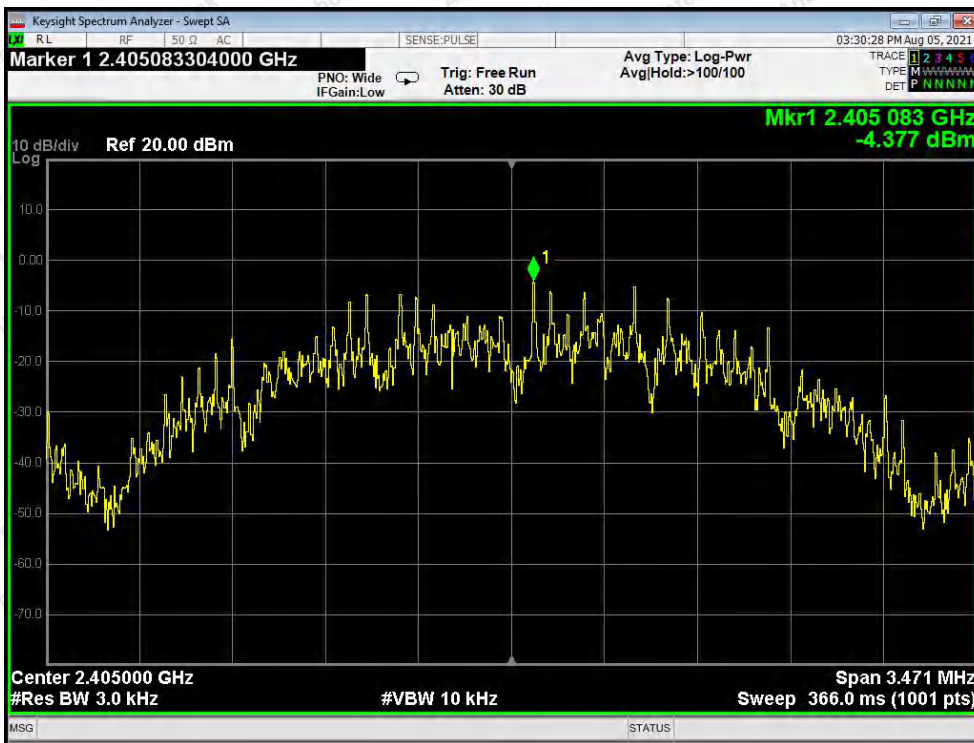

CH: Low

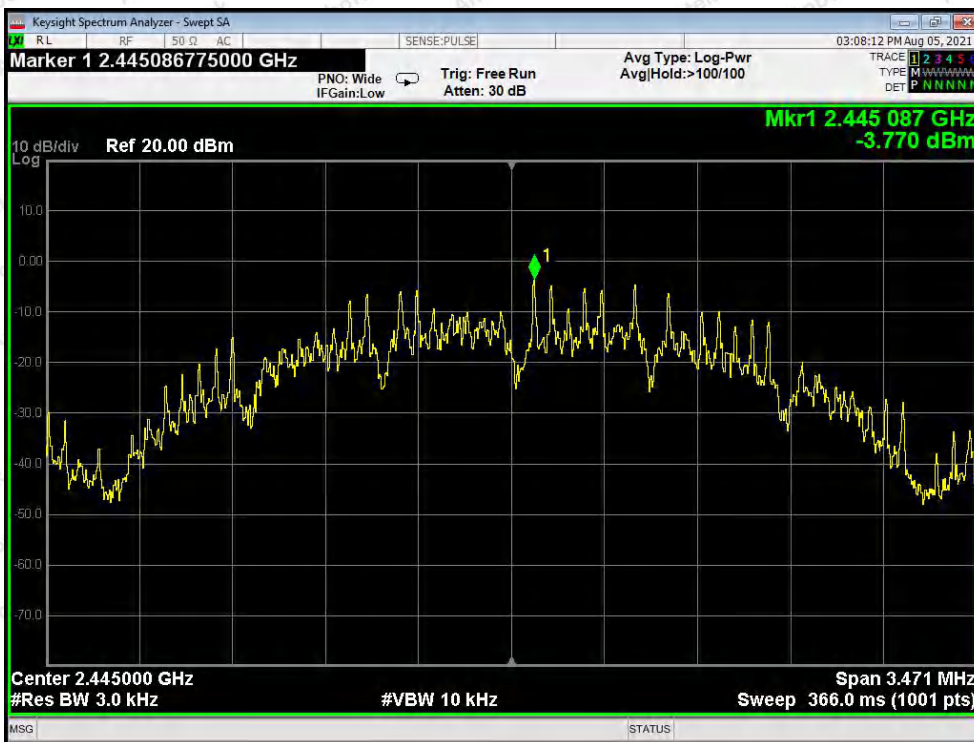

CH: Middle

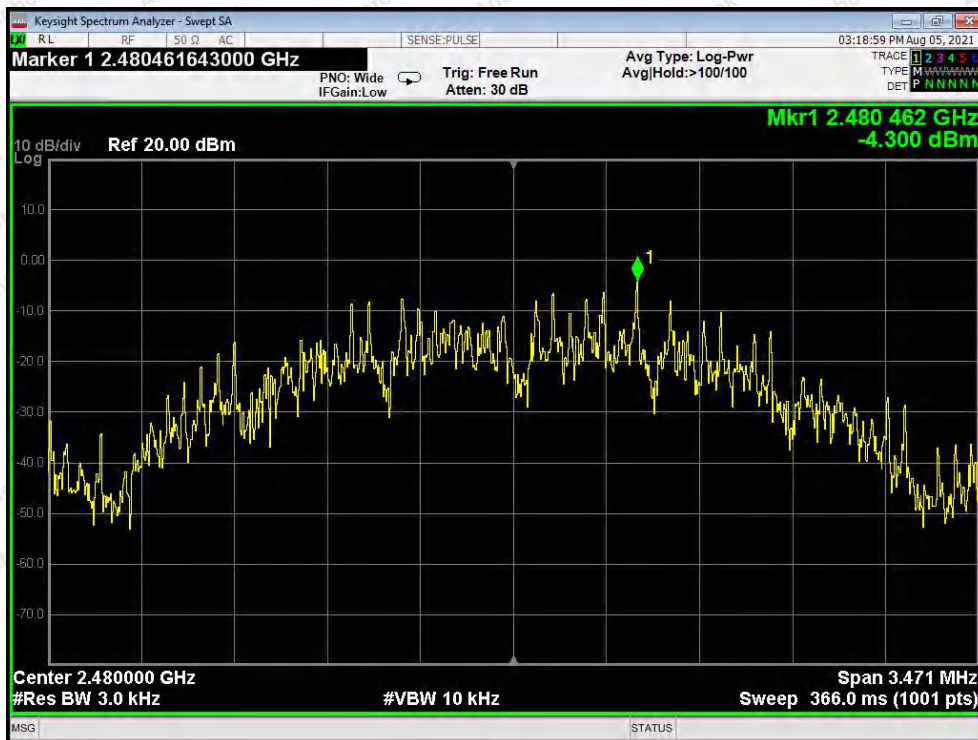


CH: High

## 8. 100kHz Bandwidth of Frequency Band Edge Requirement

### 8.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in15.209(a).

### 8.2. Test Setup




### 8.3. Test Procedure

Using the following spectrum analyzer setting:

1. Set the RBW = 100KHz.
2. Set the VBW = 300KHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

### 8.4. Test Data

Test Item	: Band edge	Test Mode	: CH Low ~ CH High
Test Voltage	: DC 7.2V Battery inside	Temperature	: 23.5°C
Test Result	: PASS	Humidity	: 54%RH

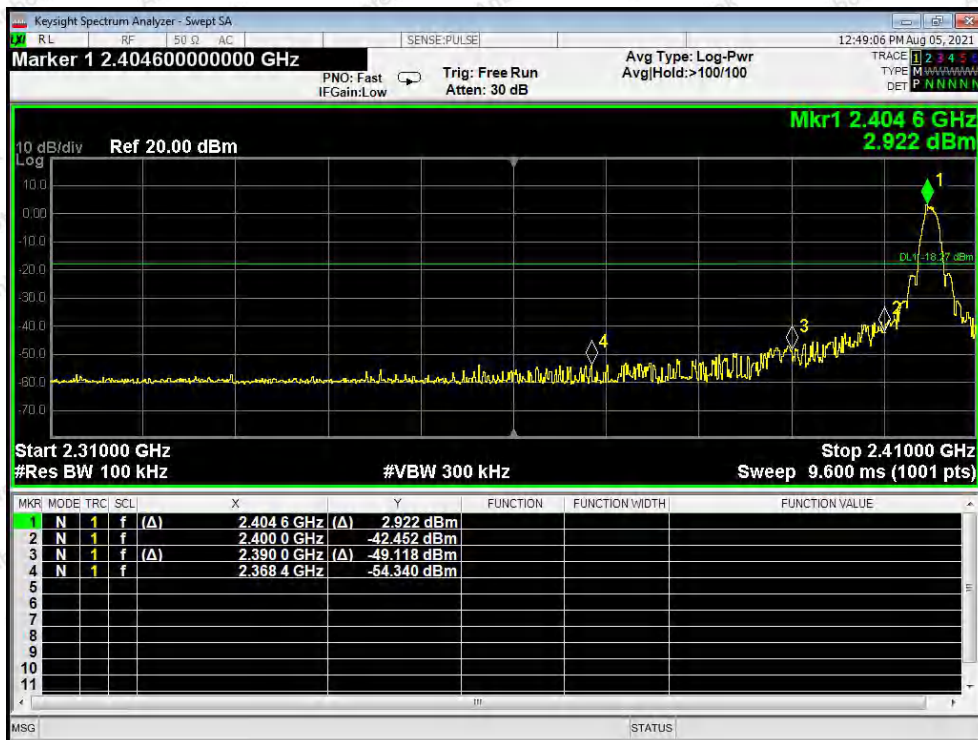


CH: Low




CH: High


Conducted Emission Method

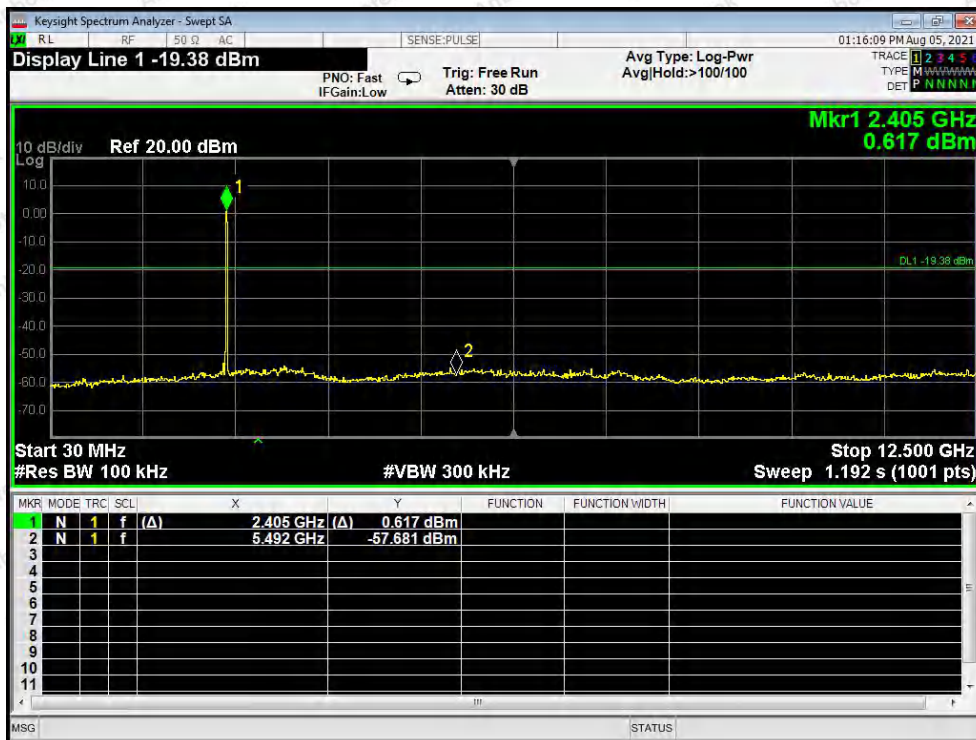

CH: Low

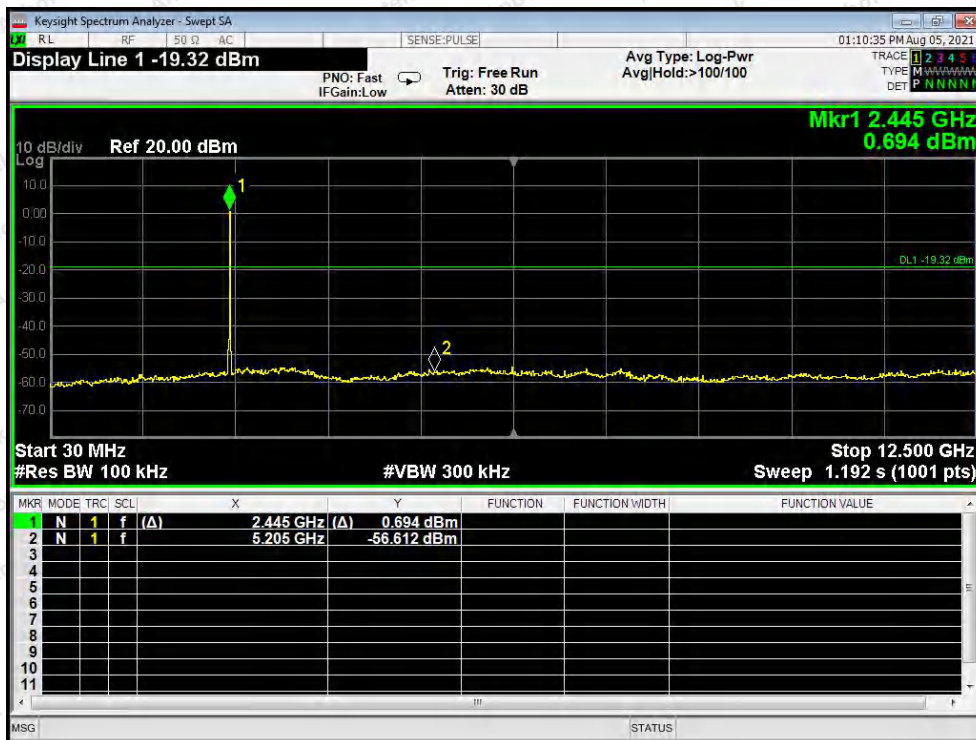

CH: Middle

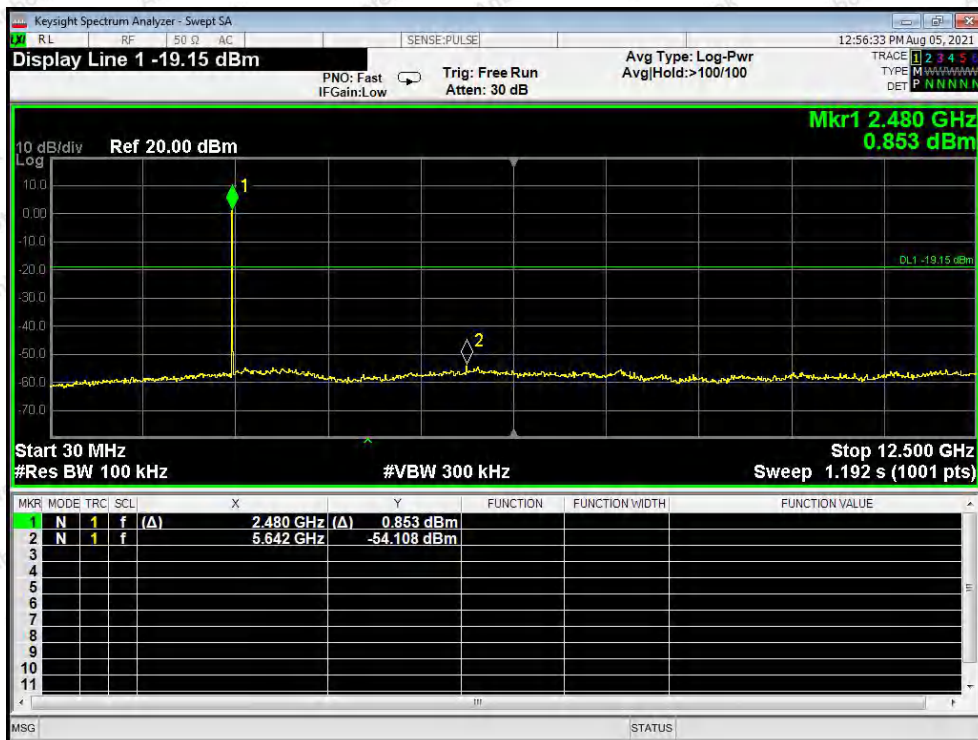

CH: High

## 9. Antenna Requirement

### 9.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	<p>1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.</p>

### 9.2. Antenna Connected Construction

The antenna is a FPC Antenna which permanently attached, and the best case gain of the antenna is 4 dBi . It complies with the standard requirement.

## APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement



Photo of Radiation Emission Test









## APPENDIX II -- EXTERNAL PHOTOGRAPH








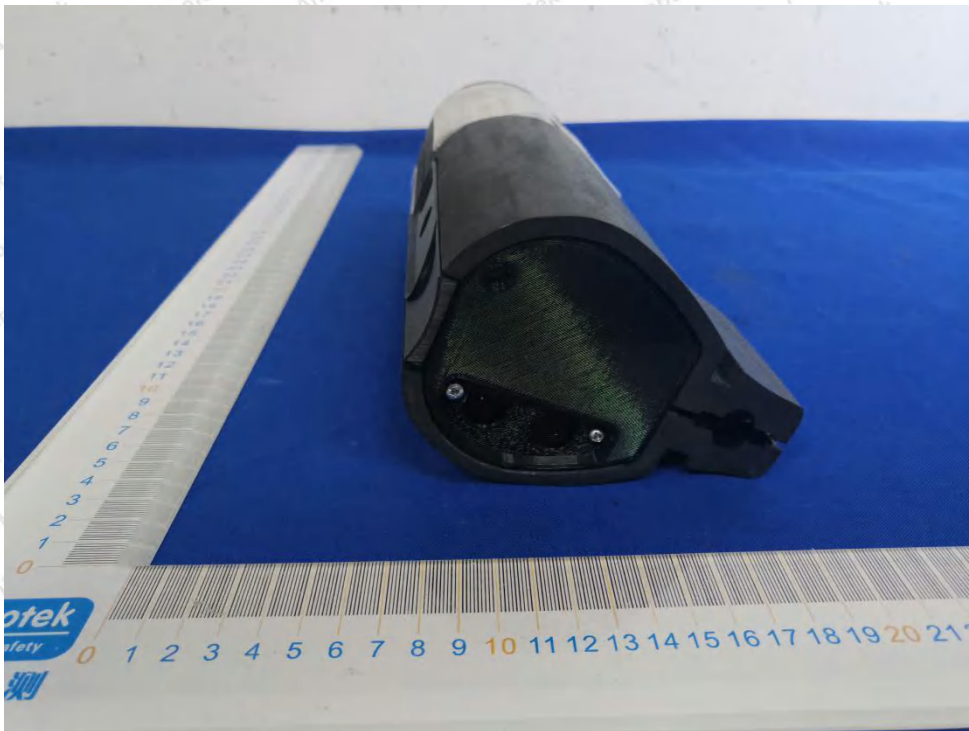



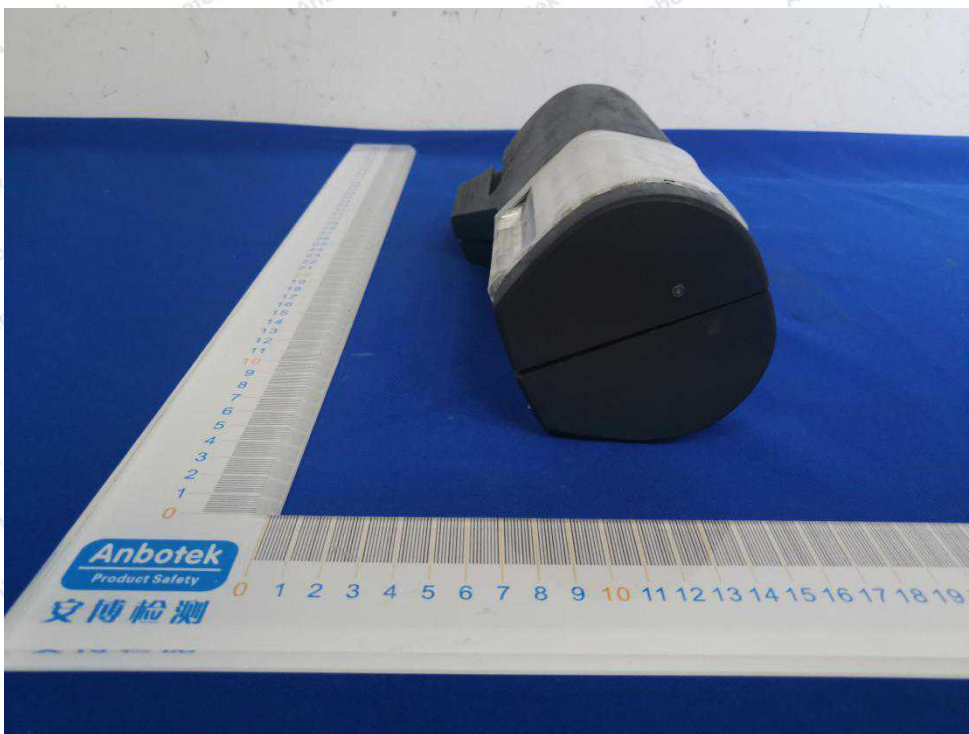


### APPENDIX III -- INTERNAL PHOTOGRAPH

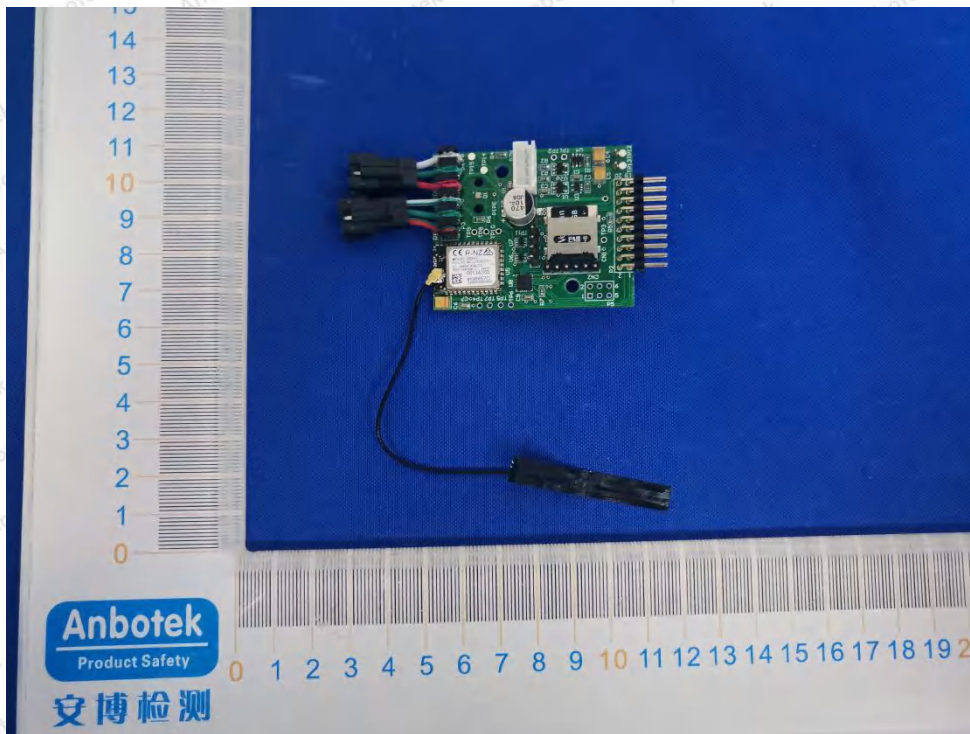
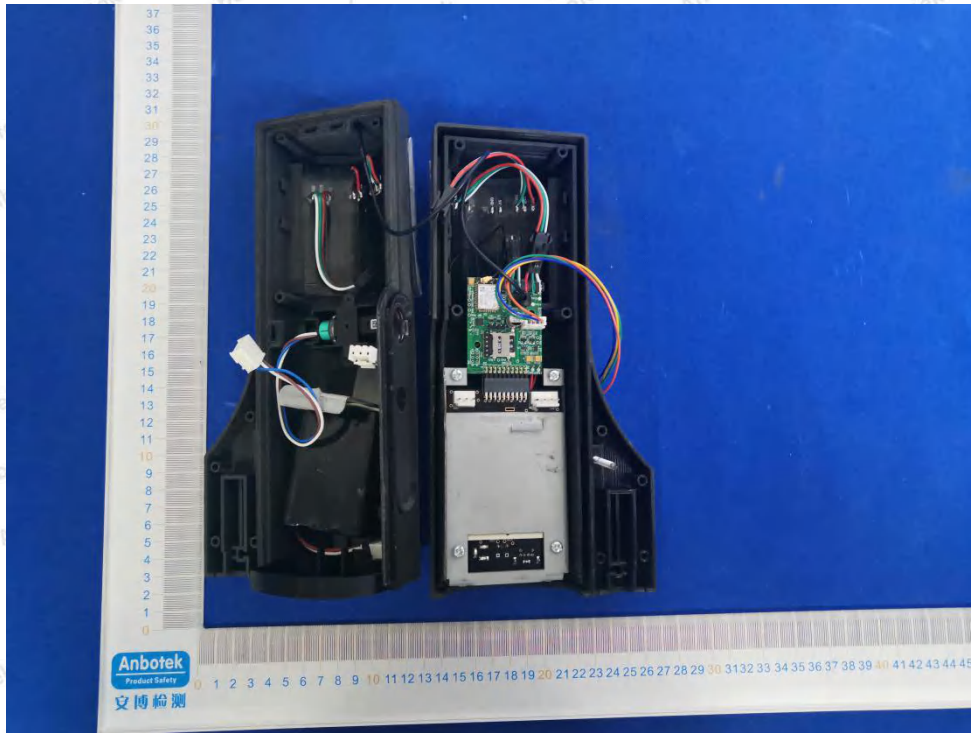




ANT

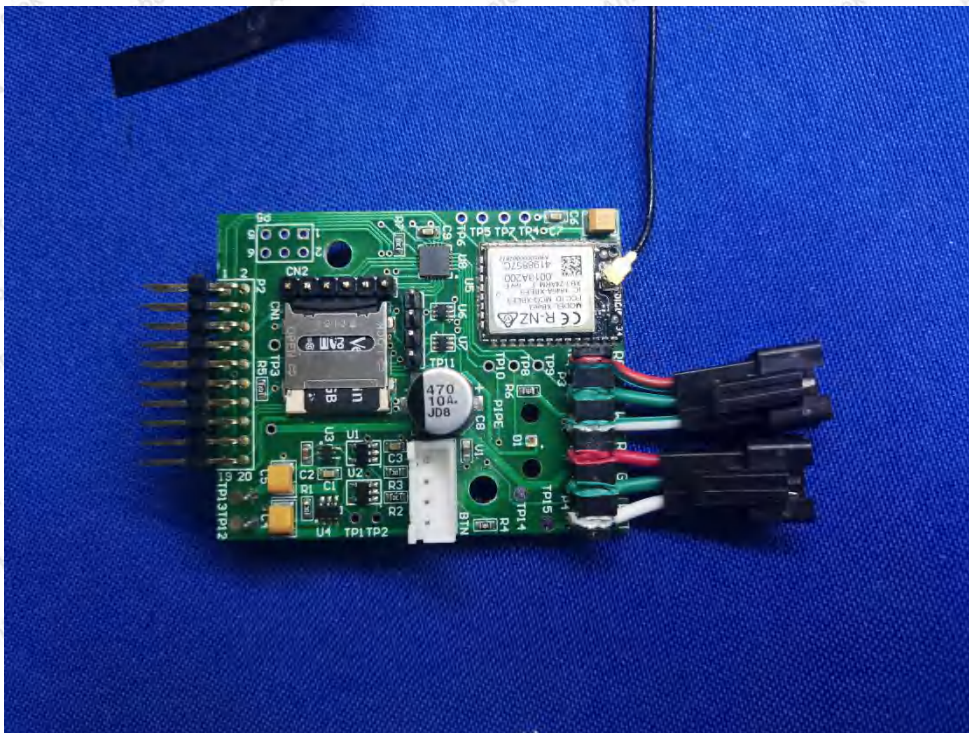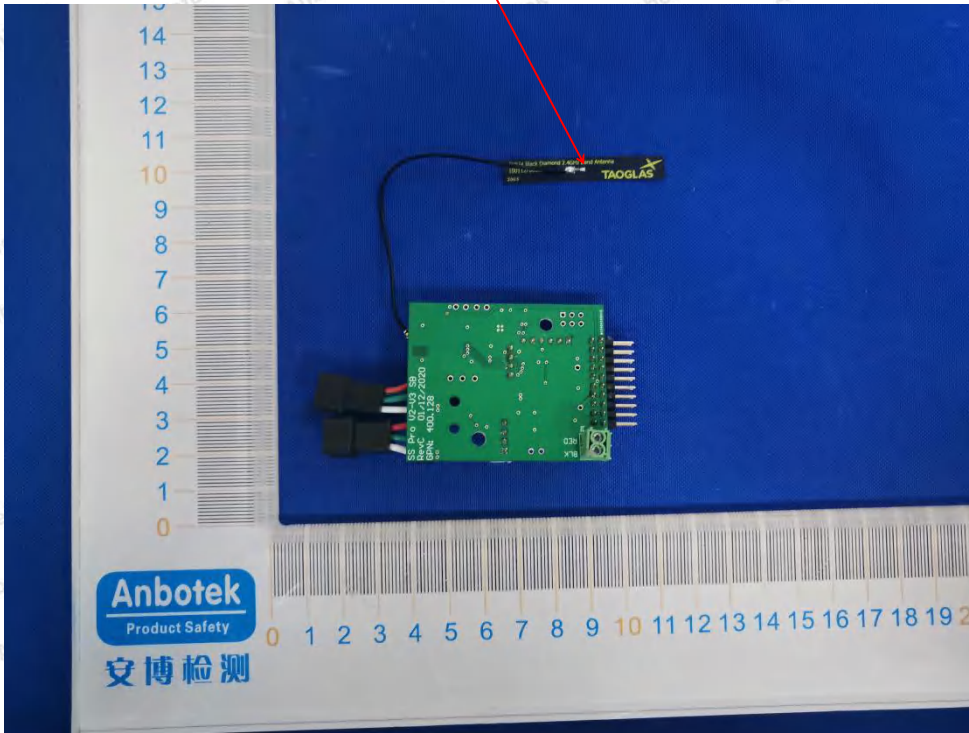

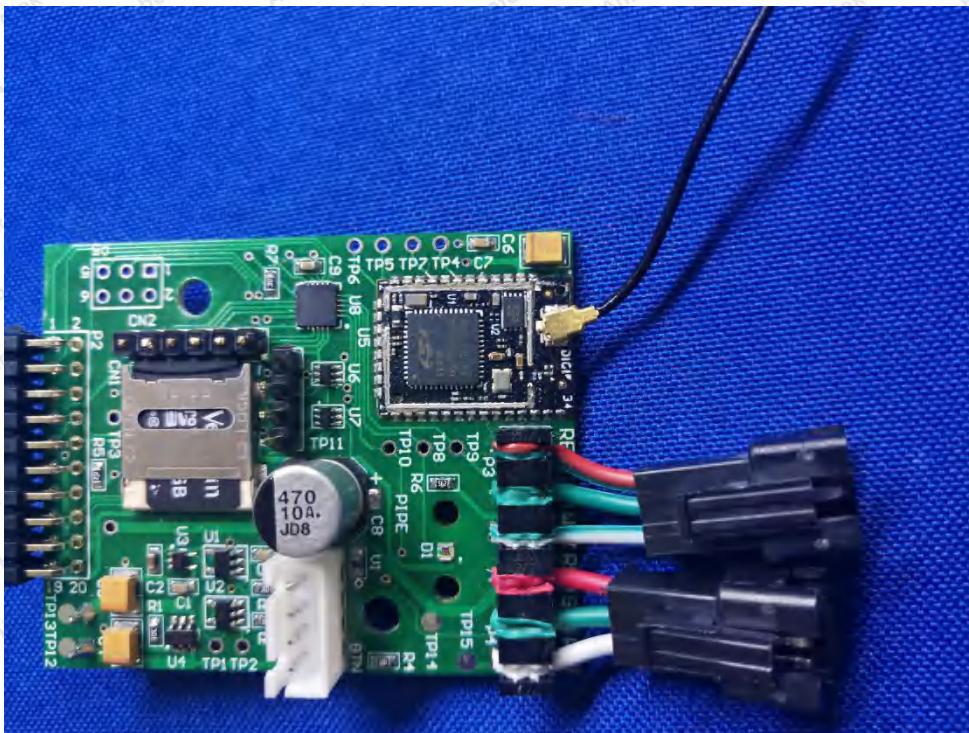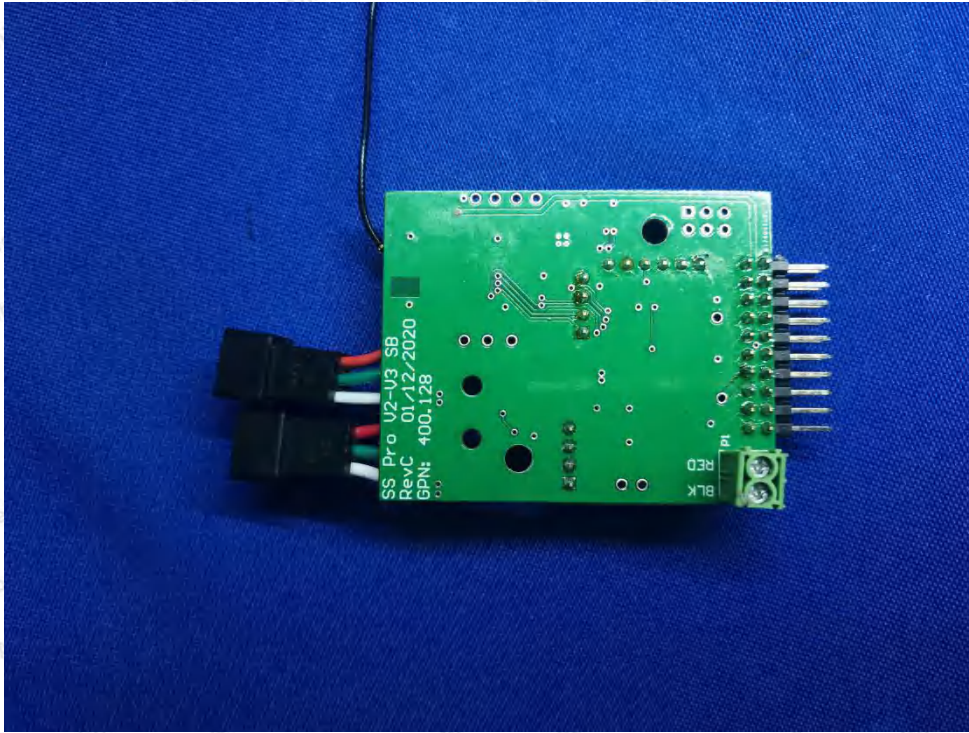



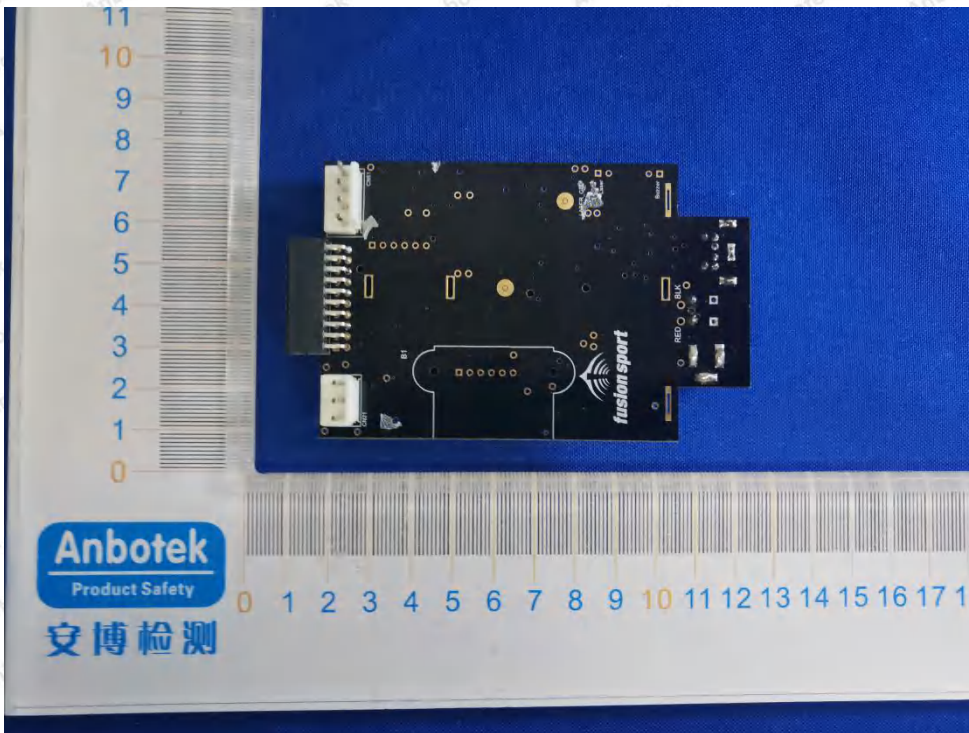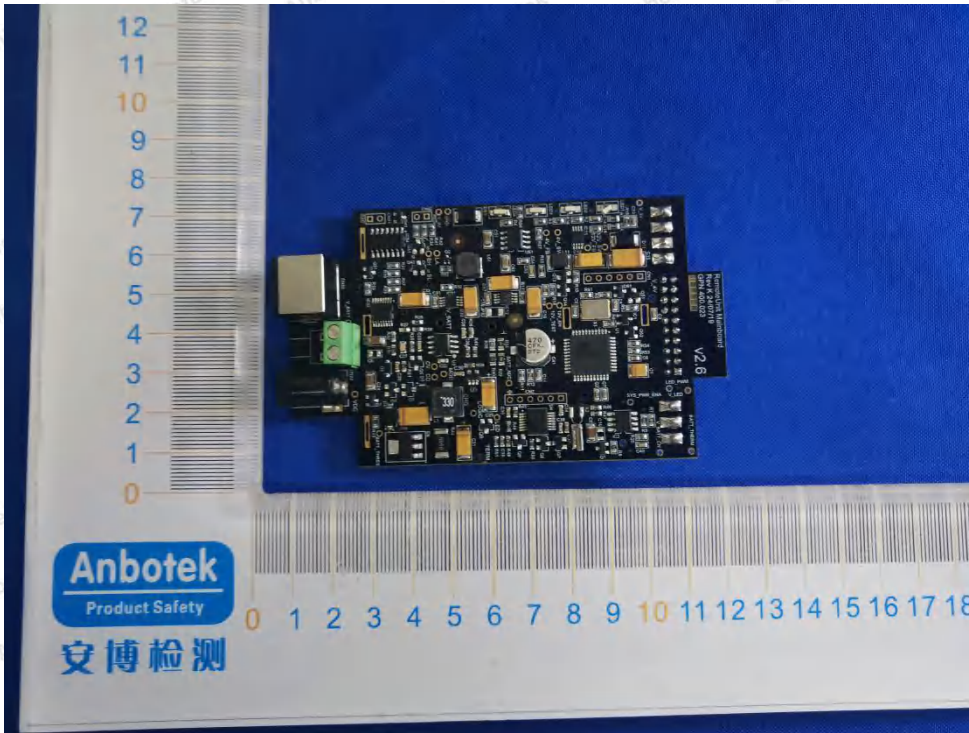

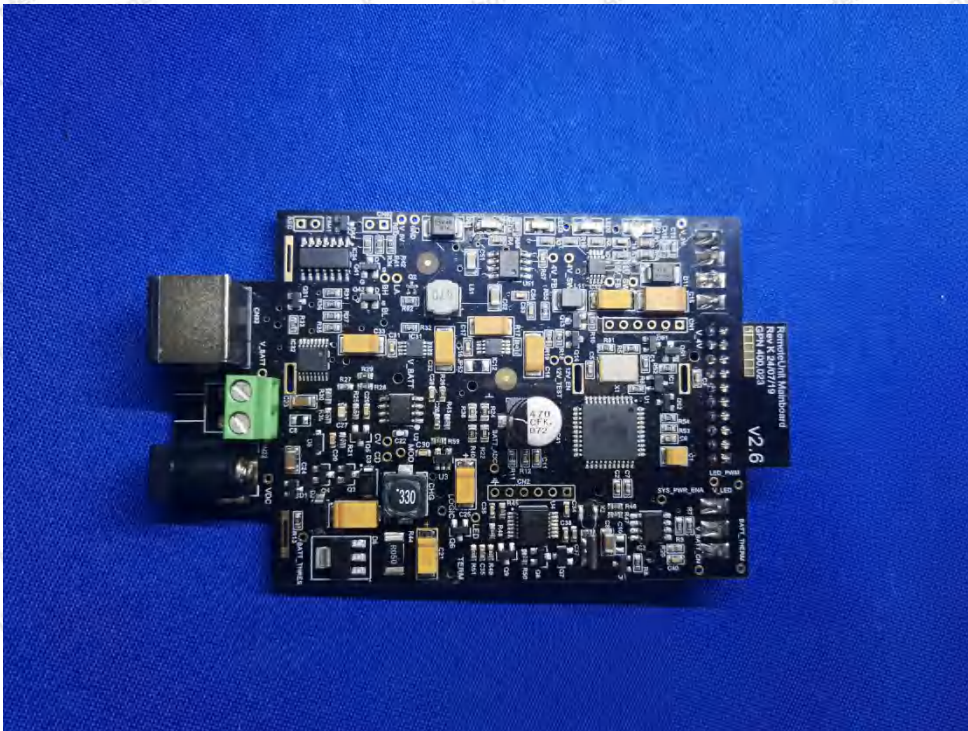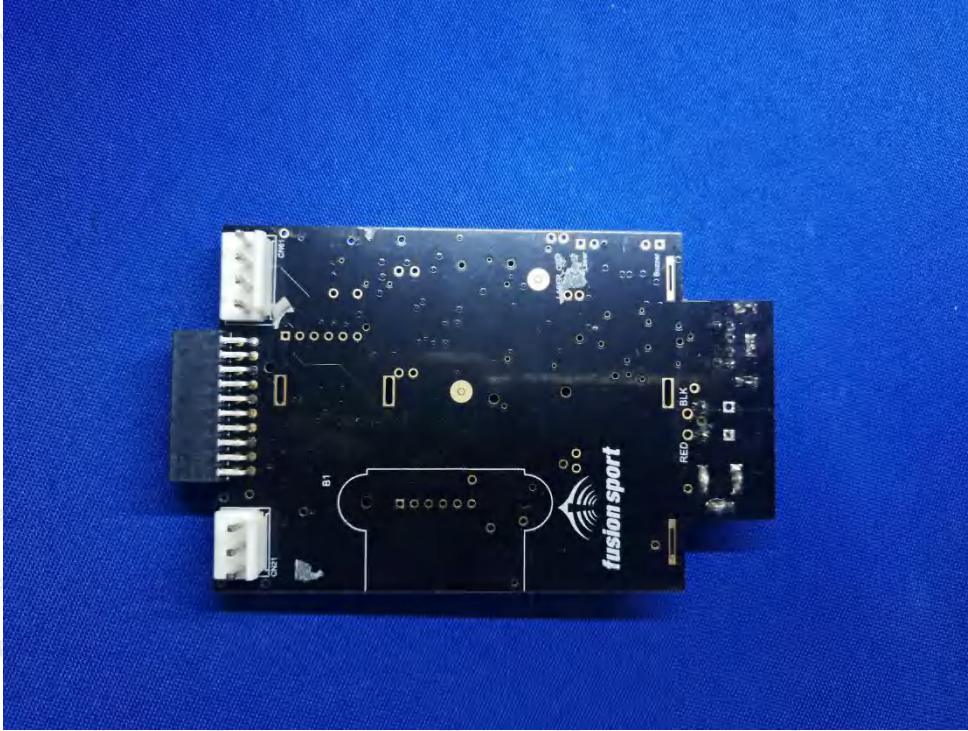



----- End of Report -----