



FCC PART 95  
MEASUREMENT AND TEST REPORT

For

**Shenzhen Jizhida Technology Co., Ltd**

1902E.,BLDG.C6,HENGFENG IND. CITY,NO.739,ZHOUSHI RD.,HEZHOU  
COMMUNITY,BAOAN DIST.,SHENZHEN,CHINA

**FCC ID: 2AQJJ628**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Walkie Talkie (FRS)
<b>Report Number:</b>	RGMA190712001-00A
<b>Report Date:</b>	2019-07-31
<b>Reviewed By:</b>	Xiangguang Kong <i>Xiangguang Kong</i> Engineer
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

**Note:** This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government. \* This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “\*”.

The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity.

**TABLE OF CONTENTS**

**GENERAL INFORMATION.....3**

    PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....3

    OBJECTIVE .....3

    RELATED SUBMITTAL(S)/GRANT(S).....3

    TEST METHODOLOGY .....3

    MEASUREMENT UNCERTAINTY .....4

    TEST FACILITY .....4

**SYSTEM TEST CONFIGURATION .....5**

    DESCRIPTION OF TEST CONFIGURATION .....5

    DESCRIPTION OF CHANNEL LIST .....5

    EQUIPMENT MODIFICATIONS .....5

    SUPPORT EQUIPMENT LIST AND DETAILS .....5

    BLOCK DIAGRAM OF TEST SETUP .....6

**SUMMARY OF TEST RESULTS .....7**

**TEST EQUIPMENT LIST .....8**

**FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION .....9**

    APPLICABLE STANDARD .....9

    TEST RESULT .....9

**FCC §95.587(b)(1) – ANTENNA REQUIREMENT .....10**

    APPLICABLE STANDARD .....10

    ANTENNA CONNECTOR CONSTRUCTION .....10

**FCC §2.1046 & §95.567 - RF OUTPUT POWER.....11**

    APPLICABLE STANDARD .....11

    TEST PROCEDURE .....11

    TEST DATA .....11

**FCC §2.1047 & §95.575 - MODULATION CHARACTERISTIC.....12**

    APPLICABLE STANDARD .....12

    TEST PROCEDURE .....12

    TEST DATA .....12

**FCC §2.1049 & §95.573 - AUTHORIZED BANDWIDTH AND EMISSION MASK.....23**

    APPLICABLE STANDARD .....23

    TEST PROCEDURE .....23

    TEST DATA .....23

**FCC §2.1053 & §95.579- RADIATED SPURIOUS EMISSION .....27**

    APPLICABLE STANDARD .....27

    TEST PROCEDURE .....27

    TEST DATA .....27

**FCC §2.1055 (d) & §95.565 - FREQUENCY STABILITY .....29**

    APPLICABLE STANDARD .....29

    TEST PROCEDURE .....29

    TEST DATA .....29

## GENERAL INFORMATION

### Product Description for Equipment Under Test (EUT)

Product	Walkie Talkie (FRS)
Tested Model	H-628
Multiple Model <sup>#</sup>	CR628
Frequency Range	FRS: 462.5500-467.7125 MHz
Transmit Power	20.42 dBm
Testing Bandwidth	9.776kHz
Modulation Technique	FM
Antenna Specification	Integrated Antenna
Voltage Range	DC 1.5V*3 AA battery
Date of Test	2019-07-19~2019-07-30
Sample serial number	190712001
Received date	2019-07-12
Sample/EUT Status	Good condition

*Notes: This series products model: CR628 and H-628 are electrically identical. Model H-628 was selected for fully testing, the detailed information can be referred to the declaration which was stated and guaranteed by the manufacturer.*

### Objective

This report is prepared on behalf of *Shenzhen Jizhida Technology Co., Ltd* in accordance with Part 2 and Part 95, Subpart A & Subpart B of the Federal Communication Commissions rules.

### Related Submittal(s)/Grant(s)

No related Submittal(s)

### Test Methodology

All tests and measurements indicated in this document were performed in accordance with Part 95 Subpart A, Subpart B of the Federal Communication Commissions rules with TIA-603-D, Land Mobile FM or PM-Communications Equipment-Measurement and Performance Standards.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		±5%
RF Output Power with Power meter		±0.73dB
RF conducted test with spectrum		±1.6dB
Emissions, Radiated	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB
Temperature		±1 °C
Humidity		±6%
Supply voltages		±0.4%

*Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 342867, the FCC Designation No. : CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

### Description of Channel List

#### FRS:

Channel No.	Channel Frequency (MHz)	Channel No.	Channel Frequency (MHz)
1	462.5625	12	467.6625
2	462.5875	13	467.6875
3	462.6125	14	467.7125
4	462.6375	15	462.5500
5	462.6625	16	462.5750
6	462.6875	17	462.6000
7	462.7125	18	462.6250
8	467.5625	19	462.6500
9	467.5875	20	462.6750
10	467.6125	21	462.7000
11	467.6375	22	462.7250


### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

**Block Diagram of Test Setup**

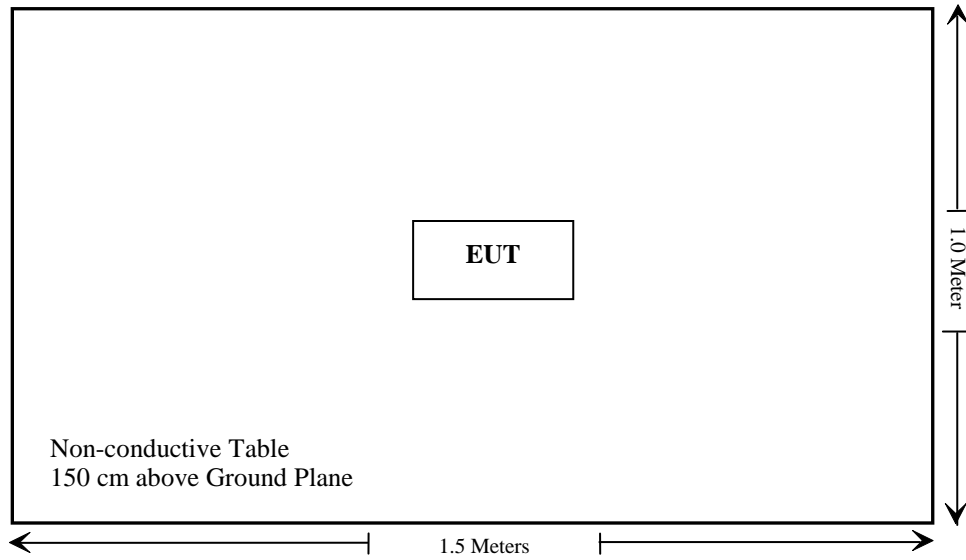

**SUMMARY OF TEST RESULTS**

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Results</b>
§1.1307, §2.1093	RF Exposure (SAR)	Compliance*
§95.587(b)(1)	Antenna Requirement	Compliance
§2.1046, §95.567	RF Output Power	Compliance
§2.1047, §95.575	Modulation Characteristic	Compliance
§2.1049, §95.573	Authorized Bandwidth & Emission Mask	Compliance
§2.1053, §95.579	Spurious Radiated Emissions	Compliance
§2.1055(d), §95.565	Frequency Stability	Compliance

Compliance\*: Please refer to SAR report released by BACL, report number: RGMA190712001-20.

**TEST EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Radiated Emission Test</b>					
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-22	2020-12-21
Rohde & Schwarz	Signal Analyzer	FSEM	845987/005	2019-07-22	2020-07-21
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017-12-22	2020-12-21
COM-POWER	Pre-amplifier	PA-122	181919	2018-11-12	2019-11-12
Sonoma Instrument	Amplifier	310N	186238	2018-11-12	2019-11-12
Agilent	Signal Generator	N5183A	MY51040755	2018-12-03	2019-12-03
COM POWER	Dipole Antenna	AD-100	41000	NCR	NCR
A.H. System	Horn Antenna	SAS-200/571	135	2018-09-01	2021-08-31
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2019-07-09	2020-07-08
UTiFLEX MICRO-COAX	RF Cable	UFA147A-2362-100100	MFR64639 231029-003	2018-11-12	2019-11-12
Ducommun Technologies	RF Cable	104PEA	218124002	2018-11-12	2019-11-12
Ducommun Technologies	RF Cable	RG-214	1	2019-05-21	2019-11-19
Ducommun technologies	RF Cable	RG-214	2	2018-11-12	2019-11-12
<b>RF Conducted test</b>					
WEINSCHEL	10dB Attenuator	5324	N/A	Each Time	
HP Agilent	RF Communication Test Set	8920B	3325U00859	2019-01-15	2020-01-15
HP	Microwave frequency counter	5343A	2232A00827	2016-08-29	2019-08-29
Fluke	Digital Multimeter	287	19000011	2019-04-12	2020-04-12
ESPEC	Temperature & Humidity Chamber	EL-10KA	9107726	2019-01-05	2020-01-05
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR
Ducommun Technologies	RF Cable	RG-214	3	Each Time	

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).



---

## **FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION**

---

### **Applicable Standard**

FCC§1.1310 and §2.1093.

### **Test Result**

Compliance, please refer to the SAR report: RGMA190712001-20.

---

## **FCC §95.587(b)(1) – ANTENNA REQUIREMENT**

---

### **Applicable Standard**

According to FCC §95.587, (b) Antenna. The antenna of each FRS transmitter type must meet the following requirements.

(1) The antenna must be a non-removable integral part of the FRS transmitter type.

### **Antenna Connector Construction**

The EUT has an integral antenna arrangement, fulfill the requirement of this section. Please refer to the EUT photos.

**Result:** Compliance.

## FCC §2.1046 & §95.567 - RF OUTPUT POWER

### Applicable Standard

Per FCC §2.1046, and §95.567, Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does not exceed 0.5 Watts and the ERP on channels 1 through 7 and 15 through 22 does not exceed 2.0 Watts.

### Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the emissions were measured by the substitution.

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	24 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

The testing was performed by Andy Yu on 2019-07-19.

Test Mode: Transmitting

Indicated		Table Angle Degree	Test Ant.		Substituted			Absolute Level (dBm)	ERP (mW)	Limit (mw)
Frequency (MHz)	S.A. Reading (dBµV)		Height (m)	Polar (H/V)	Substituted level (dBm)	Cable Loss (dB)	Ant. Gain (dB)			
462.6375MHz FRS High Power										
462.6375	77.59	167	1.4	H	9.1	1.28	0.0	7.82	6.05	2000
462.6375	86.12	280	1.6	V	21.7	1.28	0.0	20.42	110.15	2000
462.6375MHz FRS Low Power										
462.6375	69.34	90	2.3	H	0.8	1.28	0.0	-0.48	0.90	2000
462.6375	78.14	305	1.2	V	13.7	1.28	0.0	12.42	17.46	2000
467.6375MHz										
467.6375	71.64	178	1.5	H	3.1	1.28	0.0	1.82	1.52	500
467.6375	79.17	278	1.4	V	14.7	1.28	0.0	13.42	21.98	500

**Test Result:** Compliance.

## **FCC §2.1047 & §95.575 - MODULATION CHARACTERISTIC**

### **Applicable Standard**

Per FCC §2.1047 and §95.575: Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

### **Test Procedure**

Test Method: TIA/EIA-603-D

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	24 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by James Fu on 2019-07-24.*


Please refer to the following tables and plots.

*Test Mode: Transmitting*

**MODULATION LIMITING**

Carrier Frequency: 462.6375MHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	0.526	0.057	0.477	0.038	2.5
400	0.795	0.076	0.770	0.067	2.5
500	1.258	0.092	1.246	0.073	2.5
600	1.557	0.104	1.544	0.081	2.5
700	1.539	0.115	1.523	0.098	2.5
800	1.689	0.145	1.670	0.131	2.5
900	1.790	0.159	1.759	0.137	2.5
1000	1.868	0.184	1.844	0.171	2.5
1200	1.998	0.230	1.971	0.219	2.5
1400	2.038	0.275	2.015	0.267	2.5
1600	2.046	0.320	2.005	0.310	2.5
1800	2.031	0.339	2.006	0.315	2.5
2000	2.038	0.398	2.012	0.386	2.5
2100	2.024	0.415	1.992	0.410	2.5
2200	2.034	0.423	1.995	0.416	2.5
2300	2.032	0.428	2.000	0.423	2.5
2400	2.038	0.462	2.017	0.437	2.5
2500	2.042	0.483	2.026	0.462	2.5
2600	2.053	0.494	2.022	0.491	2.5
2700	2.043	0.502	2.007	0.492	2.5
2800	2.038	0.513	1.995	0.497	2.5
2900	2.042	0.548	2.009	0.539	2.5
3000	2.021	0.533	2.007	0.525	2.5

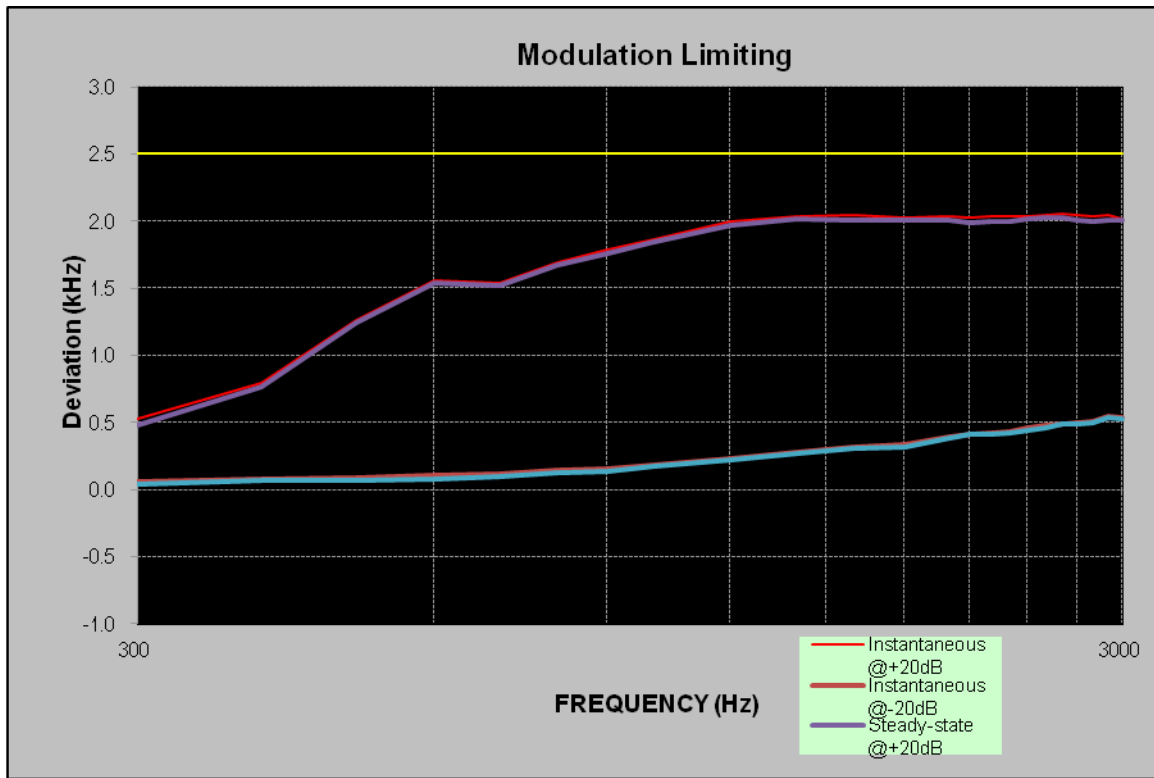

**Audio Frequency Response**

Carrier Frequency: 462.6375 MHz

<b>Audio Frequency (Hz)</b>	<b>Response Attenuation (dB)</b>
300	-15.70
400	-11.97
500	-8.05
600	-6.60
700	-5.01
800	-3.12
900	-1.35
1000	0
1200	2.44
1400	3.71
1600	4.67
1800	5.13
2000	5.46
2100	6.81
2200	7.72
2300	8.14
2400	8.31
2500	8.89
2600	9.25
2700	9.44
2800	9.68
2900	10.16
3000	9.93

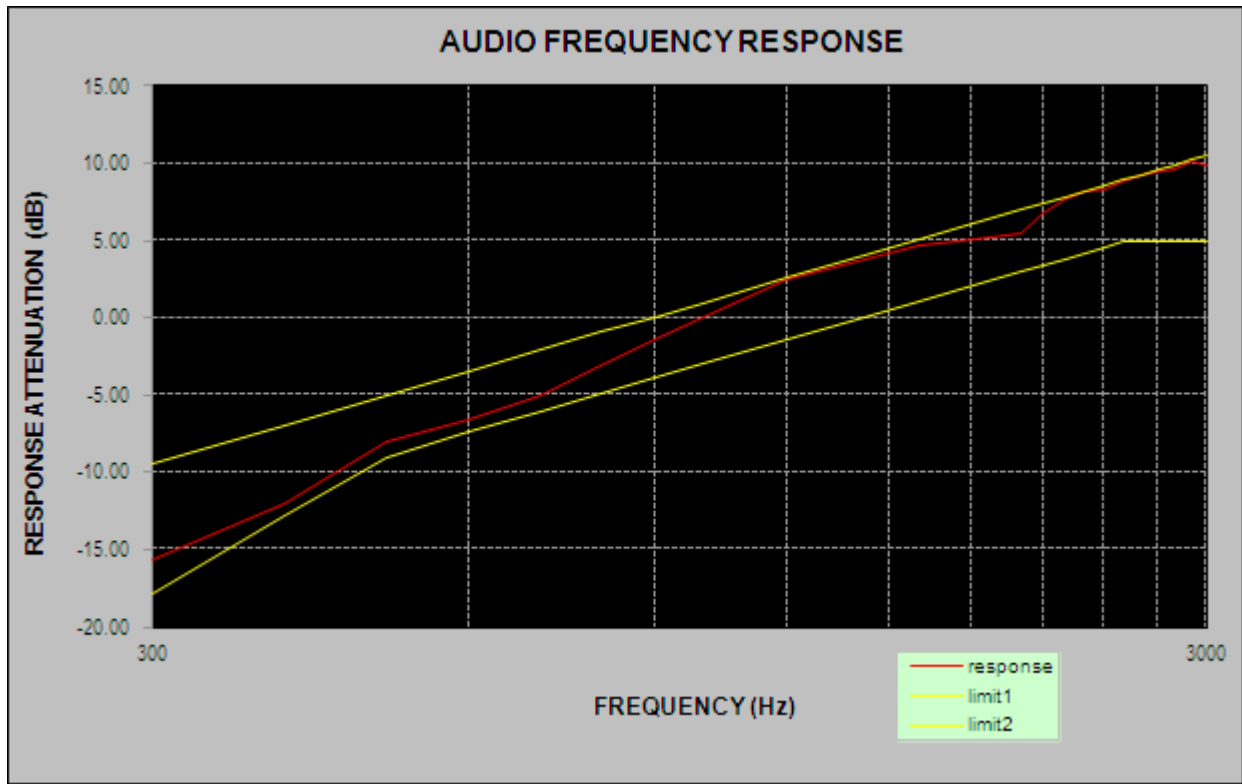




**Audio frequency lows pass filter response**

Carrier Frequency: 462.6375 MHz, Channel Separation=12.5 kHz


Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0.0	/
3.0	-16.7	0.0
4.0	-71.2	-12.5
5.0	-82.4	-22.2
6.0	-83.6	-30.1
7.0	-83.5	-36.8
8.0	-84.2	-42.6
9.0	-85.3	-47.7
10.0	-86.8	-52.3
12.0	-88.3	-60.2
14.0	-91.2	-66.9
16.0	-92.6	-72.7
18.0	-93.5	-77.8
20.0	-95.4	-82.5

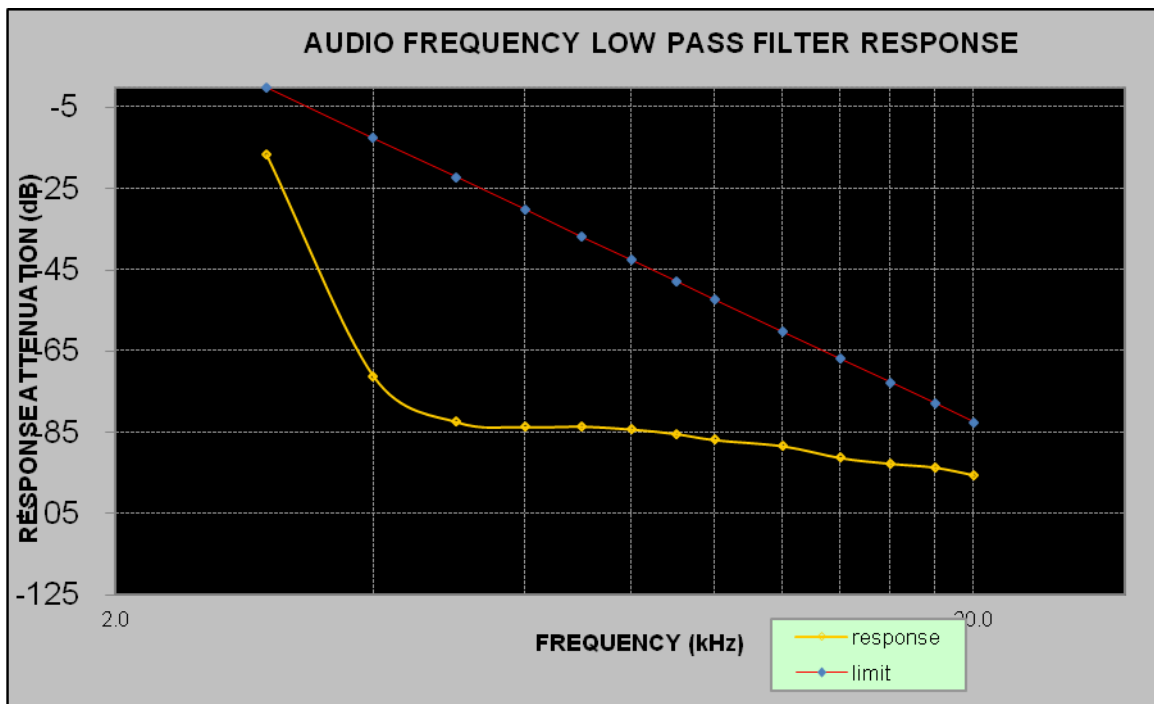

**MODULATION LIMITING**

Carrier Frequency: 467.6375MHz


Audio Frequency (Hz)	Instantaneous		Steady-state		FCC Limit [kHz]
	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	DEVIATION (@+20dB) [kHz]	DEVIATION (@-20dB) [kHz]	
300	0.528	0.045	0.518	0.035	2.5
400	0.804	0.087	0.780	0.074	2.5
500	1.239	0.096	1.209	0.091	2.5
600	1.538	0.101	1.521	0.093	2.5
700	1.536	0.113	1.527	0.085	2.5
800	1.667	0.143	1.640	0.143	2.5
900	1.786	0.136	1.759	0.134	2.5
1000	1.850	0.188	1.834	0.184	2.5
1200	2.001	0.236	1.996	0.233	2.5
1400	2.026	0.250	2.002	0.226	2.5
1600	2.046	0.319	2.039	0.298	2.5
1800	2.023	0.322	2.020	0.306	2.5
2000	2.044	0.399	2.044	0.397	2.5
2100	2.015	0.411	2.008	0.397	2.5
2200	2.043	0.425	2.030	0.424	2.5
2300	2.021	0.421	2.005	0.409	2.5
2400	2.036	0.448	2.012	0.433	2.5
2500	2.052	0.480	2.036	0.464	2.5
2600	2.048	0.486	2.033	0.473	2.5
2700	2.060	0.493	2.044	0.473	2.5
2800	2.032	0.516	2.022	0.514	2.5
2900	2.056	0.548	2.044	0.548	2.5
3000	2.019	0.534	1.998	0.528	2.5

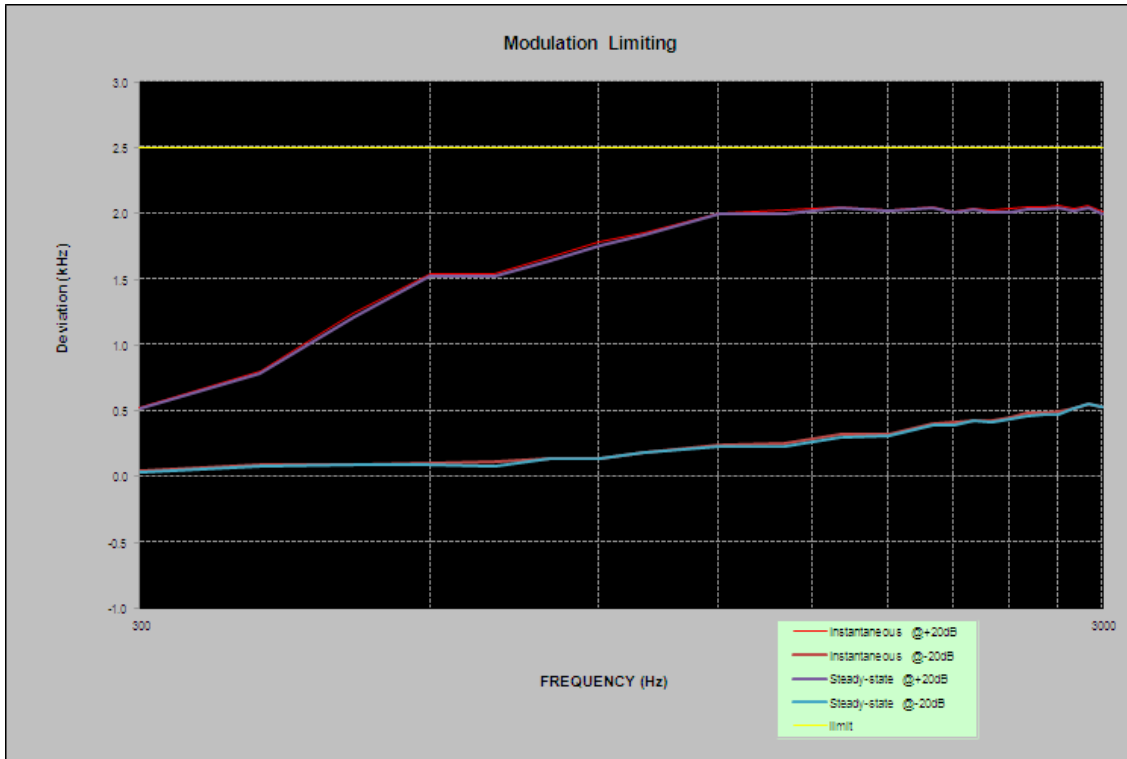

**Audio Frequency Response**

Carrier Frequency: 467.6375 MHz


<b>Audio Frequency (Hz)</b>	<b>Response Attenuation (dB)</b>
300	-14.61
400	-11.63
500	-7.74
600	-6.78
700	-5.16
800	-3.40
900	-1.31
1000	0
1200	2.32
1400	3.59
1600	4.54
1800	5.21
2000	5.60
2100	6.52
2200	7.52
2300	7.86
2400	8.41
2500	8.83
2600	9.21
2700	9.48
2800	9.73
2900	10.09
3000	9.80

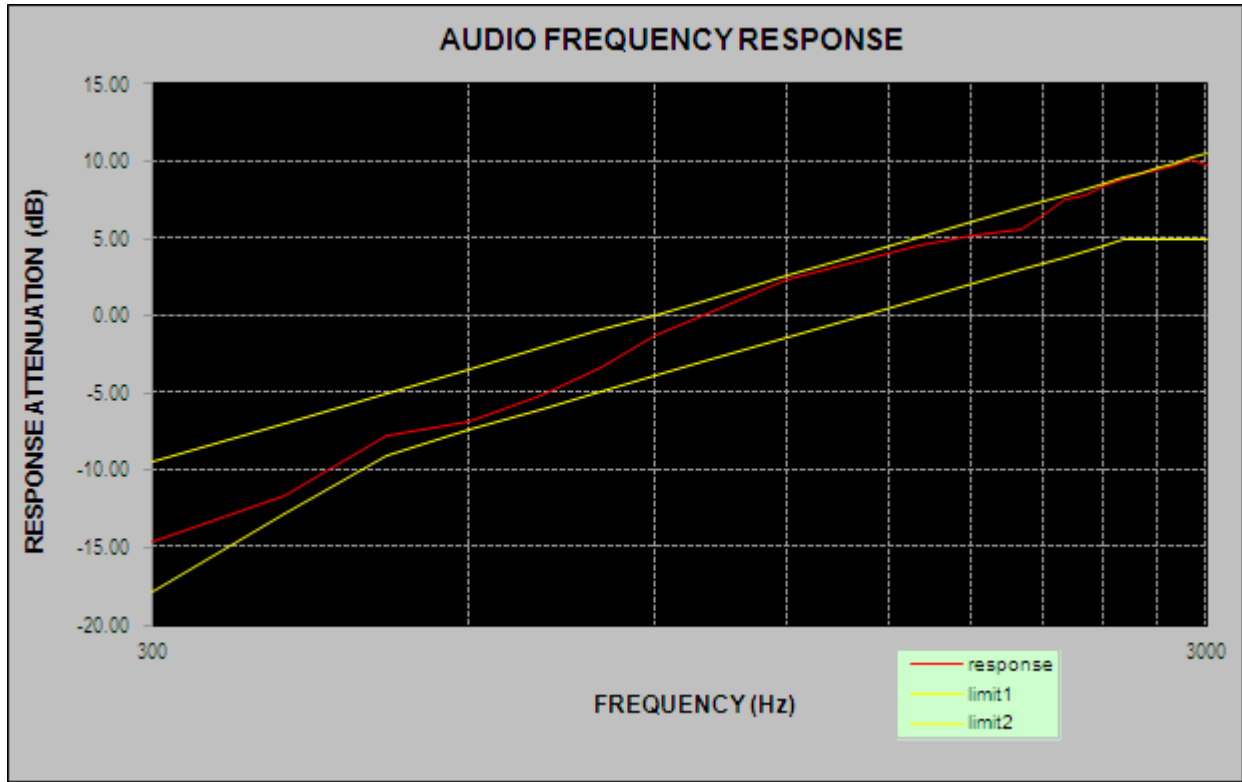

**Audio frequency lows pass filter response**

Carrier Frequency: 467.6375 MHz, Channel Separation=12.5 kHz

Audio Frequency (kHz)	Response Attenuation (dB)	Limit (dB)
1.0	0.0	/
3.0	-17.7	0.0
4.0	-69.2	-12.5
5.0	-83.0	-22.2
6.0	-83.5	-30.1
7.0	-83.7	-36.8
8.0	-84.5	-42.6
9.0	-85.1	-47.7
10.0	-86.2	-52.3
12.0	-87.9	-60.2
14.0	-88.8	-66.9
16.0	-91.5	-72.7
18.0	-92.6	-77.8
20.0	-94.3	-82.5

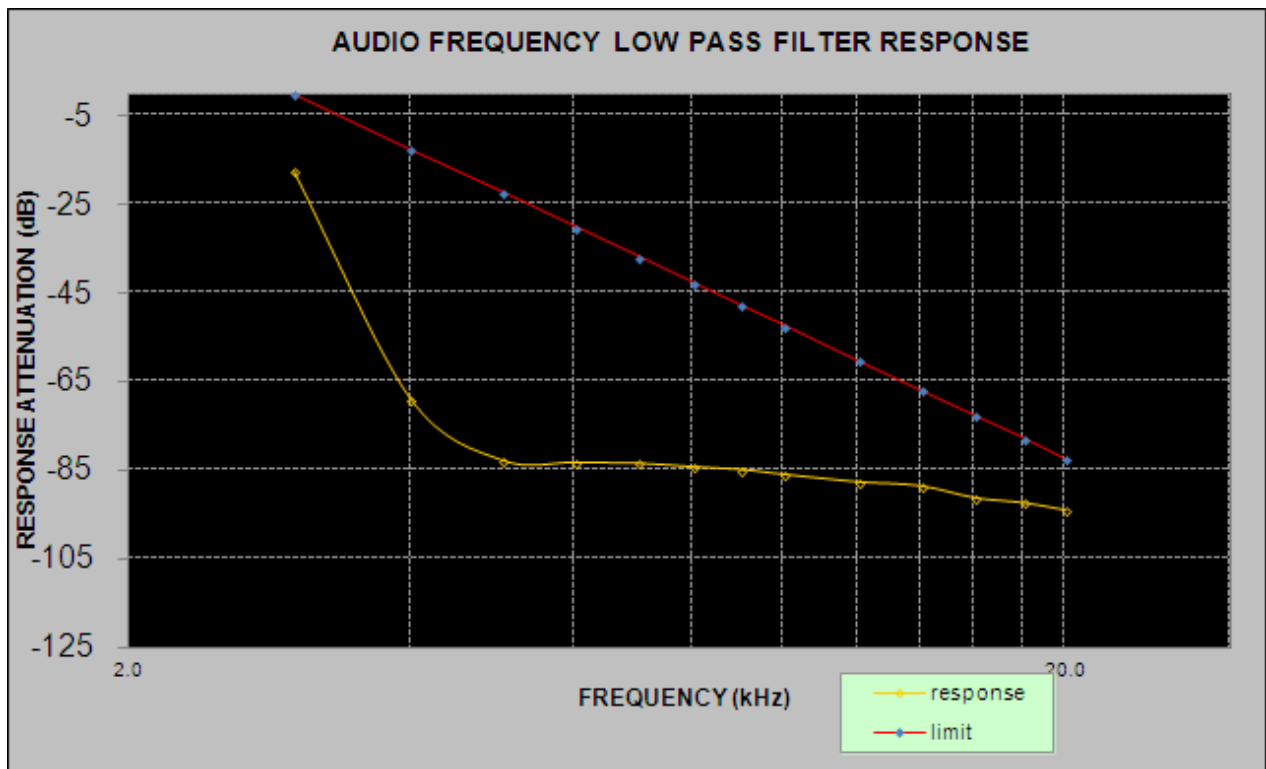

## FCC §2.1049 & §95.573 - AUTHOURIZED BANDWIDTH AND EMISSION MASK

### Applicable Standard

According to §95.573. Each FRS transmitter type must be designed such that the occupied bandwidth does not exceed 12.5 kHz.

### Test Procedure

TIA-603-D, section 2.2.11

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	24 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

The testing was performed by James Fu on 2019-07-30.


Test Mode: Transmitting

Frequency (MHz)	Power Level	OBW (kHz)	Limit (kHz)	Result
462.6375	High	9.776	12.5	Pass
	Low	9.776	12.5	Pass
467.6375	/	9.776	12.5	Pass

Emission Designator Per CFR 47 §2.201& §2.202&,  $B_n = 2M + 2D$  :


Emission Designator 11K0F3E In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation.  $BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \rightarrow 11K0$   
 F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

### OBW, 462.6375 MHz, High Power

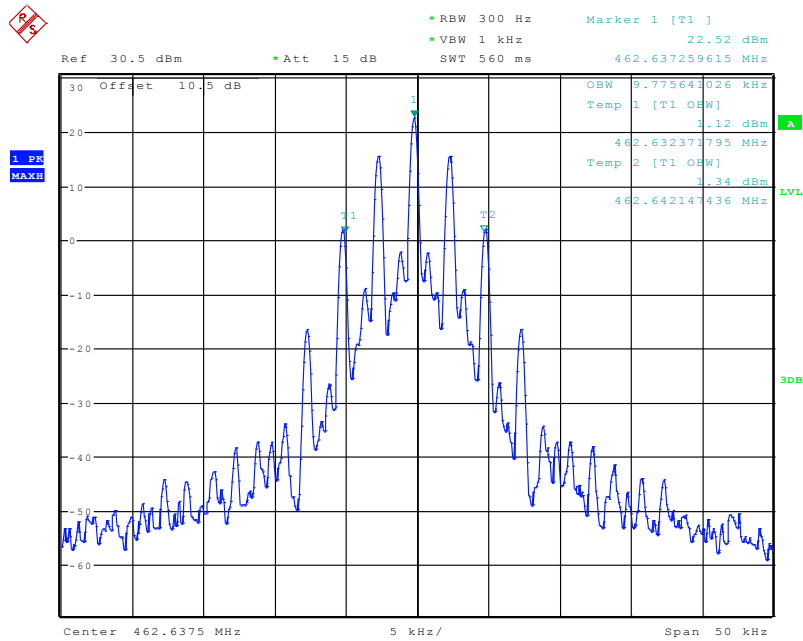

Date: 30.JUL.2019 16:15:17


### Emission Mask, 462.6375 MHz, High Power

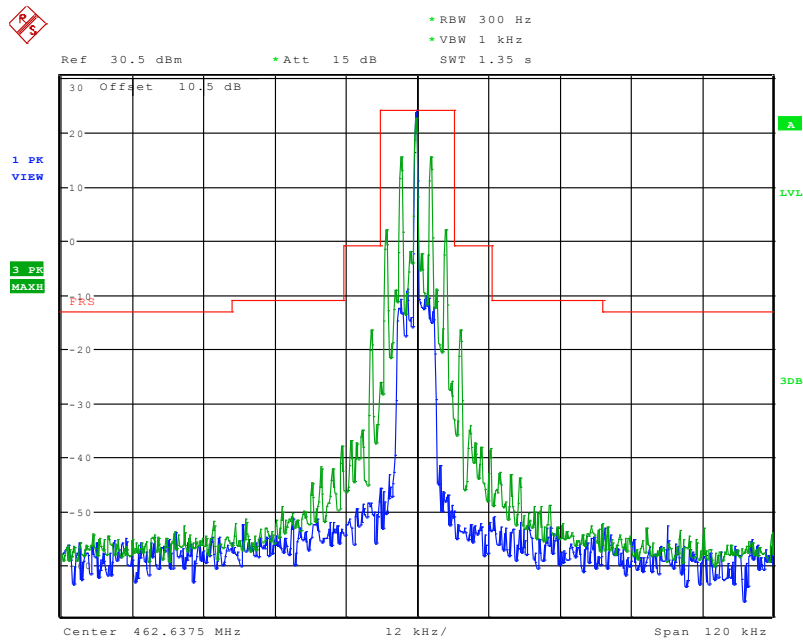

Date: 30.JUL.2019 16:19:41




### OBW, 462.6375 MHz, Low Power

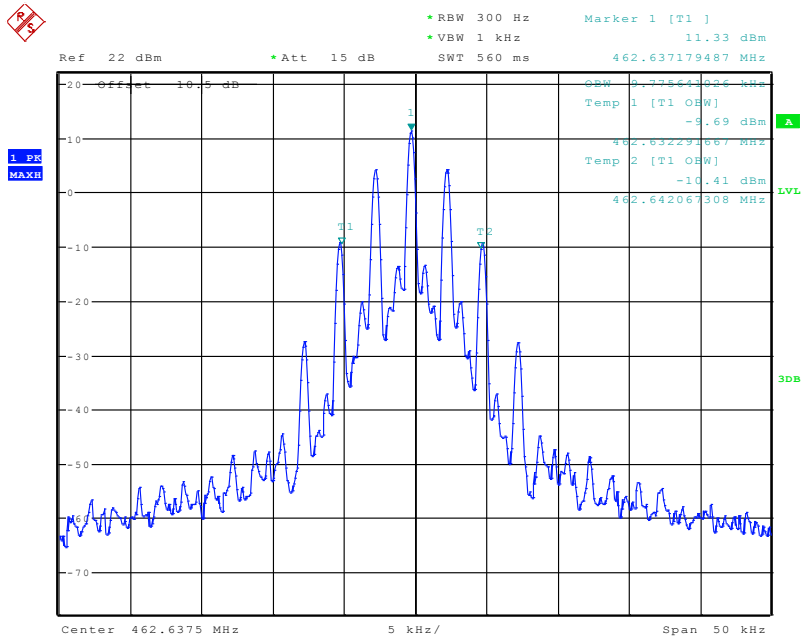


Date: 30.JUL.2019 16:12:55

### Emission Mask, 462.6375 MHz, Low Power

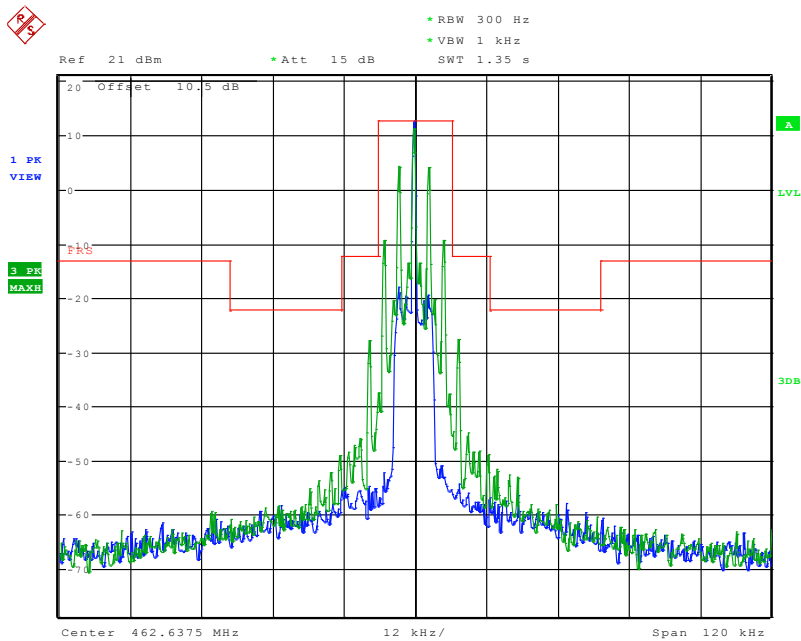


Date: 30.JUL.2019 16:22:42

### OBW, 467.6375 MHz,

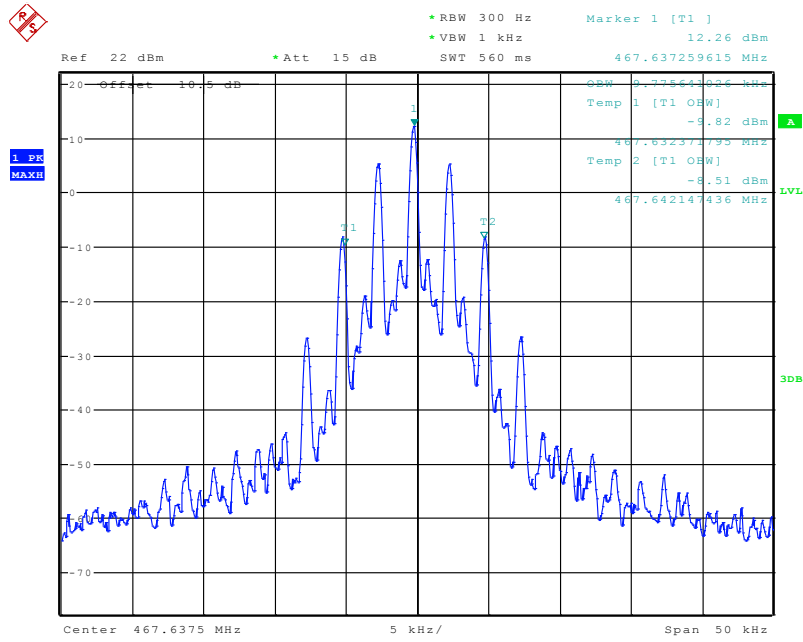

Date: 30.JUL.2019 16:16:00

### Emission Mask, 467.6375 MHz

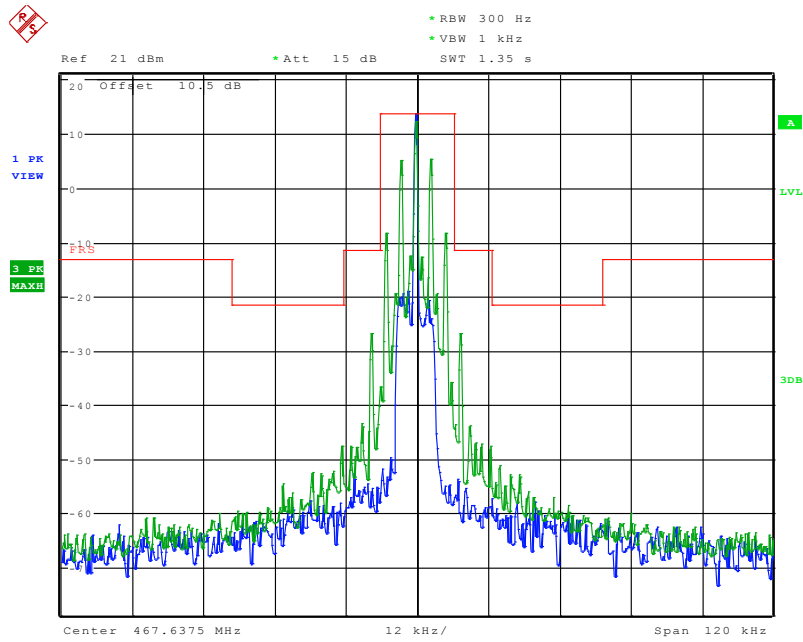

Date: 30.JUL.2019 16:24:40

## FCC §2.1053 & §95.579- RADIATED SPURIOUS EMISSION

### Applicable Standard

FCC §2.1053 and §95.579. Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

(a) *Attenuation requirements.* The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

- (1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- (3)  $43 + 10 \log (P)$  dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

(b) *Measurement bandwidths.* The power of unwanted emissions in the frequency bands specified in paragraphs (a)(1) and (2) of this section is measured with a reference bandwidth of 300 Hz. The power of unwanted emissions in the frequency range specified in paragraph (a)(3) is measured with a reference bandwidth of at least 30 kHz.

(c) *Measurement conditions.* The requirements in this section apply to each FRS transmitter type both with and without the connection of permitted attachments, such as an external speaker, microphone and/or power cord.

### Test Procedure

The transmitter was placed on a wooden turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB =  $10 \lg (\text{TXpwr in Watts}/0.001)$ -the absolute level  
Spurious attenuation limit in dB =  $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

### Test Data

#### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	52 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Alan He on 2019-07-19.*

*Test Mode: Transmitting*

Indicated		Table Angle Degree	Test Antenna		Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Frequency (MHz)	Receiver Reading (dBuV)		Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)			
FRS 462.6375MHz High Power Level										
925.275	66.39	99	1.6	H	-31.8	1.09	0.0	-32.89	-13	19.89
925.275	77.19	270	1.6	V	-18.8	1.09	0.0	-19.89	-13	6.89
1387.80	68.24	206	1.4	H	-39.9	1.60	7.90	-33.60	-13	20.60
1387.80	68.34	193	1.2	V	-40.1	1.60	7.90	-33.80	-13	20.80
1850.40	77.92	298	1.5	H	-25.2	1.30	9.40	-17.10	-13	4.10
1850.40	77.90	20	2.4	V	-25.4	1.30	9.40	-17.30	-13	4.30
2313.00	68.34	45	2.1	H	-36.9	1.30	10.00	-28.20	-13	15.20
2313.00	69.49	219	1.2	V	-35.7	1.30	10.00	-27.00	-13	14.00
2775.60	63.36	52	1.8	H	-40.6	1.80	10.50	-31.90	-13	18.90
2775.60	65.29	48	2.1	V	-38.3	1.80	10.50	-29.60	-13	16.60
3238.20	61.08	93	1.1	H	-39.6	1.60	11.50	-29.70	-13	16.70
3238.20	62.99	131	1.1	V	-37.9	1.60	11.50	-28.00	-13	15.00
3700.80	57.56	140	1.1	H	-44.5	1.60	11.90	-34.20	-13	21.20
3700.80	57.74	220	2.5	V	-43.8	1.60	11.90	-33.50	-13	20.50
4626.00	56.30	139	1.6	H	-44.6	1.60	12.00	-34.20	-13	21.20
4626.00	57.20	268	1.4	V	-42.6	1.60	12.00	-32.20	-13	19.20
FRS 467.6375MHz										
935.275	67.84	167	1.4	H	-32.2	1.08	0.0	-33.28	-13	20.28
935.275	76.78	293	1.6	V	-21.0	1.08	0.0	-22.08	-13	9.08
1402.80	65.18	353	1.1	H	-43.0	1.60	7.90	-36.70	-13	23.70
1402.80	64.76	91	2.5	V	-43.7	1.60	7.90	-37.40	-13	24.40
1870.40	65.15	235	1.0	H	-37.9	1.30	9.40	-29.80	-13	16.80
1870.40	63.85	176	1.9	V	-39.5	1.30	9.40	-31.40	-13	18.40
2338.00	64.54	259	2.1	H	-40.7	1.30	10.00	-32.00	-13	19.00
2338.00	64.13	25	1.8	V	-41.0	1.30	10.00	-32.30	-13	19.30
2805.60	61.80	164	2.1	H	-42.2	1.80	10.50	-33.50	-13	20.50
2805.60	61.28	75	2.3	V	-42.3	1.80	10.50	-33.60	-13	20.60
3273.20	59.62	282	1.2	H	-41.3	1.50	11.70	-31.10	-13	18.10
3273.20	58.74	352	1.2	V	-42.2	1.50	11.70	-32.00	-13	19.00
3740.80	58.43	11	2.5	H	-43.7	1.60	11.90	-33.40	-13	20.40
3740.80	57.26	351	1.9	V	-44.2	1.60	11.90	-33.90	-13	20.90
4208.40	52.36	96	2.5	H	-49.6	1.50	11.80	-39.30	-13	26.30
4208.40	51.54	262	1.4	V	-49.6	1.50	11.80	-39.30	-13	26.30

**Note:**

- 1) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 2) Margin = Limit- Absolute Level

## **FCC §2.1055 (d) & §95.565 - FREQUENCY STABILITY**

### **Applicable Standard**

According to FCC §2.1055(a) (1), the frequency stability shall be measured with variation of ambient temperature from -30 °C to +50 °C, and according to FCC 2.1055(d) (2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC §95.565, Each FRS transmitter type must be designed such that the carrier frequencies remain within ±2.5 parts-per-million of the channel center frequencies specified in §95.563 during normal operating conditions.

### **Test Procedure**

**Frequency Stability vs. Temperature:** The equipment under test was connected to an external DC power supply and the RF output was connected to a Frequency Counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Frequency Counter.

**Frequency Stability vs. Voltage** (item 1 or item 2 will be chosen according to different condition) :

1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

The output frequency was recorded for each voltage.

### **Test Data**

#### **Environmental Conditions**

<b>Temperature:</b>	24 °C
<b>Relative Humidity:</b>	50 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by James Fu on 2019-07-19.*

*Test Mode: Transmitting*

**FRS**

Reference Frequency: 462.6375 MHz, Limit: ±2.5 ppm			
Environment Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Measurement Frequency (MHz)	Frequency Error (ppm)
Frequency Stability Ver. Temperature			
50	4.5	462.637568	0.15
40	4.5	462.637607	0.23
30	4.5	462.637375	-0.27
20	4.5	462.637897	0.86
10	4.5	462.637481	-0.04
0	4.5	462.636717	-1.69
-10	4.5	462.638345	1.83
-20	4.5	462.636985	-1.11
-30	4.5	462.637566	0.14
Frequency Stability Ver. Input Voltage			
20	4.0	462.636951	-1.19

Reference Frequency: 467.6375 MHz, Limit: ±2.5 ppm			
Environment Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Measurement Frequency (MHz)	Frequency Error (ppm)
Frequency Stability Ver. Temperature			
50	4.5	467.637606	0.23
40	4.5	467.637386	-0.24
30	4.5	467.637980	1.03
20	4.5	467.637988	1.04
10	4.5	467.637485	-0.03
0	4.5	467.636957	-1.16
-10	4.5	467.637850	0.75
-20	4.5	467.636620	-1.88
-30	4.5	467.637959	0.98
Frequency Stability Ver. Input Voltage			
20	4.0	467.638506	2.15

**\*\*\*\*\* END OF REPORT \*\*\*\*\***