

**COMPLIANCE WORLDWIDE INC.
TEST REPORT 210-18R1**

**In Accordance with the Requirements of
FCC PART 15.247, SUBPART C
Innovation, Science and Economic Development Canada
RSS-247, ISSUE 2**

**Low Power License-Exempt Radio Communication Devices
Intentional Radiators**


**Issued to
E Ink Corporation
1000 Technology Park Drive
Billerica, MA 01821
(617) 499-6041**

**for the
Prism Controller
Model ArC30
2.4 GHz Bluetooth Low Energy Radio**

**FCC ID: 2AQK2-ARC00301
IC: 3757A-ARC00301**

**Report Issued on May 11, 2018
Revised Report Issued on August 24, 2018**

Tested by


Brian F. Breault

Reviewed by


Larry K. Stillings

This test report shall not be reproduced, except in full, without written permission from Compliance Worldwide, Inc.

Table of Contents

1. Scope.....	3
2. Product Details.....	3
2.1 Manufacturer	3
2.2 Model Number	3
2.3 Serial Number.....	3
2.4 Description.....	3
2.5 Power Source	3
2.6 Hardware Revision	3
2.7 Software Revision.....	3
2.8 Modulation Type	3
2.9 Operating Frequency	3
2.10 EMC Modifications.....	3
3. Product Configuration	3
3.1 Operational Characteristics & Software	3
3.2 EUT Hardware	7
3.3 EUT Cables/Transducers	7
3.4 Support Equipment.....	7
3.5 Block Diagram	8
4. Measurements Parameters.....	8
4.1 Measurement Equipment Used to Perform Test.....	8
4.2 Measurement Software.....	9
4.3 Measurement & Equipment Setup.....	9
4.4 Measurement Procedures	9
4.5 Measurement Uncertainty.....	10
5. Choice of Equipment for Test Suits.....	10
5.1 Choice of Model.....	10
5.2 Presentation	10
5.3 Choice of Operating Frequencies	10
5.4 Modes of Operation	11
6. Measurement Summary.....	11
7. Measurement Data	10
7.1 Antenna Requirement.....	12
7.2 Minimum DTS Bandwidth	15
7.3 Occupied Bandwidth (99% Emission Bandwidth)	15
7.4 Maximum Peak Conducted Output Power.....	15
7.5 Operation with directional antenna gains greater than 6 dBi	17
7.6 Transmitter Spurious Radiated Emissions.....	18
7.7 Band Edge and Out of Band Measurements	20
7.8 Emissions in Non-restricted Frequency Bands	24
7.9 Peak Power Spectral Density	26
7.10 Conducted Emissions	29
7.11 Duty Cycle	32
7.12 Public Exposure to Radio Frequency Energy Levels	34
8. Test Setup Photographs	36
9. Test Site Description.....	46
Appendix A - Transmitter Spurious Radiated Emissions Test Data	47

1. Scope

This test report certifies that the E Ink Corporation Prism Controller- Model ArC30, as tested, meets the FCC Part 15, Subpart C and ISED Canada RSS-247, Issue 2 requirements. The scope of this test report is limited to the test sample provided by the client, only in as much as that sample represents other production units. If any significant changes are made to the unit, the changes shall be evaluated and a retest may be required.

Revision R1: 1. 99% power bandwidth added per RSS-Gen, Issue 5, section 6.7. This revision was added as Section 3 of this test report. All section numbers following this revision were incremented by 1.

2. Public Exposure to Radio Frequency Energy Levels corrected to reflect the requirements for a product distance ≥ 20 cm.

2. Product Details

- | | |
|----------------------------------|---|
| 2.1. Manufacturer: | E Ink Corporation |
| 2.2. Model Number: | ArC30 |
| 2.3. Serial Number: | Pre-production |
| 2.4. Description: | E Ink is the creator of electronic ink — the optical component of a film used in Electronic Paper Displays (EPD). |
| 2.5. Power Source: | DC 18 Volts |
| 2.6. Hardware Revision: | Rev 2 |
| 2.7. Software Version: | N/A |
| 2.8. Modulation Type: | GFSK |
| 2.9. Operating Frequency: | 2.4 GHz to 2.4835 GHz Nominal |
| 2.10. EMC Modifications: | None |

3. Product Configuration

3.1. Operational Characteristics & Software

Hardware Setup:

Two samples were supplied for test:

- The first was an unmodified sample suitable for radiated and conducted emissions measurements.
- The second utilized a surface mount type MH4 connector in place of the integrated antenna. This configuration provided a means of directly connecting the device under test to the measurement equipment.

The two samples were otherwise identical. A customer supplied 18 volt DC, 2 Amp power supply was provided with the test units.

Software Setup:

Two programs were used to setup and deploy the software used for testing:

- The first was Cypress USB – Serial Configuration Utility.
- The second was ST Microelectronics BlueNRG GUI v2.6.0 test software.


The following section details the software setup used for testing.

3. Product Configuration

3.1. Operational Characteristics & Software (continued)

Software Setup (continued):

1. To configure the module for test, use the Cypress USB – Serial Configuration Utility to perform the following steps:
 - a. Connect the +18V power supply cable to ArC30,
 - b. Connect a micro USB cable to ArC30 and PC,
 - c. Open up configuration utility and press on “Connect” button.
 - d. Press on “BCD/GPIO” tab,
 - e. Press on “Unused GPIO’s drive mode: Configure” button.
 - f. This opens up window where you can change all GPIOs to match the picture below. This enables BLE to talk to PC.
 - g. Press on “OK” button.
 - h. Press on “Program” button. Please note that this step does not drive GPIOs as of yet.
 - i. Go to the “Device” menu and press on “Reset Device” button. This allows USB chip to change its GPIO state.
 - j. Close the utility.

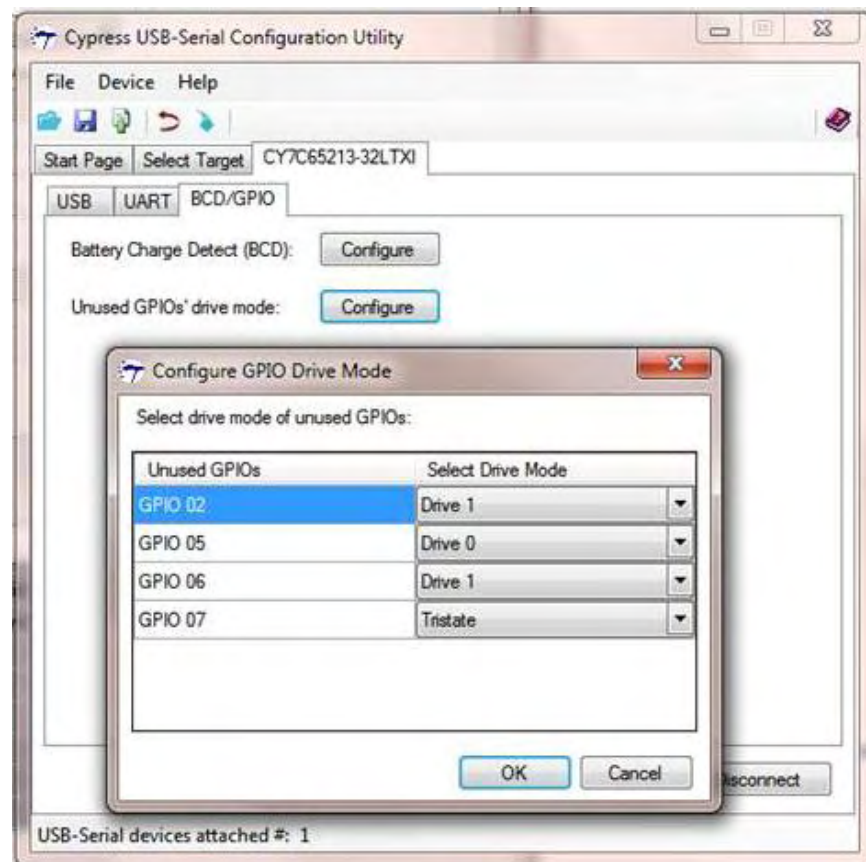


3. Product Configuration

3.1. Operational Characteristics & Software (continued)

Software Setup (continued):


2. Open up ST Micro BLE GUI
 - a. Press on "Open" button next to "Port" line
 - b. GUI will complain about old firmware – just ignore this
 - c. Go to "ACI Utilities" tab and press on "Init Device" button.
 - d. In the window change "Set Role" to PERIPHERAL, and set "Set Address" to Random
 - e. Click "OK"
 - f. Then click on "Advertising" button. I do not change anything there.
 - g. Click on "OK" – BLE starts advertising itself. Use the LightBlue utility or an equivalent to determine if this step was successful.

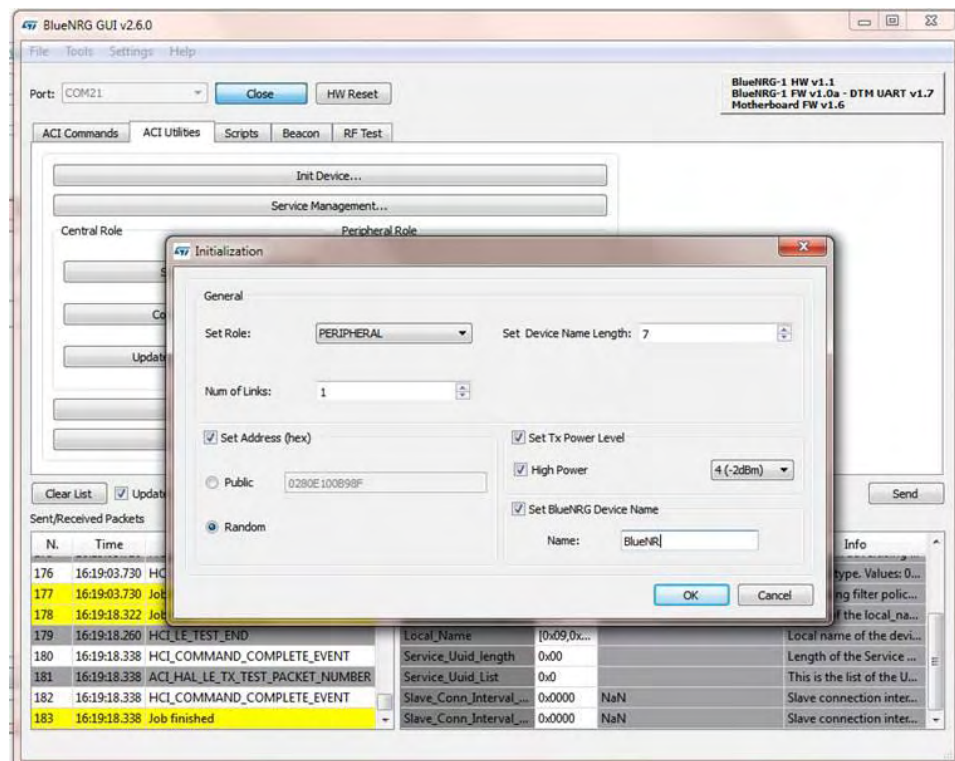

3. Product Configuration

3.1. Operational Characteristics & Software (continued)

Software Setup (continued):

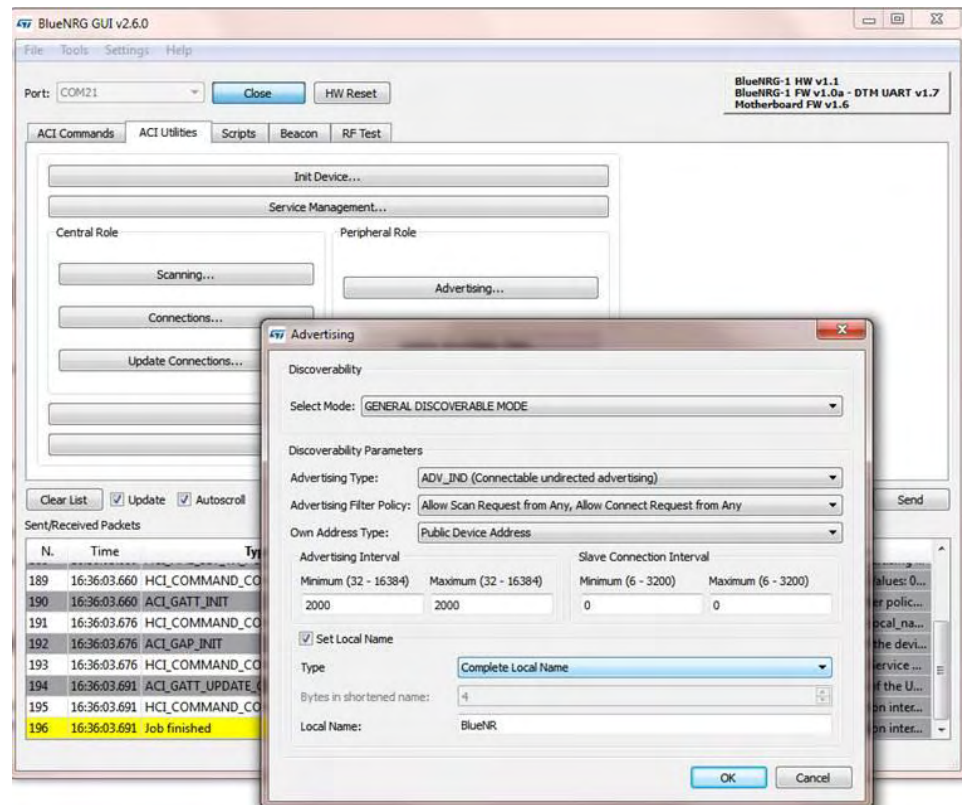


- h. Switch to the “RF Test” tab. There you can set up whatever parameters you need.
- i. The moment you press on “Start Transmitter”, BLE stops its advertising because we place it in test mode. The RF signal will be transmitted according to the selected parameters.
- j. Once you press “Stop Transmit” button, window next to it “# Packet Transmitted” will show how many packets it was able to transmit.
- k. After this all done, open up USB config utility and change all GPIOs to: GPIO2 = 0, GPIO5 = 1. GPIO6 = Tri, GPIO7 = 0. Then program and reset device. This restores the controller to the default condition.

3. Product Configuration

3.1. Operational Characteristics & Software (continued)

Software Setup (continued):

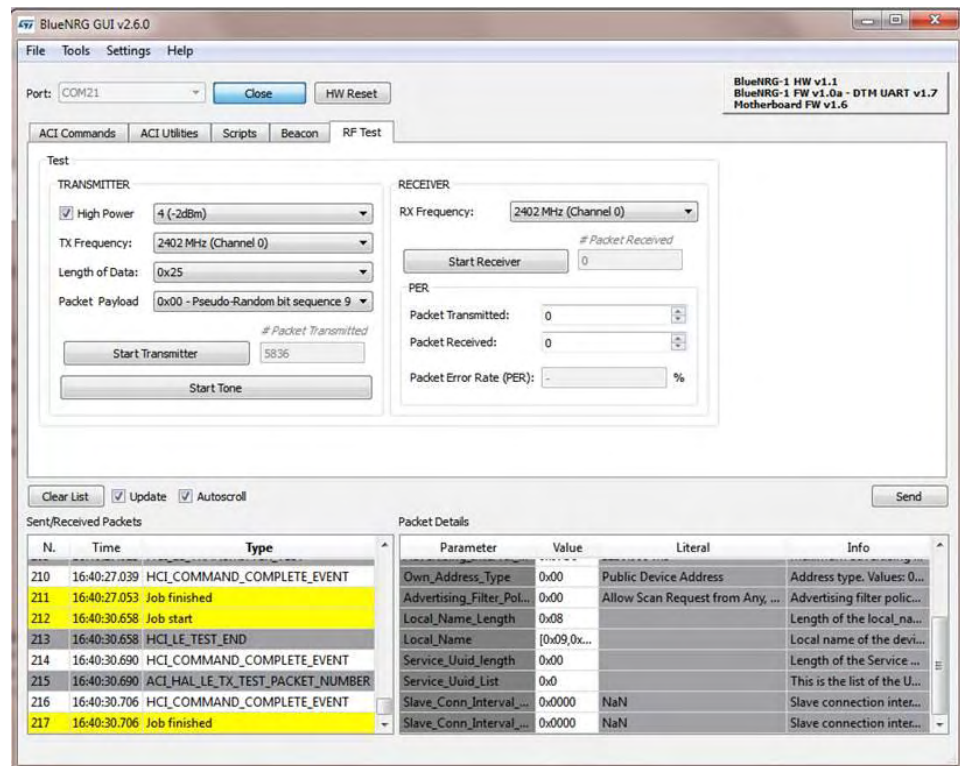

The screenshot shows the BlueNRG GUI v2.6.0 interface. The 'Test' tab is active, displaying transmitter and receiver settings. The transmitter settings include: High Power checked, TX Frequency set to 2402 MHz (Channel 0), Length of Data set to 0x25, and Packet Payload set to 0x00 - Pseudo-Random bit sequence 9. The receiver settings include: RX Frequency set to 2402 MHz (Channel 0). The interface also shows a list of sent/received packets and a packet details table.

N.	Time	Type
210	16:40:27.039	HCI_COMMAND_COMPLETE_EVENT
211	16:40:27.053	Job finished
212	16:40:30.658	Job start
213	16:40:30.658	HCI_LE_TEST_END
214	16:40:30.690	HCI_COMMAND_COMPLETE_EVENT
215	16:40:30.690	ACL_HAI_LE_TX_TEST_PACKET_NUMBER
216	16:40:30.706	HCI_COMMAND_COMPLETE_EVENT
217	16:40:30.706	Job finished

Parameter	Value	Literal	Info
Own_Address_Type	0x00	Public Device Address	Address type. Values: 0...
Advertising_Filter_Pol...	0x00	Allow Scan Request from Any...	Advertising filter polic...
Local_Name_Length	0x08		Length of the local na...
Local_Name	{0x09,0x...		Local name of the devi...
Service_Uuid_Length	0x00		Length of the Service ...
Service_Uuid_List	0x00		This is the list of the U...
Slave_Conn_Interval...	0x0000	NaN	Slave connection inter...
Slave_Conn_Interval...	0x0000	NaN	Slave connection inter...

Rotating the device through three orthogonal axes in accordance with ANSI C63.10, section 5.10.1, was not required for this product.

3.2. EUT Hardware

Manufacturer	Model/Part # / Options	Serial Number	Input Voltage	Freq (Hz)	Description/Function
E Ink Corporation	Model ArC30	CC2237900021 ¹ CC2237900018 ²	18	DC	Prism™ Controller

¹ Unit used for radiated test measurements.

² Unit used for conducted test measurements.

3.3. EUT Cables/Transducers


Cable Type	Length	Shield	From	To
USB	1M	Yes	EUT	Laptop (Cable supplied by the test site)

3.4. Support Equipment

Manufacturer	Model/Part # / Options	Serial Number	Input Voltage	Freq (Hz)	Description/Function
Dell	Inspiron E1505	5573349937	120	60	Laptop for Configuration

3. Product Configuration

3.5. Block Diagram

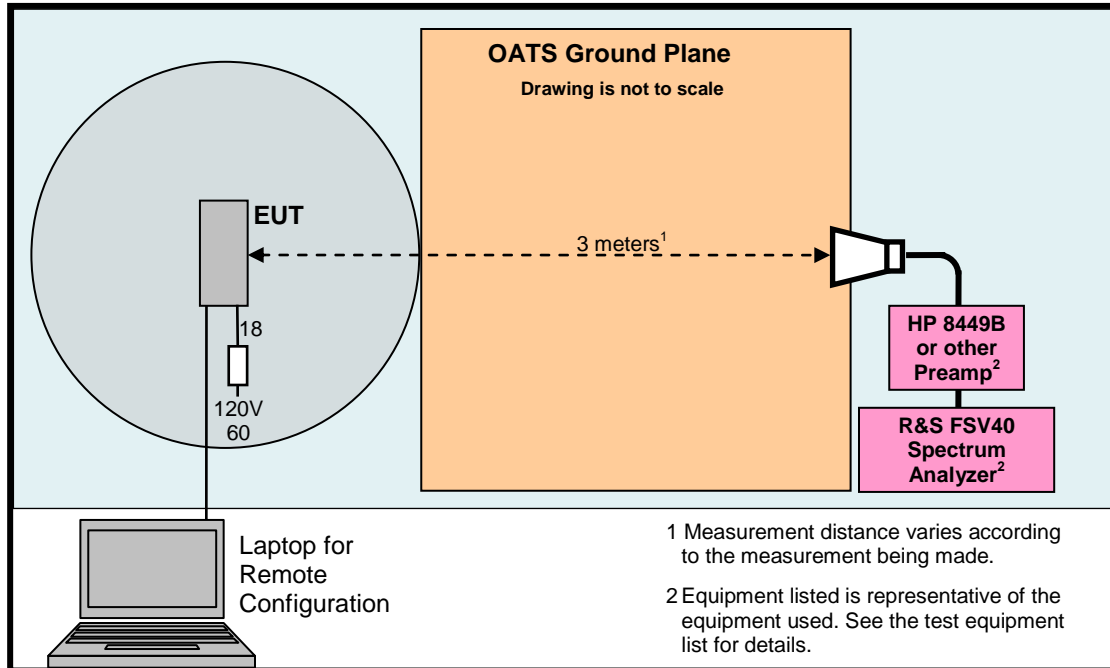

4. Measurements Parameters

4.1. Measurement Equipment Used to Perform Test

Device	Manufacturer	Model No.	Serial No.	Cal Due	Interval
EMI Test Receiver, 9kHz - 7GHz ¹	Rohde & Schwarz	ESR7	101156	7/23/2018	3 Years
Spectrum Analyzer 20 Hz – 40 GHz ²	Rohde & Schwarz	FSV40	100899	7/23/2018	3 Years
Spectrum Analyzer, 9 kHz - 40 GHz ³	Rohde & Schwarz	FSVR40	100909	5/3/2019	2 Years
Spectrum Analyzer, 2 Hz - 26 GHz ⁴	Rohde & Schwarz	FSW26	102057	12/7/2018	2 Years
EMI Receiver	Hewlett Packard	8546A	3650A00360	12/6/2018	3 Years
Passive Loop Antenna, 9 kHz to 30 MHz	EMCO	6512	9309-1139	10/26/2018	2 Years
Biconilog Antenna, 30 MHz to 2 GHz	Sunol Sciences	JB1	A050913	6/3/2019	2 Years
Horn Antenna, 960 MHz to 18 GHz	Electro-Metrics	EM-6961	6337	5/2/2018	2 Years
Horn Antenna, 18 GHz to 40 GHz	Com-Power	AH-840	3075	1011/2018	2 Years
Preamplifier, 1 GHz to 26.5 GHz	Hewlett Packard	8449B	3008A00329	7/22/2018	3 Years
LISN 50 ohm 50 µH, 9 kHz to 30 MHz	EMCO	3825/2	9109-1860	11/17/2018	1 Year
2.4 GHz Band Reject Filter	Micro-Tronics	BRM50702	150	6/12/2018	1 Year
EMI Receiver, 9 kHz to 6.5 GHz	Hewlett Packard	8546A	3330A00115	12/4/2018	2 Years
Digital Barometer	Control Company	4195	ID236	10/8/2017	2 Years

¹ ESR7 Firmware revision: V3.36, SP2

² FSV40 Firmware revision: V2.30 SP4,

³ FSVR40 Firmware revision: V2.23 SP1,

⁴ FSW26 Firmware revision: V2.80,

Date installed: 11/02/2017

Date installed: 05/04/2016

Date installed: 08/19/2016

Date installed: 10/28/2017

Previous V3.36, installed 05/16/2017.

Previous V2.30 SP1, installed 10/22/2014.

Previous V2.23, installed 10/20/2014.

Previous V2.61, installed 04/04/2017.

4. Measurements Parameters (continued)

4.2. Measurement Software

Manufacturer	Software Description	Title or Model #	Rev.	Report Sections
Compliance Worldwide	Test Report Generation Software	Test Report Generator	1.0	7.9. Conducted Emissions

4.3. Measurement & Equipment Setup

Test Dates:	4/20/2018 – 4/25/2018
Test Engineer:	Brian Breault
Normal Site Temperature (15 - 35°C):	19.0
Relative Humidity (20 -75%RH):	31
Frequency Range:	30 kHz to 26 GHz
Measurement Distance:	3, 1.5, 1 and 0.3 Meters
	200 Hz - 10 kHz to 150 kHz
	9 kHz - 150 kHz to 30 MHz
EMI Receiver IF Bandwidth:	120 kHz - 30 MHz to 1 GHz
	1 MHz - Above 1 GHz
	1 kHz - 10 kHz to 150 kHz
EMI Receiver Average Bandwidth:	30 kHz - 150 kHz to 30 MHz
	300 kHz - 30 MHz to 1 GHz
	3 MHz - Above 1 GHz
	Peak, QP - 10 kHz to 1 GHz
Detector Function:	Peak, Avg - Above 1 GHz
	Unless otherwise specified.

4.4. Measurement Procedures

Test measurements were made in accordance FCC Part 15.247: Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5850 MHz, and 24.0 - 24.25 GHz.

The measurement procedures in this report are in accordance with ANSI C63.10-2013: *American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices*. FCC OET Publication Number KDB 558074 D01 v04, *Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247*, dated April 5, 2017, was also referenced for the test procedures used to generate the data in this report. All references to FCC OET publication number 558074 refer to this version of the publication.

All radiated emissions measurements include correction factors for antenna, cables, preamp and attenuators, if used.

4. Measurements Parameters (continued)

4.5. Measurement Uncertainty

The following uncertainties are expressed for an expansion/coverage factor of K=2.

RF Frequency	$\pm 1 \times 10^{-8}$
Radiated Emission of Transmitter	± 4.55 dB
Radiated Emission of Receiver	± 4.55 dB
Temperature	$\pm 0.91^{\circ}$ C
Humidity	$\pm 5\%$

5. Choice of Equipment for Test Suits

5.1 Choice of Model

This test report is based on the one test sample supplied by the manufacturer. These units are reported by the manufacturer to be equivalent to the production units.

5.2 Presentation

The test samples were tested complete with all required ancillary equipment. Refer to Section 3 of this report for product equipment configuration.

5.3 Choice of Operating Frequencies

The device under test, as tested, operates on 40 channels, from channels 0 to 39 in the 2.4 GHz band.

In accordance with ANSI C63.10-2013, section 5.6, and FCC Part 15.31 (m), the choice of operating frequencies selected for the testing detailed in this report are as follows:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

5. Choice of Equipment for Test Suits (continued)

5.4 Mode of Operation

Modulation type : GFSK
 Payload pattern : PRB9
 Payload Length : 32 bytes (0x20)
 Power Setting : 7 (+8 dBm) (Maximum)

For band edge measurements (section 7.6), the DTS bandwidth measurements were taken into consideration for the worst case examples.

6. Measurement Summary

Test Requirement	FCC Rule Reference	ISED RSS-247 Issue 2 Section	Test Report Section	Result
Antenna Requirement	15.203	RSS-GEN Issue 4 §6.8	7.1	Compliant
Minimum DTS Bandwidth	15.247 (a) (2)	5.2 a	7.2	Compliant
Maximum Peak Conducted Output Power	15.247 (b) (1)	5.4 d	7.3	Compliant
Operation with directional antenna gains greater than 6 dBi	15.247 (b) (4)	5.4 f	7.4	Compliant
Spurious Radiated Emissions	15.247 (d)	RSS-GEN Issue 4	7.5	Compliant
Spurious Radiated Emissions (> GHz) - Harmonic Measurements	15.247 (d)	RSS-GEN Issue 4		Compliant
Lower and Upper Band Edges	15.247 (d)	RSS-GEN Issue 4	7.6	Compliant
Emissions in Non-restricted Frequency Bands	15.247(e)	5.5	7.7	Compliant
Peak Power Spectral Density	15.247(e)	5.2 b	7.8	Compliant
AC Power Line Conducted Emissions	15.207	RSS-GEN Issue 4 §8.8	7.9	Compliant
Duty Cycle	15.207	RSS-GEN Issue 4 §9	7.10	Compliant
Public Exposure to Radio Frequency Energy Levels	1.1307 (b) (1)	RSS-GEN Issue 4 §5.5 RSS 102	7.11	Compliant

7. Measurement Data**7.1. Antenna Requirement (15.203)**

Requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section.

Results: The ArC30 module utilizes a PCB antenna which is not user accessible.

7. Measurement Data

7.2. Minimum DTS Bandwidth

Requirement: 15.247 (a) (2)


Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Procedure: This test was performed in accordance with the procedure detailed in FCC OET publication number 558074, Section 8.1 Option 1, DTS (6 dB) Channel Bandwidth.

Results: The device under test meets the minimum 500 kHz DTS (6 dB) bandwidth requirement.

Channel	Frequency (MHz)	-6 dB Bandwidth 1 Mbps (kHz)	Minimum -6 dB Bandwidth (kHz)	Result
37	2402	672.90	>500	Compliant
17	2440	673.90	>500	Compliant
39	2480	673.90	>500	Compliant

7.2.1. Low Channel – 37, 2402 MHz

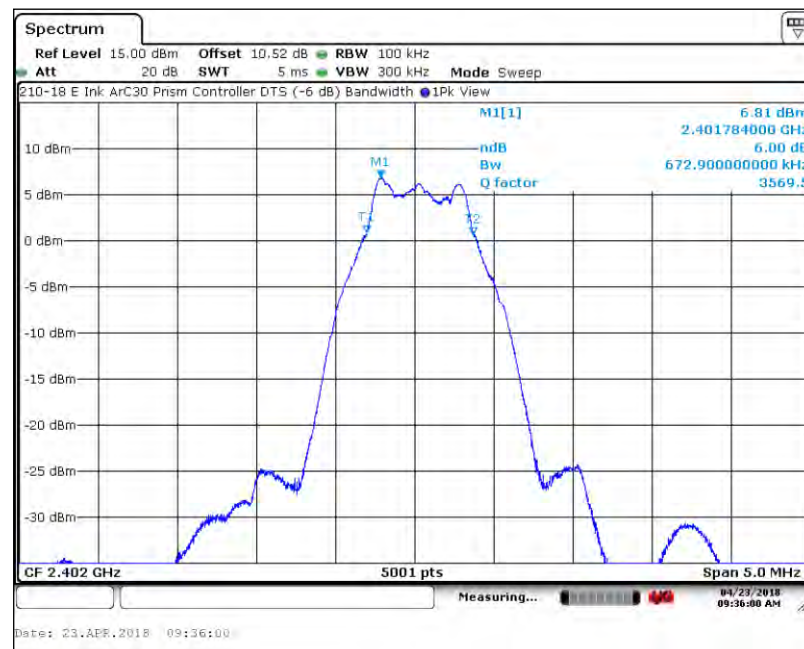


Test Number: 210-18R

Issue Date: 8/24/2018


7. Measurement Data

7.2. Minimum DTS Bandwidth (15.247 (a) (2)) (continued)

7.2.2. Middle Channel – 17, 2440 MHz

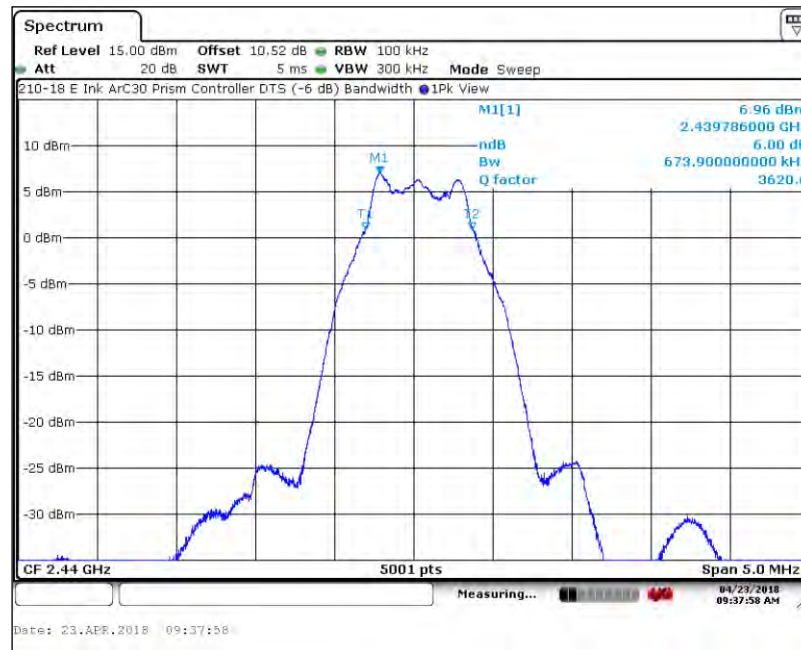

7.2.3. High Channel – 39, 2480 MHz

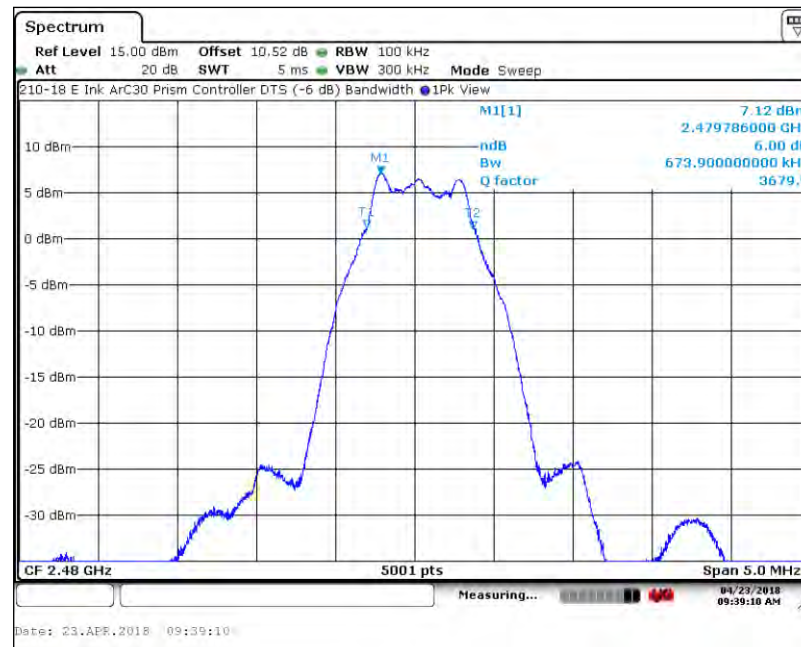

7. Measurement Data

7.3. Occupied Bandwidth (99% Emission Bandwidth) (ISED Canada RSS-GEN Issue 5)

Requirement: ISED Canada RSS-GEN Issue 5

The occupied bandwidth or the “99% emission bandwidth” is defined as the frequency range between two points, one above and the other below the carrier frequency, within which 99% of the total transmitted power of the fundamental transmitted emission is contained. The occupied bandwidth shall be reported for all equipment in addition to the specified bandwidth required in the applicable RSSs.

Procedure This test was performed in accordance with the procedure detailed in ISED Canada RSS-GEN Issue 5, section 6.7.

Test Note: This test was performed utilizing the automated 99% bandwidth function of the spectrum analyzer.

Conclusion: Compliant, for informational purposes.

Measurement Results - 99% Bandwidth

Channel	Channel Frequency (MHz)	99% Power Bandwidth (MHz)
Low	2402	1.033
Middle	2442	1.033
High	2480	1.031

7.3.1. 99% Bandwidth, Low Channel



Test Number: 210-18R

Issue Date: 8/24/2018

7. Measurement Data

7.3. Occupied Bandwidth (99% Emission Bandwidth) (ISED Canada RSS-GEN Issue 5)

7.3.2. 99% Bandwidth, Middle Channel



7.3.3. 99% Bandwidth, High Channel



7. Measurement Data (continued)

7.4. Maximum Peak Conducted Output Power

Requirement: (15.247 (b) (3))

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt (+30 dBm).


Procedure: This test was performed in accordance with the procedure detailed in FCC OET publication number KDB 558074, Section 9.1.1.

Test Note: A spectrum analyzer resolution bandwidth of 1 MHz and a video bandwidth of 3 MHz were used to meet the requirements of FCC OET publication number 558074, Section 9.1.1 and the measured product DTS bandwidth.

Results: The device under test meets the required maximum peak conducted output power level of 1 Watt (125.2 dBμV/m at 3 Meters).

BLE Channel	Frequency	Maximum Peak Conducted Output Power	Peak Limit	Margin	Result
	(MHz)	(dBm)	(dBm)	(dB)	
37	2402	6.93	30.00	-23.07	Compliant
17	2440	7.09	30.00	-22.91	Compliant
39	2480	7.25	30.00	-22.75	Compliant

7.4.1. Low Channel – 37, 2402 MHz

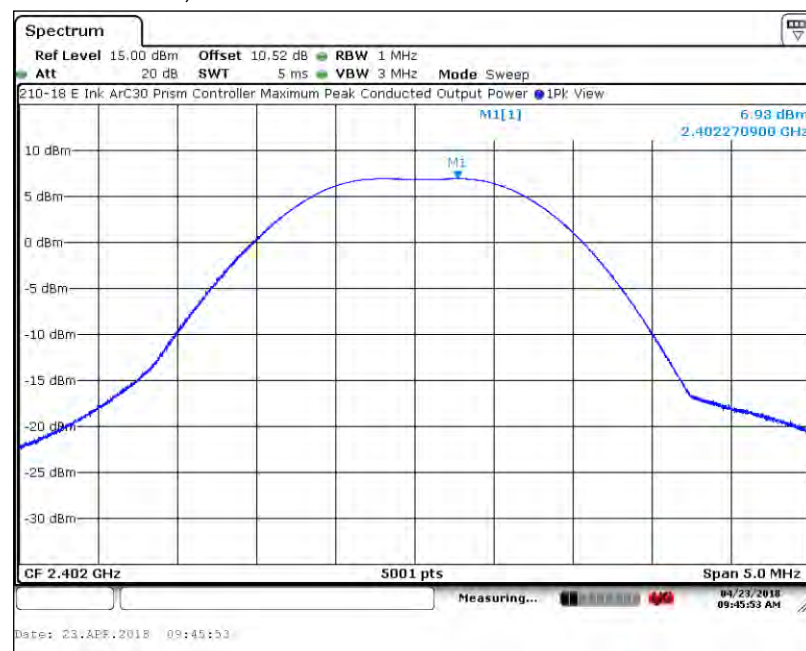

Test Number: 210-18R

Issue Date: 8/24/2018


7. Measurement Data

7.4. Maximum Peak Conducted Output Power (continued)

7.4.2. Middle Channel – 17, 2440 MHz



7.4.3. High Channel – 39, 2480 MHz

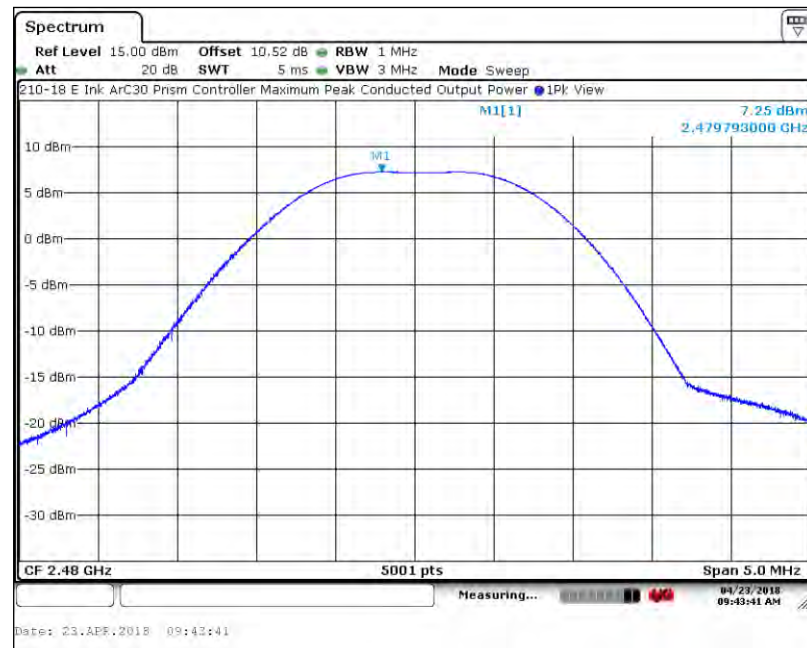

7. Measurement Data**7.5. Operation with directional antenna gains greater than 6 dBi (15.247 (b)(4))**

Requirement: If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of FCC Part 15.247, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 2400 – 2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

Systems operating in the 5725 – 5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter peak output power.

Procedure: Not applicable for the device under test.

DUT Status: The DUT utilizes an antenna with a 2.5 dBi peak gain (-1.5 average gain) and therefore is exempt from this requirement.

7. Measurement Data (continued)
7.6. Transmitter Spurious Radiated Emissions (30 kHz to 40 GHz)
7.6.1 Transmitter Spurious Radiated Emissions

Requirement: (15.209) The Emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency Range (MHz)	Distance (Meters)	Limit (dBμV/m) ¹
0.009 to 0.490	3	128.5 to 93.8
0.490 to 1.705	3	73.8 to 63.0
1.705 to 30	3	69.5
30 to 88	3	40.0
88 to 216	3	43.5
216 to 960	3	46.0
>960	3	54.0

¹Measurements in the 9 to 90 kHz, 110 to 490 kHz and above 1000 MHz ranges employ an average detector. Otherwise a quasi-peak detector is used.

Procedure: This test was performed in accordance with the procedure detailed in FCC OET publication number 558074, Section 12.0: Emissions in restricted frequency bands and FCC 47CFR Part 15.209: Radiated Emission Limits; General Requirements.

The test methods used to generate the data in this test report is in accordance with ANSI C63.10:2013, American National Standard for Testing Unlicensed Wireless Devices.

Test Notes: Measurements were made from the lowest oscillator frequency as stated by the manufacturer (32.768 kHz) to the 10th harmonic of the highest transmitter frequency or 40 GHz, whichever is lower.

Reference FCC Part 15.33(a) and FCC Part 15.33(a)(1).

Each of the test modes documented within the test report were evaluated and the worst case of each of the test modes is detailed in this section. A full set of measurement scans are presented in Appendix A of this test report.

Results: The Emissions from the DUT did not exceed the field strength levels specified in the above table.

Frequency Range	Worst-Case Measured Frequency	Field Strength	FCC Part 15.209 Limit	Margin	Reference	Receive Antenna Polarity
	(MHz)	(dBμV/m)	(dBμV/m)	(dB)	Appendix A	(H/V)
30 kHz - 150 kHz	0.03010	70.94	117.90	-46.96	A1.3.1	Parallel
150 kHz - 30 MHz	0.15225	71.71	83.92	-12.21	A2.3	Gnd Parallel
30 MHz - 1000 MHz	30.15000	32.38	40.00	-7.62	A3.1.3	H
1000 MHz - 10000 MHz	4959.575	53.97	74.00	-20.03	A4.3.3	H
10000 MHz - 18000 MHz	16579.700	54.42	74.00	-19.58	A5.3.6	V
18000 MHz - 40000 MHz	39981.500	46.11	74.00	-27.89	A6.3.6	V

7. Measurement Data (continued)

7.6. Transmitter Spurious Radiated Emissions (30 kHz to 40 GHz)

7.6.2. Transmitter Spurious Radiated Emissions (Harmonic Meas.) Test Results

Worst case measurements of Harmonics that fall into the restricted bands.

7.6.2.1. 2.4 GHz, BLE

Freq. (MHz)	Field Strength (dB μ V/m) ¹		Limit (dB μ V/m)		Margin (dB μ V/m)		Antenna Polarity (H/V)	Result
	Peak	Average	Peak	Average	Peak	Average		
4804	57.85	47.14	74.00	54.00	-16.15	-6.86	V	Compliant
4880	56.12	45.38	74.00	54.00	-17.88	-8.62	H	Compliant
4960	55.93	44.86	74.00	54.00	-18.07	-9.14	H	Compliant
7320	64.24	52.95	74.00	54.00	-9.76	-1.05	H	Compliant
7440	65.40	53.96	74.00	54.00	-8.60	-0.04	H	Compliant
12010	61.47	47.79	74.00	54.00	-12.53	-6.21	H	Compliant
12200	64.85	51.74	74.00	54.00	-9.15	-2.26	H	Compliant
12400	60.59	46.28	74.00	54.00	-13.41	-7.72	H	Compliant
19216	61.19	48.01	74.00	54.00	-12.81	-5.99	H	Compliant
19520	60.92	47.37	74.00	54.00	-13.08	-6.63	V	Compliant
19840	60.75	47.12	74.00	54.00	-13.25	-6.88	V	Compliant
22320	63.53	50.00	74.00	54.00	-10.47	-4.00	H	Compliant

¹ All correction factors are stored in the spectrum analyzer and applied to this column entry.

7. Measurement Data (continued)

7.7. Band Edge and Out of Band Measurements

Requirement: 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Procedure: For the lower band edge, this measurement was performed in accordance with the procedure detailed in FCC OET publication number 558074, Section 11: Emissions in non-restricted frequency bands.

For the upper band edge, this measurement was performed as a typical restricted band radiated emissions measurement above 1 GHz. Peak and CISPR average detectors and a 1 MHz resolution and 3 MHz video bandwidth were utilized.

Results: The DUT met the 20 dB requirement at the lower band edge and the Part 15.209 requirements at the upper band edge.

7.7.1. Lower Band Edge


Band Edge Frequency	Lowest Transmitter Frequency	Maximum PSD (100 kHz)	Band Edge Delta to Max PSD (100 kHz)	Minimum Required Delta	Result
(MHz)	(MHz)	(dBμV/m)	(dB)	(dB)	
2400	2402	6.78	-41.11	-20	Compliant

Note: See plot on following page

7. Measurement Data (continued)

7.7. Band Edge and Out of Band Measurements (continued)

Lower Band Edge

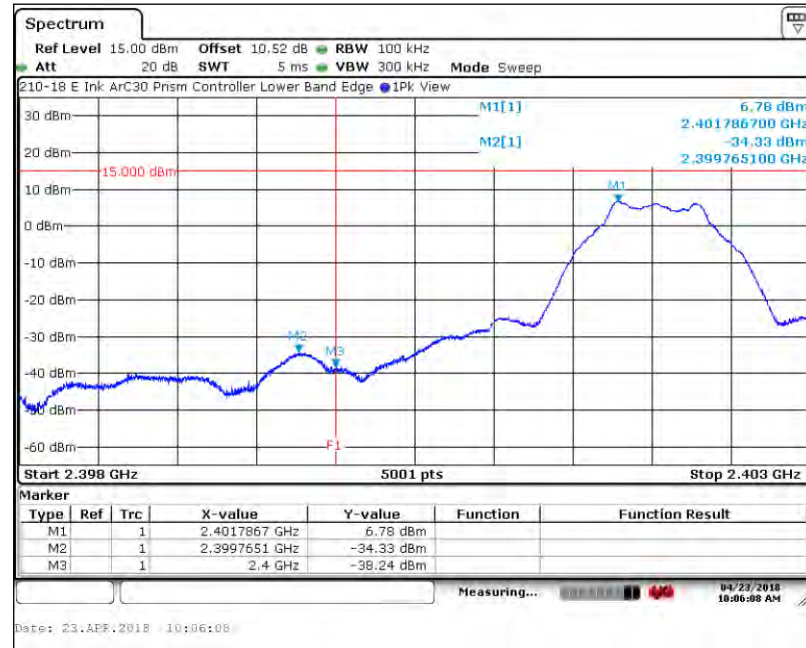

7.7.2. Upper Band Edge and Worst Case Out of Band

Upper Band Edge

Band Edge Frequency	Field Strength (dBμV/m)		Limit (dBμV/m)		Margin (dB)		Result
	Peak	Average	Peak	Average	Peak	Average	
2483.5	67.29	51.56	74	54	-6.71	-2.44	Compliant


Worst Case Out of Band

Band Edge Frequency	Out of Band Frequency	Field Strength (dBμV/m)		Limit (dBμV/m)		Margin (dBμV/m)		Result
(MHz)	(MHz)	Peak	Average	Peak	Average	Peak	Average	
2483.5	2483.8869	72.15	45.79	74	54	-1.85	-8.21	Compliant

Note: See plot on following page

7. Measurement Data (continued)

7.7. Band Edge and Out of Band Measurements (continued)

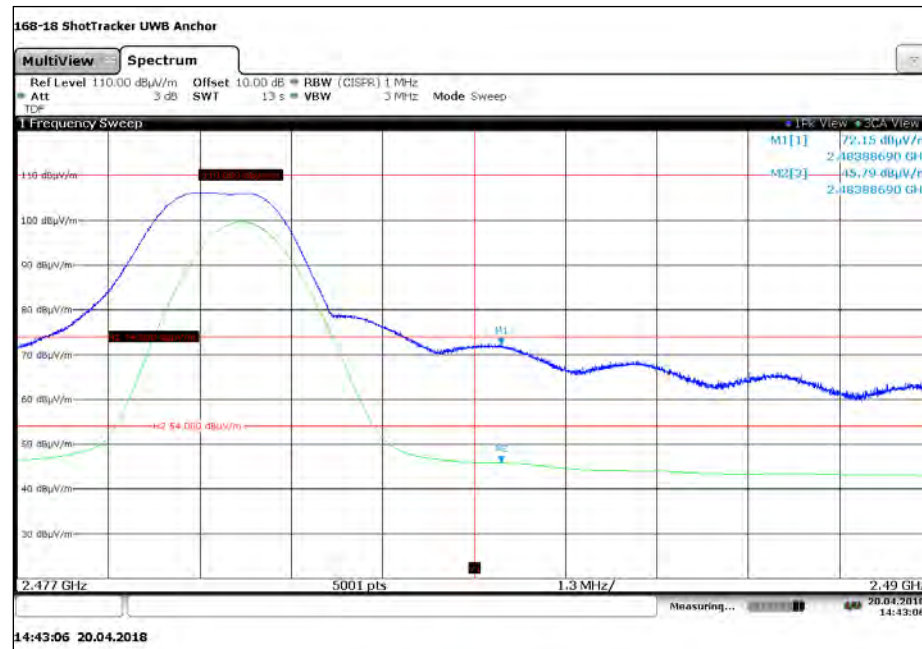

Band edge measurements were taken in real-time.

7.7.3. Lower Restricted Band, 2.310 MHz to 2390 MHz

Field Strength (dBμV/m)		Limit (dBμV/m)		Margin (dB)		Result
Peak	Average	Peak	Average	Peak	Average	
64.25	50.65	74	54	-9.75	-3.35	Compliant

Note: See plot on following page

7.7.4. Upper Restricted Band, 2483.5 MHz, to 2500 MHz

Field Strength (dBμV/m)		Limit (dBμV/m)		Margin (dB)		Result
Peak	Average	Peak	Average	Peak	Average	
66.70	51.63	74	54	-7.30	-2.37	Compliant

Note: See plot on following page


Test Number: 210-18R

Issue Date: 8/24/2018


7. Measurement Data (continued)

7.7. Band Edge and Out of Band Measurements (continued)

Lower Restricted Band, 2310 MHz, to 2390 MHz

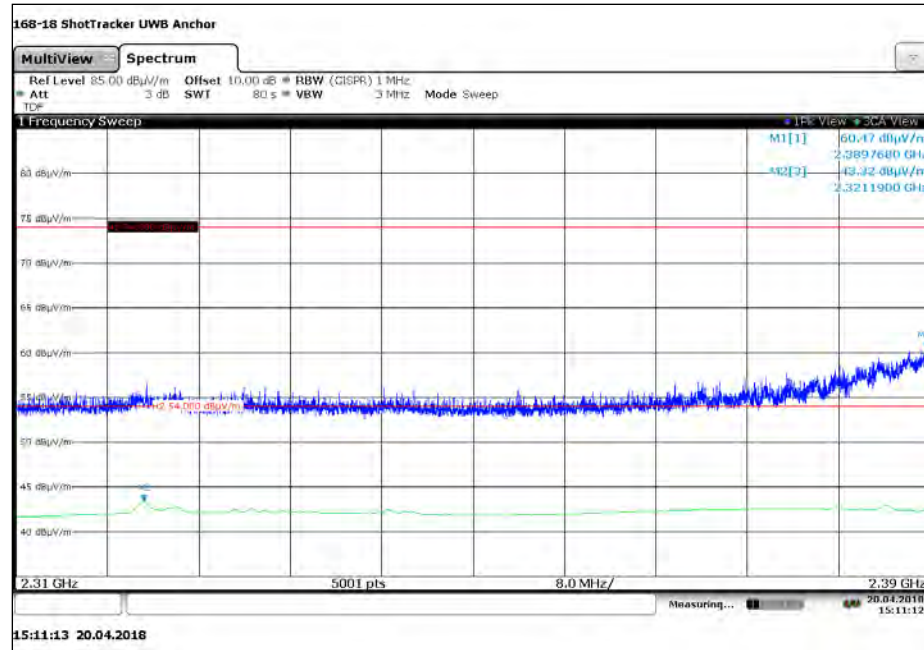

Upper Restricted Band, 2483.5 MHz, to 2500 MHz

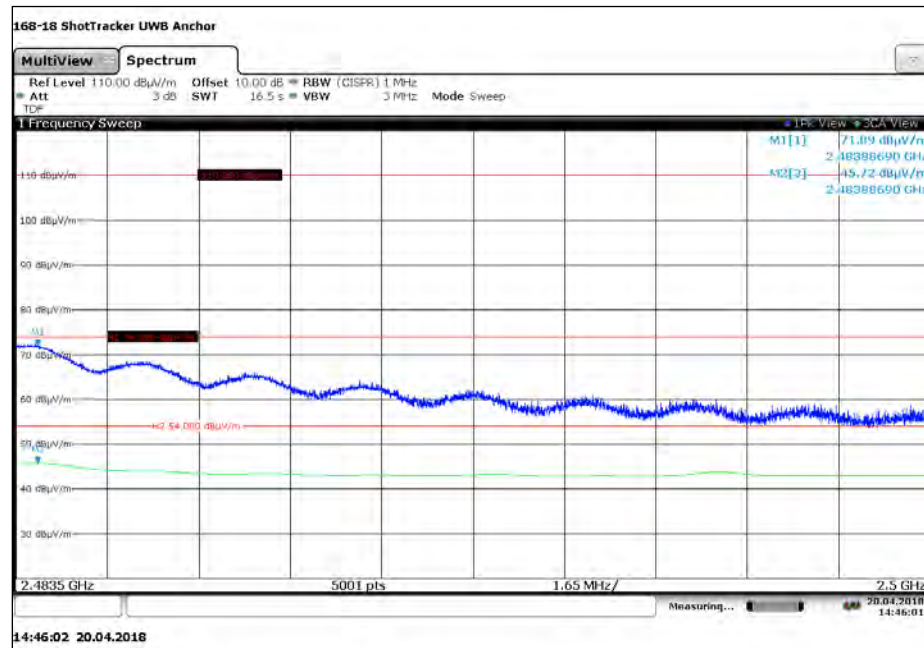

7. Measurement Data (continued)

7.8. Emissions in Non-restricted Frequency Bands

Requirement: 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Notes: Peak in-band measurements were taken at the time the DTS (-6 dB) bandwidth measurements were made. These values were used as the reference levels for the following measurements. Refer to section 7.2 of this report for these values.


Results: The DUT met the 20 dB requirement emission level delta requirement in the non restricted frequency bands.

Emissions in Non-restricted Frequency Bands

Maximum PSD (100 kHz) In-Band ¹ (dBm)	Worst Case Out-of-Band Frequency (MHz)	Maximum PSD (100 kHz) Out-of-Band (dBm)	Delta to Maximum PSD (dB)	Minimum Required Delta	Result
7.12	4803.72	-42.59	-49.71	-20 dB	Compliant

¹Taken from Section 7.2 - DTS Bandwidth


7.8.1. Emissions in Non-restricted Frequency Bands, Plot 1 of 3

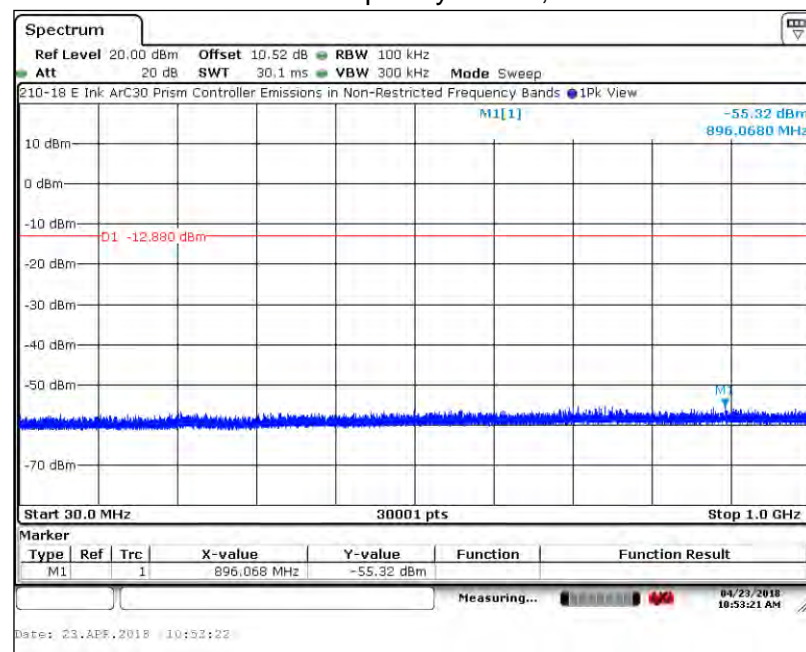


7. Measurement Data (continued)

7.8. Emissions in Non-restricted Frequency Bands (continued)

7.8.2. Emissions in Non-restricted Frequency Bands, Plot 2 of 3

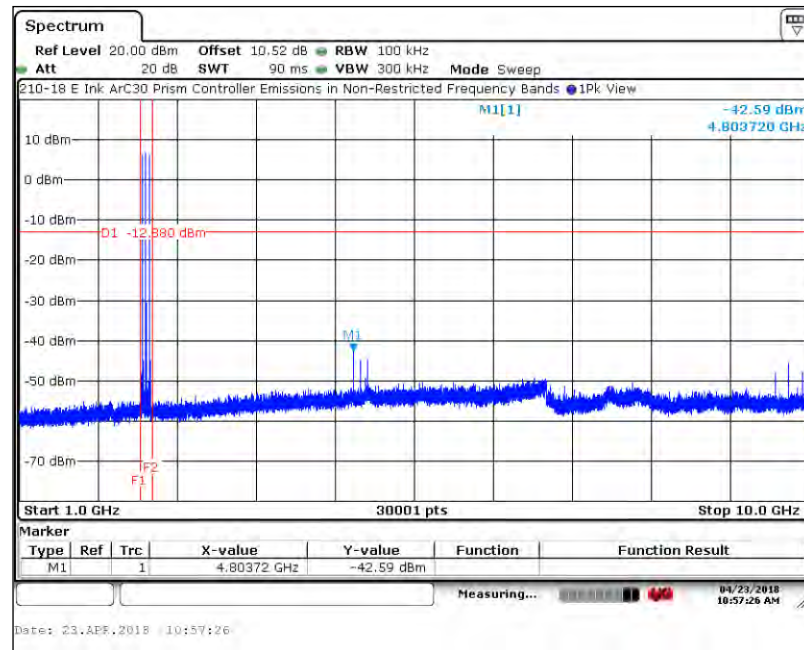

7.8.3. Emissions in Non-restricted Frequency Bands, Plot 3 of 3

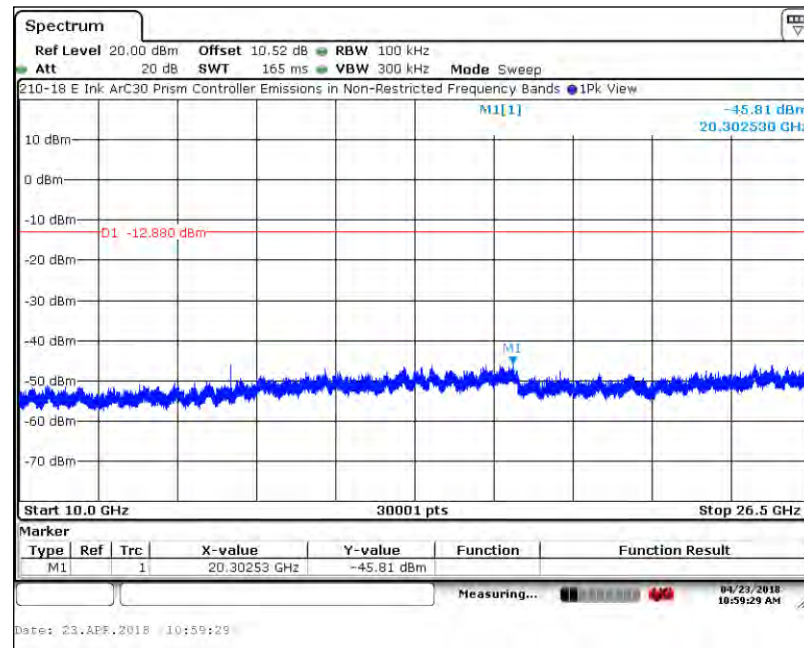

7. Measurement Data (continued)

7.9. Peak Power Spectral Density (15.247(e))

Requirement: For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of FCC Part 15.247. The same method of determining the conducted output power shall be used to determine the power spectral density.

Procedure: FCC OET publication number 558074, Section 10.2: Method PKPSD (peak PSD). FCC OET 662911 was referenced to determine the procedure for measuring in-band power spectral density of transmitters with multiple outputs in the same band.

Results: The DUT met the required power spectral density limit at the tested frequencies.


Measurement Results in 2400 MHz to 2483.5 MHz Band

Channel	Frequency	Maximum PSD Frequency	Maximum Power Spectral Density	Limit	Margin	Result
	(MHz)	(MHz)	(dBm/3 kHz)	(dBm/3 kHz)	(dB)	
37	2402	2401.7860	-8.59	8.0	-16.59	Compliant
17	2440	2440.0296	-8.45	8.0	-16.45	Compliant
39	2480	2480..264	-8.02	8.0	-16.02	Compliant


7. Measurement Data (continued)

7.9. Peak Power Spectral Density (15.247(e)) (continued)

7.9.1. Low Channel – 37, 2402 MHz

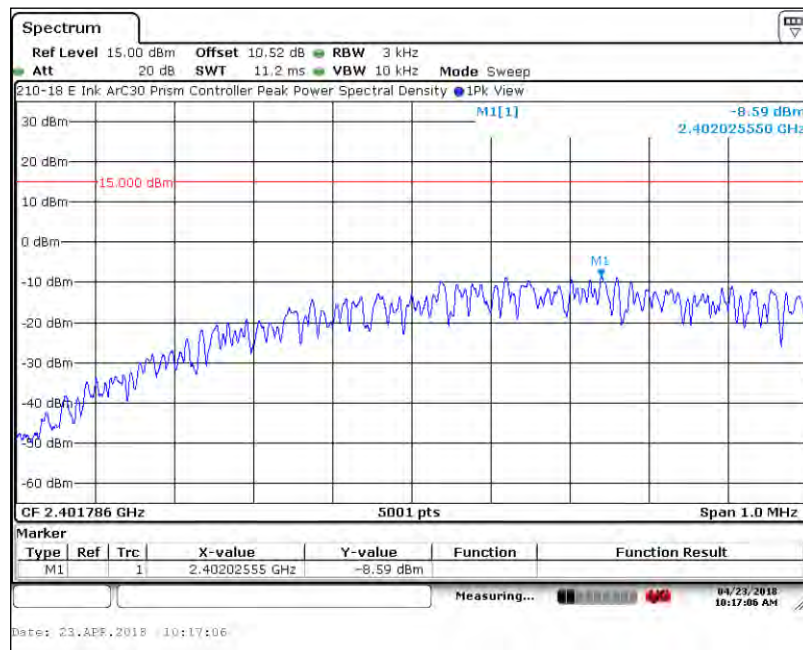


7.9.2. Middle Channel – 17, 2440 MHz

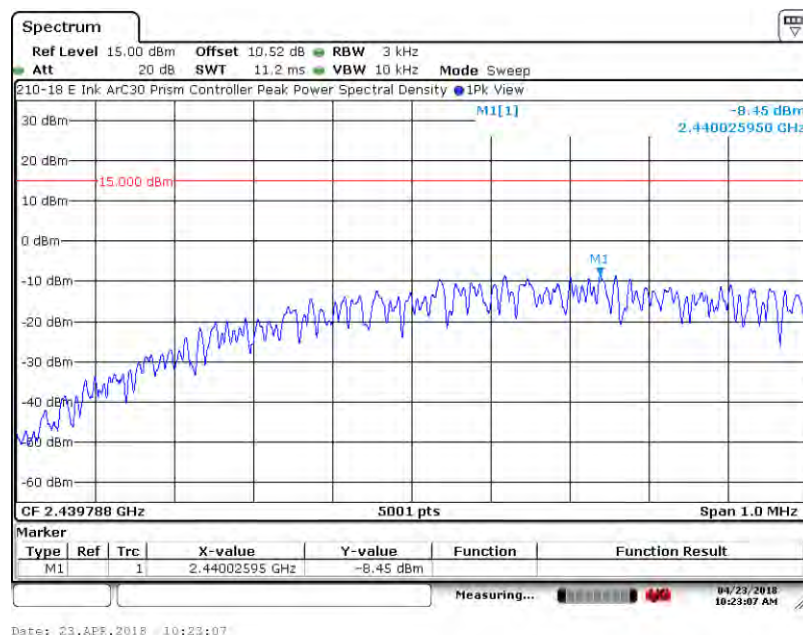

7. Measurement Data

7.9. Peak Power Spectral Density (15.247(e)) (continued)

7.9.3. High Channel – 39, 2480 MHz

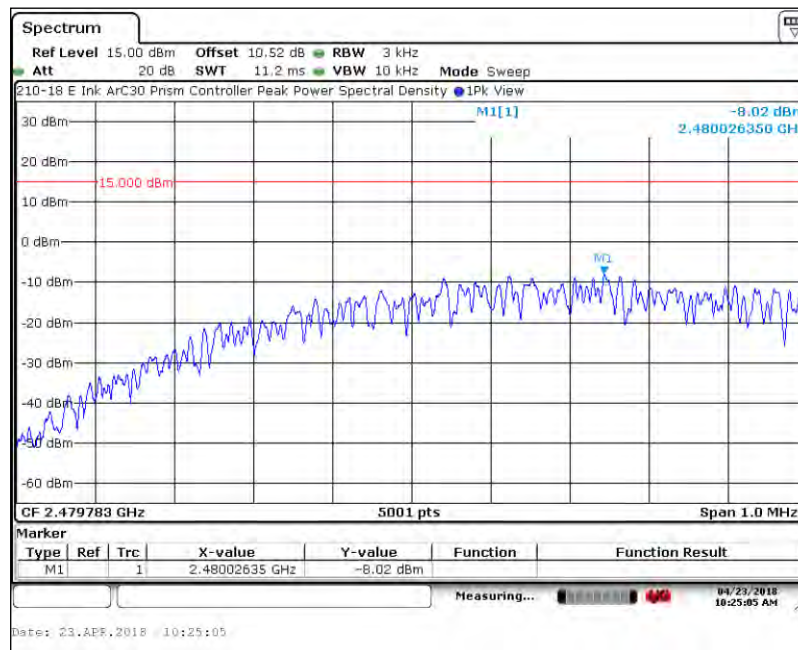

7. Measurement Data (continued)
7.10. Conducted Emissions

Requirement: 15.207 With certain exceptions, an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN).

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-Peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

* Decreases with the logarithm of the frequency.

Procedure: This test was performed in accordance with the procedure detailed in ANSI C63.10-2013, Section 6.2: Standard test method for ac power-line conducted emissions from unlicensed wireless devices.

Test Notes: The device was tested using the support equipment laptop.

Results: The device under test meets the FCC Part 15.207 test requirements.

Measurement & Equipment Setup

Test Date:	04/25/2018
Test Engineer:	Brian Breault
Site Temperature (°C):	22.8
Relative Humidity (%RH):	48.3
Frequency Range:	0.15 MHz to 30 MHz
EMI Receiver IF Bandwidth:	9 kHz
EMI Receiver Avg Bandwidth:	30 kHz
Detector Functions:	Peak, Quasi-Peak & Average

Test Number: 210-18R

Issue Date: 8/24/2018


7. Measurement Data (continued)

7.10. Conducted Emissions (FCC Part 15.207)

7.10.1. 120 Volts, 60 Hz Phase

Test No.: 210-18, 120 Volts, 60 Hz Phase

FCC Part 15.207

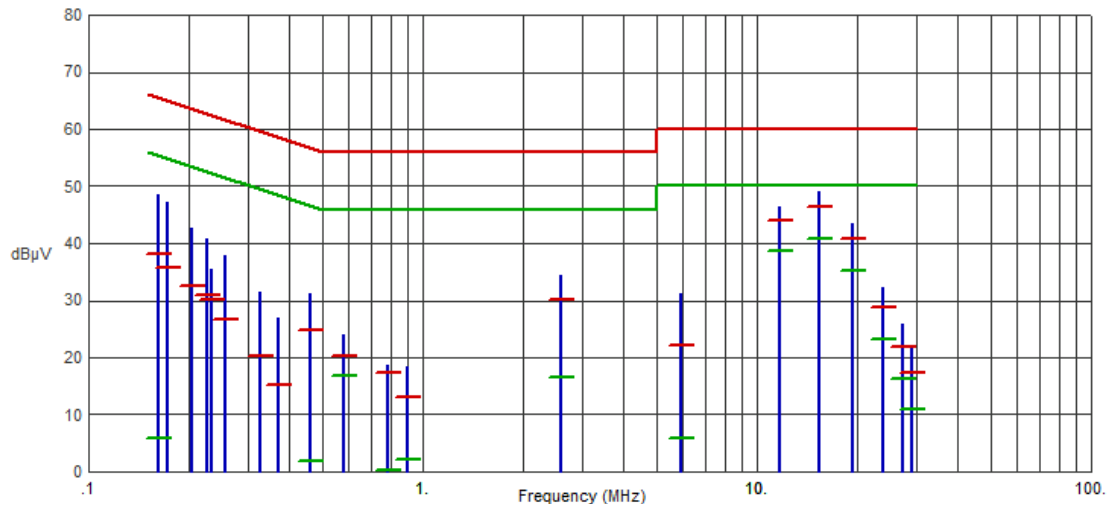

Frequency (MHz)	Pk Amp (dBμV)	QP Amp (dBμV)	QP Limit (dBμV)	QP Margin (dB)	Avg Amp (dBμV)	Avg Limit (dBμV)	Avg Margin (dB)	Comments
.1617	48.48	38.21	65.38	-27.17	5.83	55.38	-49.55	
.1732	47.16	35.78	64.81	-29.03	-3.85	54.81	-58.66	
.2045	42.63	32.53	63.43	-30.90	-2.56	53.43	-55.99	
.2265	40.86	30.83	62.58	-31.75	-5.46	52.58	-58.04	
.2341	35.51	30.05	62.30	-32.25	-3.39	52.30	-55.69	
.2554	37.98	26.80	61.58	-34.78	-3.85	51.58	-55.43	
.3258	31.56	20.36	59.56	-39.20	-5.31	49.56	-54.87	
.3708	26.92	15.29	58.48	-43.19	-6.22	48.48	-54.70	
.4618	31.26	24.69	56.66	-31.97	1.91	46.66	-44.75	
.5792	24.01	20.23	56.00	-35.77	16.78	46.00	-29.22	
.7869	18.78	17.35	56.00	-38.65	0.30	46.00	-45.70	
.9049	18.43	13.08	56.00	-42.92	2.09	46.00	-43.91	
2.5984	34.40	30.03	56.00	-25.97	16.65	46.00	-29.35	
5.9338	31.20	22.13	60.00	-37.87	5.75	50.00	-44.25	
5.9338	31.20	22.13	60.00	-37.87	5.75	50.00	-44.25	
11.6991	46.49	44.05	60.00	-15.95	38.68	50.00	-11.32	
15.4380	49.01	46.29	60.00	-13.71	40.82	50.00	-9.18	
19.2995	43.39	40.74	60.00	-19.26	35.08	50.00	-14.92	
23.7375	32.38	28.77	60.00	-31.23	23.14	50.00	-26.86	
27.3752	25.76	21.86	60.00	-38.14	16.34	50.00	-33.66	
29.1218	21.54	17.31	60.00	-42.69	10.95	50.00	-39.05	


7. Measurement Data (continued)

7.10. Conducted Emissions (FCC Part 15.207) (continued)

7.10.2. 120 Volts, 60 Hz Neutral

Test No.: 210-18, 120 Volts, 60 Hz Neutral

FCC Part 15.207

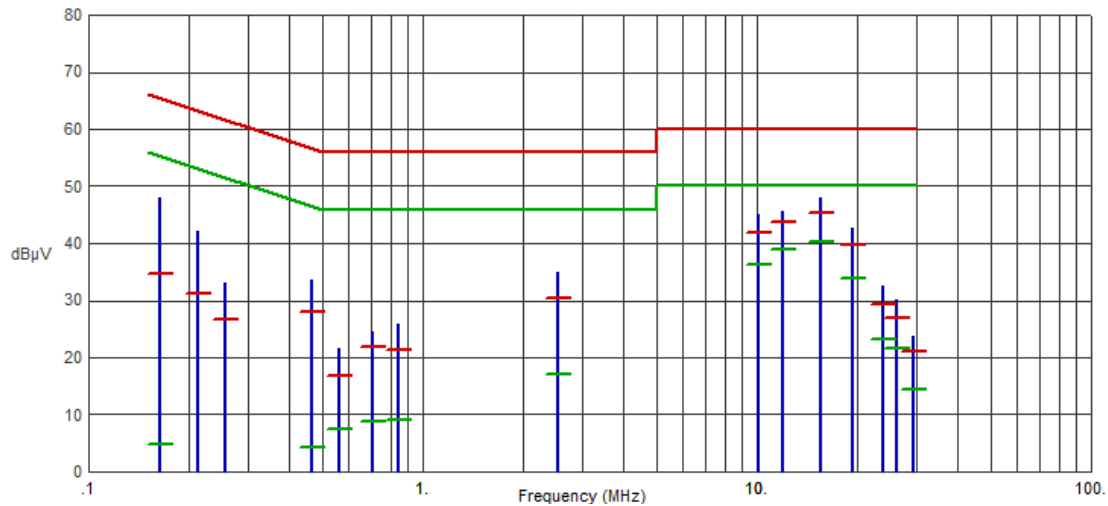

Frequency (MHz)	Pk Amp (dBμV)	QP Amp (dBμV)	QP Limit (dBμV)	QP Margin (dB)	Avg Amp (dBμV)	Avg Limit (dBμV)	Avg Margin (dB)	Comments
.1640	48.09	34.74	65.26	-30.52	4.68	55.26	-50.58	
.2131	42.15	31.30	63.08	-31.78	-2.59	53.08	-55.67	
.2564	33.08	26.80	61.55	-34.75	-0.68	51.55	-52.23	
.4664	33.57	28.06	56.58	-28.52	4.23	46.58	-42.35	
.5596	21.49	16.68	56.00	-39.32	7.42	46.00	-38.58	
.7071	24.60	21.75	56.00	-34.25	8.80	46.00	-37.20	
.8496	25.85	21.24	56.00	-34.76	9.02	46.00	-36.98	
2.5415	34.82	30.48	56.00	-25.52	17.04	46.00	-28.96	
10.0600	44.99	41.96	60.00	-18.04	36.39	50.00	-13.61	
11.9326	45.54	43.61	60.00	-16.39	39.01	50.00	-10.99	
15.4397	48.03	45.43	60.00	-14.57	40.16	50.00	-9.84	
19.2984	42.72	39.84	60.00	-20.16	33.87	50.00	-16.13	
23.8961	32.43	29.24	60.00	-30.76	23.12	50.00	-26.88	
26.3145	30.03	26.99	60.00	-33.01	21.55	50.00	-28.45	
29.3566	23.82	21.03	60.00	-38.97	14.30	50.00	-35.70	

7. Measurement Data (continued)

7.11. Duty Cycle

Requirement: (FCC OET publication number 558074)

Preferably, all measurements of maximum conducted (average) output power will be performed with the EUT transmitting continuously (i.e., with a duty cycle of greater than or equal to 98%).


Procedure: Duty cycle measurements were made according to the procedure detailed ANSI C63.10-2013, Section 11.6(b)

Results: Duty cycle measurements are listed in the following table.

All power and power spectral density measurements for this report are peak mode measurements. Ample peak hold time was provided to ensure maximum peak measurements.

Channel	Frequency	Time High	Time per Period	Duty Cycle	
	(MHz)	(μ S)	(μ S)	(Numeric)	(%)
37	2402	1.057	1.180	0.89576	89.58
17	2440	1.057	1.180	0.89576	89.58
39	2480	1.057	1.180	0.89576	89.58

7.11.1. Low Channel – 37, 2402 MHz

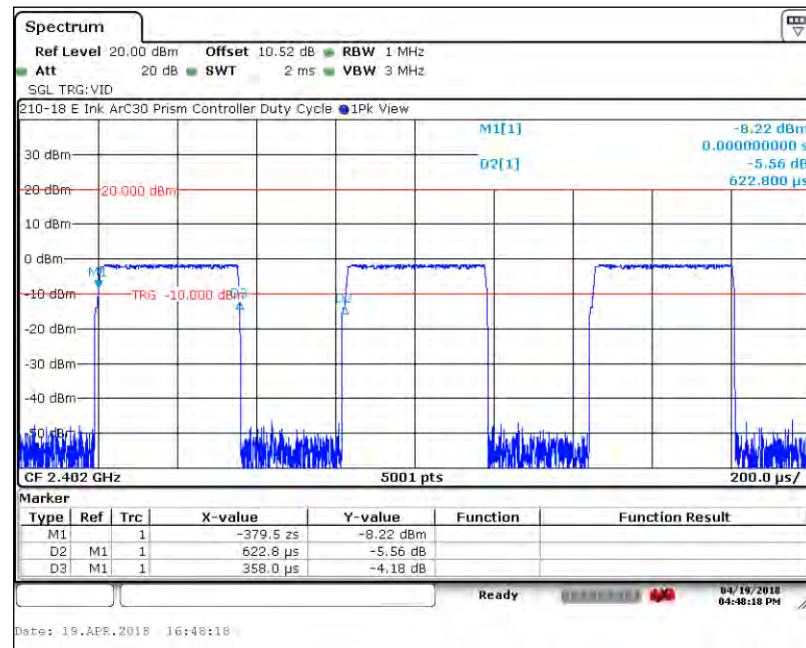


Test Number: 210-18R

Issue Date: 8/24/2018


7. Measurement Data (continued)

7.10. Duty Cycle (continued)

7.11.2. Middle Channel – 17, 2440 MHz

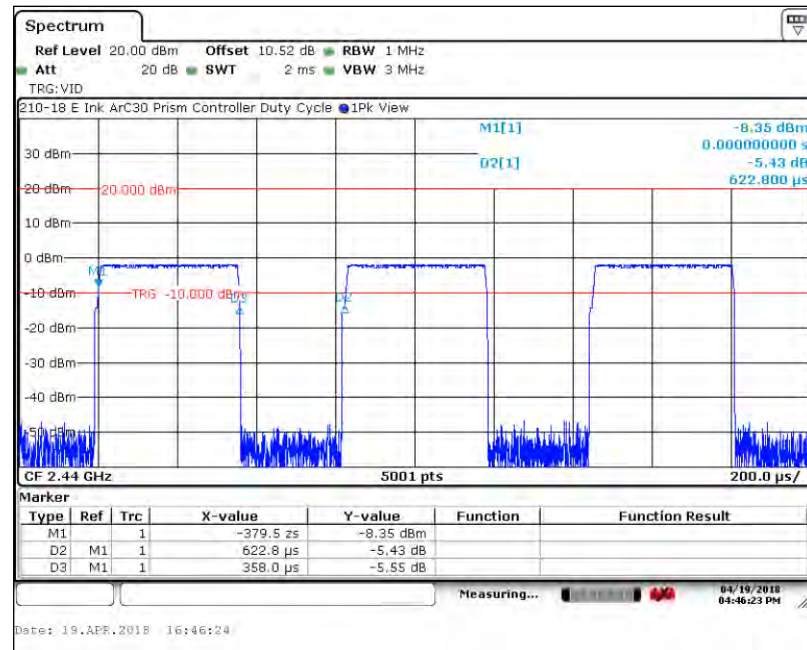

7.11.3. High Channel – 39, 2480 MHz

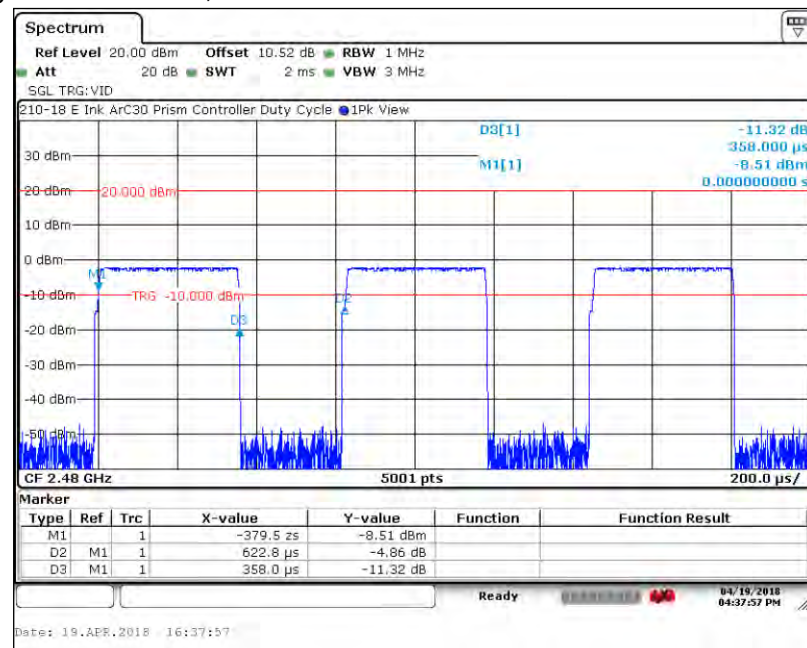

7. Measurement Data (continued)

7.12. Public Exposure to Radio Frequency Energy Levels (15.247(i) (1.1307 (b)(1)) RSS-GEN, ISSUE 5, section 3.4, RSS 102)

7.12.1. FCC 15.247 (i) Requirements

Requirement: Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines.

Channel Frequency	MPE Distance (cm)	DUT Output Power (dBm)	DUT Antenna Gain (dBi)	Power Density		Limit (mW/cm ²)	Result
				(mW/cm ²)	(W/m ²)		
				(4)		(5)	
2402	20	6.93	2.5	0.001744738	0.017447377	1	Compliant
2440	20	7.09	2.5	0.001810215	0.018102149	1	Compliant
2480	20	7.25	2.5	0.001878149	0.018781494	1	Compliant

$$PD = \frac{OP + AG}{(4 \times \pi \times d^2)}$$

- PD = Power Density (mW/cm²)
- OP = DUT Output Power (dBm)
- AG = DUT Antenna Gain (dBi)
- d = MPE Distance (cm)

1. Reference CFR 2.1093(b): For purposes of this section, a portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user.
2. Section 7.4 of this test report.
3. Data supplied by the client. Antenna specification data of worst case antenna used by the DUT.
4. Power density is calculated from field strength measurement and antenna gain.
5. Reference CFR 1.1310, Table 1: Limits for Maximum Permissible Exposure (MPE), Section (B): Limits for General Population/Uncontrolled Exposure.

Results: Passed - The device under test meets the exclusion requirement detailed for a device with a separation distance of 20 cm..

7. Measurement Data (continued)

7.12. Public Exposure to Radio Frequency Energy Levels (15.247(i) (1.1307 (b)(1)) RSS-GEN, ISSUE 5, section 5.5, RSS 102) (continued)

7.12.2. RSS-102 Issue 5 Requirements

Requirement: RF exposure evaluation is required if the separation distance between the user and/or bystander and the device's radiating element is greater than 20 cm, except when the device operates as follows: at or above 300 MHz and below 6 GHz and the source-based, time-averaged maximum e.i.r.p. of the device is equal to or less than $1.31 \times 10^{-2} f^{0.6834}$ W (adjusted for tune-up tolerance), where f is in MHz;

Test Notes: The limit is based on the formula in the detailed in Requirement.

Results: Compliant

Bluetooth Radio

Frequency	Separation Distance	Maximum Power ¹	Maximum Power ¹	RSS-102 Exemption Limit ²	Result
(MHz)	(cm)	(mW)	(Watts)	(Watts)	
2402	≥ 20	4.93	0.005	2.68	Compliant
2440	≥ 20	5.12	0.005	2.71	Compliant
2480	≥ 20	5.31	0.005	2.74	Compliant

¹ Reference Section 7.3 of this report.

² Reference RSS-102, § 2.5.2 Exemption Limits for Routine Evaluation – RF Exposure Evaluation for distances greater than 20 cm. **Calculated using the formula $1.31 \times 10^{-2} \times f^{0.6834}$ W. f = frequency (MHz).**

8. Test Setup Photographs

8.1. Spurious Radiated Emissions, 10 kHz to 1 GHz – Front



8. Test Setup Photographs

8.2. Spurious Radiated Emissions, 10 kHz to 30 MHz – Rear



8. Test Setup Photographs

8.3. Spurious Radiated Emissions, 30 MHz to 1 GHz – Rear



8. Test Setup Photographs

8.4. Radiated Emissions above 1 to 18 GHz – Front



8. Test Setup Photographs

8.5. Radiated Emissions 1 to 18 GHz – Rear



8. Test Setup Photographs

8.6. Radiated Emissions 18 to 26 GHz– Side View



8. Test Setup Photographs

8.7. Power Line Conducted Emissions – Front



8. Test Setup Photographs

8.8. Power Line Conducted Emissions – Rear



8. Test Setup Photographs

8.9. Product Conducted Measurements 1 of 2



8. Test Setup Photographs

8.10. Product Conducted Measurements 2 of 2



9. Test Site Description

Compliance Worldwide is located at 357 Main Street in Sandown, New Hampshire. The test sites at Compliance Worldwide are used for conducted and radiated emissions testing in accordance with the Federal Communications Commission (FCC) and Industry Canada standards. Through our American Association for Laboratory Accreditation (A2LA) ISO Guide 17025:2005 Accreditation our test sites are designated with the FCC (designation number **US1091**), Industry Canada (file number **IC 3023A-1**) and VCCI (Member number 3168) under registration number A-0274.

Compliance Worldwide is also designated as a Phase 1 CAB under APEC-MRA (US0132) for Australia/New Zealand AS/NZS CISPR 22, Chinese-Taipei (Taiwan) BSMI CNS 13438 and Korea (RRA) KN 11, KN 13, KN 14-1, KN 22, KN 32, KN 61000-6-3, KN 61000-6-4.

The radiated emissions test site is a 3 and 10 meter enclosed open area test site (OATS). Personnel, support equipment and test equipment are located in the basement beneath the OATS ground plane.

The conducted emissions site is part of a 16' x 20' x 12' ferrite tile chamber and uses one of the walls for the vertical ground plane required by EN 55022. A second conducted emissions site is also located in the basement of the OATS site with a 2.3 x 2.5 meter ground plane and a 2.4 x 2.4 meter vertical wall.

Both sites are designed to test products or systems 1.5 meters W x 1.5 meters L x 2.0 meters H, floor standing or table top.

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.1. Channel 37, 2402 MHz

A1.1.1. Measurement Results: Parallel Antenna

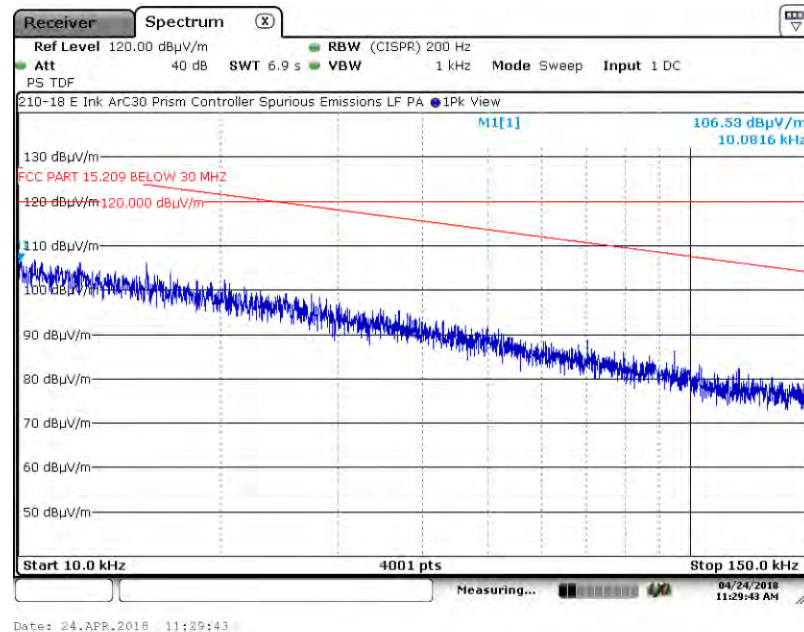

A1.1.2. Measurement Results: Perpendicular Antenna

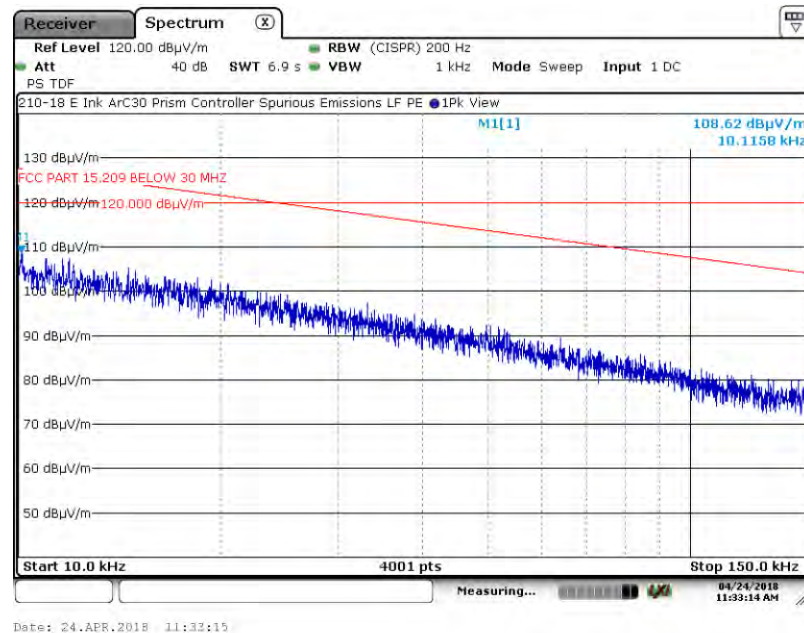

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)

A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.1. Channel 37, 2402 MHz

A1.1.3. Measurement Results: Ground-Parallel Antenna

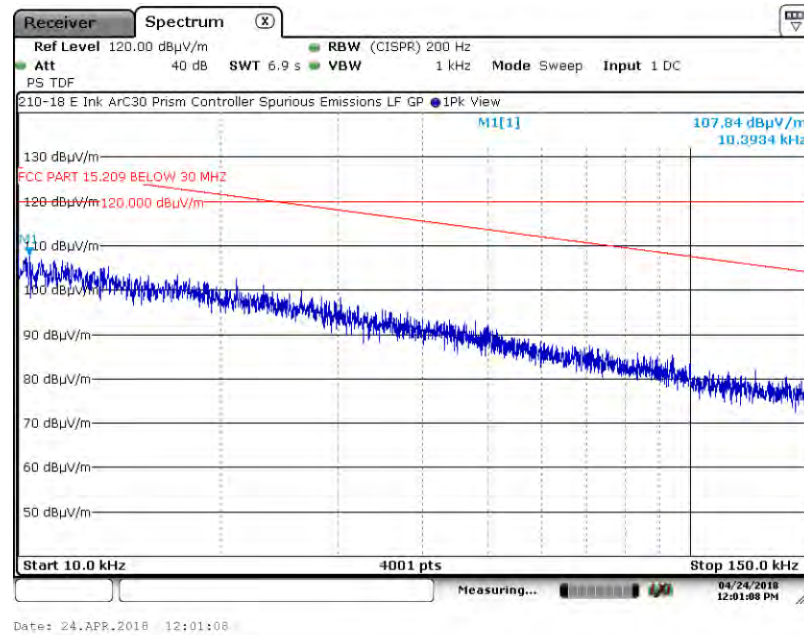

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.2. Channel 17, 2440 MHz

A1.2.1. Measurement Results: Parallel Antenna

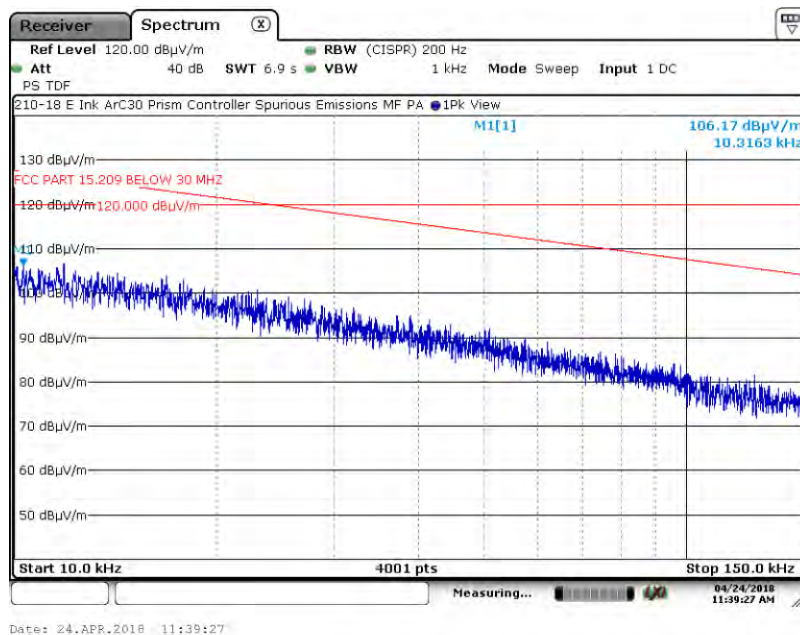

A1.2.2. Measurement Results: Perpendicular Antenna

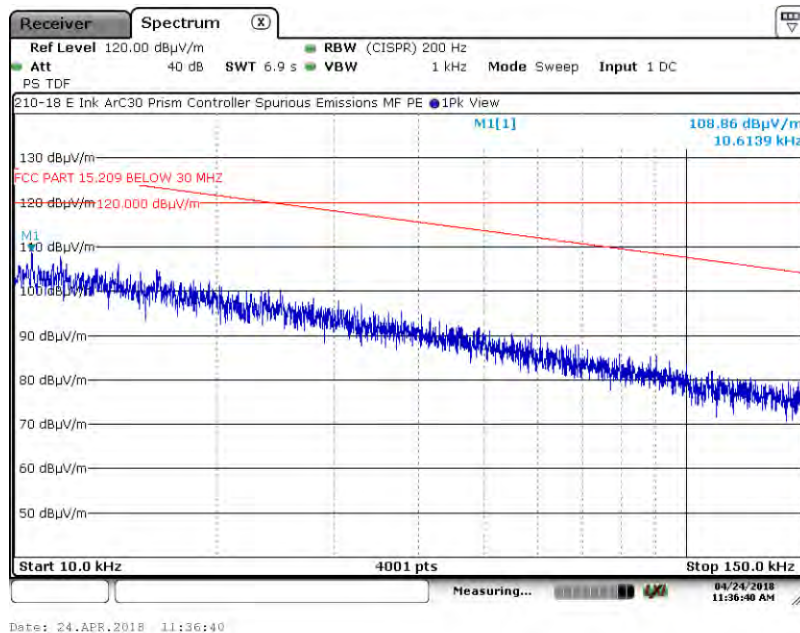

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)

A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.2. Channel 17, 2440 MHz

A1.2.3. Measurement Results: Ground-Parallel Antenna

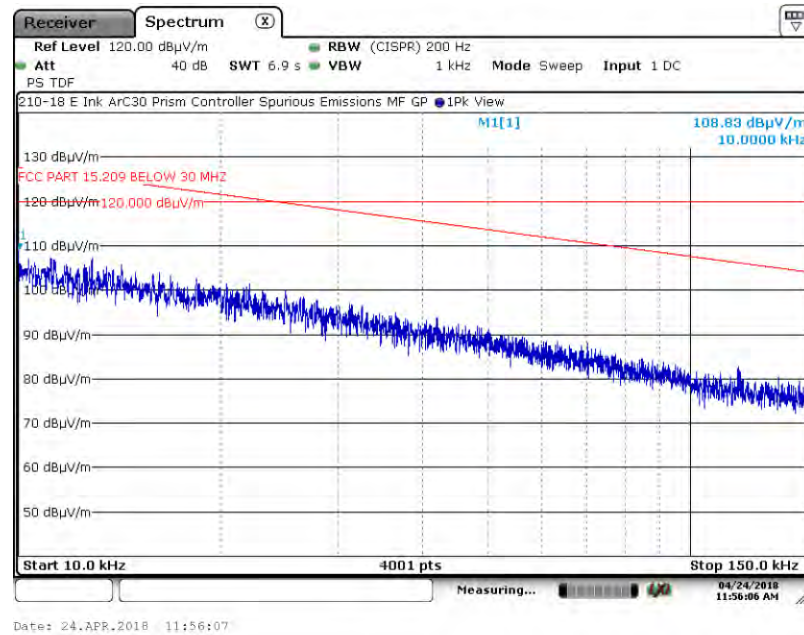

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.3. Channel 39, 2480 MHz

A1.3.1. Measurement Results: Parallel Antenna

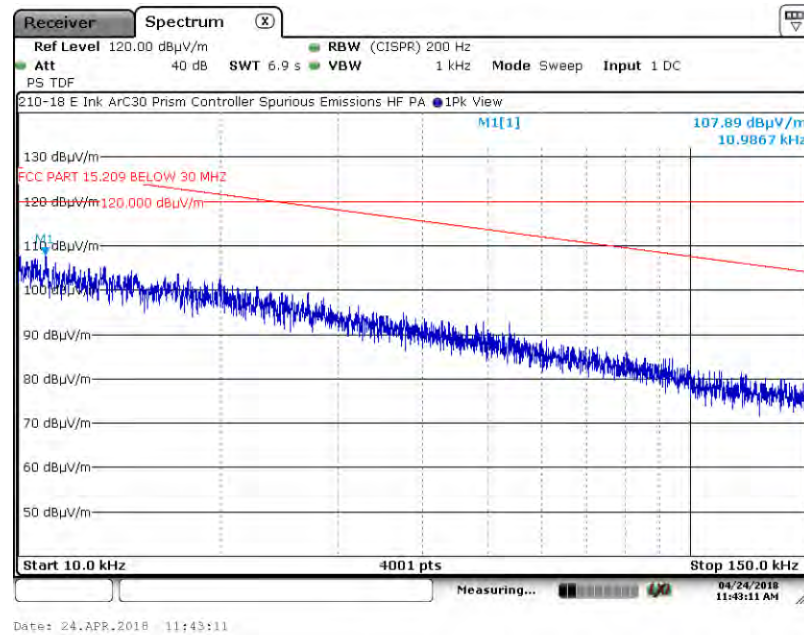

A1.3.2. Measurement Results: Perpendicular Antenna

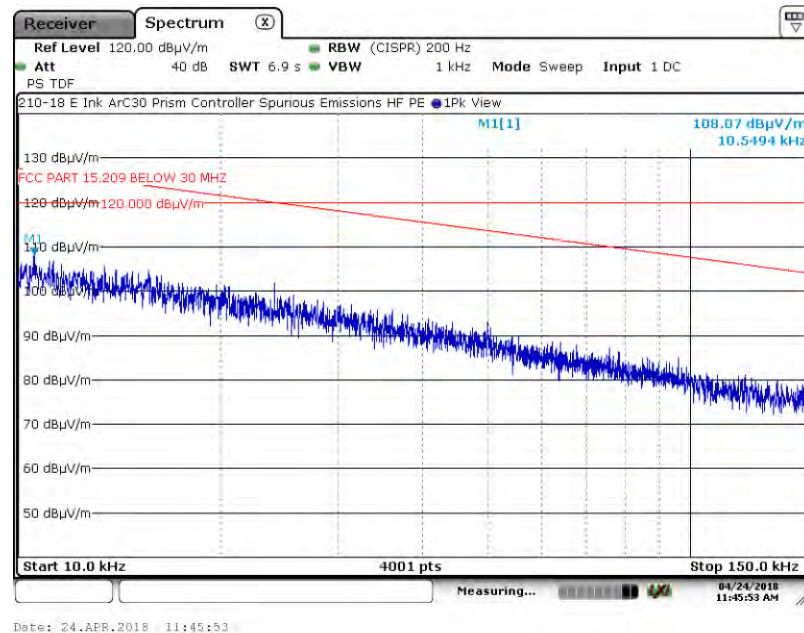

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)

A1. Spurious Radiated Emissions (10 kHz – 150 kHz) Test Results

A1.3. Channel 39, 2480 MHz

A1.3.3. Measurement Results: Ground-Parallel Antenna

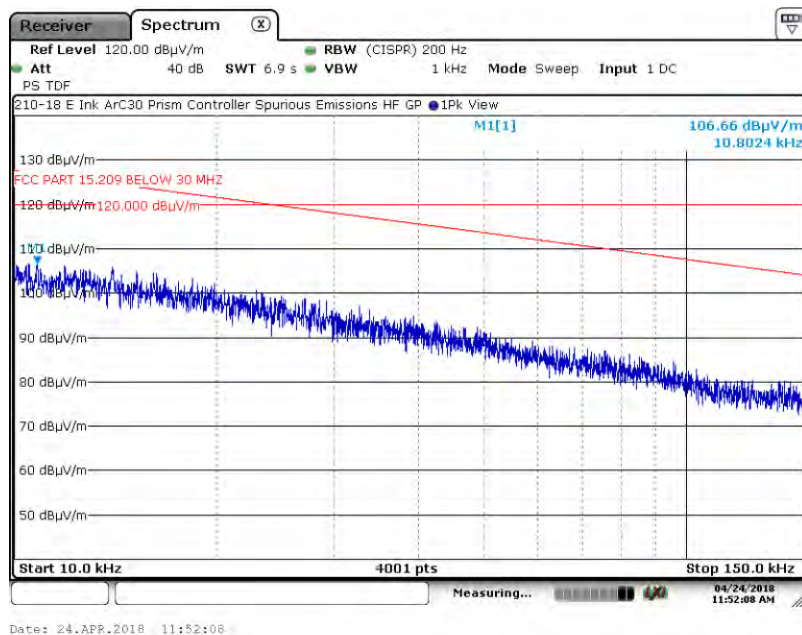

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.1. Channel 37, 2402 MHz

A2.1.1. Measurement Results: Parallel Antenna

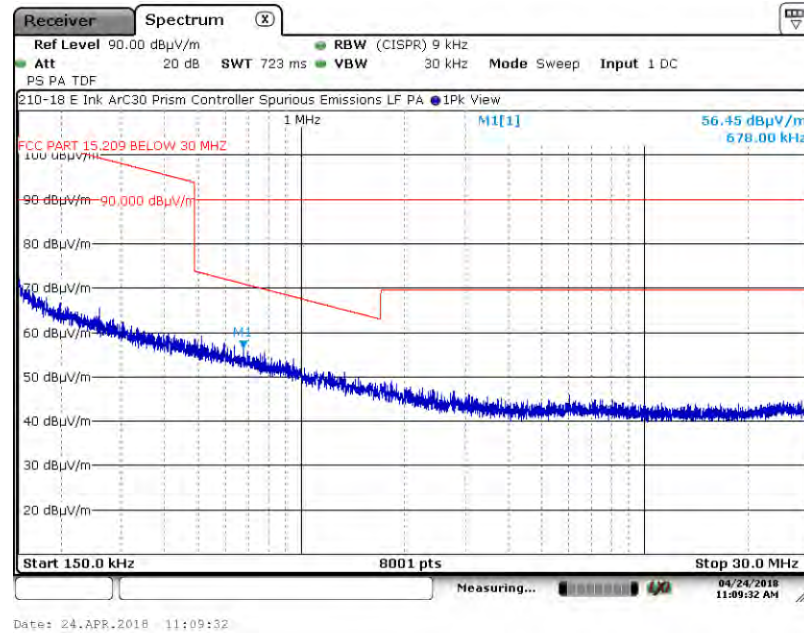

A2.1.2. Measurement Results: Perpendicular Antenna

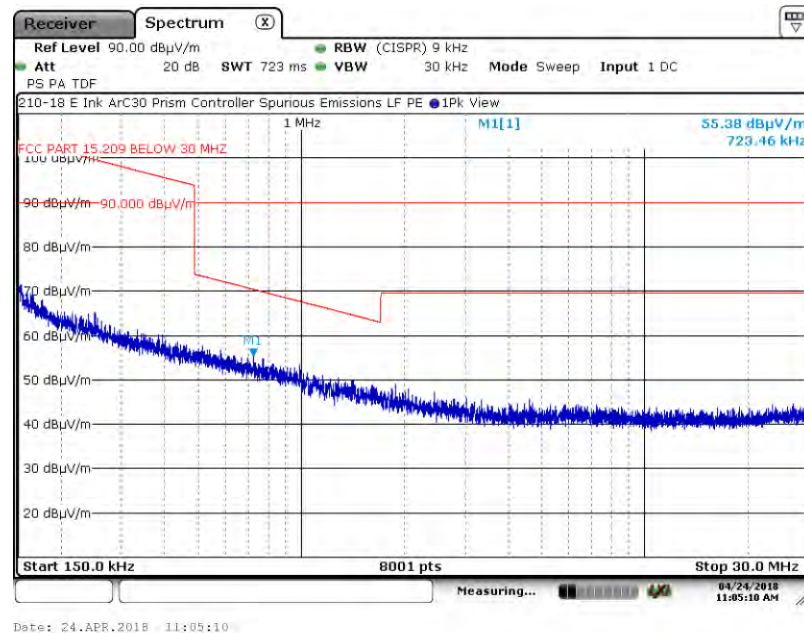

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)

A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.1. Channel 37, 2402 MHz

A2.1.3. Measurement Results: Ground-Parallel Antenna

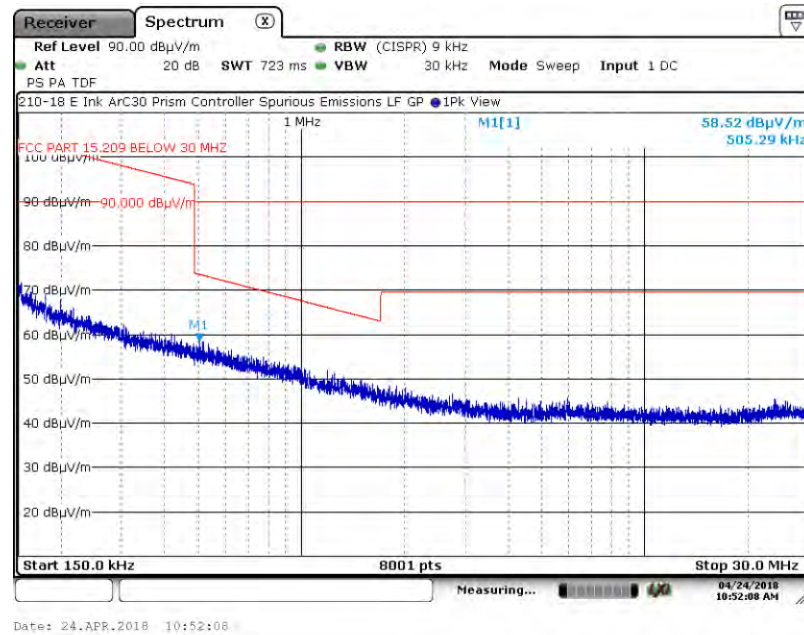

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.2. Channel 17, 2440 MHz

A2.2.1. Measurement Results: Parallel Antenna

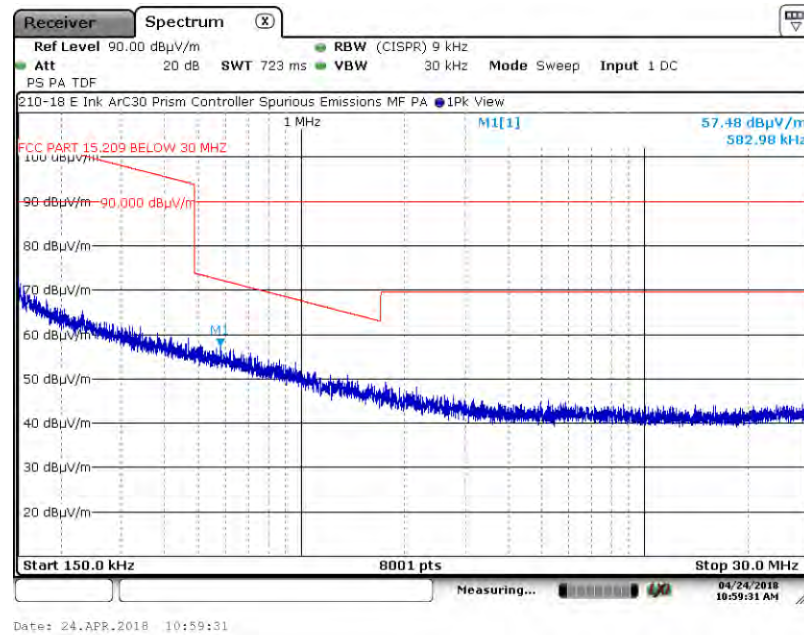

A2.2.2. Measurement Results: Perpendicular Antenna

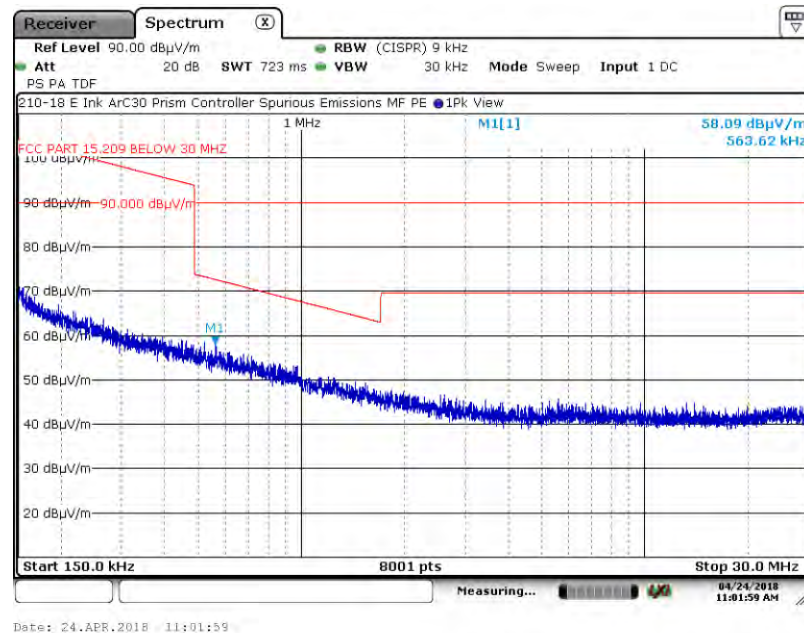

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)

A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.2. Channel 17, 2440 MHz

A2.2.3. Measurement Results: Ground-Parallel Antenna

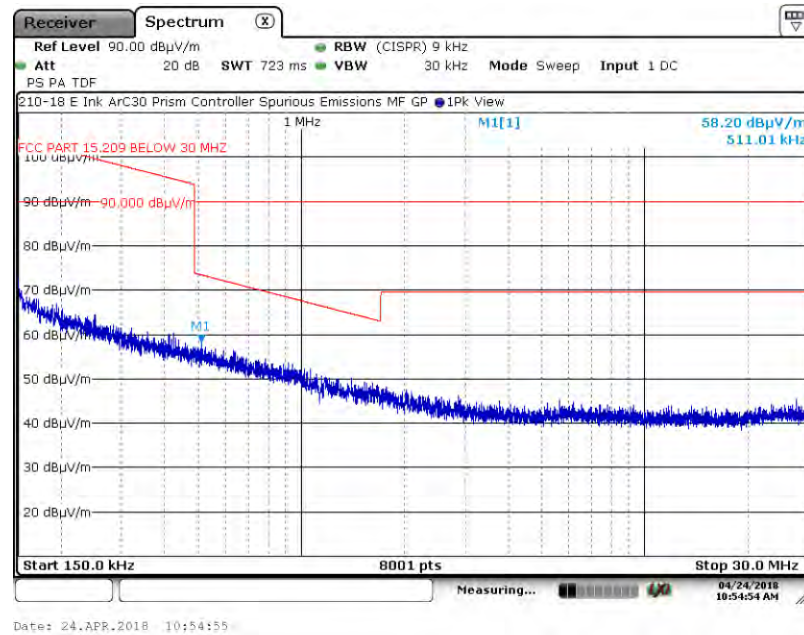

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.3. Channel 39, 2480 MHz

A2.3.1. Measurement Results: Parallel Antenna

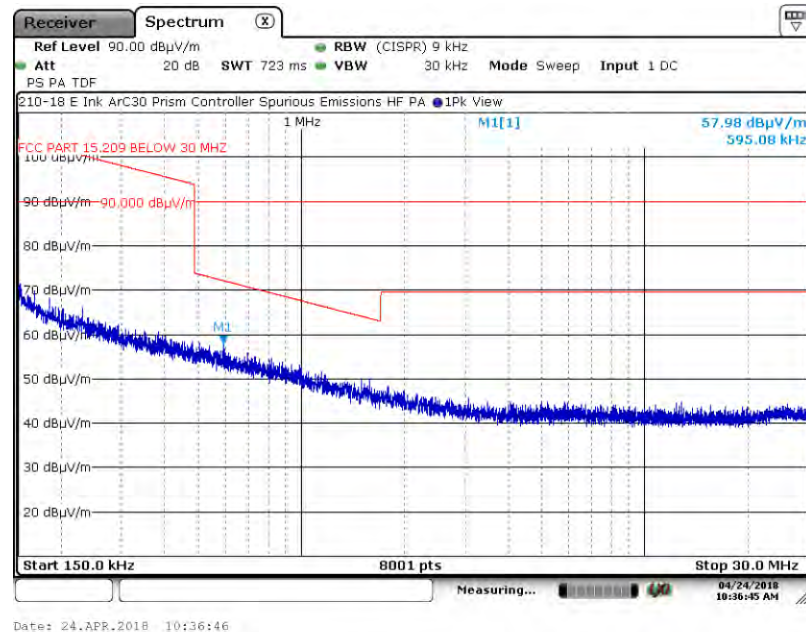

A2.3.2. Measurement Results: Perpendicular Antenna

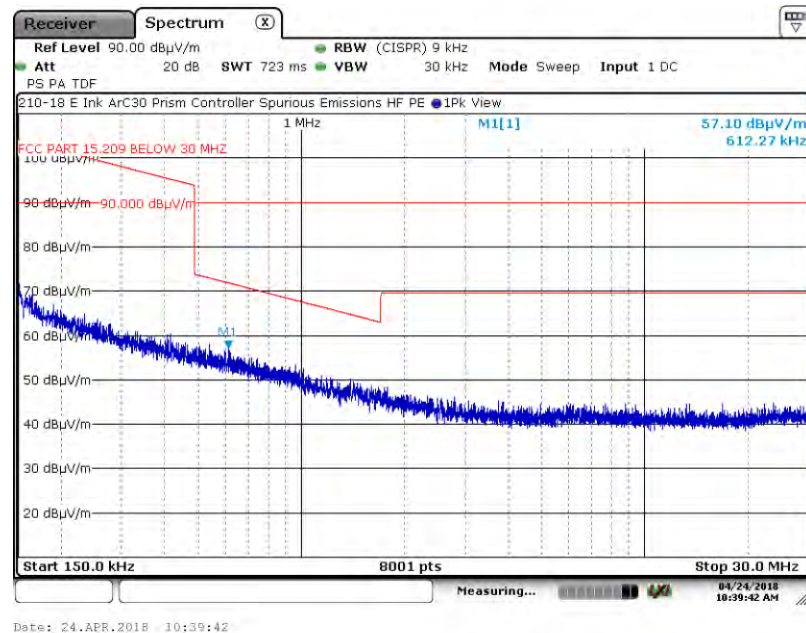

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)

A2. Spurious Radiated Emissions (150 kHz – 30 MHz) Test Results

A2.3. Channel 39, 2480 MHz

A2.3.3. Measurement Results: Ground-Parallel Antenna

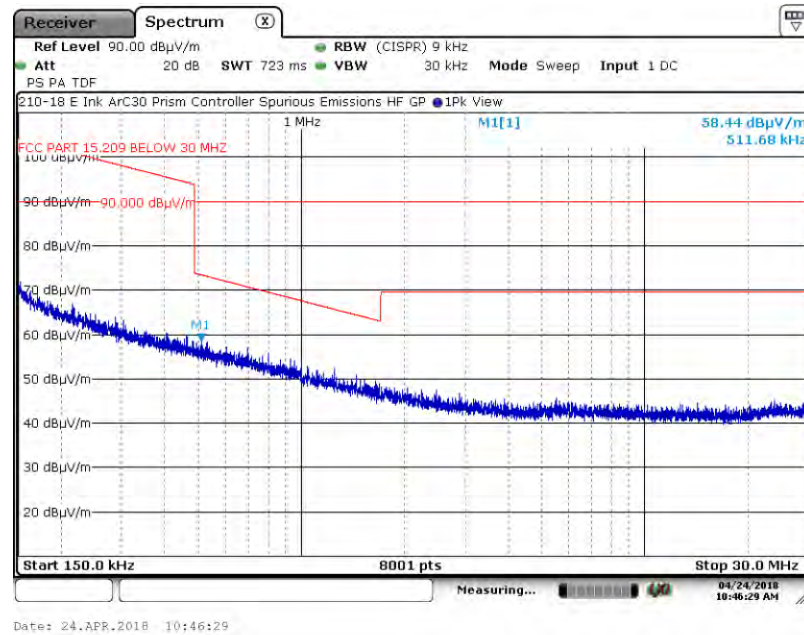

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A3. Spurious Radiated Emissions (30 MHz – 1 GHz) Test Results

A3.1. Channel 37, 2402 MHz

A3.1.1. Measurement Results: Horizontal Receive Antenna Polarity

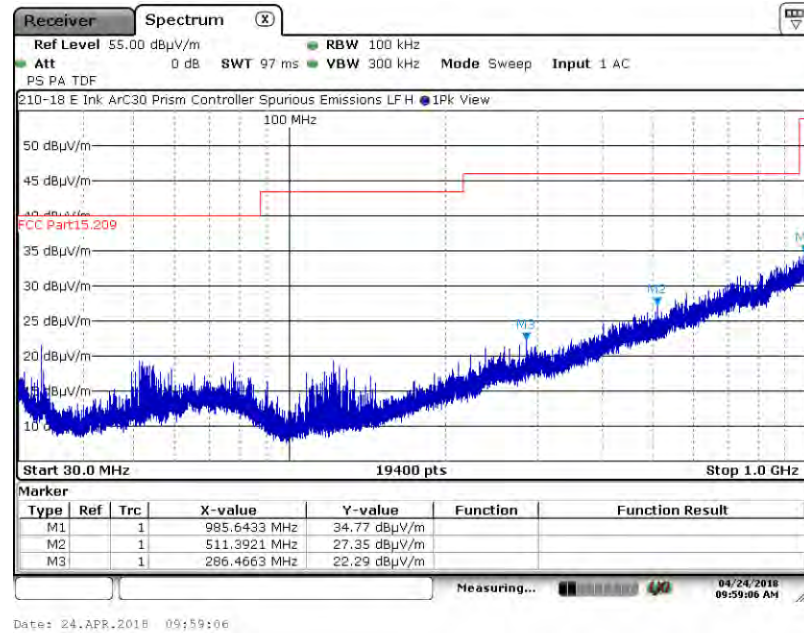

A3.1.2. Measurement Results: Vertical Receive Antenna Polarity

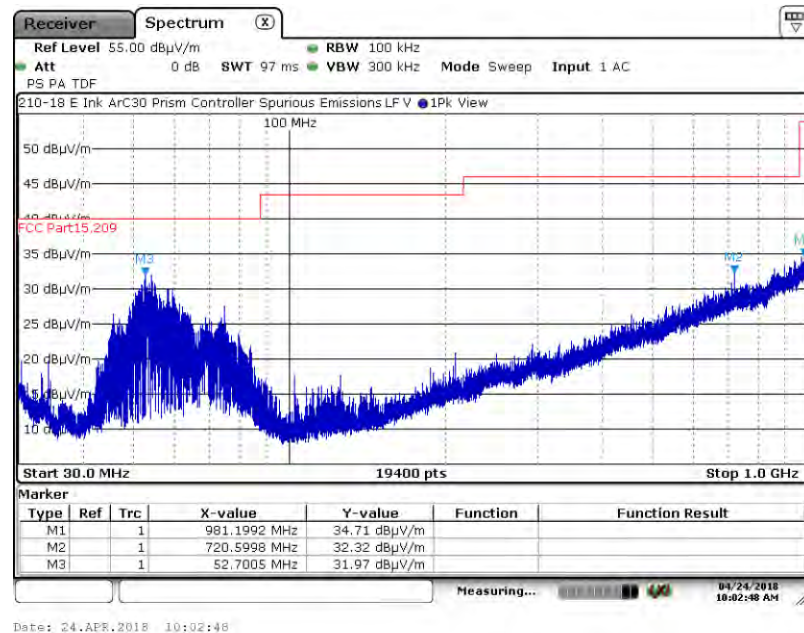

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A3. Spurious Radiated Emissions (30 MHz – 1 GHz) Test Results

A3.2. Channel 17, 2440 MHz

A3.2.1. Measurement Results: Horizontal Receive Antenna Polarity

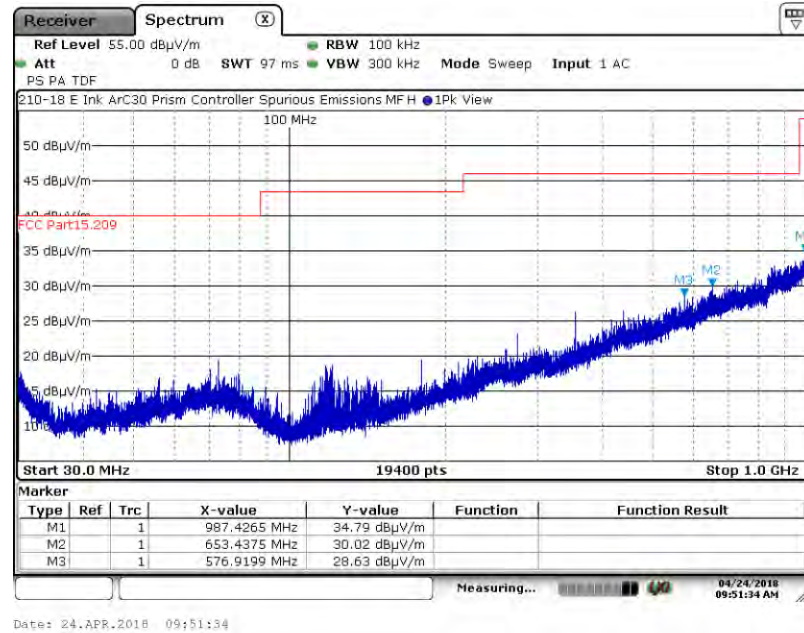

A3.2.2. Measurement Results: Vertical Receive Antenna Polarity

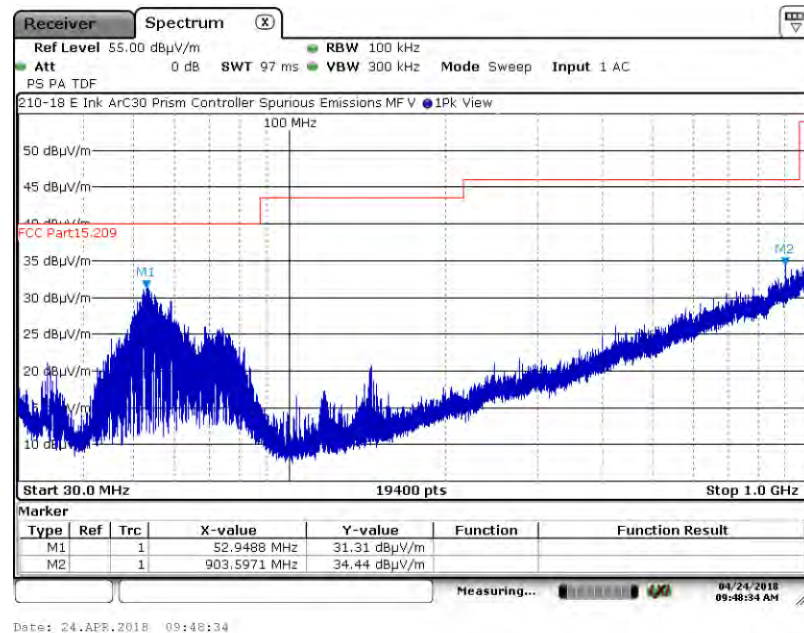

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A3. Spurious Radiated Emissions (30 MHz – 1 GHz) Test Results

A3.3. Channel 39, 2480 MHz

A3.3.1. Measurement Results: Horizontal Receive Antenna Polarity

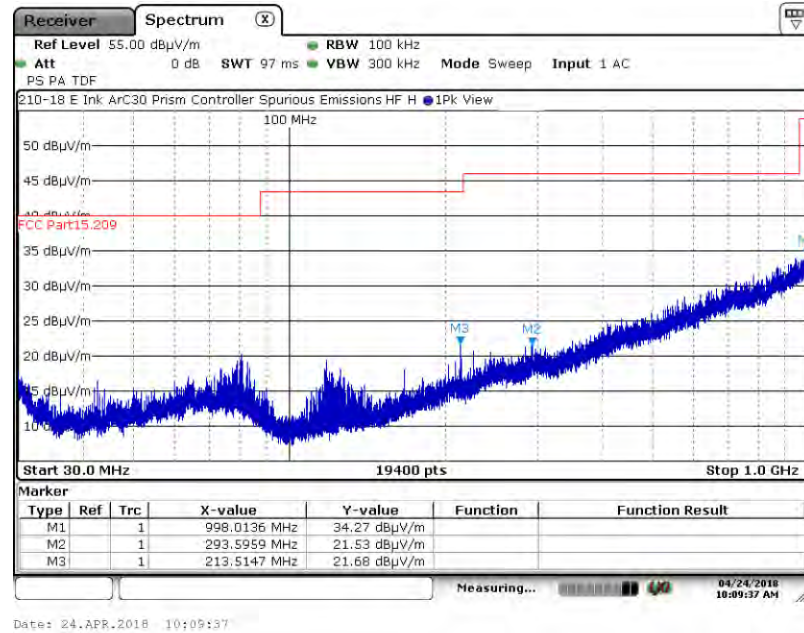

A3.3.2. Measurement Results: Vertical Receive Antenna Polarity

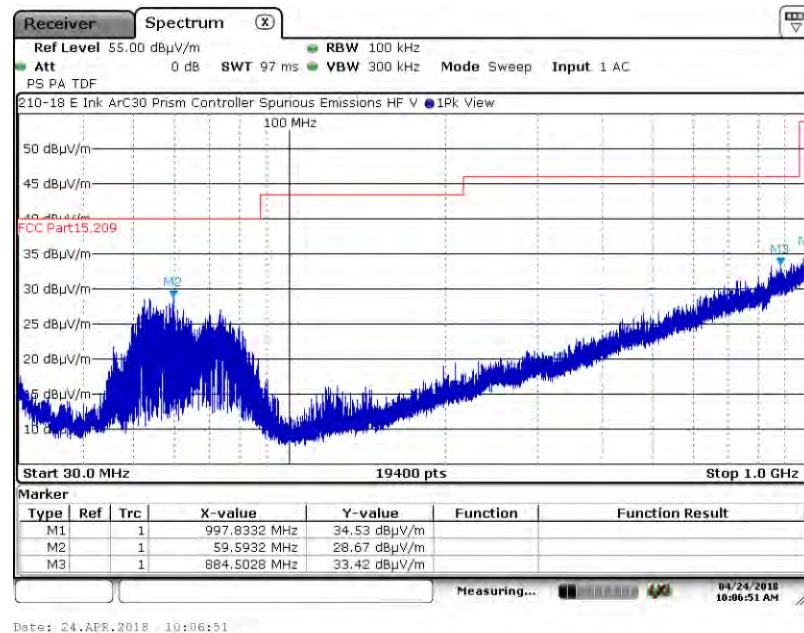

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A4. Spurious Radiated Emissions (1 GHz – 2.4 GHz) Test Results

A4.1. Channel 37, 2402 MHz

A4.1.1. Measurement Results: Horizontal Receive Antenna Polarity

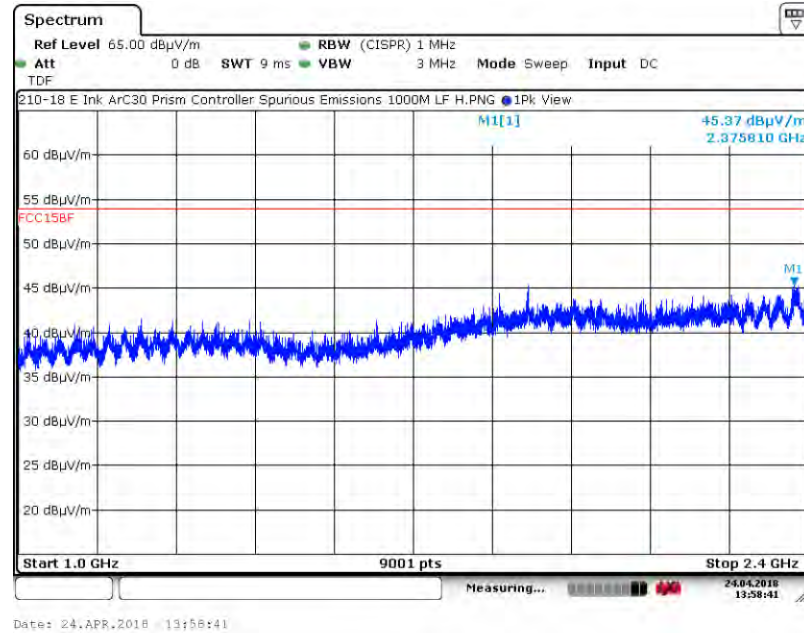

A4.1.2. Measurement Results: Vertical Receive Antenna Polarity

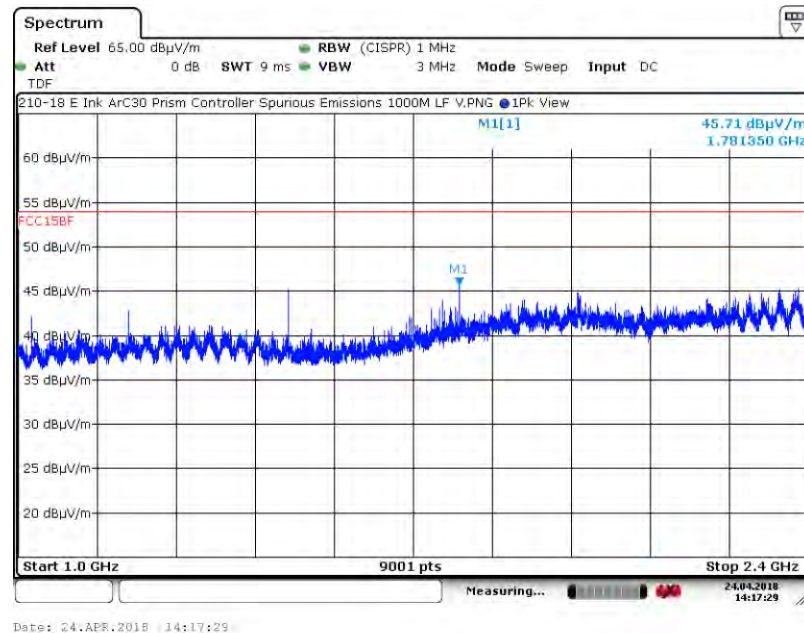

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A4. Spurious Radiated Emissions (1 GHz – 2.4 GHz) Test Results

A4.2. Channel 17, 2440 MHz

A4.2.1. Measurement Results: Horizontal Receive Antenna Polarity

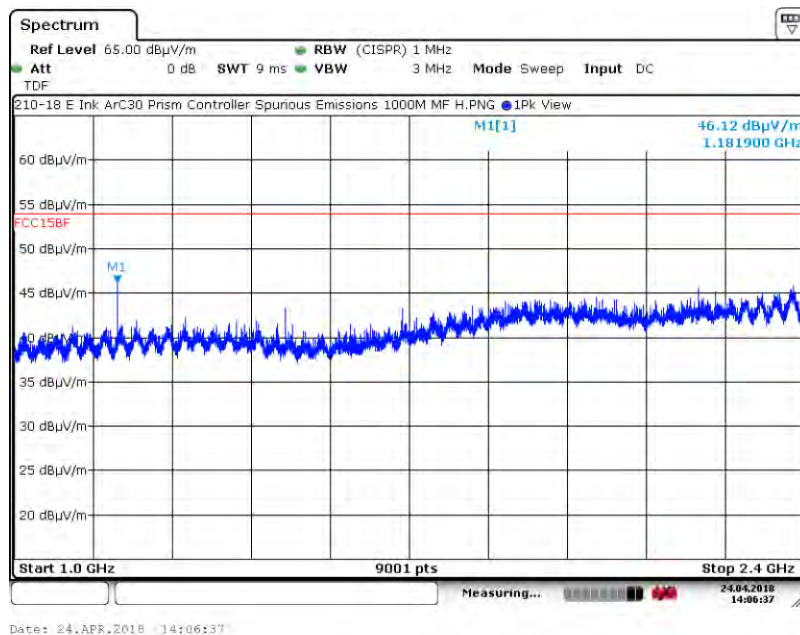

A4.2.2. Measurement Results: Vertical Receive Antenna Polarity

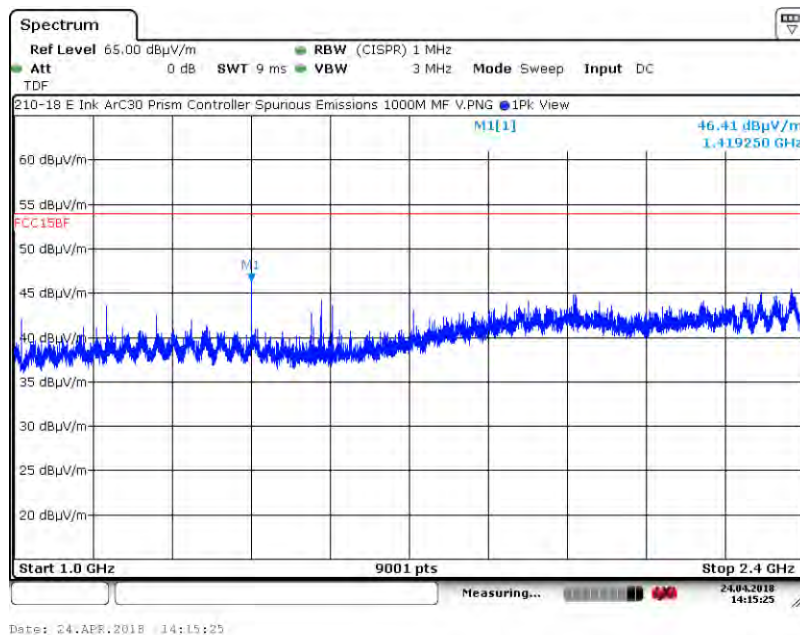

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A4. Spurious Radiated Emissions (1 GHz – 2.4 GHz) Test Results

A4.3. Channel 39, 2480 MHz

A4.3.1. Measurement Results: Horizontal Receive Antenna Polarity

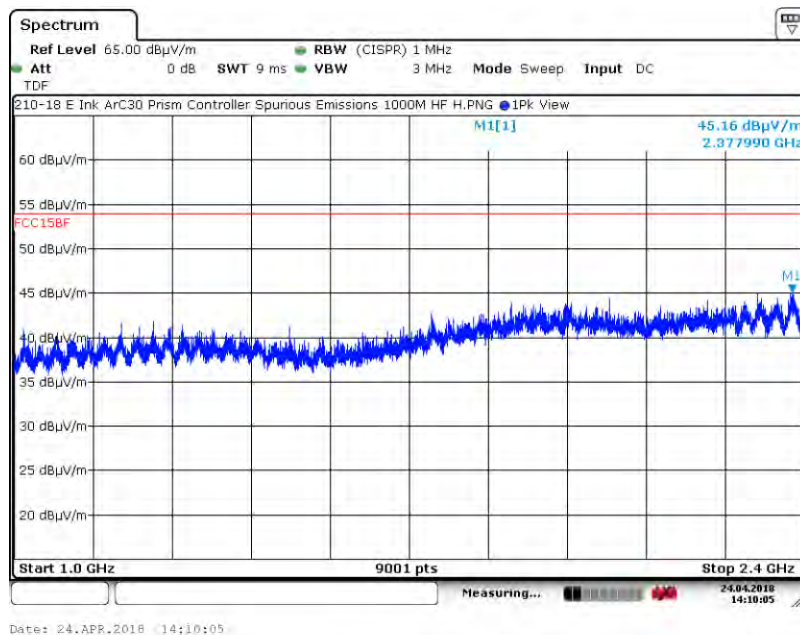

A4.3.2. Measurement Results: Vertical Receive Antenna Polarity

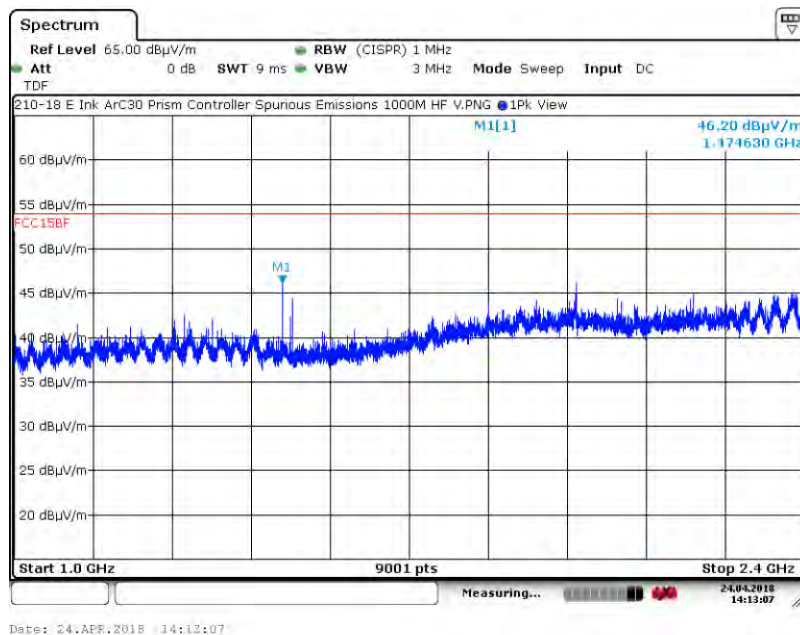

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A5. Spurious Radiated Emissions (2.4835 GHz – 10 GHz) Test Results

A5.1. Channel 37, 2402 MHz

A5.1.1. Measurement Results: Horizontal Receive Antenna Polarity

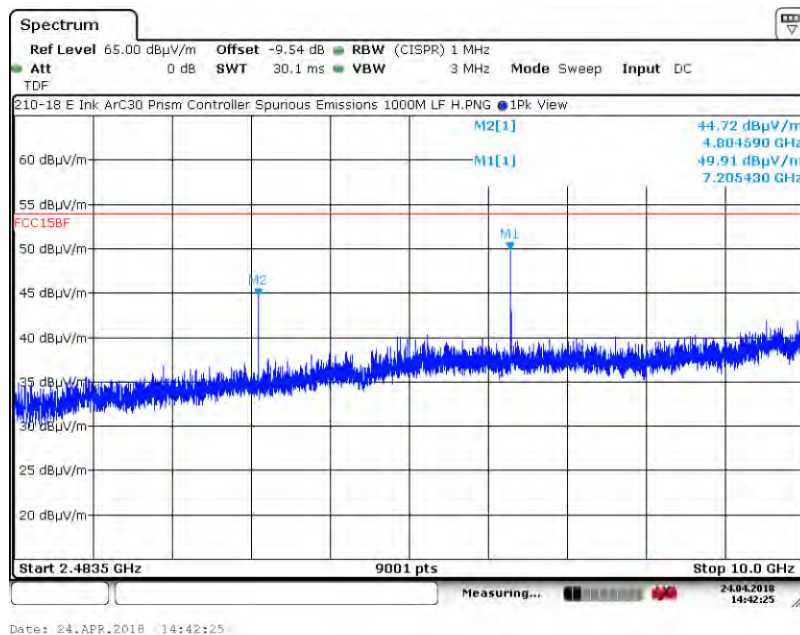

A5.1.2. Measurement Results: Vertical Receive Antenna Polarity

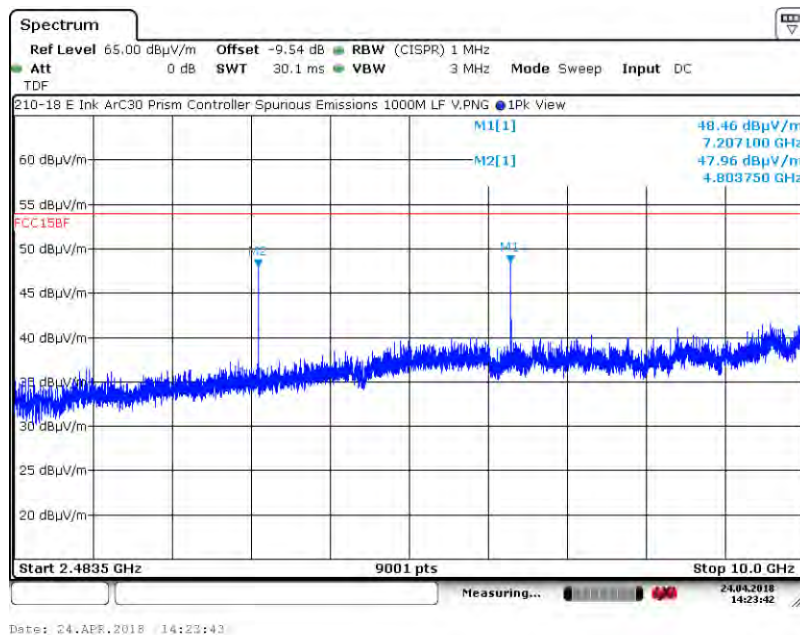

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A5. Spurious Radiated Emissions (2.4835 GHz – 10 GHz) Test Results

A5.2. Channel 17, 2440 MHz

A5.2.1. Measurement Results: Horizontal Receive Antenna Polarity

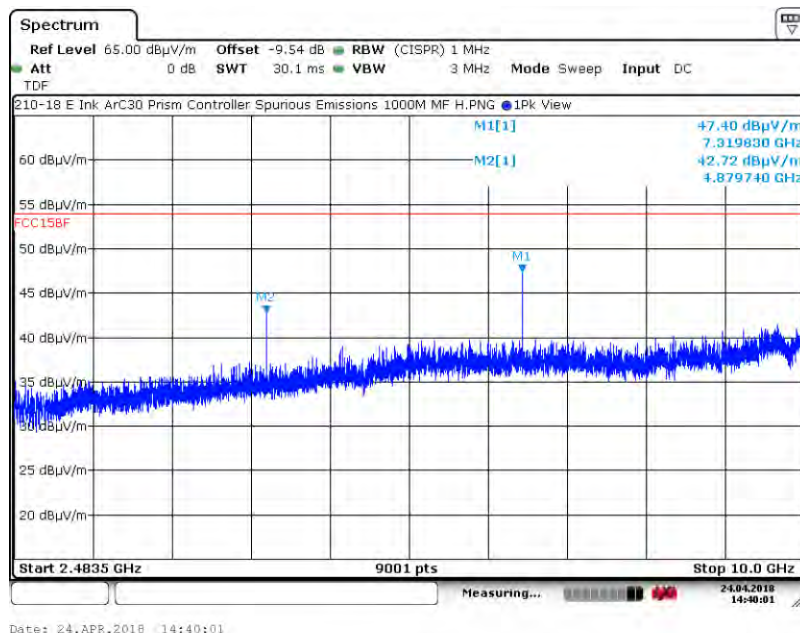

A5.2.2. Measurement Results: Vertical Receive Antenna Polarity

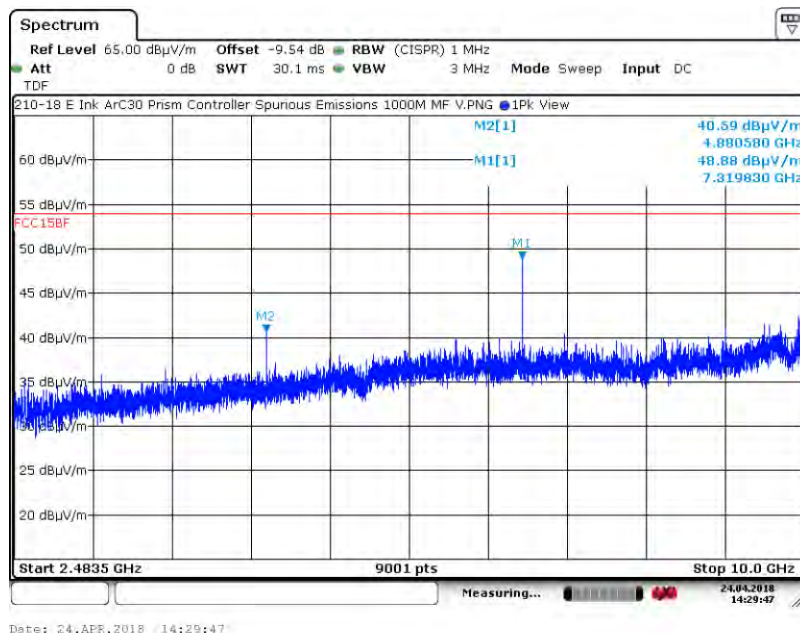

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A5. Spurious Radiated Emissions (2.4835 GHz – 10 GHz) Test Results

A5.3. Channel 39, 2480 MHz

A5.3.1. Measurement Results: Horizontal Receive Antenna Polarity

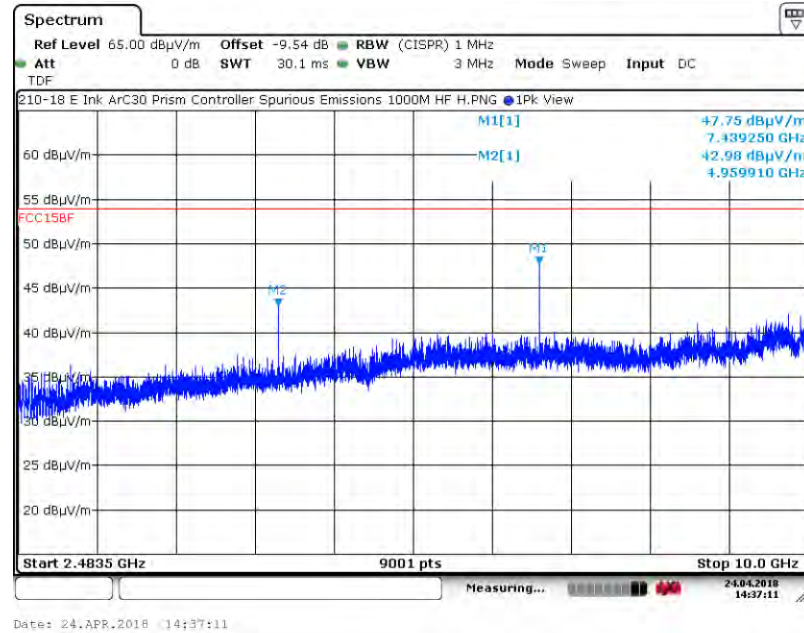

A5.3.2. Measurement Results: Vertical Receive Antenna Polarity

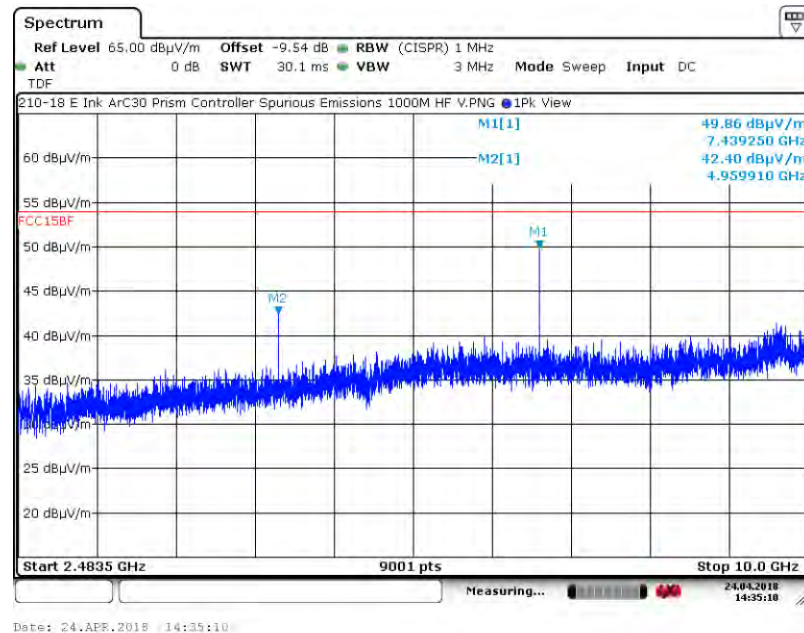

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 40 GHz)


A6. Spurious Radiated Emissions (10 GHz – 18 GHz) Test Results

A6.1. Channel 37, 2402 MHz

A6.1.1. Measurement Results: Horizontal Receive Antenna Polarity

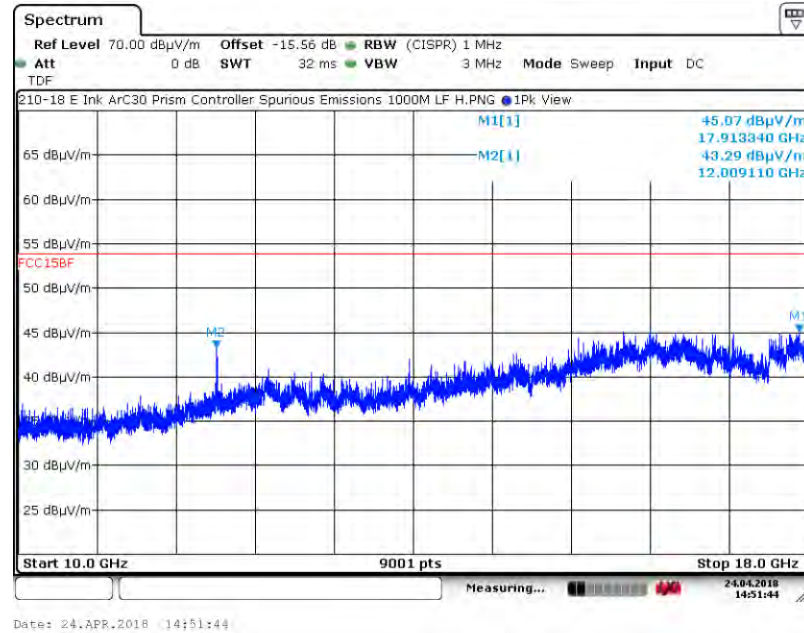

A6.1.2. Measurement Results: Vertical Receive Antenna Polarity

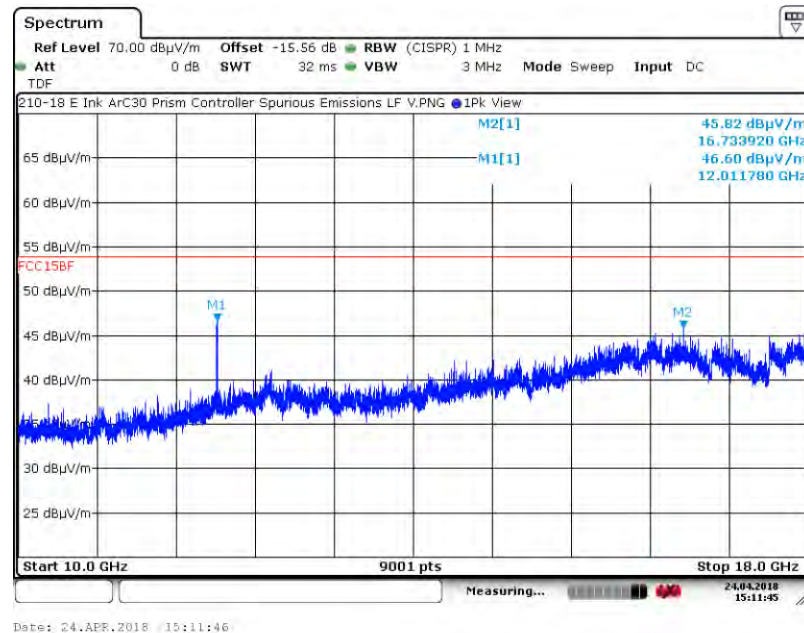

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A6. Spurious Radiated Emissions (10 GHz – 18 GHz) Test Results

A6.2. Channel 17, 2440 MHz

A6.2.1. Measurement Results: Horizontal Receive Antenna Polarity

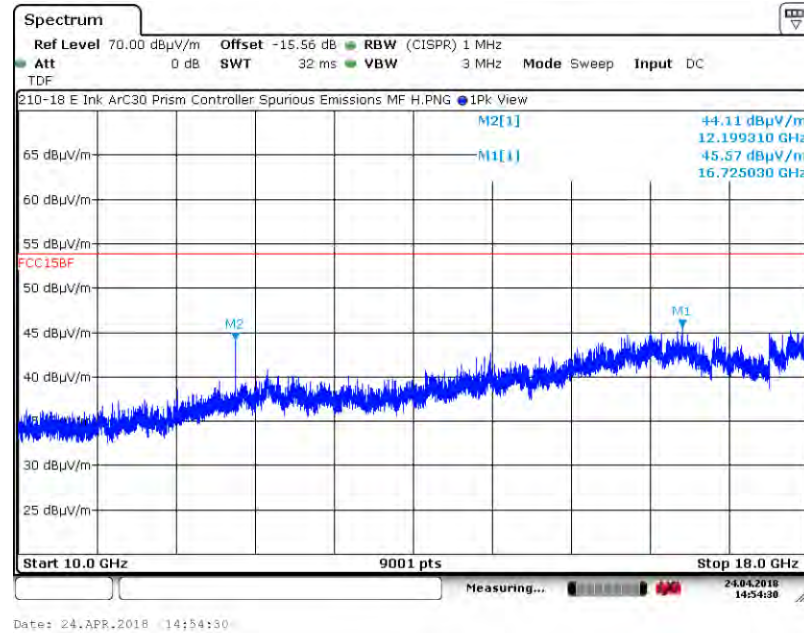

A6.2.2. Measurement Results: Vertical Receive Antenna Polarity

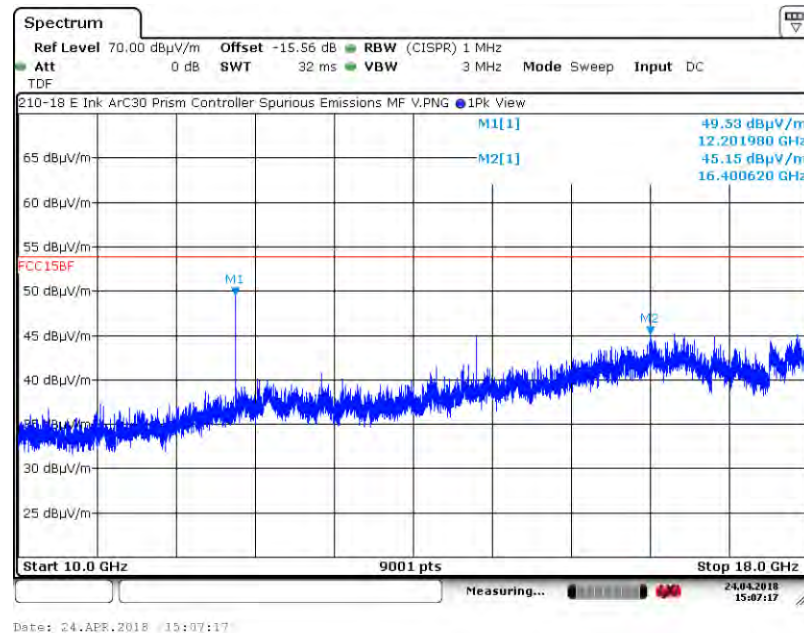

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A6. Spurious Radiated Emissions (10 GHz – 18 GHz) Test Results

A6.3. Channel 39, 2480 MHz

A6.3.1. Measurement Results: Horizontal Receive Antenna Polarity

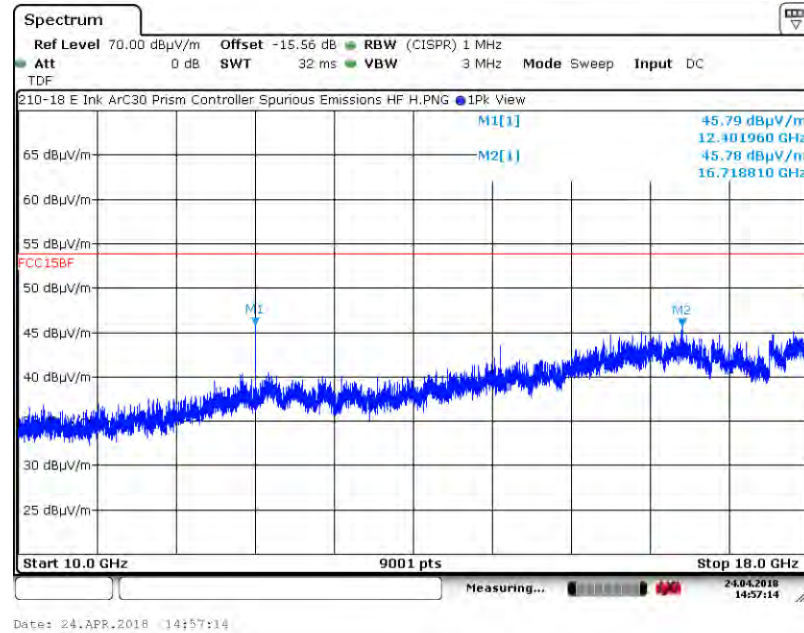

A6.3.2. Measurement Results: Vertical Receive Antenna Polarity

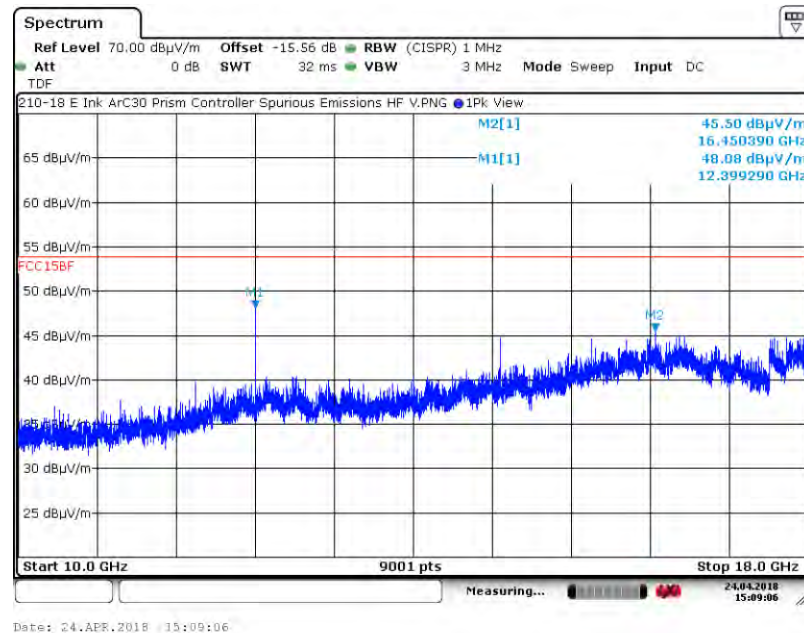

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A7. Spurious Radiated Emissions (18 GHz – 26 GHz) Test Results

A7.1. Channel 37, 2402 MHz

A7.1.1. Measurement Results: Horizontal Receive Antenna Polarity

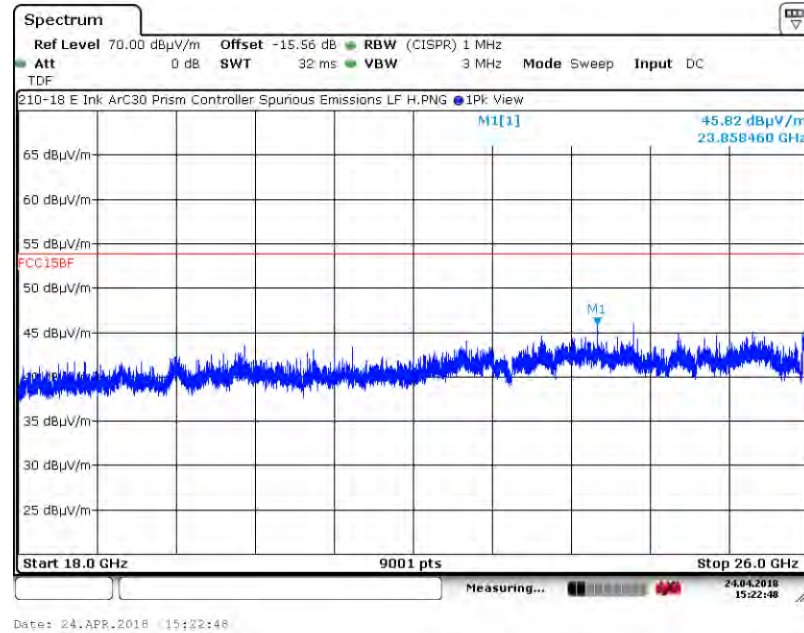

A7.1.2. Measurement Results: Vertical Receive Antenna Polarity

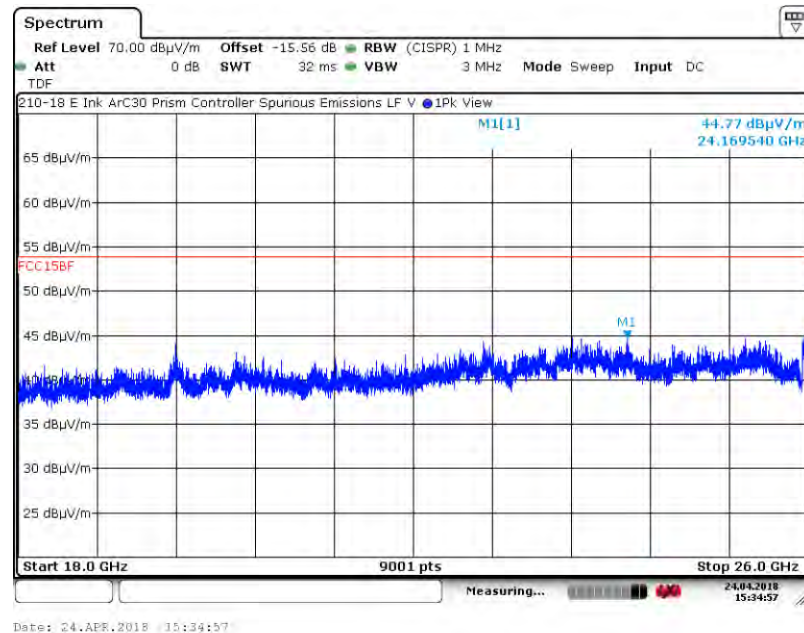

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)


A7. Spurious Radiated Emissions (18 GHz – 26 GHz) Test Results

A7.2. Channel 17, 2440 MHz

A7.2.1. Measurement Results: Horizontal Receive Antenna Polarity

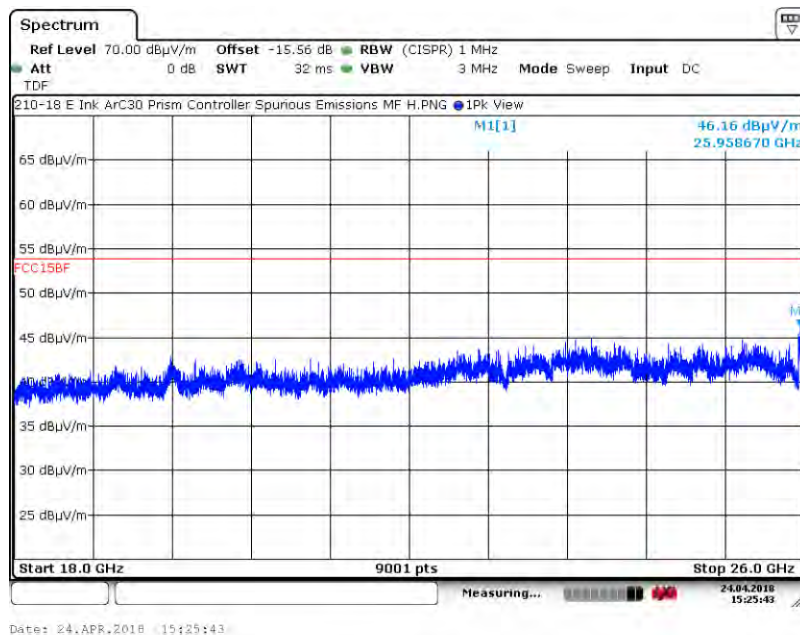

A7.2.2. Measurement Results: Vertical Receive Antenna Polarity

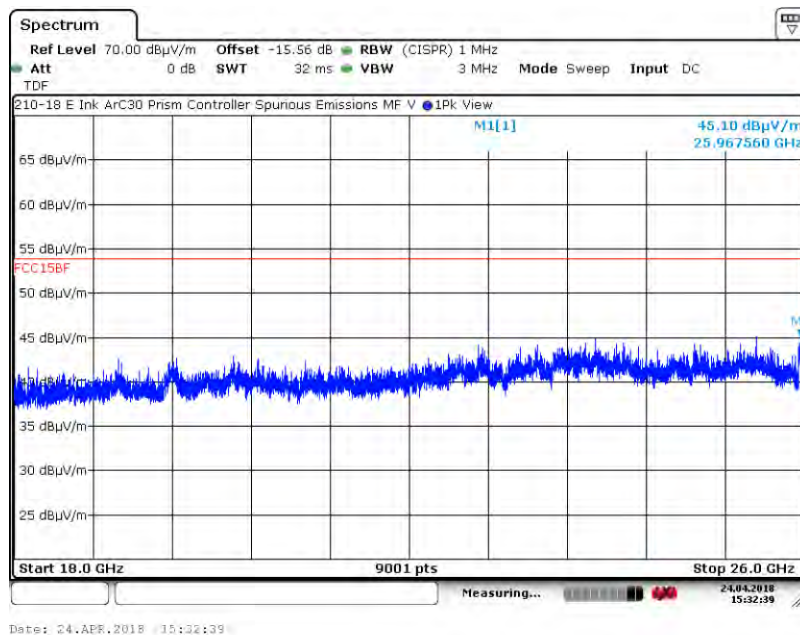

Test Number: 210-18R


Issue Date: 8/24/2018

Appendix A - Transmitter Spurious Radiated Emissions (10 kHz to 26 GHz)

A7. Spurious Radiated Emissions (18 GHz – 26 GHz) Test Results

A7.3. Channel 39, 2480 MHz

A7.3.1. Measurement Results: Horizontal Receive Antenna Polarity

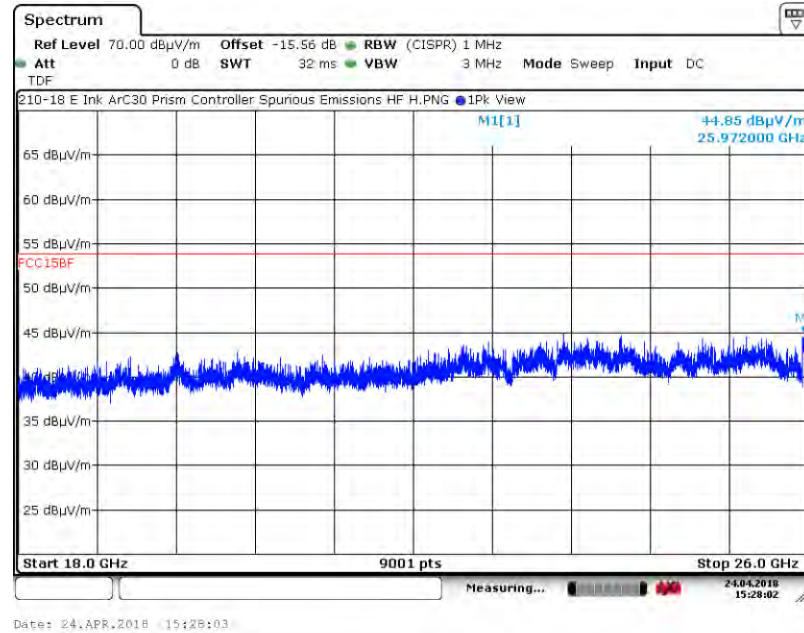

A7.3.2. Measurement Results: Vertical Receive Antenna Polarity

