

RF exposure evaluation

Human exposure to RF emissions from mobile devices (47 CFR §2.1091) may be evaluated based on the MPE limits adopted by the FCC for electric and magnetic field strength and/or power density, as appropriate, since exposures are assumed to occur at distances of 20 cm or more from persons.

According to KDB 680106 D01 RF Exposure Wireless Charging Apps, RF exposure evaluation should be conducted assuming a user separation distance of 15 cm for devices designed for typical desktop applications. E and H field strength measurements or numerical modelling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device


1. Limits For General Population/Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW /cm ²)	Averaging Time (minutes)
0.3 ~ 3.0	614	1.63	(100)*	30
3.0 ~ 30	824/f	2.19/f	(180/f ₂)*	30
30 ~ 300	27.5	0.073	0.2	30
300~1500	-	-	f/1500	30
1500~100000	-	-	1.0	30

2. The Equipment List

Instrument	Manufacturer	Model No.	Serial No.	Calibration Until
B-Field Probe	Narda	B-Field Probe 100 cm ²	B-0137	Nov. 18, 2018
Magnetic field meter	Narda	ELT-400	B-0137	Nov. 18, 2018
Broadband field meter	Narda	NBM-550	B-0959	Nov. 18, 2018
B-Field Probe	Narda	EF0391	A-1034	Nov. 18, 2018

3. Test Setup Block

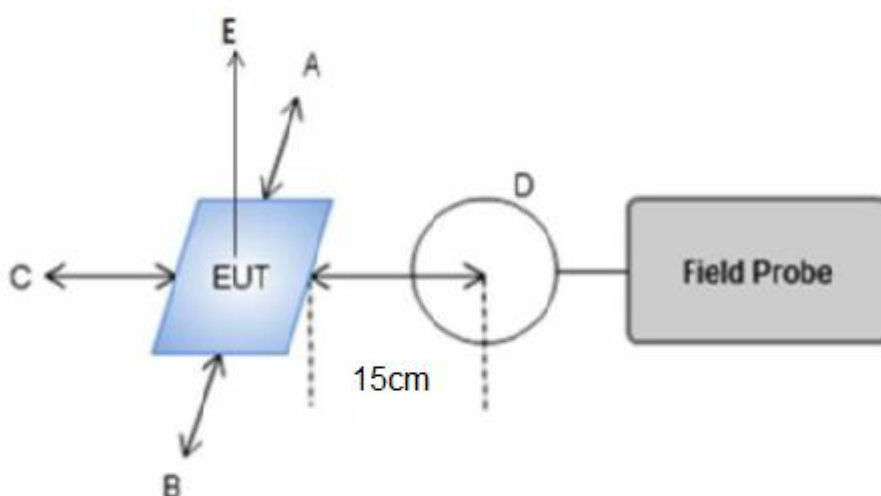

Requirements:	<p>(1) Power transfer frequency is less than 1 MHz.</p> <p>(2) Output power from each primary coil is less than or equal to 15 watts.</p> <p>(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.</p> <p>(4) Client device is placed directly in contact with the transmitter.</p> <p>(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).</p> <p>(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.</p>
Test Result:	Meet all the above requirements.

4. Version

Version No.	Date	Description
00	16 Aug., 2018	Original

Tested By:

Zora Lee

Date:

16 Aug., 2018

Test Engineer

Reviewed By:

Wimer Zhang

Date:

16 Aug., 2018

Project Engineer

5. MPE EVALUATION RESULTS

Remark: Pre-scan input: 5V and input: 9V of the Power supply, found input: 5V was worse case mode. So the report only reflects the worst mode.

a) 0% charging load mode (for input: 5V, output: empty load)

Electric Field Strength Measurement

Measured Side	Distance (cm)	Measured Value (V/m)	50 % of Limit (V/m)	Limit (V/m)
A	15	0.92	307.00	614
B	15	0.88	307.00	614
C	15	0.87	307.00	614
D	15	0.81	307.00	614
E	20	0.74	307.00	614

Magnetic Field Strength Measurement

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	15	0.191	0.815	1.63
B	15	0.185	0.815	1.63
C	15	0.180	0.815	1.63
D	15	0.173	0.815	1.63
E	20	0.178	0.815	1.63

b) 50% charging load mode (for input: 5V, output: 5W)

Electric Field Strength Measurement

Measured Side	Distance (cm)	Measured Value (V/m)	50 % of Limit (V/m)	Limit (V/m)
A	15	1.87	307.00	614
B	15	1.85	307.00	614
C	15	1.81	307.00	614
D	15	1.75	307.00	614
E	20	1.62	307.00	614

Magnetic Field Strength Measurement

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	15	0.287	0.815	1.63
B	15	0.282	0.815	1.63
C	15	0.271	0.815	1.63
D	15	0.262	0.815	1.63
E	20	0.282	0.815	1.63

c) 100% charging load mode (for input: 5V, output: 10W)

Electric Field Strength Measurement

Measured Side	Distance (cm)	Measured Value (V/m)	50 % of Limit (V/m)	Limit (V/m)
A	15	2.64	307.00	614
B	15	2.41	307.00	614
C	15	2.46	307.00	614
D	15	2.24	307.00	614
E	20	2.51	307.00	614

Magnetic Field Strength Measurement

Measured Side	Distance (cm)	Measured Value (A/m)	50 % of Limit (A/m)	Limit (A/m)
A	15	0.554	0.815	1.63
B	15	0.540	0.815	1.63
C	15	0.551	0.815	1.63
D	15	0.511	0.815	1.63
E	20	0.527	0.815	1.63

7. Test Setup Photo



-----End of report-----