

# RADIO TEST REPORT – 465645-1R2TRFWL

Type of assessment:

**Limited Modular approval**

Applicant:

**Thales DIS USA, Inc**

Product Description:

**RFID Module**

Model (HVIN):

**PR-01737**

Host Model Names (HMNs):

PV70-02-02-00-01	PV75-02-02-07-01
PV70-02-02-01-01	PV75-02-02-08-01
PV70-02-02-05-01	PV75-02-05-00-01
PV70-03-02-00-01	PV75-03-02-00-01
PV75-02-02-00-01	PV75-03-02-07-01
PV75-02-02-00-02	PV70-02-02-00-02
PV70-02-02-06-01	

FCC Identifier:

**FCC ID: 2AQL3PR01737**

ISED certification number:

**IC: 22832-PR01737**


Specifications:

- ◆ FCC 47 CFR Part 15 Subpart C, §15.225
- ◆ RSS-210, Issue 10, December 2019, Annex B.6

Date of issue: November 11, 2022

Moustapha Salah Toubeh, Wireless/EMC Specialist

Tested by



Signature

Andrey Adelberg, Senior EMC/RF Specialist

Reviewed by



Signature

Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada.  
The tests included in this report are within the scope of this accreditation.  
The SCC Accreditation Symbol is an official symbol of the Standards Council of Canada, used under licence.

SCC File Number: 15064 (Ottawa/Almonte); 151100 (Montreal); 151097 (Cambridge)

FCC 15.225, RSS-210 RFID; Date: September 2020



## Lab locations

---

Company name	Nemko Canada Inc.			
Facilities	<i>Ottawa site:</i> 303 River Road Ottawa, Ontario Canada K1V 1H2  Tel: +1 613 737 9680 Fax: +1 613 737 9691	<i>Montréal site:</i> 292 Labrosse Avenue Pointe-Claire, Québec Canada H9R 5L8  Tel: +1 514 694 2684 Fax: +1 514 694 3528	<i>Cambridge site:</i> 1-130 Saltsman Drive Cambridge, Ontario Canada N3E 0B2  Tel: +1 519 650 4811	<i>Almonte site:</i> 1500 Peter Robinson Road West Carleton, Ontario Canada K0A 1L0  Tel: +1 613 256-9117
	Test site identifier	<b>Organization</b>	<b>Ottawa/Almonte</b>	<b>Montreal</b>
	FCC:	CA2040	CA2041	CA0101
	ISED:	2040A-4	2040G-5	24676
Website	<a href="http://www.nemko.com">www.nemko.com</a>			

## Limits of responsibility

---

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contained in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

## Copyright notification

---

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.



## Table of Contents

<b>Table of Contents</b> .....	<b>3</b>
<b>Section 1 Report summary</b> .....	<b>4</b>
1.1 Test specifications .....	4
1.2 Test methods .....	4
1.3 Exclusions .....	4
1.4 Statement of compliance .....	4
1.5 Test report revision history .....	4
<b>Section 2 Engineering considerations</b> .....	<b>5</b>
2.1 Modifications incorporated in the EUT for compliance .....	5
2.2 Technical judgment .....	5
2.3 Model variant declaration .....	5
2.4 Deviations from laboratory tests procedures .....	5
<b>Section 3 Test conditions</b> .....	<b>6</b>
3.1 Atmospheric conditions .....	6
3.2 Power supply range .....	6
<b>Section 4 Measurement uncertainty</b> .....	<b>7</b>
4.1 Uncertainty of measurement .....	7
<b>Section 5 Information provided by the applicant</b> .....	<b>8</b>
5.1 Disclaimer .....	8
5.2 Applicant/Manufacture .....	8
5.3 EUT information .....	8
5.4 Radio technical information .....	9
5.5 EUT setup details .....	9
<b>Section 6 Summary of test results</b> .....	<b>10</b>
6.1 Testing location .....	10
6.2 Testing period .....	10
6.3 Sample information .....	10
6.4 FCC Part 15 Subpart A and C, general requirements test results .....	10
6.5 FCC Part §15.225 test results .....	10
6.6 ISED RSS-Gen, Issue 5, test results .....	11
6.7 ISED RSS-210, Issue 10, test results .....	11
<b>Section 7 Test equipment</b> .....	<b>12</b>
7.1 Test equipment list .....	12
<b>Section 8 Testing data</b> .....	<b>13</b>
8.1 Variation of power source .....	13
8.2 Number of frequencies .....	14
8.3 Antenna requirement .....	16
8.4 Occupied bandwidth .....	17
8.5 Field strength within 13.110–14.010 MHz band .....	19
8.6 Field strength outside 13.110–14.010 MHz band .....	21
8.7 Frequency stability .....	24
8.8 AC power line conducted emissions limits .....	25

## Section 1 Report summary

---

### 1.1 Test specifications

---

FCC 47 CFR Part 15, Subpart C, Clause 15.225	Operation within the band 13.110–14.010 MHz.
RSS-210, Issue 10, Dec 2019, Annex B.6	Licence-Exempt Radio Apparatus: Category I Equipment. Devices operating in frequency bands for any application Band 13.110–14.010 MHz

### 1.2 Test methods

---

ANSI C63.10 v2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
-------------------	------------------------------------------------------------------------------------------------

### 1.3 Exclusions

---

None

### 1.4 Statement of compliance

---

In the configuration tested, the EUT was found compliant.

Testing was performed against all relevant requirements of the test standard except as noted in section 1.3 above. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

### 1.5 Test report revision history

---

**Table 1.5-1: Test report revision history**

Revision #	Date of issue	Details of changes made to test report
TRF	July 29, 2022	Original report issued
R1TRF	August 31, 2022	Editorial change.
R2TRF	November 11, 2022	Modified results related to Field strength outside 13.110–14.010 MHz band.

## Section 2 Engineering considerations

---

### 2.1 Modifications incorporated in the EUT for compliance

---

The following modifications were installed by client:

- Ferrite on USB cable

The cable has been looped six times around the ferrite by the client. The ferrite is located at the extremity of the cable connected to the EUT. The model of the ferrite is 742 701 5 and the manufacturer is Würth Elektronik.

Client has provided two samples:

- one sample (SN 2217@0007) with loaded antenna (used to perform only Conducted Emission test outside the transmitter's fundamental emission band)
- one sample (SN 2217@0002) without load on antenna (used to perform all the tests including Conducted emission within the transmitter's fundamental emission band)

### 2.2 Technical judgment

---

None

### 2.3 Model variant declaration

---

There were no model variants declared by the applicant.

### 2.4 Deviations from laboratory tests procedures

---




No deviations were made from laboratory procedures.

## Section 3 Test conditions

---

### 3.1 Atmospheric conditions

---

Temperature	 15 °C – 35 °C
Relative humidity	 20 % – 75 %
Air pressure	 86 kPa (860 mbar) – 106 kPa (1060 mbar)

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

### 3.2 Power supply range

---

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages  $\pm 5\%$ , for which the equipment was designed.

## Section 4 Measurement uncertainty

---

### 4.1 Uncertainty of measurement

---

UKAS Lab 34 and TIA-603-B have been used as guidance for measurement uncertainty reasonable estimations with regards to previous experience and validation of data. Nemko Canada, Inc. follows these test methods in order to satisfy ISO/IEC 17025 requirements for estimation of uncertainty of measurement for wireless products.

Measurement uncertainty budgets for the tests are detailed below. Measurement uncertainty calculations assume a coverage factor of  $K = 2$  with 95% certainty.

**Table 4.1-1: Measurement uncertainty calculations**

Test name	Measurement uncertainty, $\pm$ dB
Occupied bandwidth	4.45
Conducted spurious emissions	1.13
Radiated spurious emissions	3.78
AC power line conducted emissions	3.55

## Section 5 Information provided by the applicant

---

### 5.1 Disclaimer

---

This section contains information provided by the applicant and has been utilized to support the test plan. Inaccurate information provided by the applicant can affect the validity of the results contained within this test report. Nemko accepts no responsibility for the information contained within this section and the impact it may have on the test plan and resulting measurements.

### 5.2 Applicant/Manufacture

---

Applicant name	Thales DIS USA, Inc
Applicant address	Arboretum Plaza II, 9442 N. Capital of Texas Hwy, Suite 400, Austin, TX, 78759, USA
Manufacturer 1 name	Thales DIS (Tianjin) CO LTD
Manufacturer 1 address	4 <sup>th</sup> Floor, Building 8, Saifei Shiji Medical Equipment Park, Medical Equipment Industrial Park, Tianjin, Beichen Economic-Technological Development Area, Beichen District, Tianjin, China
Manufacturer 2 name	Benchmark Electronics Huntsville Inc.
Manufacturer 2 address	4807 Bradford Dr NW, Huntsville, AL 35805-1948, USA

### 5.3 EUT information

---

Product	RFID Module	
Model (HVIN)	PR-01737	
PMN	Thales Gemalto Document Reader AT10K	
Serial number	2217@0002, 2217@0007	
Part number	PR-01737	
Power supply requirements	USB: 5 V <sub>DC</sub> connected to a laptop computer powered by an AC power source.	
Host model names (HMN) and information:	PV70-02-02-00-01	AT10K 550 READER, DESKTOP, RF
	PV70-02-02-01-01	AT10K 550 READER, DESKTOP, RF, FED
	PV70-02-02-05-01	AT10K READER, DESKTOP, 550-HR, RF, NO CLIP
	PV70-03-02-00-01	AT10K READER, DESKTOP, 550-HR, RF, SC
	PV70-02-02-06-01	AT10K, DESKTOP, 550, RF, USB, NO CLIP, NO LOGO
	PV75-02-02-00-01	AT10K 550 READER, OEM, RF
	PV75-02-02-00-02	AT10K READER, OEM, 550-HR, RF, USB3, COAX
	PV75-02-02-07-01	AT10K READER, OEM, HR-550, RF, MRP LOGO
	PV75-02-02-08-01	AT10K RDR, OEM, 550-HR, RF, USB3, BLACK GLASS
	PV75-02-05-00-01	AT10K RDR, OEM, 550-HR, RF, USB3, FLUSH TOP
	PV75-03-02-00-01	AT10K READER, OEM, 550-HR, RF, SC, USB3
	PV75-03-02-07-01	AT10K READER, OEM, 550, RF, SC, USB3, MRP LOGO
	PV70-02-02-00-02	AT10K READER, DESKTOP, 550-HR, RF, USB3, COAX



## 5.4 Radio technical information

Frequency band	13.553–13.567 MHz
Frequency Min (MHz) - single	13.56
Field strength, dB $\mu$ V/m @ 3 m	67.80
Measured BW (kHz), 99% OBW	0.695
Type of modulation	ASK
Emission classification	OK70A1D
Transmitter spurious, dB $\mu$ V/m @ 3 m	43.00 (Peak) at 176.276 MHz
Antenna information	PCB antenna
Product description and theory of operation	RFID readers operate at 13.56 MHz, reading ID cards and Passports
Software	Firmware: FW00303-00-21.sbin

## 5.5 EUT setup details

### 5.5.1 Radio exercise details

Operating conditions	Once energized, the transmitter was set to transmit by using a software provided by the client.
----------------------	-------------------------------------------------------------------------------------------------

**Table 5.5-1: EUT sub assemblies**


Description	Brand name	Model, Part number, Serial number, Revision level
PR-01737	Thales	MN: PR-01737, PN: PR-01737, SN: 2217@0002, 2217@0007
Ferrite 742 701 5	Würth Elektronik	MN: 742 701 5, SN: None
Test Card	Thales	MN: DS-00031, REV: B
Test Card	Molex	MN: 1462360031

**Table 5.5-2: EUT interface ports**

Description	Qty.
USB	1

**Table 5.5-3: Support equipment**

Description	Brand name	Model, Part number, Serial number, Revision level
Laptop	Dell	MN: Latitude 5590, SN: None

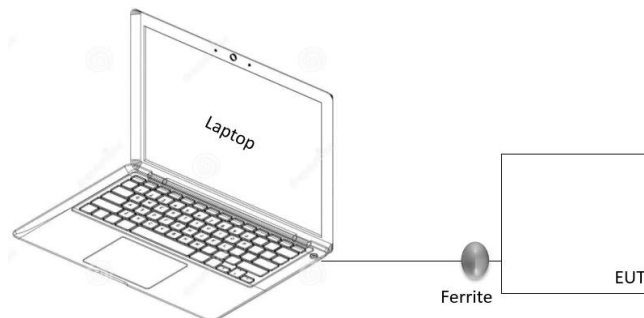

**Figure 5.5-1: Setup block diagram**

## Section 6 Summary of test results

### 6.1 Testing location

Test location (s) Ottawa

### 6.2 Testing period

Test start date June 17, 2022 Test end date July 28, 2022

### 6.3 Sample information

Receipt date June 17, 2022 Nemko sample ID number(s) # 1, # 2

### 6.4 FCC Part 15 Subpart A and C, general requirements test results

*Table 6.4-1: FCC general requirements results*

Part	Test description	Verdict
§15.207(a)	Conducted limits	Pass
§15.31(e)	Variation of power source	Pass
§15.31(m)	Number of tested frequencies	Pass
§15.203	Antenna requirement	Pass

### 6.5 FCC Part §15.225 test results

*Table 6.5-1: FCC §15.225 requirements results*

Part	Test description	Verdict
§15.225(a)	Field strength within 13.553–13.567 MHz band	Pass
§15.225(b)	Field strength within 13.410–13.553 MHz and 13.567–13.710 MHz bands	Pass
§15.225(c)	Field strength within 13.110–13.410 MHz and 13.710–14.010 MHz bands	Pass
§15.225(d)	Field strength outside 13.110–14.010 MHz band	Pass
§15.225(e)	Frequency tolerance of carrier signal	Pass

## 6.6 ISED RSS-Gen, Issue 5, test results

**Table 6.6-1: RSS-Gen requirements results**

Clause	Test description	Verdict
7.3	Receiver radiated emission limits	Not applicable
7.4	Receiver conducted emission limits	Not applicable
6.9	Operating bands and selection of test frequencies	Pass
8.8	AC power-line conducted emissions limits	Pass

Notes: <sup>1</sup>According to sections 5.2 and 5.3 of RSS-Gen, Issue 5 the EUT does not have a stand-alone receiver neither scanner receiver, therefore exempt from receiver requirements.

## 6.7 ISED RSS-210, Issue 10, test results

**Table 6.7-1: ISED RSS-247 requirements results**

Section	Test description	Verdict
Annex B.6 (a)(i)	The field strength within the band 13.553–13.567 MHz	Pass
Annex B.6 (a)(ii)	The field strength within the bands 13.410–13.553 MHz and 13.567–13.710 MHz	Pass
Annex B.6 (a)(iii)	The field strength within the bands 13.110–13.410 MHz and 13.710–14.010 MHz	Pass
Annex B.6 (a)(iv)	The field strength outside the band 13.110–14.010 MHz	Pass
Annex B.6 (b)	Carrier frequency stability	Pass

## Section 7 Test equipment

### 7.1 Test equipment list

**Table 7.1-1: Equipment list**

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber	TDK	SAC-3	FA002047	1 year	20-Jan-23
Flush mount turntable	Sunol	FM2022	FA002082	—	NCR
Controller	Sunol	SC104V	FA002060	—	NCR
Antenna mast	Sunol	TLT2	FA002061	—	NCR
61505 AC source	Chroma	61509	FA003036	—	VOU
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 26	FA002043	1 year	25-Nov-22
Bilog antenna (20–3000 MHz)	Sunol	JB3	FA002108	1 year	14-Feb-23
Active loop antenna (0.01–30 MHz)	Com-Power	AL-130	FA002722	1 year	11-Mar-23
Signal and Spectrum Analyzer	Rhode&Schwarz	FSW50	FA003267	1 year	29-Nov-22
Temperature chamber	Espec	EPX-4H	FA002735	1 year	05-Oct-22
LISN	Rohde & Schwarz	ENV216	FA002023	1 year	08-Oct-22

Notes: NCR - no calibration required, VOU - verify on use

## Section 8 Testing data

---

### 8.1 Variation of power source

---

#### 8.1.1 References, definitions and limits

---

**FCC §15.31 (e):**

For intentional radiators, measurements of the variation of the input power or the radiated signal level of the fundamental frequency component of the emission, as appropriate, shall be performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage. For battery operated equipment, the equipment tests shall be performed using a new battery.

#### 8.1.2 Test summary

---

Verdict	Pass		
Tested by	Moustapha Salah Toubeh	Test date	June 17, 2022

#### 8.1.3 Observations, settings and special notes

---

The testing was performed as per ANSI C63.10 Section 5.13.

- Where the device is intended to be powered from an external power adapter, the voltage variations shall be applied to the input of the adapter provided with the device at the time of sale. If the device is not marketed or sold with a specific adapter, then a typical power adapter shall be used.
- For devices, where operating at a supply voltage deviating  $\pm 15\%$  from the nominal rated value may cause damages or loss of intended function, test to minimum and maximum allowable voltage per manufacturer's specification and document in the report.
- For devices with wide range of rated supply voltage, test at 15% below the lowest and 15% above the highest declared nominal rated supply voltage.
- For devices obtaining power from an input/output (I/O) port (USB, firewire, etc.), a test jig is necessary to apply voltage variation to the device from a support power supply, while maintaining the functionalities of the device.

For battery-operated equipment, the equipment tests shall be performed using a variable power supply.

#### 8.1.4 Test data

---

EUT Power requirements:	<input checked="" type="checkbox"/> AC	<input type="checkbox"/> DC	<input type="checkbox"/> Battery
If EUT is an AC or a DC powered, was the noticeable output power variation observed?	<input type="checkbox"/> YES	<input checked="" type="checkbox"/> NO	<input type="checkbox"/> N/A
If EUT is battery operated, was the testing performed using fresh batteries?	<input type="checkbox"/> YES	<input type="checkbox"/> NO	<input checked="" type="checkbox"/> N/A
If EUT is rechargeable battery operated, was the testing performed using fully charged batteries?	<input type="checkbox"/> YES	<input type="checkbox"/> NO	<input checked="" type="checkbox"/> N/A

## 8.2 Number of frequencies

### 8.2.1 References, definitions and limits

**FCC §15.31:**

- (m) Measurements on intentional radiators or receivers shall be performed and, if required, reported for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table.

**RSS-Gen, Clause 6.9:**

Except where otherwise specified, measurements shall be performed for each frequency band of operation for which the radio apparatus is to be certified, with the device operating at the frequencies in each band of operation shown in table below. The frequencies selected for measurements shall be reported in the test report.

**Table 8.2-1: Frequency Range of Operation**

Frequency range over which the device operates (in each band)	Number of test frequencies required	Location of measurement frequency inside the operating frequency range
1 MHz or less	1	Center (middle of the band)
1–10 MHz	2	1 near high end, 1 near low end
Greater than 10 MHz	3	1 near high end, 1 near center and 1 near low end

Notes: “near” means as close as possible to or at the centre / low end / high end of the frequency range over which the device operates.

### 8.2.2 Test summary

Verdict	Pass		
Tested by	Moustapha Salah Toubeh	Test date	June 17, 2022

### 8.2.3 Observations, settings and special notes

**ANSI C63.10, Clause 5.6.2.1:**

The number of channels tested can be reduced by measuring the center channel bandwidth first and then applying the following relaxations as appropriate:

- For each operating mode, if the measured channel bandwidth on the middle channel is at least 150% of the minimum permitted bandwidth, then it is not necessary to measure the bandwidth on the high and low channels.
- For multiple-input multiple-output (MIMO) systems, if the measured channel bandwidth on testing the middle channel exceeds the minimum permitted bandwidth by more than 50% on one transmit chain, then it is not necessary to repeat testing on the other chains.
- If the measured channel bandwidth on the middle channel is less than 50% of the maximum permitted bandwidth, then it is not necessary to measure the bandwidth on the high and low channels.

**ANSI C63.10, Clause 5.6.2.2:**

For devices with multiple operating modes, measurements on the middle channel can be used to determine the worst-case mode(s). The worst-case modes are as follows:

- Band edge requirements—Measurements on the mode with the widest bandwidth can be used to cover the same channel (center frequency) on modes with narrower bandwidth that have the same or lower output power for each modulation family (e.g., OFDM and direct sequence spread spectrum).
- Spurious emissions—Measure the mode with the highest output power and the mode with the highest output power spectral density for each modulation family (e.g., OFDM and direct sequence spread spectrum).
- In-band PSD—Measurements on the mode with the narrowest bandwidth can be used to cover all modes within the same modulation family of an equal or lower output power provided the result is less than 50% of the limit.



8.2.4    Test data

---

*Table 8.2-2: Test channels selection*

Start of Frequency range, MHz	End of Frequency range, MHz	Frequency range bandwidth, kHz	Single Tx frequency, MHz
13.553	13.567	14	13.560



### 8.3 Antenna requirement

---

#### 8.3.1 References, definitions and limits

---

**FCC §15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

**RSS-Gen, Clause 6.8:**

The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

For expediting the testing, measurements may be performed using only the antenna with highest gain of each combination of transmitter and antenna type, with the transmitter output power set at the maximum level. However, the transmitter shall comply with the applicable requirements under all operational conditions and when in combination with any type of antenna from the list provided in the test report.

#### 8.3.2 Test summary

---

Verdict	Pass		
Tested by	Moustapha Salah Toubeh	Test date	June 17, 2022

#### 8.3.3 Observations, settings and special notes

---

None

#### 8.3.4 Test data

---

- Must the EUT be professionally installed?       YES       NO
- Does the EUT have detachable antenna(s)?       YES       NO
- If detachable, is the antenna connector(s) non-standard?       YES       NO       N/A



## 8.4 Occupied bandwidth

---

### 8.4.1 References, definitions and limits

---

**FCC Part §15.215:**

Additional provisions to the general radiated emission limitations:

- (c) Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

**ANSI C63.10-2013, Clause 6.9.3:**

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

**RSS-Gen, Clause 6.7:**

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).

### 8.4.2 Test summary

---

Verdict	Pass		
Tested by	Moustapha Salah Toubeh	Test date	June 17, 2022

### 8.4.3 Observations, settings and special notes

---

The emission bandwidth was tested per ANSI C63.10, Clause 6.9.3. Spectrum analyser settings:

Resolution bandwidth:	≥ 1 % of span
Video bandwidth:	≥ 3 × RBW
Detector mode:	Peak
Trace mode:	Max Hold

8.4.4 Test data

Table 8.4-1: 99% bandwidth results


Frequency, MHz	99% bandwidth, kHz
13.56	0.695

Table 8.4-2: Lower 20 dBc frequency cross result

Fundamental frequency, MHz	Lower 20 dBc frequency cross, MHz	Limit, MHz	Margin, kHz
13.560	13.55978	13.55300	6.78


Table 8.4-3: Upper 20 dBc frequency cross result

Fundamental frequency, MHz	Upper 20 dBc frequency cross, MHz	Limit, MHz	Margin, kHz
13.560	13.56058	13.56700	6.42

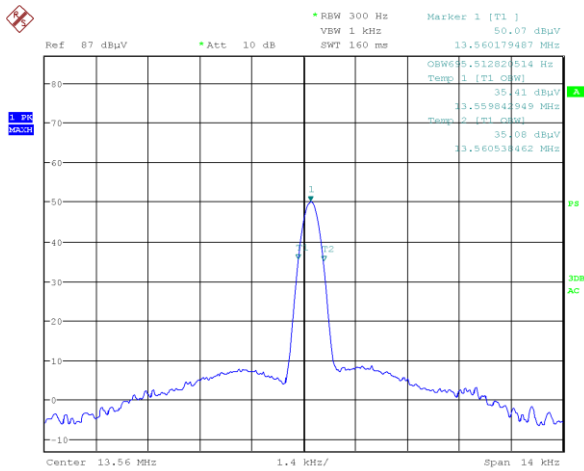

Date: 17.JUN.2022 21:43:27

Figure 8.4-1: 99% bandwidth

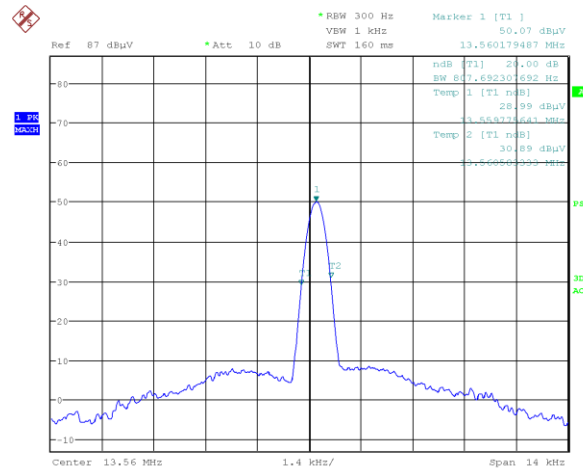

Date: 17.JUN.2022 21:45:05

Figure 8.4-2: 20 dB bandwidth

## 8.5 Field strength within 13.110–14.010 MHz band

### 8.5.1 References, definitions and limits


**FCC §15.225:**

- (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15848  $\mu\text{V/m}$  (84 dB $\mu\text{V/m}$ ) at 30 meters.
- (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334  $\mu\text{V/m}$  (50.5 dB $\mu\text{V/m}$ ) at 30 meters.
- (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106  $\mu\text{V/m}$  (40.5 dB $\mu\text{V/m}$ ) at 30 meters.


**RSS-210, Annex B.6:**

Devices shall comply with the following requirements:

- a. the field strength of any emission shall not exceed the following limits:
  - i. 15.848 mV/m (84 dB $\mu\text{V/m}$ ) at 30 m, within the band 13.553–13.567 MHz
  - ii. 334  $\mu\text{V/m}$  (50.5 dB $\mu\text{V/m}$ ) at 30 m, within the bands 13.410–13.553 MHz and 13.567–13.710 MHz
  - iii. 106  $\mu\text{V/m}$  (40.5 dB $\mu\text{V/m}$ ) at 30 m, within the bands 13.110–13.410 MHz and 13.710–14.010 MHz

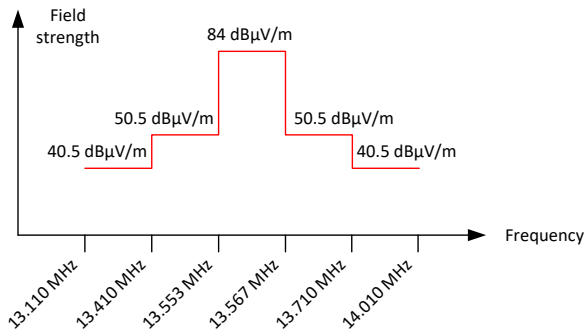

**Figure 8.5-1: In-band spurious emissions limit at 30 m**

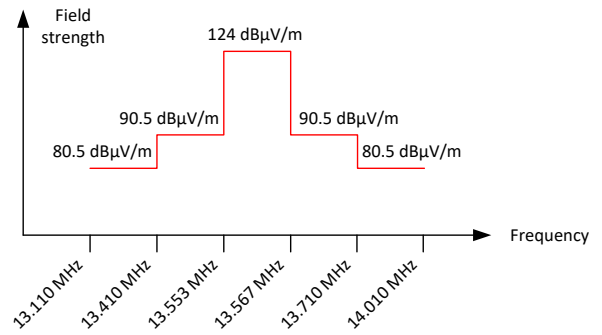

**Figure 8.5-2: In-band spurious emissions limit at 3 m**

### 8.5.2 Test summary

Verdict	Pass		
Tested by	Moustapha Salah Toubeh	Test date	June 17, 2022

### 8.5.3 Observations, settings and special notes

The measurements were performed at the distance of 3 m. 40 dB distance correction factor\* was applied to the measurement result in order to comply with 30 m limits.

\* 30 m to 3 m distance correction factor calculation (for 13 MHz band):

$$40 \times \text{Log}_{10}(3 \text{ m}/30 \text{ m}) = 40 \times \text{Log}_{10}(0.1) = -40 \text{ dB}$$

- Radiated measurements were performed at a distance of 3 m.
- The spurious emission was tested per ANSI C63.10, Clause 6.4.

Spectrum analyser settings:


Resolution bandwidth:	10 kHz
Video bandwidth:	30 kHz
Detector mode:	Peak
Trace mode:	Max Hold

### 8.5.4 Test data

**Table 8.5-1: Field strength measurements results**

Frequency range, MHz	Frequency, MHz	Field strength at 3 m, dBµV/m	Calculated field strength at 30 m, dBµV/m	Limit, dBµV/m	Margin, dB
13.110–13.410	13.438	35.60	-4.40	40.50	44.90
13.410–13.553	13.552	52.30	12.30	50.50	38.20
13.553–13.567	13.560	67.80	27.80	84.00	56.20
13.567–13.710	13.569	54.00	14.00	50.50	36.50
13.710–14.010	13.722	30.50	-9.50	40.50	50.00

Note: Calculated field strength at 30 m = Measured field strength at 3 m – 40 dB

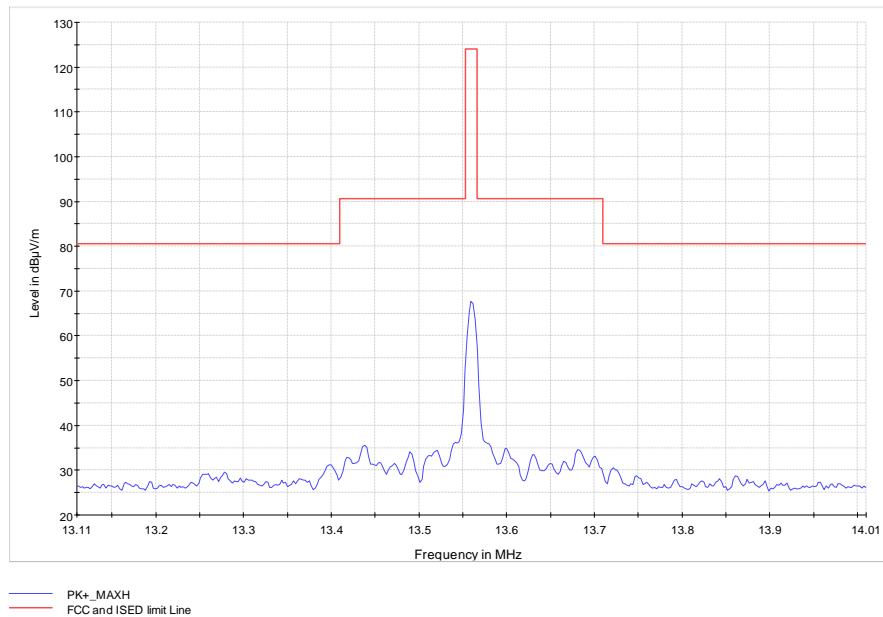

**Figure 8.5-3: Field strength within 13.110–14.010 MHz band**

## 8.6 Field strength outside 13.110–14.010 MHz band

### 8.6.1 References, definitions and limits

**FCC §15.225:**

- (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.

**RSS-210, Annex B.6:**

Devices shall comply with the following requirements:

- a. the field strength of any emission shall not exceed the following limits:
- iv. RSS-Gen general field strength limits for frequencies outside the band 13.110–14.010 MHz

**Table 8.6-1: FCC §15.209 and RSS-Gen – Radiated emission limits**

Frequency, MHz	Field strength of emissions		Measurement distance, m
	µV/m	dBµV/m	
0.009–0.490	2400/F	$67.6 - 20 \times \log_{10}(F)$	300
0.490–1.705	24000/F	$87.6 - 20 \times \log_{10}(F)$	30
1.705–30.0	30	29.5	30
30–88	100	40.0	3
88–216	150	43.5	3
216–960	200	46.0	3
above 960	500	54.0	3

Notes: In the emission table above, the tighter limit applies at the band edges.  
 For frequencies above 1 GHz the limit on peak RF emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test.

### 8.6.2 Test summary

Verdict	Pass		
Tested by	Moustapha Salah Toubeh	Test date	June 24, 2022

### 8.6.3 Observations, settings and special notes

- The spectrum was searched from 9 kHz to 1 GHz.
- Radiated measurements were performed at a distance of 3 m.
- The spurious emission was tested per ANSI C63.10, Clause 6.4 and 6.5.

Spectrum analyser settings for measurements below 150 kHz:

Resolution bandwidth:	300 Hz
Video bandwidth:	9 kHz
Detector mode:	Quasi-Peak
Trace mode:	Max Hold


Spectrum analyser settings for measurements below 30 MHz:

Resolution bandwidth:	9 kHz
Video bandwidth:	30 kHz
Detector mode:	Quasi-Peak
Trace mode:	Max Hold

Spectrum analyser settings for measurements below 1 GHz:


Resolution bandwidth:	100 kHz
Video bandwidth:	300 kHz
Detector mode:	Peak
Trace mode:	Max Hold

### 8.6.4 Test data

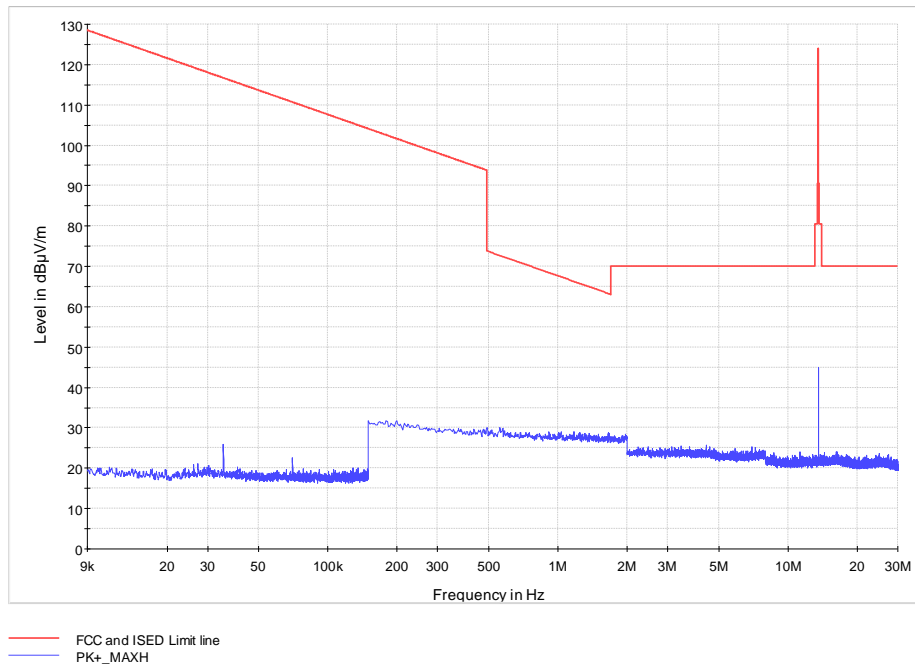

**Figure 8.6-1: Field strength of spurious emissions below 30 MHz**

Test data, continued

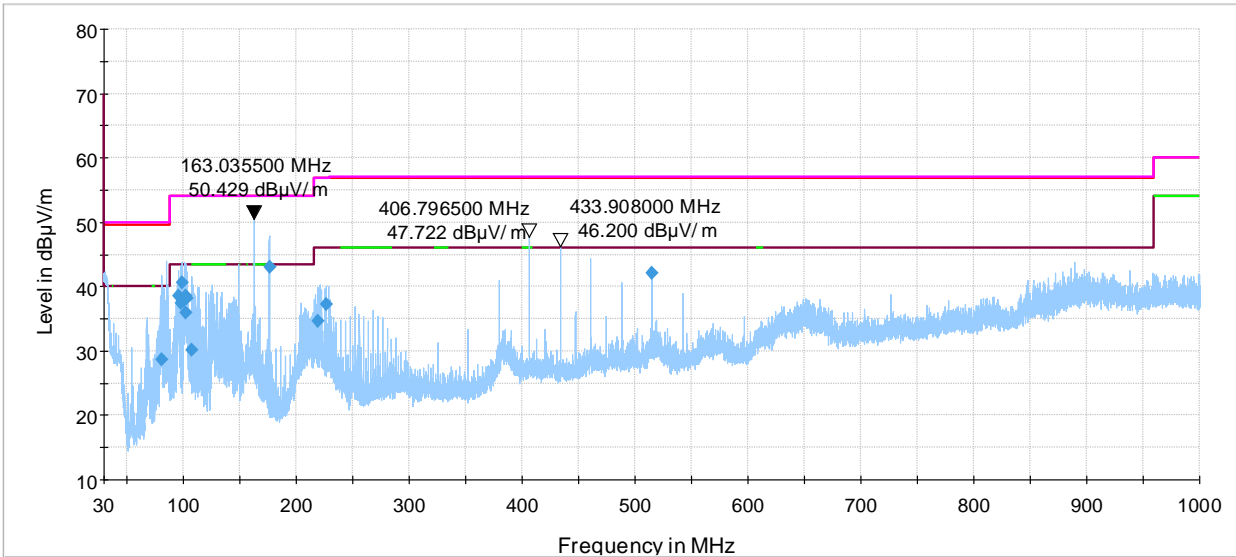

Full-scan 30 MHz to 1 GHz\_with RF PS MN PG050C3000G laptop inside with BLE and RFID

- FCC Part 15 Limit - Class A, QP, 3 m
- ICES-003 Limit - Class A, QP, 3 m
- FCC 15.209 and RSS-210 limit line
- FCC 15.209 and RSS-Gen Restricted bands average limits
- Preview Result 1-PK+
- ◆ Final\_Result QPK

**Figure 8.6-2: Field strength of spurious emissions above 30 MHz**

**Table 8.6-2: Field strength measurements results**

Frequency, MHz	Field strength at 3 m, dBµV/m	Quasi-Peak 3 m limit, dBµV/m	Margin, dB
81.313	28.63	40.00	11.37
96.348	38.56	43.50	4.94
97.755	37.49	43.50	6.01
99.210	40.68	43.50	2.82
101.344	38.03	43.50	5.47
102.071	38.60	43.50	4.90
102.411	35.95	43.50	7.55
103.866	38.20	43.50	5.30
107.697	30.07	43.50	13.43
176.276	43.00	54.00	11.00
219.538	34.62	56.90	22.28
226.377	37.23	56.90	19.67
515.291	42.05	56.90	14.85

Note:

- The limits up the 10<sup>th</sup> harmonic (135.6 MHz) are defined in FCC 15.209 and RSS-210 standards. The applicable limits above the 10<sup>th</sup> harmonic are defined in EMC standards (FCC part 15 and ICES-003 – Class A).
- The spike at 163.0355 MHz is related to the digital part and is compliant with EMC QP limits (FCC Part 15 class A and ICES-003 class A).
- Both spikes at 406.7965 MHz and 433.9080 MHz are related to RFID and are compliant with EMC QP limits (FCC Part 15 class A and ICES-003 class A) because these frequencies are above the 10<sup>th</sup> harmonic.

## 8.7 Frequency stability

### 8.7.1 References, definitions and limits

**FCC §15.225:**

- (e) The frequency tolerance of the carrier signal shall be maintained within  $\pm 0.01\%$  of the operating frequency over a temperature variation of  $-20$  degrees to  $+ 50$  degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

**RSS-210, Annex B.6:**

Devices shall comply with the following requirements:

- b. the carrier frequency stability shall not exceed  $\pm 100$  ppm

### 8.7.2 Test summary

Verdict	Pass		
Tested by	Moustapha Salah Toubeh	Test date	June 29, 2022

### 8.7.3 Observations, settings and special notes

$$\text{Frequency drift (ppm)} = ((F_{\text{measured}} - F_{\text{reference}}) \div F_{\text{reference}}) \times 1 \times 10^6$$

Frequency stability test was performed as per ANSI C63.10, Clause 6.8. Spectrum analyser settings:

Resolution bandwidth:	10 Hz
Video bandwidth:	30 Hz
Detector mode:	Peak

### 8.7.4 Test data

**Table 8.7-1: Frequency drift measurement**

Test conditions	Measured Frequency, Hz	Drift, ppm	Limit, ppm
+50 °C, Nominal	13560178.8	-2.3	100.0
+40 °C, Nominal	13560177.8	-2.4	100.0
+30 °C, Nominal	13560182.8	-2.0	100.0
+20 °C, +15 %	13560208.8	-0.1	100.0
+20 °C, Nominal	13560209.8	Reference frequency	
+20 °C, -15 %	13560209.8	0.0	100.0
+10 °C, Nominal	13560221.8	0.9	100.0
0 °C, Nominal	13560233.8	1.8	100.0
-10 °C, Nominal	13560223.8	1.0	100.0
-20 °C, Nominal	13560184.8	-1.8	100.0



## 8.8 AC power line conducted emissions limits

### 8.8.1 References, definitions and limits

**FCC §15.407(b):**

- (8) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.

**FCC §15.207:**

- (a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μH/50 Ω line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

**ANSI C63.10, Clause 6.2:**

If the EUT normally receives power from another device that in turn connects to the public utility ac power lines, measurements shall be made on that device with the EUT in operation to demonstrate that the device continues to comply with the appropriate limits while providing the EUT with power. If the EUT is operated only from internal or dedicated batteries, with no provisions for connection to the public utility ac power lines (600 VAC or less) to operate the EUT (such as an adapter), then ac power-line conducted measurements are not required. For direct current (dc) powered devices where the ac power adapter is not supplied with the device, an “off-the-shelf” unmodified ac power adapter shall be used. If the device is supposed to be installed in a host (e.g., the device is a module or PC card), then it is tested in a typical compliant host.

**RSS-Gen, Clause 8.8:**

A radio apparatus that is designed to be connected to the public utility (AC) power line shall ensure that the radio frequency voltage, which is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz, shall not exceed the limits in table below. Unless the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in table below. The more stringent limit applies at the frequency range boundaries.

**Table 8.8-1: Conducted emissions limit**

Frequency of emission, MHz	Conducted emissions limit, dBμV	
	Quasi-peak	Average**
0.15–0.5	66 to 56*	56 to 46*
0.5–5	56	46
5–30	60	50

Notes:      \* - The level decreases linearly with the logarithm of the frequency.  
               \*\* - A linear average detector is required.

### 8.8.2 Test summary

Verdict	Pass		
Tested by	Moustapha Salah Toubeh	Test date	July 22, 2022 & July 28, 2022


### 8.8.3 Observations, settings and special notes

Port under test – Coupling device	AC input of Laptop’s Power supply – Artificial Mains Network (AMN)
EUT power input during test	5 V <sub>DC</sub> USB Powered from laptop (via external 100–240 V <sub>AC</sub> , 50/60 Hz power adapter)
EUT setup configuration	Table top
Measurement details	A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 10 dB or above the limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.
Additional notes:	<ul style="list-style-type: none"> <li>– Testing was performed with both antenna and with antenna terminated to demonstrate compliance within transmit band.</li> <li>– The EUT was set up as tabletop configuration per ANSI C63.10-2013 measurement procedure.</li> <li>– The spectral scan has been corrected with transducer factors (i.e. cable loss, LISN factors, and attenuators) for determination of compliance. Correction factor (dB) = LISN factor IL (dB) + cable loss (dB) + attenuator (dB)</li> <li>– Emissions that were continuously present for a minimum of 1 second and occurred more than once for every 15 seconds observation period were considered valid emissions. The maximum value of valid emissions has been recorded.</li> </ul>


Conducted AC line emissions test was performed as per ANSI C63.10, Clause 6.2. Spectrum analyser settings:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	Peak and Average (Preview), Quasi-peak and CAverage (Final)
Trace mode	Max Hold
Measurement time	100 ms (Preview), 160 ms (Final)

8.8.4 Test data

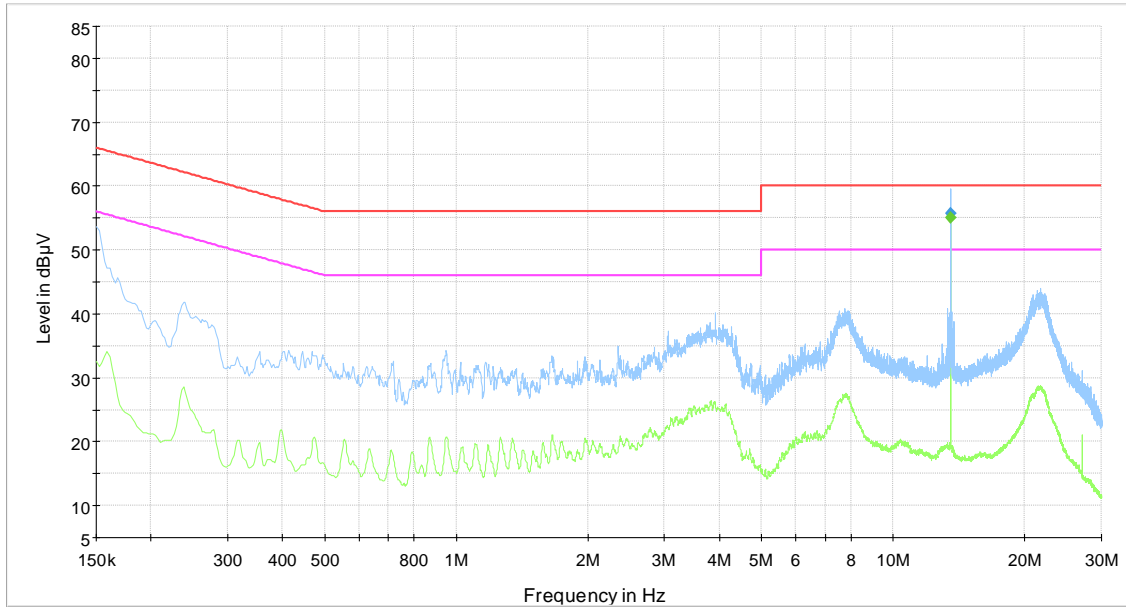


**Plot 8.8-1:** Conducted emissions on phase line (without load on antenna)

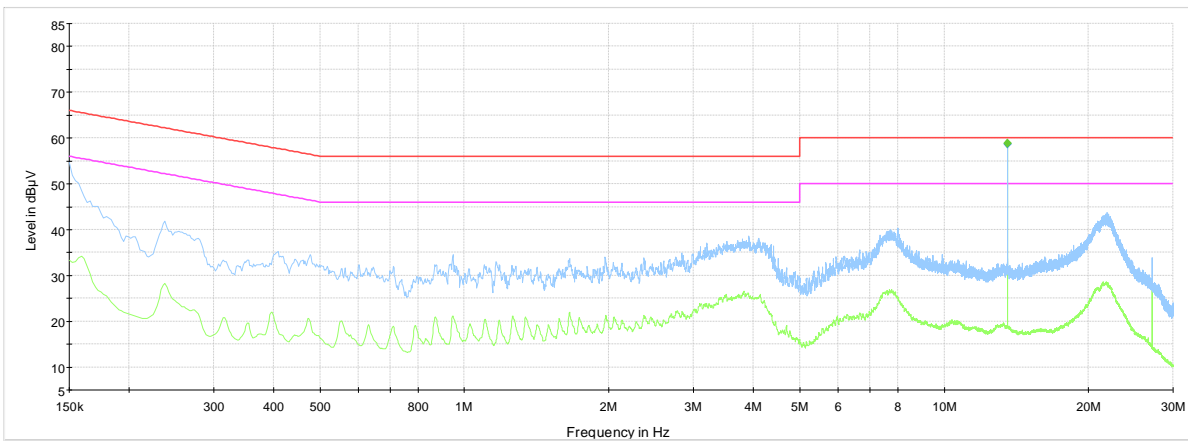


**Plot 8.8-2:** Conducted emissions on neutral line (without load on antenna)

Test data, Continued

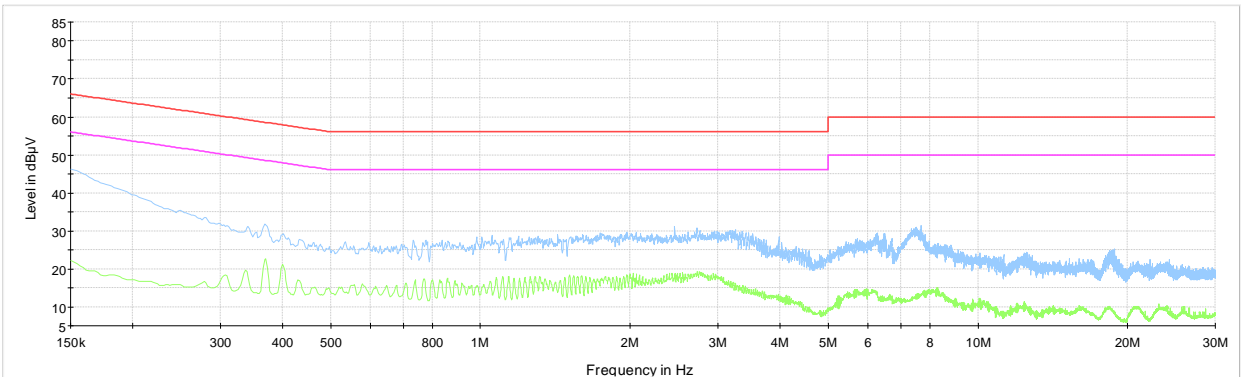

**Plot 8.8-3:** Conducted emissions on phase line (with loaded antenna)

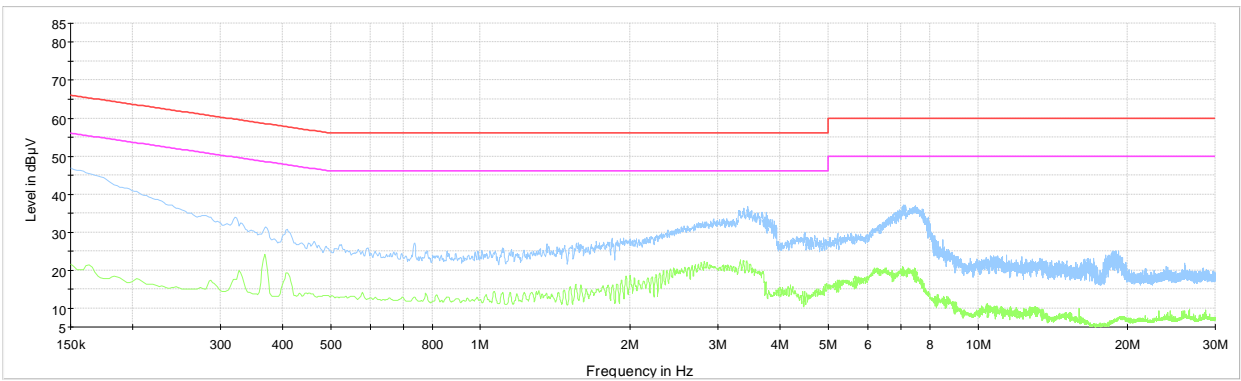

**Plot 8.8-4:** Conducted emissions on neutral line (with loaded antenna)

End of the test report