

<b>Mode</b>	LTE Band 5, CB: 10MHz, 16QAM				
<b>Channel</b>	20450	1 RB lower / Offset 0	<b>Channel</b>	20450	1 RB lower / Offset 0
					
<b>Channel</b>	20450	100% RB / Offset 0	<b>Channel</b>	20450	100% RB / Offset 0
					




## 3.5 Occupied and 26 dB Bandwidth

### 3.5.1 Test Procedures


1. Set RBW = 100 kHz, VBW = 300 kHz for WCDMA.  
Set RBW = 30 / 50 / 100 / 200 kHz, VBW = 100 / 200 / 300 / 1000 kHz for LTE channel bandwidth 1.4 / 3 / 5 / 10 MHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Using occupied bandwidth measurement function of spectrum analyzer to measure occupied bandwidth
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 26dB relative to the maximum level measured in the fundamental emission.

### 3.5.2 Test Setup

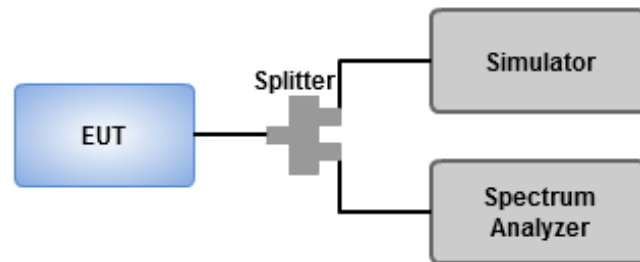


### 3.5.3 Test Result of Occupied Bandwidth


Mode	Channel	Frequency (MHz)	99% OBW (MHz)	26dB BW (MHz)
WCDMA BAND 5	4132	826.4	4.0955	4.6232
WCDMA BAND 5	4182	836.4	4.1099	4.7536
WCDMA BAND 5	4133	846.6	4.0955	4.6377

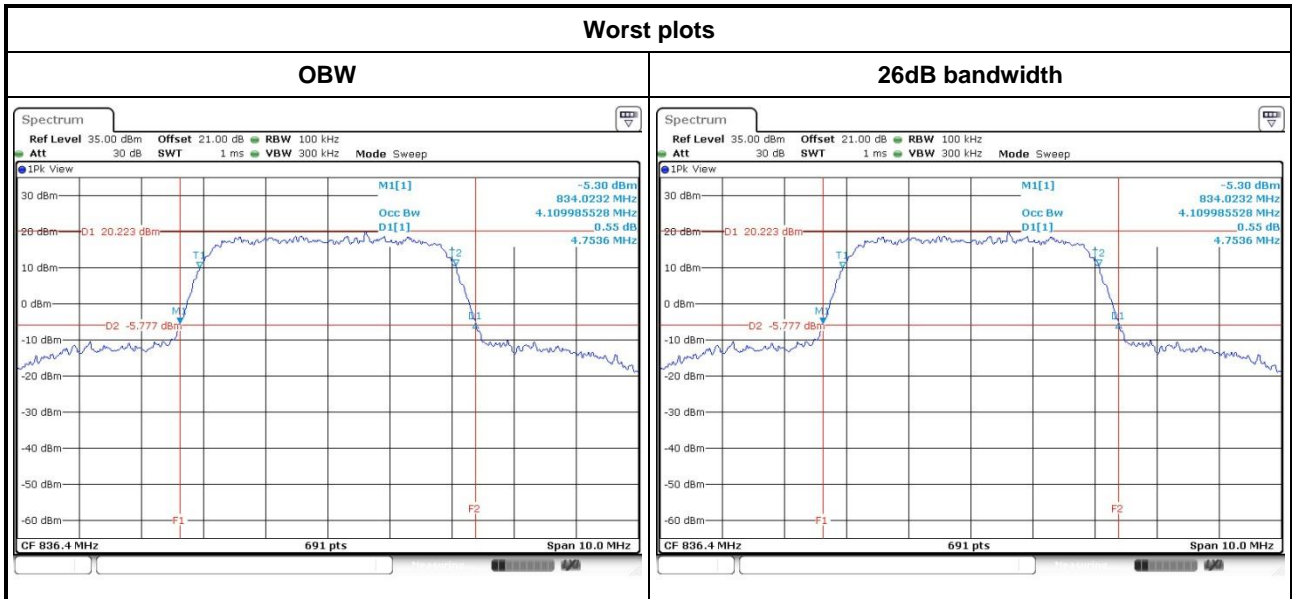


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 5	1.4	QPSK	20407	824.7	1.3080	1.0879
LTE Band 5	1.4	QPSK	20525	836.5	1.3020	1.0879
LTE Band 5	1.4	QPSK	20643	848.3	1.3050	1.0879
LTE Band 5	1.4	16QAM	20407	824.7	1.3260	1.0879
LTE Band 5	1.4	16QAM	20525	836.5	1.3200	1.0879
LTE Band 5	1.4	16QAM	20643	848.3	1.3350	1.0879

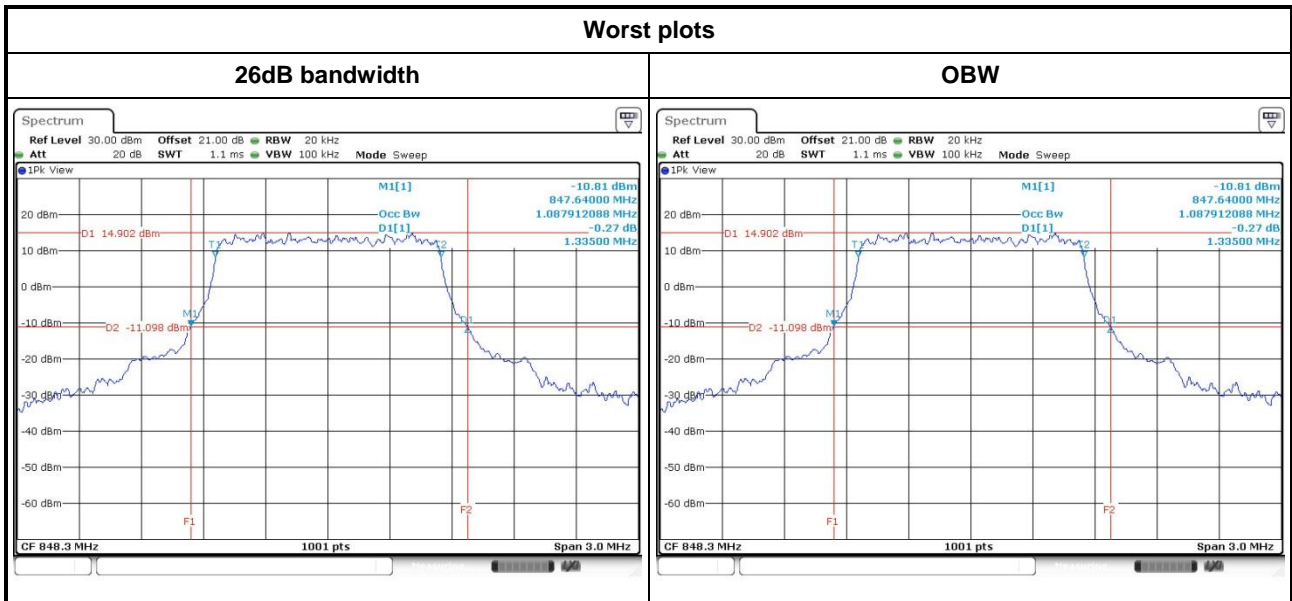


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 5	3	QPSK	20415	825.5	2.9580	2.6913
LTE Band 5	3	QPSK	20525	836.5	2.9520	2.6913
LTE Band 5	3	QPSK	20635	847.5	2.9700	2.6913
LTE Band 5	3	16QAM	20415	825.5	2.9640	2.6970
LTE Band 5	3	16QAM	20525	836.5	2.9760	2.6970
LTE Band 5	3	16QAM	20635	847.5	2.9700	2.6913

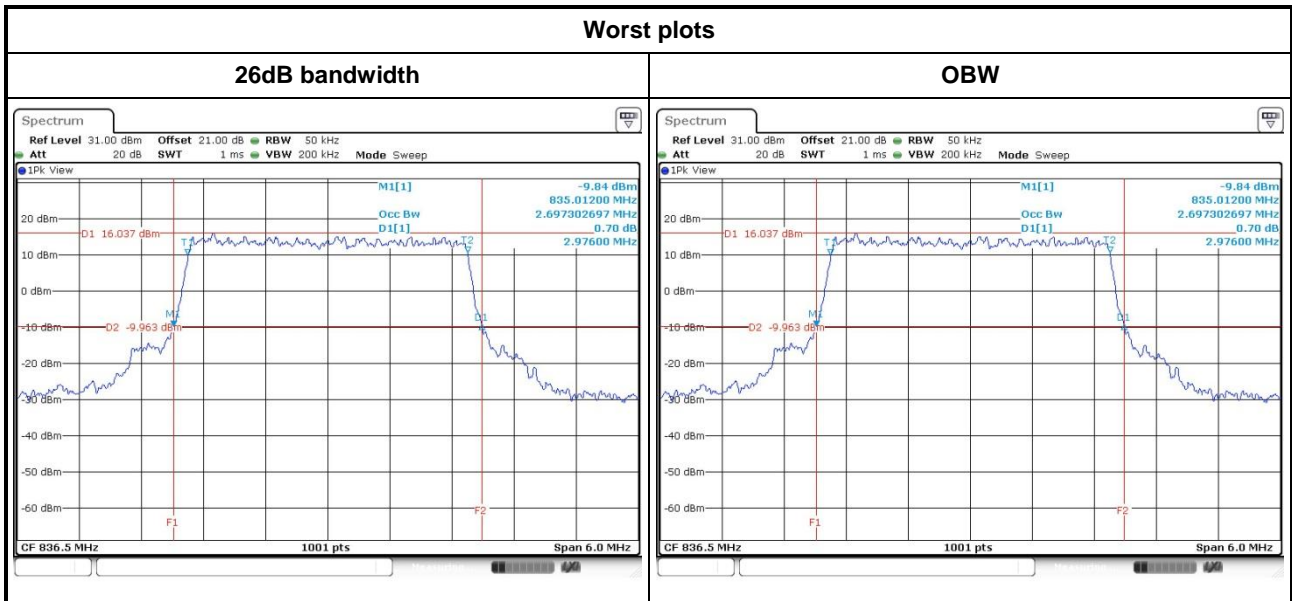

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 5	5	QPSK	20425	826.5	5.0300	4.4850
LTE Band 5	5	QPSK	20525	836.5	5.0000	4.4950
LTE Band 5	5	QPSK	20625	846.5	5.0400	4.4950
LTE Band 5	5	16QAM	20425	826.5	5.0200	4.5054
LTE Band 5	5	16QAM	20525	836.5	4.9200	4.4855
LTE Band 5	5	16QAM	20625	846.5	4.9900	4.4955

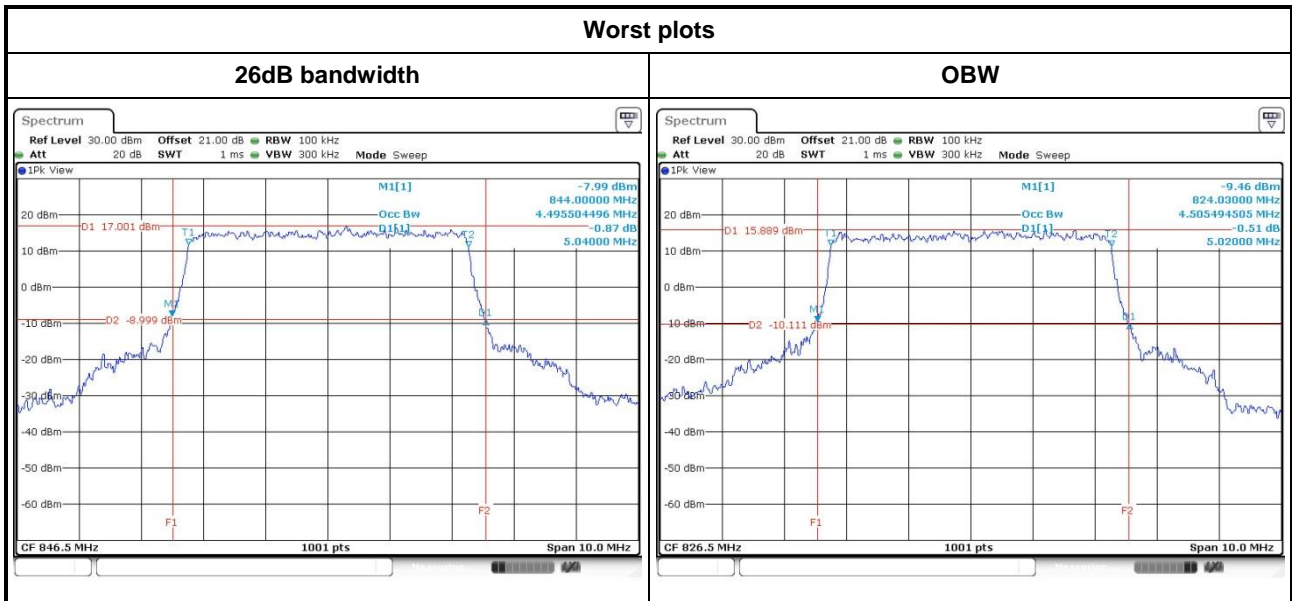

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	26dB BW (MHz)	99% OBW (MHz)
LTE Band 5	10	QPSK	20450	829.0	10.1200	8.9710
LTE Band 5	10	QPSK	20525	836.5	10.2400	8.9910
LTE Band 5	10	QPSK	20600	844.0	10.3600	9.0109
LTE Band 5	10	16QAM	20450	829.0	10.0800	8.9910
LTE Band 5	10	16QAM	20525	836.5	10.1400	8.9510
LTE Band 5	10	16QAM	20600	844.0	10.1200	9.0109

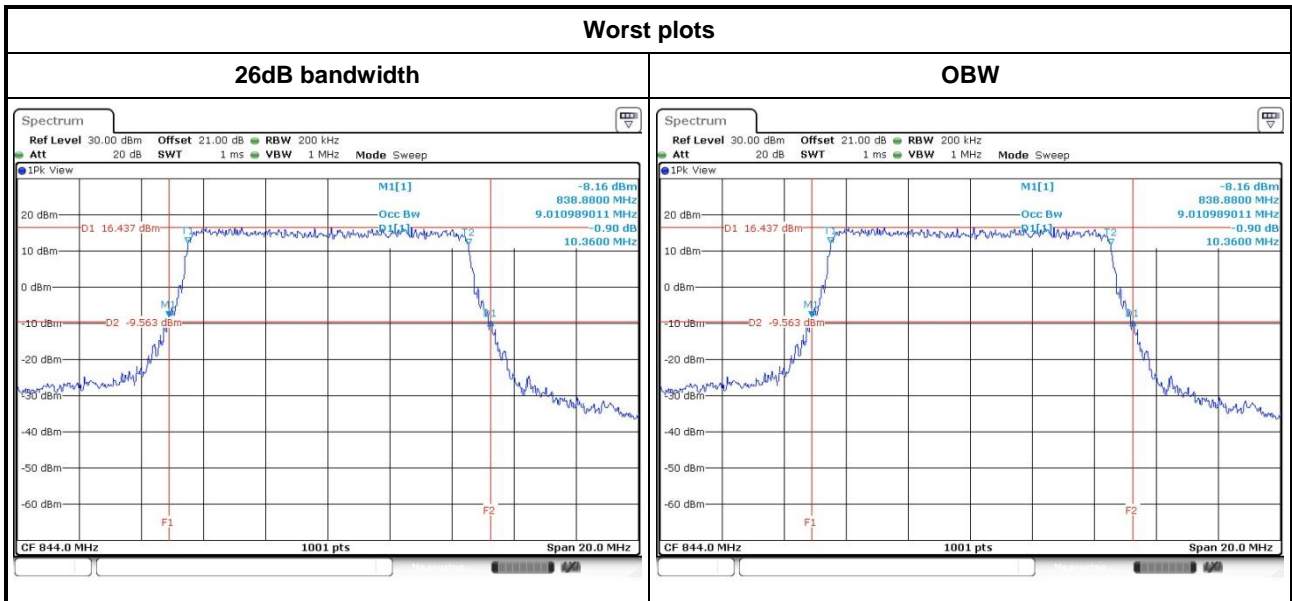



## 3.6 Peak to Average Ratio


### 3.6.1 Limit of Peak to Average Ratio

Peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### 3.6.2 Test Procedures


1. Enable CCDF function of spectrum analyzer and set RBW = 10 MHz.
2. Set the number of counts to a value that stabilizes the measured CCDF curve.
3. Record the maximum PAPR level associated with a probability of 0.1%.

### 3.6.3 Test Setup

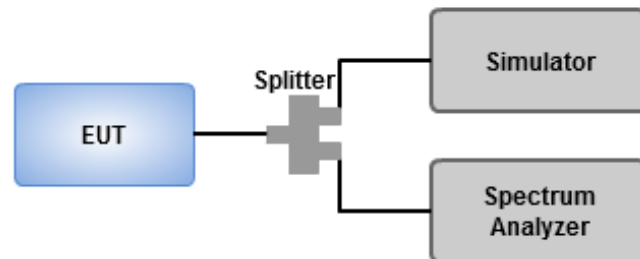


### 3.6.4 Test Result of Peak to Average Ratio


MODE	Channel	Frequency (MHz)	Peak to Average ratio (dB)
WCDMA BAND 5	4132	826.4	2.93
WCDMA BAND 5	4182	836.4	1.83
WCDMA BAND 5	4133	846.6	2.90

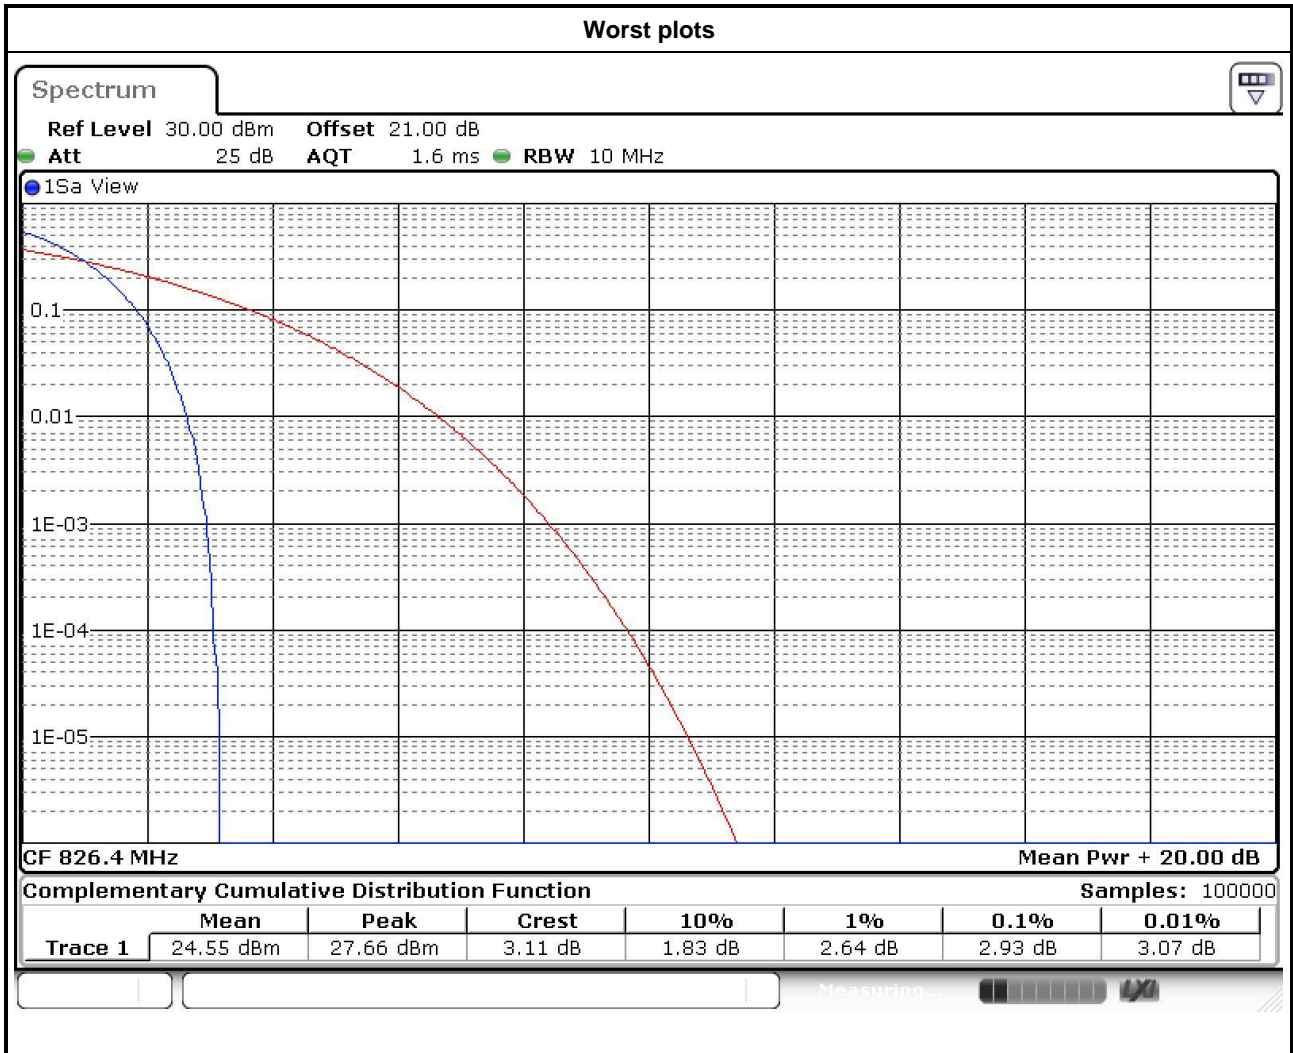


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 5	1.4	QPSK	20407	824.7	6.03
LTE Band 5	1.4	QPSK	20525	836.5	5.71
LTE Band 5	1.4	QPSK	20643	848.3	5.94
LTE Band 5	1.4	16QAM	20407	824.7	7.01
LTE Band 5	1.4	16QAM	20525	836.5	6.55
LTE Band 5	1.4	16QAM	20643	848.3	6.81

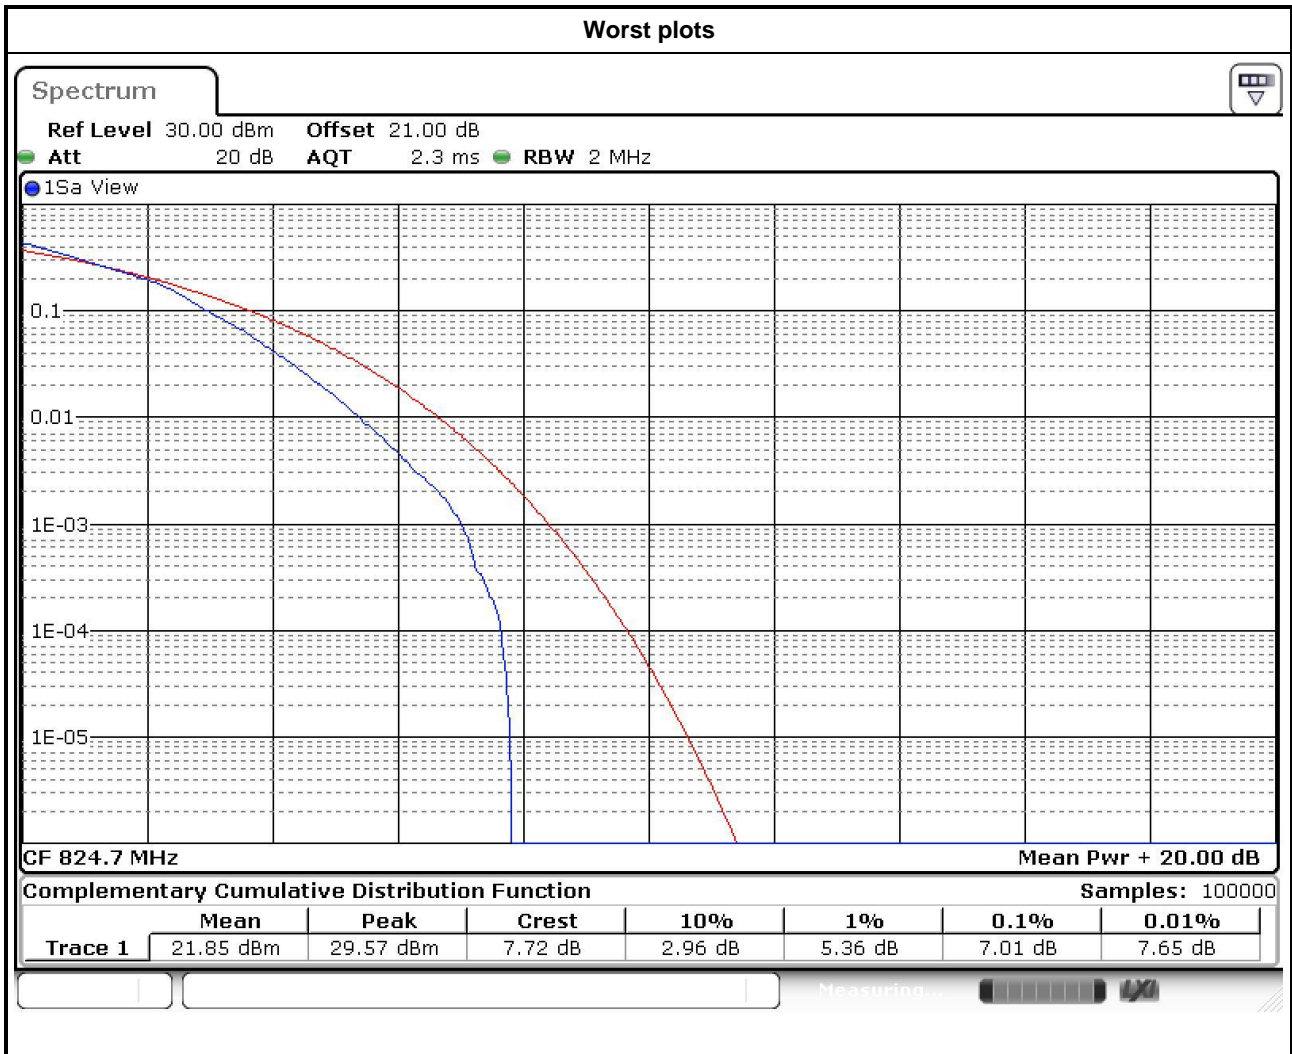


Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 5	3	QPSK	20415	825.5	5.77
LTE Band 5	3	QPSK	20525	836.5	5.45
LTE Band 5	3	QPSK	20635	847.5	5.48
LTE Band 5	3	16QAM	20415	825.5	6.67
LTE Band 5	3	16QAM	20525	836.5	6.35
LTE Band 5	3	16QAM	20635	847.5	6.41

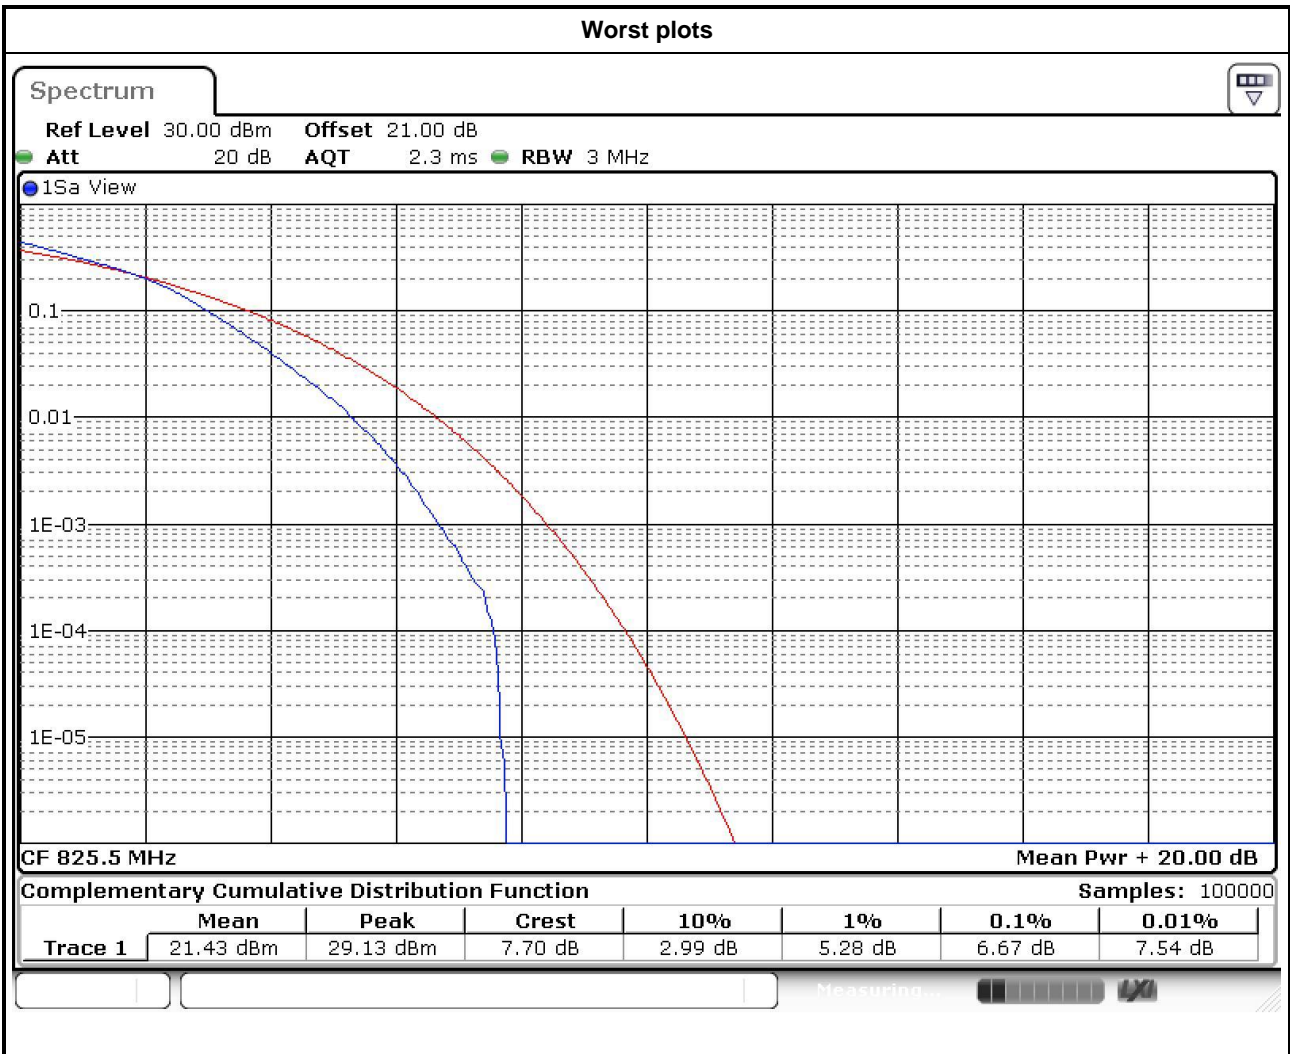

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 5	5	QPSK	20425	826.5	5.62
LTE Band 5	5	QPSK	20525	836.5	5.30
LTE Band 5	5	QPSK	20625	846.5	5.45
LTE Band 5	5	16QAM	20425	826.5	6.38
LTE Band 5	5	16QAM	20525	836.5	6.14
LTE Band 5	5	16QAM	20625	846.5	6.49

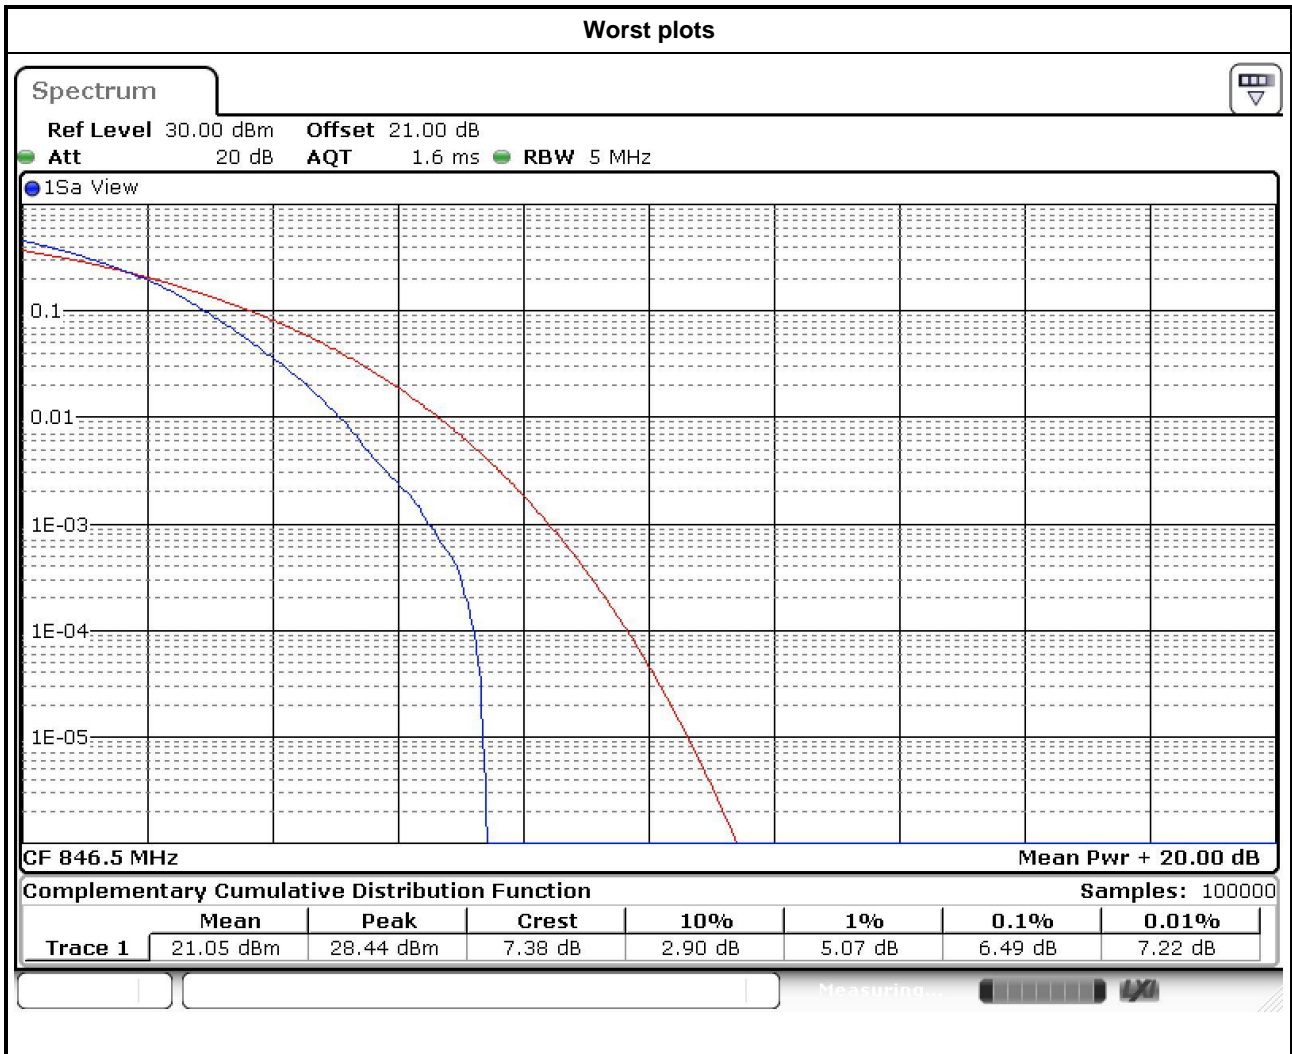

Mode	CB (MHz)	Modulation	Channel	Frequency (MHz)	Peak to Average ratio (dB)
LTE Band 5	10	QPSK	20450	829.0	5.48
LTE Band 5	10	QPSK	20525	836.5	5.39
LTE Band 5	10	QPSK	20600	844.0	5.74
LTE Band 5	10	16QAM	20450	829.0	6.29
LTE Band 5	10	16QAM	20525	836.5	6.20
LTE Band 5	10	16QAM	20600	844.0	6.38

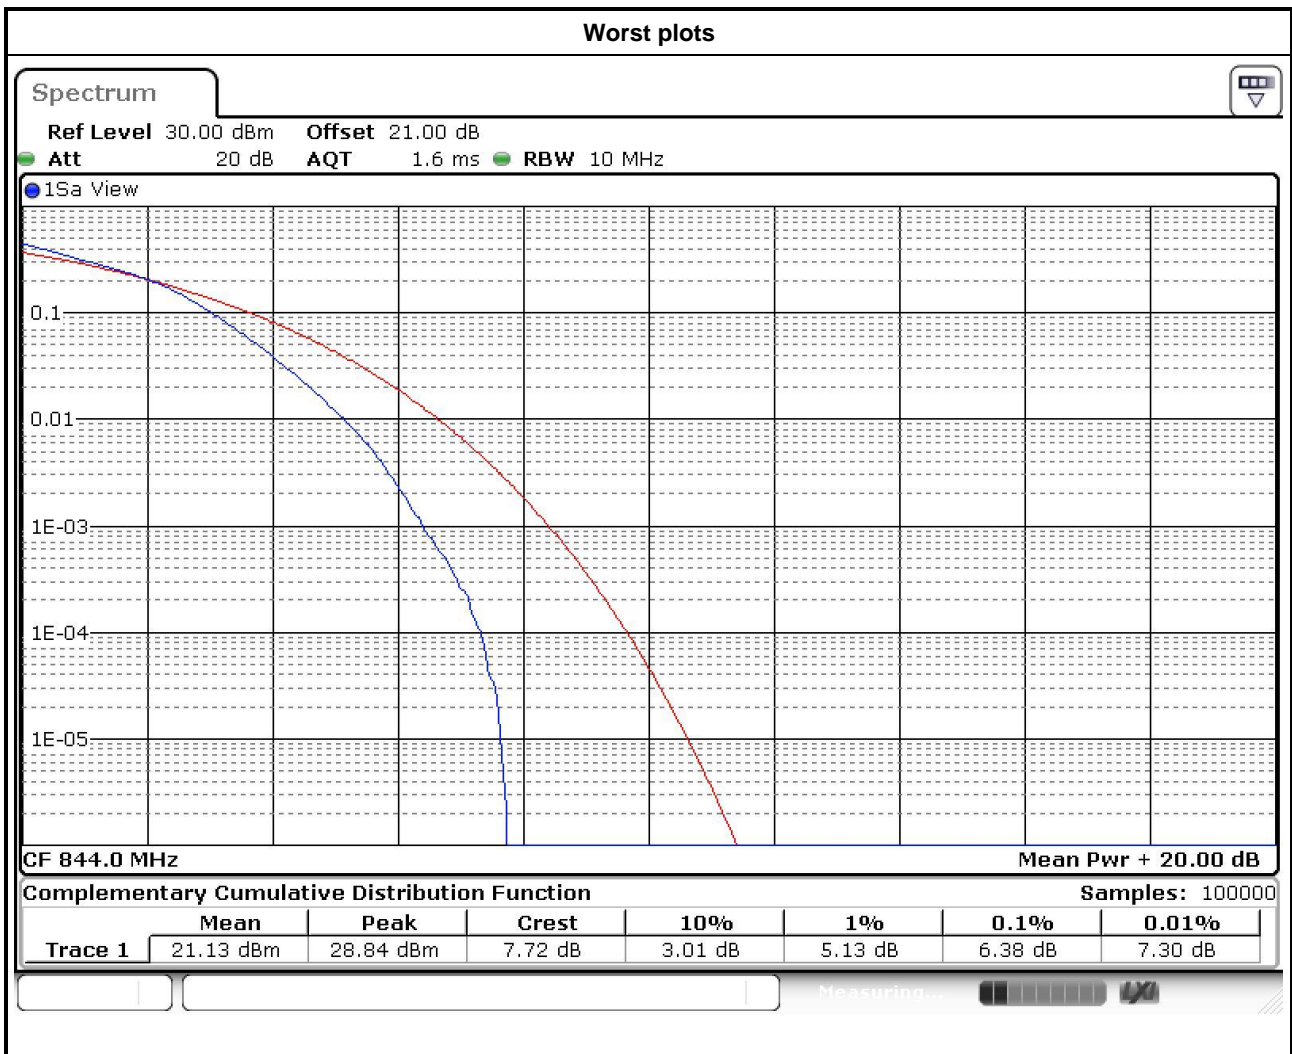

## 3.7 Frequency Stability


### 3.7.1 Limit of Frequency Stability

The frequency stability shall be less +/- 2.5ppm.

### 3.7.2 Test Procedures

1. EUT was placed at temperature chamber and connected to an external power supply.
2. Temperature and voltage condition shall be tested to confirm frequency stability.
3. Temperature range is from -30~55°C and voltage range is from lowest to highest working voltage.
4. Link up EUT and simulator. Confirm frequency drift value of simulator and record it.

### 3.7.3 Test Setup

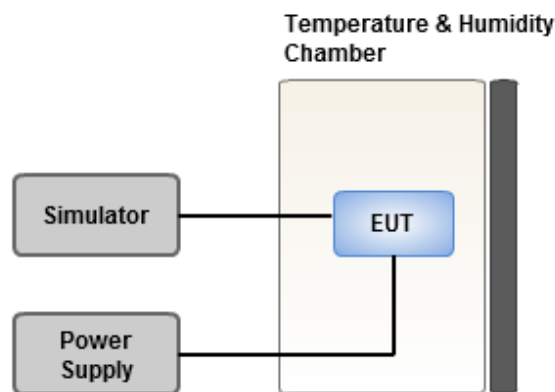

### 3.7.4 Test Result of Frequency Stability

WCDMA Band 5			
Temperature (°C)	Voltage (dc)	Frequency Drift (ppm)	Limit (ppm)
55	3.7	0.022	2.5
50	3.7	0.019	2.5
40	3.7	0.017	2.5
30	3.7	0.016	2.5
20	3.7	0.019	2.5
10	3.7	0.022	2.5
0	3.7	0.020	2.5
-10	3.7	0.019	2.5
-20	3.7	0.018	2.5
-30	3.7	0.023	2.5
20	4.5	0.019	2.5
20	3.2	0.018	2.5



<b>LTE Band 5, CB: 1.4MHz</b>			
<b>Temperature (°C)</b>	<b>Voltage (dc)</b>	<b>Frequency Drift (ppm)</b>	<b>Limit (ppm)</b>
55	3.7	0.027	2.5
50	3.7	0.024	2.5
40	3.7	0.019	2.5
30	3.7	0.022	2.5
20	3.7	0.023	2.5
10	3.7	0.019	2.5
0	3.7	0.018	2.5
-10	3.7	0.022	2.5
-20	3.7	0.017	2.5
-30	3.7	0.019	2.5
20	4.5	0.025	2.5
20	3.2	0.022	2.5

<b>LTE Band 5, CB: 3MHz</b>			
<b>Temperature (°C)</b>	<b>Voltage (dc)</b>	<b>Frequency Drift (ppm)</b>	<b>Limit (ppm)</b>
55	3.7	0.029	2.5
50	3.7	0.023	2.5
40	3.7	0.025	2.5
30	3.7	0.022	2.5
20	3.7	0.023	2.5
10	3.7	0.019	2.5
0	3.7	0.023	2.5
-10	3.7	0.025	2.5
-20	3.7	0.026	2.5
-30	3.7	0.027	2.5
20	4.5	0.026	2.5
20	3.2	0.019	2.5

<b>LTE Band 5, CB: 5MHz</b>			
<b>Temperature (°C)</b>	<b>Voltage (dc)</b>	<b>Frequency Drift (ppm)</b>	<b>Limit (ppm)</b>
55	3.7	0.023	2.5
50	3.7	0.025	2.5
40	3.7	0.019	2.5
30	3.7	0.022	2.5
20	3.7	0.023	2.5
10	3.7	0.025	2.5
0	3.7	0.029	2.5
-10	3.7	0.027	2.5
-20	3.7	0.022	2.5
-30	3.7	0.019	2.5
20	4.5	0.027	2.5
20	3.2	0.019	2.5

<b>LTE Band 5, CB: 10MHz</b>			
<b>Temperature (°C)</b>	<b>Voltage (dc)</b>	<b>Frequency Drift (ppm)</b>	<b>Limit (ppm)</b>
55	3.7	0.022	2.5
50	3.7	0.020	2.5
40	3.7	0.025	2.5
30	3.7	0.019	2.5
20	3.7	0.022	2.5
10	3.7	0.020	2.5
0	3.7	0.025	2.5
-10	3.7	0.020	2.5
-20	3.7	0.023	2.5
-30	3.7	0.020	2.5
20	4.5	0.023	2.5
20	3.2	0.019	2.5

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan,  
R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Hsiang, Tao  
Yuan Hsien 333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Hsiang, Tao  
Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==