

FCC Test Report

Report No.: AGC00793180601FE04

FCC ID : 2AQN2-T10S

APPLICATION PURPOSE : Original Equipment

PRODUCT DESIGNATION: Bluetooth Headset

BRAND NAME : N/A

MODEL NAME : T10S

CLIENT: Shenzhen winnerelec Industrial CO.,LTD

DATE OF ISSUE : Jul. 10, 2018

STANDARD(S) : FCC Part 15 Subpart C Section 15.247

REPORT VERSION: V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd

CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.

Attestation of Global Compliance

Tel: +86-755 2908 1955 Fax: +86-755 2600 8484 E-mail: agc@agc-cert.com @ 400 089 2118 Add: 2/F., Building 2, No.1-4,Chaxi Sanwei Technical Industrial Park,Gushu, Xixiang, Baoan District, Shenzhen, Guangdong China



Page 2 of 73

Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0		Jul. 10, 2018	Valid	Initial release



TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	
2.3. RECEIVER INPUT BANDWIDTH	
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	7
2.6. TEST METHOD	8
2.7. EQUIPMENT MODIFICATIONS	
3. MEASUREMENT UNCERTAINTY	9
4. DESCRIPTION OF TEST MODES	10
5. SYSTEM TEST CONFIGURATION	12
5.1. CONFIGURATION OF EUT SYSTEM	12
5.2. EQUIPMENT USED IN EUT SYSTEM	12
5.3. SUMMARY OF TEST RESULTS	13
6. TEST FACILITY	14
7. TEST EQUIPMENT LIST	
8. PEAK OUTPUT POWER	
8.1. MEASUREMENT PROCEDURE	16
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
8.3. LIMITS AND MEASUREMENT RESULT	17
9. BANDWIDTH	23
9.1. MEASUREMENT PROCEDURE	23
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	23
9.3. LIMITS AND MEASUREMENT RESULTS	23
10. CONDUCTED SPURIOUS EMISSION	30
10.1. MEASUREMENT PROCEDURE	30
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	30
10.2 LIMITS AND MEASUDEMENT DESUILT	20



11. RADIATED EMISSION	
11.1. TEST LIMIT	
11.2. MEASUREMENT PROCEDURE	
11.3. TEST SETUP	
11.4. TEST RESULT	38
12. BAND EDGE EMISSION	51
12.1. MEASUREMENT PROCEDURE	
12.2. TEST SET-UP	
12.3. TEST RESULT	52
13. NUMBER OF HOPPING FREQUENCY	
13.1. MEASUREMENT PROCEDURE	56
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	56
13.3. LIMITS AND MEASUREMENT RESULT	
14. TIME OF OCCUPANCY (DWELL TIME)	
14.1. MEASUREMENT PROCEDURE	58
14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	
14.3. LIMITS AND MEASUREMENT RESULT	
15. FREQUENCY SEPARATION	61
15.1. MEASUREMENT PROCEDURE	61
15.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	61
15.3. LIMITS AND MEASUREMENT RESULT	61
16. LINE CONDUCTED EMISSION TEST	63
16.1. LIMITS OF LINE CONDUCTED EMISSION TEST	63
16.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	63
16.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	64
16.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	64
16.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	64
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	65
APPENDIX B: PHOTOGRAPHS OF EUT	67

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document to confirmed at attp://www.agc.gett.com.



Report No.: AGC00793180601FE04 Page 5 of 73

1. VERIFICATION OF CONFORMITY

× 1105.	N CO A CANADA	
Applicant	Shenzhen winnerelec Industrial CO.,LTD	
Address	411-416 Room Social security building, Honghua Bei Road Gongming Street Guangming New District, Shenzhen, China	
Manufacturer	Shenzhen winnerelec Industrial CO.,LTD	
Address	411-416 Room Social security building, Honghua Bei Road Gongming Street Guangming New District, Shenzhen, hina	
Product Designation	Bluetooth Headset	
Brand Name	N/A	
Test Model	T10S	
Date of test	Jun. 21, 2018 to Jul. 07, 2018	
Deviation	None	
Condition of Test Sample	Normal Management of the Company of	
Report Template	AGCRT-US-BR/RF (2013-03-01)	
00 0 - 3 40		

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, the energy emitted by the sample tested as described in this report is in compliance with the requirements of FCC Rules Part 15.247. The test results of this report relate only to the tested sample identified in this report.

Tested By		Harry	Zhang	
® Allegation of Globa	Henry Zhang(Z	Zhang Zh	nuorui)	Jul. 07, 2018
Reviewed By_	The total companies	cud	cheng	The state of County Company
CC	Cool Cheng(Che	eng Mer	ngguo)	Jul. 10, 2018
Approved By		Lowe	Shei	
Allegation of Globa	Forrest Lei(Le			Jul. 10, 2018

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Report No.: AGC00793180601FE04 Page 6 of 73

2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is "Bluetooth Headset" designed as a "Communication Device". It is designed by way of utilizing the FHSS technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz
RF Output Power	18.88dBm(Max)
Bluetooth Version	V3.0
Modulation	GFSK, π /4-DQPSK, 8DPSK for BR/EDR
Number of channels	79 for BR/EDR
Hardware Version	T9S_M1A2
Software Version	T9S_REV:02
Antenna Designation	Ceramic Antenna
Antenna Gain	OdBi Market Company Co
Power Supply	DC 3.7V by Battery

Note: 1. The USB port only used for charging and can't be used to transfer data with PC.

2. The BT function of EUT didn't work when charging.

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	O F disposion	2402MHz	
	CO 1	2403MHz	
		加 、 测 :	
	38	2440 MHz	
2402~2480MHz	39	2441 MHz	
	40	2442 MHz	
		THE STATE OF	
	T 77	2479 MHz	
	78	2480 MHz	



Report No.: AGC00793180601FE04 Page 7 of 73

2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01, 51, 03, 55, 05, 04

2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For synchronization with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire. LAP(24 bits),4LSB's(4bits)(Input 1) and the 27MSB's of the clock(Input 2) are used. With this input values different mathematical procedures(permutations, additions, XOR-operations) are performed to generate te Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always Differ from the first one.

The results spown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gott.com.



Page 8 of 73

2.6. TEST METHOD

All measurements contained in this report were conducted with ANSI C63.10-2013.

2.7. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.



Report No.: AGC00793180601FE04 Page 9 of 73

3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %

- Uncertainty of Conducted Emission, Uc = ±3.2 dB
- Uncertainty of Radiated Emission below 1GHz, Uc = ±3.9 dB
- Uncertainty of Radiated Emission above 1GHz, Uc = ±4.8 dB

The results spowed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.gott.com.






4. DESCRIPTION OF TEST MODES

	NO.	TEST MODE DESCRIPTION
KE TANIONOS	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	Low channel GFSK
© Æ	2	Middle channel GFSK
GG F	3	High channel GFSK
1	4	Low channel π /4-DQPSK
The street of Global	5	Middle channel π /4-DQPSK
Alles	6	High channel π /4-DQPSK
	7	Low channel 8DPSK
(R) A	8 and contract	Middle channel 8DPSK
CC.	9	High channel 8DPSK
	10	BT Link
N 1 4		

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. The EUT used fully-charged battery when tested.



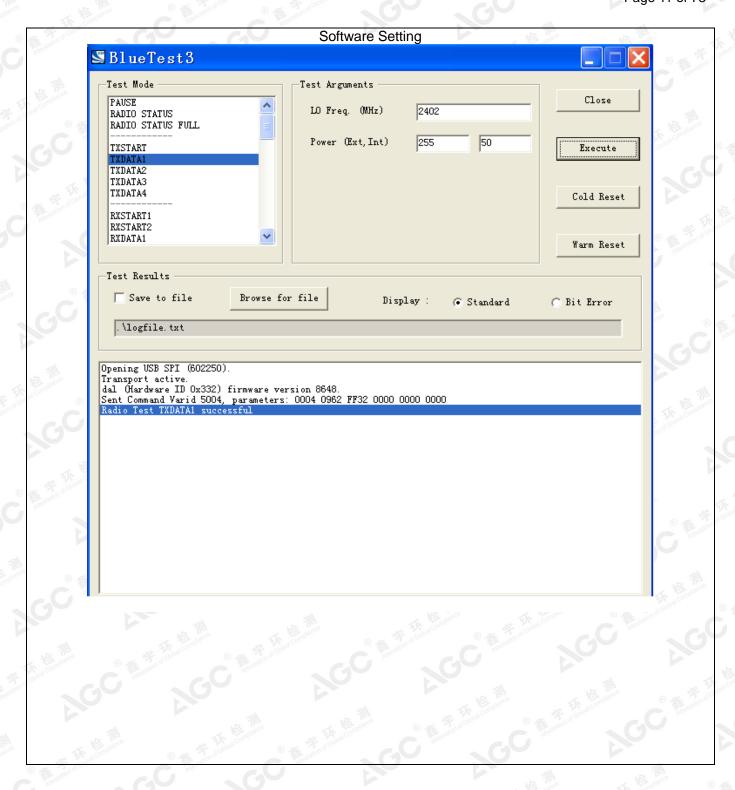

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by (GC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a titp://www.agc.gatt.com.



Page 12 of 73

5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF EUT SYSTEM

Configure 1: (Normal hopping)

EUT

Configure 2: (Control continuous TX)

EUT	# .	Control box	oal Con	PC

5.2. EQUIPMENT USED IN EUT SYSTEM

~·-·		. I O I = III		
Item	Equipment	Mfr/Brand	Model/Type No.	Remark
al Com Tance	Bluetooth Headset	winnerelec	T10S	EUT
2	Battery	XH	802540	Accessory
3	PC	APPLE	A1465	A.E
4	Control box	CSR	USB_SPI_TOOLS	A.E
5	IPOD	APPLE	A1364	A.E
6	USB Cable	N/A	1m unshielded	A.E
7	Temporary Antenna Connector	T10	N/A	A.E

Note: The temporary antenna connector is a RF SMA connector with fifty ohm resistor, which is welded to the PCB board or module.

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Page 13 of 73

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
§15.247 b(1)	Peak Output Power	Compliant
§15.247 a(1)	20 dB Bandwidth	Compliant
§15.247 d	Conducted Spurious Emission	Compliant
§15.247 d §15.209	Radiated Emission	Compliant
§15.247 d	Band Edges	Compliant
§15.247 a(1)(iii)	Number of hopping frequency	Compliant
§15.247 a(1)(iii)	Time of Occupancy	Compliant
§15.247 a(1)	Frequency Separation	Compliant
§15.207	Line conduction Emission	N/A

Note: N/A means it's not applicable to this item.



Page 14 of 73

6. TEST FACILITY

Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd
Location	1-2F., Bldg.2, No.1-4, Chaxi Sanwei Technical Industrial Park, Gushu, Xixiang, Bao'an District B112-B113, Bldg.12, Baoan Bldg Materials Center, No.1 of Xixiang Inner Ring Road, Baoan District, Shenzhen 518012
NVLAP Lab Code	600153-0
Designation Number	CN5028
Test Firm Registration Number	682566
Description	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by National Voluntary Laboratory Accreditation program, NVLAP Code 600153-0




Page 15 of 73

7. TEST EQUIPMENT LIST

TEST EQUIPMENT OF RADIATED EMISSION TEST

Manufacturer	Model	S/N	Cal. Date	Cal. Due
R&S	ESCI	10096	Jun.20, 2018	Jun.19, 2019
Aglient	N9010A	MY53470504	Dec.08, 2017	Dec.07, 2018
SCHWARZBECK	BBHA 9170	#768	Sep.20, 2017	Sep.19, 2018
ChengYi	EMC184045SE	980508	Sep.15, 2017	Sep.14, 2018
ETS LINDGREN	3117	00034609	May.18, 2017	May.17, 2019
SCHWARZBECK	BBV 9718	9718-205	Jun.20, 2018	Jun.19, 2019
SCHWARZBECK	VULB9168	D69250	Sep.28, 2017	Sep.27, 2018
A.H.Systems,Inc	SAS-562B	- -	Mar. 01, 2018	Feb. 28, 2019
MXT	RS1	R005	N/A	N/A
MXT	RS1	R006	N/A	N/A
	R&S Aglient SCHWARZBECK ChengYi ETS LINDGREN SCHWARZBECK SCHWARZBECK A.H.Systems,Inc MXT	R&S ESCI Aglient N9010A SCHWARZBECK BBHA 9170 ChengYi EMC184045SE ETS LINDGREN 3117 SCHWARZBECK BBV 9718 SCHWARZBECK VULB9168 A.H.Systems,Inc SAS-562B MXT RS1	R&S ESCI 10096 Aglient N9010A MY53470504 SCHWARZBECK BBHA 9170 #768 ChengYi EMC184045SE 980508 ETS LINDGREN 3117 00034609 SCHWARZBECK BBV 9718 9718-205 SCHWARZBECK VULB9168 D69250 A.H.Systems,Inc SAS-562B MXT RS1 R005	R&S ESCI 10096 Jun.20, 2018 Aglient N9010A MY53470504 Dec.08, 2017 SCHWARZBECK BBHA 9170 #768 Sep.20, 2017 ChengYi EMC184045SE 980508 Sep.15, 2017 ETS LINDGREN 3117 00034609 May.18, 2017 SCHWARZBECK BBV 9718 9718-205 Jun.20, 2018 SCHWARZBECK VULB9168 D69250 Sep.28, 2017 A.H.Systems,Inc SAS-562B Mar. 01, 2018 MXT RS1 R005 N/A






8. PEAK OUTPUT POWER


8.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, middle and the bottom operation frequency individually.
- 3. RBW > the 20 dB bandwidth of the emission being measured, VBW ≥ RBW.
- 4. Record the maximum power from the Spectrum Analyzer.
- 5. The maximum peak power shall be less 21dBm.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

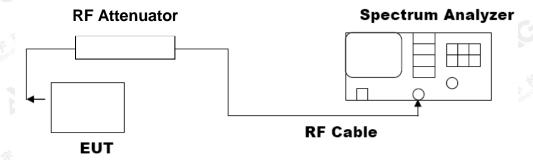






8.3. LIMITS AND MEASUREMENT RESULT


	PEAK OUTPUT POWE	R MEASUREMENT RESULT	
	FOR GFSK	MOUDULATION	
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	16.31	21	Pass
2.441	18.43	21	Pass
2.480	18.88	21	Pass

CH₀

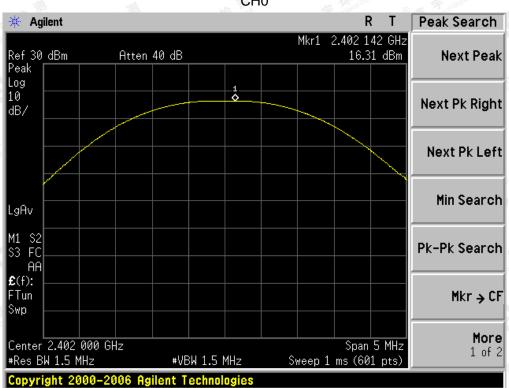





CH39

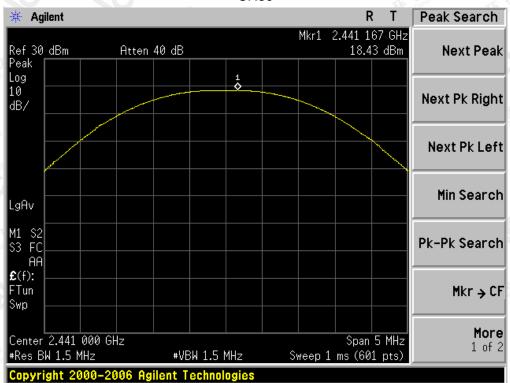

CH78

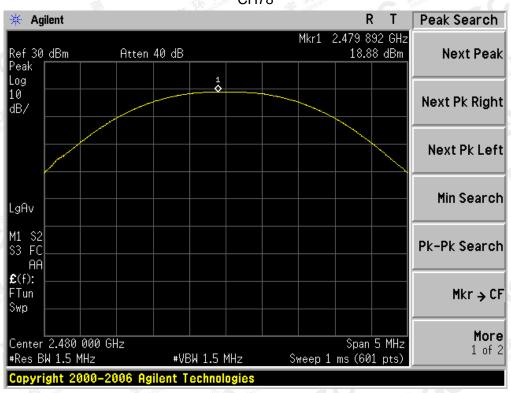


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gatt.com.





	PEAK OUTPUT POWE	R MEASUREMENT RESULT	
	FOR ∏ /4-D0	PSK MODULATION	
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	15.93	21	Pass
2.441	17.71	21	Pass
2.480	18.23	21	Pass


CH₀

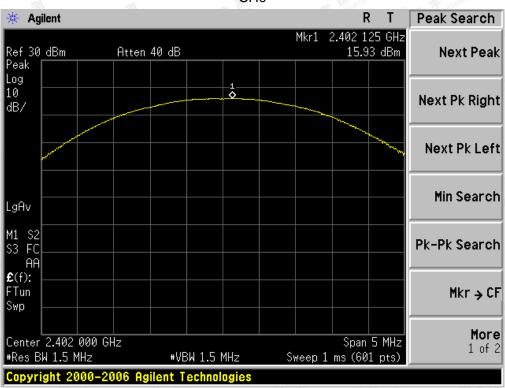


The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.




CH39

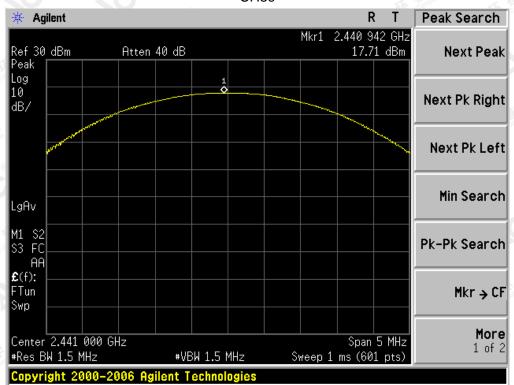

CH78

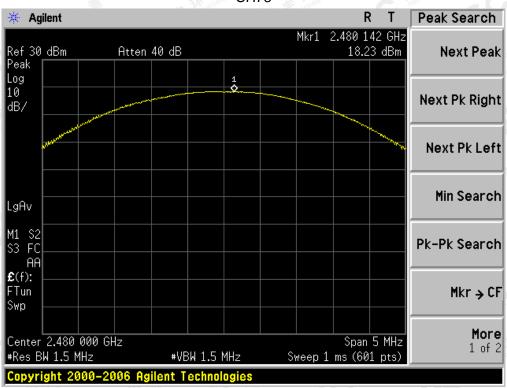






	PEAK OUTPUT POWER I	MEASUREMENT RESULT	
	FOR 8-DPSK	MODULATION	
Frequency (GHz)	Peak Power (dBm)	Applicable Limits (dBm)	Pass or Fail
2.402	15.90	21	Pass
2.441	17.68	21	Pass
2.480	18.11	21	Pass


CH₀

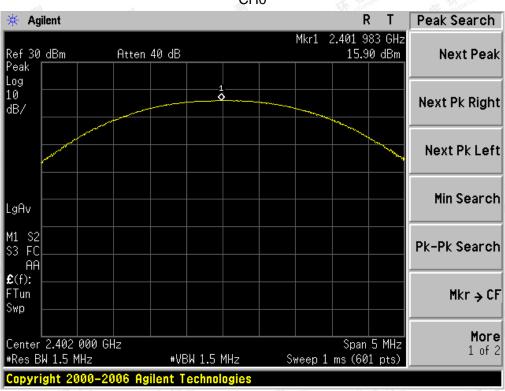

The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by (SC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gent.com.




CH39

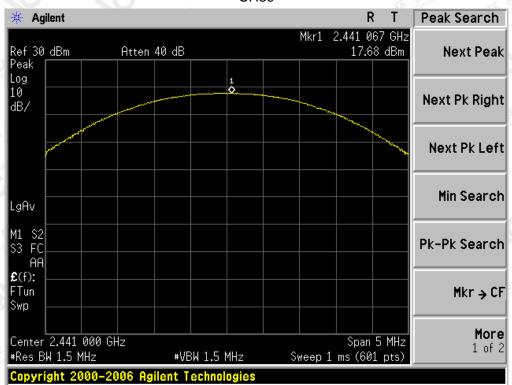

15 Pro-

CH78

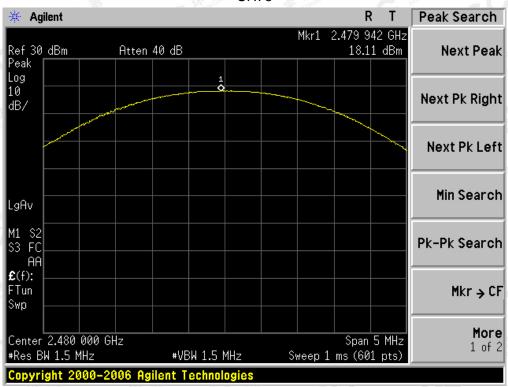




Page 23 of 73

9. BANDWIDTH

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hoping channel RBW \geq 1% of the 20 dB bandwidth, VBW \geq 3RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

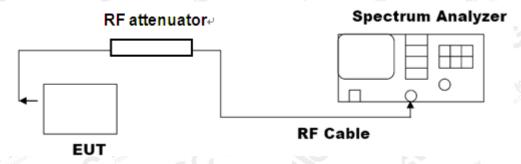

Note: The EUT has been used temporary antenna connector for testing.

9.3. LIMITS AND MEASUREMENT RESULTS


BLUETOOTH 1MBPS LIMITS AND MEASUREMENT RESULT						
Measurement Result						
Applicable Limits Test Data (MHz))		Donalf.		
		99%OBW (MHz)	-20dB BW(MHz)	Result		
(a) F of cloud Company	Low Channel	0.932	1.100		PASS	1117:
N/A	Middle Channel	0.922	1.108	THE STATE OF	PASS	plance
	High Channel	0.941	1.114	The Medical Compliance	PASS	



TEST PLOT OF BANDWIDTH FOR LOW CHANNEL




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

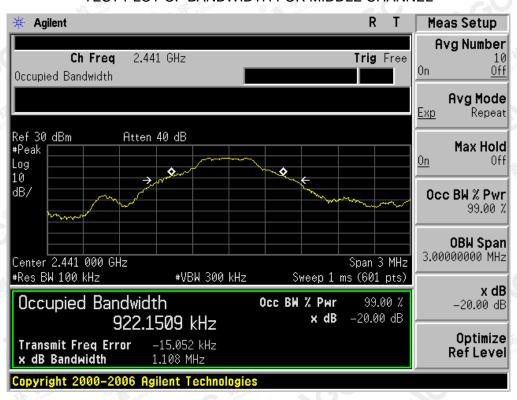




TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

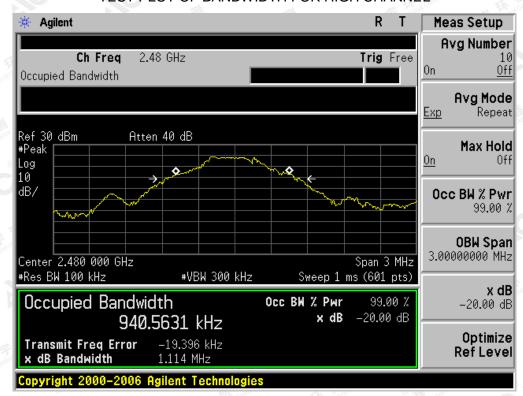



Alle Control of the C				
	BLUETOOTH 2	MBPS LIMITS AN	D MEASUREMENT RES	BULT
		Me	asurement Result	
Applicable Limits Test Data (MHz)			Dogult	
		99%OBW (MHz)	-20dB BW(MHz)	Result
不 Pangiance	Low Channel	1.279	1.392	PASS
N/A	Middle Channel	1.265	1.416	PASS
	High Channel	1.268	1.390	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

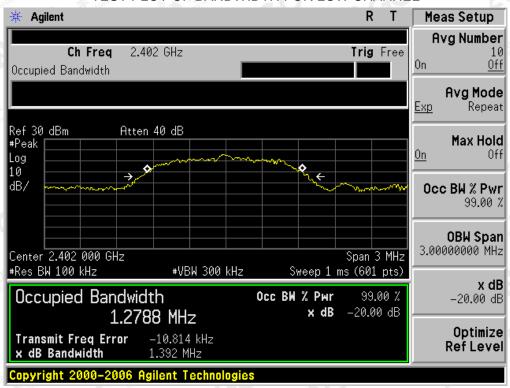


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

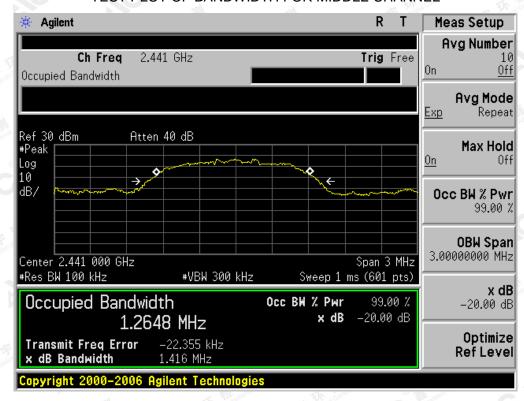


TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

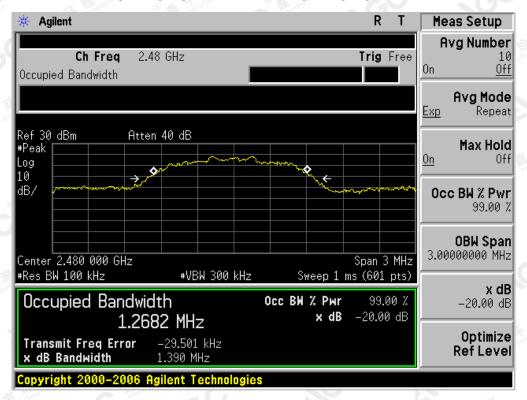



	BLUETOOTH	3MBPS LIMITS AN	D MEASUREMENT RES	SULT
Measurement Result				
Applicable Limits Test Data (MHz)		Dogulé		
		99%OBW (MHz)	-20dB BW(MHz)	Result
大 ^按 河	Low Channel	1.282	1.406	PASS
N/A	Middle Channel	1.272	1.371	PASS
CO M	High Channel	1.269	1.405	PASS


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

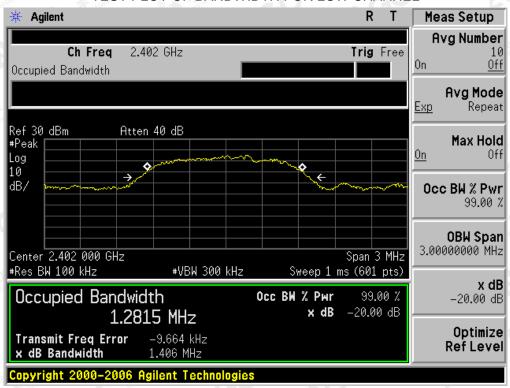


The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

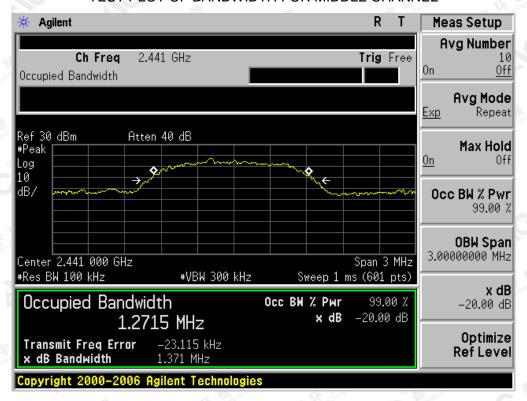

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

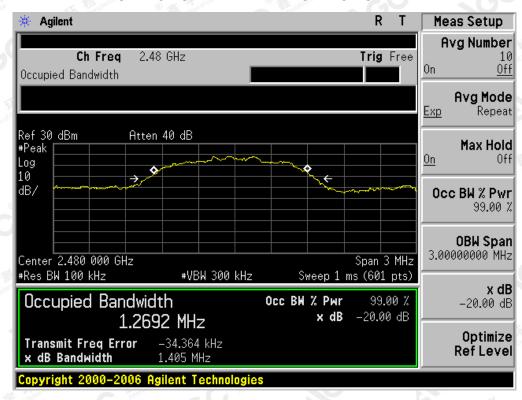




Report No.: AGC00793180601FE04 Page 30 of 73

10. CONDUCTED SPURIOUS EMISSION

10.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions
 from the lowest frequency generated in the EUT up through the 10th harmonic.
 - RBW = 100 kHz; VBW = 300kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

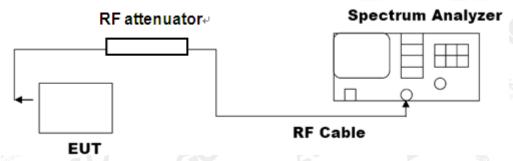


10.3. LIMITS AND MEASUREMENT RESULT


LIMITS AND MEASUREMENT RESULT				
Angliaghla Limita	Measurement Res	ult		
Applicable Limits	Test Data	Result		
In any 100 KHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency	At least -20dBc than the limit Specified on the BOTTOM Channel	PASS		
power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power. In addition, radiation emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in§15.209(a))	At least -20dBc than the limit Specified on the TOP Channel	PASS		

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL

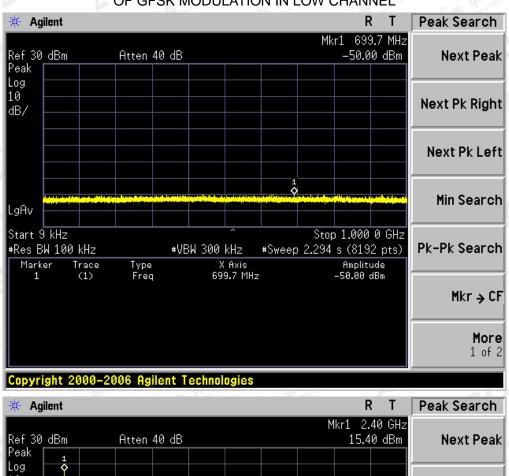


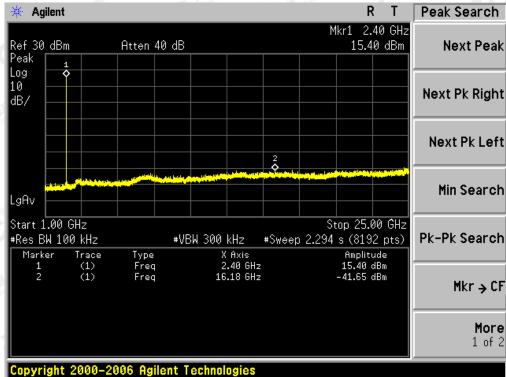

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

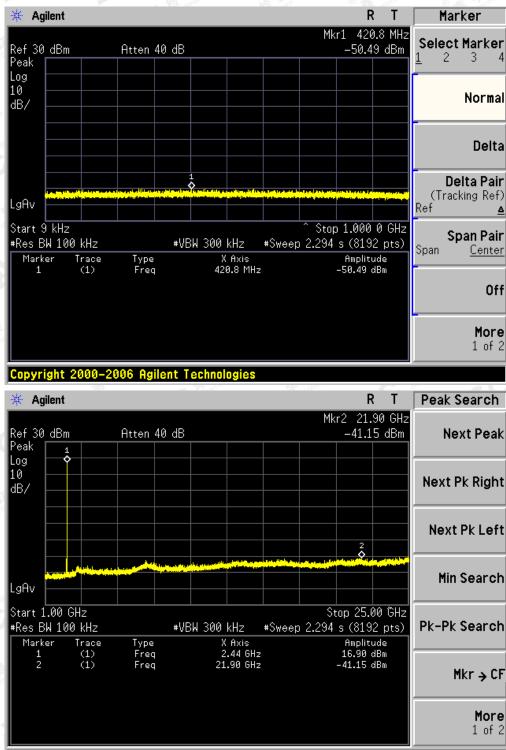

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN HIGH CHANNEL

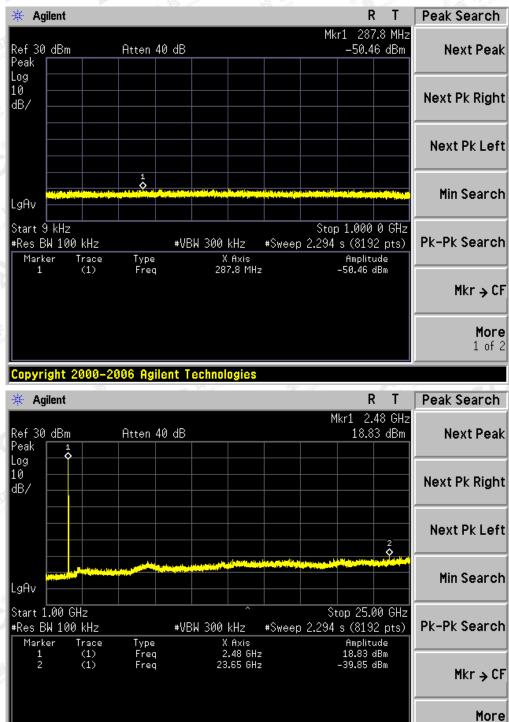

The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gett.com.

1 of 2



Page 34 of 73

11. RADIATED EMISSION

11.1. TEST LIMIT

Frequency	Distance	Field Strengths Limit	
(MHz)	Meters	μ V/m	dB(μV)/m
0.009 ~ 0.490	300	2400/F(kHz)	anceF it clobal Compa
0.490 ~ 1.705	30	24000/F(kHz)	
1.705 ~ 30	30	30	
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	TE TO S TO TO COMPANY	200	46.0
960 ~ 1000	3 Manufacture of Clark	500	54.0
Above 1000	3	Other:74.0 dB(µV)/m (Peak)	54.0 dB(µV)/m (Average)

Remark:

- (1) Emission level dB μ V = 20 log Emission level μ V/m
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance is the distance in meters between the measuring instrument, antenna and the closest point of any part of the device or system.

11.2. MEASUREMENT PROCEDURE

- 1. The measuring distance of 3m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Below 1GHz)
- 2. The measuring distance of 3m shall used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation(Above 1GHz)
- 3. The height of the test antenna shall vary between 1m to 4m.Both horizontal and vertical polarization Of the antenna are set to make the measurement.
- 4. The initial step in collecting radiated emission data is a receive peak detector mode. Pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- 5. All readings are peak unless otherwise stated QP in column of Note. Peak denoted that the Peak reading compliance with the QP limits and then QP Mode measurement didn't perform(Below 1GHz)
- 6. All readings are Peak mode value unless otherwise stated AVG in column of Note. If the Peak mode measured value compliance with the Peak limits and lower than AVG Limits, the EUT shall be deemed to meet Peak&AVG limits and then only Peak mode was measured, but AVG mode didn't perform.(Above 1GHz)



Page 35 of 73

The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter		Setting
Clopal Count	Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency		150KHz~30MHz/RB 9KHz for QP
	Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency		1GHz~26.5GHz RBW 1MHz/ VBW 3MHz for Peak, RBW 1MHz/ VBW 10Hz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP




11.3. TEST SETUP

RADIATED EMISSION TEST SETUP BELOW 30MHz

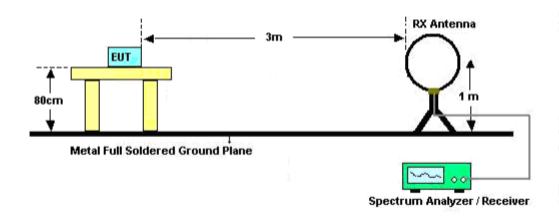


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

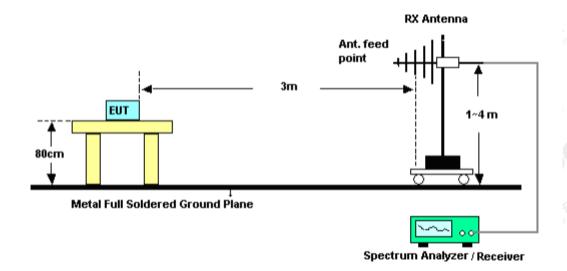



RADIATED EMISSION TEST SETUP ABOVE 1000MHz

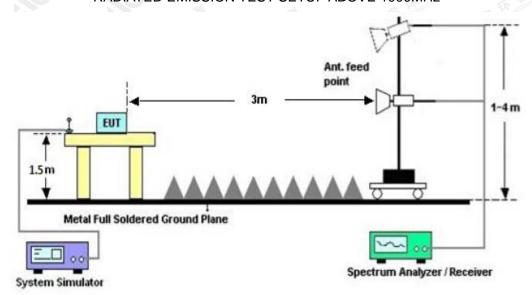

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 100°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at although the confirmed at although the confirmed at although the confirmed at all the confirme



Report No.: AGC00793180601FE04

Page 38 of 73

11.4. TEST RESULT

(Worst Modulation: GFSK)

RADIATED EMISSION BELOW 30MHz


No emission found between lowest internal used/generated frequencies to 30MHz.

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



RADIATED EMISSION BELOW 1GHz

RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL-HORIZONTAL

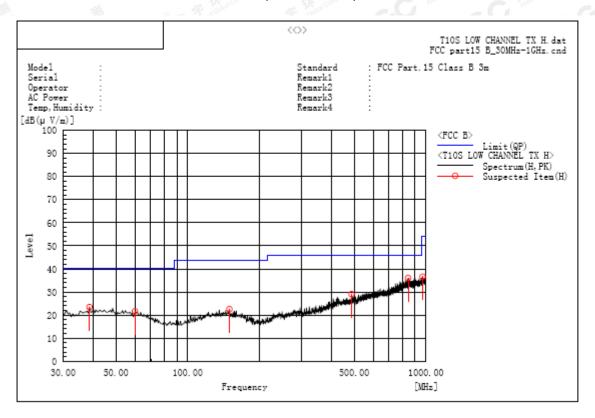

A. Suspected List:


	Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(u√/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
	38.730	H	6.2	17.3	23.5	40.0	16.5	Pass	100.0	289.3
	60.070	Н	5.5	16.2	21.7	40.0	18.3	Pass	100.0	109.4
	149.795	Н	5.9	16.6	22.5	43.5	21.0	Pass	100.0	217.2
	486.870	H	6.4	22.7	29.1	46.0	16.9	Pass	100.0	73.7
	842.375	H	6.6	29.5	36.1	46.0	9.9	Pass	100.0	145.1
Γ	967.505	Н	5.8	30.8	36.6	54.0	17.4	Pass	150.0	287.9

RESULT: PASS

The results spowfill this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by 40°C, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



RADIATED EMISSION TEST- (30MHz-1GHz)-LOW CHANNEL -VERTICAL

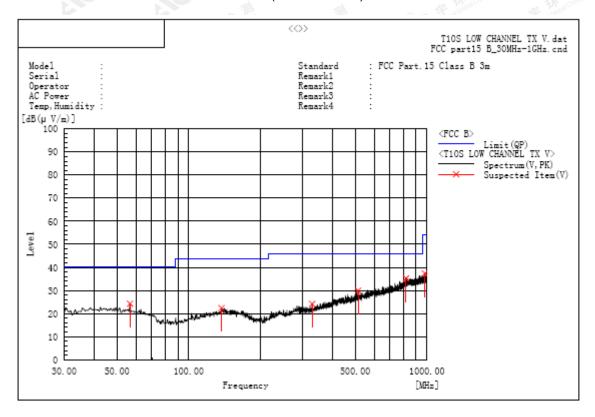

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(u∨/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
56.675	V	7.7	16.6	24.3	40.0	15.7	Pass	100.0	340.2
137.185	V	5.8	16.6	22.4	43.5	21.1	Pass	100.0	268.8
329.730	V	6.1	18.1	24.2	46.0	21.8	Pass	150.0	107.1
514.030	V	6.8	23.1	29.9	46.0	16.1	Pass	200.0	214.9
817.155	V	6.1	29.1	35.2	46.0	10.8	Pass	100.0	15.9
980.600	V	6.4	30.9	37.3	54.0	16.7	Pass	200.0	252.7

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



RADIATED EMISSION TEST- (30MHz-1GHz)-MIDDLE CHANNEL-HORIZONTAL

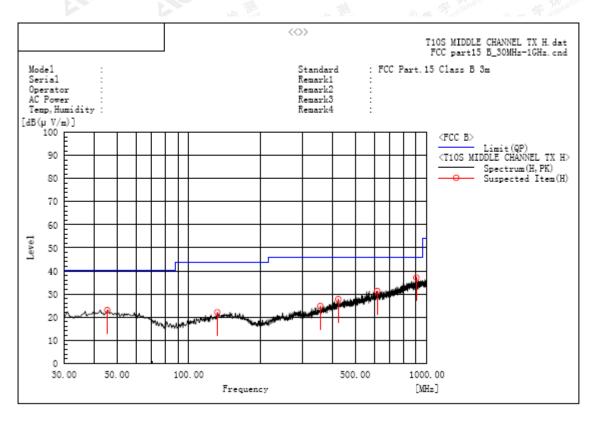

A. Suspected List:


Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(u√/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
45.520	H	5.7	17.3	23.0	40.0	17.0	Pass	200.0	180.1
131.850	Н	5.7	16.3	22.0	43.5	21.5	Pass	200.0	143.7
356.890	H	5.6	19.2	24.8	46.0	21.2	Pass	200.0	71.6
424.790	Н	6.3	21.5	27.8	46.0	18.2	Pass	200.0	71.6
618.305	Н	6.1	25.2	31.3	46.0	14.7	Pass	200.0	71.6
903.000	Н	6.9	30.2	37.1	46.0	8.9	Pass	200.0	216.5

RESULT: PASS

The results specified this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by KGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at http://www.agc.gent.com.



RADIATED EMISSION TEST- (30MHz-1GHz)- MIDDLE CHANNEL -VERTICAL

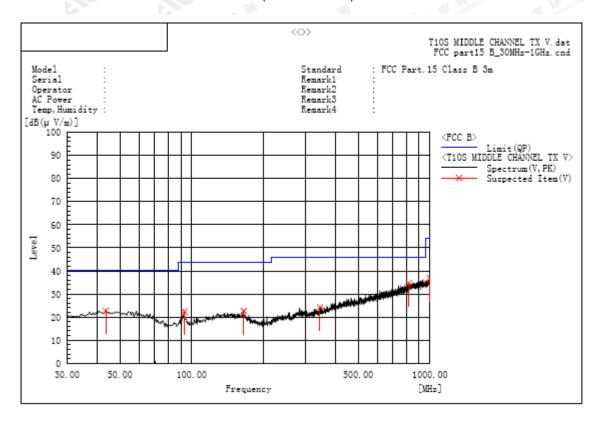

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
43.580	V	5.4	17.4	22.8	40.0	17.2	Pass	100.0	251.3
93.050	V	10.0	12.5	22.5	43.5	21.0	Pass	200.0	267.9
165.315	V	6.3	16.4	22.7	43.5	20.8	Pass	100.0	287.0
345.250	V	5.6	18.7	24.3	46.0	21.7	Pass	150.0	72.1
817.155	V	5.6	29.1	34.7	46.0	11.3	Pass	100.0	287.0
996.120	V	5.8	31.1	36.9	54.0	17.1	Pass	150.0	143.5

RESULT: PASS


Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL-HORIZONTAL

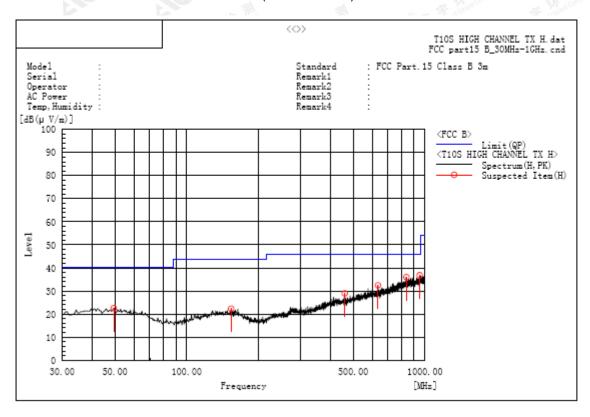

A. Suspected List:


Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
49.400	H	5.4	17.1	22.5	40.0	17.5	Pass	150.0	254.3
950.530	H	6.1	30.7	36.8	46.0	9.2	Pass	200.0	92.9
153.675	H	5.7	16.6	22.3	43.5	21.2	Pass	150.0	254.3
460.680	Н	6.6	22.3	28.9	46.0	17.1	Pass	200.0	20.8
635.280	Н	7.1	25.4	32.5	46.0	13.5	Pass	200.0	92.9
836.070	Н	6.6	29.4	36.0	46.0	10.0	Pass	100.0	67.4

RESULT: PASS

The results shown this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



RADIATED EMISSION TEST- (30MHz-1GHz)-HIGH CHANNEL -VERTICAL

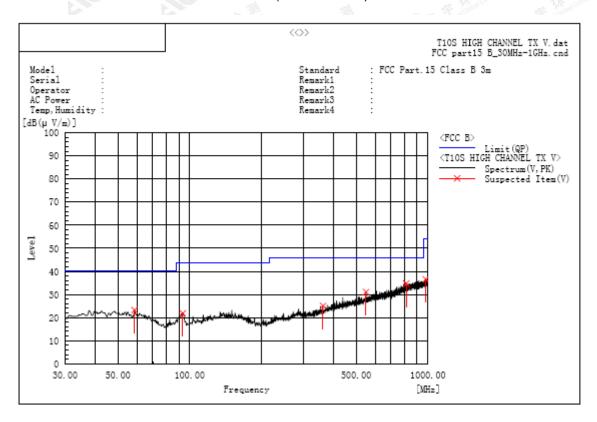

A. Suspected List:

Frequency MHz	Polarization	Reading dB(uV)	Factor dB (1/m)	Level dB(uV/m) PK	Limit dB(u∀/m) QP	Margin dB	Pass/Fail	Height cm	Angle deg
58.615	V	6.9	16.4	23.3	40.0	16.7	Pass	200.0	108.5
93.535	V	9.4	12.5	21.9	43.5	21.6	Pass	150.0	215.6
362.710	V	5.7	19.4	25.1	46.0	20.9	Pass	200.0	216.3
549.435	V	7.2	23.9	31.1	46.0	14.9	Pass	200.0	72.1
810.850	V	5.9	28.9	34.8	46.0	11.2	Pass	150.0	143.5
978.660	V	5.7	30.9	36.6	54.0	17.4	Pass	100.0	234.5

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Report No.: AGC00793180601FE04

Page 45 of 73

RADIATED EMISSION ABOVE 1GHz

RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-LOW CHANNEL-HORIZONTAL

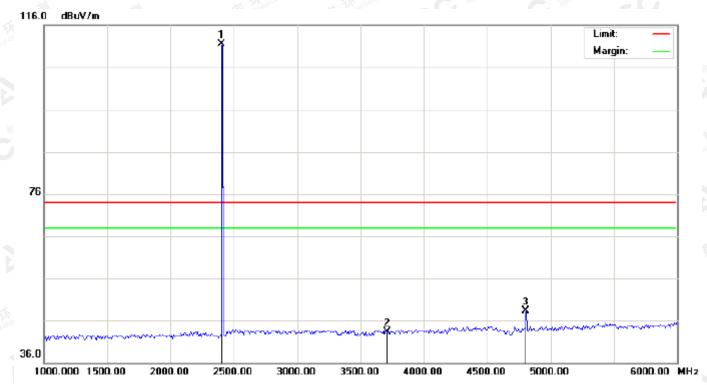

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	•	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2402.000	101.10	10.32	111.42	74.00	37.42	peak			
2		3708.333	29.94	13.39	43.33	74.00	-30.67	peak			
3		4804.000	40.71	7.69	48.40	74.00	-25.60	peak			


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.






RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-LOW CHANNEL -VERTICAL

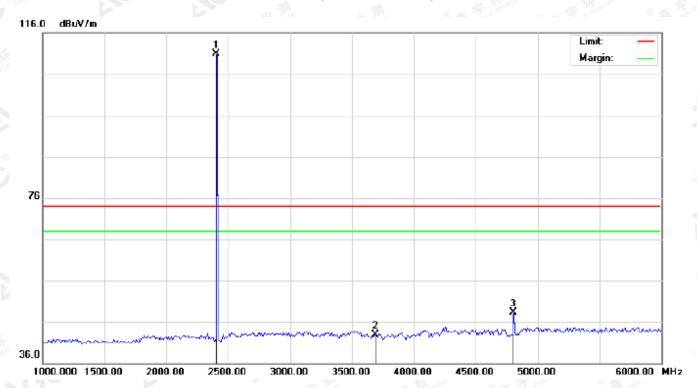

No	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
4	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2402.000	100.63	10.32	110.95	74.00	36.95	peak			
2		3691.667	29.71	13.29	43.00	74.00	-31.00	peak			
3		4804.000	40.55	7.69	48.24	74.00	-25.76	peak			


RESULT: PASS

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.





RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-MIDDLE CHANNEL-HORIZONTAL

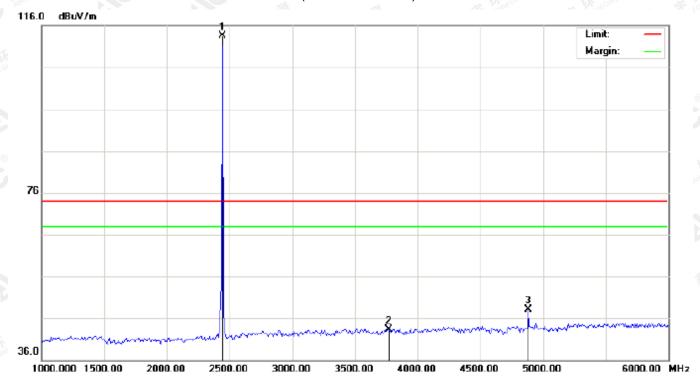

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBu∀/m	dB		cm	degree	
1	*	2441.000	103.23	10.36	113.59	74.00	39.59	peak			
2		3766.667	29.45	13.75	43.20	74.00	-30.80	peak			
3		4882.000	40.16	7.89	48.05	74.00	-25.95	peak			


RESULT: PASS

The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.






RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics) - MIDDLE CHANNEL -VERTICAL

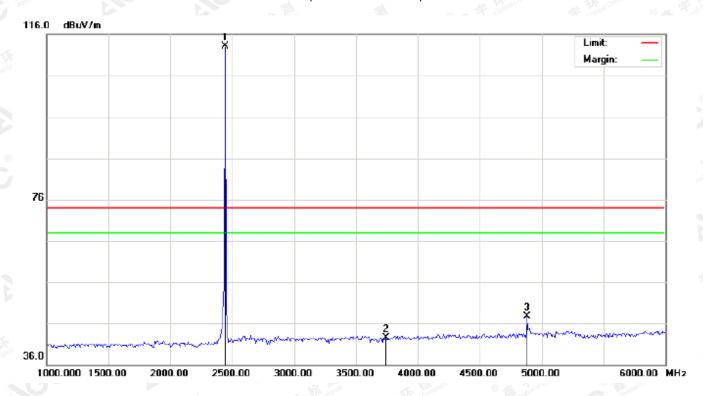

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2441.000	102.75	10.36	113.11	74.00	39.11	peak			
2		3741.667	28.93	13.60	42.53	74.00	-31.47	peak			
3		4882.000	39.89	7.89	47.78	74.00	-26.22	peak			


RESULT: PASS

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.






RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-HIGH CHANNEL-HORIZONTAL

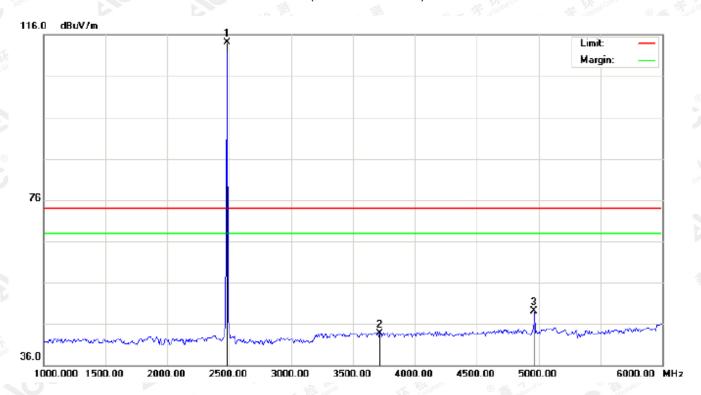

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	103.60	10.41	114.01	74.00	40.01	peak			
2		3716.667	30.35	13.44	43.79	74.00	-30.21	peak			
3		4960.000	41.10	8.09	49.19	74.00	-24.81	peak			


RESULT: PASS

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.





RADIATED EMISSION ABOVE 1GHz (1-10th Harmonics)-HIGH CHANNEL -VERTICAL

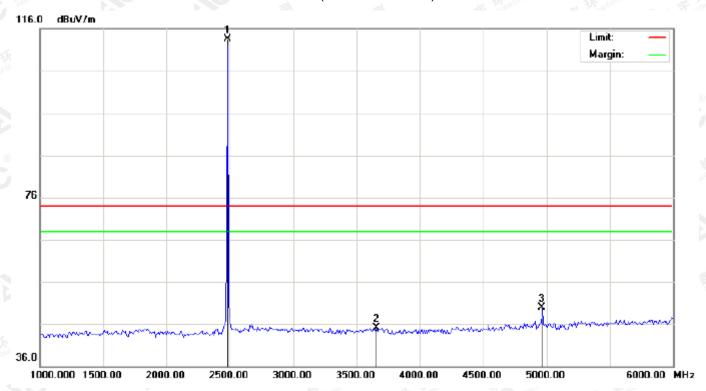

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1	*	2480.000	103.15	10.41	113.56	74.00	39.56	peak			
2		3658.333	32.08	13.09	45.17	74.00	-28.83	peak			
3		4960.000	41.91	8.09	50.00	74.00	-24.00	peak			

RESULT: PASS

Note: 6~25GHz at least have 20dB margin. No recording in the test report.

Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.





12. BAND EDGE EMISSION

12.1. MEASUREMENT PROCEDURE

- 1. Set the EUT Work on the top, the bottom operation frequency individually.
- 2. Set SPA Start or Stop Frequency=Operation Frequency,


For unrestricted band: RBW=100kHz, VBW=300kHz

For restricted band: RBW=1MHz, VBW=3*RBW

Center frequency = Operation frequency

3. The band edges was measured and recorded.

12.2. TEST SET-UP

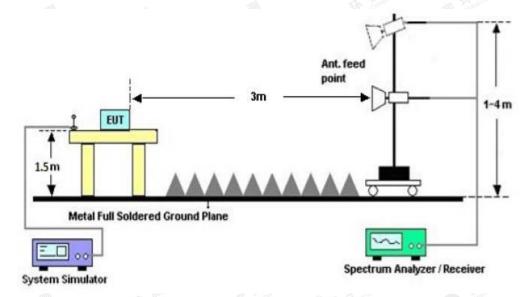

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.





12.3. TEST RESULT

(Worst Modulation: GFSK)

TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Horizontal



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1		2350.675	32.69	10.27	42.96	74.00	-31.04	peak			
2		2390.000	32.00	10.31	42.31	74.00	-31.69	peak			
3		2400.000	40.47	10.32	50.79	74.00	-23.21	peak			
4	*	2402.000	101.05	10.32	111.37	74.00	37.37	peak			

The results spowth this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gott.com.





TEST PLOT OF BAND EDGE FOR LOW CHANNEL (1Mbps)-Vertical



No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
1		2353.408	32.10	10.27	42.37	74.00	-31.63	peak			
2		2390.000	33.21	10.31	43.52	74.00	-30.48	peak			
3		2400.000	37.56	10.32	47.88	74.00	-26.12	peak			
4	*	2402.000	100.58	10.32	110.90	74.00	36.90	peak			


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a type of the confirmed at a type of type of type of the confirmed at a type of typ



Report No.: AGC00793180601FE04

Page 54 of 73

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Horizontal

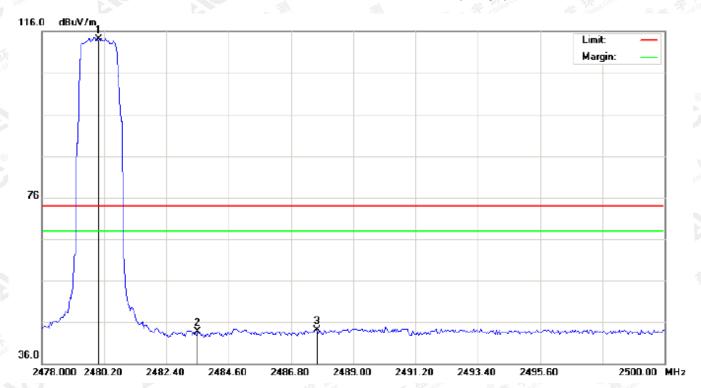

N	0.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		-	MHz	dBu∀	dB/m	dBu\//m	dBu∀/m	dB		cm	degree	
-	1	*	2480.000	103.64	10.41	114.05	74.00	40.05	peak			
7	2		2483.500	33.19	10.41	43.60	74.00	-30.40	peak			
3	3		2487.716	33.68	10.42	44.10	74.00	-29.90	peak			


The results showed the sample (s) tested unless otherwise stated and the sample (s) are retained for 30 days only. The document is issued by ACC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



Report No.: AGC00793180601FE04

Page 55 of 73

TEST PLOT OF BAND EDGE FOR HIGH CHANNEL (1Mbps)-Vertical

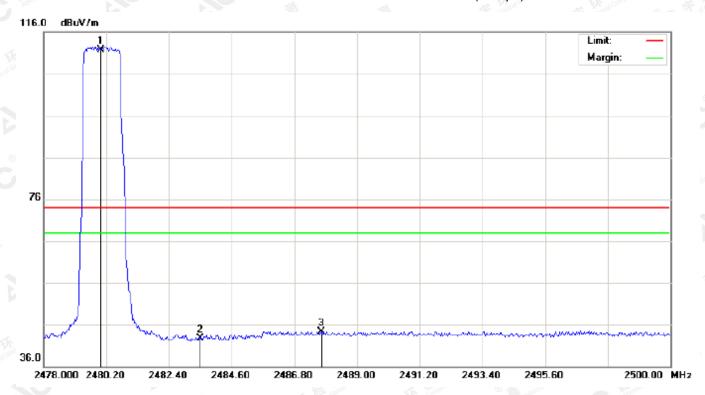

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
	-	MHz	dBu∀	dB/m	dBu∀/m	dBu∀/m	dB		cm	degree	
1	*	2480.000	101.32	10.41	111.73	74.00	37.73	peak			
2		2483.500	32.26	10.41	42.67	74.00	-31.33	peak			
3		2487.753	33.95	10.42	44.37	74.00	-29.63	peak			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

- 2. The "Factor" value can be calculated automatically by software of measurement system.
- 3. Hopping off and Hopping on have been tested and only worst case recorded

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Report No.: AGC00793180601FE04 Page 56 of 73

13. NUMBER OF HOPPING FREQUENCY

13.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set the spectrum analyzer Start = 2.4GHz Stop = 2.4835GHz
- 4. Set the Spectrum Analyzer as RBW>=1%span, VBW>=3RBW.

13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

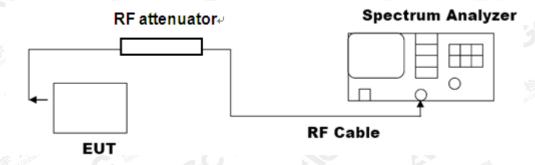


13.3. LIMITS AND MEASUREMENT RESULT

TOTAL NO. OF	LIMIT (NO. OF CH)	MEASUREMENT (NO. OF CH)	RESULT
HOPPING CHANNEL	>=15	79	PASS

The results spowford this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gent.com.



TEST PLOT FOR NO. OF TOTAL CHANNELS

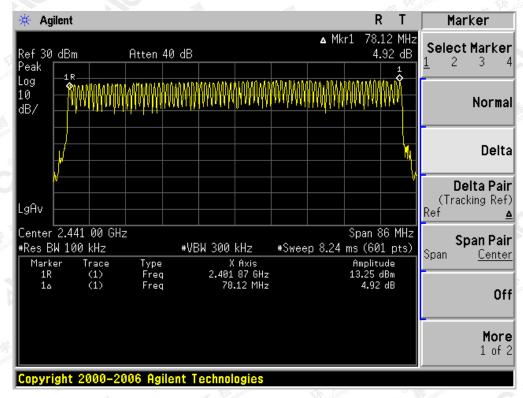

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Report No.: AGC00793180601FE04 Page 58 of 73

14. TIME OF OCCUPANCY (DWELL TIME)

14.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer.
- 3. Set Span = zero span, centered on a hoping channel
- 4. Set the spectrum analyzer as RBW=1MHz, VBW>=RBW, Span = 0 Hz

14.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

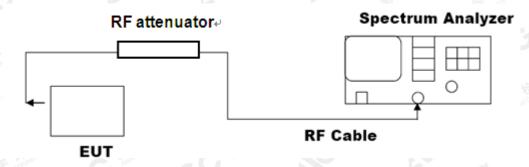

14.3. LIMITS AND MEASUREMENT RESULT

The Worst Case (3Mbps)

Channel	Time of Pulse for DH5 (ms)	Period Time (s)	Sweep Time (ms)	Limit (ms)
Low	2.901	31.6	309.44	400
Middle	2.935	31.6	313.07	400
High	2.901	31.6	309.44	400

Low Channel Time

2.901*(1600/6)/79*31.6=309.44ms

Middle Channel Time

2.935*(1600/6)/79*31.6=313.07ms


High Channel Time

2.901*(1600/6)/79*31.6=309.44ms


The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT OF LOW CHANNEL

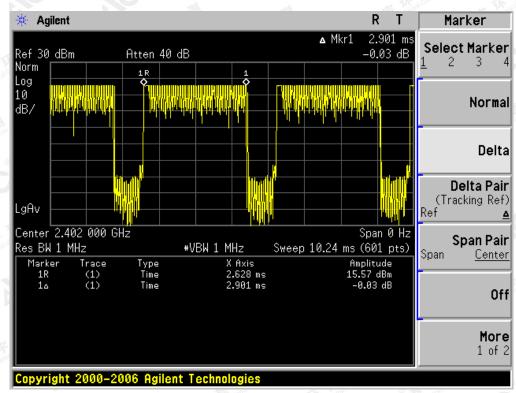


TEST PLOT OF MIDDLE CHANNEL

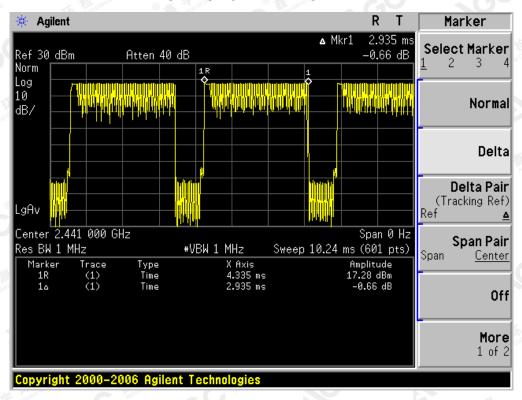

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT OF HIGH CHANNEL

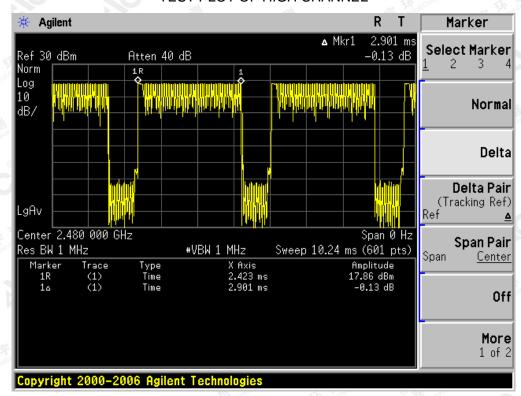

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.




Report No.: AGC00793180601FE04 Page 61 of 73

15. FREQUENCY SEPARATION

15.1. MEASUREMENT PROCEDURE

- 1. Place the EUT on the table and set it in transmitting mode
- 2. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum analyzer
- 3. Set Span = wide enough to capture the peaks of two adjacent channels Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span Video (or Average) Bandwidth (VBW) ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold

15.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)

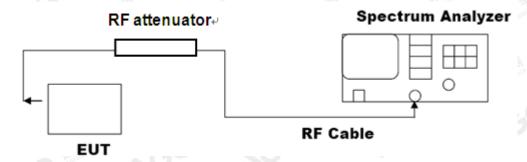


15.3. LIMITS AND MEASUREMENT RESULT

CHANNEL	CHANNEL SEPARATION	LIMIT	RESULT	
	KHz	KHz		
CH00-CH01	1000	>=25 KHz or 2/3 20 dB BW	Pass	

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



TEST PLOT FOR FREQUENCY SEPARATION (3Mbps)

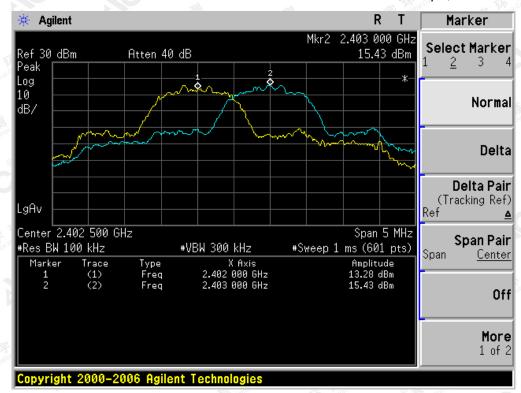

The results spoured this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



16. LINE CONDUCTED EMISSION TEST


16.1. LIMITS OF LINE CONDUCTED EMISSION TEST

F	Maximum RF Line Voltage						
Frequency	Q.P.(dBuV)	Average(dBuV)					
150kHz~500kHz	66-56	56-46					
500kHz~5MHz	8 Maria de la como de	46 de					
5MHz~30MHz	60	50					

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

16.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

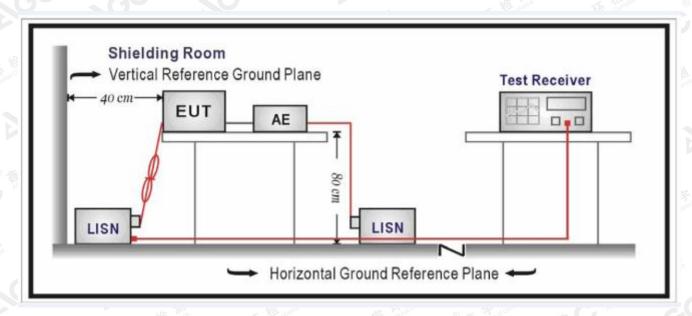

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago.go.tt.com.



Report No.: AGC00793180601FE04 Page 64 of 73

16.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipments received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC charging voltage by adapter which received 120V/60Hzpower by a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

16.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- 2. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.

16.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

N/A


Note: The BT function of EUT didn't work when charging.

The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XCC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a trp://www.ago.go.tt.com.



APPENDIX A: PHOTOGRAPHS OF TEST SETUP


FCC RADIATED EMISSION TEST SETUP

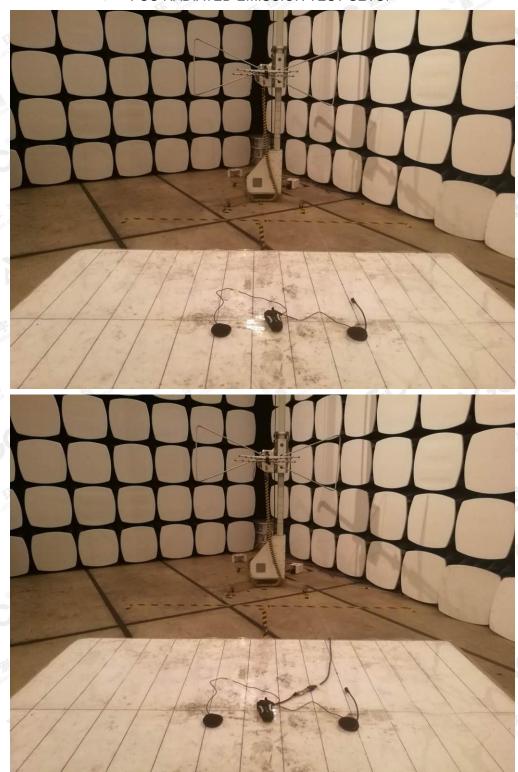

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.gett.com.

Attestation of Global Compliance



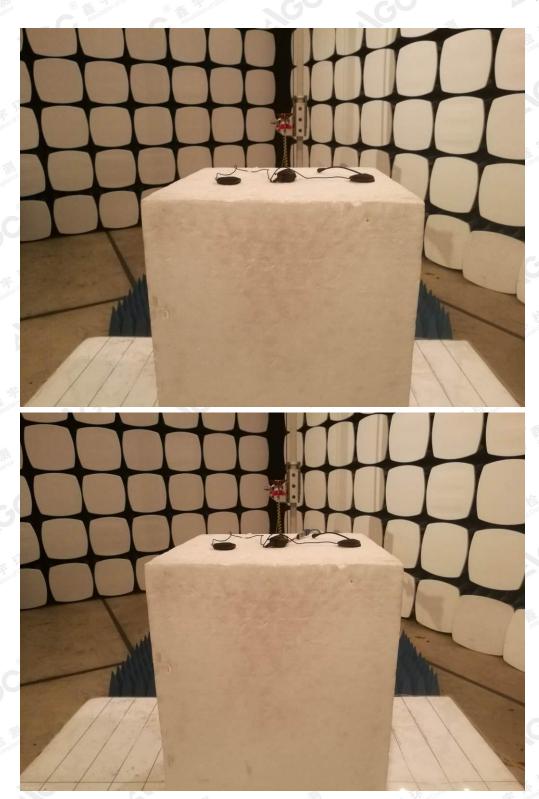

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.agc.gett.com.



APPENDIX B: PHOTOGRAPHS OF EUT

TOTAL VIEW OF EUT



TOP VIEW OF EUT



The results spound this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by XOC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at attp://www.ago-gott.com.

Attestation of Global Compliance



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a step www.agc.goalt.com.

Attestation of Global Compliance



BACK VIEW OF EUT



LEFT VIEW OF EUT



The results showing this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc.gott.com.

Attestation of Global Compliance



RIGHT VIEW OF EUT



VIEW OF EUT (Port)-1



The results shown in this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true of the confirmed at a true of true of the confirmed at a true of the confirmed at a


Attestation of Global Compliance



VIEW OF EUT (Port)-2



OPEN VIEW OF EUT

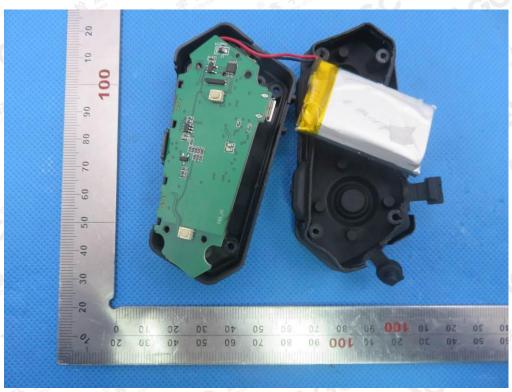

The results shown the streport refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a true; //www.agc cont.com.


Attestation of Global Compliance



VIEW OF BATTERY



INTERNAL VIEW OF EUT-1

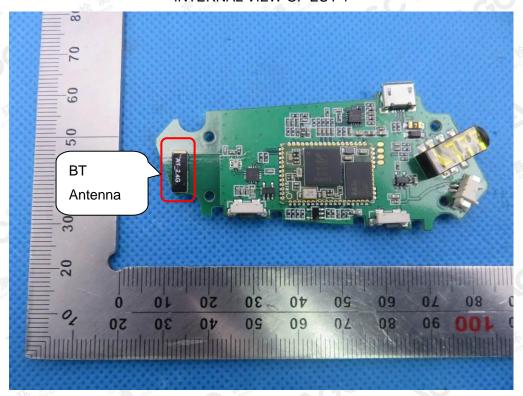


The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a type and the company of the comp


Attestation of Global Compliance



INTERNAL VIEW OF EUT-2

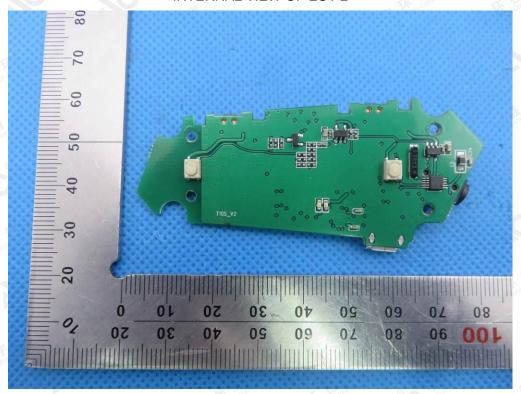

INTERNAL VIEW OF EUT-3

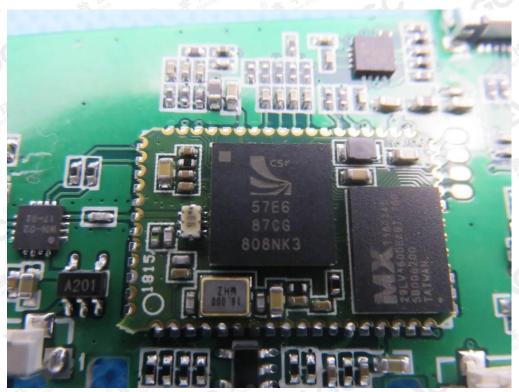

----END OF REPORT----

The results showed this jest report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by AGC, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at a typ://www.agc.gett.com.

Attestation of Global Compliance