

# SUMEC YANGZHOU INTERNATIONAL CO., LTD. RF TEST REPORT

**Report Type:**

FCC Part 15.247 & ISED RSS-247 RF report

**Model:**

W2HM2001

**REPORT NUMBER:**

180701631SHA-001

**ISSUE DATE:**

September 4, 2018

**DOCUMENT CONTROL NUMBER:**

TTRF15.247-03\_V1 © 2018 Intertek



**Applicant:** SUMEC YANGZHOU INTERNATIONAL CO., LTD.  
125, South Daxue Road, Yangzhou, Jiangsu, China

**Manufacturer:** SUMEC YANGZHOU INTERNATIONAL CO., LTD.  
125, South Daxue Road, Yangzhou, Jiangsu, China

**Manufacturing site:** Nanjing CEC PANDA LCD Technology Co., Ltd.  
NO.601, XianLin Avenue, Nanjing Economic and Technology Development Zone

**FCC ID:** 2AQN90001

### SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

**47CFR Part 15 (2017):** Radio Frequency Devices (Subpart C)

**ANSI C63.10 (2013):** American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

**RSS-247 Issue 2 (February 2017):** Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

**RSS-Gen Issue 5 (April 2018):** General Requirements for Compliance of Radio Apparatus

**PREPARED BY:**

**REVIEWED BY:**



---

Project Engineer  
Eric Li

---

Reviewer  
Daniel Zhao

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

**TEST REPORT**

## Content

<b>REVISION HISTORY.....</b>	<b>5</b>
<b>MEASUREMENT RESULT SUMMARY.....</b>	<b>6</b>
<b>1 GENERAL INFORMATION .....</b>	<b>7</b>
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT) .....	7
1.2 TECHNICAL SPECIFICATION .....	7
1.3 DESCRIPTION OF TEST FACILITY .....	9
<b>2 TEST SPECIFICATIONS.....</b>	<b>10</b>
2.1 STANDARDS OR SPECIFICATION .....	10
2.2 MODE OF OPERATION DURING THE TEST.....	10
2.3 TEST SOFTWARE LIST .....	11
2.4 TEST PERIPHERALS LIST .....	11
2.5 TEST ENVIRONMENT CONDITION:.....	11
2.6 INSTRUMENT LIST .....	12
2.7 MEASUREMENT UNCERTAINTY .....	13
<b>3 MINIMUM 6DB BANDWIDTH.....</b>	<b>14</b>
3.1 LIMIT .....	14
3.2 MEASUREMENT PROCEDURE .....	14
3.3 TEST CONFIGURATION .....	14
3.4 TEST RESULTS OF MINIMUM 6DB BANDWIDTH .....	14
<b>4 MAXIMUM CONDUCTED OUTPUT POWER AND E.I.R.P.....</b>	<b>15</b>
4.1 LIMIT .....	15
4.2 MEASUREMENT PROCEDURE .....	15
4.3 TEST CONFIGURATION .....	16
4.4 TEST RESULTS OF MAXIMUM CONDUCTED OUTPUT POWER .....	16
<b>5 POWER SPECTRUM DENSITY .....</b>	<b>17</b>
5.1 LIMIT .....	17
5.2 MEASUREMENT PROCEDURE .....	17
5.3 TEST CONFIGURATION .....	18
5.4 TEST RESULTS OF POWER SPECTRUM DENSITY .....	18
<b>6 EMISSION OUTSIDE THE FREQUENCY BAND .....</b>	<b>19</b>
6.1 LIMIT .....	19
6.2 MEASUREMENT PROCEDURE .....	19
6.3 TEST CONFIGURATION .....	20
6.4 THE RESULTS OF EMISSION OUTSIDE THE FREQUENCY BAND .....	20
<b>7 RADIATED EMISSIONS IN RESTRICTED FREQUENCY BANDS.....</b>	<b>21</b>
7.1 LIMIT .....	21
7.2 MEASUREMENT PROCEDURE .....	21
7.3 TEST CONFIGURATION .....	23
7.4 TEST RESULTS OF RADIATED EMISSIONS .....	25
<b>8 POWER LINE CONDUCTED EMISSION.....</b>	<b>42</b>
8.1 LIMIT .....	42
8.2 TEST CONFIGURATION .....	42
8.3 MEASUREMENT PROCEDURE .....	43

**TEST REPORT**

8.4	TEST RESULTS OF POWER LINE CONDUCTED EMISSION.....	44
<b>9</b>	<b>OCCUPIED BANDWIDTH.....</b>	<b>52</b>
9.1	LIMIT .....	52
9.2	MEASUREMENT PROCEDURE .....	52
9.3	TEST CONFIGURATION .....	52
9.4	THE RESULTS OF OCCUPIED BANDWIDTH .....	52
<b>10</b>	<b>ANTENNA REQUIREMENT .....</b>	<b>53</b>
	<b>APPENDIX A: TEST RESULTS .....</b>	<b>54</b>

## Revision History

Report No.	Version	Description	Issued Date
180701631SHA-001	Rev. 01	Initial issue of report	September 4, 2018

## Measurement result summary

TEST ITEM	FCC REFERANCE	IC REFERANCE	RESULT
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-247 Issue 2 Clause 5.2	Pass
Maximum conducted output power and e.i.r.p.	15.247(b)(3)	RSS-247 Issue 2 Clause 5.4	Pass
Power spectrum density	15.247(e)	RSS-247 Issue 2 Clause 5.2	Pass
Emission outside the frequency band	15.247(d)	RSS-247 Issue 2 Clause 5.5	Pass
Radiated Emissions in restricted frequency bands	15.247(d), 15.205&15.209	RSS-Gen Issue 5 Clause 8.9&8.10	Pass
Power line conducted emission	15.207(a)	RSS-Gen Issue 5 Clause 8.8	Pass
Occupied bandwidth	-	RSS-Gen Issue 5 Clause 6.6	Tested
Antenna requirement	15.203	-	Pass

Notes: 1: NA =Not Applicable

## 1 GENERAL INFORMATION

### 1.1 Description of Equipment Under Test (EUT)

Product name:	WIFI Module
Type/Model:	W2HM2001
Description of EUT:	The EUT is WIFI Module, it supports IEEE 802.11 b/g/n 2T2R, it was tested in the LED Television with models of <b>SLD50SU4KC</b> , RNSMU5036-B, RNSMU5536-B, PLED5538-UHDSM; <b>SLD55SU4KC</b> , RHOS501SM, PLED5038-UHDSM; <b>SLD65SU4KC</b> , RNSMU6536-B, RHOS651SM, PLED6538-UHDSM; <b>SLD75SU4KC</b> , RNSMU7536, PLED7538-UHDSM. The models RNSMU5036-B, RHOS501SM, PLED5038-UHDSM are same as SLD50SU4KC Except Product Trade name and color of the front bezel; The models RNSMU5536-B, PLED5538-UHDSM are same as SLD55SU4KC Except Product Trade name and color of the front bezel; The models RNSMU6536-B, RHOS651SM, PLED6538-UHDSM are same as SLD65SU4KC Except Product Trade name and color of the front bezel; The models RNSMU7536, PLED7538-UHDSM are same as SLD75SU4KC Except Product Trade name and color of the front bezel; we test the models SLD50SU4KC, SLD55SU4KC, SLD65SU4KC, SLD75SU4KC as representative and list the results in this report.
Rating:	5V DC
EUT type:	<input checked="" type="checkbox"/> Table top <input type="checkbox"/> Floor standing
Software Version:	/
Hardware Version:	/
Sample received date:	2018.8.1
Date of test:	2018.8.1~2018.8.8

### 1.2 Technical Specification

Frequency Range:	2400MHz ~ 2483.5MHz
Support Standards:	IEEE 802.11b, IEEE 802.11g, IEEE 802.11n-HT20, IEEE 802.11n-HT40
Type of Modulation:	IEEE 802.11b: DSSS (CCK, DQPSK, DBPSK) IEEE 802.11g: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT20: OFDM (64-QAM, 16-QAM, QPSK, BPSK) IEEE 802.11n-HT40: OFDM (64-QAM, 16-QAM, QPSK, BPSK)
Channel Number:	11 Channels for 802.11b, 802.11g and 802.11n(HT20) 9 Channels for 802.11n(HT40)
Data Rate:	IEEE 802.11b: Up to 11 Mbps IEEE 802.11g: Up to 54 Mbps IEEE 802.11n-HT20: Up to MCS7 IEEE 802.11n-HT40: Up to MCS7
Channel Separation:	5 MHz

**TEST REPORT**

**1.3 Antenna information**

Antenna No.	Model	Antenna type	Antenna Gain	Note
1	B/G/N(HT20)/N(HT40)	PIFA	2.0dBi	/
2	B/G/N(HT20)/N(HT40)	PIFA	2.0dBi	/

MIMO Function Description:

Frequency Band (MHz)	Mode	Tx/Rx Function	Beamforming function	CDD function	Directional gain (dBi)
2400-2483.5	802.11b	1TX/1RX	NO	NO	2.00 for antenna 0 2.00 for antenna 1
	802.11g	1TX/1RX	NO	NO	2.00 for antenna 0 2.00 for antenna 1
	802.11n(HT20)	2TX/2RX	NO	NO	2.51
	802.11n(HT40)	2TX/2RX	NO	NO	2.51

Note: For 802.11b and 802.11g mode, it only supports 1TX, the directional gain is equal to antenna gain.

For other modes, it can support 2TX, all the two transmit signals are completely uncorrelated with each other. So the directional gain =  $10 \log ((10^{G1/10} + 10^{G2/10} + \dots + 10^{Gn/10}) / N_{ANT})$   
 $N_{ANT} = 10 \log ((10^{2.00/10} + 10^{2.00/10}) / 2 = 2.51\text{dBi}$



**TEST REPORT**

**1.4 Description of Test Facility**

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN1175
	IC Registration Lab Registration code No.: 2042B-1
	VCCI Registration Lab Registration No.: R-4243, G-845, C-4723, T-2252
	NVLAP Accreditation Lab NVLAP LAB CODE: 200849-0
	A2LA Accreditation Lab Certificate Number: 3309.02

## 2 TEST SPECIFICATIONS

### 2.1 Standards or specification

47CFR Part 15 (2017)  
 ANSI C63.10 (2013)  
 RSS-247 Issue 2 (February 2017)  
 RSS-Gen Issue 5 (April 2018)  
 KDB 558074 (v04)

### 2.2 Mode of operation during the test

While testing transmitting mode of EUT, the internal modulation and continuously transmission was applied.

The lowest, middle and highest channel were tested as representatives.

Frequency Band (MHz)	Mode	Lowest (MHz)	Middle (MHz)	Highest (MHz)
2400-2483.5	802.11b	2412	2437	2462
	802.11g	2412	2437	2462
	802.11n(HT20)	2412	2437	2462
	802.11n(HT40)	2422	2437	2452

#### Data rate VS Power:

The pre-scan for the conducted power with all rates in each modulation and bands was used, and the worst case was found and used in all test cases. After this pre-scan, we choose the following table of the data rata as the worst case.

Frequency Band (MHz)	Mode	Worst case data rate
2400-2483.5	802.11b	1Mbps
	802.11g	6Mbps
	802.11n(HT20)	MCS0
	802.11n(HT40)	MCS0

There is the following test mode:

Radiated test mode:

Mode 1: EUT transmitted signal with internal antenna;

Conducted test mode:

Mode 2: EUT transmitted signal from PCBA RF port connected to SA directly;

### 2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	ESxS-K1	R&S	V2.1.0
Radiated emission	ES-K1	R&S	V1.71

### 2.4 Test peripherals list

While testing transmitting mode of EUT, the continuously transmission was applied by following software.

Software name	Manufacturer	Version	Supplied by
MT7603 Tool	-	-	Client

Item No.	Name	Brand and Model	Description
1	Laptop computer	HP ProBook 6470b	100-240V AC, 50/60Hz

### 2.5 Test environment condition:

Test items	Temperature	Humidity
Minimum 6dB Bandwidth	23°C	52% RH
Maximum conducted output power and e.i.r.p.		
Power spectrum density		
Emission outside the frequency band		
Occupied bandwidth		
Radiated Emissions in restricted frequency bands	22°C	55% RH
Power line conducted emission	21°C	52% RH

## 2.6 Instrument list

Conducted Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCS 30	EC 2107	2018-10-18
<input checked="" type="checkbox"/>	A.M.N.	R&S	ESH2-Z5	EC 3119	2018-12-01
<input checked="" type="checkbox"/>	Shielded room	Zhongyu	-	EC 2838	2019-01-08
Radiated Emission					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESIB 26	EC 3045	2018-10-18
<input checked="" type="checkbox"/>	Bilog Antenna	TESEQ	CBL 6112D	EC 4206	2019-05-30
<input checked="" type="checkbox"/>	Horn antenna	R&S	HF 906	EC 3049	2018-09-22
<input checked="" type="checkbox"/>	Horn antenna	ETS	3117	EC 4792-1	2018-08-23
<input checked="" type="checkbox"/>	Horn antenna	TOYO	HAP18-26W	EC 4792-3	2020-07-09
<input checked="" type="checkbox"/>	Pre-amplifier	R&S	Pre-amp 18	EC5881	2019-06-19
<input checked="" type="checkbox"/>	Semi-anechoic chamber	Albatross project	-	EC 3048	2018-09-08
RF test					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	PXA Signal Analyzer	Keysight	N9030A	EC 5338	2018-09-10
<input checked="" type="checkbox"/>	Power sensor	Agilent	U2021XA	EC 5338-1	2019-03-03
<input checked="" type="checkbox"/>	Vector Signal Generator	Agilent	N5182B	EC 5175	2019-03-06
<input checked="" type="checkbox"/>	MXG Analog Signal Generator	Agilent	N5181A	EC 5338-2	2019-03-03
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESCI 7	EC 4501	2019-02-23
Additional instrument					
Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Therom-Hygrograph	ZJ1-2A	S.M.I.F.	EC 3323	2019-06-14
<input checked="" type="checkbox"/>	Pressure meter	YM3	Shanghai Mengde	EC 3320	2019-06-28

## 2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Test item	Measurement uncertainty
Maximum peak output power	± 0.74dB
Radiated Emissions in restricted frequency bands below 1GHz	± 4.90dB
Radiated Emissions in restricted frequency bands above 1GHz	± 5.02dB
Emission outside the frequency band	± 2.89dB
Power line conducted emission	± 3.19dB

### 3 Minimum 6dB bandwidth

Test result: Pass

#### 3.1 Limit


For systems using digital modulation techniques that may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz and 5725 - 5850 MHz bands, the minimum 6 dB bandwidth shall be at least 500 kHz.

#### 3.2 Measurement Procedure

The minimum 6dB bandwidth is measured using the Spectrum Analyzer according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" (clause 8.2) for compliance requirements.

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

#### 3.3 Test Configuration



#### 3.4 Test Results of Minimum 6dB bandwidth

Please refer to Appendix A

## 4 Maximum conducted output power and e.i.r.p.

**Test result:** Pass

### 4.1 Limit

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 W. (The e.i.r.p. shall not exceed 4 W)


If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 30dBm and 30+ (6 –antenna gain-beam forming gain).

### 4.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 9.2.2.4) for compliance requirements.

- a) Measure the duty cycle,  $x$ , of the transmitter output signal as described in Section 6.0.
- b) Set span to at least  $1.5 \times \text{OBW}$ .
- c) Set RBW = 1 % to 5 % of the OBW, not to exceed 1 MHz.
- d) Set VBW  $\geq 3 \times \text{RBW}$ .
- e) Number of points in sweep  $\geq 2 \times \text{span} / \text{RBW}$ . (This gives bin-to-bin spacing  $\leq \text{RBW}/2$ , so that narrowband signals are not lost between frequency bins.)
- f) Sweep time = auto.
- g) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- h) Do not use sweep triggering. Allow the sweep to “free run”.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed such that the average accurately represents the true average over the on and off periods of the transmitter.
- j) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.
- k) Add  $10 \log (1/x)$ , where  $x$  is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on- and off-times of the transmission). For example, add  $10 \log (1/0.25) = 6 \text{ dB}$  if the duty cycle is 25 %.

### 4.3 Test Configuration



### 4.4 Test Results of Maximum conducted output power

Please refer to Appendix A



## 5 Power spectrum density

Test result: Pass

### 5.1 Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

If the transmitting antenna of directional gain greater than 6dBi is used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi. If there have a beam forming type, the limit should be the minimum of 8dBm/MHz and  $8 + (6 - \text{antenna gain} - \text{beam forming gain})$ .


### 5.2 Measurement Procedure

The power output was tested according to DTS test procedure of "KDB558074 D01 DTS Meas Guidance" (clause 10.5) for compliance requirements.

This procedure is applicable when the EUT cannot be configured to transmit continuously (i.e., duty cycle < 98 %), and when sweep triggering/signal gating cannot be used to measure only when the EUT is transmitting at its maximum power control level, and when the transmission duty cycle is constant (i.e., duty cycle variations are less than  $\pm 2\%$ ):

- a) Measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.
- b) Set instrument center frequency to DTS channel center frequency.
- c) Set span to at least  $1.5 \times \text{OBW}$ .
- d) Set RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- e) Set VBW  $\geq 3 \times \text{RBW}$ .
- f) Detector = power averaging (RMS) or sample detector (when RMS not available).
- g) Ensure that the number of measurement points in the sweep  $\geq 2 \times \text{span}/\text{RBW}$ .
- h) Sweep time = auto couple.
- i) Do not use sweep triggering. Allow sweep to "free run".
- j) Employ trace averaging (RMS) mode over a minimum of 100 traces.
- k) Use the peak marker function to determine the maximum amplitude level.
- l) Add  $10 \log (1/x)$ , where x is the duty cycle measured in step (a), to the measured PSD to compute the average PSD during the actual transmission time.
- m) If resultant value exceeds the limit, then reduce RBW (no less than 3 kHz) and repeat (note that this may require zooming in on the emission of interest and reducing the span in order to meet the minimum measurement point requirement as the RBW is reduced).

### 5.3 Test Configuration

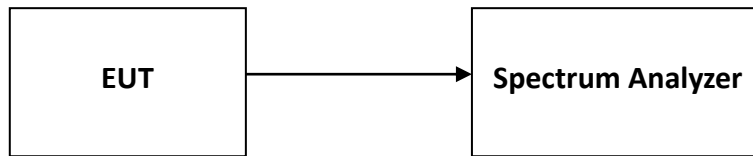

### 5.4 Test Results of Power spectrum density

Please refer to Appendix A

## 6 Emission outside the frequency band

**Test result:** Pass

### 6.1 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

### 6.2 Measurement Procedure

The EUT was tested according to DTS test procedure of “KDB558074 D01 DTS Meas Guidance” (clause 11.0) for compliance requirements.

#### Reference level measurement

Establish a reference level by using the following procedure:

- a) Set instrument center frequency to DTS channel center frequency.
- b) Set the span to  $\geq 1.5$  times the DTS bandwidth.
- c) Set the RBW = 100 kHz.
- d) Set the VBW  $\geq 3 \times$  RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum PSD level.

#### Emission level measurement

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq 3 \times$  RBW.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in 11.1 a) or 11.1 b). Report the three highest emissions relative to the limit.

### 6.3 Test Configuration



### 6.4 The results of Emission outside the frequency band

Please refer to Appendix A

## 7 Radiated Emissions in restricted frequency bands

Test result: Pass

### 7.1 Limit

The radiated emissions which fall in the restricted bands, must also comply with the radiated emission limits specified showed as below:

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

### 7.2 Measurement Procedure

#### For Radiated emission below 30MHz:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

#### NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

**TEST REPORT****For Radiated emission above 30MHz:**


- a) The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c) The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

**Note:**


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is  $\geq 1/T$  (Duty cycle < 98%) or 3 x RBW (Duty cycle  $\geq 98\%$ ) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported

### 7.3 Test Configuration


For Radiated emission below 30MHz:

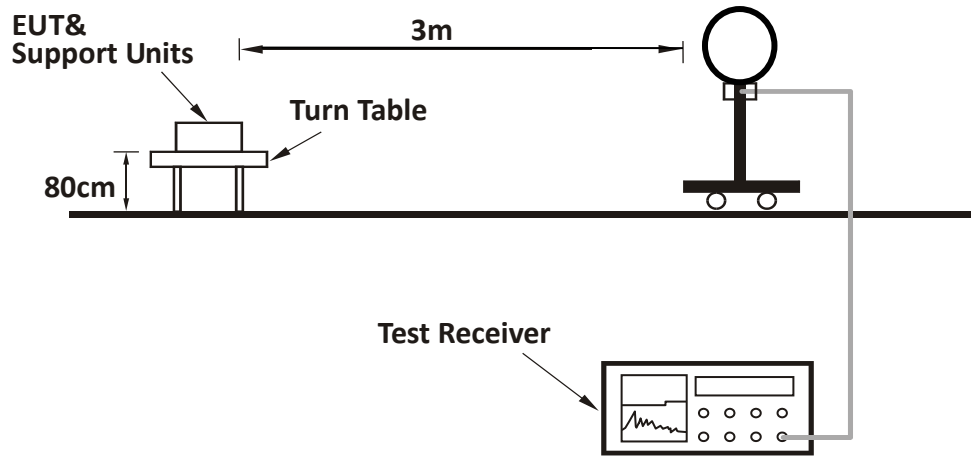

For Radiated emission 30MHz to 1GHz:

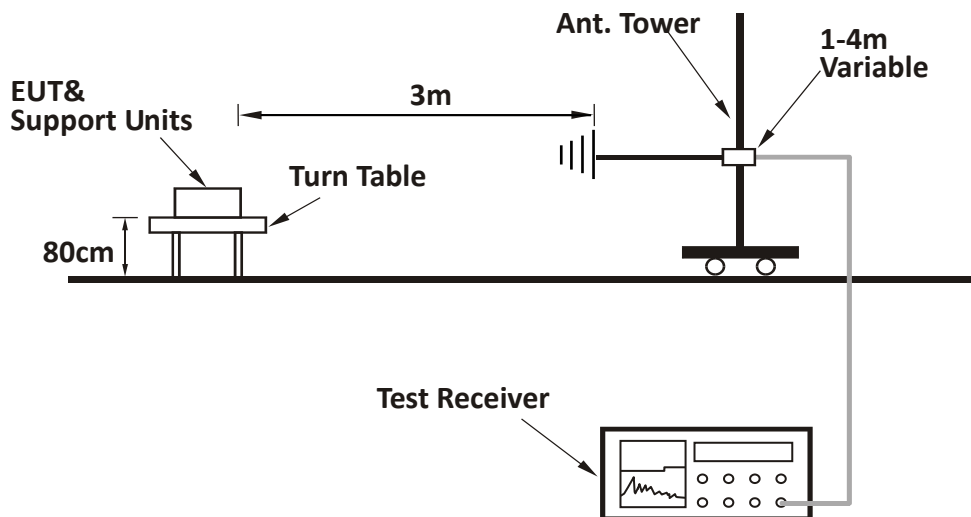

**For Radiated emission above 1GHz:**

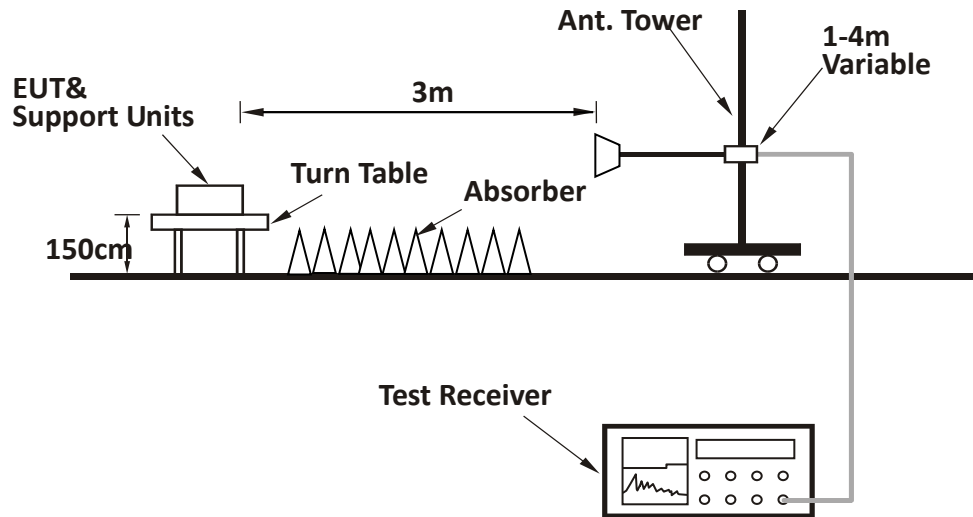




**TEST REPORT**

**7.4 Test Results of Radiated Emissions**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

The worst test result (30MHz to 1GHz) of channel L (2412MHz) chosen to list in the report as representative.

Model of SLD50SU4KC  
Horizontal

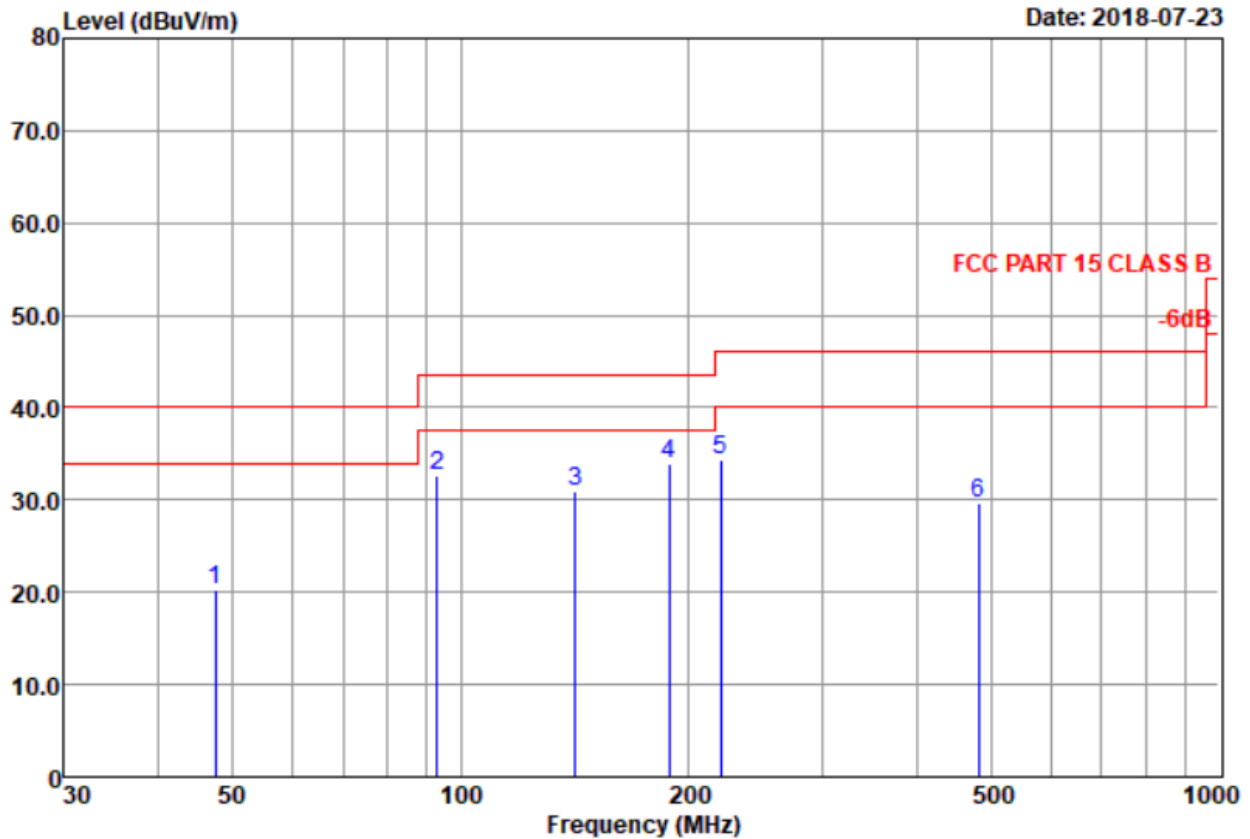


**Test Data**

	Freq. (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	47.49	19.55	0.75	28.14	28.20	20.36	40.00	19.64	QP
2	93.11	13.77	1.02	27.98	45.74	32.55	43.50	10.95	QP
3	141.33	18.40	1.32	27.65	38.79	30.86	43.50	12.64	QP
4	188.41	16.67	1.53	27.41	43.09	33.88	43.50	9.62	QP
5	219.84	15.90	1.64	27.29	44.12	34.37	46.00	11.63	QP
6	482.22	23.62	2.39	27.94	31.67	29.74	46.00	16.26	QP

Remarks: 1. Emission Level = Antenna Factor + Cable Loss - Preamp Factor + Reading.  
2. The emission levels that are 20dB below the official limits are not reported.

Vertical

Date: 2018-07-23

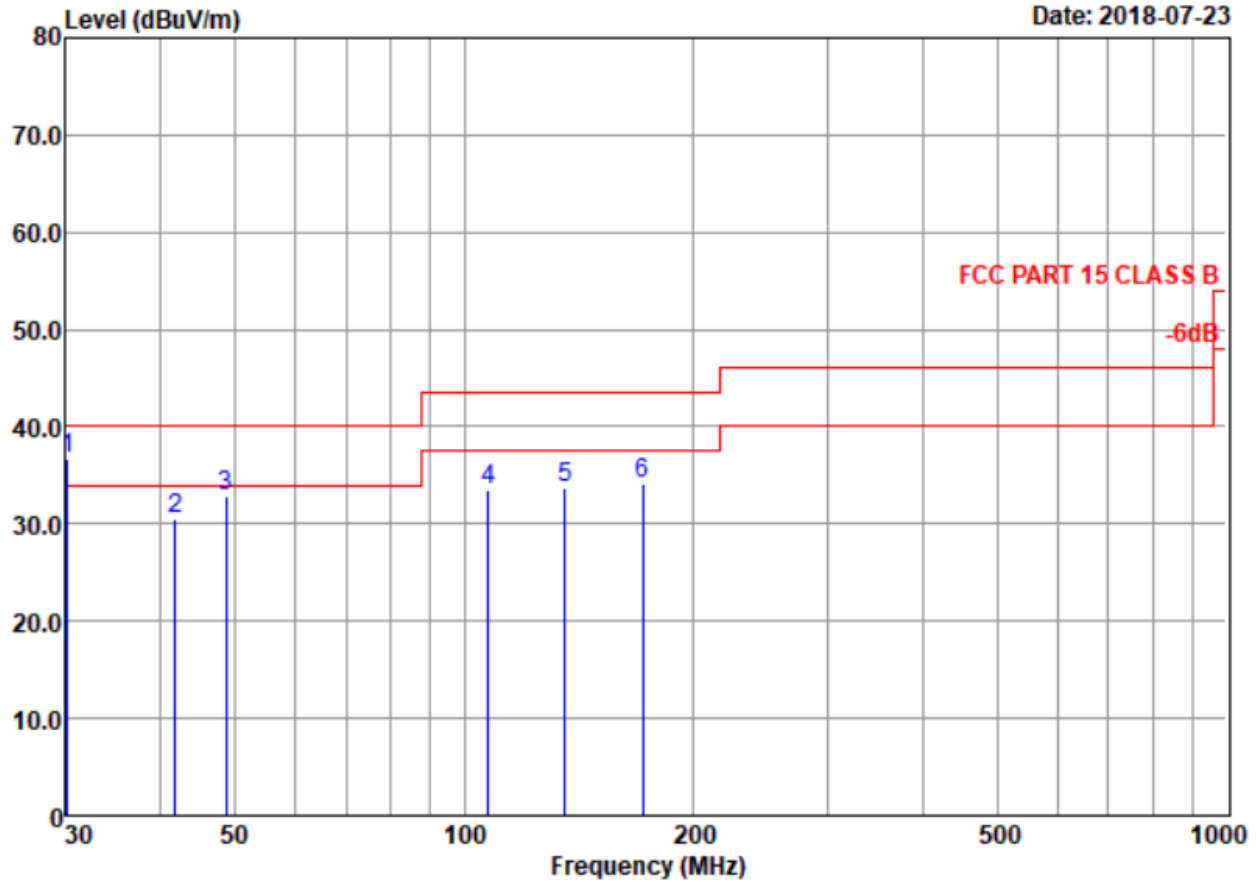

Test Data


	Freq. (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.14	18.81	0.59	28.17	45.50	36.73	40.00	3.27	QP
2	41.71	19.54	0.70	28.15	38.37	30.46	40.00	9.54	QP
3	48.67	19.43	0.75	28.14	40.82	32.86	40.00	7.14	QP
4	107.51	15.59	1.11	27.88	44.65	33.47	43.50	10.03	QP
5	135.51	18.14	1.28	27.69	41.93	33.66	43.50	9.84	QP
6	171.39	18.54	1.45	27.49	41.55	34.05	43.50	9.45	QP

Remarks: 1. Emission Level = Antenna Factor + Cable Loss - Preamp Factor + Reading.

2. The emission levels that are 20dB below the official limits are not reported.

Model of SLD55SU4KC  
Horizontal

Date: 2018-07-23

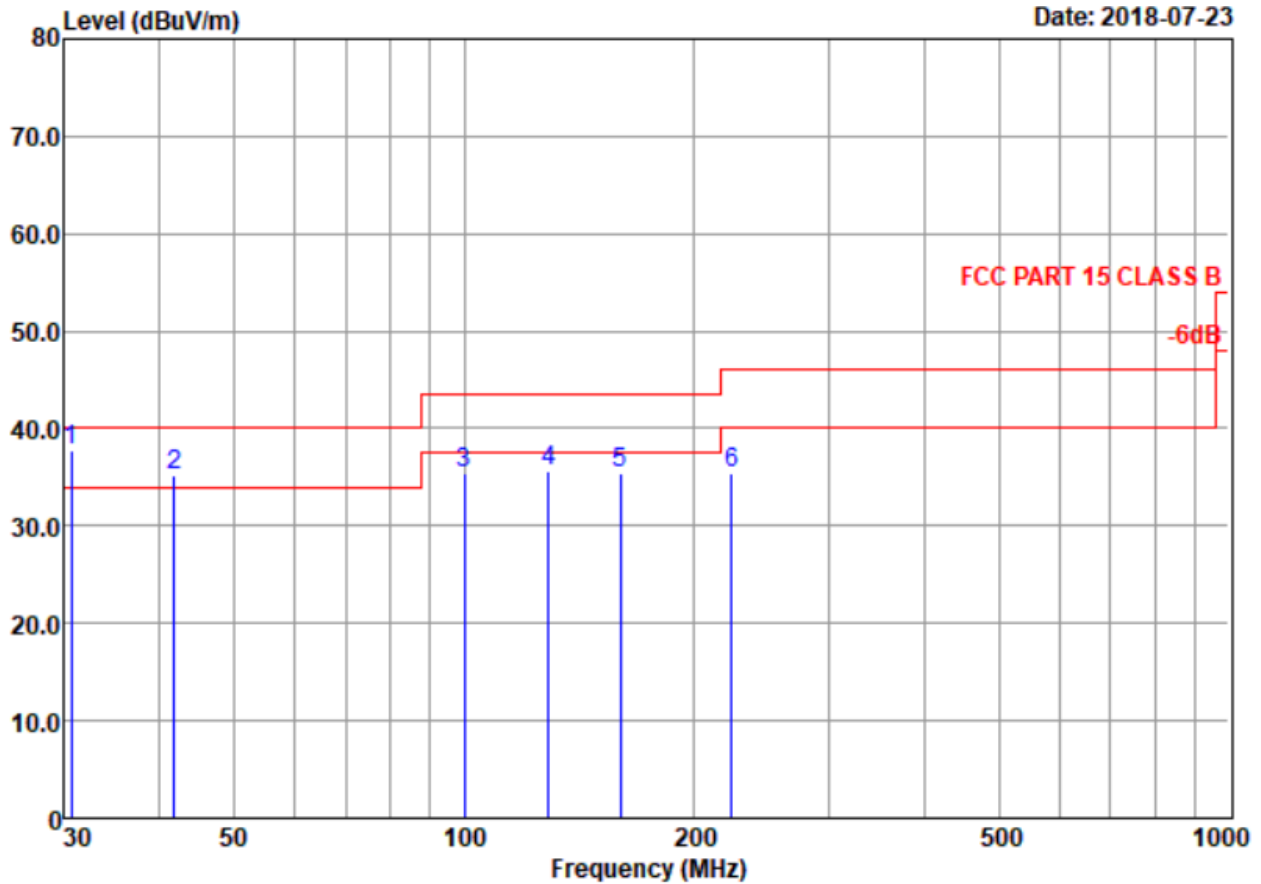


Test Data

	Freq. (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	30.60	18.87	0.59	28.17	46.40	37.69	40.00	2.31	QP
2	41.71	19.54	0.70	28.15	43.14	35.23	40.00	4.77	QP
3	99.88	14.30	1.06	27.94	48.02	35.44	43.50	8.06	QP
4	129.01	17.88	1.25	27.73	44.27	35.67	43.50	7.83	QP
5	159.78	19.60	1.40	27.55	41.93	35.38	43.50	8.12	QP
6	223.73	16.28	1.66	27.27	44.72	35.39	46.00	10.61	QP

Remarks: 1. Emission Level = Antenna Factor + Cable Loss - Preamp Factor + Reading.  
2. The emission levels that are 20dB below the official limits are not reported.

Vertical

Date: 2018-07-23

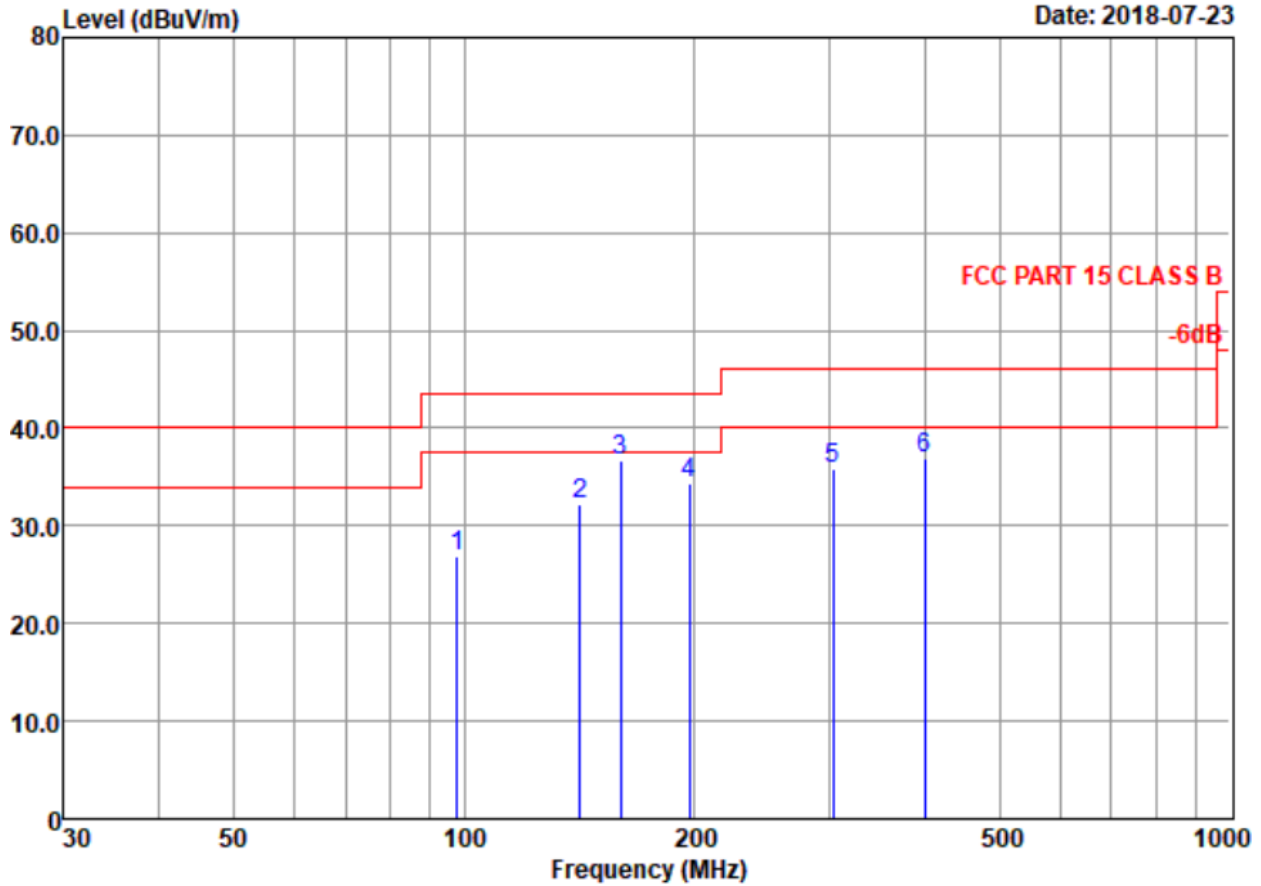

Test Data


	Freq. (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	97.80	14.14	1.05	27.95	39.62	26.86	43.50	16.64	QP
2	141.33	18.40	1.32	27.65	40.04	32.11	43.50	11.39	QP
3	159.78	19.60	1.40	27.55	43.18	36.63	43.50	6.87	QP
4	196.51	15.63	1.56	27.38	44.49	34.30	43.50	9.20	QP
5	302.48	19.69	1.87	27.05	41.31	35.82	46.00	10.18	QP
6	399.03	21.64	2.17	27.57	40.68	36.92	46.00	9.08	QP

Remarks: 1. Emission Level = Antenna Factor + Cable Loss - Preamp Factor + Reading.  
 2. The emission levels that are 20dB below the official limits are not reported.

## TEST REPORT

Model of SLD65SU4KC  
Horizontal

Date: 2018-08-04

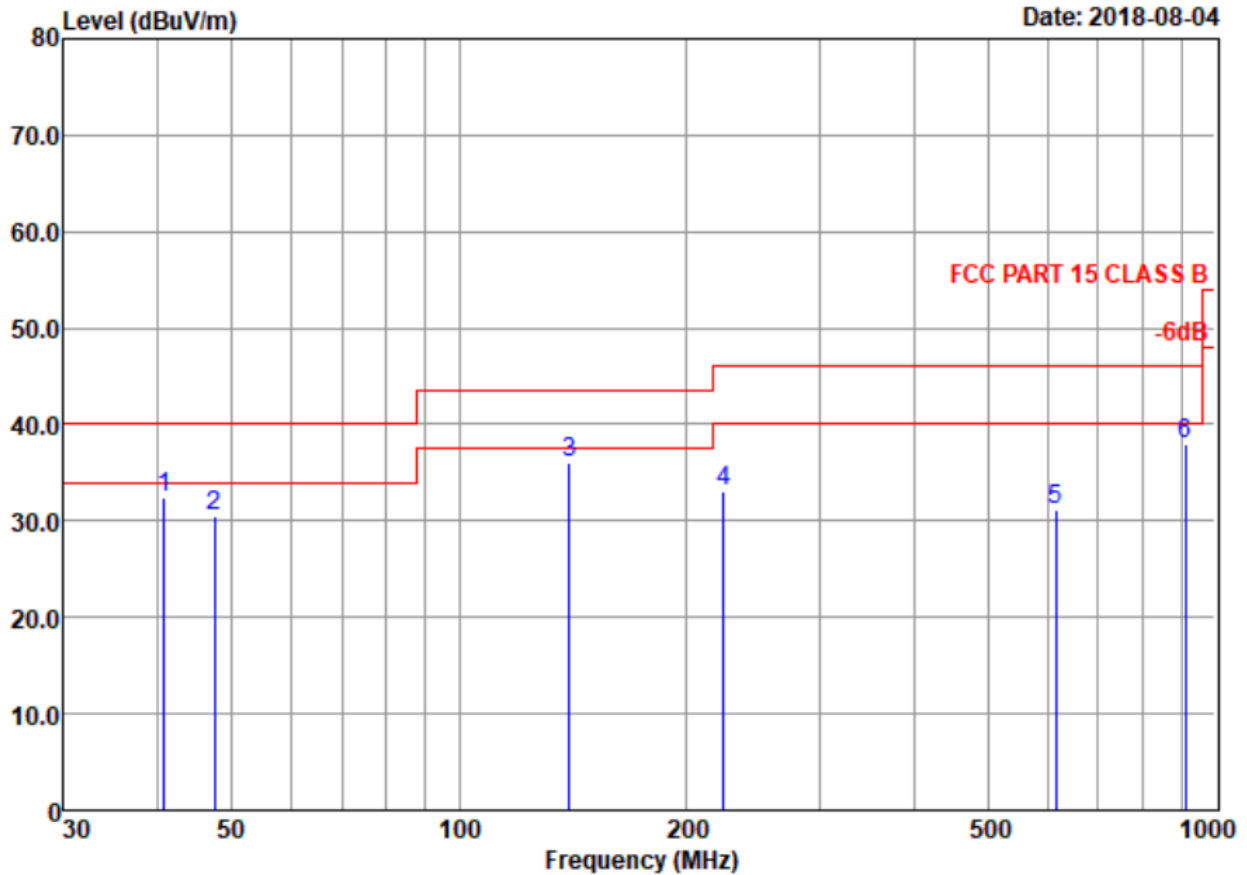

### Test Data

	Freq. (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	40.70	19.46	0.69	28.15	40.43	32.43	40.00	7.57	QP
2	47.49	19.55	0.75	28.14	38.40	30.56	40.00	9.44	QP
3	139.85	18.30	1.31	27.66	44.00	35.95	43.50	7.55	QP
4	223.73	16.28	1.66	27.27	42.31	32.98	46.00	13.02	QP
5	614.21	25.63	2.69	27.72	30.47	31.07	46.00	14.93	QP
6	912.86	29.43	3.27	26.94	32.29	38.05	46.00	7.95	QP


Remarks: 1. Emission Level = Antenna Factor + Cable Loss - Preamp Factor + Reading.

2. The emission levels that are 20dB below the official limits are not reported.

## TEST REPORT

Vertical

Date: 2018-08-04

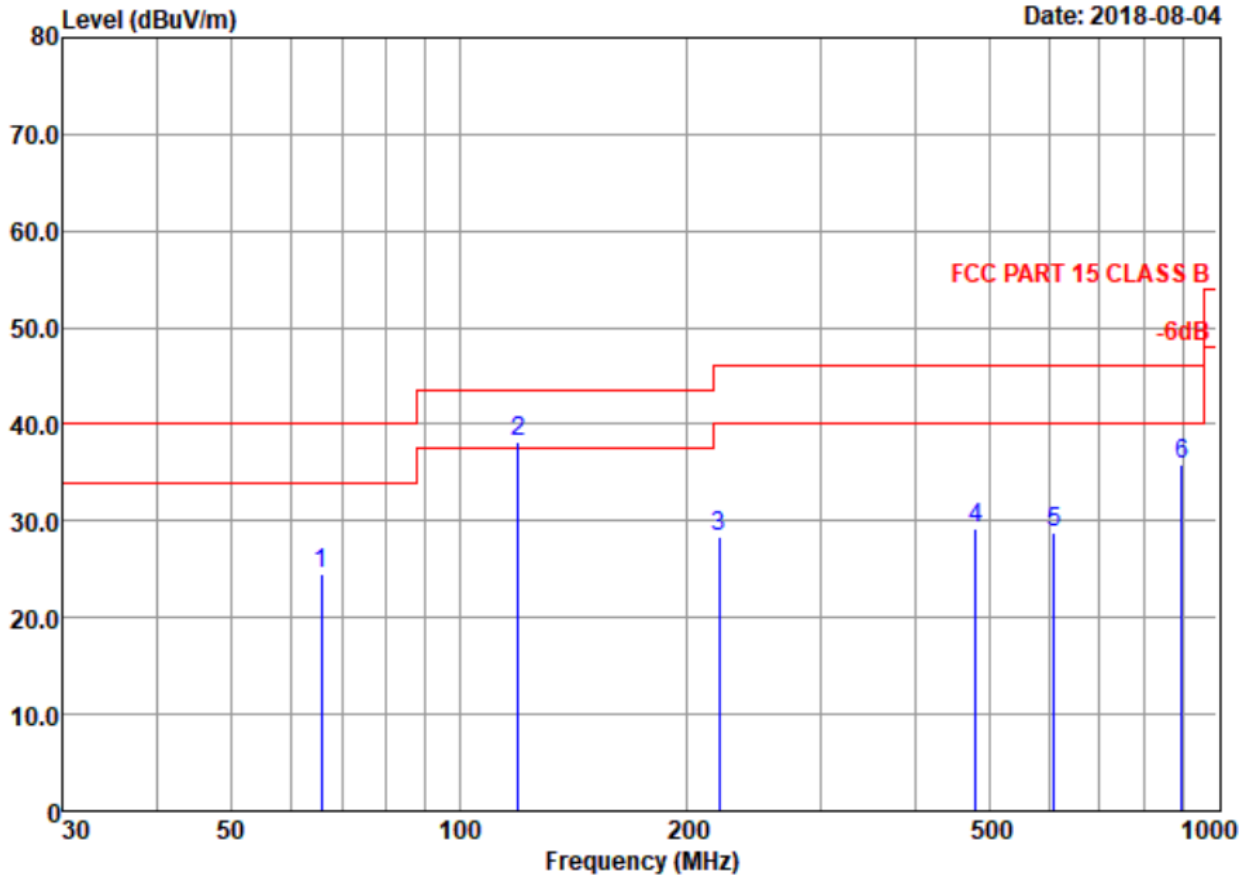

### Test Data


	Freq. (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	65.80	18.37	0.87	28.09	33.41	24.56	40.00	15.44	QP
2	119.43	17.44	1.19	27.79	47.30	38.14	43.50	5.36	QP
3	219.84	15.90	1.64	27.29	38.04	28.29	46.00	17.71	QP
4	480.53	23.60	2.37	27.94	31.18	29.21	46.00	16.79	QP
5	609.92	25.65	2.69	27.73	28.22	28.83	46.00	17.17	QP
6	897.00	29.18	3.25	27.00	30.51	35.94	46.00	10.06	QP

Remarks: 1. Emission Level = Antenna Factor + Cable Loss - Preamp Factor + Reading.

2. The emission levels that are 20dB below the official limits are not reported.

## TEST REPORT

### Model of SLD75SU4KC Horizontal

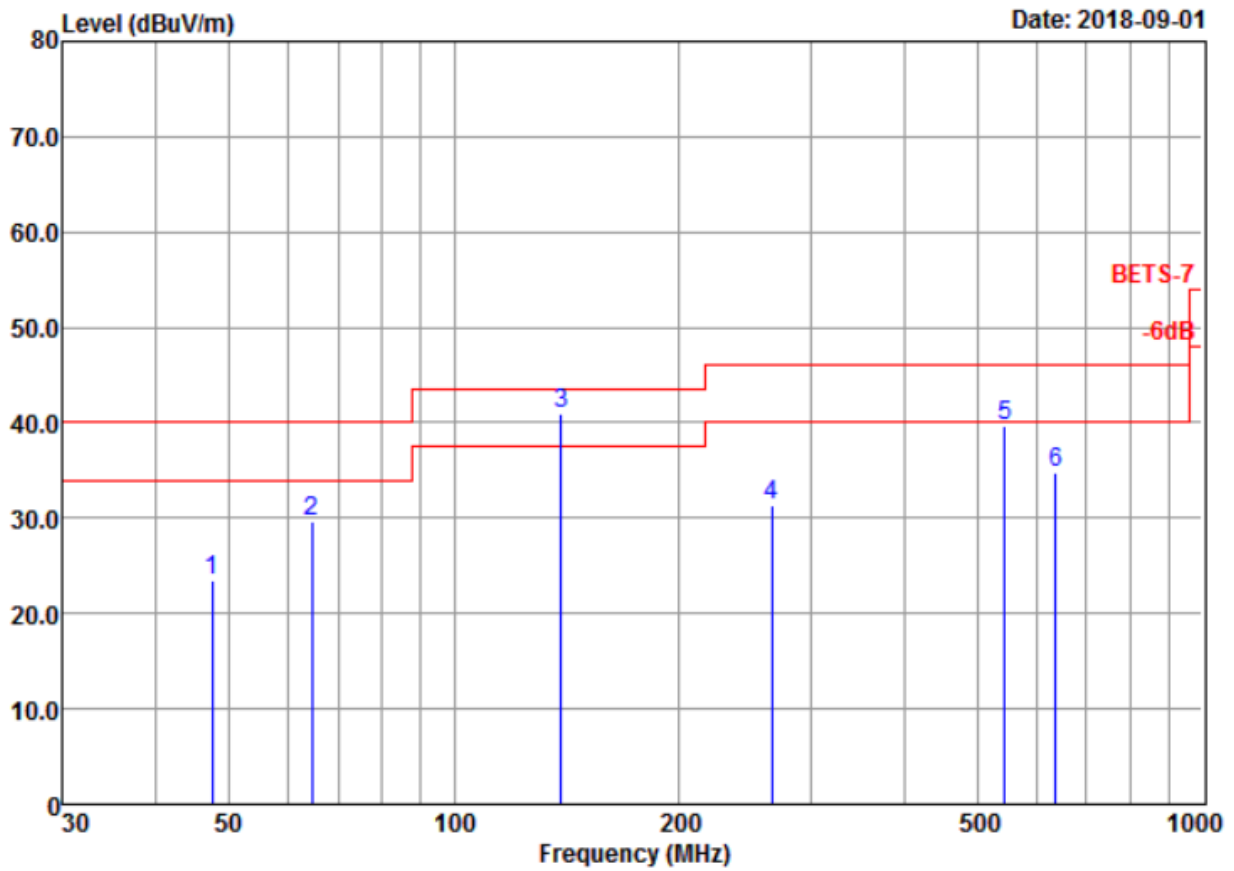

#### Test Data


	Freq. (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)
1	47.49	18.75	0.75	28.14	32.21	23.57	40.00	16.43
2	64.43	18.10	0.86	28.10	38.88	29.74	40.00	10.26
3	138.87	19.16	1.31	27.67	48.12	40.92	43.50	2.58
4	265.68	19.32	1.77	27.13	37.41	31.37	46.00	14.63
5	543.27	24.50	2.54	27.89	40.59	39.74	46.00	6.26
6	636.13	26.19	2.75	27.66	33.44	34.72	46.00	11.28

Remarks: 1. Emission Level = Antenna Factor + Cable Loss - Preamp Factor + Reading.

## TEST REPORT

Vertical

Date: 2018-09-01

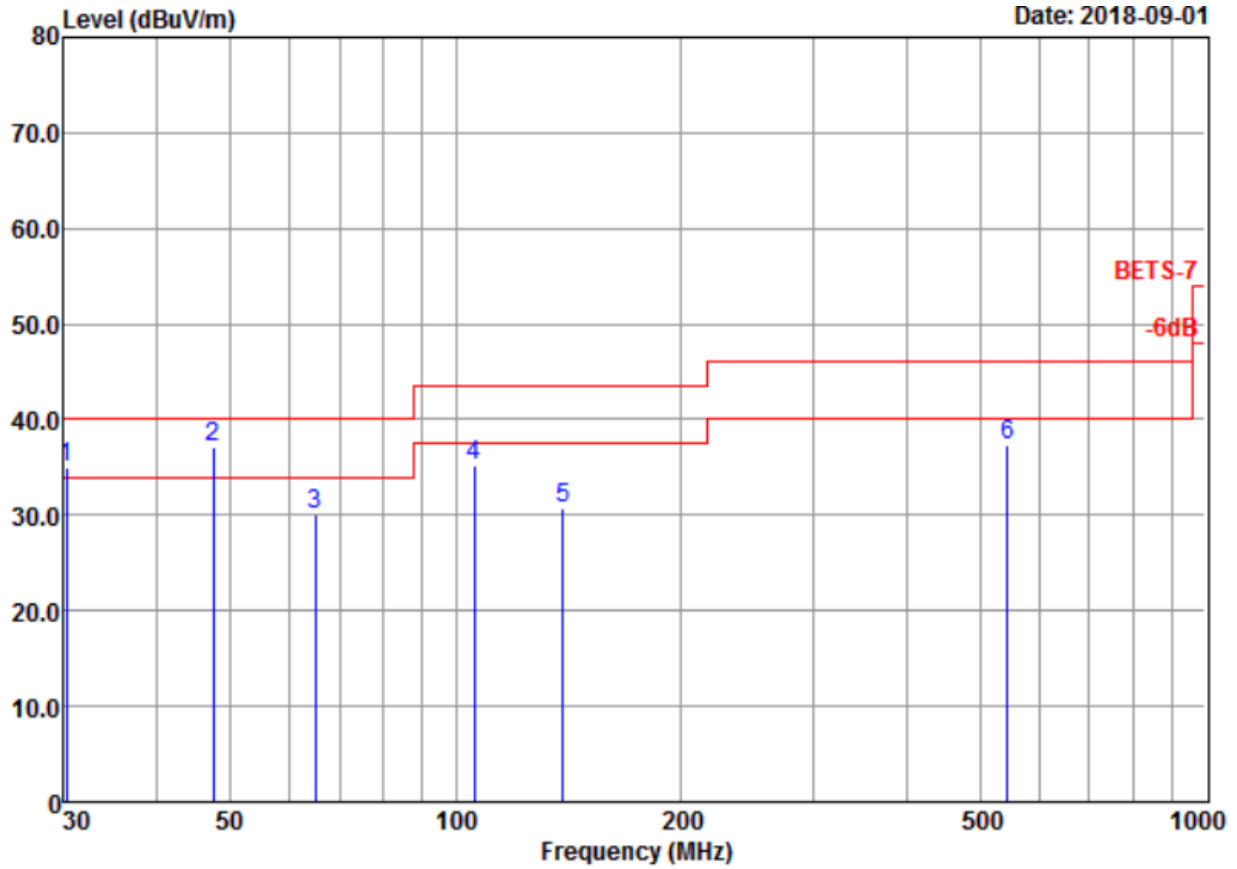

### Test Data

	Freq. (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Reading (dBuV)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)
1	30.21	17.26	0.59	28.17	45.41	35.09	40.00	4.91
2	47.49	18.75	0.75	28.14	45.74	37.10	40.00	2.90
3	64.89	17.40	0.86	28.10	39.96	30.12	40.00	9.88
4	105.64	15.25	1.10	27.89	46.75	35.21	43.50	8.29
5	138.87	19.16	1.31	27.67	37.87	30.67	43.50	12.83
6	543.27	24.50	2.54	27.89	38.17	37.32	46.00	8.68

Remarks: 1. Emission Level = Antenna Factor + Cable Loss - Preamp Factor + Reading.



**TEST REPORT**

**Test result above 1GHz:**

The emission was conducted from 1GHz to 25GHz

Model of SLD50SU4KC

802.11b

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.46	103.14	Fundamental	/	PK
	H	2387.83	51.58	74.00	22.42	PK
	H	4824.54	51.10	74.00	22.90	PK
M	H	2437.61	102.50	Fundamental	/	PK
	H	4874.15	51.80	74.00	22.20	PK
H	H	2462.00	103.10	Fundamental	/	PK
	H	2483.54	57.70	74.00	16.30	PK
	V	2483.54	46.50	54.00	7.50	AV
	H	4924.80	52.60	74.00	21.40	PK

802.11g

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	104.00	Fundamental	/	PK
	H	2389.41	69.97	74.00	4.03	PK
	H	2389.41	48.67	54.00	5.33	AV
	V	2390.00	70.20	74.00	3.80	PK
	V	2390.00	49.50	54.00	4.50	AV
M	H	2437.00	103.10	Fundamental	/	PK
	H	4874.60	46.20	74.00	27.80	PK
H	H	2462.00	104.70	Fundamental	/	PK
	H	2483.50	67.21	74.00	6.79	PK
	H	2483.50	46.20	54.00	7.80	AV
	V	2483.50	68.80	74.00	5.20	PK
	V	2483.50	47.00	54.00	7.00	AV

**TEST REPORT**

802.11n(HT20)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	101.40	Fundamental	/	PK
	H	2390.00	68.84	74.00	5.16	PK
	H	2390.00	49.23	54.00	4.77	PK
	V	2390.00	67.02	74.00	6.98	PK
	V	2390.00	50.37	54.00	3.63	PK
	H	4824.60	51.20	74.00	22.80	PK
M	H	2437.00	101.70	Fundamental	/	PK
	H	4874.20	46.60	74.00	27.40	PK
H	H	2462.00	101.90	Fundamental	/	PK
	H	2483.50	65.94	74.00	8.06	PK
	H	2483.50	47.00	54.00	7.00	AV
	V	2483.50	67.21	74.00	6.79	PK
	V	2483.50	42.57	54.00	11.43	AV

802.11n(HT40)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2422.00	99.50	Fundamental	/	PK
	H	2389.30	70.35	74.00	3.65	PK
	H	2389.30	53.00	54.00	1.00	AV
	H	4844.60	47.50	74.00	26.50	PK
M	H	2437.00	99.90	Fundamental	/	PK
	H	4874.40	47.60	54.00	6.40	AV
H	H	2452.00	99.50	Fundamental	/	PK
	H	2483.50	70.27	74.00	3.73	PK
	H	2483.50	46.50	54.00	7.50	AV
	V	2483.50	69.54	74.00	4.46	PK
	V	2483.50	45.86	54.00	8.14	AV

**TEST REPORT**

Model of SLD55SU4KC

802.11b

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.44	103.22	Fundamental	/	PK
	H	2388.93	52.43	74.00	21.57	PK
	H	4824.54	52.26	74.00	21.74	PK
M	H	2437.60	102.40	Fundamental	/	PK
	H	4874.15	50.60	74.00	23.40	PK
H	H	2462.00	102.20	Fundamental	/	PK
	H	2483.54	57.70	74.00	16.30	PK
	V	2483.54	47.20	54.00	6.80	AV
	H	4924.80	51.80	74.00	22.20	PK

802.11g

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.10	103.60	Fundamental	/	PK
	H	2389.80	68.62	74.00	5.38	PK
	H	2389.41	47.44	54.00	6.56	AV
	V	2390.01	69.80	74.00	4.20	PK
	V	2390.01	48.30	54.00	5.70	AV
M	H	2437.00	103.30	Fundamental	/	PK
	H	4874.60	46.40	74.00	27.60	PK
H	H	2462.00	103.60	Fundamental	/	PK
	H	2483.50	68.12	74.00	5.88	PK
	H	2483.50	46.30	54.00	7.70	AV
	V	2483.50	68.40	74.00	5.60	PK
	V	2483.50	46.80	54.00	7.20	AV

**TEST REPORT**

802.11n(HT20)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.04	101.20	Fundamental	/	PK
	H	2390.00	67.64	74.00	6.36	PK
	H	2390.00	49.31	54.00	4.69	PK
	V	2390.00	67.26	74.00	6.74	PK
	V	2390.00	51.16	54.00	2.84	PK
	H	4824.60	50.80	74.00	23.20	PK
M	H	2437.00	101.60	Fundamental	/	PK
	H	4874.20	46.90	74.00	27.10	PK
H	H	2462.00	101.60	Fundamental	/	PK
	H	2483.50	66.29	74.00	7.71	PK
	H	2483.50	47.47	54.00	6.53	AV
	V	2483.50	69.24	74.00	4.76	PK
	V	2483.50	43.46	54.00	10.54	AV

802.11n(HT40)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2422.00	99.60	Fundamental	/	PK
	H	2389.30	70.38	74.00	3.62	PK
	H	2389.50	52.12	54.00	1.88	AV
	H	4844.60	48.10	74.00	25.90	PK
M	H	2437.00	99.80	Fundamental	/	PK
	H	4874.40	47.60	54.00	6.40	AV
H	H	2452.00	99.70	Fundamental	/	PK
	H	2483.50	70.15	74.00	3.85	PK
	H	2483.50	47.50	54.00	6.50	AV
	V	2483.50	69.66	74.00	4.34	PK
	V	2483.50	46.49	54.00	7.51	AV

**TEST REPORT**

Model of SLD65SU4KC

802.11b

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.15	103.03	Fundamental	/	PK
	H	2387.83	52.77	74.00	21.23	PK
	H	4824.54	52.49	74.00	21.51	PK
M	H	2437.60	102.40	Fundamental	/	PK
	H	4874.15	51.50	74.00	22.50	PK
H	H	2462.00	103.20	Fundamental	/	PK
	H	2483.50	57.70	74.00	16.30	PK
	V	2483.50	46.40	54.00	7.60	AV
	H	4924.80	50.90	74.00	23.10	PK

802.11g

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	104.00	Fundamental	/	PK
	H	2390.00	70.03	74.00	3.97	PK
	H	2390.00	49.54	54.00	4.46	AV
	V	2390.01	69.90	74.00	4.10	PK
	V	2390.01	50.23	54.00	3.77	AV
M	H	2437.00	103.60	Fundamental	/	PK
	H	4874.60	46.60	74.00	27.40	PK
H	H	2462.00	104.20	Fundamental	/	PK
	H	2483.50	67.21	74.00	6.79	PK
	H	2483.50	46.40	54.00	7.60	AV
	V	2483.50	68.70	74.00	5.30	PK
	V	2483.50	47.20	54.00	6.80	AV

**TEST REPORT**

802.11n(HT20)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.11	101.60	Fundamental	/	PK
	H	2390.00	68.87	74.00	5.13	PK
	H	2390.00	49.58	54.00	4.42	PK
	V	2390.00	67.12	74.00	6.88	PK
	V	2390.00	50.29	54.00	3.71	PK
	H	4824.60	51.40	74.00	22.60	PK
M	H	2437.00	101.80	Fundamental	/	PK
	H	4874.20	46.70	74.00	27.30	PK
H	H	2462.00	101.80	Fundamental	/	PK
	H	2483.50	66.53	74.00	7.47	PK
	H	2483.50	47.12	54.00	6.88	AV
	V	2483.50	67.55	74.00	6.45	PK
	V	2483.50	44.58	54.00	9.42	AV

802.11n(HT40)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2422.00	99.70	Fundamental	/	PK
	H	2389.30	70.10	74.00	3.90	PK
	H	2389.30	52.31	54.00	1.69	AV
	H	4844.60	47.60	74.00	26.40	PK
M	H	2437.00	99.60	Fundamental	/	PK
	H	4874.40	47.50	54.00	6.50	AV
H	H	2452.00	99.80	Fundamental	/	PK
	H	2483.50	69.51	74.00	4.49	PK
	H	2483.50	46.47	54.00	7.53	AV
	V	2483.50	69.68	74.00	4.32	PK
	V	2483.50	45.36	54.00	8.64	AV

**TEST REPORT**

Model of SLD75SU4KC

802.11b

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.20	103.70	Fundamental	/	PK
	H	2390.07	51.81	74.00	22.19	PK
	H	4824.64	52.70	74.00	21.30	PK
M	H	2437.61	102.60	Fundamental	/	PK
	H	4874.15	51.70	74.00	22.30	PK
H	H	2462.00	103.20	Fundamental	/	PK
	H	2483.52	57.80	74.00	16.20	PK
	V	2483.52	46.70	54.00	7.30	AV
	H	4924.80	51.40	74.00	22.60	PK

802.11g

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	103.80	Fundamental	/	PK
	H	2389.80	69.75	74.00	4.25	PK
	H	2389.80	48.63	54.00	5.37	AV
	V	2390.01	70.10	74.00	3.90	PK
	V	2390.01	49.70	54.00	4.30	AV
M	H	2437.00	103.30	Fundamental	/	PK
	H	4874.60	46.70	74.00	27.30	PK
H	H	2462.00	103.50	Fundamental	/	PK
	H	2483.50	68.62	74.00	5.38	PK
	H	2483.50	46.74	54.00	7.26	AV
	V	2483.50	69.20	74.00	4.80	PK
	V	2483.50	48.10	54.00	5.90	AV

**TEST REPORT**

802.11n(HT20)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2412.00	101.50	Fundamental	/	PK
	H	2390.00	69.74	74.00	4.26	PK
	H	2390.00	49.45	54.00	4.55	PK
	V	2390.00	67.18	74.00	6.82	PK
	V	2390.00	49.87	54.00	4.13	PK
	H	4824.60	50.40	74.00	23.60	PK
M	H	2437.00	101.80	Fundamental	/	PK
	H	4874.20	47.20	74.00	26.80	PK
H	H	2462.00	101.10	Fundamental	/	PK
	H	2483.50	67.27	74.00	6.73	PK
	H	2483.50	48.29	54.00	5.71	AV
	V	2483.50	68.57	74.00	5.43	PK
	V	2483.50	44.66	54.00	9.34	AV

802.11n(HT40)

CH	Antenna	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
L	H	2422.00	99.70	Fundamental	/	PK
	H	2389.70	70.12	74.00	3.88	PK
	H	2389.70	51.80	54.00	2.20	AV
	H	4844.20	47.60	74.00	26.40	PK
M	H	2437.00	99.40	Fundamental	/	PK
	H	4874.40	48.50	54.00	5.50	AV
H	H	2452.00	99.10	Fundamental	/	PK
	H	2483.50	69.90	74.00	4.10	PK
	H	2483.50	47.20	54.00	6.80	AV
	V	2483.50	69.58	74.00	4.42	PK
	V	2483.50	44.62	54.00	9.38	AV



**TEST REPORT**

- Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Corrected Reading = Original Receiver Reading + Correct Factor
3. Margin = Limit - Corrected Reading
4. If the PK Corrected Reading is lower than AV limit, the AV test can be elided.

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,  
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,  
Limit = 40.00dBuV/m.  
Then Correct Factor =  $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$ ;  
Corrected Reading =  $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$ ;  
Margin =  $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$ .

## 8 Power line conducted emission


Test result: Pass

### 8.1 Limit

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	QP	AV
0.15-0.5	66 to 56*	56 to 46 *
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### 8.2 Test Configuration

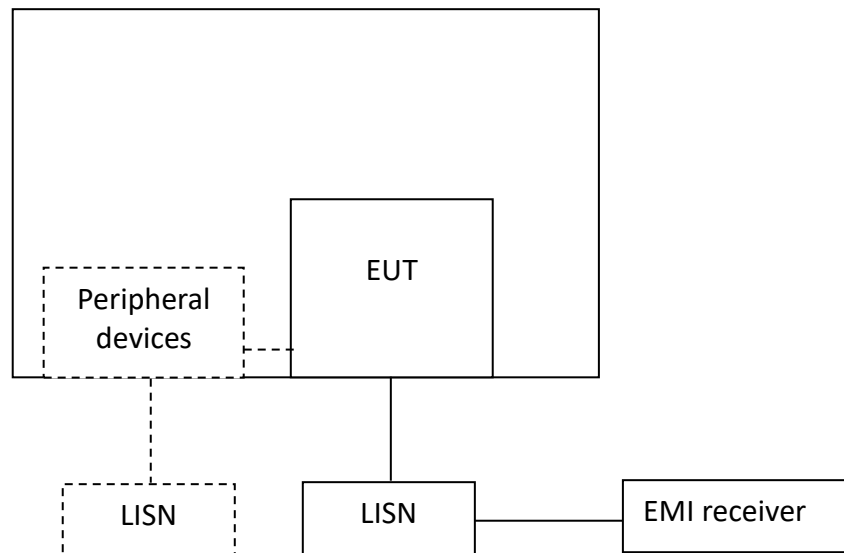

### 8.3 Measurement Procedure

Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50  $\Omega$  LISN port (to which the EUT is connected), where permitted, terminated into a 50  $\Omega$  measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50  $\Omega$  measuring port is terminated by a measuring instrument having 50  $\Omega$  input impedance. All other ports are terminated in 50  $\Omega$  loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.


TEST REPORT

### 8.4 Test Results of Power line conducted emission

Test Curve:

Model of SLD50SU4KC  
L Line

Date: 2018-07-25

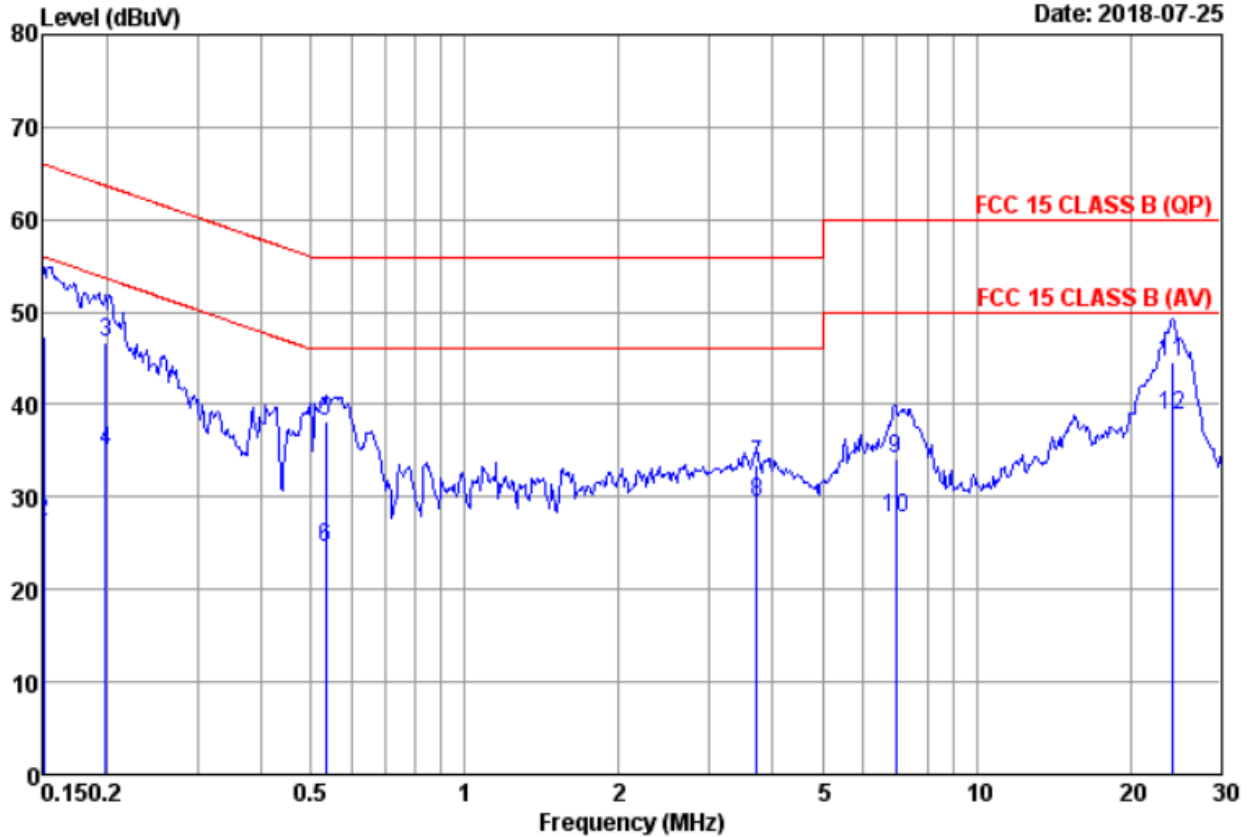

Test Data:


	Freq (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	10.54	0.03	36.80	47.37	65.99	18.62	QP
2	0.150	10.54	0.03	16.70	27.27	55.99	28.72	Average
3	0.199	10.45	0.05	36.20	46.70	63.66	16.96	QP
4	0.199	10.45	0.05	24.50	35.00	53.66	18.66	Average
5	0.535	10.32	0.05	27.80	38.17	56.00	17.83	QP
6	0.535	10.32	0.05	14.10	24.47	46.00	21.53	Average
7	3.720	10.32	0.12	22.99	33.43	56.00	22.57	QP
8	3.720	10.32	0.12	19.09	29.53	46.00	16.47	Average
9	6.951	10.32	0.16	23.60	34.08	60.00	25.92	QP
10	6.951	10.32	0.16	17.30	27.78	50.00	22.22	Average
11	24.142	10.33	0.30	33.90	44.53	60.00	15.47	QP
12	24.142	10.33	0.30	28.20	38.83	50.00	11.17	Average

Remark: 1.Emission Level= AMN Factor + Cable loss + Reading.

## TEST REPORT

N Line

Date: 2018-07-25

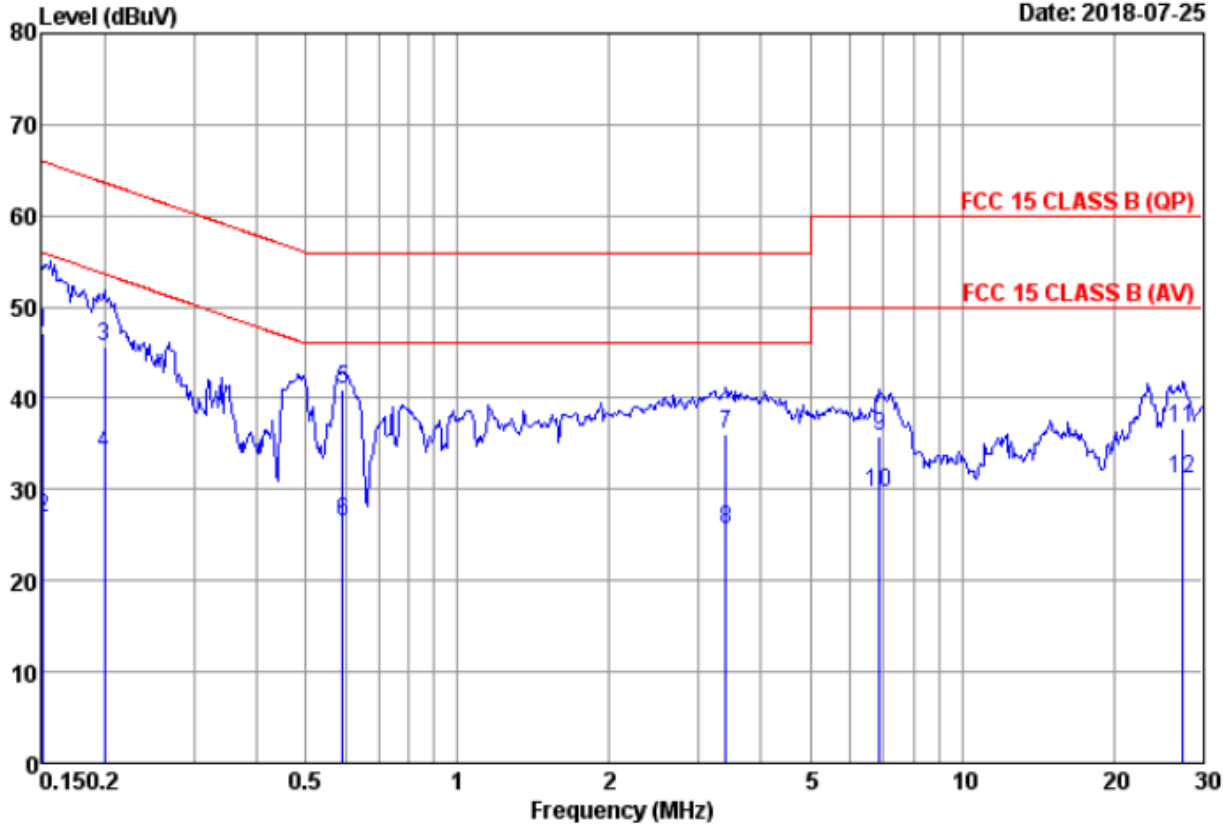

### Test Data:


	Freq (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.151	10.52	0.03	36.50	47.05	65.97	18.92	QP
2	0.151	10.52	0.03	16.40	26.95	55.97	29.02	Average
3	0.200	10.45	0.05	35.20	45.70	63.62	17.92	QP
4	0.200	10.45	0.05	23.50	34.00	53.62	19.62	Average
5	0.592	10.34	0.06	30.50	40.90	56.00	15.10	QP
6	0.592	10.34	0.06	16.00	26.40	46.00	19.60	Average
7	3.399	10.35	0.11	25.50	35.96	56.00	20.04	QP
8	3.399	10.35	0.11	15.20	25.66	46.00	20.34	Average
9	6.878	10.37	0.16	25.30	35.83	60.00	24.17	QP
10	6.878	10.37	0.16	19.20	29.73	50.00	20.27	Average
11	27.260	10.37	0.30	26.11	36.78	60.00	23.22	QP
12	27.260	10.37	0.30	20.41	31.08	50.00	18.92	Average

Remark: 1.Emission Level= AMN Factor + Cable loss + Reading.

## TEST REPORT

### Model of SLD55SU4KC L line

Date: 2018-07-25

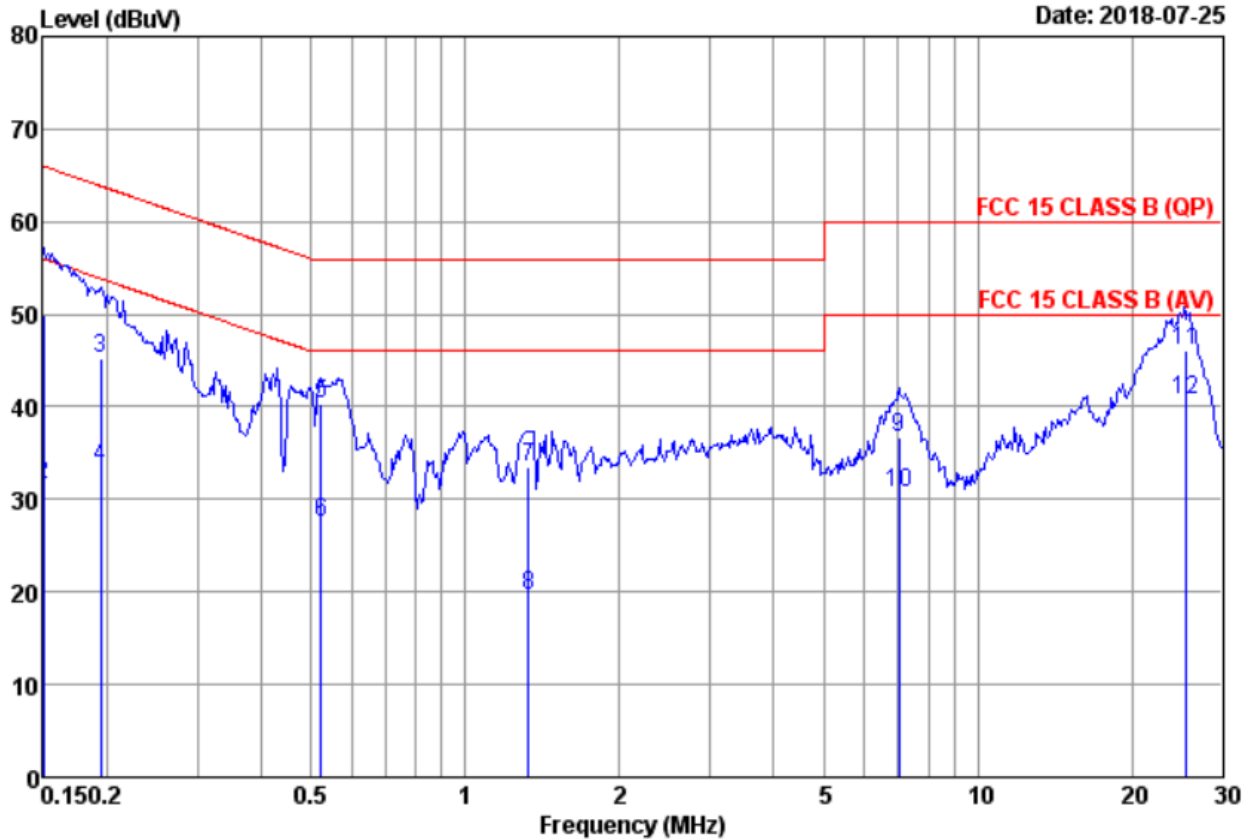

### Test data


	Freq (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Reading (dBμV)	Emission Level (dBμV)	Limits (dBμV)	Margin (dB)	Remark
1	0.150	10.54	0.03	39.30	49.87	65.99	16.12	QP
2	0.150	10.54	0.03	21.10	31.67	55.99	24.32	Average
3	0.195	10.46	0.05	34.80	45.31	63.83	18.52	QP
4	0.195	10.46	0.05	22.90	33.41	53.83	20.42	Average
5	0.524	10.32	0.05	30.00	40.37	56.00	15.63	QP
6	0.524	10.32	0.05	17.10	27.47	46.00	18.53	Average
7	1.326	10.31	0.08	23.10	33.49	56.00	22.51	QP
8	1.326	10.31	0.08	9.20	19.59	46.00	26.41	Average
9	7.030	10.32	0.16	26.20	36.68	60.00	23.32	QP
10	7.030	10.32	0.16	20.30	30.78	50.00	19.22	Average
11	25.380	10.34	0.30	35.40	46.04	60.00	13.96	QP
12	25.380	10.34	0.30	30.20	40.84	50.00	9.16	Average

Remark: 1.Emission Level= AMN Factor + Cable loss + Reading.

## TEST REPORT

N line

Date: 2018-07-25

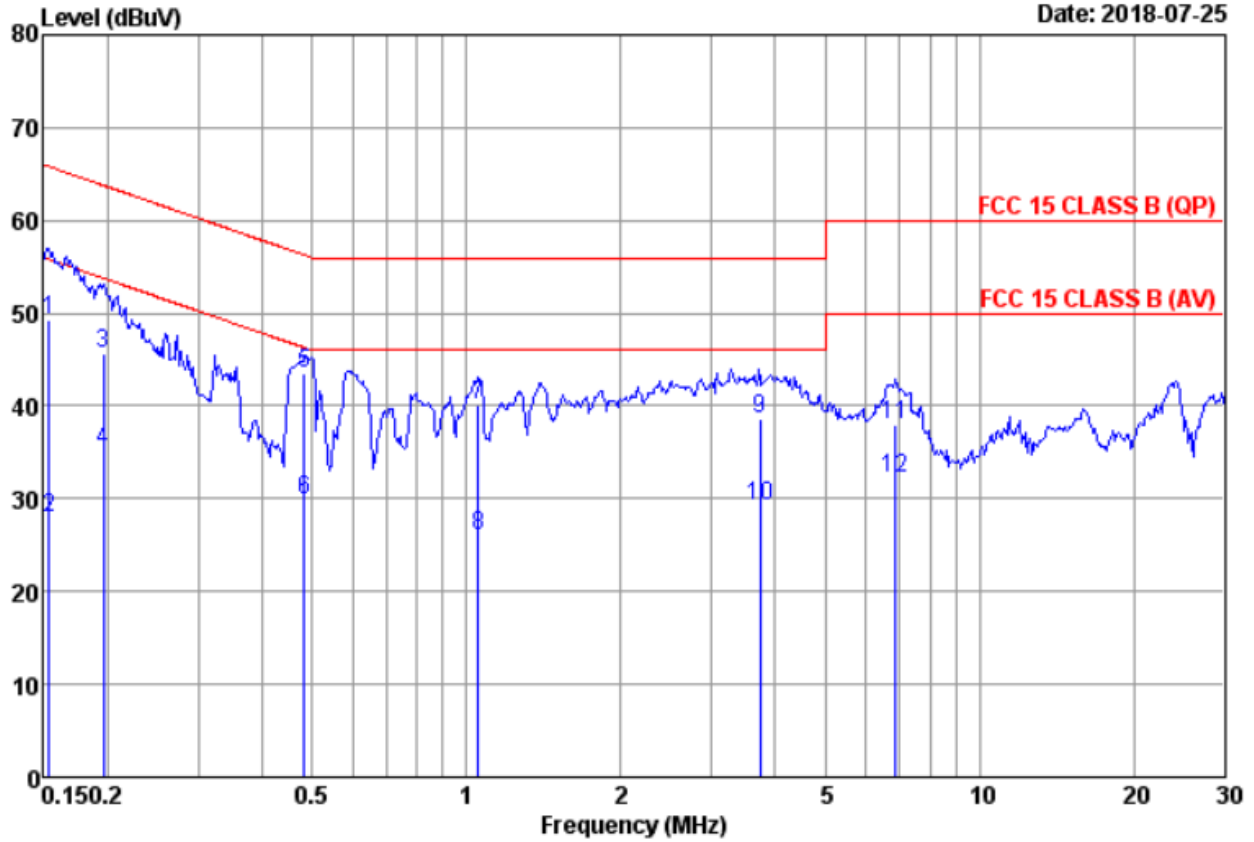

### Test data


	Freq (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.153	10.51	0.03	38.81	49.35	65.81	16.46	QP
2	0.153	10.51	0.03	17.31	27.85	55.81	27.96	Average
3	0.196	10.45	0.05	35.20	45.70	63.77	18.07	QP
4	0.196	10.45	0.05	24.80	35.30	53.77	18.47	Average
5	0.484	10.34	0.05	33.20	43.59	56.27	12.68	QP
6	0.484	10.34	0.05	19.40	29.79	46.27	16.48	Average
7	1.056	10.33	0.07	29.80	40.20	56.00	15.80	QP
8	1.056	10.33	0.07	15.70	26.10	46.00	19.90	Average
9	3.737	10.35	0.12	28.19	38.66	56.00	17.34	QP
10	3.737	10.35	0.12	18.69	29.16	46.00	16.84	Average
11	6.878	10.37	0.16	27.50	38.03	60.00	21.97	QP
12	6.878	10.37	0.16	21.70	32.23	50.00	17.77	Average

Remark: 1.Emission Level= AMN Factor + Cable loss + Reading.

## TEST REPORT

### Model of SLD65SU4KC L line

Date: 2018-07-23

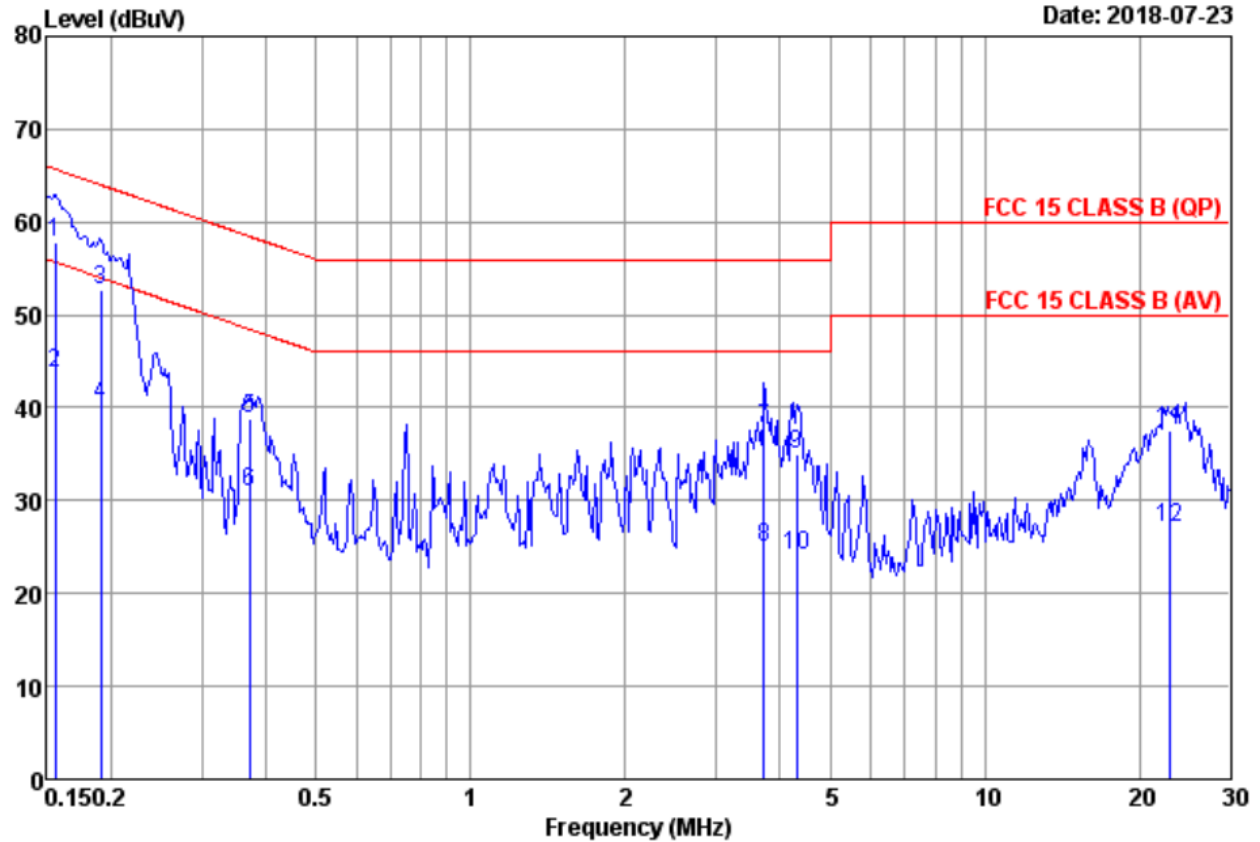

### Test data

	Freq (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Reading (dB $\mu$ V)	Emission Level (dB $\mu$ V)	Limits (dB $\mu$ V)	Margin (dB)	Remark
1	0.155	10.53	0.03	47.20	57.76	65.71	7.95	QP
2	0.155	10.53	0.03	33.10	43.66	55.71	12.05	Average
3	0.191	10.47	0.05	42.19	52.71	64.00	11.29	QP
4	0.191	10.47	0.05	29.79	40.31	54.00	13.69	Average
5	0.371	10.34	0.05	28.50	38.89	58.47	19.58	QP
6	0.371	10.34	0.05	20.50	30.89	48.47	17.58	Average
7	3.720	10.32	0.12	27.29	37.73	56.00	18.27	QP
8	3.720	10.32	0.12	14.49	24.93	46.00	21.07	Average
9	4.313	10.32	0.12	24.50	34.94	56.00	21.06	QP
10	4.313	10.32	0.12	13.60	24.04	46.00	21.96	Average
11	22.896	10.32	0.29	26.89	37.50	60.00	22.50	QP
12	22.896	10.32	0.29	16.49	27.10	50.00	22.90	Average


Remark: 1.Emission Level= AMN Factor + Cable loss + Reading.



## TEST REPORT

N line

Date: 2018-07-23

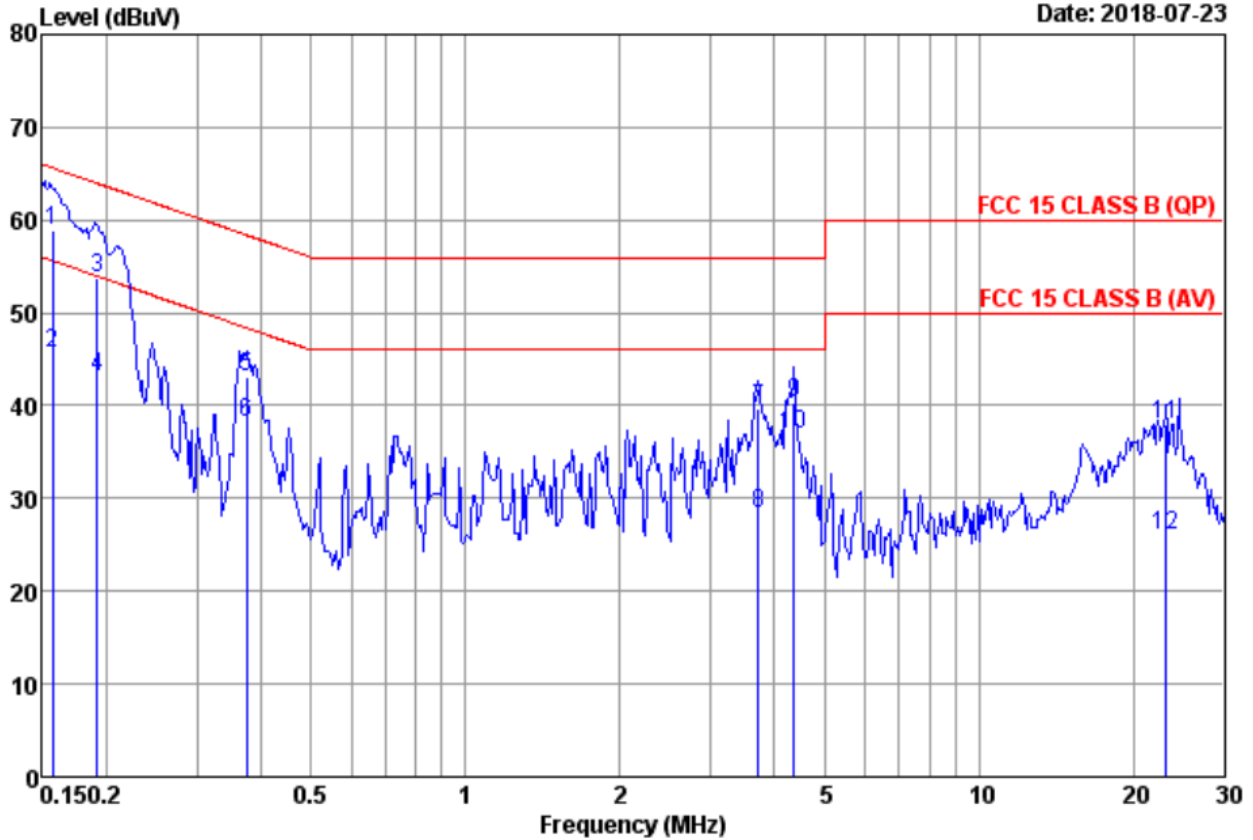


### Test data

	Freq (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.157	10.51	0.03	48.30	58.84	65.61	6.77	QP
2	0.157	10.51	0.03	35.20	45.74	55.61	9.87	Average
3	0.192	10.46	0.05	43.20	53.71	63.96	10.25	QP
4	0.192	10.46	0.05	32.50	43.01	53.96	10.95	Average
5	0.375	10.36	0.05	32.60	43.01	58.39	15.38	QP
6	0.375	10.36	0.05	27.80	38.21	48.39	10.18	Average
7	3.722	10.35	0.12	29.19	39.66	56.00	16.34	QP
8	3.722	10.35	0.12	17.89	28.36	46.00	17.64	Average
9	4.360	10.35	0.12	29.90	40.37	56.00	15.63	QP
10	4.360	10.35	0.12	26.40	36.87	46.00	9.13	Average
11	23.120	10.32	0.29	27.40	38.01	60.00	21.99	QP
12	23.120	10.32	0.29	15.50	26.11	50.00	23.89	Average

Remark: 1.Emission Level= AMN Factor + Cable loss + Reading.

Model of SLD75SU4KC  
L line

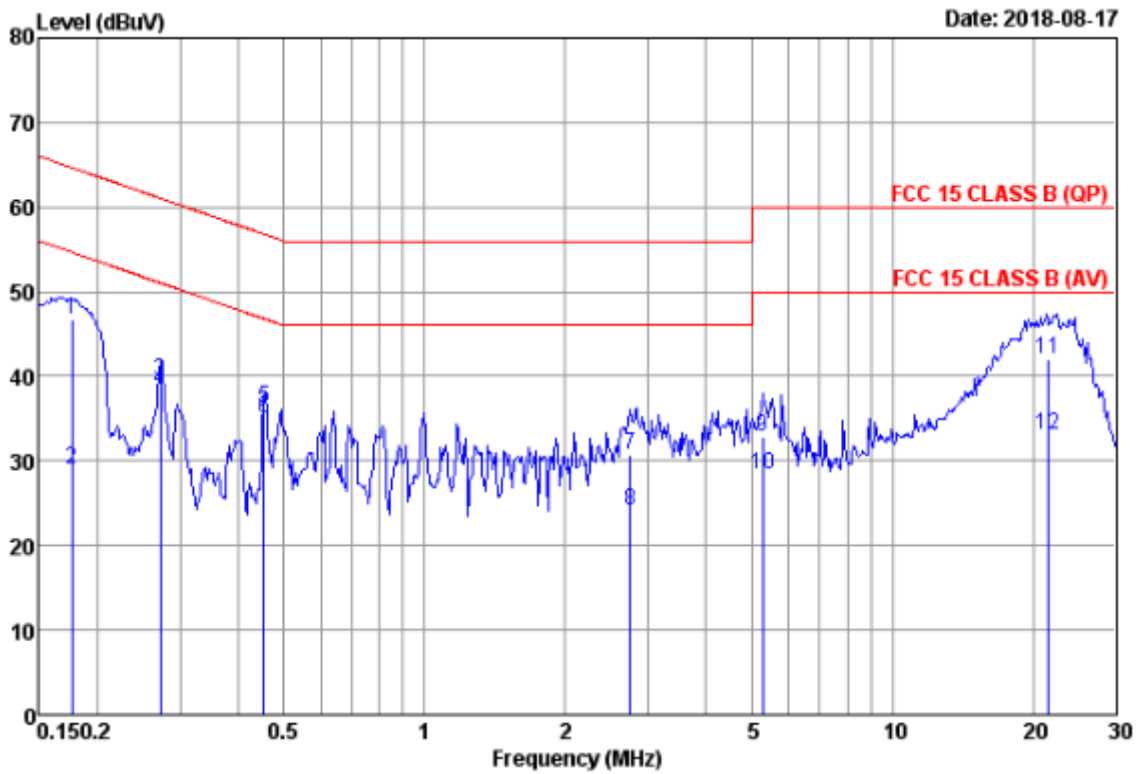


Test data

	Freq (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.176	10.49	0.04	36.20	46.73	64.67	17.94	QP
2	0.176	10.49	0.04	18.50	29.03	54.67	25.64	Average
3	0.273	10.38	0.05	29.00	39.43	61.03	21.60	QP
4	0.273	10.38	0.05	27.90	38.33	51.03	12.70	Average
5	0.454	10.33	0.05	25.80	36.18	56.80	20.62	QP
6	0.454	10.33	0.05	24.70	35.08	46.80	11.72	Average
7	2.749	10.31	0.10	20.21	30.62	56.00	25.38	QP
8	2.749	10.31	0.10	13.71	24.12	46.00	21.88	Average
9	5.288	10.32	0.13	22.50	32.95	60.00	27.05	QP
10	5.288	10.32	0.13	18.00	28.45	50.00	21.55	Average
11	21.540	10.30	0.28	31.50	42.08	60.00	17.92	QP
12	21.540	10.30	0.28	22.50	33.08	50.00	16.92	Average

Remark: 1.Emission Level= AMN Factor + Cable loss + Reading.

N line

Date: 2018-08-17

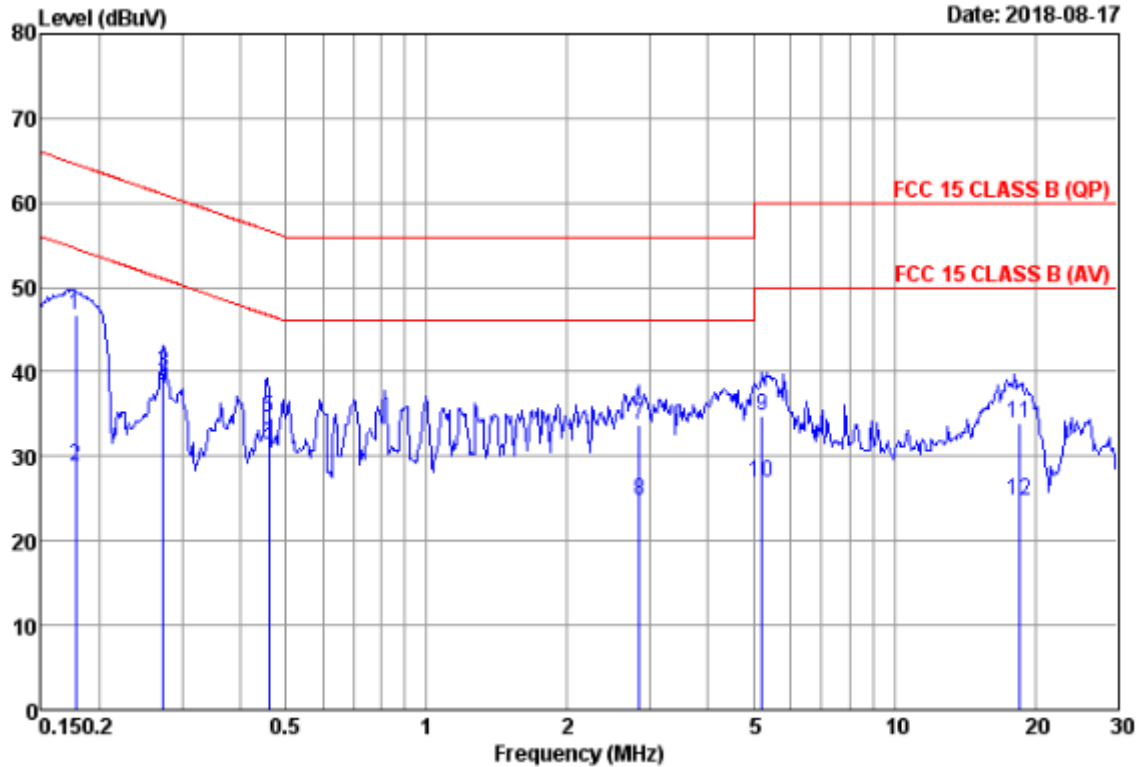

Test data

	Freq (MHz)	AMN. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.178	10.48	0.04	36.10	46.62	64.59	17.97	QP
2	0.178	10.48	0.04	18.30	28.82	54.59	25.77	Average
3	0.273	10.40	0.05	29.40	39.85	61.01	21.16	QP
4	0.273	10.40	0.05	27.60	38.05	51.01	12.96	Average
5	0.459	10.35	0.05	24.20	34.60	56.71	22.11	QP
6	0.459	10.35	0.05	20.90	31.30	46.71	15.41	Average
7	2.850	10.34	0.11	23.30	33.75	56.00	22.25	QP
8	2.850	10.34	0.11	14.30	24.75	46.00	21.25	Average
9	5.210	10.35	0.13	24.21	34.69	60.00	25.31	QP
10	5.210	10.35	0.13	16.51	26.99	50.00	23.01	Average
11	18.430	10.27	0.26	23.40	33.93	60.00	26.07	QP
12	18.430	10.27	0.26	14.30	24.83	50.00	25.17	Average

Remark: 1.Emission Level= AMN Factor + Cable loss + Reading.

**TEST REPORT**

## 9 Occupied Bandwidth

**Test result:**      **Tested**

### 9.1 Limit

None


### 9.2 Measurement Procedure

The occupied bandwidth per RSS-Gen Issue 4 Clause 6.6 was measured using the Spectrum Analyzer.

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) shall be approximately 3x RBW.

### 9.3 Test Configuration

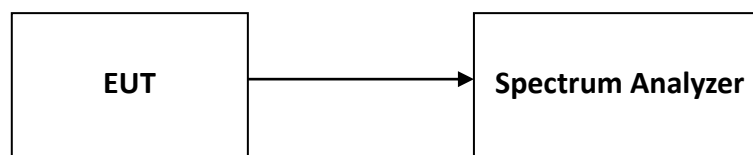

### 9.4 The results of Occupied Bandwidth

Please refer to Appendix A

## 10 Antenna requirement

**Requirement:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

**Result:**

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

**TEST REPORT**

**Appendix A: Test results**

11. Duty Cycle

11.1 Test Data

WLAN Duty Cycle				
Mode	Test Frequency (MHz)	Ant	Duty Cycle (%)	Duty Cycle Factor (dB)
802.11b	2412	Ant0	86.24	0.64
802.11b	2412	Ant1	98.13	0.00
802.11b	2437	Ant0	86.24	0.64
802.11b	2437	Ant1	98.25	0.00
802.11b	2462	Ant0	86.24	0.64
802.11b	2462	Ant1	98.14	0.00
802.11g	2412	Ant0	89.74	0.47
802.11g	2412	Ant1	89.68	0.47
802.11g	2437	Ant0	89.68	0.47
802.11g	2437	Ant1	89.74	0.47
802.11g	2462	Ant0	89.68	0.47
802.11g	2462	Ant1	89.74	0.47
802.11n (HT20)	2412	Ant0	50.51	2.97
802.11n (HT20)	2412	Ant1	89.12	0.50
802.11n (HT20)	2437	Ant0	50.26	2.99
802.11n (HT20)	2437	Ant1	89.12	0.50
802.11n (HT20)	2462	Ant0	50.51	2.97
802.11n (HT20)	2462	Ant1	88.44	0.53
802.11n (HT40)	2422	Ant0	80.04	0.97
802.11n (HT40)	2422	Ant1	79.01	1.02
802.11n (HT40)	2437	Ant0	80.04	0.97
802.11n (HT40)	2437	Ant1	80.25	0.96
802.11n (HT40)	2452	Ant0	80.04	0.97
802.11n (HT40)	2452	Ant1	80.25	0.96

## 11.2 Test Plots

