

TEST REPORT

Product : MOBILE PHONE
Trade mark : ROKiT
Model/Type reference : IO Pro
Serial Number : N/A
Report Number : EED32K00215403
FCC ID : 2AQNZ-IOPRO
Date of Issue : Aug. 29, 2018
Test Standards : 47 CFR Part 15 Subpart C
Test result : PASS

Prepared for:

ROKIT Corp Limited

**ROK House, Kingswood Business Park, Holyhead Road, Albrighton,
Wolverhampton, United Kingdom, WV73AU**

Prepared by:

**Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China**

TEL: +86-755-3368 3668

FAX: +86-755-3368 3385

Tested by:

Peter
Peter (Test Project)

Compiled by:

Tom-chen
Tom chen (Project Engineer)

Reviewed by:

Kevin Yang
Kevin yang (Reviewer)

Approved by:

Sheek Luo
Sheek Luo (Lab supervisor)

Date:

Aug. 29, 2018

Check No.:3096342807



2 Version

Version No.	Date	Description
00	Aug. 29, 2018	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested samples and the sample information are provided by the client.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	7
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	9
6.5 TEST LOCATION.....	9
6.6 DEVIATION FROM STANDARDS.....	9
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	9
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
7 EQUIPMENT LIST	10
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	13
Appendix A) 20dB Occupied Bandwidth.....	14
Appendix B) Carrier Frequency Separation.....	18
Appendix C) Dwell Time.....	22
Appendix D) Hopping Channel Number.....	26
Appendix E) Conducted Peak Output Power.....	28
Appendix F) Band-edge for RF Conducted Emissions.....	32
Appendix G) RF Conducted Spurious Emissions.....	37
Appendix H) Pseudorandom Frequency Hopping Sequence.....	44
Appendix I) Antenna Requirement.....	45
Appendix J) AC Power Line Conducted Emission.....	46
Appendix K) Restricted bands around fundamental frequency (Radiated).....	49
Appendix L) Radiated Spurious Emissions.....	57
PHOTOGRAPHS OF TEST SETUP	73
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	75

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

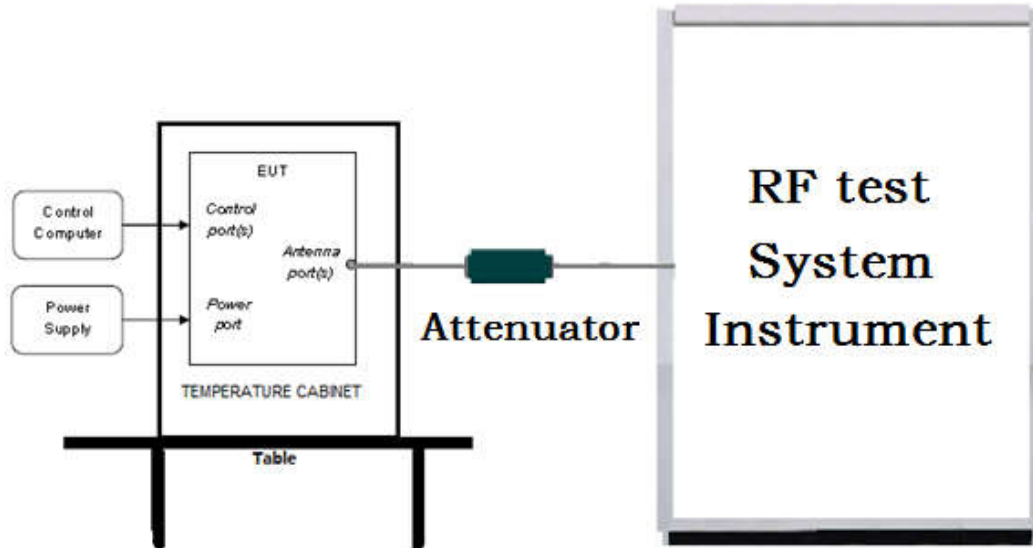

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

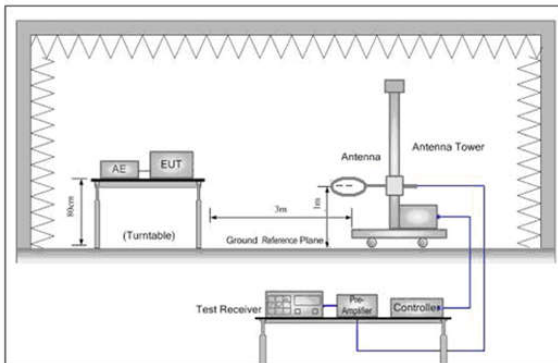


Figure 1. Below 30MHz

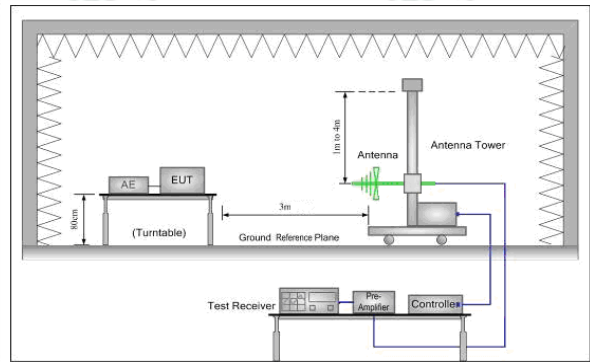


Figure 2. 30MHz to 1GHz


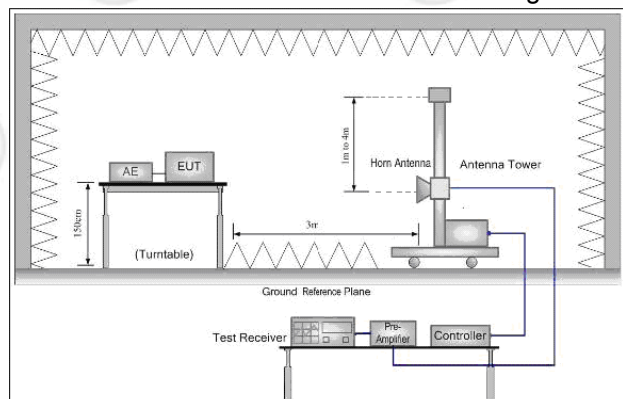


Figure 3. Above 1GHz

5.1.3 For Conducted Emissions test setup

Conducted Emissions setup

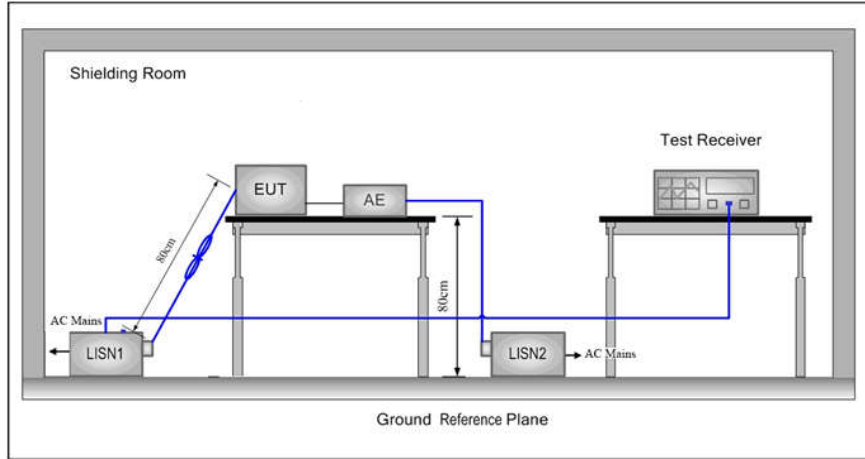

5.2 Test Environment

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test Mode	Tx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ π /4DQPSK/ 8DPSK(DH1,DH3, DH5)	2402MHz ~2480 MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

TX mode: The EUT transmitted the continuous signal at the specific channel(s).

Test mode:

Pre-scan under all rate at Lowest channel 1

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
Power(dBm)	4.210	4.354	4.826

Mode	π /4DQPSK		
packets	2-DH1	2-DH3	2-DH5
Power(dBm)	3.456	3.985	4.056

Mode	8DPSK		
packets	3-DH1	3-DH3	3-DH5
Power(dBm)	3.645	3.852	4.120

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of π /4DQPSK, 3-DH5 packet the power is the worst case of 8DPSK.

6 General Information

6.1 Client Information

Applicant:	ROKIT Corp Limited
Address of Applicant:	ROK House, Kingswood Business Park, Holyhead Road, Albrighton, Wolverhampton, United Kingdom, WV73AU
Manufacturer:	ROKIT Corp Limited
Address of Manufacturer:	ROK House, Kingswood Business Park, Holyhead Road, Albrighton, Wolverhampton, United Kingdom, WV73AU
Factory:	Shenzhen Newsun Technology Co., Ltd
Address of Factory:	5th Floor, A1 Building, Zhongtai Information Technology Industrial Park, No. 2 Dezheng Road, Shilong Community, Shiyan Street, Baoan District, Shenzhen, China

6.2 General Description of EUT

Product Name:	MOBILE PHONE
Model No.(EUT):	IO Pro
Trade mark:	ROKIT
EUT Supports Radios application:	<p>BT4.0, 2.1+EDR: 2402MHz to 2480MHz</p> <p>WiFi: IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz</p> <p>IEEE 802.11n(HT40): 2422MHz to 2452MHz</p> <p>GPS: 1559MHz to 1610MHz</p> <p>GSM/GPRS/EDGE 850: Tx:824.20 -848.80MHz; Rx: 869.20 – 893.80MHz</p> <p>GSM/GPRS/EDGE 1900: Tx:1850.20 – 1909.80MHz; Rx:1930.20 – 1989.80MHz</p> <p>CDMA BC0: Tx:824-849MHz; Rx:869-894MHz</p> <p>CDMA BC1: Tx:1850-1910MHz; Rx:1930-1990MHz</p> <p>CDMA BC10: TX:817.25-823.975MHz, RX:862.25-868.975MHz</p> <p>1xEVDO BC0: Tx:824-849MHz; Rx:869-894MHz</p> <p>1xEVDO BC0: Tx:1850-1910MHz; Rx:1930-1990MHz</p> <p>1xEVDO BC0: TX:817.25-823.975MHz, RX:862.25-868.975MHz</p> <p>WCDMA/HSDPA/HSUPA/HSPA+(Down Link) Band V: Tx:826.40 -846.60MHz; Rx: 871.40 – 891.60MHz</p> <p>WCDMA/HSDPA/HSUPA/HSPA+(Down Link) Band IV: Tx:1710-1755MHz; Rx: 2110-2155MHz</p> <p>WCDMA/HSDPA/HSUPA/HSPA+(Down Link) Band II: Tx:1852.40 – 1907.60MHz; Rx:1932.40 – 1987.60MHz</p> <p>LTE Band 2: TX:1850MHz to 1910MHz RX:1930MHz to 1990MHz.</p> <p>LTE Band 4: TX:1710MHz to 1755MHz RX:2110MHz to 2155MHz.</p>

	LTE Band 5: TX:824MHz to 849MHz RX:869MHz to 894MHz. LTE Band 12: TX:698MHz to 716MHz RX:729MHz to 746MHz. LTE Band 17: TX:704MHz to 716MHz RX:734MHz to 746MHz.
Power Supply:	DC 5V by USB port Li-ion Battery 3.85V, 3850mAh, 14.822Wh
Firmware version:	MOLY.LR12A.R2.MP.V36.9(manufacturer declare)
Hardware version:	V0(manufacturer declare)
USB cable:	100cm(shielded)
Sample Received Date:	Aug. 08, 2018
Sample tested Date:	Aug. 08, 2018 to Aug. 29, 2018

6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	2.1+EDR
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK, 8DPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Antenna Type:	MONOPOLE
Antenna Gain:	-3dBi
Test Voltage:	DC 3.85V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz

15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

6.4 Description of Support Units

The EUT has been tested with associated equipment below.

Associated equipment name		Manufacture	model	serial number	Supplied by	Certification
AE1	AC Adapter	Dongguan Aohai Power Technology Co.,Ltd.	MDY-09-EB	_____	CTI	FCC

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China

Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY5340110 6	03-13-2018	03-12-2019
Spectrum Analyzer	Keysight	N9010A	MY5451033 9	03-13-2018	03-12-2019
Attenuator	HuaXiang	SHX370	15040701	03-13-2018	03-12-2019
Signal Generator	Keysight	N5181A	MY4624009 4	03-13-2018	03-12-2019
Signal Generator	Keysight	N5182B	MY5305154 9	03-13-2018	03-12-2019
Temperature/ Humidity Indicator	TAYLOR	1451	---	05-02-2018	05-01-2019
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398- 002	---	01-10-2018	01-09-2019
High-pass filter	MICRO- TRONICS	SPA-F-63029-4	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-10-2018	01-09-2019
Communication test set	R&S	CMW500	107929	06-27-2018	06-26-2019
DC Power	Keysight	E3642A	MY5442603 5	03-13-2018	03-12-2019
PC-1	Lenovo	R4960d	---	03-29-2018	03-28-2019
BT&WI-FI Automatic control	R&S	OSP120	101374	04-11-2018	04-10-2019
RF control unit	JS Tonscend	JS0806-2	15860006	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-1	15860004	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-4	158060007	03-13-2018	03-12-2019
BT&WI-FI Automatic test software	JS Tonscend	JSTS1120-2	---	03-13-2018	03-12-2019
high-low temperature test chamber	DongGuangQinZ huo	LK-80GA	QZ2015061 1879	03-16-2018	03-15-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-04-2016	06-03-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-401	04-26-2018	04-25-2019
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	07-30-2018	07-29-2019
Microwave Preamplifier	Agilent	8449B	3008A02425	08-21-2018	08-20-2019
Microwave Preamplifier	Tonscend	EMC051845SE	980380	01-19-2018	01-18-2019
Horn Antenna	Schwarzbeck	BBHA 9120D	9120D-1869	04-25-2018	04-23-2021
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	6042	06-05-2018	06-04-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041	06-05-2018	06-04-2021
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2019
Spectrum Analyzer	R&S	FSP40	100416	05-11-2018	05-10-2019
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Multi device Controller	maturio	NCD/070/10711112	---	01-10-2018	01-09-2019
LISN	schwarzbeck	NNBM8125	81251547	05-11-2018	05-10-2019
LISN	schwarzbeck	NNBM8125	81251548	05-11-2018	05-10-2019
Signal Generator	Agilent	E4438C	MY45095744	03-13-2018	03-12-2019
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-02-2018	05-01-2019
Communication test set	Agilent	E5515C	GB47050534	03-16-2018	03-15-2019
Cable line	Fulai(7M)	SF106	5219/6A	01-10-2018	01-09-2019
Cable line	Fulai(6M)	SF106	5220/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5216/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5217/6A	01-10-2018	01-09-2019
Communication test set	R&S	CMW500	104466	02-05-2018	02-04-2019
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-10-2018	01-09-2019
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-10-2018	01-09-2019

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Temperature/ Humidity Indicator	Defu	TH128	/	07-02-2018	07-01-2019
Communication test set	Agilent	E5515C	GB47050534	03-16-2018	03-15-2019
Communication test set	R&S	CMW500	152394	03-16-2018	03-15-2019
LISN	R&S	ENV216	100098	05-10-2018	05-10-2019
LISN	schwarzbeck	NNLK8121	8121-529	05-10-2018	05-10-2019
Voltage Probe	R&S	ESH2-Z3 0299.7810.56	100042	06-13-2017	06-11-2020
Current Probe	R&S	EZ-17 816.2063.03	100106	05-30-2018	05-29-2019
ISN	TESEQ	ISN T800	30297	02-06-2018	02-05-2019

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

Appendix A) 20dB Occupied Bandwidth


Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict	Remark
GFSK	LCH	1.026	0.89475	PASS	Peak detector
GFSK	MCH	1.024	0.89405	PASS	
GFSK	HCH	1.038	0.90065	PASS	
$\pi/4$ DQPSK	LCH	1.289	1.1719	PASS	
$\pi/4$ DQPSK	MCH	1.289	1.1785	PASS	
$\pi/4$ DQPSK	HCH	1.285	1.1682	PASS	
8DPSK	LCH	1.288	1.1804	PASS	
8DPSK	MCH	1.292	1.1893	PASS	
8DPSK	HCH	1.290	1.1788	PASS	

Test Graph



<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

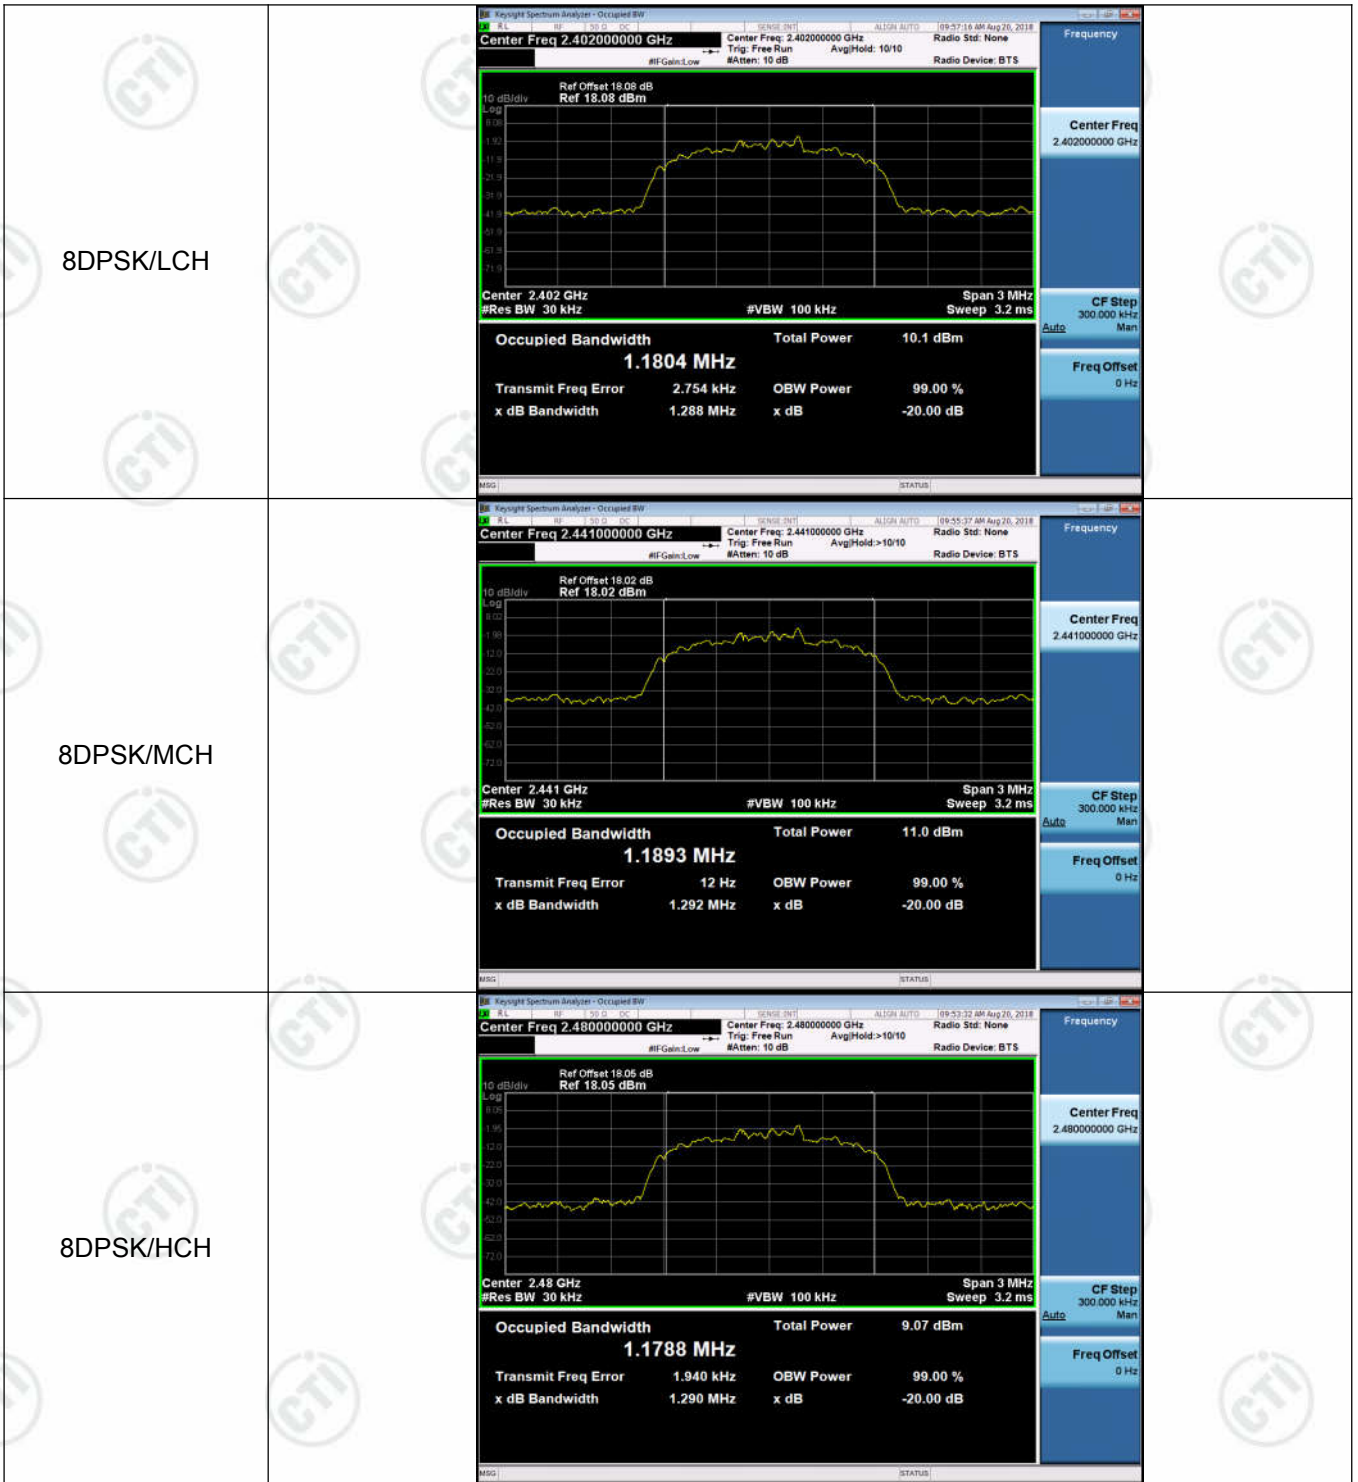


Appendix B) Carrier Frequency Separation




Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.004	PASS
GFSK	MCH	1.012	PASS
GFSK	HCH	1.072	PASS
$\pi/4$ DQPSK	LCH	1.092	PASS
$\pi/4$ DQPSK	MCH	1.008	PASS
$\pi/4$ DQPSK	HCH	0.982	PASS
8DPSK	LCH	1.082	PASS
8DPSK	MCH	1.200	PASS
8DPSK	HCH	1.016	PASS

Test Graph

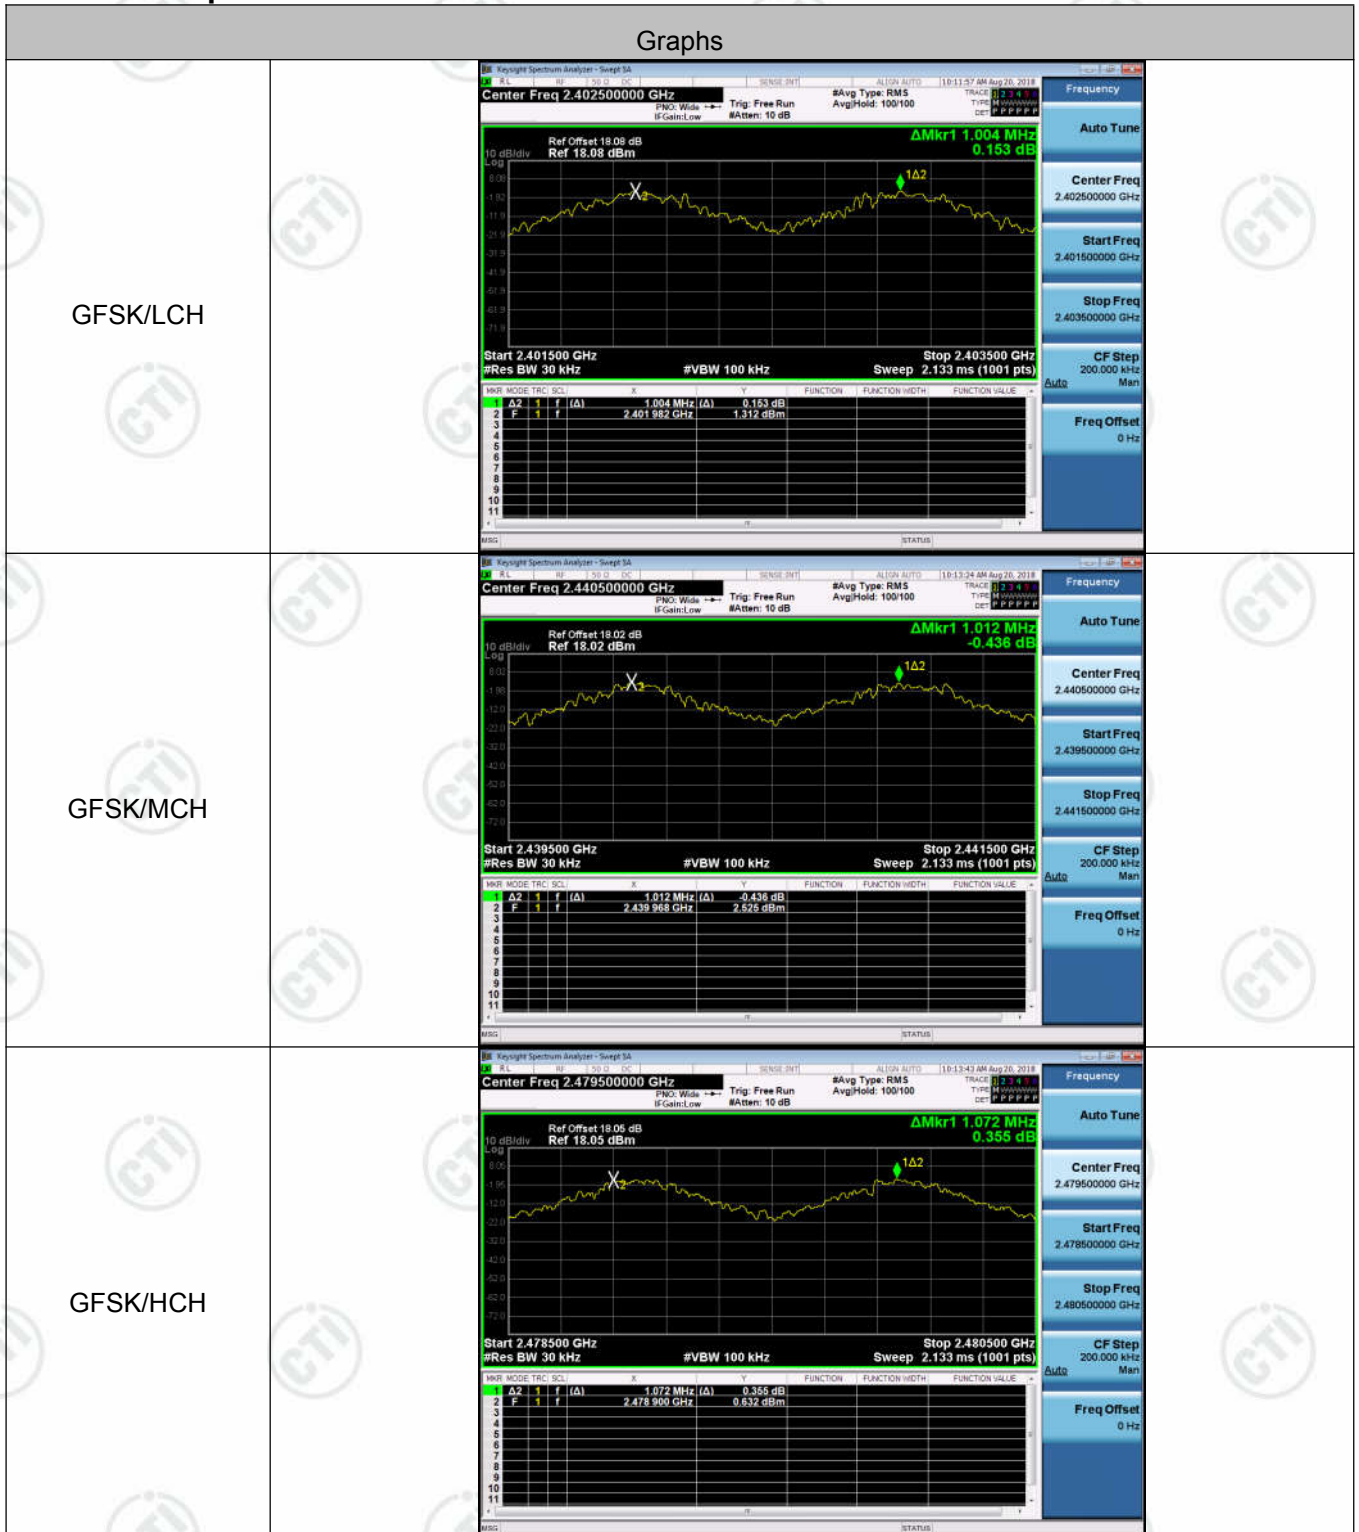

<p>$\pi/4$DQPSK/LCH</p>	<p>Center Freq 2.402500000 GHz</p> <p>Ref Offset 18.08 dB Ref 18.08 dBm</p> <p>ΔMkr1 1.092 MHz 3.548 dB</p> <p>Start 2.401500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.092 MHz</td> <td>(A)</td> <td></td> <td>3.548 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 062 GHz</td> <td></td> <td></td> <td>-5.250 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	A2	1	f	(A)	1.092 MHz	(A)		3.548 dB	2	F	1	f		2.402 062 GHz			-5.250 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.092 MHz	(A)		3.548 dB																				
2	F	1	f		2.402 062 GHz			-5.250 dBm																				
<p>$\pi/4$DQPSK/MCH</p>	<p>Center Freq 2.440500000 GHz</p> <p>Ref Offset 18.02 dB Ref 18.02 dBm</p> <p>ΔMkr1 1.008 MHz 0.721 dB</p> <p>Start 2.439500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>1.008 MHz</td> <td>(A)</td> <td></td> <td>0.721 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.440 004 GHz</td> <td></td> <td></td> <td>-5.539 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	A2	1	f	(A)	1.008 MHz	(A)		0.721 dB	2	F	1	f		2.440 004 GHz			-5.539 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	A2	1	f	(A)	1.008 MHz	(A)		0.721 dB																				
2	F	1	f		2.440 004 GHz			-5.539 dBm																				
<p>$\pi/4$DQPSK/HCH</p>	<p>Center Freq 2.479500000 GHz</p> <p>Ref Offset 18.05 dB Ref 18.05 dBm</p> <p>ΔMkr1 982 kHz -1.432 dB</p> <p>Start 2.478500 GHz #Res BW 30 kHz #VBW 100 kHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>A2</td> <td>1</td> <td>f</td> <td>(A)</td> <td>982 kHz</td> <td>(A)</td> <td></td> <td>-1.432 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.479 919 GHz</td> <td></td> <td></td> <td>-1.430 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	A2	1	f	(A)	982 kHz	(A)		-1.432 dB	2	F	1	f		2.479 919 GHz			-1.430 dBm
MKR	MODE	TRC	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	A2	1	f	(A)	982 kHz	(A)		-1.432 dB																				
2	F	1	f		2.479 919 GHz			-1.430 dBm																				

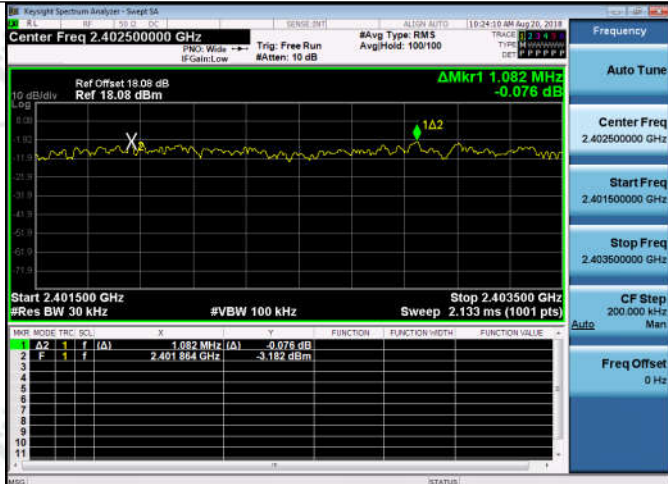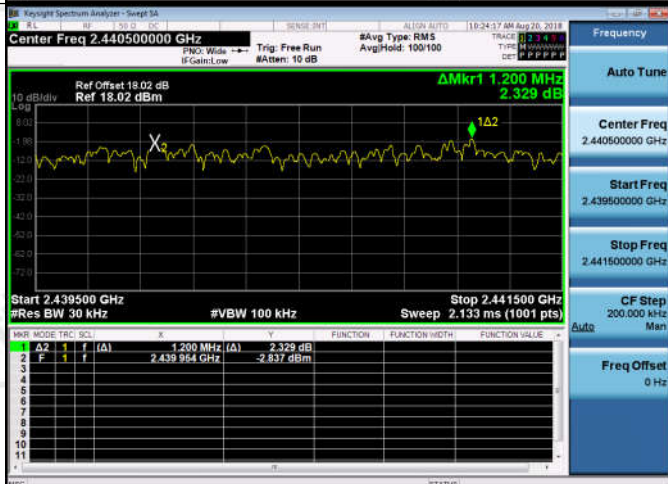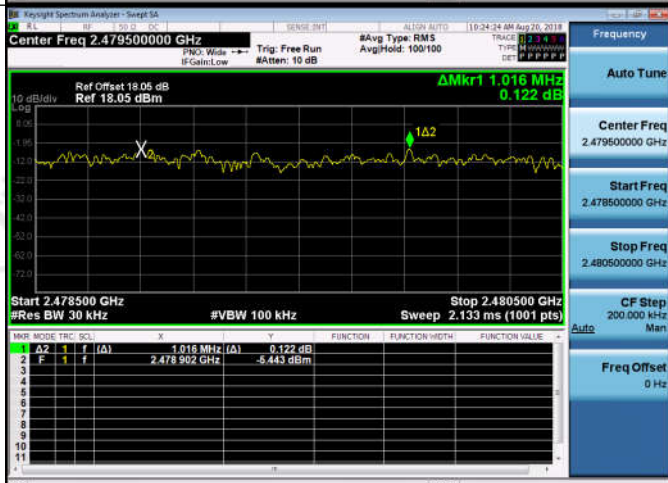
<p>8DPSK/LCH</p>	 <table border="1" data-bbox="638 616 1197 772"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.082 MHz</td> <td>(Δ)</td> <td></td> <td>-0.076 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.401864 GHz</td> <td></td> <td></td> <td>-3.182 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	ΔZ	1	f	(Δ)	1.082 MHz	(Δ)		-0.076 dB	2	F	1	f		2.401864 GHz			-3.182 dBm
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	ΔZ	1	f	(Δ)	1.082 MHz	(Δ)		-0.076 dB																				
2	F	1	f		2.401864 GHz			-3.182 dBm																				
<p>8DPSK/MCH</p>	 <table border="1" data-bbox="638 1108 1197 1263"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.200 MHz</td> <td>(Δ)</td> <td></td> <td>2.329 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.439964 GHz</td> <td></td> <td></td> <td>-2.837 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	ΔZ	1	f	(Δ)	1.200 MHz	(Δ)		2.329 dB	2	F	1	f		2.439964 GHz			-2.837 dBm
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	ΔZ	1	f	(Δ)	1.200 MHz	(Δ)		2.329 dB																				
2	F	1	f		2.439964 GHz			-2.837 dBm																				
<p>8DPSK/HCH</p>	 <table border="1" data-bbox="638 1601 1197 1753"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>ΔZ</td> <td>1</td> <td>f</td> <td>(Δ)</td> <td>1.016 MHz</td> <td>(Δ)</td> <td></td> <td>0.122 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478902 GHz</td> <td></td> <td></td> <td>-5.443 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	ΔZ	1	f	(Δ)	1.016 MHz	(Δ)		0.122 dB	2	F	1	f		2.478902 GHz			-5.443 dBm
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	ΔZ	1	f	(Δ)	1.016 MHz	(Δ)		0.122 dB																				
2	F	1	f		2.478902 GHz			-5.443 dBm																				

Appendix C) Dwell Time


Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.3762	320	0.12	0.30	PASS
GFSK	DH1	MCH	0.3762	320	0.12	0.30	PASS
GFSK	DH1	HCH	0.3762	320	0.12	0.30	PASS
GFSK	DH3	LCH	1.631463	160	0.261	0.65	PASS
GFSK	DH3	MCH	1.63273	160	0.261	0.65	PASS
GFSK	DH3	HCH	1.63273	160	0.261	0.65	PASS
GFSK	DH5	LCH	2.8612	106.7	0.305	0.76	PASS
GFSK	DH5	MCH	2.8704	106.7	0.306	0.76	PASS
GFSK	DH5	HCH	2.8612	106.7	0.305	0.76	PASS

Test Graph

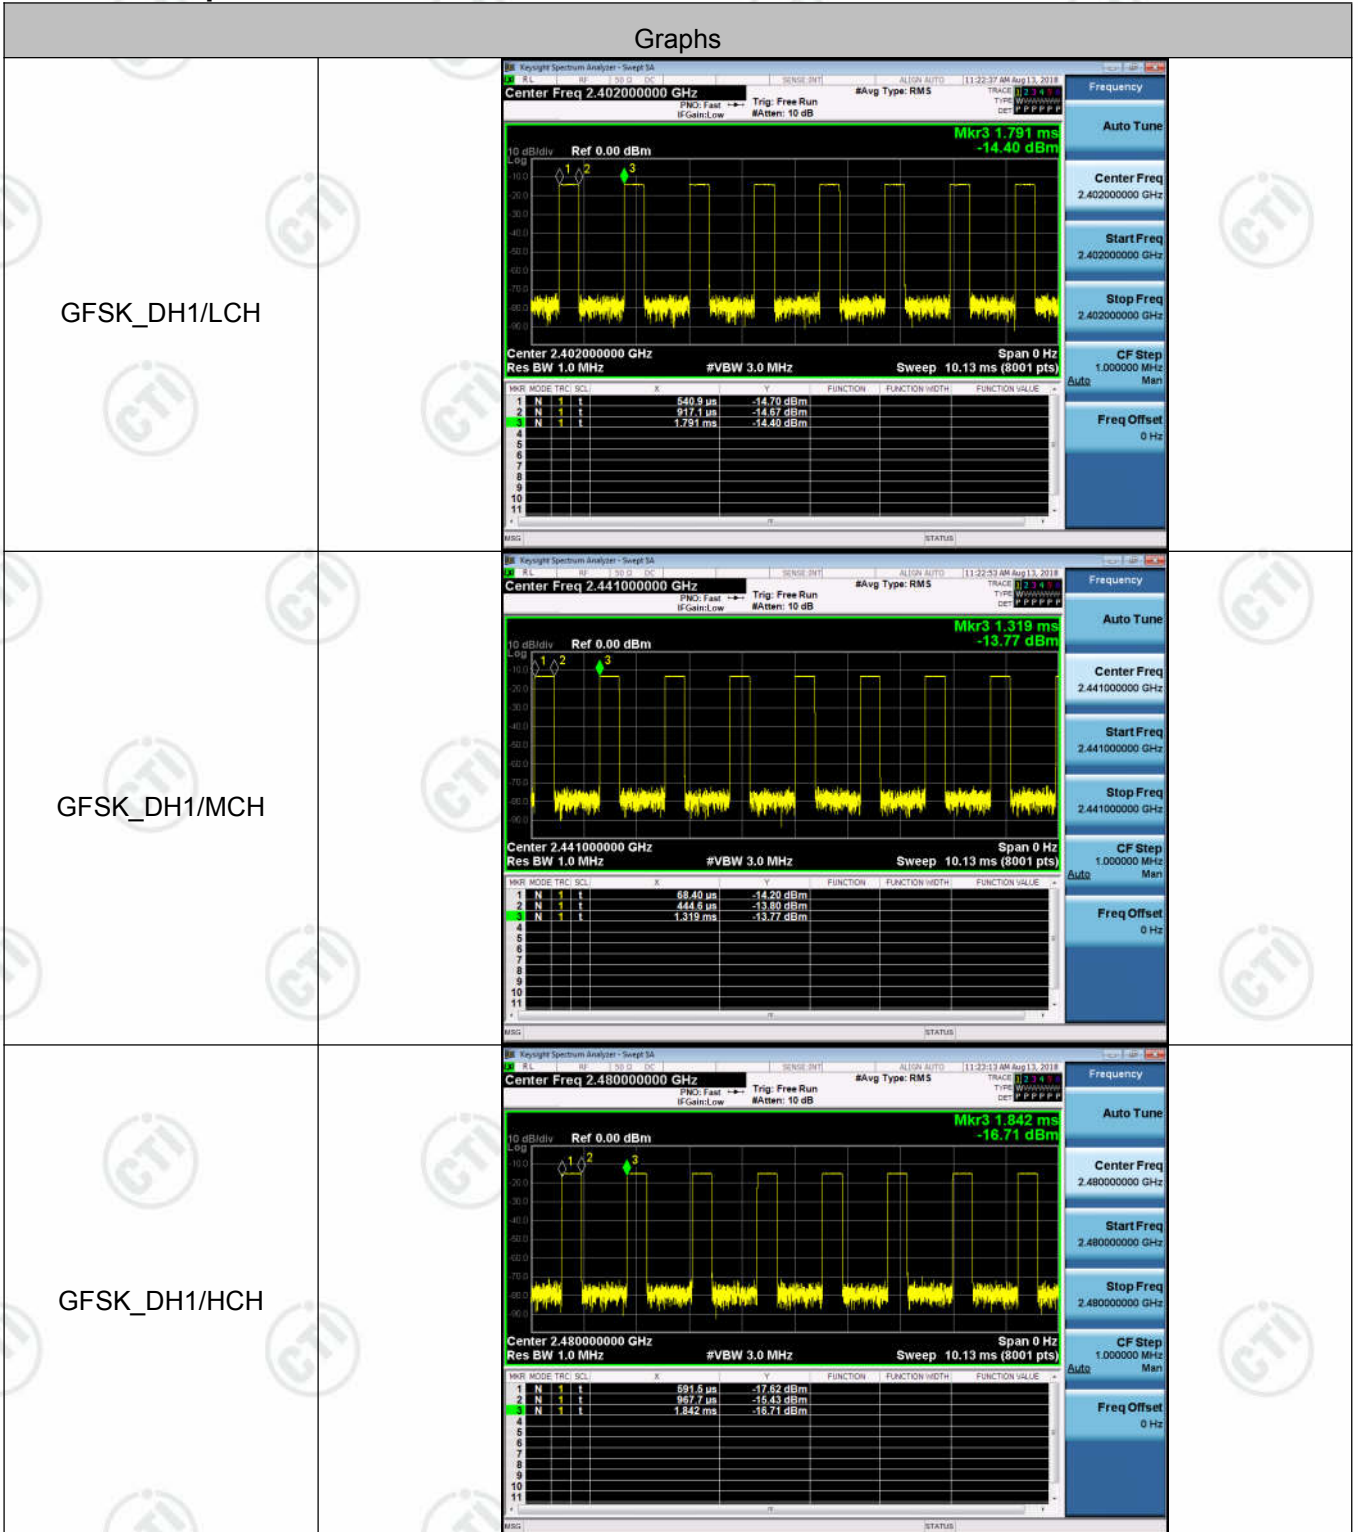




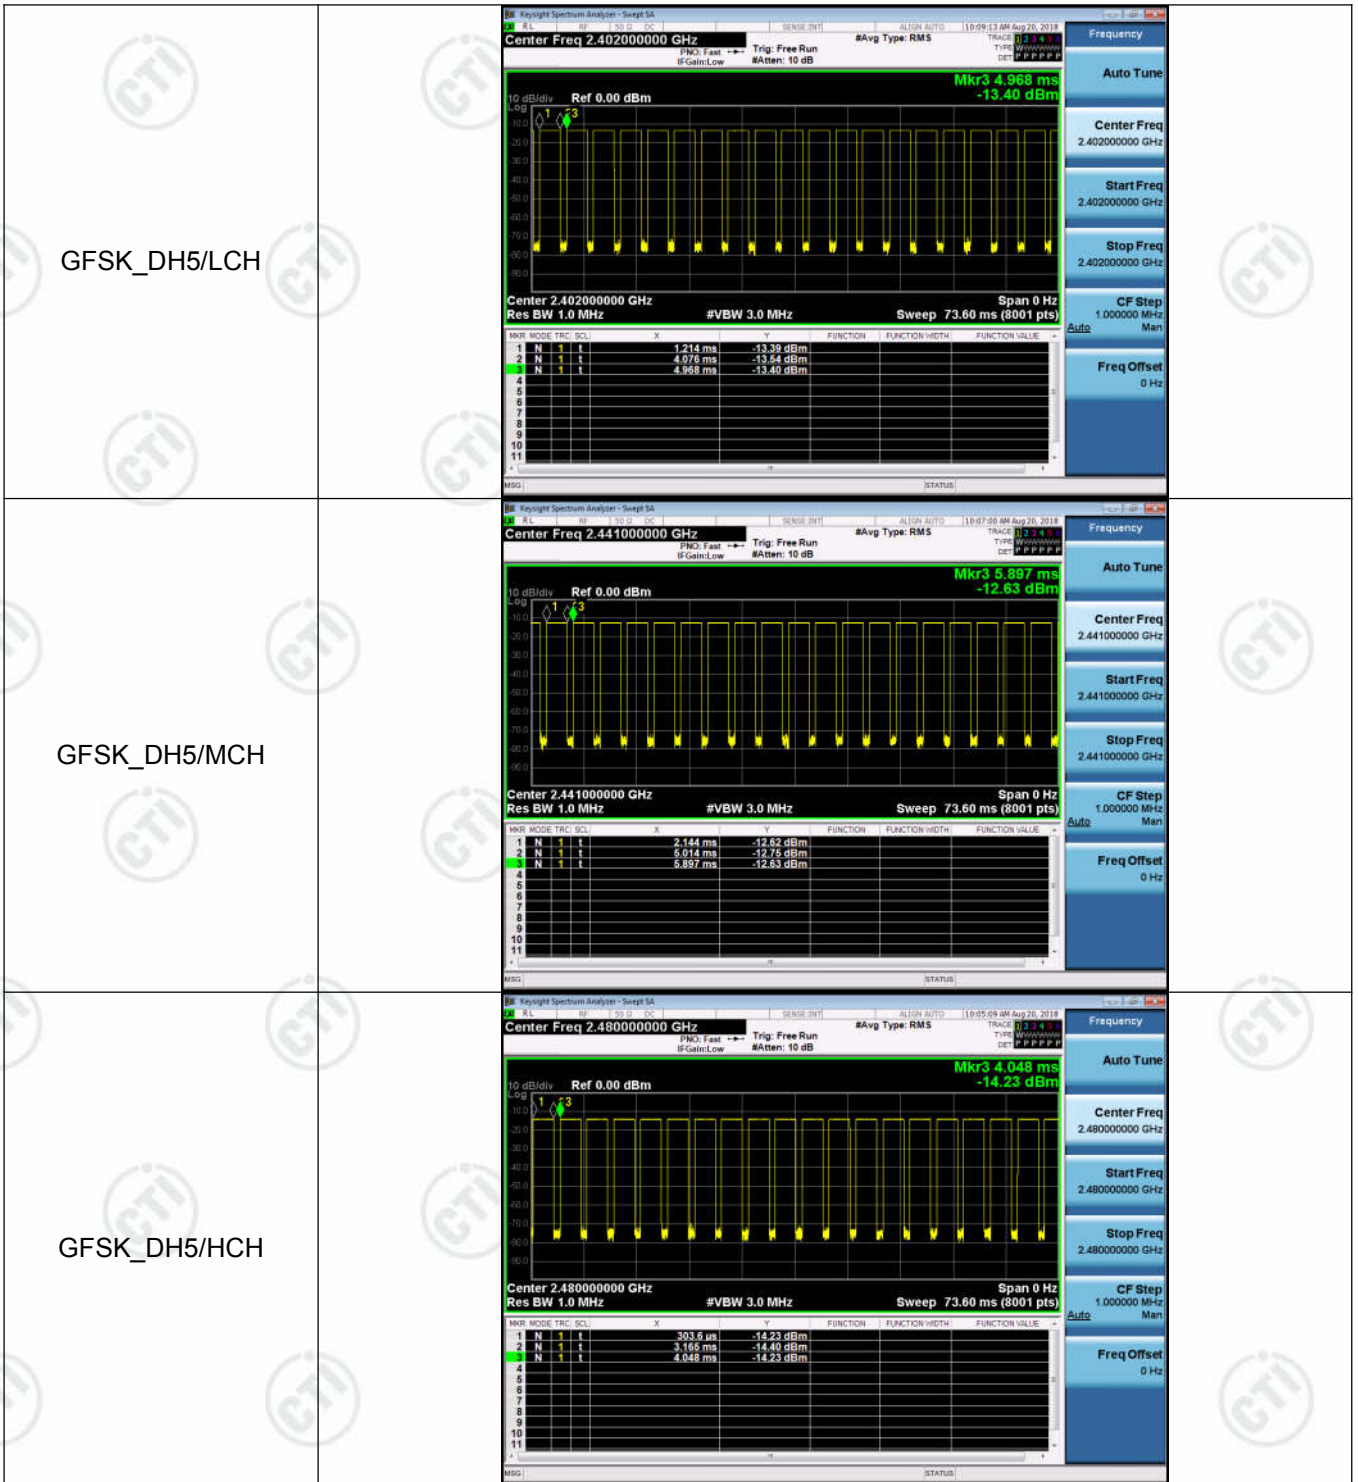

Appendix D) Hopping Channel Number Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS
8DPSK	Hop	79	PASS

Test Graph

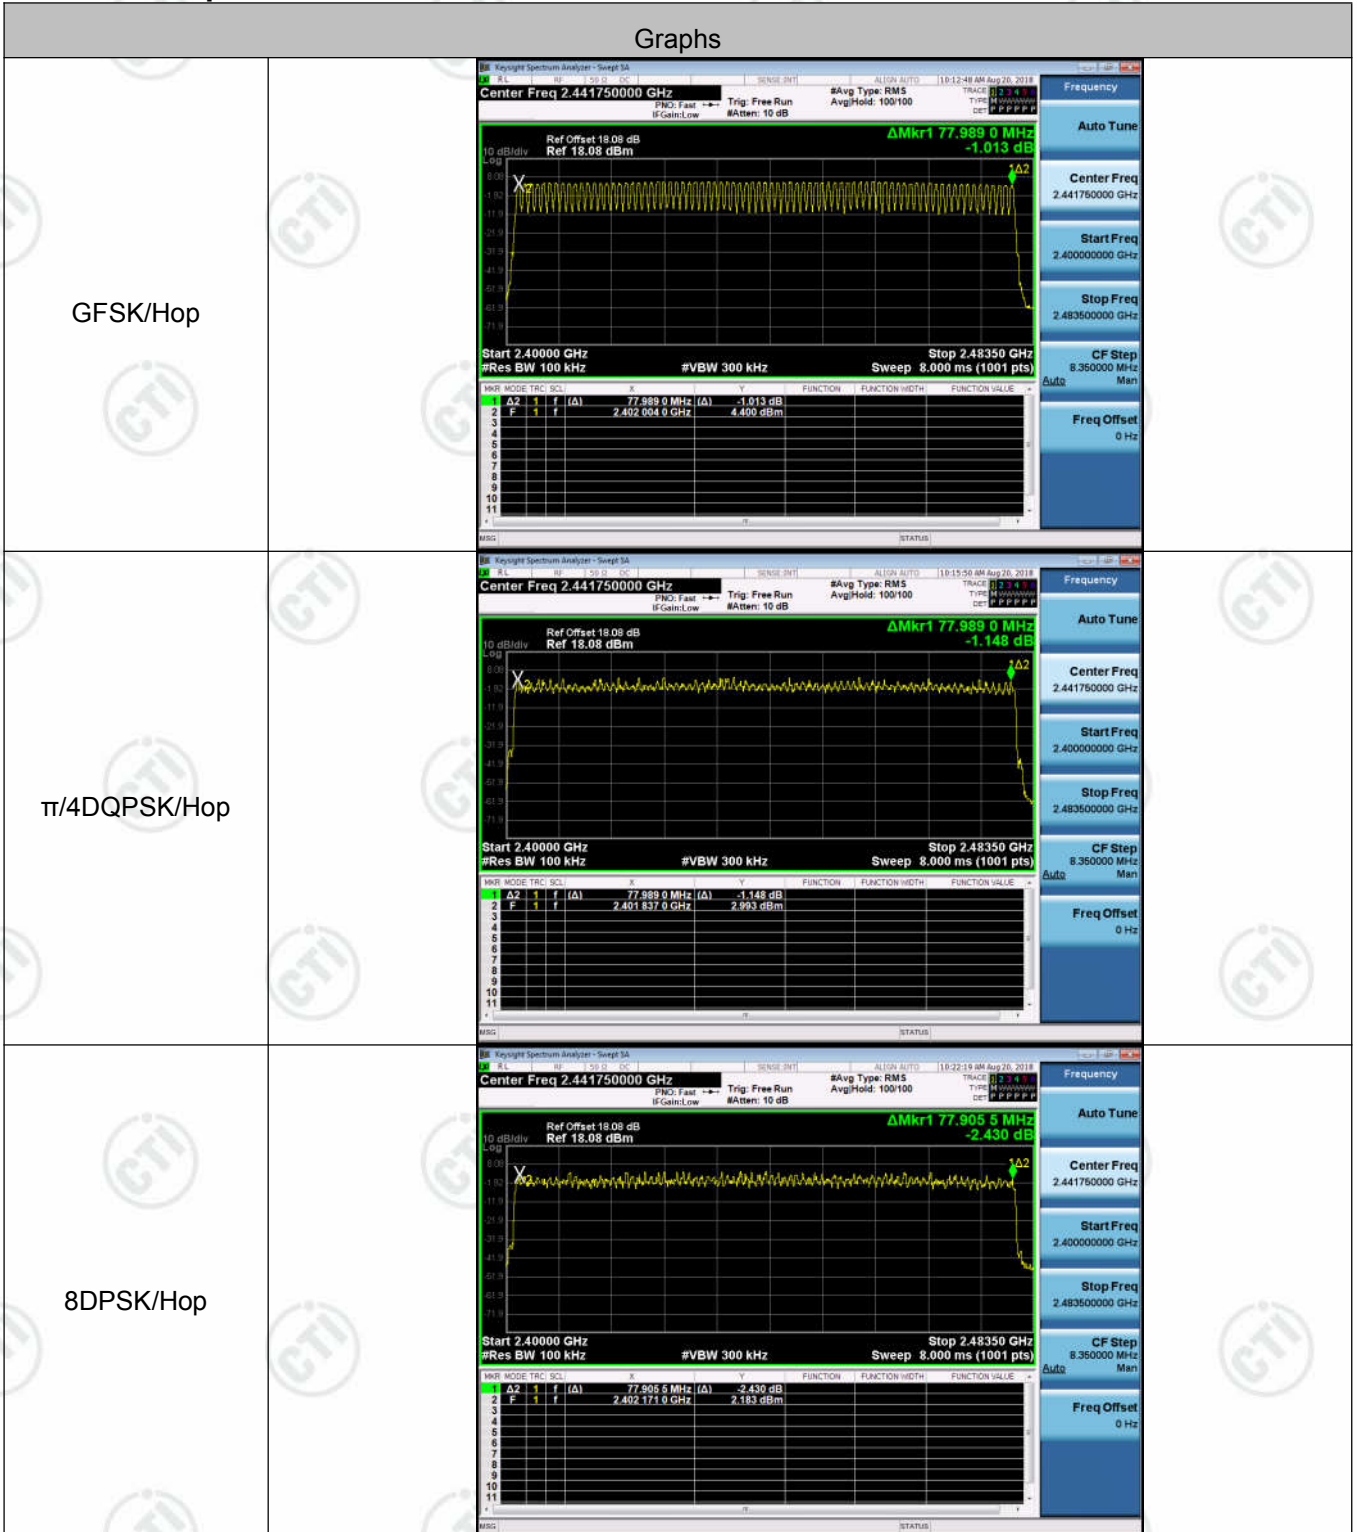


Appendix E) Conducted Peak Output Power




Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	4.826	PASS
GFSK	MCH	5.536	PASS
GFSK	HCH	3.960	PASS
$\pi/4$ DQPSK	LCH	4.056	PASS
$\pi/4$ DQPSK	MCH	4.836	PASS
$\pi/4$ DQPSK	HCH	3.066	PASS
8DPSK	LCH	4.120	PASS
8DPSK	MCH	4.930	PASS
8DPSK	HCH	3.181	PASS

Test Graph

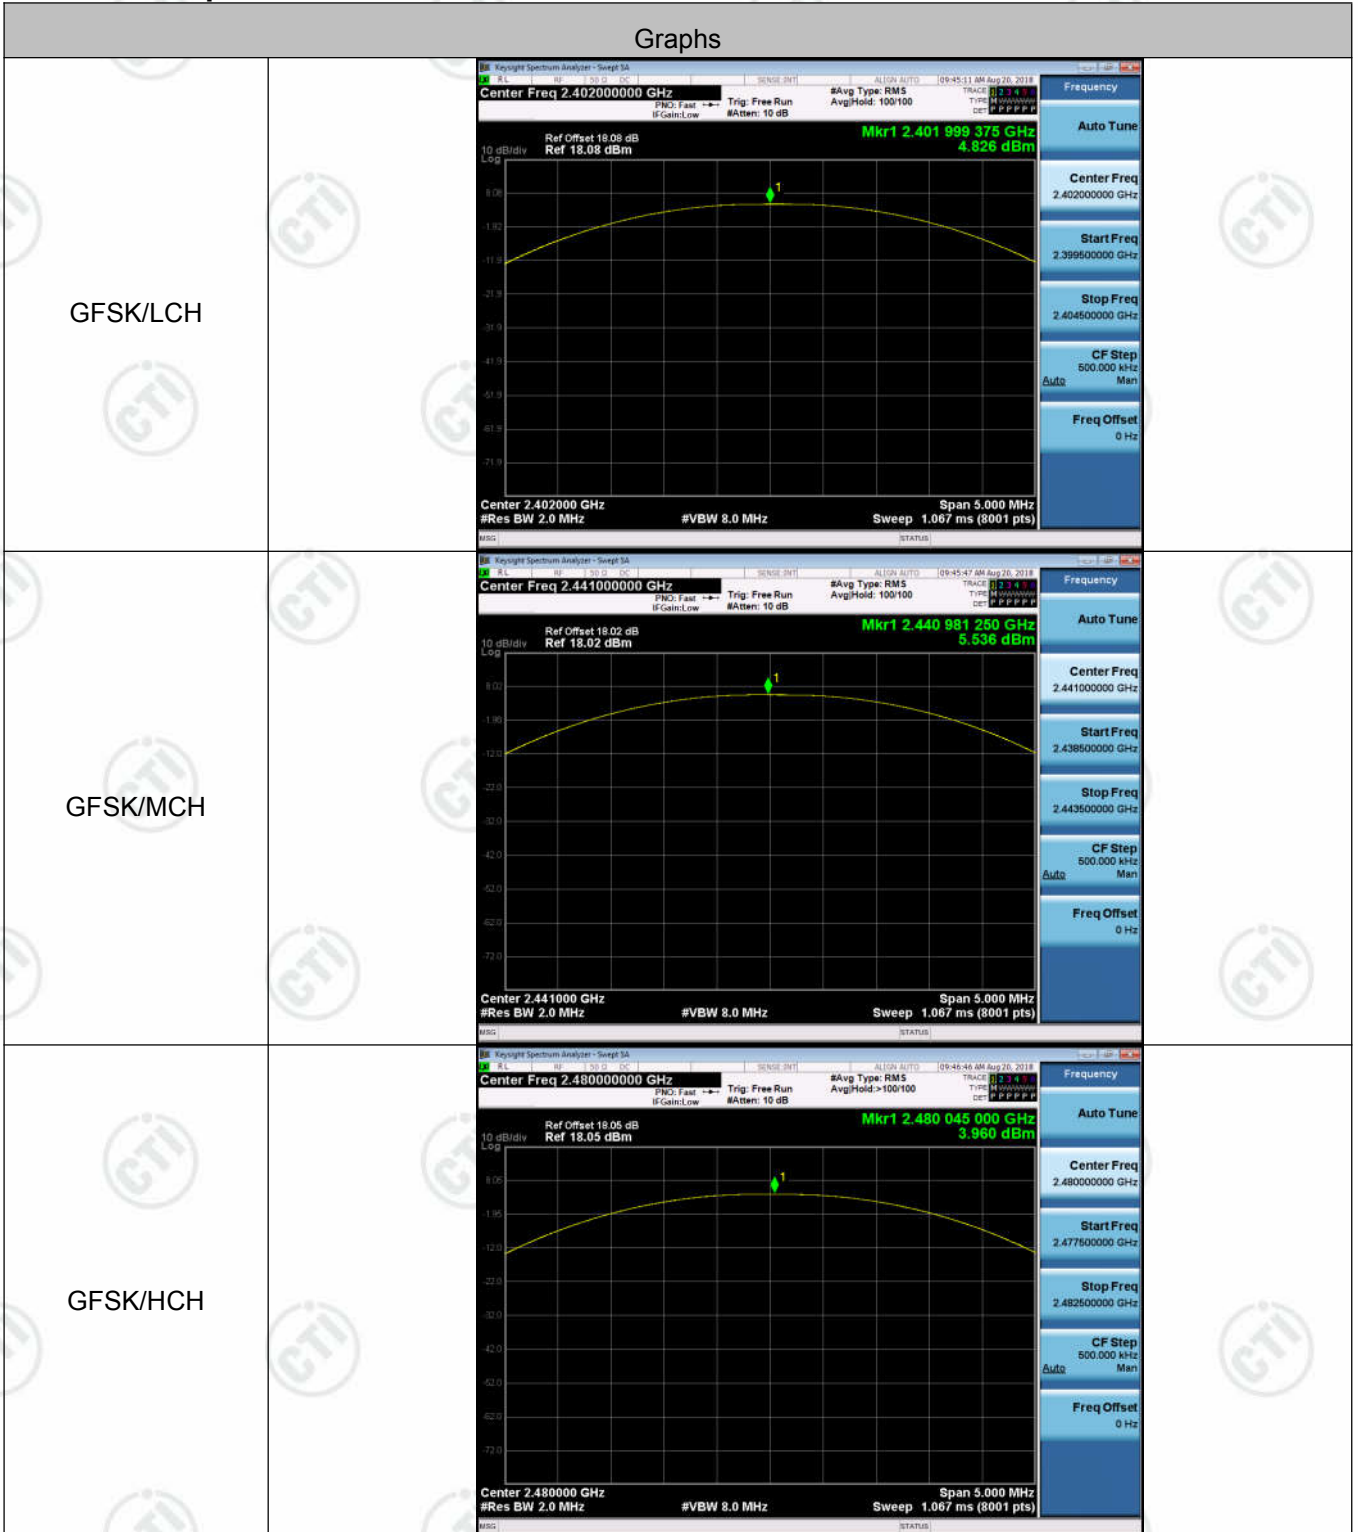

<p>$\pi/4$DQPSK/LCH</p>	
<p>$\pi/4$DQPSK/MCH</p>	
<p>$\pi/4$DQPSK/HCH</p>	

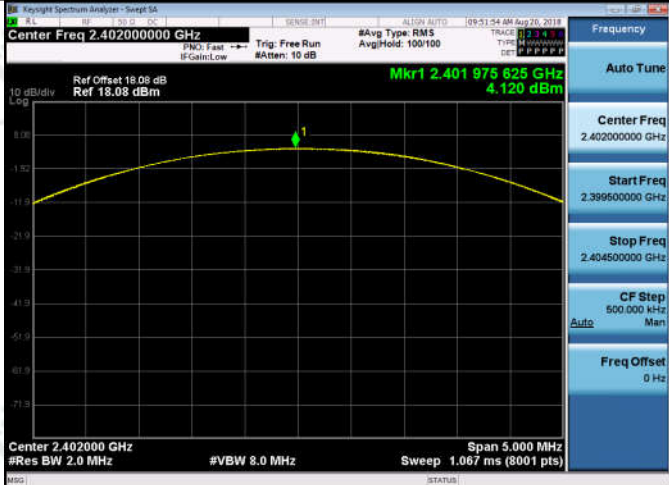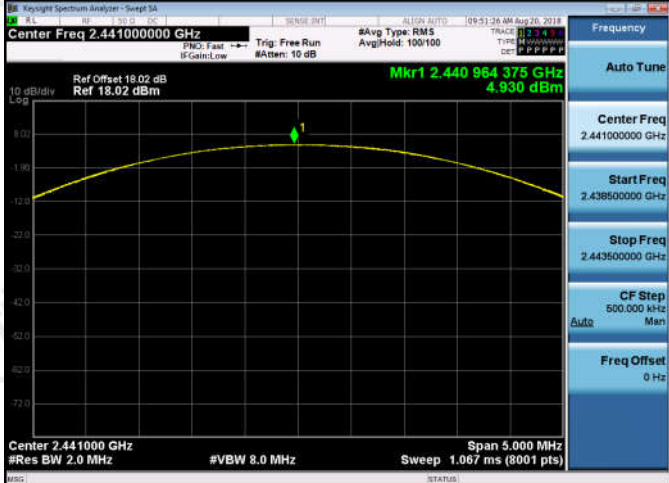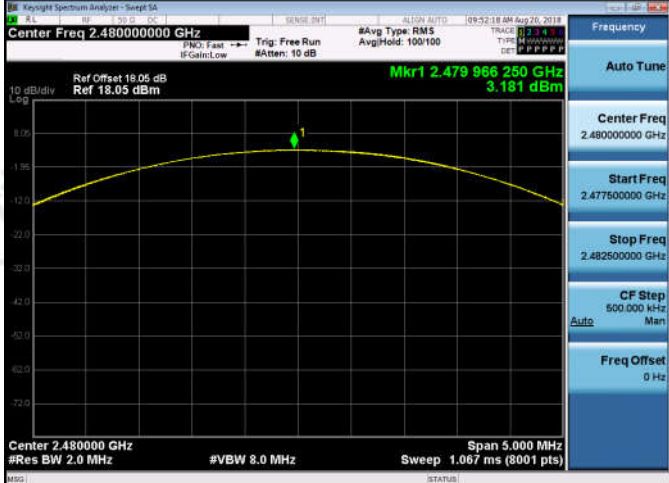
<p>8DPSK/LCH</p>	
<p>8DPSK/MCH</p>	
<p>8DPSK/HCH</p>	


Appendix F) Band-edge for RF Conducted Emissions


Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	4.353	Off	-62.618	-15.65	PASS
			4.726	On	-62.031	-15.27	PASS
GFSK	HCH	2480	3.574	Off	-61.042	-16.43	PASS
			4.317	On	-60.973	-15.68	PASS
$\pi/4$ DQPSK	LCH	2402	3.097	Off	-62.402	-16.9	PASS
			3.469	On	-60.997	-16.53	PASS
$\pi/4$ DQPSK	HCH	2480	2.053	Off	-59.626	-17.95	PASS
			2.753	On	-60.205	-17.25	PASS
8DPSK	LCH	2402	3.208	Off	-61.403	-16.79	PASS
			3.410	On	-53.591	-16.59	PASS
8DPSK	HCH	2480	2.035	Off	-43.059	-17.97	PASS
			2.242	On	-43.364	-17.76	PASS

Test Graph

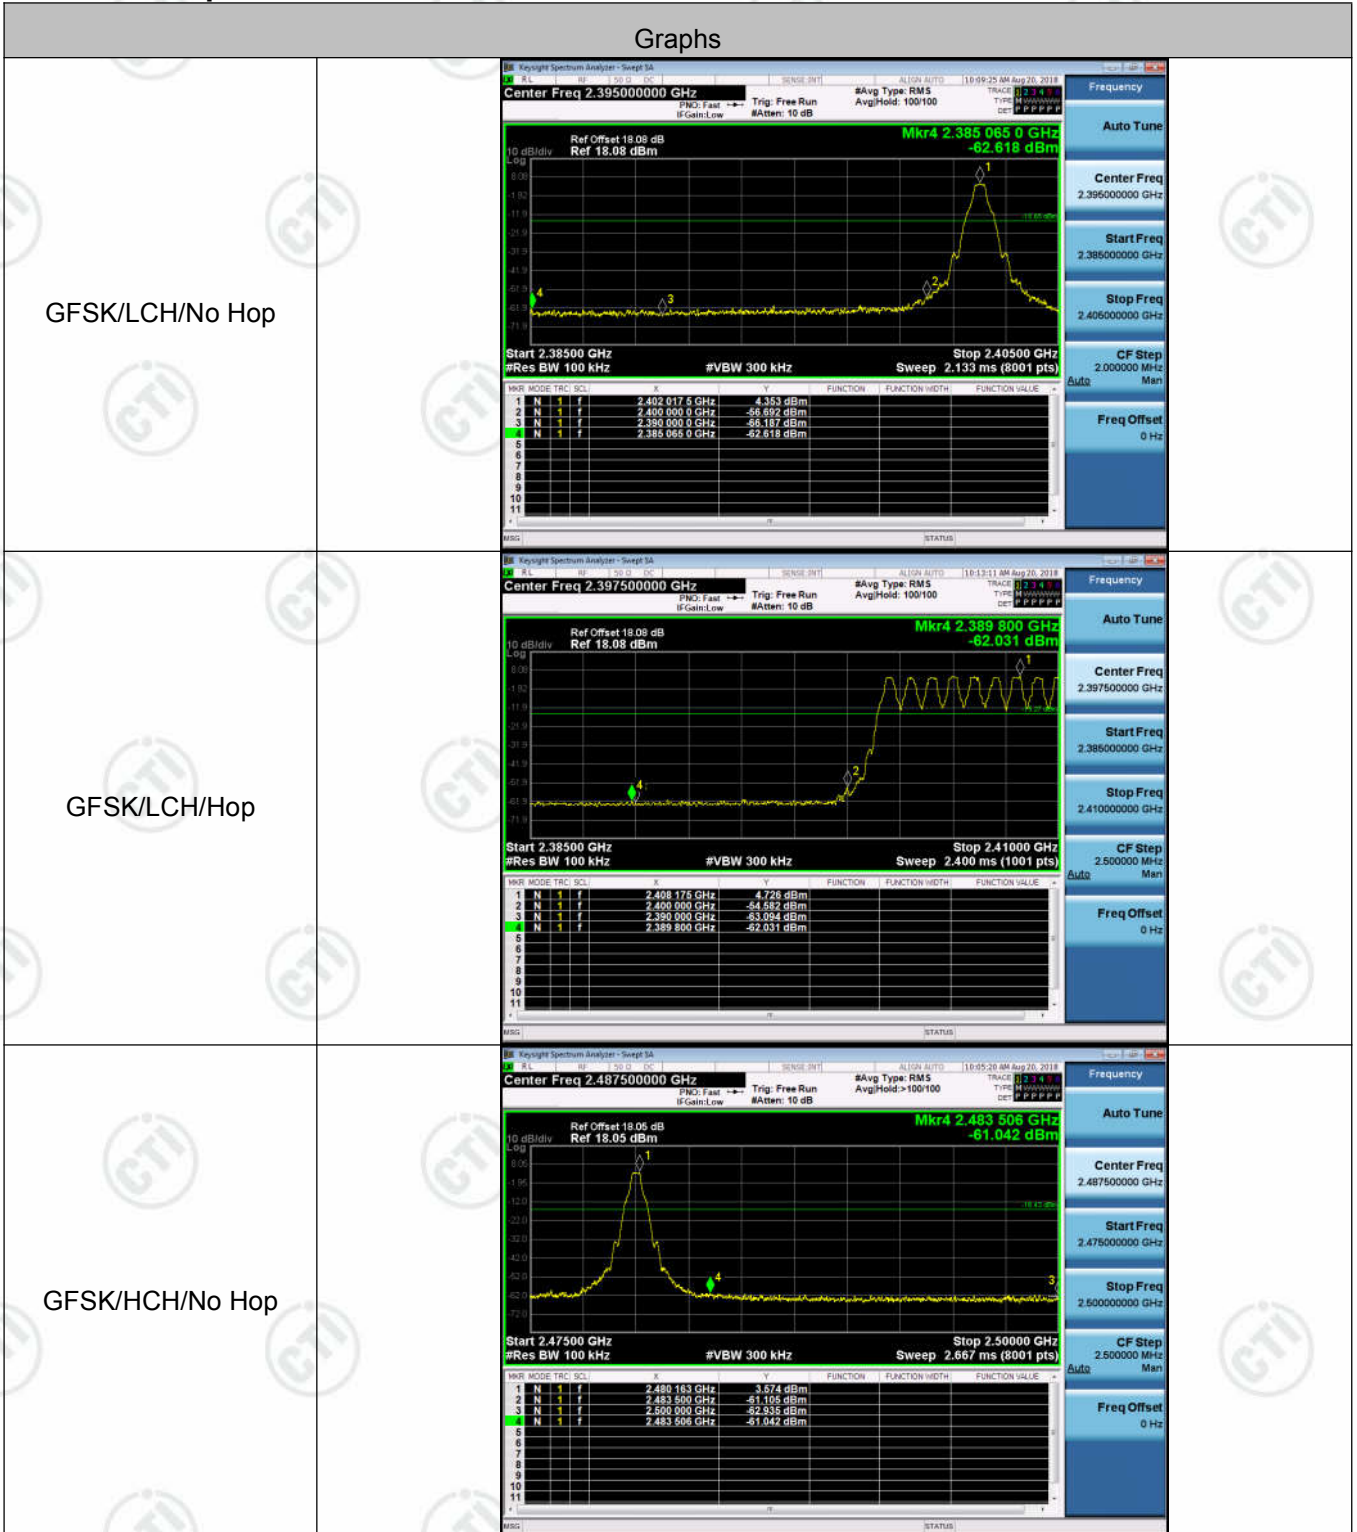

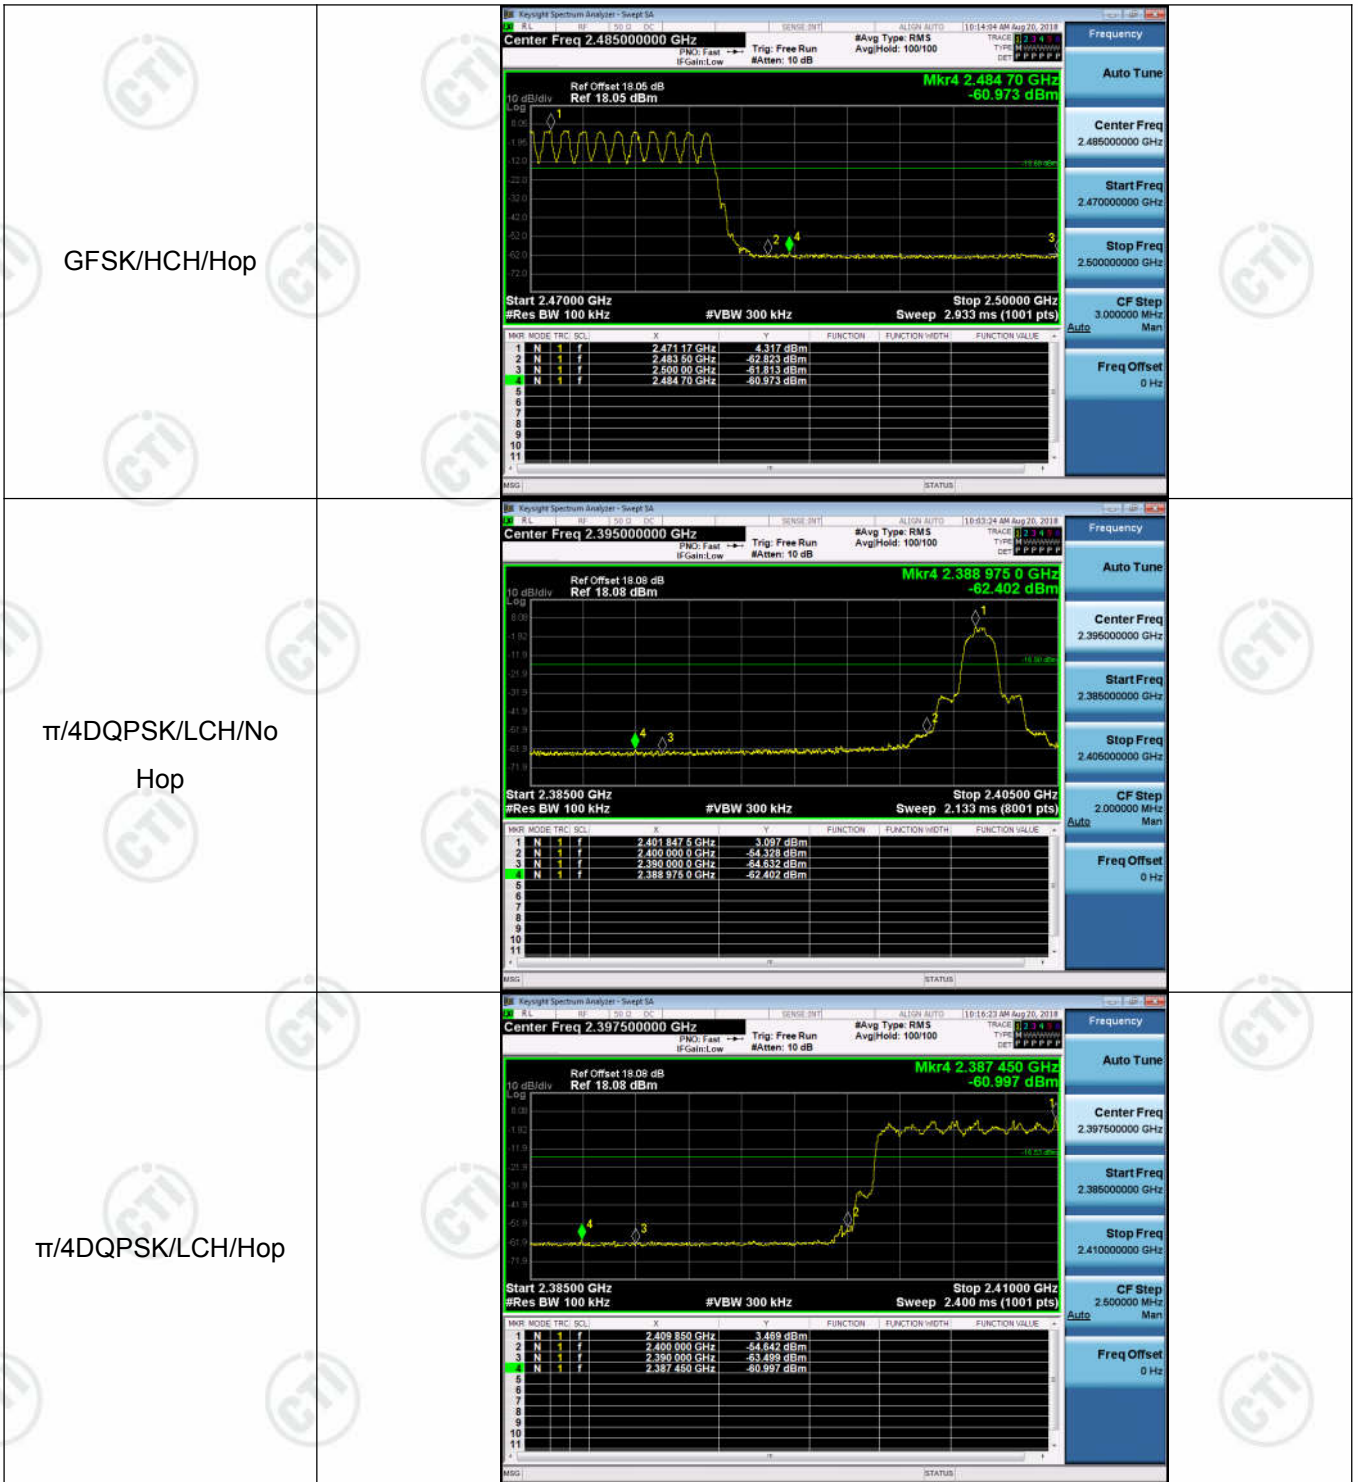

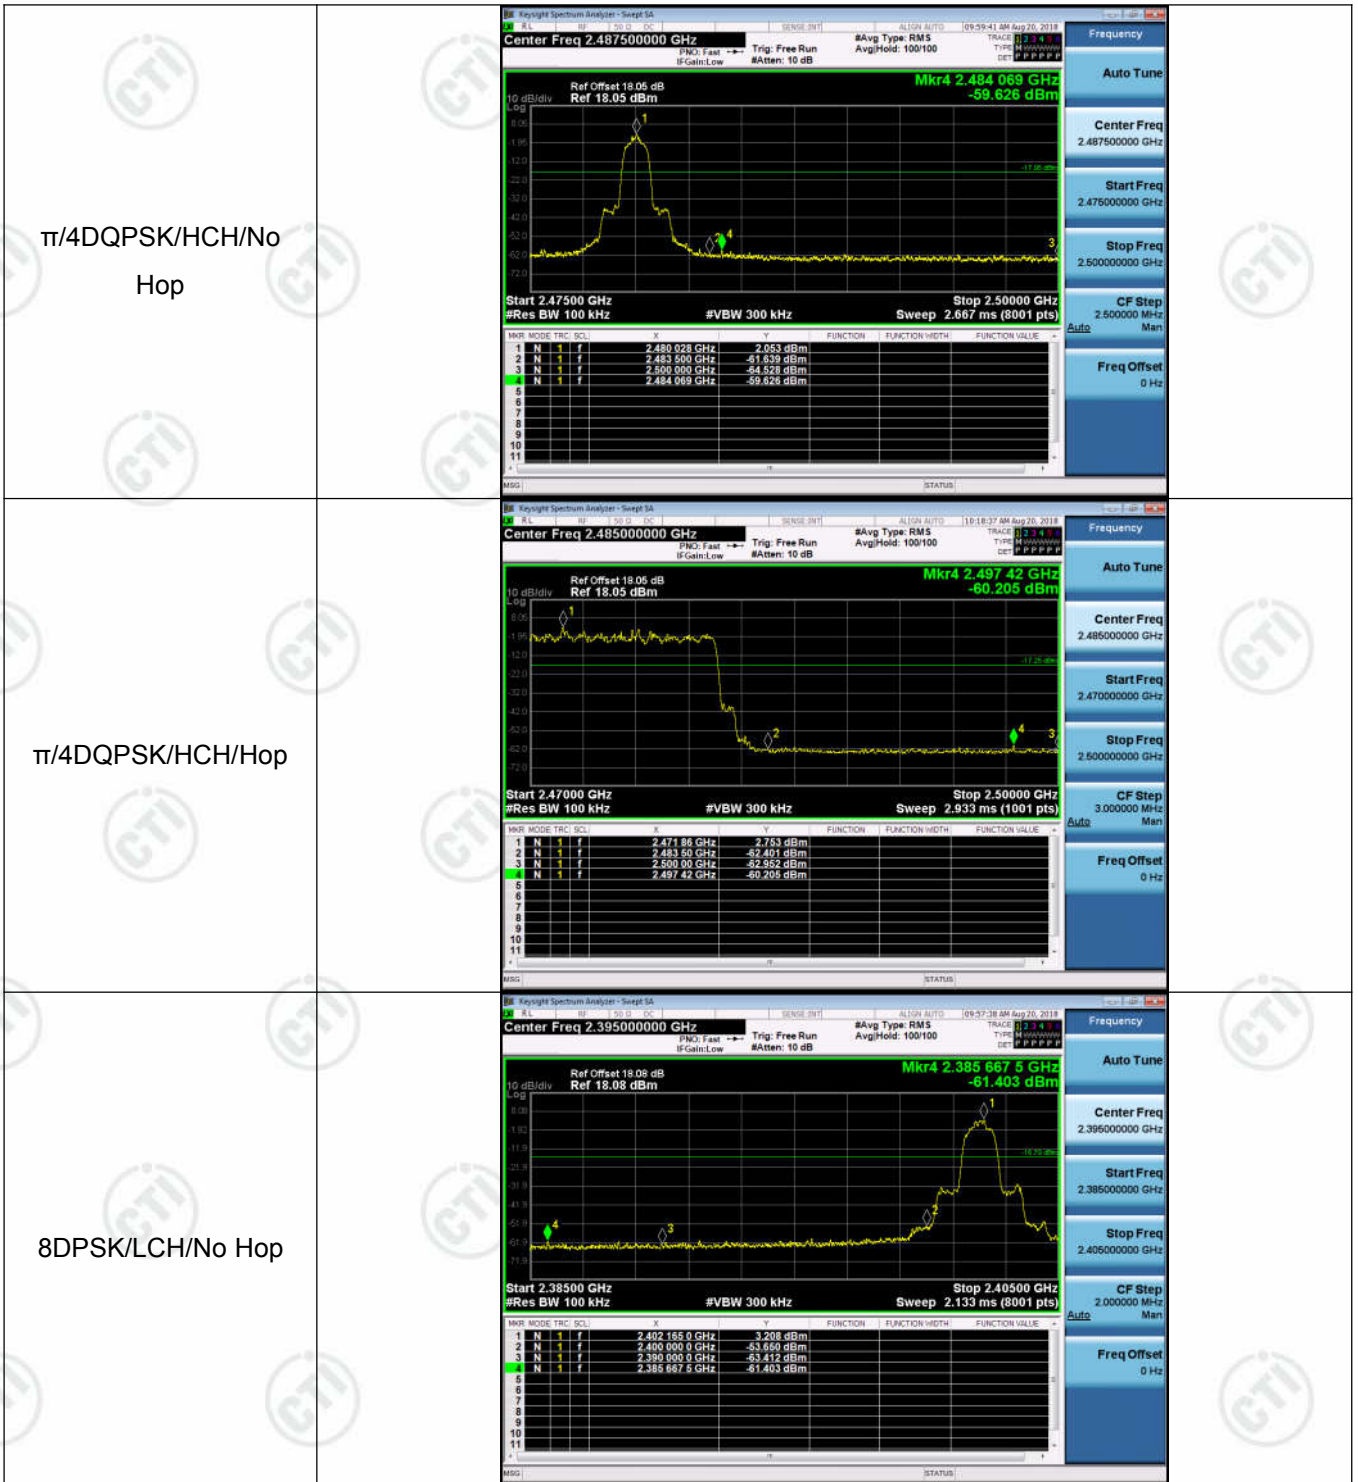








Appendix G) RF Conducted Spurious Emissions



Result Table




Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	4.535	<Limit	PASS
GFSK	MCH	5.142	<Limit	PASS
GFSK	HCH	3.14	<Limit	PASS
$\pi/4$ DQPSK	LCH	2.934	<Limit	PASS
$\pi/4$ DQPSK	MCH	3.923	<Limit	PASS
$\pi/4$ DQPSK	HCH	2.108	<Limit	PASS
8DPSK	LCH	3.011	<Limit	PASS
8DPSK	MCH	3.77	<Limit	PASS
8DPSK	HCH	2.036	<Limit	PASS



Test Graph

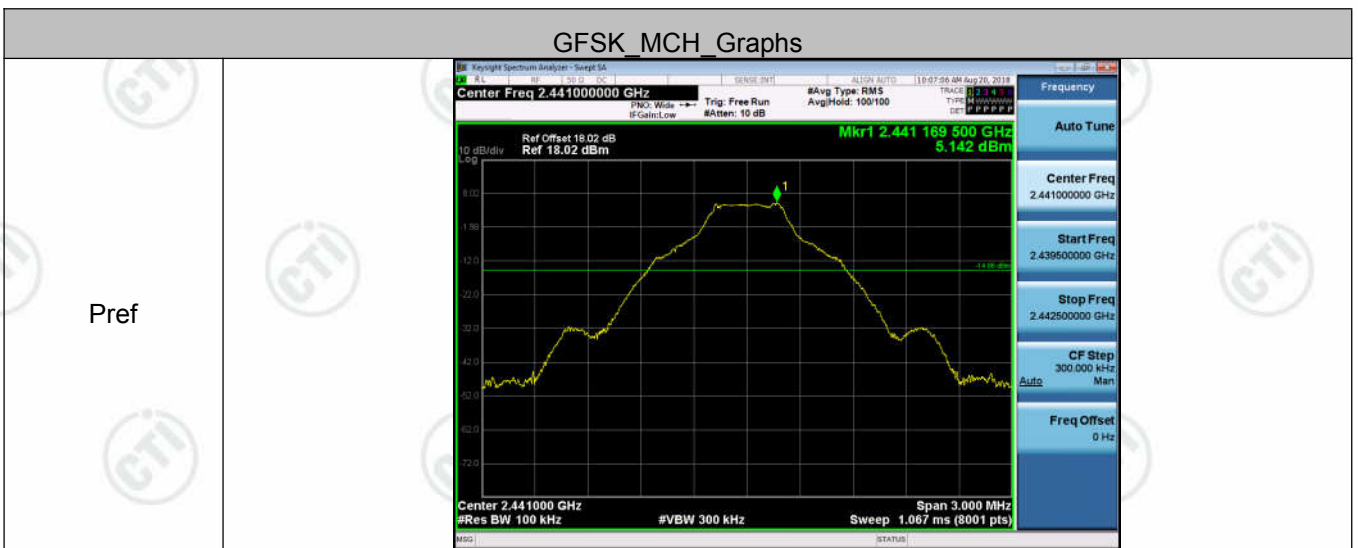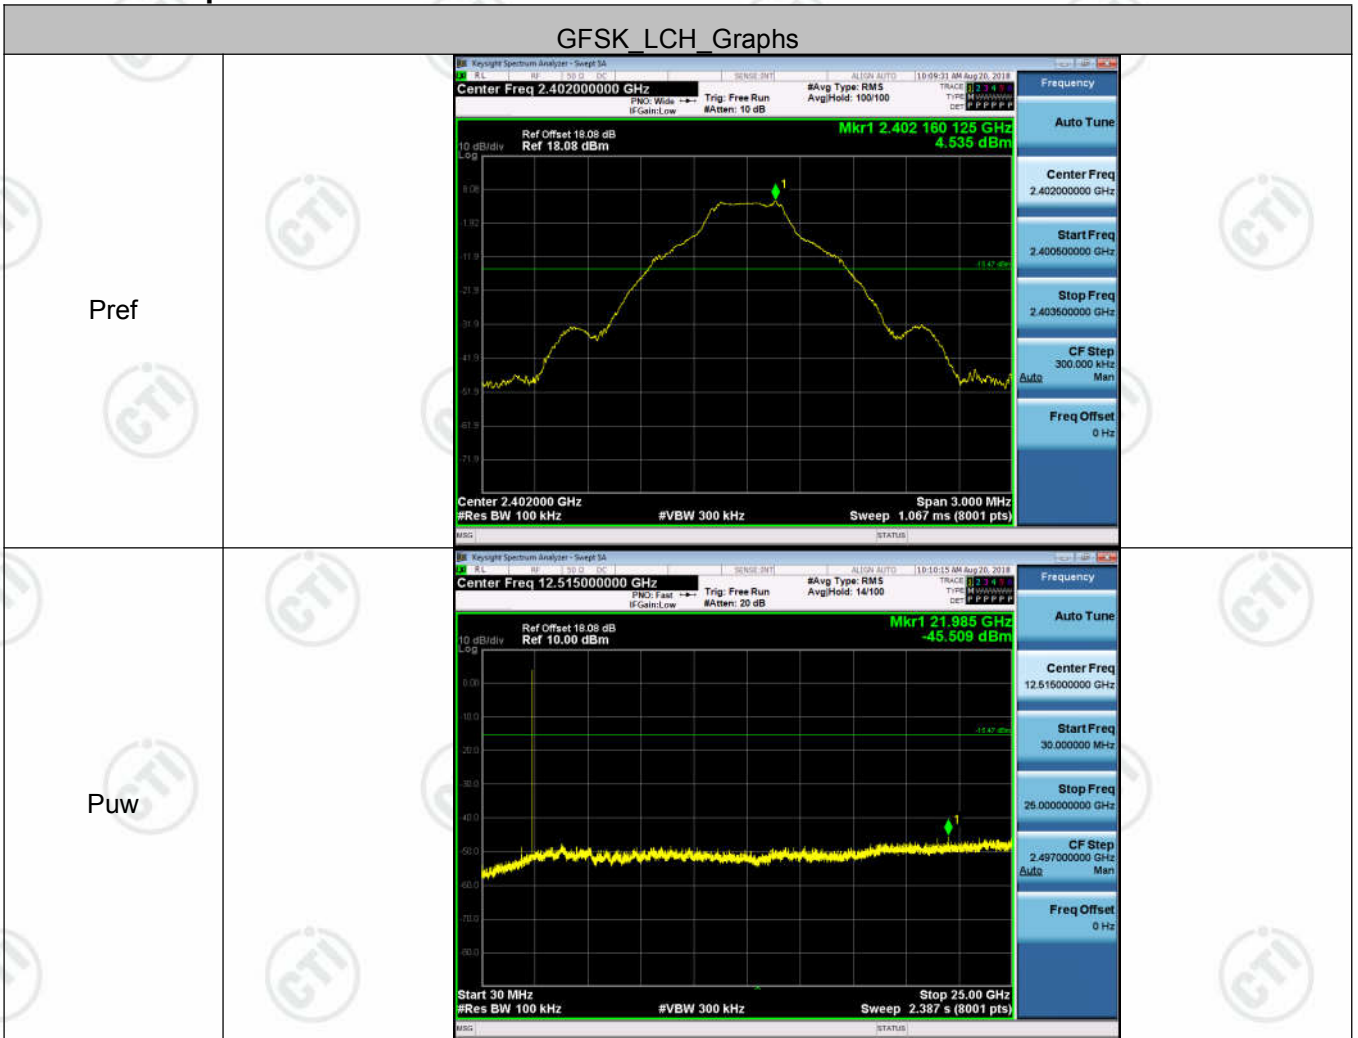


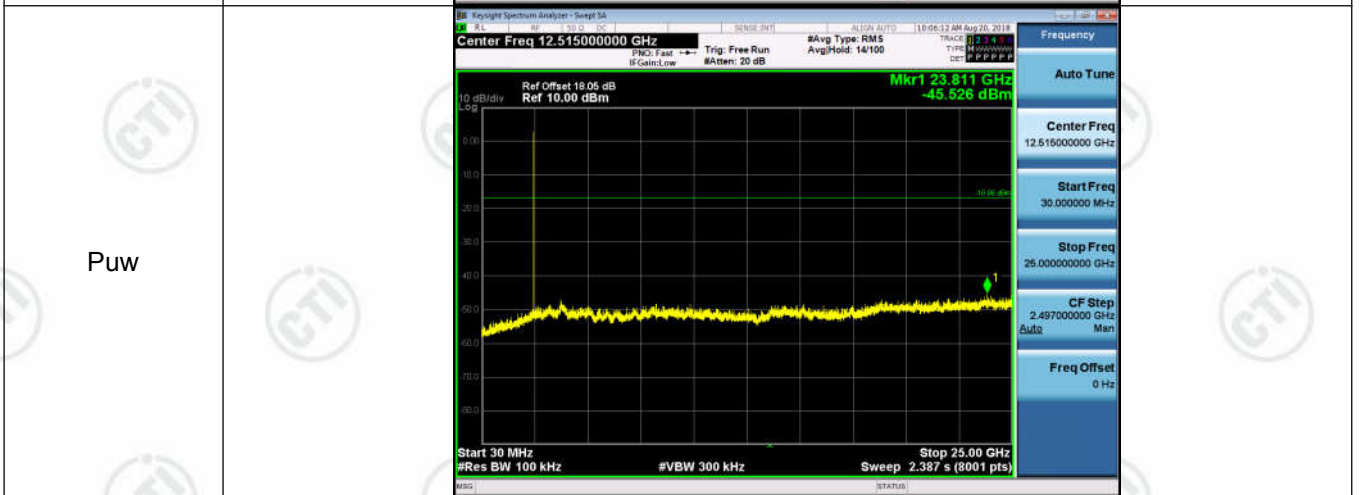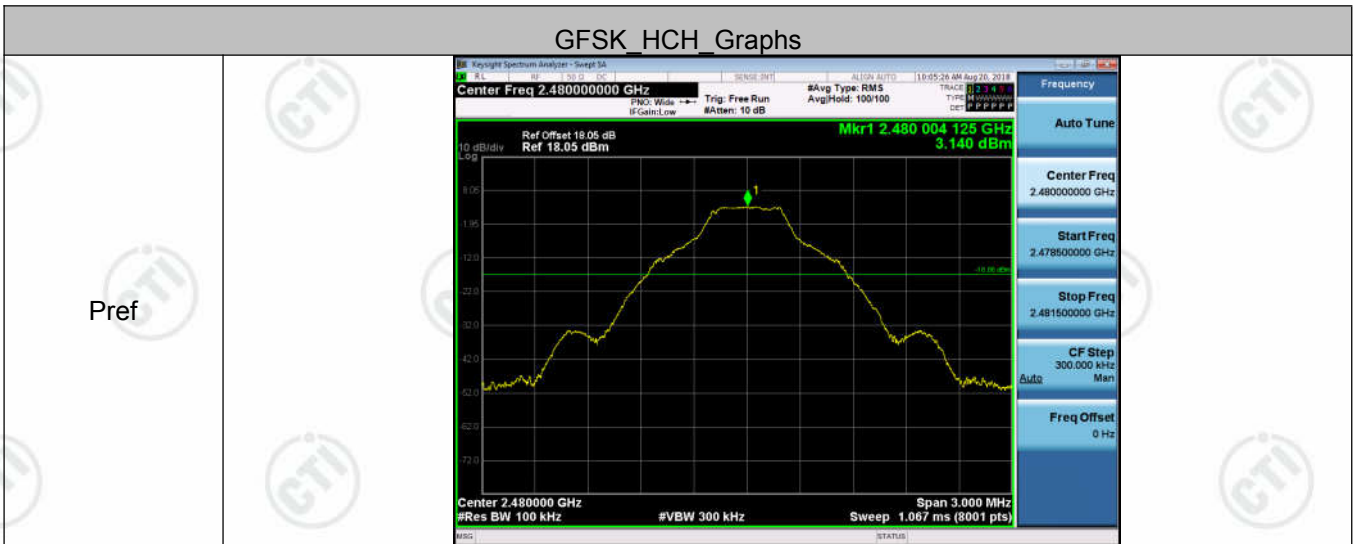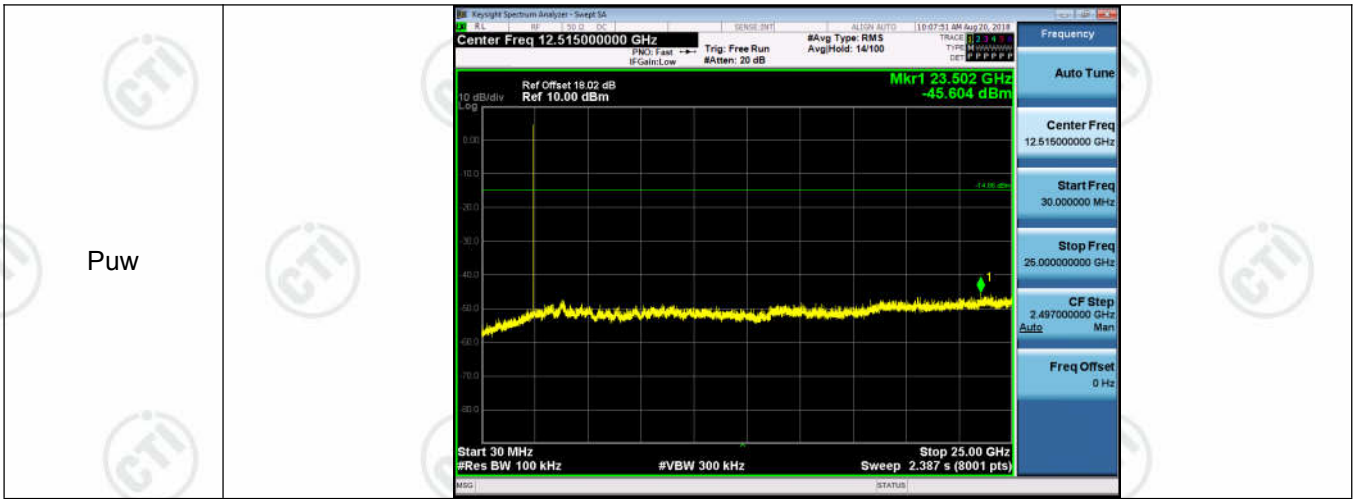

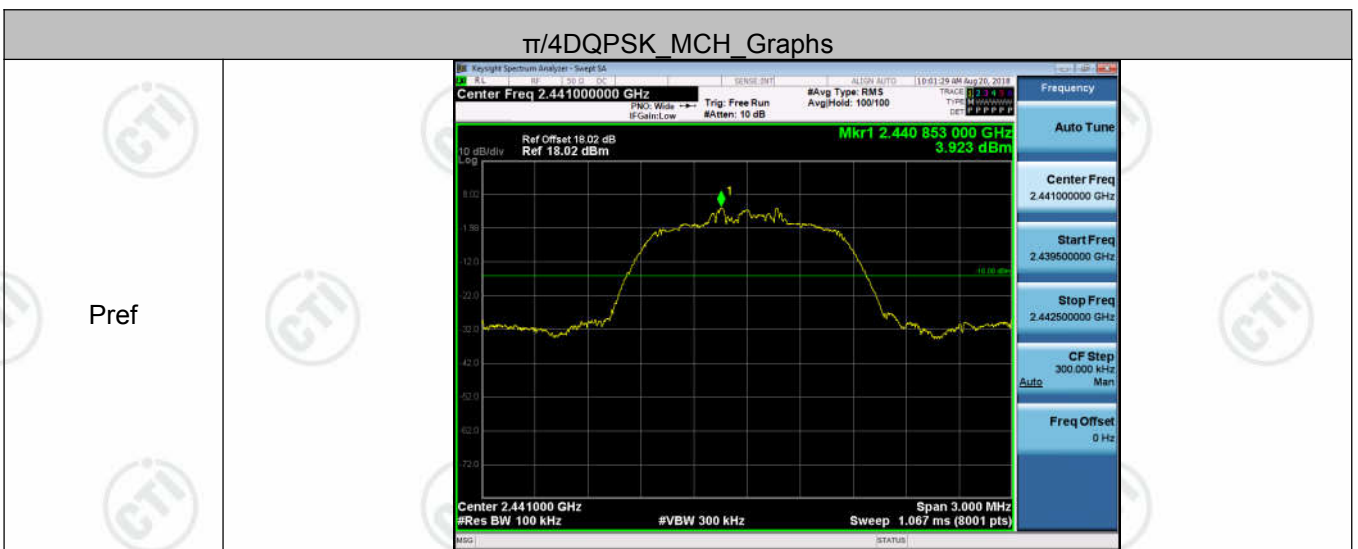
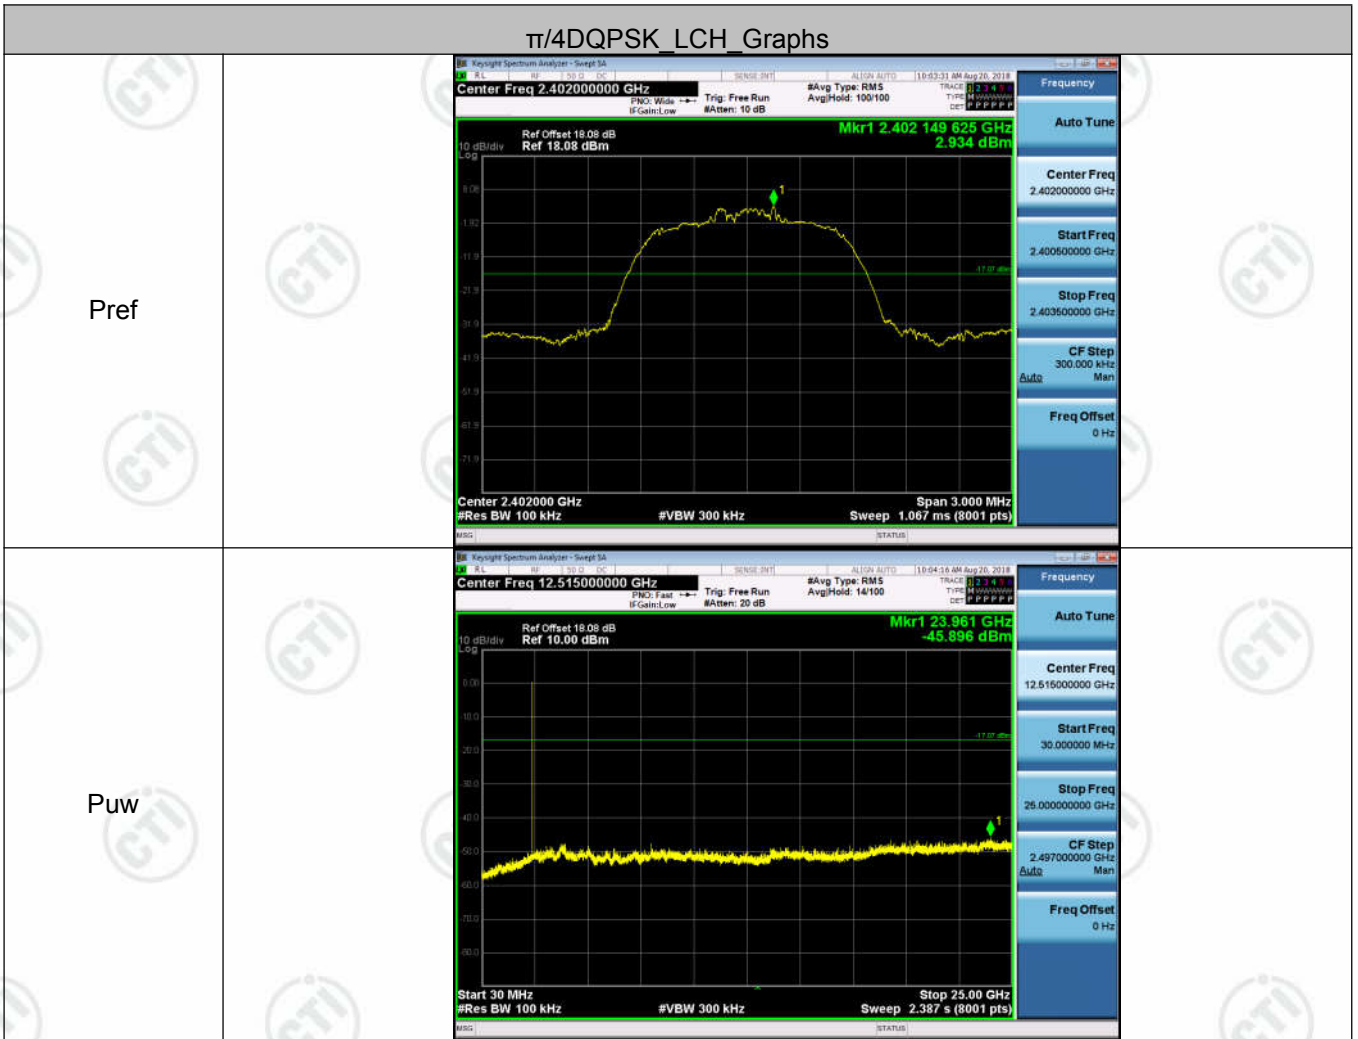


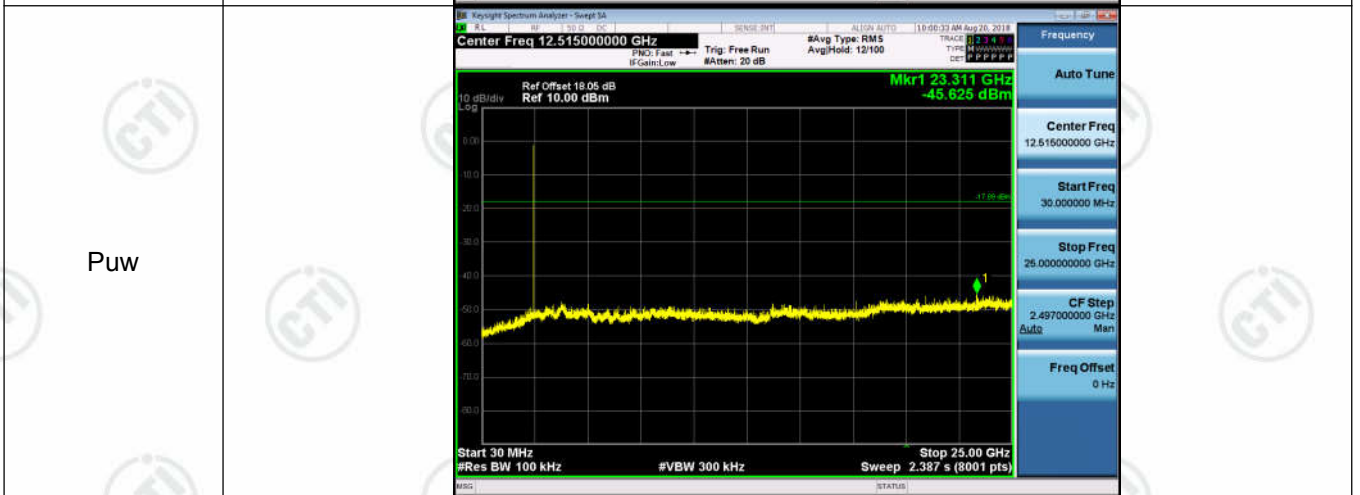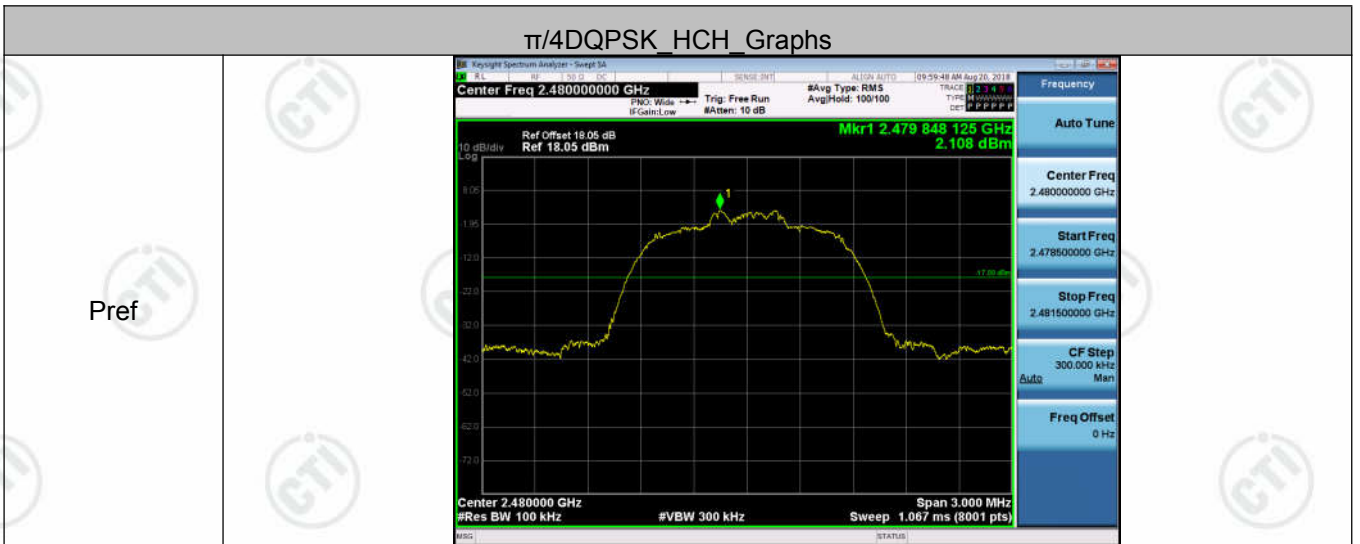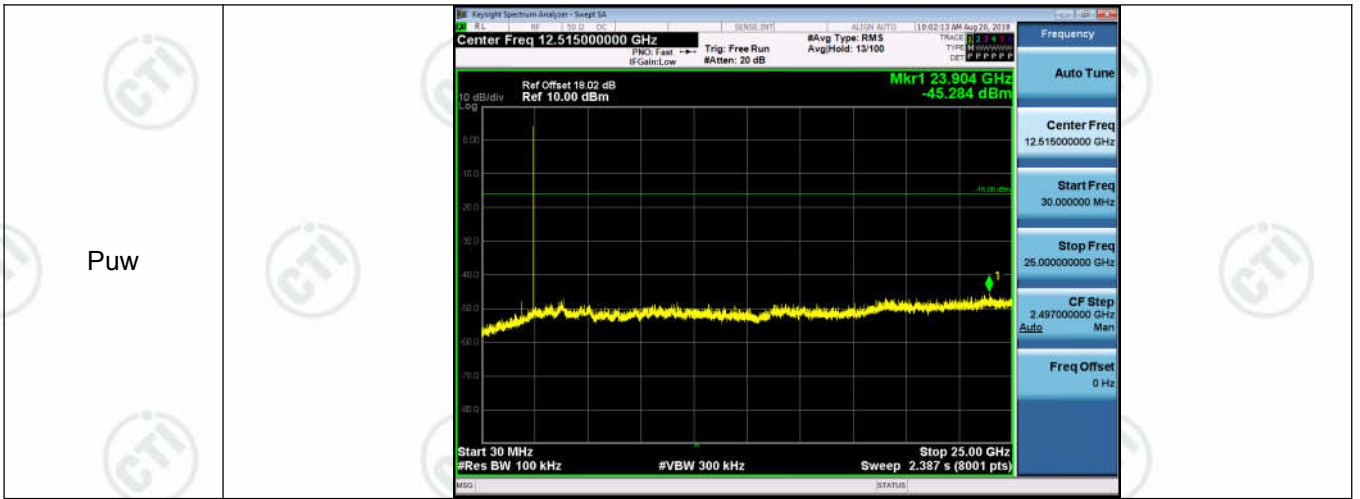

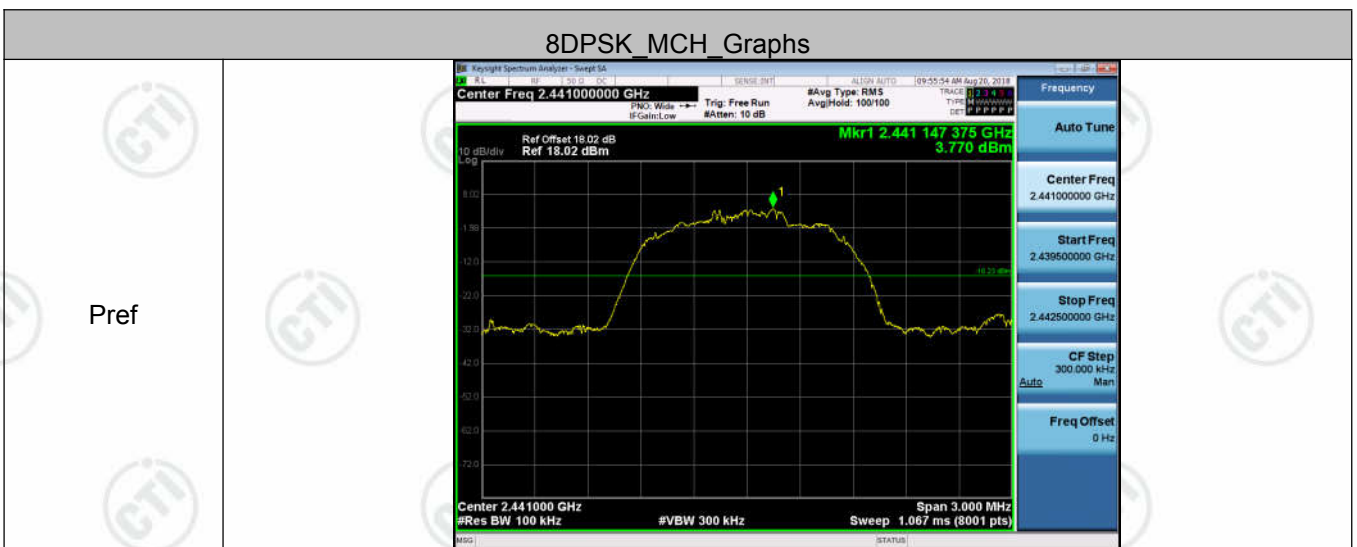
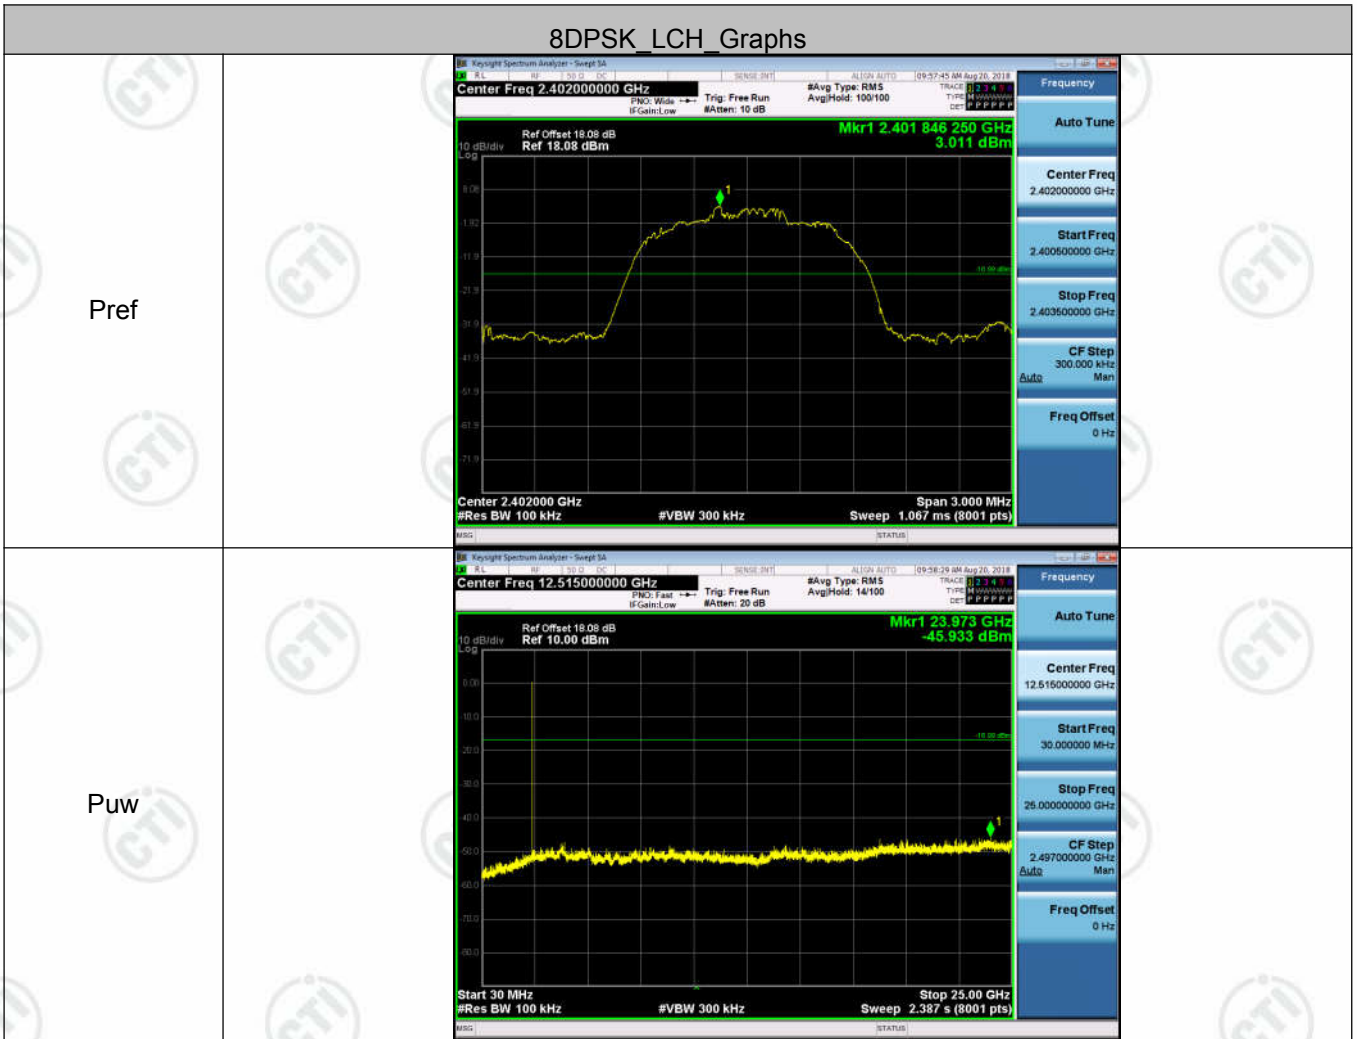


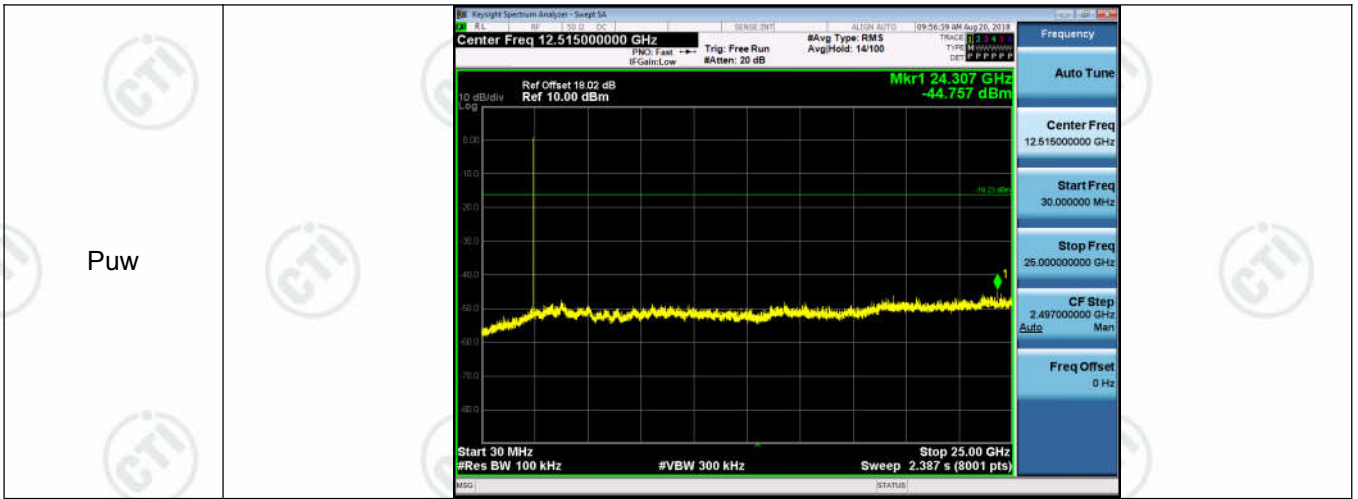

8DPSK_HCH_Graphs

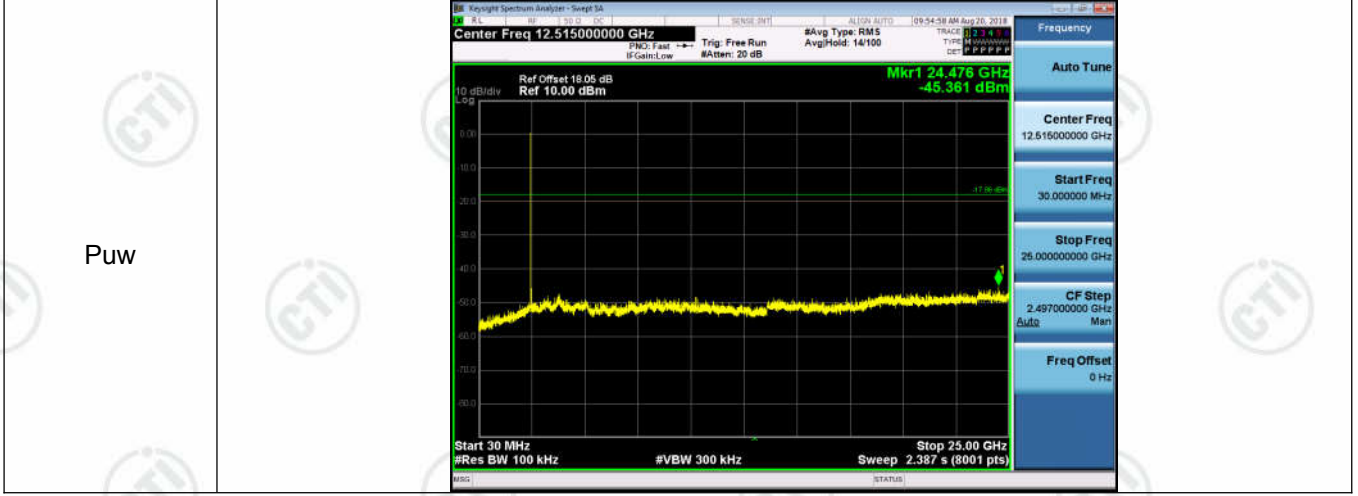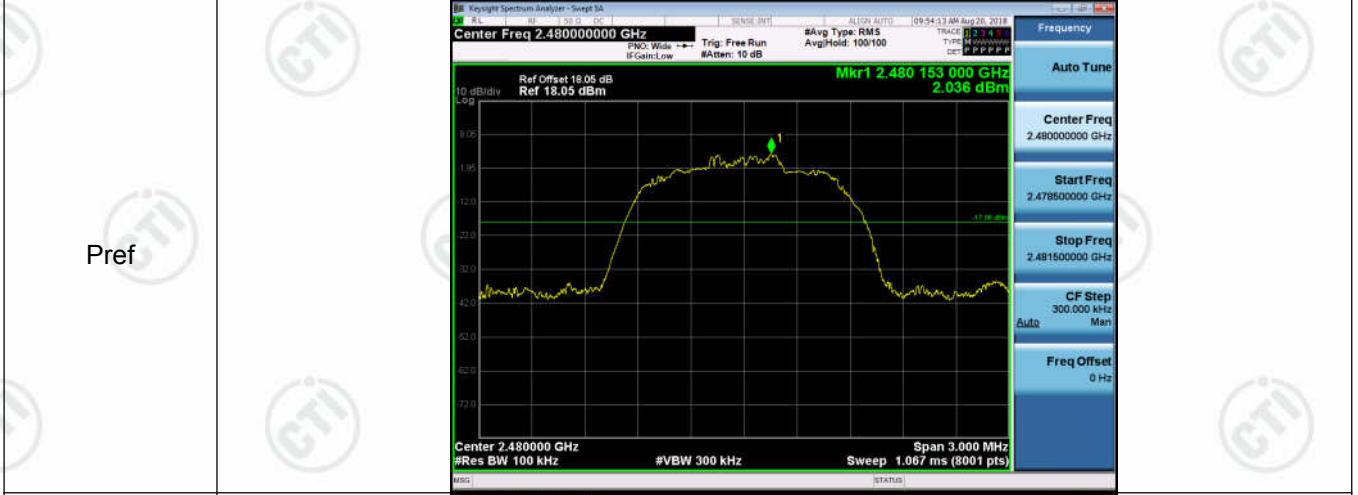

Appendix H) Pseudorandom Frequency Hopping Sequence

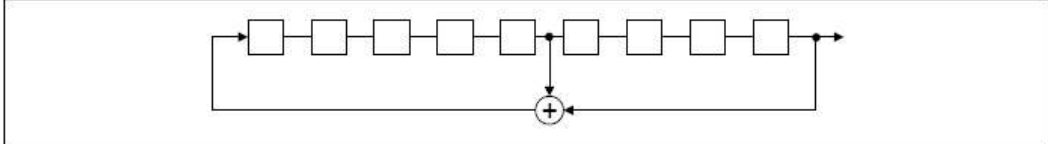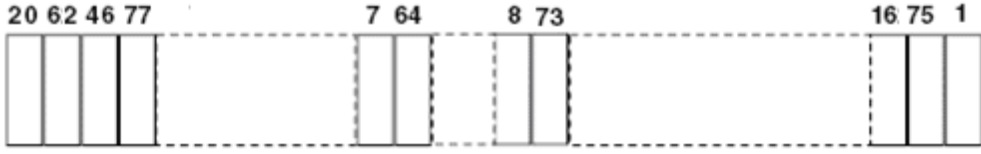Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p>	
<ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) 	
	
<p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p>	
<p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p>	
	
<p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	
<p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

Appendix I) Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:



The antenna is PIFA Antenna and no consideration of replacement. The best case gain of the antenna is -3dBi.

Appendix J) AC Power Line Conducted Emission

<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> 1)The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement. 														
<p>Limit:</p>	<table border="1" data-bbox="497 1160 1366 1379"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dB μ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB μ V)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													


Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live line:


80.0 dBuV

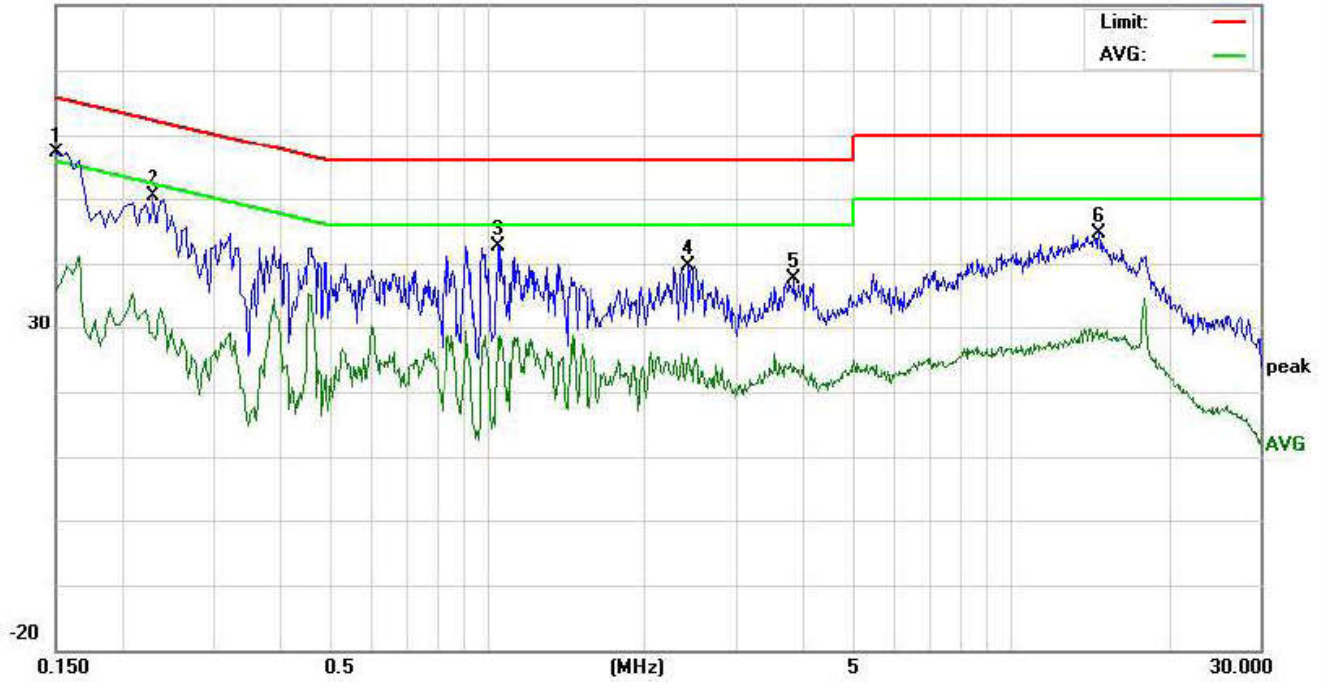

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1500	47.30	43.35	26.09	9.77	57.07	53.12	35.86	65.99	55.99	-12.87	-20.13	P	
2	0.2300	40.52	37.83	19.39	9.73	50.25	47.56	29.12	62.45	52.45	-14.89	-23.33	P	
3	1.0540	32.95	29.65	18.53	9.72	42.67	39.37	28.25	56.00	46.00	-16.63	-17.75	P	
4	2.4340	29.88	26.74	15.66	9.71	39.59	36.45	25.37	56.00	46.00	-19.55	-20.63	P	
5	3.8620	27.88	23.16	13.50	9.66	37.54	32.82	23.16	56.00	46.00	-23.18	-22.84	P	
6	14.7700	34.73	31.22	18.20	10.00	44.73	41.22	28.20	60.00	50.00	-18.78	-21.80	P	

Neutral line:

80.0 dBuV

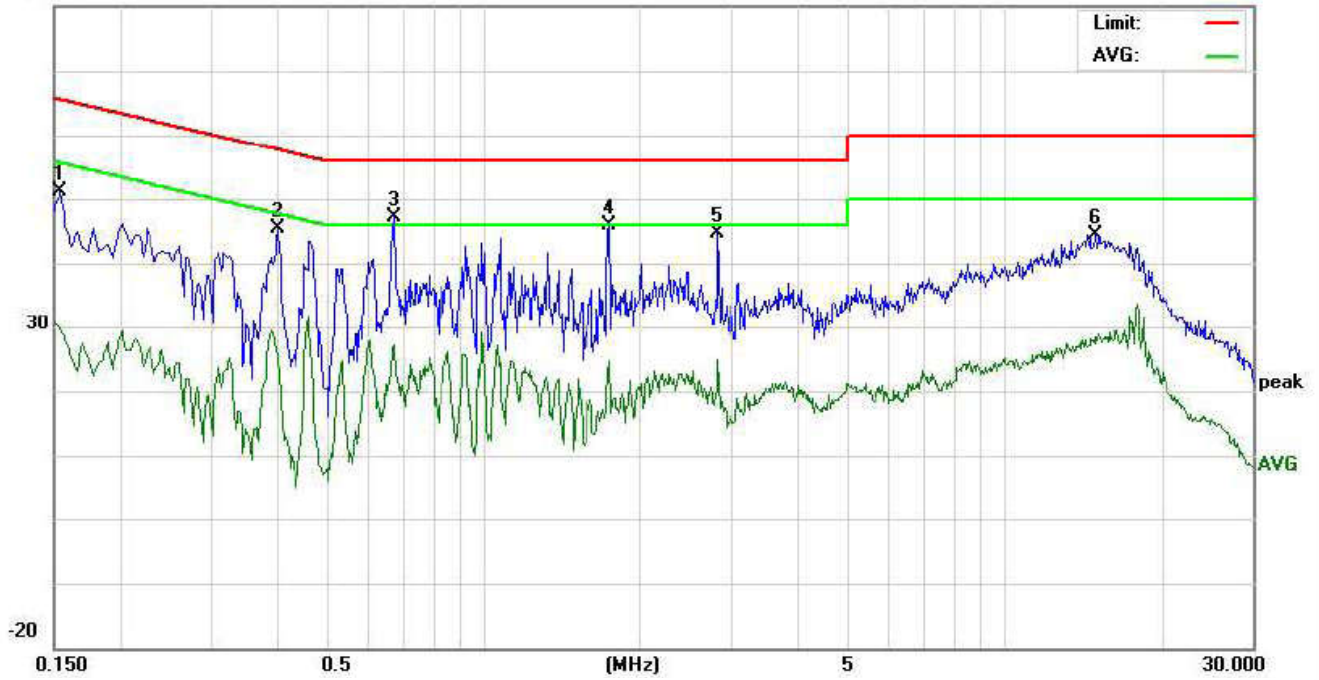

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1539	41.32	38.74	19.98	9.76	51.08	48.50	29.74	65.78	55.78	-17.28	-26.04	P	
2	0.4020	35.61	32.16	16.04	9.75	45.36	41.91	25.79	57.81	47.81	-15.90	-22.02	P	
3	0.6740	37.41	34.33	17.36	9.75	47.16	44.08	27.11	56.00	46.00	-11.92	-18.89	P	
4	1.7460	36.22	32.16	15.02	9.72	45.94	41.88	24.74	56.00	46.00	-14.12	-21.26	P	
5	2.8220	34.95	31.25	15.11	9.69	44.64	40.94	24.80	56.00	46.00	-15.06	-21.20	P	
6	15.0460	34.35	31.11	17.47	10.01	44.36	41.12	27.48	60.00	50.00	-18.88	-22.52	P	

Notes:


1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.

Appendix K) Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120kHz</td> <td>300kHz</td> <td>Quasi-peak</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average</td> </tr> </tbody> </table>	Frequency	Detector	RBW	VBW	Remark	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak	Above 1GHz	Peak	1MHz	3MHz	Peak	Peak	1MHz	10Hz	Average	
Frequency	Detector	RBW	VBW	Remark																	
30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak																	
Above 1GHz	Peak	1MHz	3MHz	Peak																	
	Peak	1MHz	10Hz	Average																	
Test Procedure:	<p>Below 1GHz test procedure as below:</p> <p>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</p> <p>Above 1GHz test procedure as below:</p> <p>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>b. Test the EUT in the lowest channel , the Highest channel</p> <p>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. Repeat above procedures until all frequencies measured was complete.</p>																				
Limit:	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBμV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dB μ V/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value	Above 1GHz	54.0	Average Value	74.0	Peak Value
Frequency	Limit (dB μ V/m @3m)	Remark																			
30MHz-88MHz	40.0	Quasi-peak Value																			
88MHz-216MHz	43.5	Quasi-peak Value																			
216MHz-960MHz	46.0	Quasi-peak Value																			
960MHz-1GHz	54.0	Quasi-peak Value																			
Above 1GHz	54.0	Average Value																			
	74.0	Peak Value																			


Test plot as follows:

Worse case mode:	GFSK(1-DH5)		
	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

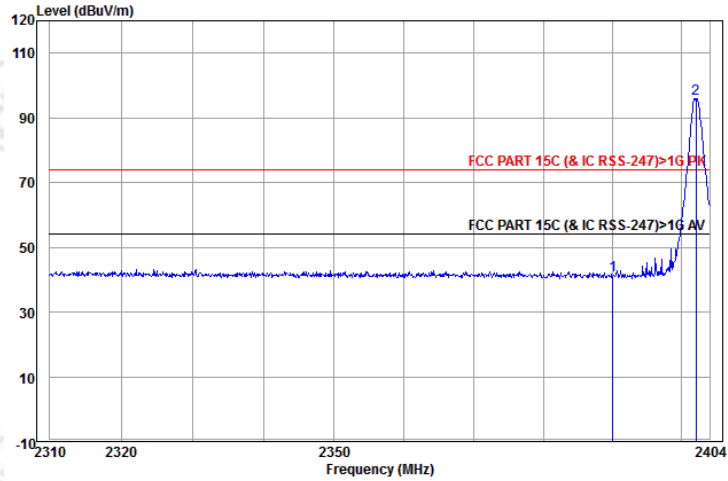


	Ant Freq	Cable Factor	Cable Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	10.67	41.38	74.00	-32.62	Horizontal	Peak
2 pp	2402.083	27.62	3.07	65.22	95.91	74.00	21.91	Horizontal	Peak

Worse case mode:	GFSK(1-DH5)		
	Test channel: Lowest	Polarization: Vertical	Remark: Peak

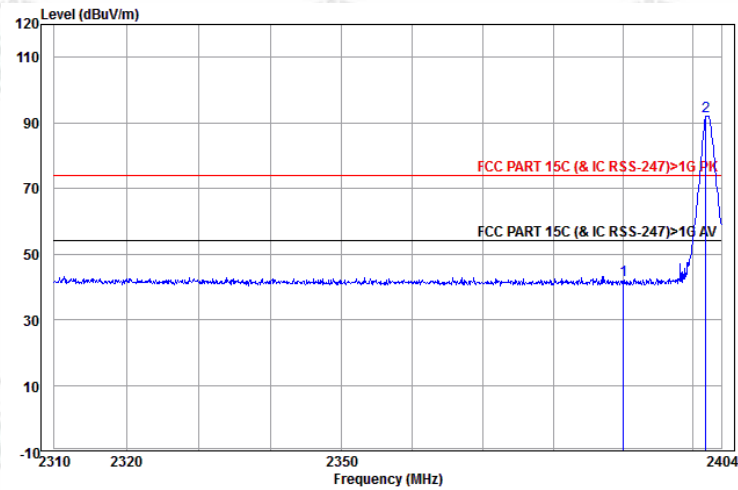


	Ant Freq	Cable Factor	Cable Loss	Read Level	Read Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	11.21	41.92	74.00	-32.08	Vertical	Peak
2 pp	2401.796	27.62	3.07	61.32	92.01	74.00	18.01	Vertical	Peak

Worse case mode:	GFSK(1-DH5)		
	Test channel: Highest	Polarization: Horizontal	Remark: Peak

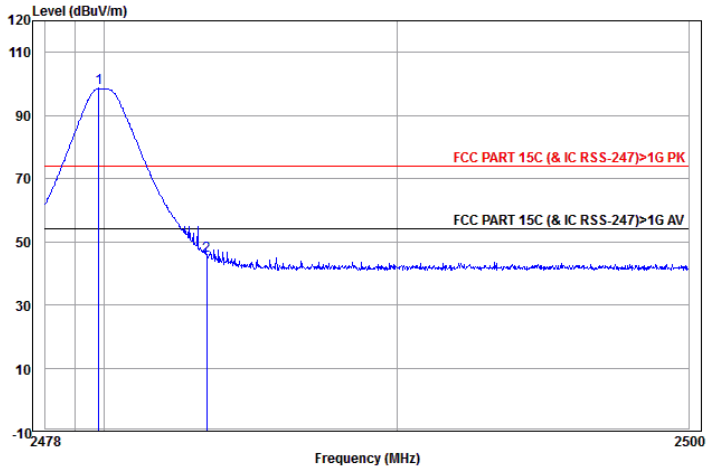


	Ant Freq	Cable Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 2479.819	27.59	3.12	67.93	98.64	74.00	24.64	Horizontal Peak
2	2483.500	27.59	3.12	14.79	45.50	74.00	-28.50	Horizontal Peak

Worse case mode:	GFSK(1-DH5)		
	Test channel: Highest	Polarization: Vertical	Remark: Peak

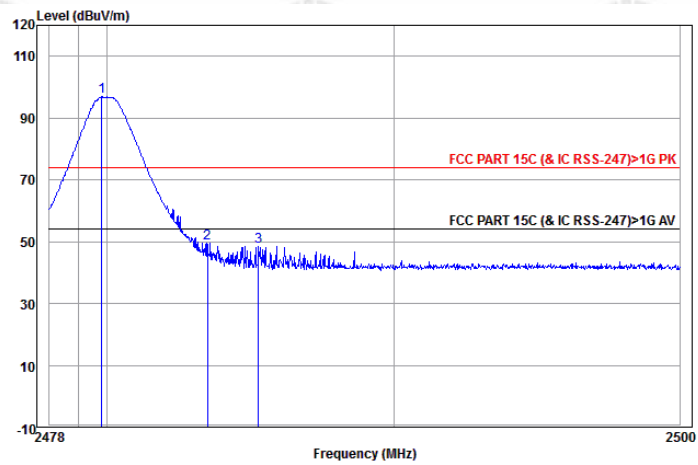


	Ant Freq	Cable Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp 2479.819	27.59	3.12	66.22	96.93	74.00	22.93	Vertical Peak
2	2483.500	27.59	3.12	18.86	49.57	74.00	-24.43	Vertical Peak
3	2485.282	27.59	3.12	17.89	48.60	74.00	-25.40	Vertical Peak

Worse case mode:	π/4DQPSK(2-DH5)		
	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

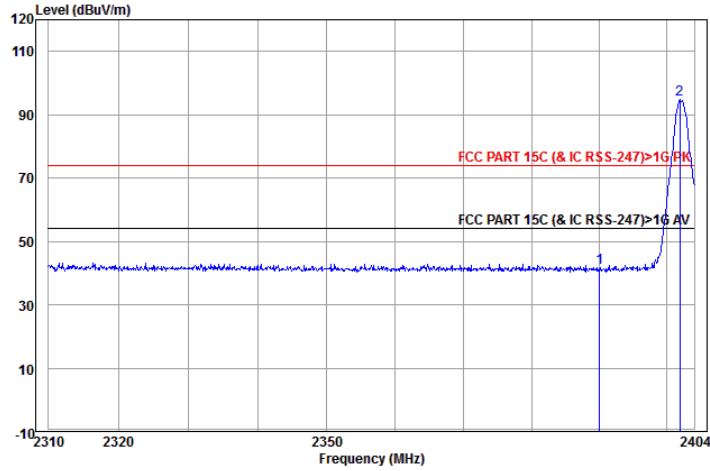


	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	10.94	41.65	74.00	-32.35	Horizontal	Peak
2 pp	2401.891	27.62	3.07	64.02	94.71	74.00	20.71	Horizontal	Peak

Worse case mode:	π/4DQPSK(2-DH5)		
	Test channel: Lowest	Polarization: Vertical	Remark: Peak

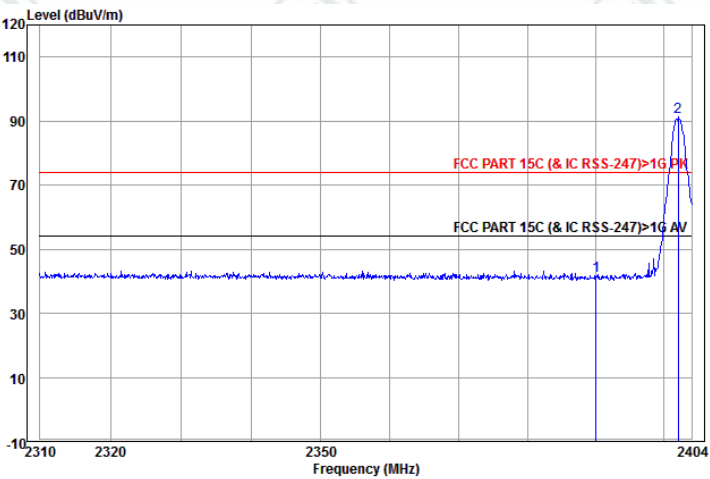


	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	27.64	3.07	11.03	41.74	74.00	-32.26	Vertical	Peak
2 pp	2402.083	27.62	3.07	60.51	91.20	74.00	17.20	Vertical	Peak

Worse case mode:	π/4DQPSK(2-DH5)		
	Test channel: Highest	Polarization: Horizontal	Remark: Peak

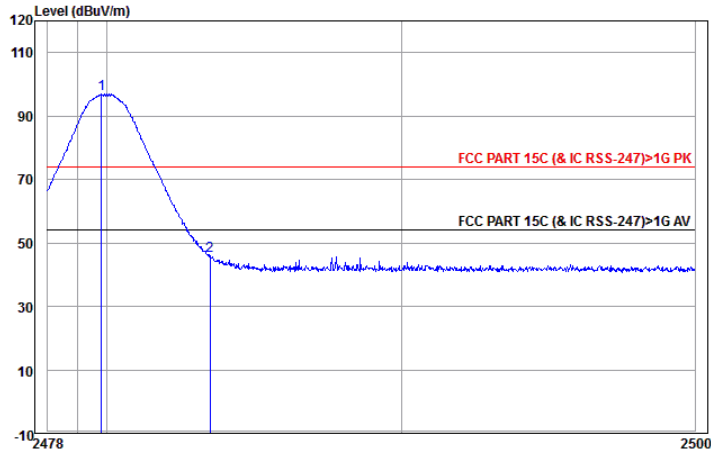


	Ant Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2479.819	27.59	3.12	66.38	97.09	74.00	23.09	Horizontal	Peak
2	2483.500	27.59	3.12	15.16	45.87	74.00	-28.13	Horizontal	Peak

Worse case mode:	π/4DQPSK(2-DH5)		
	Test channel: Highest	Polarization: Vertical	Remark: Peak

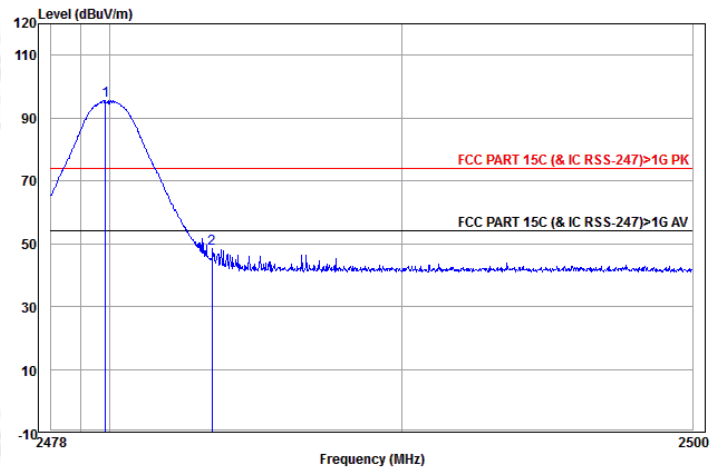


	Ant Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2479.863	27.59	3.12	64.97	95.68	74.00	21.68	Vertical	Peak
2	2483.500	27.59	3.12	17.75	48.46	74.00	-25.54	Vertical	Peak

Worse case mode:	8DPSK(3-DH5)		
	Test channel: Lowest	Polarization: Horizontal	Remark: Peak

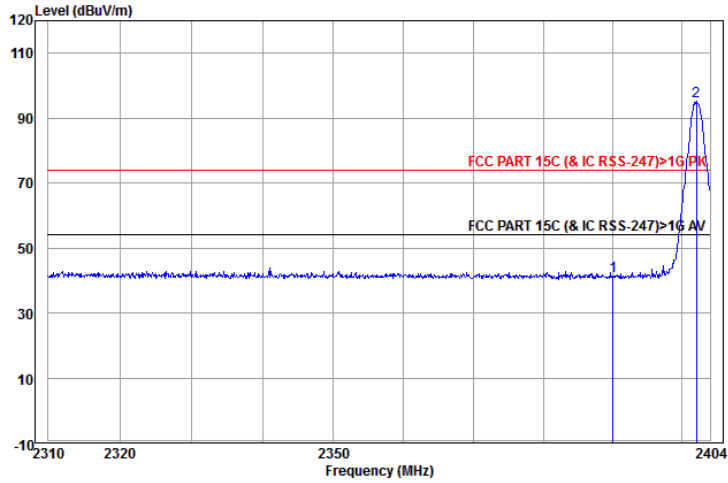


	Ant Freq	Cable Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	27.64	3.07	10.58	41.29	74.00	-32.71 Horizontal Peak
2 pp	2402.083	27.62	3.07	64.47	95.16	74.00	21.16 Horizontal Peak

Worse case mode:	8DPSK(3-DH5)		
	Test channel: Lowest	Polarization: Vertical	Remark: Peak

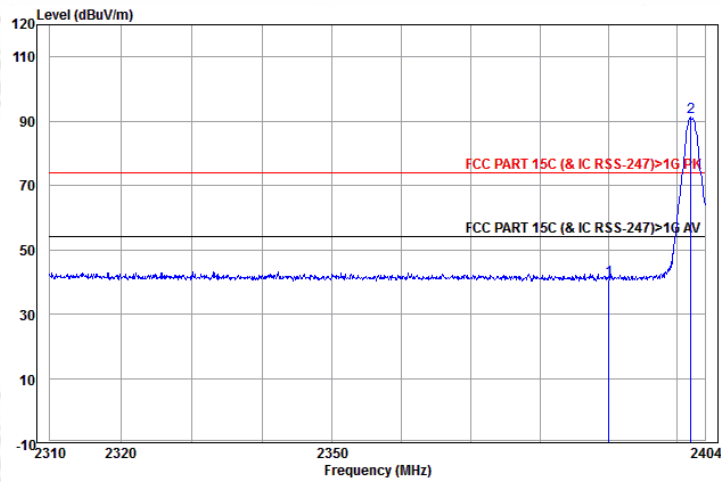


	Ant Freq	Cable Factor	Read Level	Level	Limit	Over	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	2390.000	27.64	3.07	10.05	40.76	74.00	-33.24 Vertical Peak
2 pp	2401.987	27.62	3.07	60.67	91.36	74.00	17.36 Vertical Peak

Worse case mode:	8DPSK(3-DH5)		
	Test channel: Highest	Polarization: Horizontal	Remark: Peak

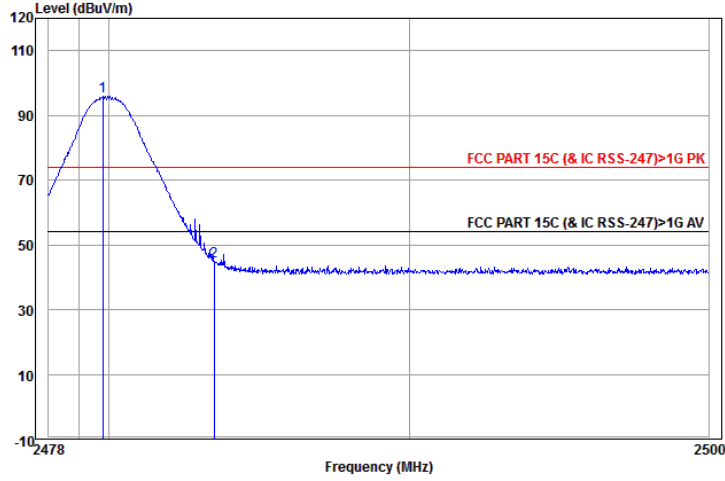

	Ant Freq	Cable Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.797	27.59	3.12	65.17	95.88	74.00	21.88	Horizontal Peak
2	2483.500	27.59	3.12	14.19	44.90	74.00	-29.10	Horizontal Peak

Worse case mode:	8DPSK(3-DH5)		
	Test channel: Highest	Polarization: Vertical	Remark: Peak

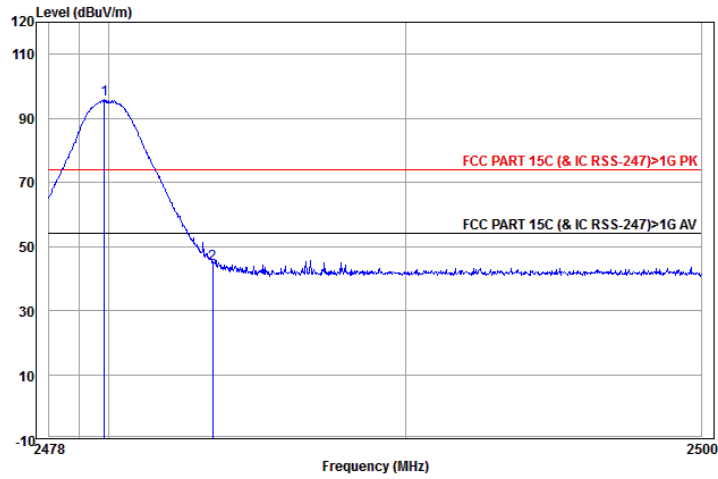

	Ant Freq	Cable Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2479.863	27.59	3.12	65.04	95.75	74.00	21.75	Vertical Peak
2	2483.500	27.59	3.12	14.00	44.71	74.00	-29.29	Vertical Peak

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in charge + transmitter mode.

2) As shown in this section, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor


Appendix L) Radiated Spurious Emissions

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
Test Procedure:					
Below 1GHz test procedure as below:					
<p>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
Above 1GHz test procedure as below:					
<p>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>Repeat above procedures until all frequencies measured was complete.</p>					
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					

Radiated Spurious Emissions test Data:
Radiated Emission below 1GHz

Mode:	GFSK Transmitting	Channel:	2441
Remark:	QP		

Test Graph

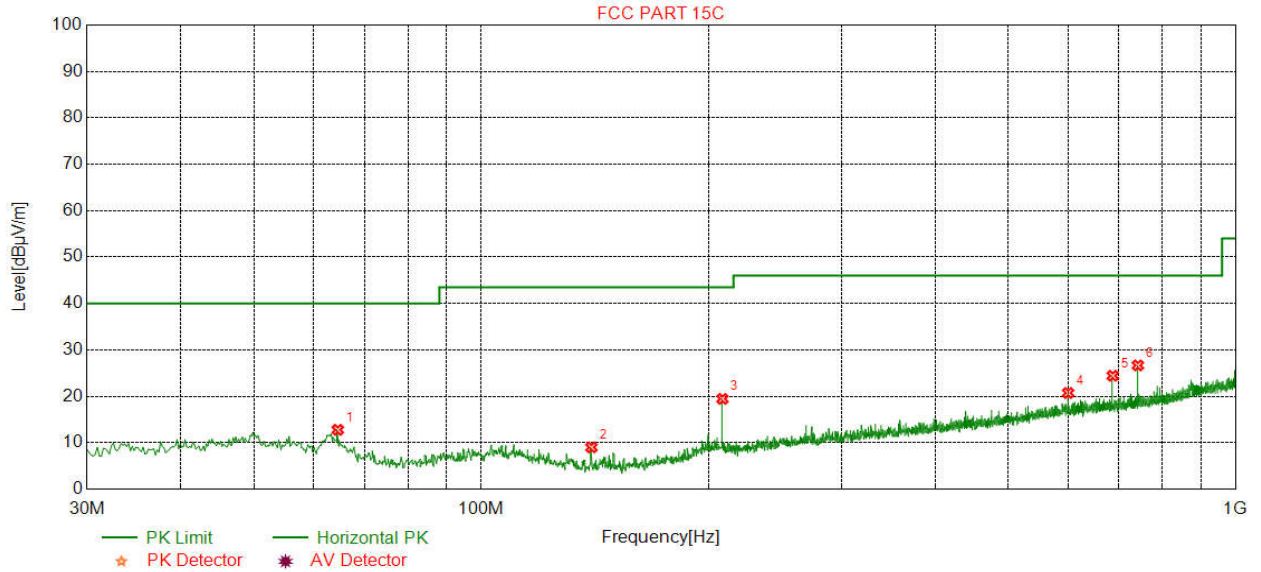


Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Magin [dB]	Result	Polarity
1	64.5389	10.42	0.92	-32.05	33.49	12.78	40.00	27.22	Pass	Horizontal
2	140.0200	7.20	1.39	-31.99	32.41	9.01	43.50	34.49	Pass	Horizontal
3	208.9038	11.13	1.71	-31.94	38.55	19.45	43.50	24.05	Pass	Horizontal
4	600.0860	19.00	2.96	-31.99	30.75	20.72	46.00	25.28	Pass	Horizontal
5	687.5975	19.70	3.14	-32.06	33.65	24.43	46.00	21.57	Pass	Horizontal
6	742.5105	20.27	3.26	-32.11	35.24	26.66	46.00	19.34	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2441
Remark:	QP		

Test Graph

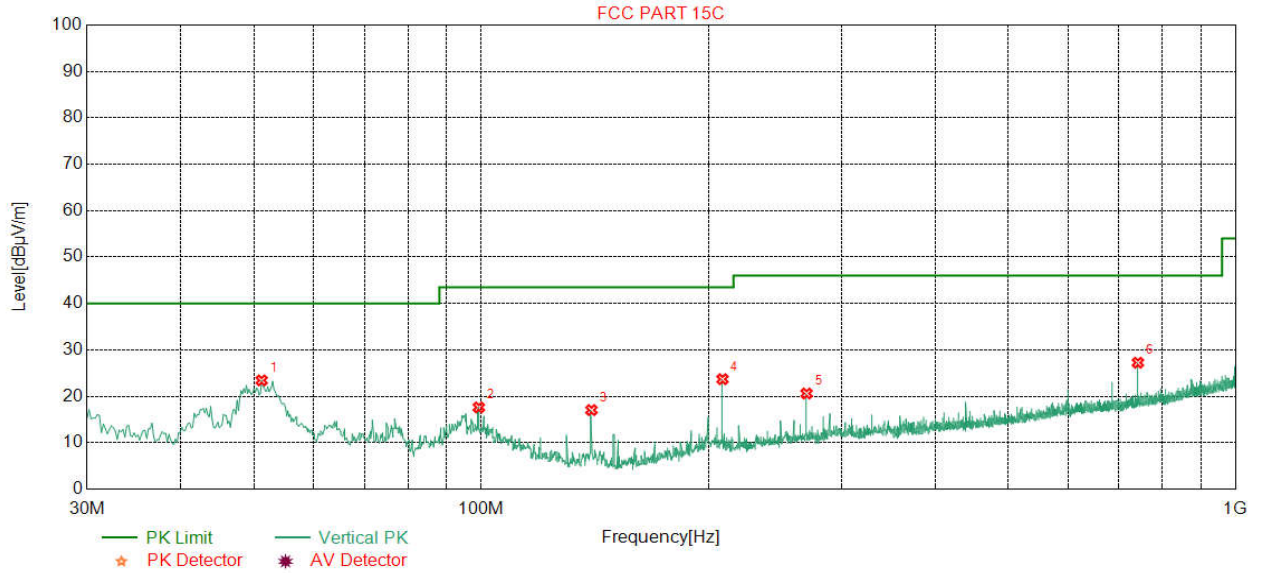


Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Magin [dB]	Result	Polarity
1	51.1502	13.02	0.81	-32.12	41.73	23.44	40.00	16.56	Pass	Vertical
2	99.2719	10.88	1.16	-32.06	37.63	17.61	43.50	25.89	Pass	Vertical
3	140.0200	7.20	1.39	-31.99	40.44	17.04	43.50	26.46	Pass	Vertical
4	208.9038	11.13	1.71	-31.94	42.79	23.69	43.50	19.81	Pass	Vertical
5	270.0260	12.60	1.96	-31.88	37.93	20.61	46.00	25.39	Pass	Vertical
6	742.5105	20.27	3.26	-32.11	35.83	27.25	46.00	18.75	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	QP		

Test Graph

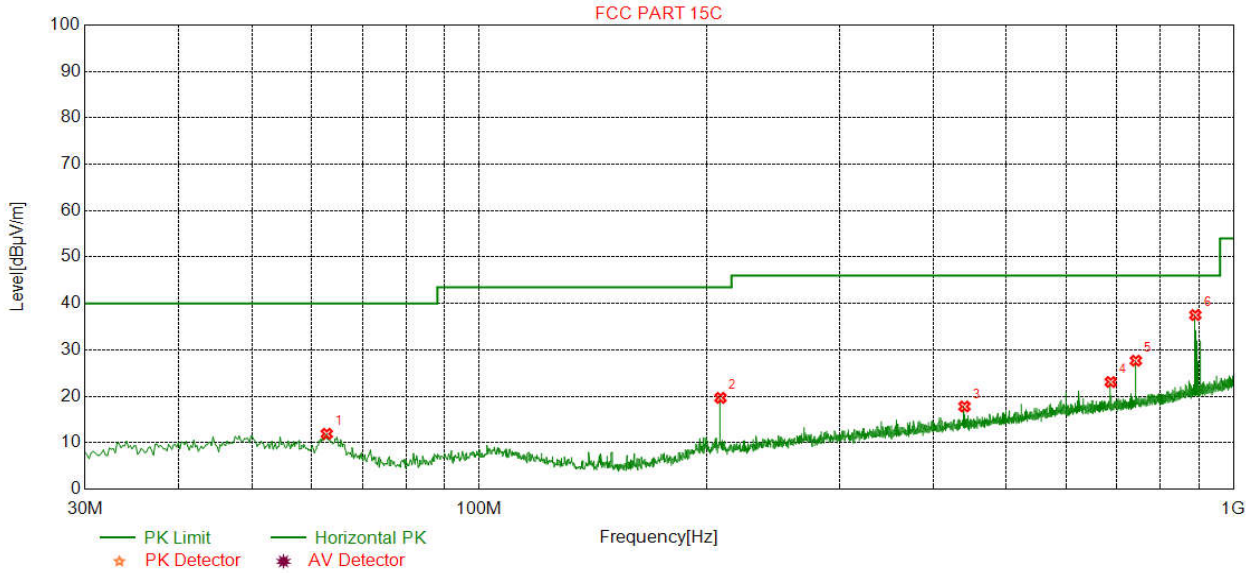


Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity
1	62.7926	10.87	0.91	-32.04	32.18	11.92	40.00	28.08	Pass	Horizontal
2	208.9038	11.13	1.71	-31.94	38.77	19.67	43.50	23.83	Pass	Horizontal
3	440.0040	16.04	2.48	-31.88	31.17	17.81	46.00	28.19	Pass	Horizontal
4	687.5975	19.70	3.14	-32.06	32.30	23.08	46.00	22.92	Pass	Horizontal
5	742.5105	20.27	3.26	-32.11	36.26	27.68	46.00	18.32	Pass	Horizontal
6	890.3681	21.98	3.58	-31.61	43.57	37.52	46.00	8.48	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	QP		

Test Graph

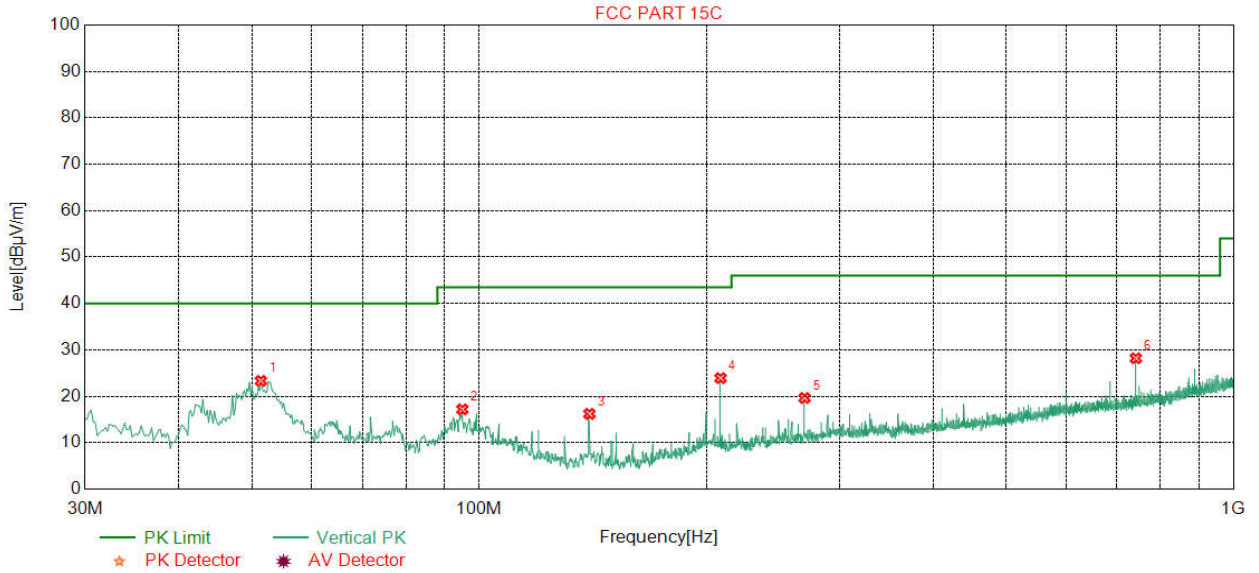


Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBμV]	Level [dBμV/m]	Limit [dBμV/m]	Magin [dB]	Result	Polarity
1	51.3443	12.98	0.81	-32.10	41.63	23.32	40.00	16.68	Pass	Vertical
2	95.0030	10.20	1.12	-32.07	37.94	17.19	43.50	26.31	Pass	Vertical
3	140.0200	7.20	1.39	-31.99	39.61	16.21	43.50	27.29	Pass	Vertical
4	208.9038	11.13	1.71	-31.94	43.02	23.92	43.50	19.58	Pass	Vertical
5	270.0260	12.60	1.96	-31.88	36.96	19.64	46.00	26.36	Pass	Vertical
6	742.5105	20.27	3.26	-32.11	36.78	28.20	46.00	17.80	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	QP		

Test Graph

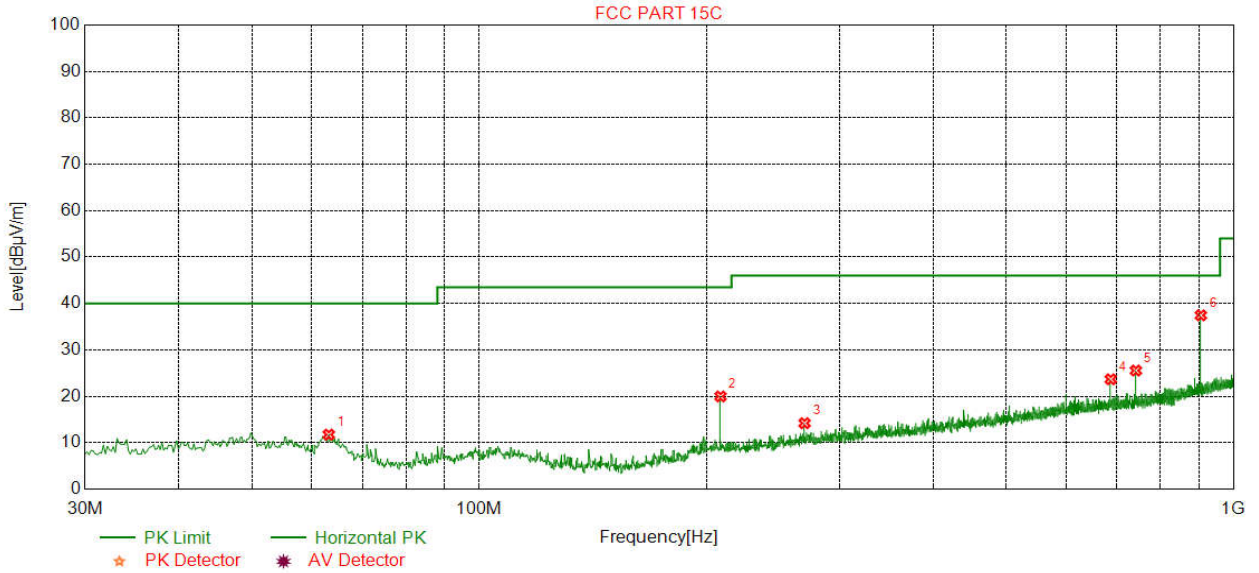


Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Magin [dB]	Result	Polarity
1	63.1806	10.77	0.91	-32.04	32.11	11.75	40.00	28.25	Pass	Horizontal
2	208.9038	11.13	1.71	-31.94	39.08	19.98	43.50	23.52	Pass	Horizontal
3	270.0260	12.60	1.96	-31.88	31.53	14.21	46.00	31.79	Pass	Horizontal
4	687.5975	19.70	3.14	-32.06	32.89	23.67	46.00	22.33	Pass	Horizontal
5	742.5105	20.27	3.26	-32.11	34.13	25.55	46.00	20.45	Pass	Horizontal
6	905.3091	22.13	3.60	-31.53	43.25	37.45	46.00	8.55	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	QP		

Test Graph

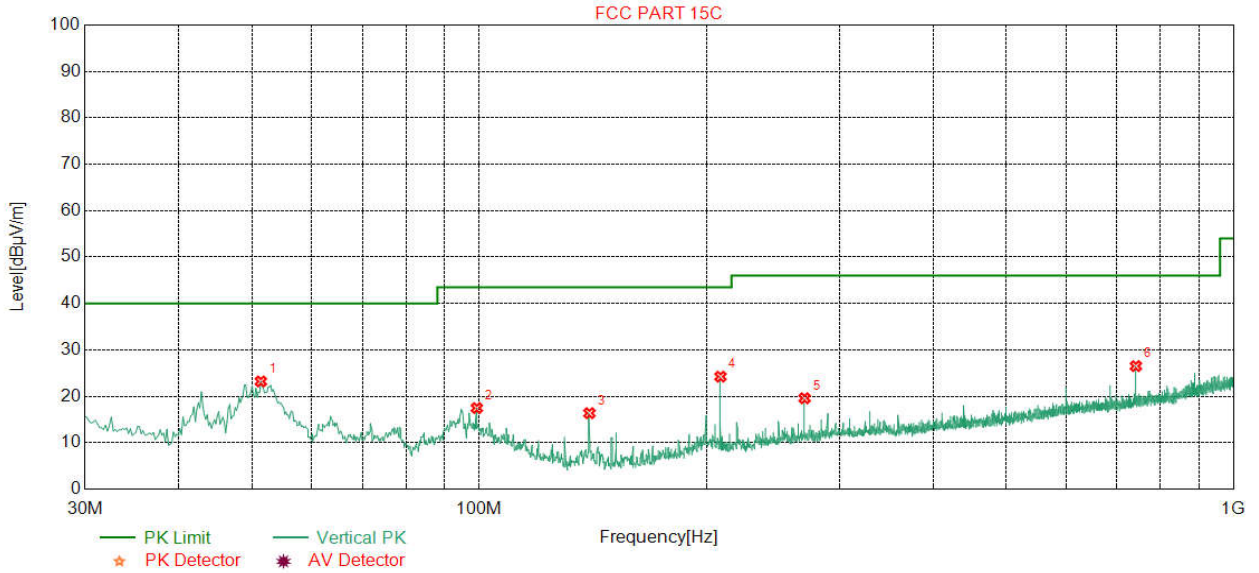

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dBµV]	Level [dBµV/m]	Limit [dBµV/m]	Magin [dB]	Result	Polarity
1	51.3443	12.98	0.81	-32.10	41.52	23.21	40.00	16.79	Pass	Vertical
2	99.2719	10.88	1.16	-32.06	37.50	17.48	43.50	26.02	Pass	Vertical
3	140.0200	7.20	1.39	-31.99	39.77	16.37	43.50	27.13	Pass	Vertical
4	208.9038	11.13	1.71	-31.94	43.35	24.25	43.50	19.25	Pass	Vertical
5	270.0260	12.60	1.96	-31.88	36.91	19.59	46.00	26.41	Pass	Vertical
6	742.5105	20.27	3.26	-32.11	35.09	26.51	46.00	19.49	Pass	Vertical

Transmitter Emission above 1GHz

Mode:	GFSK Transmitting	Channel:	2402
Remark:	/		

Suspected List

N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	3103.3603	33.24	4.71	-36.82	46.33	47.46	74.00	26.54	Pass	Horizontal
2	4804.0000	34.50	4.55	-36.15	40.83	43.73	74.00	30.27	Pass	Horizontal
3	6123.2373	35.82	5.26	-36.27	44.08	48.89	74.00	25.11	Pass	Horizontal
4	7206.0000	36.31	5.81	-36.43	41.41	47.10	74.00	26.90	Pass	Horizontal
5	7653.1653	36.54	6.16	-36.60	44.37	50.47	74.00	23.53	Pass	Horizontal
6	9608.0000	37.64	6.63	-36.79	42.72	50.20	74.00	23.80	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2402
Remark:	/		

Suspected List

N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2964.7930	33.14	4.44	-36.77	47.28	48.09	74.00	25.91	Pass	Vertical
2	4804.0000	34.50	4.55	-36.15	41.14	44.04	74.00	29.96	Pass	Vertical
3	6368.9619	35.87	5.40	-36.20	43.15	48.22	74.00	25.78	Pass	Vertical
4	7206.0000	36.31	5.81	-36.43	40.82	46.51	74.00	27.49	Pass	Vertical
5	8431.2931	36.57	6.37	-36.35	44.34	50.93	74.00	23.07	Pass	Vertical
6	9608.0000	37.64	6.63	-36.79	42.55	50.03	74.00	23.97	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2441
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	2033.4067	31.75	3.53	-36.78	47.34	45.84	74.00	28.16	Pass	Horizontal
2	4882.0000	34.50	4.81	-36.10	40.26	43.47	74.00	30.53	Pass	Horizontal
3	6471.3471	35.89	5.50	-36.24	43.39	48.54	74.00	25.46	Pass	Horizontal
4	7323.0000	36.42	5.85	-36.41	40.76	46.62	74.00	27.38	Pass	Horizontal
5	8378.6379	36.55	6.26	-36.44	43.86	50.23	74.00	23.77	Pass	Horizontal
6	9764.0000	37.71	6.71	-36.83	42.61	50.20	74.00	23.80	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2441
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Result	Polarity
1	3460.2460	33.38	4.44	-36.57	45.29	46.54	74.00	27.46	Pass	Vertical
2	4381.7132	34.33	4.54	-36.22	43.87	46.52	74.00	27.48	Pass	Vertical
3	4882.0000	34.50	4.81	-36.10	40.48	43.69	74.00	30.31	Pass	Vertical
4	6467.4467	35.89	5.50	-36.24	42.98	48.13	74.00	25.87	Pass	Vertical
5	7323.0000	36.42	5.85	-36.41	40.28	46.14	74.00	27.86	Pass	Vertical
6	9764.0000	37.71	6.71	-36.83	42.59	50.18	74.00	23.82	Pass	Vertical

Mode:	GFSK Transmitting	Channel:	2480
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	3905.8656	33.72	4.34	-36.05	44.23	46.24	74.00	27.76	Pass	Horizontal
2	4960.0000	34.50	4.82	-36.20	40.65	43.77	74.00	30.23	Pass	Horizontal
3	6364.0864	35.87	5.42	-36.19	43.07	48.17	74.00	25.83	Pass	Horizontal
4	7440.0000	36.54	5.85	-36.34	39.74	45.79	74.00	28.21	Pass	Horizontal
5	8424.4674	36.57	6.36	-36.33	44.00	50.60	74.00	23.40	Pass	Horizontal
6	9920.0000	37.77	6.79	-36.82	39.88	47.62	74.00	26.38	Pass	Horizontal

Mode:	GFSK Transmitting	Channel:	2480
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	3895.1395	33.72	4.34	-36.08	44.58	46.56	74.00	27.44	Pass	Vertical
2	4960.0000	34.50	4.82	-36.20	41.41	44.53	74.00	29.47	Pass	Vertical
3	5655.1905	35.25	4.98	-36.04	43.25	47.44	74.00	26.56	Pass	Vertical
4	6434.2934	35.89	5.45	-36.28	43.43	48.49	74.00	25.51	Pass	Vertical
5	7440.0000	36.54	5.85	-36.34	38.81	44.86	74.00	29.14	Pass	Vertical
6	9920.0000	37.77	6.79	-36.82	40.39	48.13	74.00	25.87	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	/		

Suspected List

N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	3251.5752	33.30	4.45	-36.81	46.43	47.37	74.00	26.63	Pass	Horizontal
2	4804.0000	34.50	4.55	-36.15	40.78	43.68	74.00	30.32	Pass	Horizontal
3	5898.9649	35.64	5.06	-36.24	42.93	47.39	74.00	26.61	Pass	Horizontal
4	7206.0000	36.31	5.81	-36.43	40.83	46.52	74.00	27.48	Pass	Horizontal
5	8403.9904	36.56	6.34	-36.28	43.53	50.15	74.00	23.85	Pass	Horizontal
6	9608.0000	37.64	6.63	-36.79	42.02	49.50	74.00	24.50	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2402
Remark:	/		

Suspected List

N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	2154.2308	31.92	3.65	-36.32	47.51	46.76	74.00	27.24	Pass	Vertical
2	2988.7978	33.18	4.52	-36.73	47.07	48.04	74.00	25.96	Pass	Vertical
3	4804.0000	34.50	4.55	-36.15	40.77	43.67	74.00	30.33	Pass	Vertical
4	6533.7534	35.91	5.39	-36.16	43.16	48.30	74.00	25.70	Pass	Vertical
5	7206.0000	36.31	5.81	-36.43	41.08	46.77	74.00	27.23	Pass	Vertical
6	9608.0000	37.64	6.63	-36.79	41.95	49.43	74.00	24.57	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2441
Remark:	/		

Suspected List

N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	2964.7930	33.14	4.44	-36.77	46.59	47.40	74.00	26.60	Pass	Horizontal
2	4882.0000	34.50	4.81	-36.10	41.23	44.44	74.00	29.56	Pass	Horizontal
3	5226.1476	34.73	4.88	-35.91	44.22	47.92	74.00	26.08	Pass	Horizontal
4	6393.3393	35.88	5.33	-36.31	43.11	48.01	74.00	25.99	Pass	Horizontal
5	7323.0000	36.42	5.85	-36.41	40.76	46.62	74.00	27.38	Pass	Horizontal
6	9764.0000	37.71	6.71	-36.83	42.77	50.36	74.00	23.64	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2441
Remark:	/		

Suspected List

N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	3313.0063	33.33	4.56	-36.77	46.56	47.68	74.00	26.32	Pass	Vertical
2	4882.0000	34.50	4.81	-36.10	39.73	42.94	74.00	31.06	Pass	Vertical
3	6340.6841	35.87	5.46	-36.15	42.63	47.81	74.00	26.19	Pass	Vertical
4	7323.0000	36.42	5.85	-36.41	40.30	46.16	74.00	27.84	Pass	Vertical
5	7677.5428	36.53	6.21	-36.47	43.89	50.16	74.00	23.84	Pass	Vertical
6	9764.0000	37.71	6.71	-36.83	41.63	49.22	74.00	24.78	Pass	Vertical

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	3391.9892	33.36	4.55	-36.65	45.64	46.90	74.00	27.10	Pass	Horizontal
2	4960.0000	34.50	4.82	-36.20	40.33	43.45	74.00	30.55	Pass	Horizontal
3	7010.5761	36.11	5.68	-36.17	43.42	49.04	74.00	24.96	Pass	Horizontal
4	7440.0000	36.54	5.85	-36.34	39.15	45.20	74.00	28.80	Pass	Horizontal
5	8365.9616	36.55	6.22	-36.56	44.30	50.51	74.00	23.49	Pass	Horizontal
6	9920.0000	37.77	6.79	-36.82	39.85	47.59	74.00	26.41	Pass	Horizontal

Mode:	$\pi/4$ DQPSK Transmitting	Channel:	2480
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	2892.3785	33.03	4.36	-36.67	47.19	47.91	74.00	26.09	Pass	Vertical
2	4960.0000	34.50	4.82	-36.20	40.91	44.03	74.00	29.97	Pass	Vertical
3	5746.8497	35.39	4.95	-36.13	43.01	47.22	74.00	26.78	Pass	Vertical
4	7440.0000	36.54	5.85	-36.34	39.82	45.87	74.00	28.13	Pass	Vertical
5	7775.0525	36.49	6.17	-36.60	44.68	50.74	74.00	23.26	Pass	Vertical
6	9920.0000	37.77	6.79	-36.82	40.66	48.40	74.00	25.60	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	3570.4320	33.46	4.40	-36.50	45.87	47.23	74.00	26.77	Pass	Horizontal
2	4804.0000	34.50	4.55	-36.15	39.73	42.63	74.00	31.37	Pass	Horizontal
3	5537.2037	35.06	5.16	-36.07	43.63	47.78	74.00	26.22	Pass	Horizontal
4	7206.0000	36.31	5.81	-36.43	42.03	47.72	74.00	26.28	Pass	Horizontal
5	8385.4635	36.55	6.28	-36.38	43.56	50.01	74.00	23.99	Pass	Horizontal
6	9608.0000	37.64	6.63	-36.79	42.59	50.07	74.00	23.93	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2402
Remark:	/		

Suspected List

N O	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	2978.7958	33.17	4.49	-36.76	47.08	47.98	74.00	26.02	Pass	Vertical
2	4804.0000	34.50	4.55	-36.15	40.90	43.80	74.00	30.20	Pass	Vertical
3	6471.3471	35.89	5.50	-36.24	42.82	47.97	74.00	26.03	Pass	Vertical
4	7206.0000	36.31	5.81	-36.43	41.08	46.77	74.00	27.23	Pass	Vertical
5	7678.5179	36.53	6.21	-36.47	44.64	50.91	74.00	23.09	Pass	Vertical
6	9608.0000	37.64	6.63	-36.79	42.13	49.61	74.00	24.39	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2441
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	3060.4560	33.22	4.81	-36.86	46.87	48.04	74.00	25.96	Pass	Horizontal
2	4882.0000	34.50	4.81	-36.10	40.54	43.75	74.00	30.25	Pass	Horizontal
3	6365.0615	35.87	5.41	-36.19	43.12	48.21	74.00	25.79	Pass	Horizontal
4	7323.0000	36.42	5.85	-36.41	40.42	46.28	74.00	27.72	Pass	Horizontal
5	8409.8410	36.56	6.34	-36.28	44.13	50.75	74.00	23.25	Pass	Horizontal
6	9764.0000	37.71	6.71	-36.83	42.31	49.90	74.00	24.10	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2441
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	3906.8407	33.73	4.34	-36.06	44.83	46.84	74.00	27.16	Pass	Vertical
2	4882.0000	34.50	4.81	-36.10	40.33	43.54	74.00	30.46	Pass	Vertical
3	7000.8251	36.10	5.68	-36.18	43.51	49.11	74.00	24.89	Pass	Vertical
4	7323.0000	36.42	5.85	-36.41	41.67	47.53	74.00	26.47	Pass	Vertical
5	8411.7912	36.56	6.35	-36.30	43.87	50.48	74.00	23.52	Pass	Vertical
6	9764.0000	37.71	6.71	-36.83	42.15	49.74	74.00	24.26	Pass	Vertical

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	4385.6136	34.34	4.54	-36.20	43.99	46.67	74.00	27.33	Pass	Horizontal
2	4960.0000	34.50	4.82	-36.20	40.89	44.01	74.00	29.99	Pass	Horizontal
3	6408.9409	35.88	5.35	-36.33	43.65	48.55	74.00	25.45	Pass	Horizontal
4	7440.0000	36.54	5.85	-36.34	39.54	45.59	74.00	28.41	Pass	Horizontal
5	8404.9655	36.56	6.34	-36.28	43.63	50.25	74.00	23.75	Pass	Horizontal
6	9920.0000	37.77	6.79	-36.82	41.29	49.03	74.00	24.97	Pass	Horizontal

Mode:	8DPSK Transmitting	Channel:	2480
Remark:	/		

Suspected List

NO	Freq. [MHz]	Ant Factor [dB]	Cable loss [dB]	Pream gain [dB]	Reading [dB μ V]	Level [dB μ V/m]	Limit [dB μ V/m]	Magin [dB]	Result	Polarity
1	3508.0258	33.41	4.48	-36.57	46.45	47.77	74.00	26.23	Pass	Vertical
2	4960.0000	34.50	4.82	-36.20	41.40	44.52	74.00	29.48	Pass	Vertical
3	5794.6295	35.47	4.98	-36.03	43.96	48.38	74.00	25.62	Pass	Vertical
4	7440.0000	36.54	5.85	-36.34	39.67	45.72	74.00	28.28	Pass	Vertical
5	8419.5920	36.57	6.36	-36.33	44.28	50.88	74.00	23.12	Pass	Vertical
6	9920.0000	37.77	6.79	-36.82	40.73	48.47	74.00	25.53	Pass	Vertical

Note:

1) Through Pre-scan transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of $\pi/4$ DQPSK modulation type, the 3-DH5 of data type is the worse case of 8DPSK modulation type in transmitter mode.

2) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak values are measured.

3) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Preamplifier Factor - Antenna Factor - Cable Factor

4) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

PHOTOGRAPHS OF TEST SETUP

Test model No.: IO Pro



Radiated spurious emission Test Setup-1(Below 1GHz)



Radiated spurious emission Test Setup-2(Below 30M)



Radiated spurious emission Test Setup-3(Above 1GHz)



Conducted Emissions Test Setup

PHOTOGRAPHS OF EUT Constructional Details

Refer to Report No.EED32K00215401 for EUT external and internal photo.

*** End of Report ***

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.