



FCC Test Report

Report No.: ULC-ESH-P20120723B-3

FCC ID: 2AQOB-LWFPRO

Product: WI-FI PRO CEILING SPEAKERS

Model: LWFPRO, LWFPRO/IP

Received Date: Dec.09, 2020

Test Date: Dec.10, 2020 to May.07, 2021

Issued Date: May.07, 2021

Applicant: Lithe Audio Ltd.

Address: Unit 4 IO Centre, Salbrook Road Industrial Estate, Salbrook Road, Salfords, Redhill, Surrey, RH1 5GJ. UK

Manufacturer: Lithe Audio Ltd.

Address: Unit 4 IO Centre, Salbrook Road Industrial Estate, Salbrook Road, Salfords, Redhill, Surrey, RH1 5GJ. UK

Issued By: BUREAU VERITAS ADT (Shanghai) Corporation

Lab Address: No. 829, Xinzhuang Road, Shanghai, P.R.China (201612)



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



Table of Contents

Release Control Record	5
1 Certificate of Conformity	6
2 Summary of Test Results	7
2.1 Test Instruments	8
2.2 Measurement Uncertainty	9
2.3 Modification Record	9
3 General Information	10
3.1 General Description of EUT	10
3.2 Description of Test Modes	11
3.2.1 Test Mode Applicability:	12
3.2.2 Test Condition:	13
3.3 Description of Support Units	14
3.4 General Description of Applied Standards	14
4 Test Procedure and Results	15
4.1 AC Power Conducted Emission Measurement	15
4.1.1 Limit	15
4.1.2 Test Setup	15
4.1.3 Test Procedures	15
4.1.4 Deviation of Test Standard	16
4.1.5 Test Results	17
4.2 20dB Bandwidth	21
4.2.1 Limit	21
4.2.2 Test Setup	21
4.2.3 Test Procedures	21
4.2.4 Deviation of Test Standard	21
4.2.5 EUT Operating Condition	21
4.2.6 Test Results	22
4.3 Conducted Peak Output Power	23
4.3.1 Limit	23
4.3.2 Test Setup	23
4.3.3 Test Procedures	23
4.3.4 Deviation of Test Standard	23



4.3.5 EUT Operating Condition	23
4.3.6 Test Results	24
4.4 Carrier Frequency Separation	31
4.4.1 Limit	31
4.4.2 Test Setup.....	31
4.4.3 Test Procedures.....	31
4.4.4 Deviation of Test Standard.....	31
4.4.5 Test Results	32
4.5 Number of Hopping Frequencies	33
4.5.1 Limit	33
4.5.2 Test Setup.....	33
4.5.3 Test Procedures.....	33
4.5.4 Deviation of Test Standard.....	33
4.5.5 Test Results	34
4.6 Dwell Time	35
4.6.1 Limit	35
4.6.2 Test Setup.....	35
4.6.3 Test Procedures.....	35
4.6.4 Deviation of Test Standard.....	35
4.6.5 Test Results	36
4.7 Conducted Band Edges Measurement	37
4.7.1 Limit	37
4.7.2 Test Setup.....	37
4.7.3 Test Procedures.....	37
4.7.4 Deviation of Test Standard.....	37
4.7.5 Test Result.....	38
4.8 Conducted Spurious Emissions	39
4.8.1 Limit	39
4.8.2 Test Setup.....	39
4.8.3 Test Procedures.....	39
4.8.4 Deviation of Test Standard.....	39
4.8.5 Test Result.....	40
4.9 Emissions in restricted frequency bands	41



4.9.1 Test Limit	41
4.9.2 Test Procedure Reference.....	42
4.9.3 Test Procedures.....	42
4.9.4 Test Setup.....	43
4.9.5 Test Results	44
4.10 Radiated Emission Measurement	50
4.10.1 Limits	50
4.10.2 Test Procedures.....	50
4.10.3 52	
4.10.4 Deviation from Test Standard	52
4.10.5 Test Setup.....	52
4.10.6 EUT Operating Conditions.....	53
4.10.7 Test Results	53
5 Pictures of Test Arrangements	61



BUREAU
VERITAS

Release Control Record

Issue No.	Description	Date Issued
ULC-ESH-P20120723B-3	Original release	May.07, 2021



1 Certificate of Conformity

Product: WI-FI PRO CEILING SPEAKERS

Brand: --

Model: LWFPRO, LWFPRO/IP

Applicant: Lithe Audio Ltd.

Test Date: Dec.10, 2020 to May.07, 2021

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10:2013

The above equipment has been tested by **BUREAU VERITAS ADT (Shanghai) Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :

A handwritten signature in black ink, appearing to read "Scott XU".

, **Date:**

May.07, 2021

Scott XU

Project Engineer

Approved by :



, **Date:**

May.07, 2021

Daniel SUN

EMC Lab Manager



2 Summary of Test Results

The EUT has been tested according to the following specifications:

47 CFR FCC Part 15, Subpart C (SECTION 15.247)			
FCC Clause	Test Item	Result	Remarks
15.203	Antenna Requirement	PASS	No antenna connector is used.
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit.
15.247(a) (1)	20dB Bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted Peak Output Power	PASS	Meet the requirement of limit.
15.247(a)(1)	Carrier Frequency Separation	PASS	Meet the requirement of limit.
15.247(a)(1) (iii)	Number of Hopping Frequencies	PASS	Meet the requirement of limit.
15.247(a)(1) (iii)	Dwell Time	PASS	Meet the requirement of limit.
15.247(d)	Conducted Band Edges Measurement	PASS	Meet the requirement of limit.
15.247(d)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
15.247(d)	Emissions in restricted frequency bands	PASS	Meet the requirement of limit.
15.205 / 15.209 / 15.247(d)	Radiated Emissions	PASS	Meet the requirement of limit.

Note: We verified that the power of the module is slightly less than that of the original case, so we quoted the data of the conducted part of original case.



2.1 Test Instruments

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Hybrid Antenna(25MHz-1.5GHz)	Schwarzbeck	VULB9168	E1A1012	Jul.29, 20	Jul.28, 22
Horn Antenna(1GHz -18GHz)	Schwarzbeck	BBHA9120D	E1A1017	Aug.25, 20	Aug.24, 22
Double Ridge Horn Antenna(18G-40G)	COM-POWER	AH-840	E1A1040	Jul.15, 20	Jul.14, 22
Pre-Amplifier(100kHz-1.3GHz)	Agilent	8447D	E1A2001	Apr.19, 21	Apr.18, 22
Pre-Amplifier(0.5GHz-18GHz)	EMCI	EMC184045SE	E1A2009	Jul.06, 20	Jul.05, 21
Pre-Amplifier(18GHz-40GHz)	EMCI	EMC051845SE	E1A2008	Jul.06, 20	Jul.05, 21
EMI test receiver	R&S	ESR7	E1R1005	Apr.19, 21	Apr.18, 22
Spectrum Analyzer	Keysight	N9030B	E1S1003	Jul.23, 20	Jul.22, 21
Spectrum Analyzer	Keysight	N9020A	E1S1004	Mar.02, 21	Mar.01, 22
EMI test receiver	R&S	ESCS30	E1R1001	May.12, 20	May.11, 21
LISN	R&S	ENV216	E1L1011	May.12, 20	May.11, 21
Humidity&Temp Tester	Baolima	WS508	E1H1011	Apr.02, 21	Apr.01, 22
RF Control Unit	Toscend	JS0806-2	E1C5003	N/A	N/A
Test Software	ADT	ADT_COND_V7 .3.1	N/A	N/A	N/A
Test Software	Toscend	JS32-RE	N/A	N/A	N/A
Test Software	Toscend	JS1120	N/A	N/A	N/A
Test Software	Toscend	JS1120-3	N/A	N/A	N/A



2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.83 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.36 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	3.47 dB
	6GHz ~ 18GHz	3.75 dB
	18GHz ~ 40GHz	3.30 dB

2.3 Modification Record

There were no modifications required for compliance.



3 General Information

3.1 General Description of EUT

Product	WI-FI PRO CEILING SPEAKERS
Brand	--
Model	LWFPRO, LWFPRO/IP
Test Model	LWFPRO
Model Discrepancy	The two models are same as each other except for color of enclosure.
Power Rating	100-240V~, 50/60Hz, 2.0A for adapter; 24.0Vdc for WI-FI CEILING SPEAKERS
Modulation Type	GFSK, π/4-DQPSK, 8DPSK
Modulation Technology	BT-EDR, FHSS
Operating Frequency	2402MHz ~ 2480MHz
Number of Channel	79
Output Power	6.94dBm
Antenna Type	PCB antenna
Antenna Connector	--
Antenna Gain	3.5dBi

Note:

1. For more details, please refer to the User's manual of the EUT.
2. The EUT contains two wireless modules.

The wireless module of model LS9AD-AC11DBT-GV (FCC ID: 2ADBM-LS9ADAC11DBT) supports BT/WIFI function.

The wireless module of model 444-2250 (FCC ID: UA9601) supports WIFI 5G function.



3.2 Description of Test Modes

79 channels are provided for BT-EDR mode:

Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)	Channel	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

3.2.1 Test Mode Applicability:

EUT Configure Mode	Applicable to				Description
	RE ≥ 1G	RE < 1G	PLC	APCM	
-	√	√	-	√	-

Where **RE≥1G:** Radiated Emission above 1GHz

RE≤1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	78	FHSS	GFSK	DH5

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0	FHSS	GFSK	DH5



Antenna Port Conducted Measurement

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	FHSS	GFSK	DH5
-	0 to 78	0, 39, 78	FHSS	8DPSK	3DH5

3.2.2 Test Condition:

Applicable to	Normal Environmental Conditions	Normal Input Power
RE ≥ 1G	23deg. C, 58%RH	AC120V 60Hz
RE < 1G	23deg. C, 58%RH	AC120V 60Hz
PLC	22deg. C, 54%RH	AC120V 60Hz
APCM	25deg. C, 60%RH	AC120V 60Hz



3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standard:

FCC Part 15, Subpart C (15.247)

FCC DA 00705

ANSI C63.10:2013

All relaxed test items have been performed and recorded as per the above standard.

4 Test Procedure and Results

4.1 AC Power Conducted Emission Measurement


4.1.1 Limit

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.1.2 Test Setup

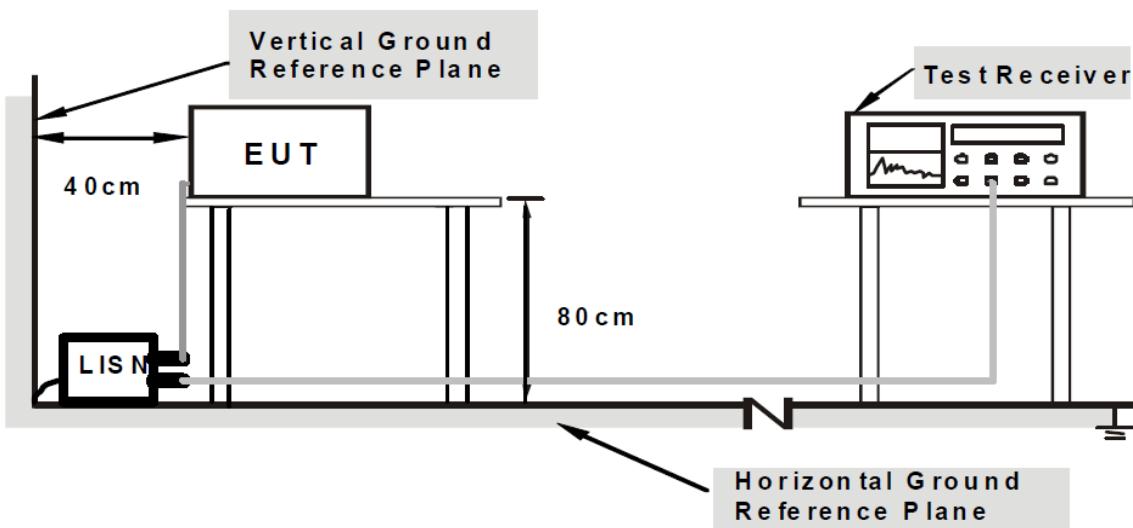

4.1.3 Test Procedures

- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.




4.1.4 Deviation of Test Standard

No deviation.



4.1.5 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 120V, 60Hz		

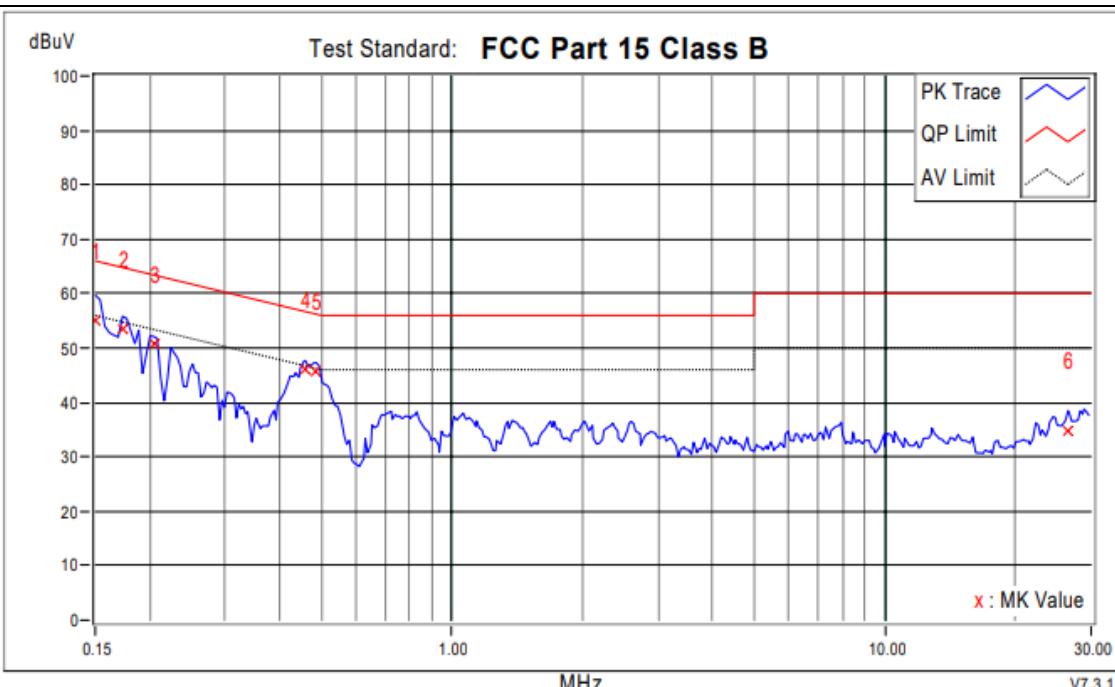


	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes	
No.	MHz		dB	QP	AV	QP	AV	QP	AV	QP	AV	
1	0.15000	9.87	45.24	27.39	55.11	37.26	66.00	56.00	-10.89	-18.74		
2	0.17346	9.88	43.60	29.24	53.48	39.12	64.79	54.79	-11.31	-15.67		
3	0.20474	9.88	40.92	28.90	50.80	38.78	63.42	53.42	-12.61	-14.63		
+4	0.45889	9.75	36.52	32.56	46.27	42.31	56.71	46.71	-10.44	-4.40		
5	0.48626	9.75	36.14	29.65	45.89	39.40	56.23	46.23	-10.34	-6.83		
6	26.54712	10.21	24.42	18.13	34.63	28.34	60.00	50.00	-25.37	-21.66		

REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 120V, 60Hz		

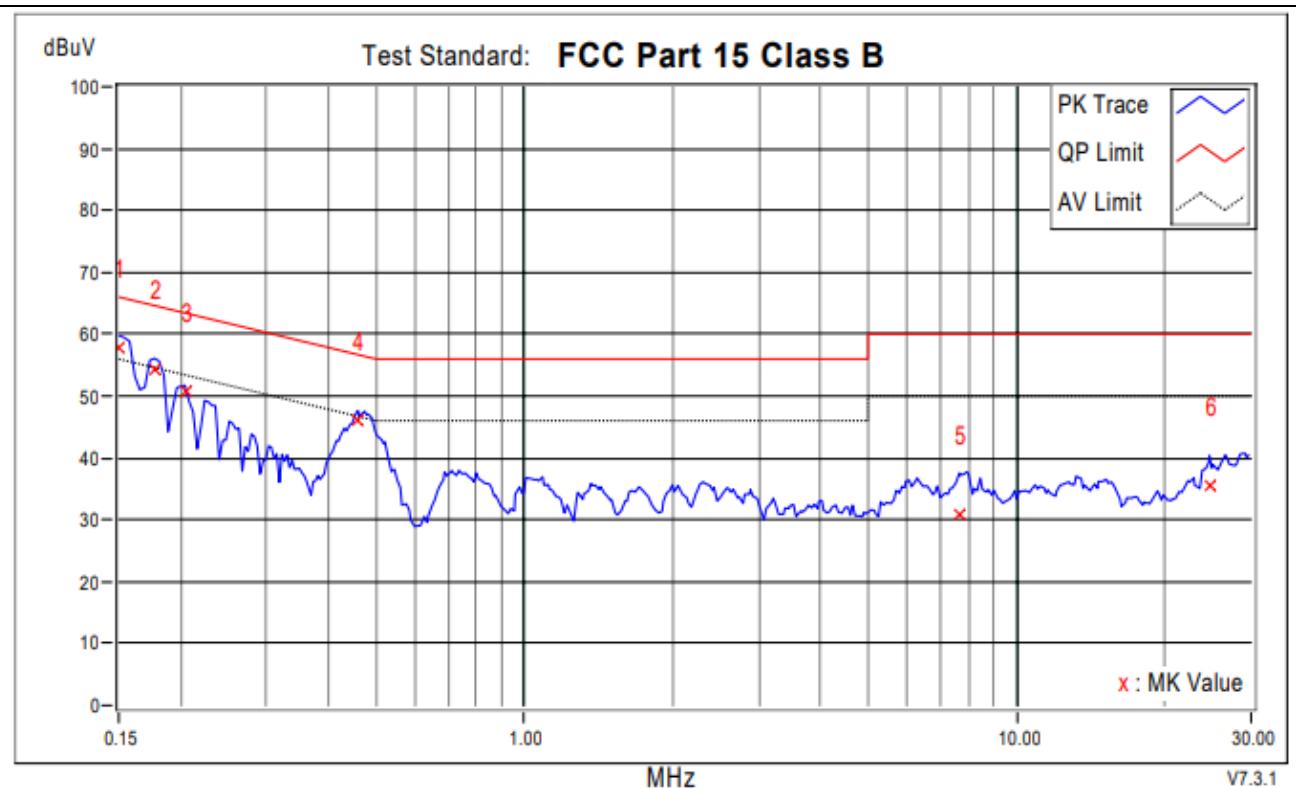


	Frequency	Corr. Factor	Reading dBuV		Emission dBuV		Limit dBuV		Margins dB		Notes
			No.	MHz	dB	QP	AV	QP	AV	QP	AV
1	0.15000	9.88	48.11	33.15	57.99	43.03	66.00	56.00	-8.01	-12.97	-
2	0.17737	9.85	44.55	30.70	54.40	40.55	64.61	54.61	-10.21	-14.06	-
3	0.20474	9.83	40.76	28.41	50.59	38.24	63.42	53.42	-12.82	-15.17	-
+4	0.45889	9.88	36.34	32.16	46.22	42.04	56.71	46.71	-10.49	-4.67	-
5	7.66655	10.22	20.59	13.27	30.81	23.49	60.00	50.00	-29.19	-26.51	-
6	24.68596	10.27	25.10	17.93	35.37	28.20	60.00	50.00	-24.63	-21.80	-

REMARKS:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 240V, 50Hz		

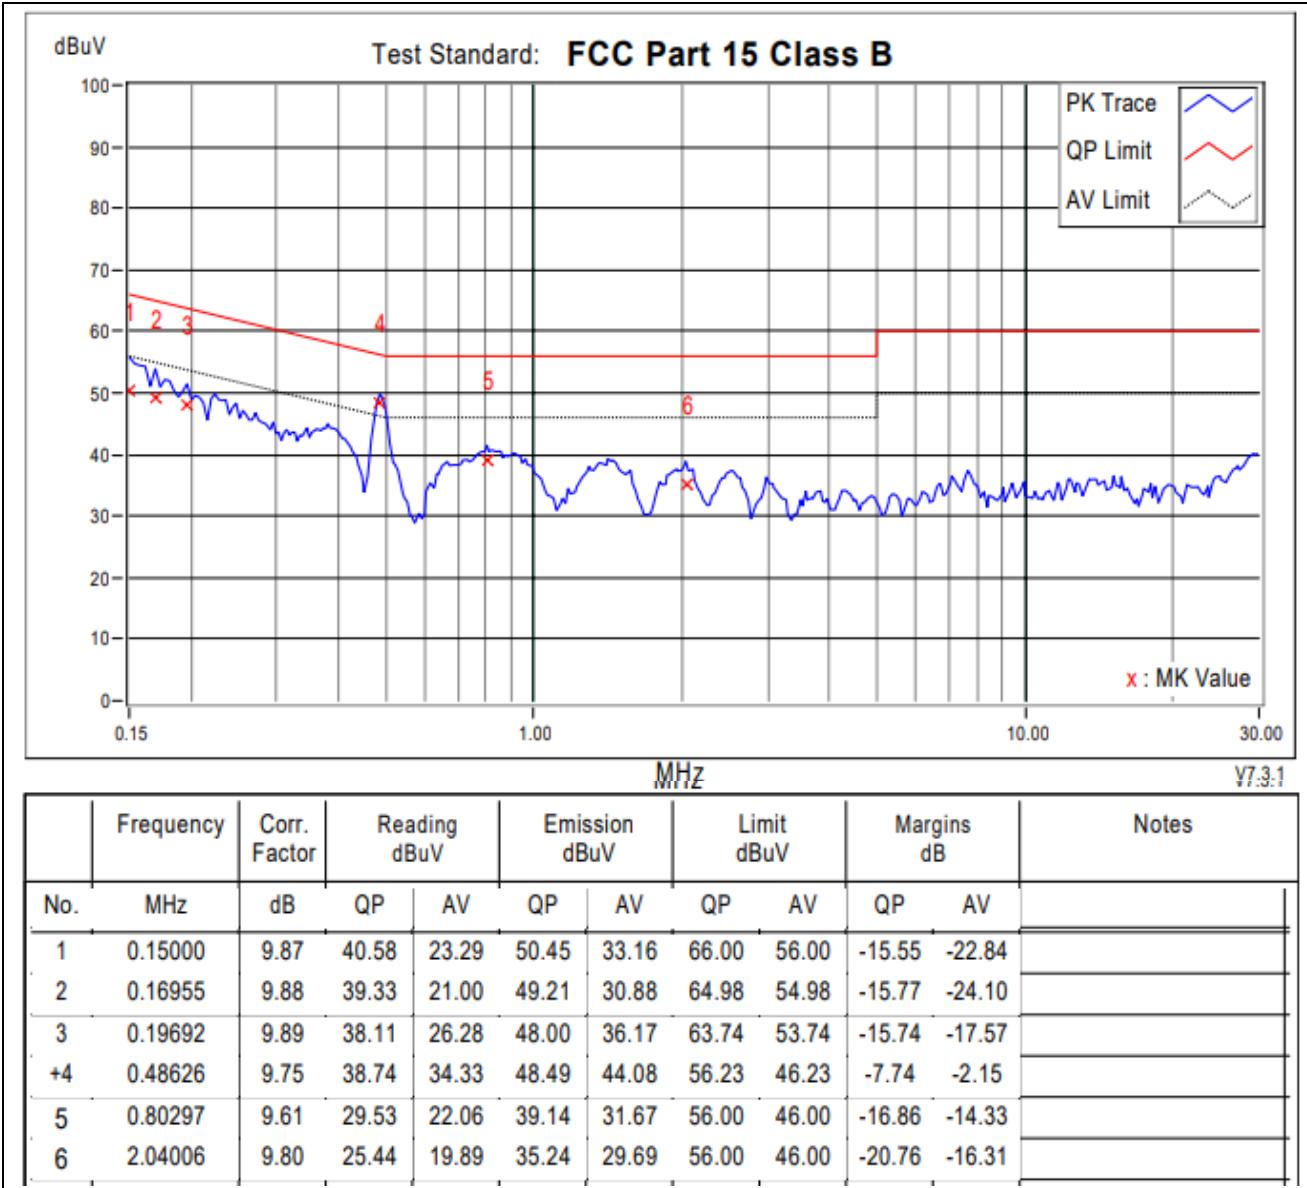
REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Power supply	AC 240V, 50Hz		

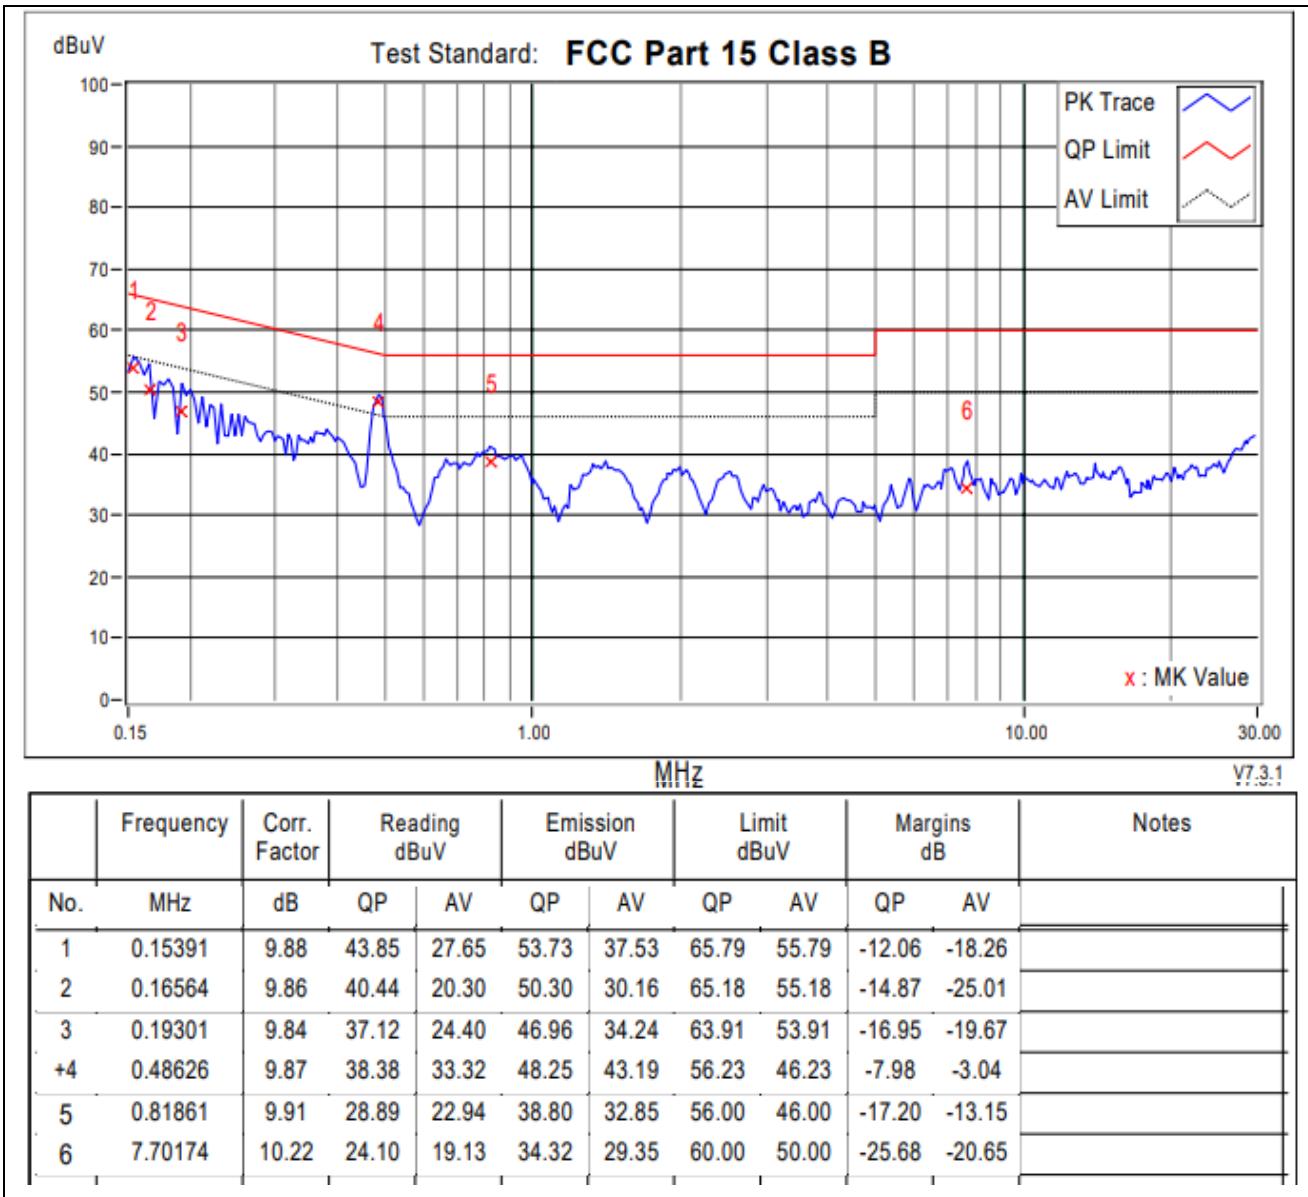

REMARKS:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

4.2 20dB Bandwidth

4.2.1 Limit

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dBbandwidth of hopping channel shell be a minimum limit for the hopping channel separation.

4.2.2 Test Setup

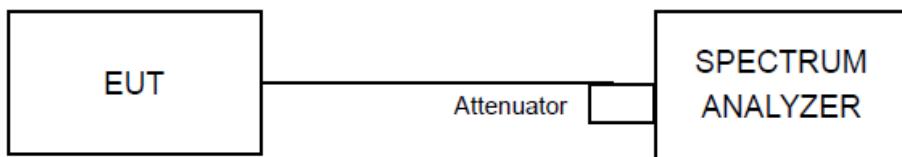

4.2.3 Test Procedures

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.2.4 Deviation of Test Standard

No deviation.

4.2.5 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



4.2.6 Test Results


The test results refer to module FCC ID: 2ADBM-LS9ADAC11DBT.

4.3 Conducted Peak Output Power

4.3.1 Limit

The Maximum Output Power Measurement is 125mW(21dBm).

4.3.2 Test Setup

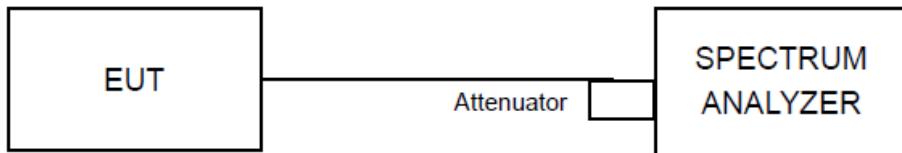

4.3.3 Test Procedures

- 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 2) RBW > 20 dB bandwidth of the emission being measured.
- 3) VBW \geq RBW.
- 4) Sweep: Auto.
- 5) Detector function: Peak.
- 6) Trace: Max hold.
 - b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

4.3.4 Deviation of Test Standard

No deviation.

4.3.5 EUT Operating Condition

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.3.6 Test Results

Test Mode	Antenna	Channel [MHz]	Power [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	6.94	<=30	PASS
	Ant2	2402	6.33	<=30	PASS
	Ant1	2441	6.61	<=30	PASS
	Ant2	2441	6.62	<=30	PASS
	Ant1	2480	6.80	<=30	PASS
	Ant2	2480	6.55	<=30	PASS
2DH5	Ant1	2402	2.44	<=30	PASS
	Ant2	2402	1.83	<=30	PASS
	Ant1	2441	3.02	<=30	PASS
	Ant2	2441	2.10	<=30	PASS
	Ant1	2480	3.19	<=30	PASS
	Ant2	2480	2.08	<=30	PASS
3DH5	Ant1	2402	2.80	<=30	PASS
	Ant2	2402	2.21	<=30	PASS
	Ant1	2441	3.32	<=30	PASS
	Ant2	2441	2.48	<=30	PASS
	Ant1	2480	3.59	<=30	PASS
	Ant2	2480	2.46	<=30	PASS



BUREAU
VERITAS


DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480

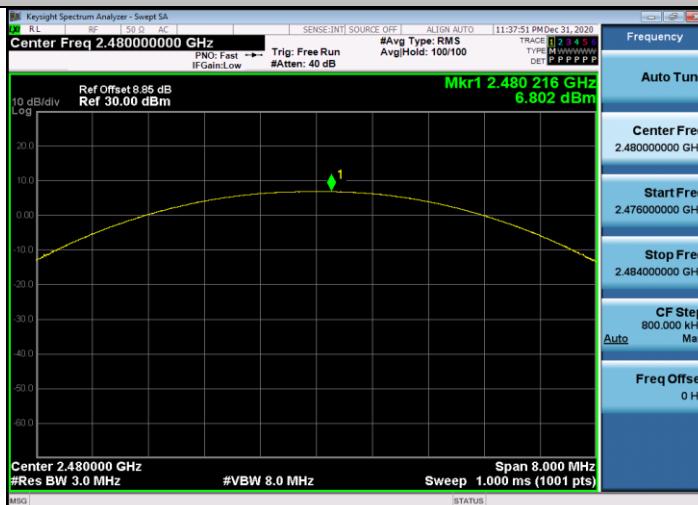



BUREAU
VERITAS

2DH5_Ant1_2402



2DH5_Ant1_2441



2DH5_Ant1_2480






BUREAU
VERITAS

3DH5_Ant1_2402



3DH5_Ant1_2441

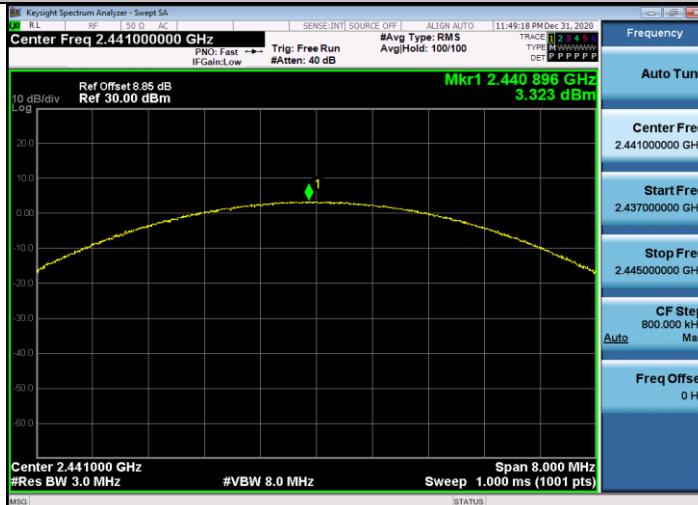

3DH5_Ant1_2480






BUREAU
VERITAS


DH5_Ant2_2402



DH5_Ant2_2441

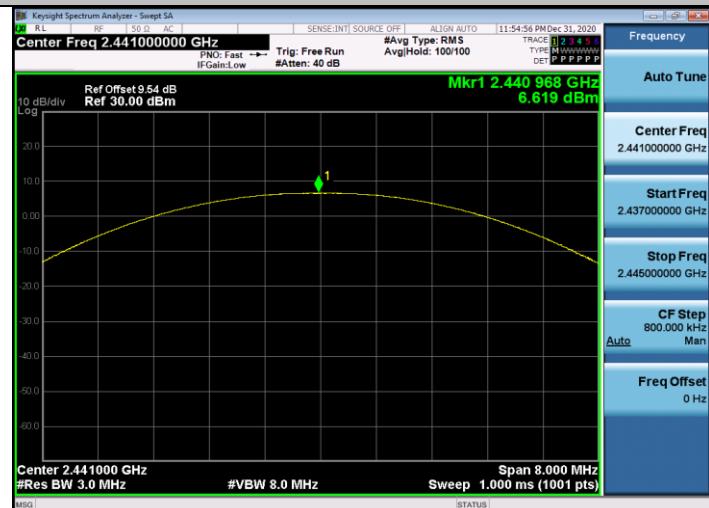

DH5_Ant2_2480

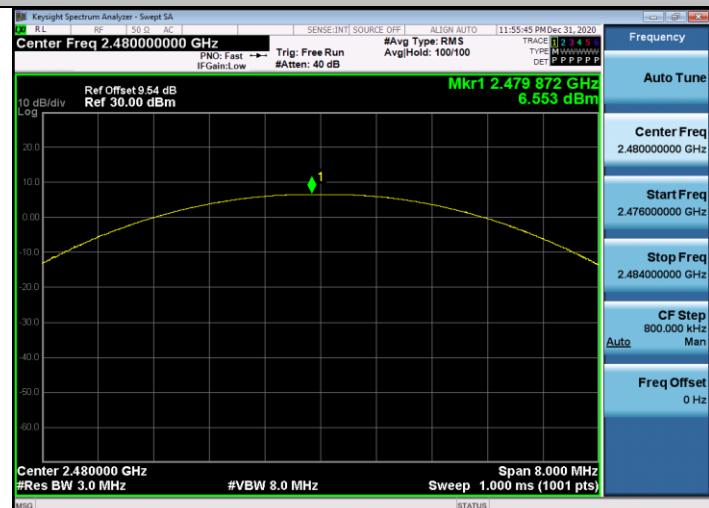



BUREAU
VERITAS


2DH5_Ant2_2402



2DH5_Ant2_2441



2DH5_Ant2_2480

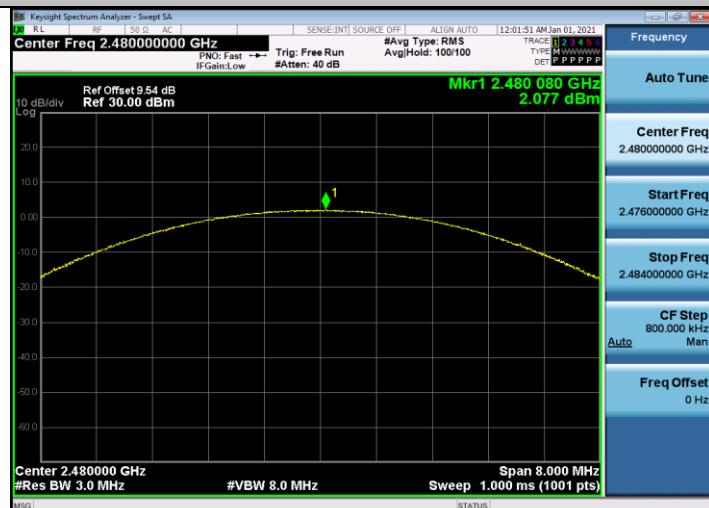



BUREAU
VERITAS

3DH5_Ant2_2402



3DH5_Ant2_2441



3DH5_Ant2_2480




4.4 Carrier Frequency Separation

4.4.1 Limit

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater)

4.4.2 Test Setup

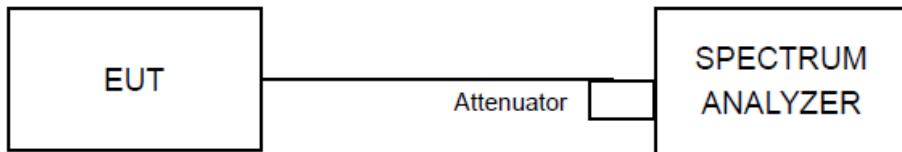

4.4.3 Test Procedures

Measurement Procedure REF

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- c. By using the MaxHold function record the separation of two adjacent channels.
- d. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.4.4 Deviation of Test Standard

No deviation.



4.4.5 Test Results


The test results refer to module FCC ID: 2ADBM-LS9ADAC11DBT.

4.5 Number of Hopping Frequencies

4.5.1 Limit

At least 15 channels frequencies, and should be equally spaced.

4.5.2 Test Setup

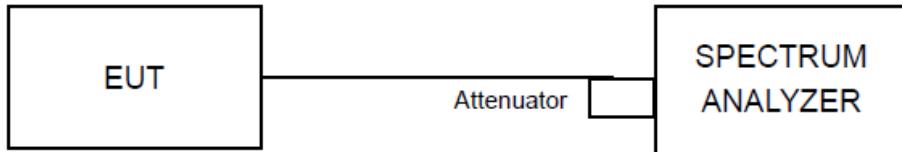

4.5.3 Test Procedures

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.5.4 Deviation of Test Standard

No deviation.



4.5.5 Test Results


The test results refer to module FCC ID: 2ADBM-LS9ADAC11DBT.

4.6 Dwell Time

4.6.1 Limit

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.6.2 Test Setup

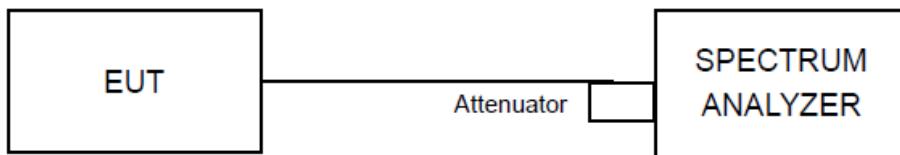

4.6.3 Test Procedures

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency to be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.6.4 Deviation of Test Standard

No deviation.



4.6.5 Test Results


The test results refer to module FCC ID: 2ADBM-LS9ADAC11DBT.

4.7 Conducted Band Edges Measurement

4.7.1 Limit

Below -20dB of the highest emission level of operating band (in 100kHz RBW).

4.7.2 Test Setup

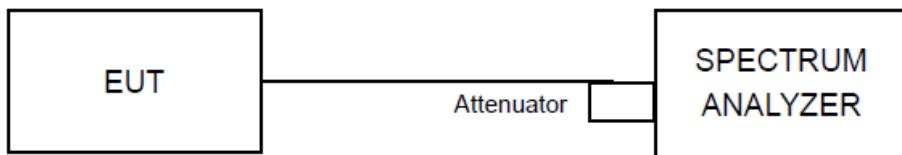

4.7.3 Test Procedures

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.7.4 Deviation of Test Standard

No deviation.



4.7.5 Test Result


The test results refer to module FCC ID: 2ADBM-LS9ADAC11DBT.

4.8 Conducted Spurious Emissions

4.8.1 Limit

Below –20dB of the highest emission level of operating band (in 100kHz RBW).

4.8.2 Test Setup

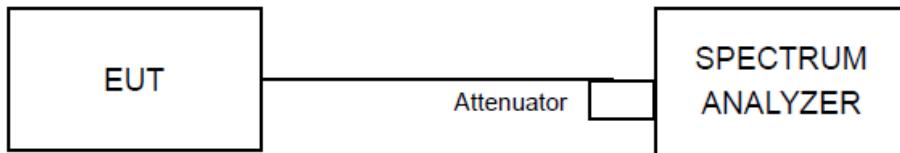

4.8.3 Test Procedures

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100 kHz and 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

4.8.4 Deviation of Test Standard

No deviation.



4.8.5 Test Result

The test results refer to module FCC ID: 2ADBM-LS9ADAC11DBT.



4.9 Emissions in restricted frequency bands

4.9.1 Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
1 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	(2)
13.36 - 13.41	--	--	--



All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

4.9.2 Test Procedure Reference

ANSI C63.10 Section 6.3 (General Requirements)

ANSI C63.10 Section 6.6 (Standard test method above 1GHz)

4.9.3 Test Procedures

Peak Field Strength Measurements


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)

8. 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
9. 2. RBW = 1MHz
10. 3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
11. If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
12. 4. Detector = Peak
13. 5. Sweep time = auto
14. 6. Trace mode = max hold
15. 7. Trace was allowed to stabilize

4.9.4 Test Setup

For Radiated emission above 1GHz

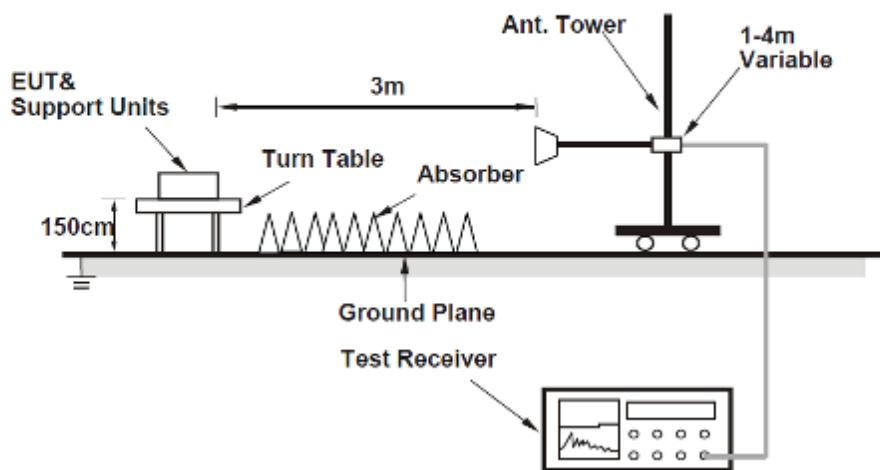




BUREAU
VERITAS

4.9.5 Test Results

Below is the worst test data


DH5-2402MHz/ Horizontal

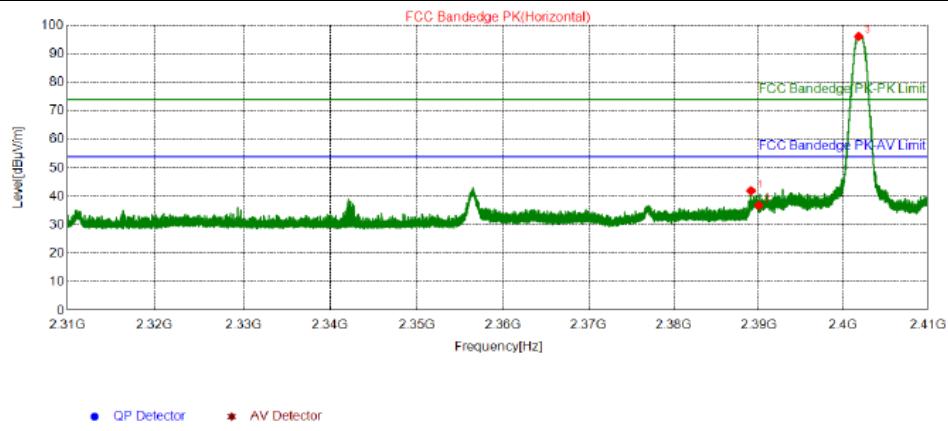

Suspected List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2389.0950	49.53	41.96	74.00	32.04	155	262	Horizontal	PK
2	2390.0000	44.40	36.83	74.00	37.17	155	262	Horizontal	PK
3	2401.8250	103.53	96.04	74.00	-22.04	155	293	Horizontal	PK


DH5-2402MHz/ Vertical

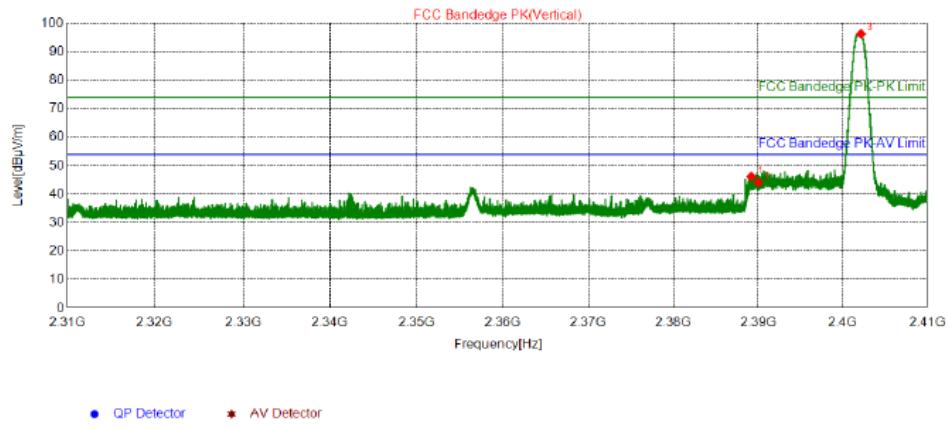

Suspected List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2389.1600	53.73	46.16	74.00	27.84	155	274	Vertical	PK
2	2390.0000	51.62	44.05	74.00	29.95	155	274	Vertical	PK
3	2402.1400	103.74	96.25	74.00	-22.25	155	205	Vertical	PK


DH5-2480MHz/ Horizontal

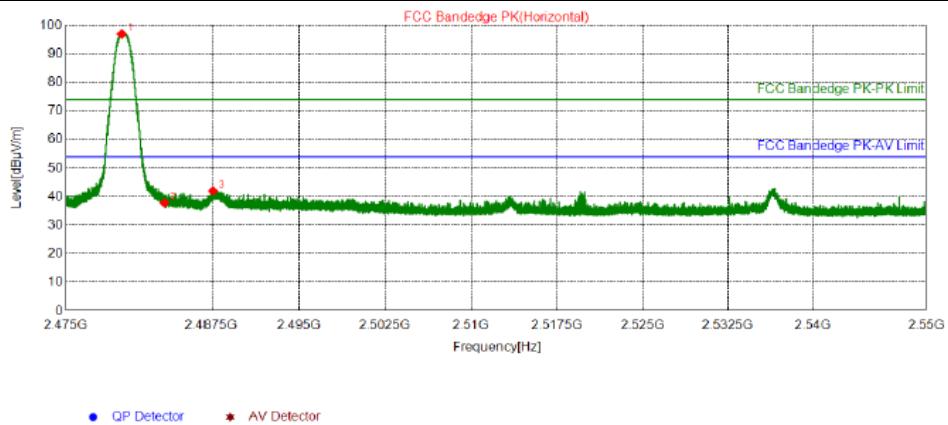

Suspected List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2479.8188	104.03	96.95	74.00	-22.95	155	328	Horizontal	PK
2	2483.5013	44.86	37.80	74.00	36.20	155	318	Horizontal	PK
3	2487.5738	48.99	41.95	74.00	32.05	155	328	Horizontal	PK


DH5-2480MHz/ Vertical

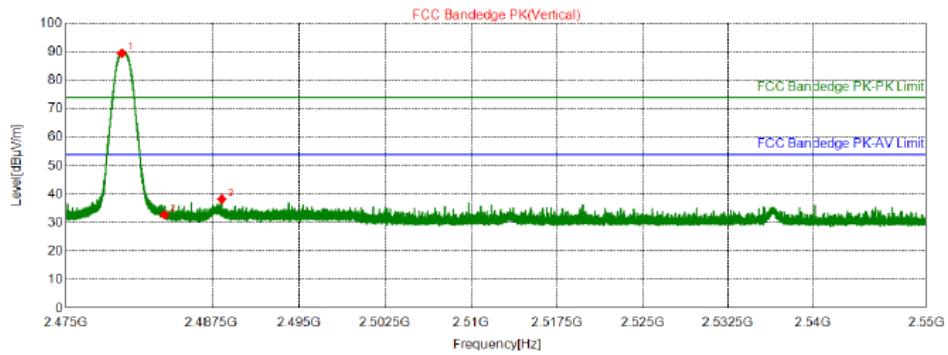

Suspected List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2479.8225	96.54	89.46	74.00	-15.46	155	0	Vertical	PK
2	2483.5050	39.90	32.84	74.00	41.16	155	147	Vertical	PK
3	2488.3425	45.33	38.29	74.00	35.71	155	264	Vertical	PK


2DH5-2402MHz/ Horizontal

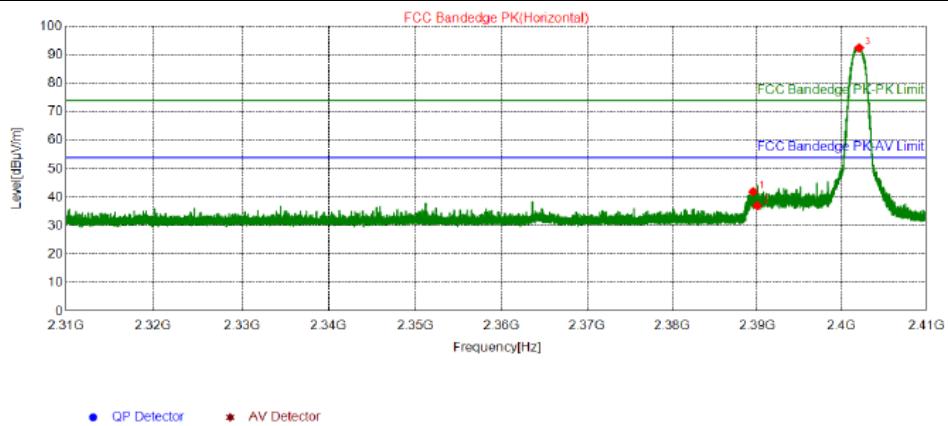

Suspected List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2389.5200	49.47	41.90	74.00	32.10	155	263	Horizontal	PK
2	2390.0000	44.58	37.01	74.00	36.99	155	263	Horizontal	PK
3	2402.0600	99.91	92.42	74.00	-18.42	155	303	Horizontal	PK


2DH5-2402MHz/ Vertical

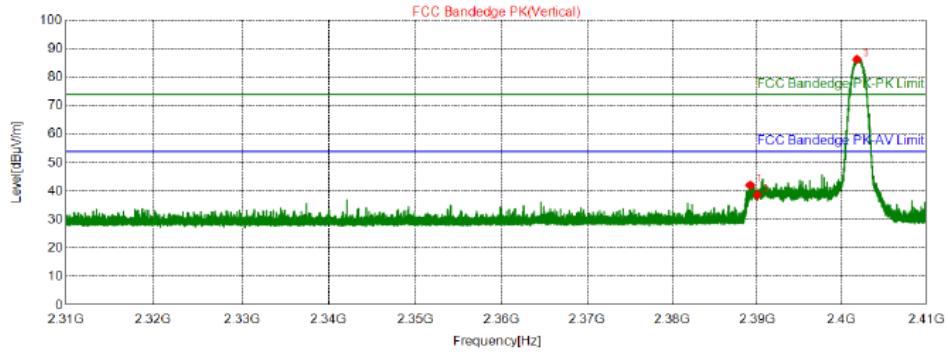

Suspected List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2389.1750	49.65	42.08	74.00	31.92	155	265	Vertical	PK
2	2390.0000	46.24	38.67	74.00	35.33	155	265	Vertical	PK
3	2401.8000	93.72	86.23	74.00	-12.23	155	205	Vertical	PK


2DH5-2480MHz/ Horizontal

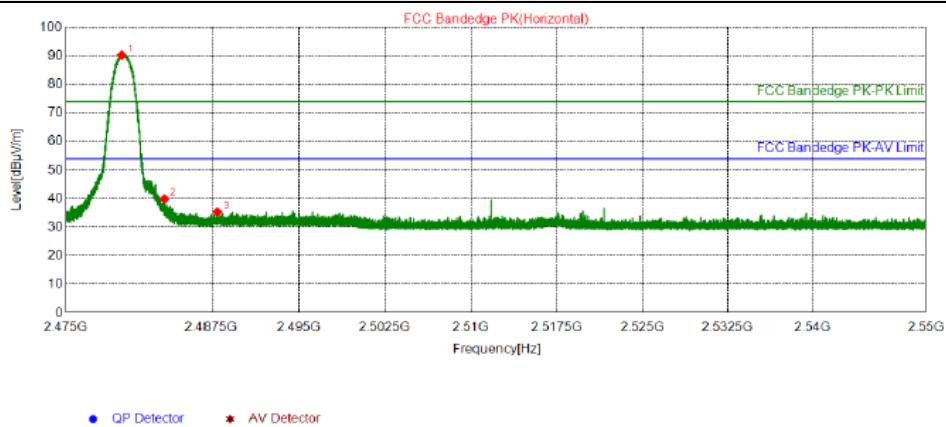

Suspected List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2479.8150	97.37	90.29	74.00	-16.29	155	304	Horizontal	PK
2	2483.5050	46.98	39.92	74.00	34.08	155	314	Horizontal	PK
3	2487.9638	42.39	35.35	74.00	38.65	155	176	Horizontal	PK

2DH5-2480MHz/ Vertical

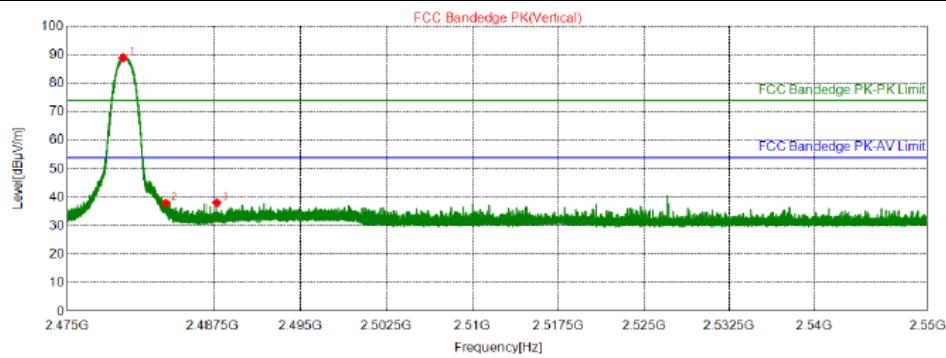


Suspected List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2479.8150	95.96	88.88	74.00	-14.88	155	16	Vertical	PK
2	2483.5050	45.01	37.95	74.00	36.05	155	106	Vertical	PK
3	2487.7838	45.14	38.10	74.00	35.90	155	274	Vertical	PK



BUREAU
VERITAS


3DH5-2402MHz/ Horizontal

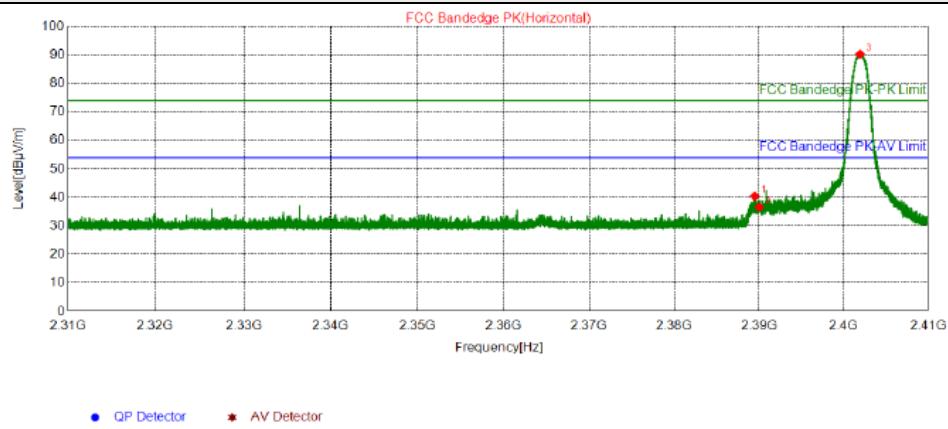

Suspected List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2389.4700	48.00	40.43	74.00	33.57	155	245	Horizontal	PK
2	2390.0000	44.10	36.53	74.00	37.47	155	255	Horizontal	PK
3	2401.9300	97.76	90.27	74.00	-16.27	155	284	Horizontal	PK

3DH5-2402MHz/ Vertical

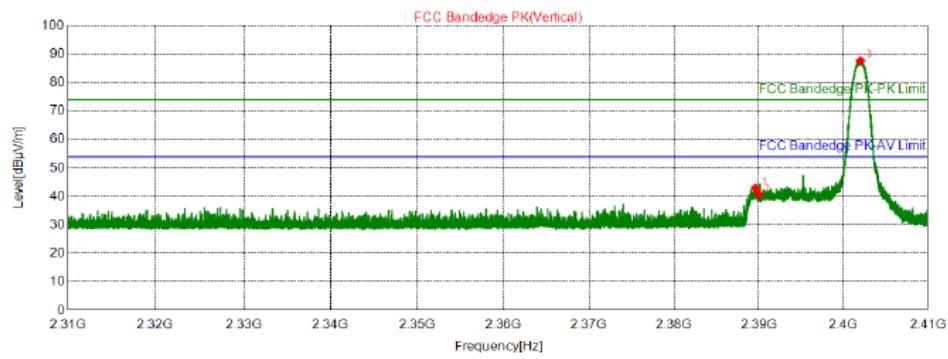


Suspected List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2389.5800	50.53	42.96	74.00	31.04	155	284	Vertical	PK
2	2390.0000	48.19	40.62	74.00	33.38	155	284	Vertical	PK
3	2402.0150	95.17	87.68	74.00	-13.68	155	215	Vertical	PK



BUREAU
VERITAS


3DH5-2480MHz/ Horizontal

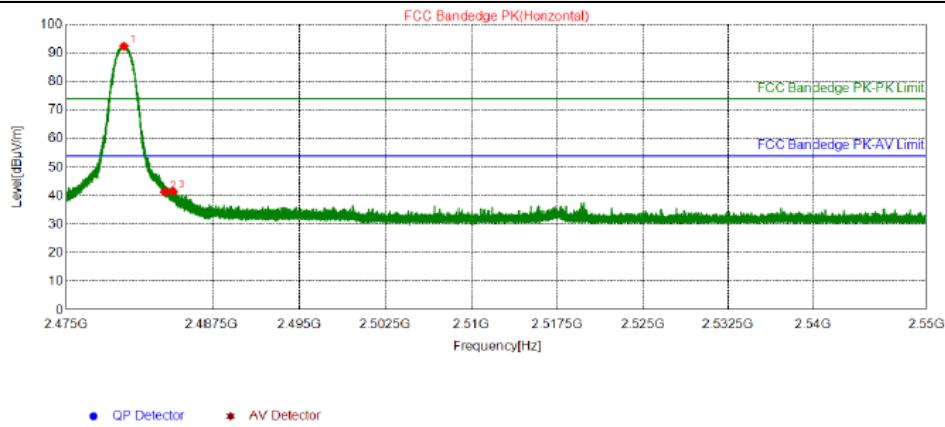

Suspected List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2479.9838	99.48	92.40	74.00	-18.40	155	336	Horizontal	PK
2	2483.5013	48.38	41.32	74.00	32.68	155	204	Horizontal	PK
3	2484.2063	48.58	41.52	74.00	32.48	155	336	Horizontal	PK

3DH5-2480MHz/ Vertical

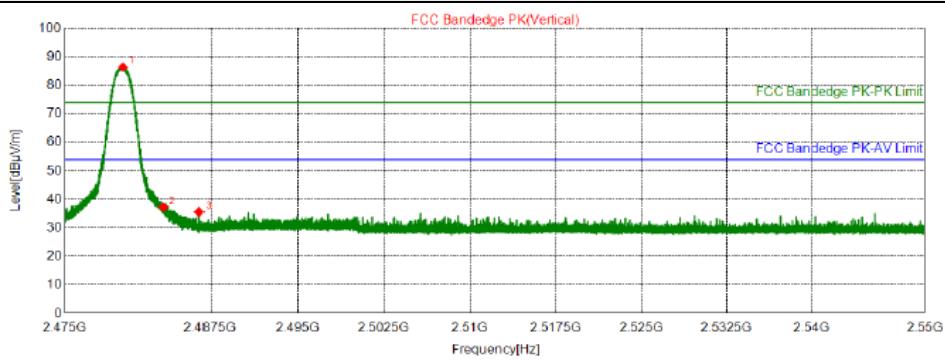

Suspected List

NO.	Freq. [MHz]	Reading [dB μ V/m]	Level [dB μ V/m]	Limit [dB μ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity	Detector
1	2480.0175	93.38	86.30	74.00	-12.30	155	6	Vertical	PK
2	2483.5050	44.32	37.26	74.00	36.74	155	274	Vertical	PK
3	2486.5613	42.64	35.59	74.00	38.41	155	94	Vertical	PK



4.10 Radiated Emission Measurement

4.10.1 Limits

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F (kHz)	300
0.490 ~ 1.705	24000/F (kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_BV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20 dB under any condition of modulation.

4.10.2 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on a 80cm height table above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Both X and Y axes of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotate table was turned from 0 degree to 360 degree to find the maximum reading.



- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a The EUT was placed on a 80cm height(above 1GHz is 1.5m height) table above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detected function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz & 360 kHz for Quasi-peak detection (QP) at frequency below 1 GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1/T for RMS Average (Duty cycle < 98 %) for Peak detection at frequency above 1 GHz.
4. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1 GHz.
5. All modes of operation were investigated and the worst-case emissions are reported.


4.10.3

4.10.4 Deviation from Test Standard


No deviation.

4.10.5 Test Setup


For Radiated emission between 30MHz~1000MHz

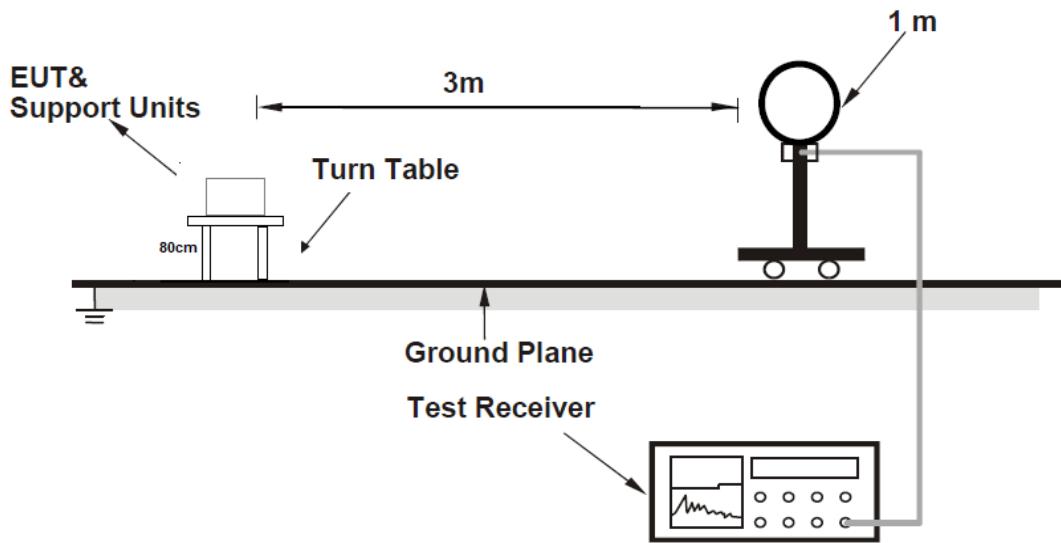

For Radiated emission between 30MHz~1000MHz

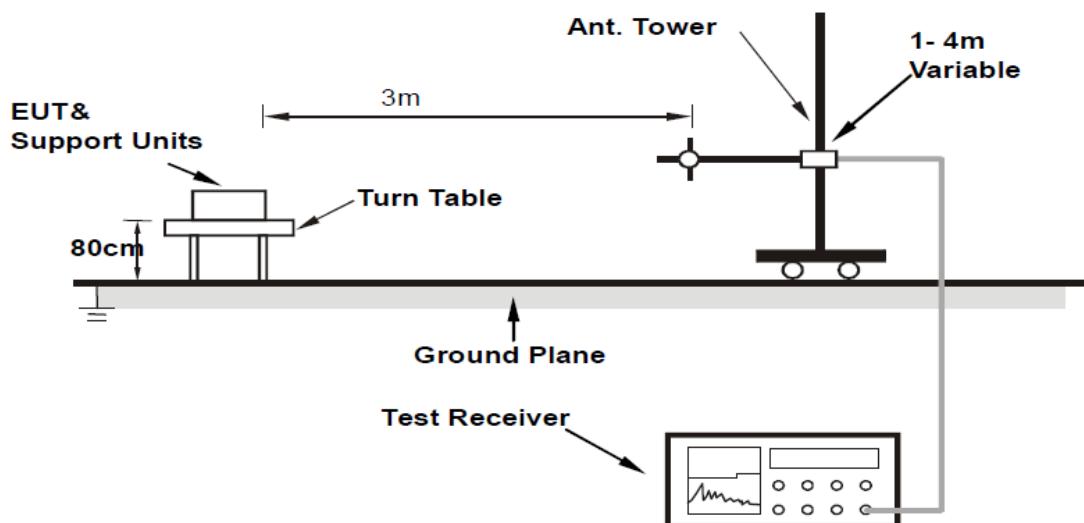

For Radiated emission above 1GHz

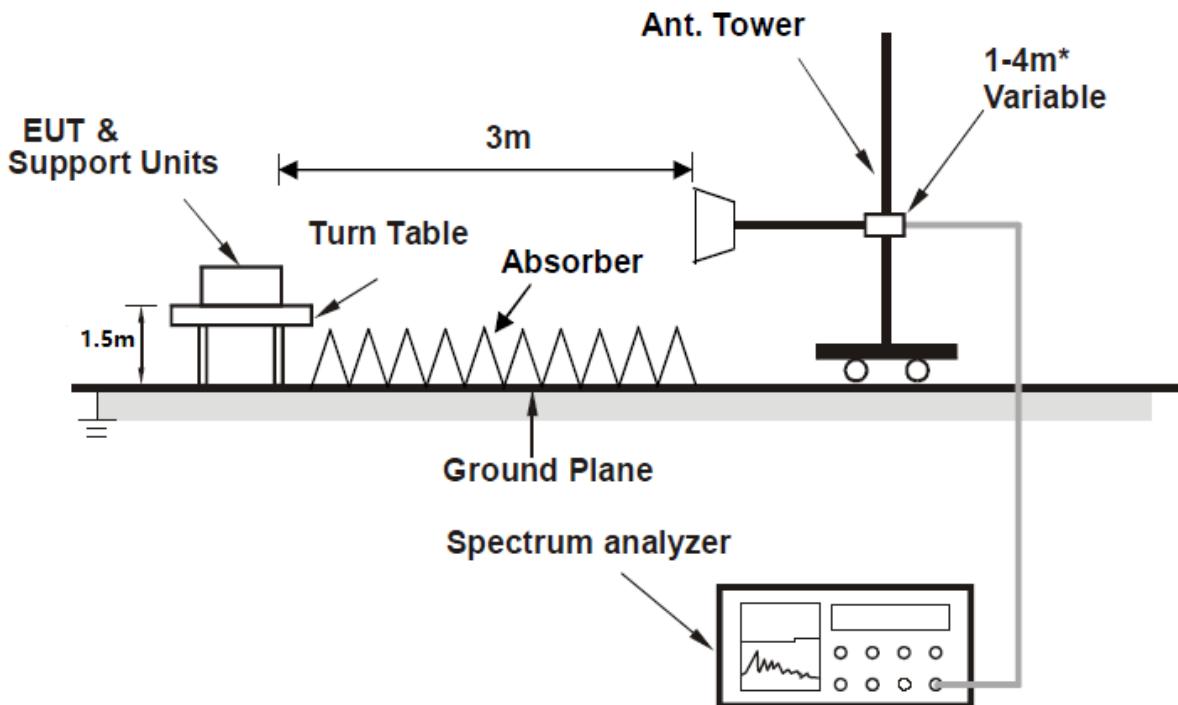

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.10.6 EUT Operating Conditions

- Placed the EUT on a testing table.
- Use the software to control the EUT under transmission condition continuously at specific channel frequency.

4.10.7 Test Results


Radiated Emissions Range 9kHz~30MHz

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.

Radiated Emissions Range 30MHz~1GHz

Below is the worst test data

Mode	DH5-2402MHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Horizontal
Power supply	AC 120V, 60Hz		

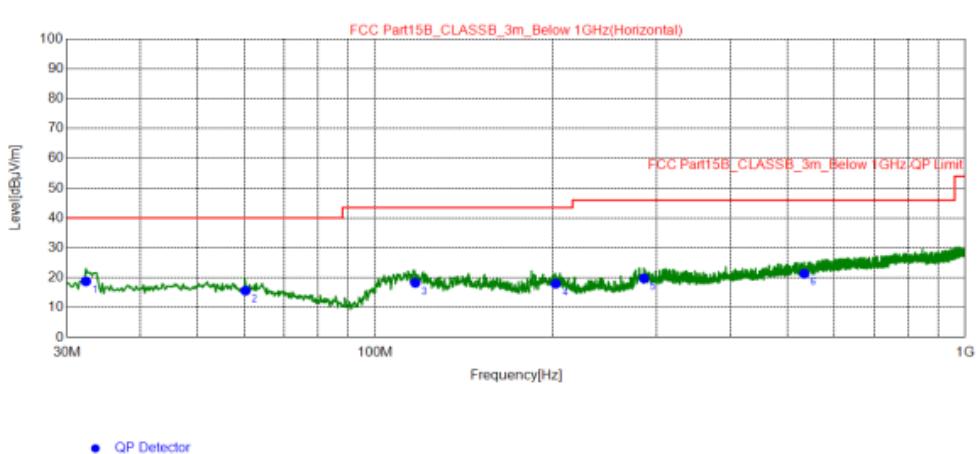


Final Data List

NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.32	30.18	-11.38	18.80	40.00	21.20	100	114	Horizontal
2	60.26	25.98	-10.32	15.66	40.00	24.34	100	294	Horizontal
3	116.9	31.17	-12.88	18.29	43.50	25.21	200	2	Horizontal
4	202.2	30.1	-12.09	18.01	43.50	25.49	100	289	Horizontal
5	285.4	28.82	-9.04	19.78	46.00	26.22	100	177	Horizontal
6	533.6	25.32	-3.97	21.35	46.00	24.65	200	331	Horizontal

REMARKS:

1. Emission Level(dBuV/m) = Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value =Limit value – Emission Level

Mode	DH5-2402MHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Vertical
Power supply	AC 120V, 60Hz		

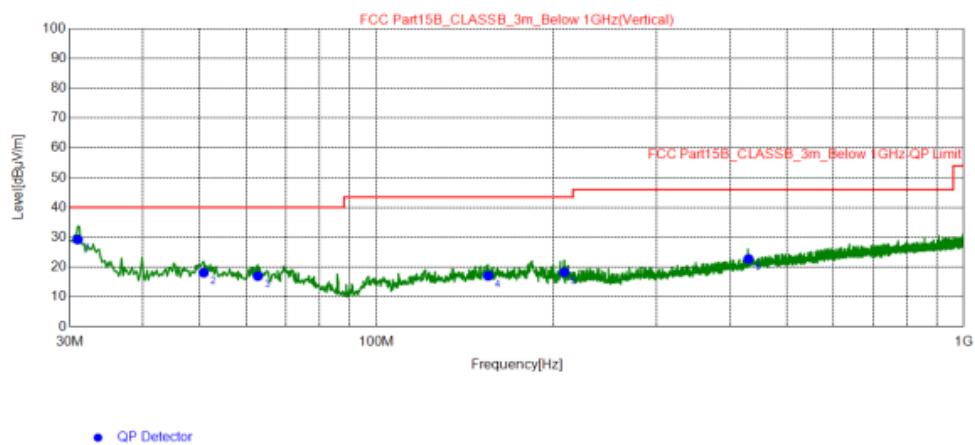


Final Data List									
NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.97	40.82	-11.55	29.27	40.00	10.73	100	58	Vertical
2	50.75	27.87	-9.74	18.13	40.00	21.87	100	296	Vertical
3	62.78	27.79	-10.77	17.02	40.00	22.98	100	4	Vertical
4	154.9	26.98	-9.90	17.08	43.50	26.42	100	327	Vertical
5	208.8	30.22	-11.96	18.26	43.50	25.24	200	140	Vertical
6	430.0	28.35	-5.60	22.75	46.00	23.25	100	184	Vertical

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value =Limit value – Emission Level

Mode	DH5-2402MHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Horizontal
Power supply	AC 240V, 50Hz		

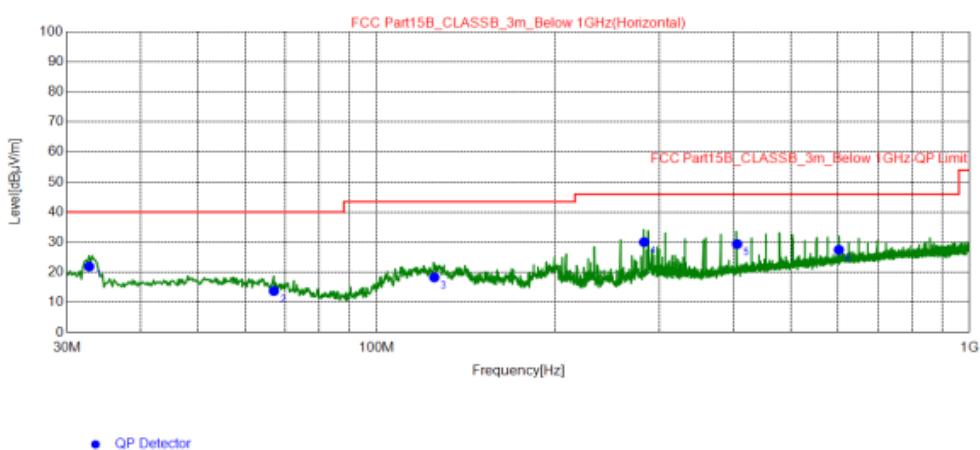


Final Data List

NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.71	33.27	-11.33	21.94	40.00	18.06	100	176	Horizontal
2	67.05	25.35	-11.53	13.82	40.00	26.18	200	246	Horizontal
3	125.0	30.3	-11.95	18.35	43.50	25.15	200	104	Horizontal
4	282.5	39.19	-9.12	30.07	46.00	15.93	100	198	Horizontal
5	405.5	35.59	-6.17	29.42	46.00	16.58	100	91	Horizontal
6	602.1	29.92	-2.42	27.50	46.00	18.50	200	108	Horizontal

REMARKS:

1. Emission Level(dBuV/m) = Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value =Limit value – Emission Level

Mode	DH5-2402MHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz	Antenna Polarity	Vertical
Power supply	AC 240V, 50Hz		

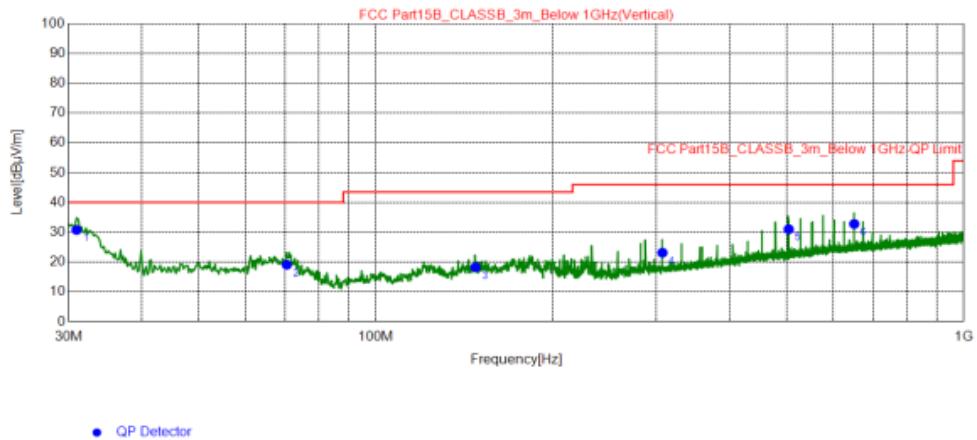

Final Data List

NO.	Freq. [MHz]	QP Reading [dB μ V/m]	Factor [dB]	QP Value [dB μ V/m]	QP Limit [dB μ V/m]	QP Margin [dB]	Height [cm]	Angle [°]	Polarity
1	30.97	42.33	-11.55	30.78	40.00	9.22	100	77	Vertical
2	70.54	31.29	-12.17	19.12	40.00	20.88	100	313	Vertical
3	147.7	28.35	-10.10	18.25	43.50	25.25	100	349	Vertical
4	307.2	31.59	-8.44	23.15	46.00	22.85	200	324	Vertical
5	503.7	35.51	-4.48	31.03	46.00	14.97	100	139	Vertical
6	651.1	34.87	-2.07	32.80	46.00	13.20	100	300	Vertical

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value =Limit value – Emission Level



Radiated Emission Range 1GHz~10th Harmonic

Below is the worst test data

GFSK

Channel		TX Channel 0		Detector Function		Peak (PK)			
Frequency Range		1GHz ~ 25GHz				Average (AV)			
Spurious Emission Level									
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector		
1	7206.7000	35.52	74.00	38.48	-0.58	H	PK		
2	7206.7000	29.85	54.00	24.15	-0.58	H	AV		
3	7206.7000	36.05	74.00	37.95	-0.58	V	PK		
4	7206.7000	29.25	54.00	24.75	-0.58	V	AV		

Channel		TX Channel 39		Detector Function		Peak (PK)			
Frequency Range		1GHz ~ 25GHz				Average (AV)			
Spurious Emission Level									
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector		
1	7324.0000	34.68	74.00	39.32	-0.89	H	PK		
2	7324.0000	29.36	54.00	24.64	-0.89	H	AV		
3	7324.0000	35.46	74.00	38.54	-0.89	V	PK		
4	7324.0000	29.56	54.00	24.44	-0.89	V	AV		

Channel		TX Channel 78		Detector Function		Peak (PK)			
Frequency Range		1GHz ~ 25GHz				Average (AV)			
Spurious Emission Level									
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector		
1	7441.3000	34.22	74.00	39.78	-1.19	H	PK		
2	7441.3000	29.66	54.00	24.34	-1.19	H	AV		
3	7441.3000	33.82	74.00	40.18	-1.19	V	PK		
4	7441.3000	28.62	54.00	25.38	-1.19	V	AV		

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value =Limit value – Emission Level



π/4-DQPSK

Channel		TX Channel 0		Detector Function		Peak (PK)			
Frequency Range		1GHz ~ 25GHz				Average (AV)			
Spurious Emission Level									
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector		
1	7206.7000	35.30	74.00	38.70	-0.58	H	PK		
2	7206.7000	28.92	54.00	25.08	-0.58	H	AV		
3	7206.7000	35.97	74.00	38.03	-0.58	V	PK		
4	7206.7000	31.72	54.00	22.28	-0.58	V	AV		

Channel		TX Channel 39		Detector Function		Peak (PK)			
Frequency Range		1GHz ~ 25GHz				Average (AV)			
Spurious Emission Level									
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector		
1	7324.0000	34.35	74.00	39.65	-0.89	H	PK		
2	7324.0000	28.94	54.00	25.06	-0.89	H	AV		
3	7324.0000	34.25	74.00	39.75	-0.89	V	PK		
4	7324.0000	29.37	54.00	24.63	-0.89	V	AV		

Channel		TX Channel 78		Detector Function		Peak (PK)			
Frequency Range		1GHz ~ 25GHz				Average (AV)			
Spurious Emission Level									
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector		
1	7441.3000	33.12	74.00	40.88	-1.19	H	PK		
2	7441.3000	29.01	54.00	24.99	-1.19	H	AV		
3	7441.3000	34.28	74.00	39.72	-1.19	V	PK		
4	7441.3000	29.12	54.00	24.88	-1.19	V	AV		

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level

8DPSK

Channel		TX Channel 0		Detector Function		Peak (PK)			
Frequency Range		1GHz ~ 25GHz				Average (AV)			
Spurious Emission Level									
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector		
1	7206.7000	35.40	74.00	38.60	-0.58	H	PK		
2	7206.7000	29.97	54.00	24.03	-0.58	H	AV		
3	7206.7000	34.45	74.00	39.55	-0.58	V	PK		
4	7206.7000	28.85	54.00	25.15	-0.58	V	AV		

Channel		TX Channel 39		Detector Function		Peak (PK)			
Frequency Range		1GHz ~ 25GHz				Average (AV)			
Spurious Emission Level									
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector		
1	7320.6000	33.36	74.00	40.64	-0.89	H	PK		
2	7320.6000	28.99	54.00	25.01	-0.89	H	AV		
3	7320.6000	35.30	74.00	38.70	-0.89	V	PK		
4	7320.6000	29.03	54.00	24.97	-0.89	V	AV		

Channel		TX Channel 78		Detector Function		Peak (PK)			
Frequency Range		1GHz ~ 25GHz				Average (AV)			
Spurious Emission Level									
No.	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Correction Factor (dB/m)	Antenna Polarity	Detector		
1	7441.3000	33.77	74.00	40.23	-1.19	H	PK		
2	7441.3000	27.52	54.00	26.48	-1.19	H	AV		
3	7441.3000	33.33	74.00	40.67	-1.19	V	PK		
4	7441.3000	28.22	54.00	25.78	-1.19	V	AV		

REMARKS:

1. Emission Level(dBuV/m) = Original Spectrum reading (dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Limit value – Emission Level



5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

We verified that the Emission bandwidth and CSE of the module is slightly less than that of the original case, please see the appendix spot check data.

--- END ---