


Test report No:
24A0319R-RF-US-P09V01

FCC TEST REPORT

| | |
|---|---|
| Product Name | POS Terminal |
| Trademark |  |
| Model and /or type reference | MF960 |
| FCC ID | 2AQRE-MF960 |
| Applicant's name / address | Fujian Morefun Electronic Technology Co., Ltd. 4th Floor, #15 Building, Standard plant, Fuwan, Jinshan Industry Center Area, #869 Panyu Rd, Gaishan Town, Cangshan Area, Fuzhou, Fujian, China |
| Test method requested, standard | 47 CFR FCC Part 15 (Section 15.407) ANSI C63.10: 2013 |
| Verdict Summary | IN COMPLIANCE |
| Documented by (name / position & signature) | Tim Cao / Project Manager  |
| Approved by (name / position & signature) | Jack Zhang / Manager  |
| Date of issue | 2024-12-08 |
| Report Version | V1.0 |
| Report template No | Template_FCC Part 15C-RF-V1.0 |

INDEX

| | page |
|--|------|
| General conditions | 4 |
| Environmental conditions | 4 |
| Possible test case verdicts | 5 |
| Abbreviations | 5 |
| Document History | 6 |
| Remarks and Comments..... | 6 |
| Used Equipment | 7 |
| Uncertainty | 10 |
| 1 General Information..... | 11 |
| 1.1 General Description of the Item(s) | 11 |
| 1.2 Antenna Information | 13 |
| 1.3 Channel List | 14 |
| 1.4 Data Rate..... | 15 |
| 2 Description of Test Setup | 16 |
| 2.1 Operating mode(s) used for tests..... | 16 |
| 2.2 Auxiliary equipment / Test software for the EUT..... | 16 |
| 2.3 Test Configuration / Block diagram used for tests | 17 |
| 2.4 Testing process..... | 19 |
| 3 Verdict summary section | 20 |
| 3.1 Standards..... | 20 |
| 3.2 Deviation(s) from the Standard(s) / Test Specification(s)..... | 20 |
| 3.3 Overview of results..... | 21 |
| 3.4 Power setting in test | 23 |
| 3.5 Test Matrix | 24 |
| 3.6 Test Facility..... | 25 |
| 4 Test Results..... | 26 |
| 4.1 Power Output | 26 |
| 4.1.1 Limit | 26 |
| 4.1.2 Test Setup..... | 27 |
| 4.1.3 Test Procedure..... | 27 |
| 4.2 Radiated Emissions..... | 29 |
| 4.2.1 Limit | 29 |
| 4.2.2 Test Setup..... | 31 |
| 4.2.3 Test Procedure..... | 32 |

| | | |
|-------|--|-----|
| 4.3 | AC Power Line Conducted Emission | 33 |
| 4.3.1 | Limit | 33 |
| 4.3.2 | Test Setup..... | 33 |
| 4.3.3 | Test Procedure..... | 33 |
| 4.4 | Radiated Emission Band Edge | 34 |
| 4.4.1 | Limit | 34 |
| 4.4.2 | Test Setup..... | 36 |
| 4.4.3 | Test Procedure..... | 36 |
| 5 | Test setup photo and EUT Photo..... | 38 |
| 6 | Test Result..... | 39 |
| | Appendix A: Power Output | 39 |
| | Appendix B: Radiated Emission..... | 41 |
| | Appendix C: Radiated Emission Band Edge | 165 |
| | Appendix D: AC Power Line Conducted Emission | 229 |

COMPETENCES AND GUARANTEES

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

GENERAL CONDITIONS

| | |
|----------------------|--|
| Test Location A | No. 99, Hongye Road, Suzhou Industrial Park Suzhou, 215006, P.R. China |
| Test Location B | No. 8213, Fanhua Avenue, Baohe District, Hefei City, Anhui Province, China |
| Date(receive sample) | Oct. 14, 2024 |
| Date (start test) | Oct. 20, 2024 |
| Date (finish test) | Oct. 30, 2024 |

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or Competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA.

ENVIRONMENTAL CONDITIONS

The climatic conditions during the tests are within the limits specified by the manufacturer for the operation of the EUT and the test equipment. The climatic conditions during the tests were within the following limits:

| | |
|-----------------------|---------------|
| Ambient temperature | 15 °C – 35 °C |
| Relative Humidity air | 30% - 60% |

If explicitly required in the basic standard or applied product / product family standard the climatic values are recorded and documented separately in this test report.

POSSIBLE TEST CASE VERDICTS

| | |
|---|-----------------|
| Test case does not apply to test object | N/A |
| Test object does meet requirement | P (Pass) / PASS |
| Test object does not meet requirement | F (Fail) / FAIL |
| Not measured | N/M |

ABBREVIATIONS

For the purposes of the present document, the following abbreviations apply:

| | |
|-------|-------------------------------|
| EUT | : Equipment Under Test |
| QP | : Quasi-Peak |
| CAV | : CISPR Average |
| AV | : Average |
| CDN | : Coupling Decoupling Network |
| SAC | : Semi-Anechoic Chamber |
| OATS | : Open Area Test Site |
| BW | : Bandwidth |
| AM | : Amplitude Modulation |
| PM | : Pulse Modulation |
| HCP | : Horizontal Coupling Plane |
| VCP | : Vertical Coupling Plane |
| U_N | : Nominal voltage |
| Tx | : Transmitter |
| Rx | : Receiver |
| N/A | : Not Applicable |
| N/M | : Not Measured |

DOCUMENT HISTORY

| Report No. | Version | Description | Issued Date |
|-----------------------|---------|--------------------------|-------------|
| 24A0319R-RF-US-P09V01 | V1.0 | Initial issue of report. | 2024-12-08 |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

REMARKS AND COMMENTS

1. The equipment under test (EUT) does meet the essential requirements of the stated standard(s)/test(s).
2. This report is a limited report on the installation of a test module in a POS Terminal, and the customer declares that the RF parameters of the module installed in the host computer are exactly the same as those of the certified module. We verified the RF output power and radiated emissions of the equipment. For other test data, please refer to FCC ID: 2A9FT-Z400-H. These test results on a sample of the device are for the purpose of demonstrating Compliance with 47 CFR FCC Part 15 (Section 15.407).
3. The measurement result is considered in conformance with the requirement if it is within the prescribed limit, It is not necessary to account the uncertainty associated with the measurement result.
4. The test results presented in this report relate only to the object tested.
5. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification (Suzhou) Co., Ltd.
6. This report will not be used for social proof function in China market.
7. DEKRA declines any responsibility with the following test data provided by customer that may affect the validity of result:
 - Chapter 1.1 General Description of the Item(s);
 - Chapter 1.2 Antenna Informaion;
 - Chapter 1.3 Channel List;
 - Chapter 1.4 Data Rate;

USED EQUIPMENT

Test Location A: Conducted Test/ TR8

| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date | Firmware Version | Software version |
|---|--------------|---------------|------------|------------|----------------|------------------|------------------|
| Wireless Connectivity Tester | R&S | CMW 270 | 102593 | 2024.05.15 | 2025.05.14 | V 4.0.60 | N/A |
| Coaxial Cable | N/A | N/A | 2477 | 2024.06.11 | 2025.06.10 | N/A | N/A |
| Coaxial Cable | N/A | N/A | 2478 | 2024.06.11 | 2025.06.10 | N/A | N/A |
| High and low temperature and fast temperature change test box | ASTUOD | ASTD-FBT-225K | N/A | 2024.04.21 | 2025.04.20 | N/A | N/A |
| Temperature/Humidity Meter | RTS | RTS-1909 | THM-032 | 2024.05.17 | 2025.05.16 | N/A | N/A |
| Test system | | | | | | | |
| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date | Firmware Version | Software version |
| MAX Signal Analyzer | Keysight | N9010A | MY48030494 | 2023.11.08 | 2024.11.07 | A.14.03 | N/A |
| RF Control Unit | Tonscend | JS0806-2 | 22G8060594 | 2024.01.31 | 2025.01.30 | N/A | N/A |
| MXG-B RF Vector Signal Generator | Keysight | N5182B | MY61252529 | 2024.05.12 | 2025.05.11 | B.01.96 | N/A |
| Frequency extender for EXG or MXG | Keysight | N5182BX07 | MY59362500 | 2024.05.12 | 2025.05.11 | N/A | N/A |
| EXG-B MW Analog Signal Generator | Keysight | N5173B | MY61252566 | 2024.07.06 | 2025.07.05 | B.01.95 | N/A |
| Test Software | Tonscend | TS1120 | JS1120-3 | N/A | N/A | N/A | V3.0.22 |

Test Location A: AC Power Line Conducted Emission / TR1

| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date | Firmware Version | Software version |
|---------------------------------|--------------|-----------|------------|------------|----------------|------------------|------------------|
| EMI Test Receiver | R&S | ESCI | 100726 | 2024.07.06 | 2025.07.05 | 4.42 SP1 | N/A |
| Two-Line V-Network | R&S | ENV 216 | 101044 | 2023.11.08 | 2024.11.07 | N/A | N/A |
| Two-Line V-Network | R&S | ENV 216 | 101189 | 2024.07.06 | 2025.07.05 | N/A | N/A |
| 50ohm Coaxial Switch | Anritsu | MP59B | 6200464462 | 2024.07.06 | 2025.07.05 | N/A | N/A |
| Coaxial Cable | Huber+Suhner | RG 223 | TR1-C1 | 2024.07.06 | 2025.07.05 | N/A | N/A |
| Impedance Stabilization Network | Teseq GmbH | ISN T800 | 57318 | 2024.01.20 | 2025.01.19 | N/A | N/A |
| Temperature/Humidity Meter | RTS | RTS-1909 | THM-011 | 2024.05.17 | 2025.05.16 | N/A | N/A |
| Dekra test software | Dekra | N/A | N/A | N/A | N/A | N/A | N/A |

Test Location A: Radiated Emission (9KHz-1GHz) / AC2

| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date | Firmware Version | Software version |
|----------------------------|--------------|--------------|------------|------------|----------------|------------------|------------------|
| EMI Test Receiver | R&S | ESCI | 100573 | 2024.02.06 | 2025.02.05 | 4.42 SP3 | N/A |
| Loop Antenna | R&S | HFH2-Z2E | 101149 | 2024.03.27 | 2025.03.26 | N/A | N/A |
| Bilog Antenna | Teseq GmbH | CBL6112D | 27611 | 2024.03.20 | 2025.03.19 | N/A | N/A |
| Coaxial Cable | Huber+Suhner | SUCOFLEX 106 | AC2-C | 2024.04.27 | 2025.04.26 | N/A | N/A |
| Temperature/Humidity Meter | RTS | RTS-1909 | THM-021 | 2024.05.17 | 2025.05.16 | N/A | N/A |
| Dekra test software | Dekra | N/A | N/A | N/A | N/A | N/A | 3 |

Test Location B: Radiated Emission (1GHz-40GHz) / AC103

| Instrument | Manufacturer | Model No. | Serial No. | Cal. Date | Next Cal. Date | Firmware Version | Software version |
|----------------------------------|--------------|--------------|--------------|------------|----------------|------------------|------------------|
| Signal analyzer | keysight | N9020B | MY63490118 | 2024.07.26 | 2025.07.25 | A 08.54 | N/A |
| Bilog Antenna | TESEQ | CBL6112D | 64164 | 2023.11.03 | 2024.11.02 | N/A | N/A |
| Horn Antenna | RF SPIN | DRH18-E | KV2D11A18ES | 2023.11.07 | 2024.11.06 | N/A | N/A |
| Broad-Band Horn Antenna | Schwarzbeck | BBHA9170 | 01312 | 2023.11.07 | 2024.11.06 | N/A | N/A |
| Amplifier | ESE | LNA0118 | LNA23100009 | 2023.10.30 | 2024.10.29 | N/A | N/A |
| Amplifier | Tonscend | TAP01018048S | AP23J8060307 | 2023.11.10 | 2024.11.09 | N/A | N/A |
| EXG-B MW Analog Signal Generator | Keysight | N5173B | MY61252566 | 2023.11.08 | 2024.11.07 | N/A | N/A |
| Band Reject Filter Group | Tonscend | JS0806-F | 23G806F0701 | 2023.11.20 | 2024.11.19 | N/A | N/A |
| Temperature/Humidity Meter | RTS | RTS-8S | 026 | 2024.09.04 | 2025.09.03 | N/A | N/A |
| Test Software | Tonscend | JS36 | N/A | N/A | N/A | N/A | 5.0.0 |

UNCERTAINTY


Uncertainties have been calculated according to the DEKRA internal document. The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

| Test item Test Location A | Uncertainty |
|---|--|
| AC Power Line Conducted Emission | 9kHz~150kHz: 2.80dB 150kHz~30MHz: 2.40dB |
| Radiated Emission(30MHz~1GHz) | Horizontal: 30MHz~200MHz: 3.50 dB 300MHz~1GHz: 3.60 dB Vertical: 30MHz~200MHz: 3.60 dB 300MHz~1GHz: 3.50 dB |
| Radiated Emission(1GHz~26.5GHz) | Horizontal: 1GHz~18GHz: 5.00 dB Vertical: 1GHz~18GHz: 4.80 dB Horizontal: 18GHz~26.5GHz: 5.30 dB Vertical: 18GHz~26.5GHz: 4.90 dB |
| 20dB Bandwidth | ± 1 kHz |
| Carrier Frequency Separation | ± 1 kHz |
| Number of Hopping Frequencies | ± 1 kHz |
| Time of Occupancy (Dwell Time) | ± 0.1 us |
| Peak OutputPower | ± 1.27 dB |
| Emissions in non-restricted frequency bands | ± 1.0 dB |
| Radiated Emission Band Edge | ± 3.9 dB |

| Test item Test Location B | Uncertainty |
|---------------------------------|--|
| Radiated Emission(30MHz~1GHz) | Horizontal: 30MHz~200MHz: 4.86 dB 300MHz~1GHz: 4.86 dB Vertical: 30MHz~200MHz: 4.92 dB 300MHz~1GHz: 4.92 dB |
| Radiated Emission(1GHz~26.5GHz) | Horizontal: 1GHz~18GHz: 5.99 dB Vertical: 1GHz~18GHz: 5.76 dB Horizontal: 18GHz~26.5GHz: 5.99 dB Vertical: 18GHz~26.5GHz: 5.76 dB |
| Radiated Emission Band Edge | ± 5.99 dB |

1 GENERAL INFORMATION

1.1 General Description of the Item(s)

| | |
|-----------------------------|---|
| Product Name | POS Terminal |
| Model No. | MF960 |
| Trademark..... |  |
| FCC ID..... | 2AQRE-MF960 |
| Hardware Version..... | B30 |
| Software Version..... | V13.0.1 |
| Manufacturer..... | Fujian Morefun Electronic Technology Co., Ltd. |
| Manufacturer Address | 4th Floor, #15 Building, Standard plant, Fuwan, Jinshan Industry Center Area, #869 Panyu Rd, Gaishan Town, Cangshan Area, Fuzhou, Fujian, China |
| Factory..... | Fujian Morefun Electronic Technology Co., Ltd. |
| Factory address | 4th Floor, #15 Building, Standard plant, Fuwan, Jinshan Industry Center Area, #869 Panyu Rd, Gaishan Town, Cangshan Area, Fuzhou, Fujian, China |
| Operating temperature | -20 ~ +60 °C |

| | |
|-------------------------------------|------------------------------------|
| Wireless Card | Z400-H |
| Wireless specification..... | 802.11a / n / ac |
| Frequency Range..... | U-NII-1: 5150 MHz to 5250 MHz |
| | U-NII-2A: 5250 MHz to 5350 MHz |
| | U-NII-2C: 5470 MHz to 5725 MHz |
| | U-NII-3: 5725 MHz to 5850 MHz |
| Channel Bandwidth | 802.11a 20 MHz |
| | 802.11n 20 MHz, 40 MHz |
| | 802.11ac 20 MHz, 40 MHz, 80 MHz |
| Modulation technology..... | OFDM |
| Product Type..... | Mobile and Portable Client For FCC |
| Type of Modulation & Data Rate..... | Refer to Clause 1.4 |
| Number of channels | Refer to Clause 1.3 |

| | | |
|---------------------------|--|---------------------------------------|
| Rated power supply..... : | Voltage and Frequency | |
| | <input type="checkbox"/> | AC: 220 - 240 V, 50/60 Hz |
| | <input type="checkbox"/> | AC: 100 - 240 V, 50/60 Hz |
| | <input checked="" type="checkbox"/> | DC: 5 Vdc |
| | <input checked="" type="checkbox"/> | Battery: 7.20 Vdc, 2600 mAh, 18.72 Wh |
| | <input checked="" type="checkbox"/> | Adapter: |
| Adapter Model..... : | DGL0502000LUS | |
| | Input: 100-240V ~ 50/60Hz,0.3A Max Output: 5.0V / 2000 mA | |
| Mounting position | <input type="checkbox"/> | Tabletop equipment |

| | | |
|--|-------------------------------------|--------------------------------|
| | <input type="checkbox"/> | Wall/Ceiling mounted equipment |
| | <input type="checkbox"/> | Floor standing equipment |
| | <input checked="" type="checkbox"/> | Hand-held/Portable equipment |
| | <input type="checkbox"/> | Other: |

1.2 Antenna Information

| | | | |
|-----------------------------------|-------------------------------------|---------------|---|
| Antenna model / type number.....: | MF960B30 Z400 | | |
| Antenna Delivery | <input checked="" type="checkbox"/> | 1TX + 1RX | |
| | <input type="checkbox"/> | 2TX + 2RX | |
| | <input type="checkbox"/> | Others: | |
| Antenna technology.....: | <input checked="" type="checkbox"/> | SISO | |
| | <input type="checkbox"/> | MIMO | <input type="checkbox"/> CDD |
| | | | <input type="checkbox"/> Beam-forming |
| Antenna Type.....: | <input type="checkbox"/> | External | <input type="checkbox"/> Dipole |
| | | | <input type="checkbox"/> Sectorized |
| | | | <input type="checkbox"/> Ceramic Chip |
| | <input checked="" type="checkbox"/> | Internal | <input type="checkbox"/> PIFA |
| | | | <input checked="" type="checkbox"/> FPC |
| | | | <input type="checkbox"/> Others..... |
| Antenna Gain | 7.10 dBi | | |

1.3 Channel List

U-NII-1/2A/2C/3:

| 802.11a/n/ac (20MHz) Working Frequency of Each Channel: | | | | | | | |
|---|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 36 | 5180 MHz | 40 | 5200 MHz | 44 | 5220 MHz | 48 | 5240 MHz |
| 52 | 5260 MHz | 56 | 5280 MHz | 60 | 5300 MHz | 64 | 5320 MHz |
| 100 | 5500 MHz | 104 | 5520 MHz | 108 | 5540 MHz | 112 | 5550 MHz |
| 116 | 5580 MHz | 120 | 5600 MHz | 124 | 5620 MHz | 128 | 5640 MHz |
| 132 | 5660 MHz | 136 | 5680 MHz | 140 | 5700 MHz | 144 | 5720 MHz |
| 149 | 5745 MHz | 153 | 5765 MHz | 157 | 5785 MHz | 161 | 5805 MHz |
| 165 | 5825 MHz | N/A | N/A | N/A | N/A | N/A | N/A |
| 802.11n/ac (40MHz) Working Frequency of Each Channel: | | | | | | | |
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 38 | 5190 MHz | 46 | 5230 MHz | 54 | 5270 MHz | 62 | 5310 MHz |
| 102 | 5510 MHz | 110 | 5550 MHz | 118 | 5590 MHz | 126 | 5630 MHz |
| 134 | 5670 MHz | 142 | 5710 MHz | 151 | 5755 MHz | 159 | 5795 MHz |
| 802.11ac (80MHz) Working Frequency of Each Channel: | | | | | | | |
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 42 | 5210 MHz | 58 | 5290 MHz | 106 | 5530MHz | 122 | 5610 MHz |
| 138 | 5690 MHz | 155 | 5775 MHz | N/A | N/A | N/A | N/A |

1.4 Data Rate

IEEE 802.11a

| Modulation | R | Data Rate(Mb/s) |
|------------|-----|-----------------|
| BPSK | 1/2 | 6 |
| BPSK | 3/4 | 9 |
| QPSK | 1/2 | 12 |
| QPSK | 3/4 | 18 |
| 16-QAM | 1/2 | 24 |
| 16-QAM | 3/4 | 36 |
| 64-QAM | 2/3 | 48 |
| 64-QAM | 3/4 | 54 |

IEEE 802.11n/ac

| Spatial streames | MCS Index | Modulation | R | Data Rate(Mb/s) | | | | | | | |
|------------------|-----------|------------|-----|-----------------|-------|-------|--------|----------|-------|-------|--------|
| | | | | 400ns GI | | | | 800ns GI | | | |
| | | | | 20MHz | 40MHz | 80MHz | 160MHz | 20MHz | 40MHz | 80MHz | 160MHz |
| 1 | 0 | BPSK | 1/2 | 7.2 | 15 | 32.5 | 65 | 6.5 | 13.5 | 29.3 | 58.5 |
| 1 | 1 | QPSK | 1/2 | 14.4 | 30 | 65 | 130 | 13 | 27 | 58.5 | 117 |
| 1 | 2 | QPSK | 3/4 | 21.7 | 45 | 97.5 | 195 | 19.5 | 40.5 | 87.8 | 175.5 |
| 1 | 3 | 16-QAM | 1/2 | 28.9 | 60 | 130 | 260 | 26 | 54 | 117 | 234 |
| 1 | 4 | 16-QAM | 3/4 | 43.3 | 90 | 195 | 390 | 39 | 81 | 175.5 | 351 |
| 1 | 5 | 64-QAM | 2/3 | 57.8 | 120 | 260 | 520 | 52 | 108 | 234 | 468 |
| 1 | 6 | 64-QAM | 3/4 | 65 | 135 | 292.5 | 585 | 58.5 | 121.5 | 263.3 | 526.5 |
| 1 | 7 | 64-QAM | 5/6 | 72.2 | 150 | 325 | 650 | 65 | 135 | 292.5 | 585 |
| 1 | 8 | 256QAM | 3/4 | 86.7 | 180 | 390 | 780 | 78 | 162 | 351 | 702 |
| 1 | 9 | 256QAM | 5/6 | N/A | 200 | 433.3 | 866.7 | N/A | 180 | 390 | 780 |
| 2 | 0 | BPSK | 1/2 | 14.4 | 30 | 65 | 130 | 13 | 27 | 58.6 | 117 |
| 2 | 1 | QPSK | 1/2 | 28.8 | 60 | 130 | 260 | 26 | 54 | 117 | 234 |
| 2 | 2 | QPSK | 3/4 | 43.4 | 90 | 195 | 390 | 39 | 81 | 175.6 | 351 |
| 2 | 3 | 16-QAM | 1/2 | 57.8 | 120 | 260 | 520 | 52 | 108 | 234 | 468 |
| 2 | 4 | 16-QAM | 3/4 | 86.6 | 180 | 390 | 780 | 78 | 162 | 351 | 702 |
| 2 | 5 | 64-QAM | 2/3 | 115.6 | 240 | 520 | 1040 | 104 | 216 | 468 | 936 |
| 2 | 6 | 64-QAM | 3/4 | 130 | 270 | 585 | 1170 | 117 | 243 | 526.6 | 1053 |
| 2 | 7 | 64-QAM | 5/6 | 144.4 | 300 | 650 | 1300 | 130 | 270 | 585 | 1170 |
| 2 | 8 | 256QAM | 3/4 | 173.4 | 360 | 780 | 1560 | 156 | 324 | 702 | 1404 |
| 2 | 9 | 256QAM | 5/6 | N/A | 400 | 866.6 | 1733.4 | N/A | 360 | 780 | 1560 |

Note 1: We have evaluated low/mid/high data rate, the blue font is the highest power data rate.

Note 2: The general description of the Item(s), antenna information, data rate, channel list and equipment categories in clause 1 are provided and confirmed by the client.

2 DESCRIPTION OF TEST SETUP

2.1 Operating mode(s) used for tests

During the tests the following operating mode(s) has(have) been used.

| | |
|-----------|--------------------------------------|
| Test Mode | Mode 1: Transmit by 802.11a |
| | Mode 2: Transmit by 802.11n (20MHz) |
| | Mode 3: Transmit by 802.11n (40MHz) |
| | Mode 4: Transmit by 802.11ac (20MHz) |
| | Mode 5: Transmit by 802.11ac (40MHz) |
| | Mode 6: Transmit by 802.11ac (80MHz) |

Note 1: Regards to the frequency band operation: the lowest, middle and highest frequency channel were selected to perform the test, then shown on this report.

Note 2: For portable device, radiated tests was verified over X, Y, Z axis, and shown the worst case on this report.


2.2 Auxiliary equipment / Test software for the EUT

| Auxiliary equipment | Type / Version | Manufacturer | Supplied by |
|-----------------------|----------------|--------------|-------------|
| (1) USB Control Cable | N/A | N/A | N/A |
| (2) USB Control Cable | N/A | N/A | N/A |
| software | Type / Version | Manufacturer | Supplied by |
| N/A | N/A | N/A | N/A |


| Accessories Information | Cable | | |
|-------------------------|--------------------------------|-------------------------------------|-------------------------------------|
| | Length used during test [m] | Attached during test | Shielded |
| (2)USB Control Cable | 1 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
| (3)USB Control Cable | 8 | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |

2.3 Test Configuration / Block diagram used for tests


Test setup Diagram- AC Line Conducted Emission Test

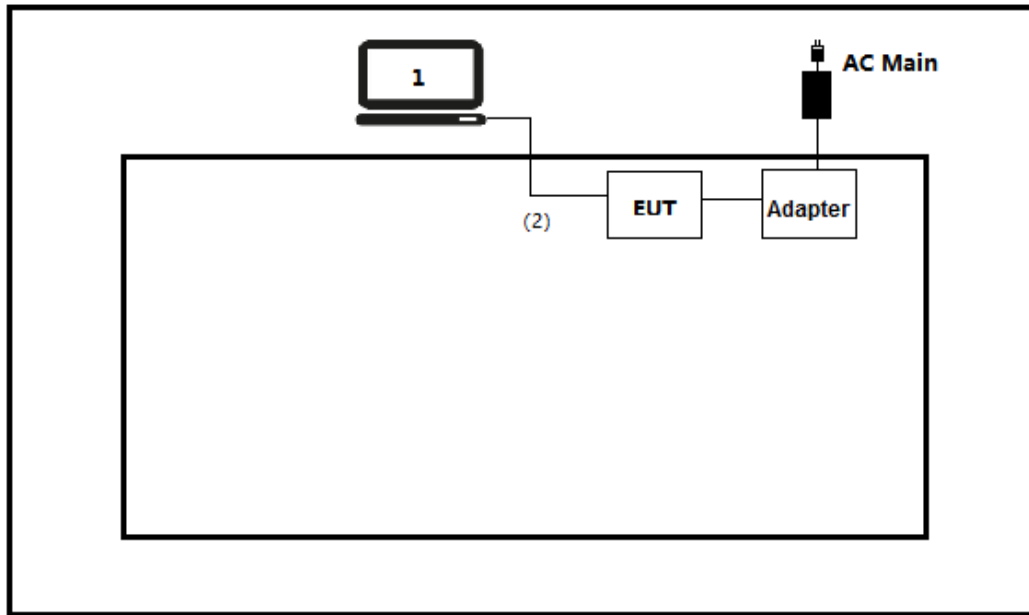

Test setup Diagram- Conducted test

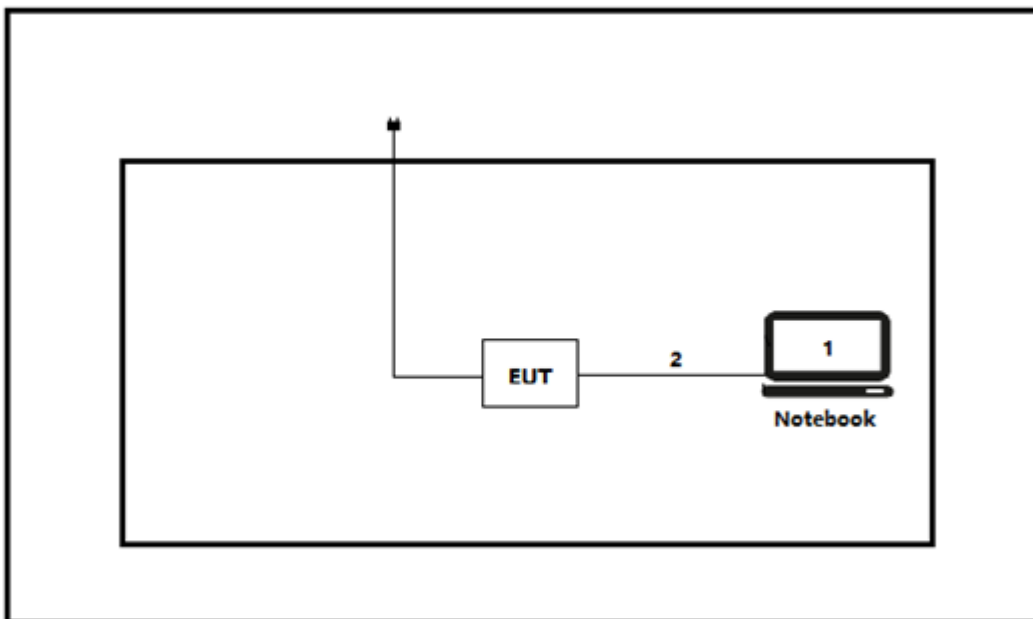

Test setup Diagram- Radiated Emission

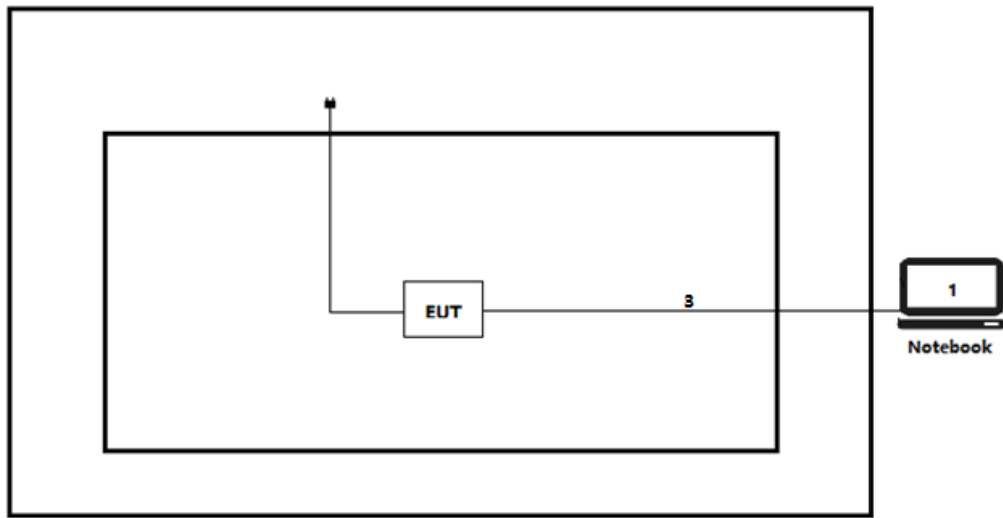

2.4 Testing process

| | |
|---|---|
| 1 | Setup the EUT as shown in Section 2.3. |
| 2 | Enter launch execution on the dial screen. |
| 3 | Configure the test mode, the test channel, and the data rate. |
| 4 | Verify that the EUT works properly. |

3 VERDICT SUMMARY SECTION

This chapter presents an overview of standards and results. Refer to the next chapters for details of measured test results and applied test levels.

3.1 Standards

| Standard | Year | Description |
|--|------|--|
| ANSI C63.10 | 2013 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |
| FCC CFR Title 47 Part 15 Subpart E | 2024 | FCC CFR Title 47 Part 15 Subpart E |
| KDB 789033 D02 General UNII Test Procedures New Rules v02r01 | 2017 | This document provides guidance for determining emissions compliance of U-NII devices under Part 15, Subpart E of the FCC rules. |
| KDB 662911 | 2020 | Provision to Allow Measurement of Directional Gain of Multi-Antenna Systems for Compliance Verification |
| | | |
| | | |

3.2 Deviation(s) from the Standard(s) / Test Specification(s)

The following deviation(s) was / were made from the published requirements of the listed standards: N/A.

(Please define the deviations from the standard(s) if applicable)

3.3 Overview of results

| Test Item | Band ^[1] | FCC rules No. | Test Requirements | Result |
|---|--|----------------------|--|------------|
| Antenna Requirement | -- | 15.203/15.407(a) | -- | See Remark |
| 26dB Emission Bandwidth | Band I | 15.407(a)(1) | No limit. | See Remark |
| | Band II-A | 15.407(a)(2) | | |
| | Band II-C | 15.407(a)(2) | | |
| 6dB Emission Bandwidth | Band III | 15.407(e) | ≥ 500 kHz. | See Remark |
| 99% Occupied Bandwidth | Band I | KDB 789033 D02§ D | No limit. | See Remark |
| | Band II-A | | | |
| | Band II-C | | | |
| | Band III | | | |
| Duty Cycle | Band I Band II-A Band II-C Band III | -- | No limit. | See Remark |
| Maximum Conducted Output Power | Band I | 15.407(a) | < 250mW | PASS |
| | Band II-A | 15.407(a)(2) | <MIN{250mW, 11dBm+10*Ig(EBW)} | |
| | Band II-C | | | |
| | Band III | 15.407(a)(3) | < 1W | |
| Maximum Power Spectral Density | Band I | 15.407(a) | <11dBm/MHz | See Remark |
| | Band II-A | 15.407(a)(2) | <11dBm/MHz | |
| | Band II-C | | | |
| | Band III | 15.407(a)(3) | <30dBm/500KHz | |
| Unwanted Emissions that fall Out of the Restricted Bands (Radiated) | Band I | 15.209 15.407(b) | F<1GHz: §15.209/§7.2.5 limit (QP). F≥1GHz & out-restricted: <-27dBm/MHz PK e.i.r.p. (exl. 5.15-5.35 GHz). F≥1GHz & in-restricted: §15.209/§7.2.5 limit (AV&PK). | PASS |
| | Band II-A | 15.407(b) 15.209 | F<1GHz: §15.209/§7.2.5 limit (QP). F≥1GHz & out-restricted: <-27dBm/MHz PK e.i.r.p. (exl. 5.25-5.35 GHz). F≥1GHz & in-restricted: §15.209/§7.2.5 limit (AV&PK). | PASS |
| | Band II-C | 15.407(b) 15.209 | F<1GHz: §15.209/§7.2.5 limit (QP). F≥1GHz & out-restricted: <-27dBm/MHz PK e.i.r.p. (exl. 5.47-5.725 GHz). F≥1GHz & in-restricted: §15.209/§7.2.5 limit (AV&PK). | PASS |
| | Band III | 15.407(b) 15.209 | F<1GHz: §15.209/§7.2.5 limit (QP) F≥1GHz & out-restricted:(QP) a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges; b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges; | PASS |

| | | | | |
|---|--|-----------|--|------------|
| | | | c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges. F≥1GHz & in-restricted: §15.209/§7.2.5 limit (AV&PK). | |
| Unwanted Emissions in the Restricted Bands (Radiated) | Band I Band II-A Band II-C Band III | 15.209 | --- | See Remark |
| AC Power Line Conducted Emissions | Band I Band II-A Band II-C Band III | 15.207 | --- | PASS |
| Frequency Stability | Band I Band II-A Band II-C Band III | 15.407(g) | Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual | See Remark |

Remark:

Only the Effective (Isotropic) Radiated Power Output Data and Radiated Spurious Emission were fully tested. These items please refer to the Wi-Fi 5G Module report S23033100205004. The FCC ID is 2A9FT-Z400-H has been certified, and the test report issued by Shenzhen NTEK Testing Technology Co., Ltd. on 03/05/2023.

| Requirement – Test Item | Standard(s) | Verdict | Tset Location | Remark |
|----------------------------------|---|---------|---------------|---|
| Power Output | FCC CFR Title 47 Part 15 Subpart E: Section 15.407(a) | PASS | A | Test data please refer to Appendix A |
| Radiated Emission | FCC CFR Title 47 Part 15 Subpart E: Section 15.209 | PASS | B | Test data please refer to Appendix B |
| Radiated Emission Band Edge | FCC CFR Title 47 Part 15 Subpart E: Section 15.205, 15.407(b) | PASS | B | Test data please refer to Appendix C |
| AC Power Line Conducted Emission | FCC CFR Title 47 Part 15 Subpart E: Section 15.207 | PASS | A | Test data please refer to Appendix D |

3.4 Power setting in test

| Mode | Channel | Frequency (MHz) | Power Setting |
|--------|---------|-----------------|---------------|
| Mode 1 | 36 | 5180 | 18.00 |
| | 40 | 5200 | 18.00 |
| | 48 | 5240 | 18.00 |
| | 52 | 5260 | 22.00 |
| | 60 | 5300 | 22.00 |
| | 64 | 5320 | 21.00 |
| | 100 | 5500 | 20.00 |
| | 116 | 5580 | 20.00 |
| | 140 | 5700 | 20.00 |
| | 149 | 5745 | 21.00 |
| | 157 | 5785 | 21.00 |
| | 165 | 5825 | 21.00 |
| Mode 2 | 36 | 5180 | 18.00 |
| | 40 | 5200 | 18.00 |
| | 48 | 5240 | 18.00 |
| | 52 | 5260 | 21.00 |
| | 60 | 5300 | 21.00 |
| | 64 | 5320 | 21.00 |
| | 100 | 5500 | 20.00 |
| | 116 | 5580 | 20.00 |
| | 140 | 5700 | 20.00 |
| | 149 | 5745 | 21.00 |
| | 157 | 5785 | 21.00 |
| | 165 | 5825 | 21.00 |
| Mode 3 | 38 | 5190 | 16.00 |
| | 46 | 5230 | 17.00 |
| | 54 | 5270 | 18.00 |
| | 62 | 5310 | 18.00 |
| | 102 | 5510 | 18.00 |
| | 110 | 5550 | 19.00 |
| | 134 | 5670 | 19.00 |
| | 151 | 5755 | 21.00 |
| | 159 | 5795 | 21.00 |
| Mode 4 | 36 | 5180 | 17.00 |
| | 40 | 5200 | 18.00 |
| | 48 | 5240 | 18.00 |
| | 52 | 5260 | 21.00 |
| | 60 | 5300 | 21.00 |
| | 64 | 5320 | 21.00 |
| | 100 | 5500 | 20.00 |
| | 116 | 5580 | 20.00 |

| | | | |
|--------|-----|------|-------|
| | 140 | 5700 | 20.00 |
| | 149 | 5745 | 21.00 |
| | 157 | 5785 | 21.00 |
| | 165 | 5825 | 21.00 |
| Mode 5 | 38 | 5190 | 16.00 |
| | 46 | 5230 | 17.00 |
| | 54 | 5270 | 19.00 |
| | 62 | 5310 | 19.00 |
| | 102 | 5510 | 19.00 |
| | 110 | 5550 | 19.00 |
| | 134 | 5670 | 19.00 |
| | 151 | 5755 | 21.00 |
| | 159 | 5795 | 21.00 |
| Mode 6 | 42 | 5210 | 16.00 |
| | 58 | 5290 | 18.00 |
| | 106 | 5530 | 18.00 |
| | 122 | 5610 | 19.00 |
| | 155 | 5775 | 21.00 |

3.5 Test Matrix

| Test item | Model : POS Terminal | |
|----------------------------------|-------------------------------------|-------------------------------------|
| | SN: 82240521970040 | SN: 82240521970039 |
| Power Output | <input checked="" type="checkbox"/> | <input type="checkbox"/> |
| Radiated Emission | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| Radiated Emission Band Edge | <input type="checkbox"/> | <input checked="" type="checkbox"/> |
| AC Power Line Conducted Emission | <input type="checkbox"/> | <input checked="" type="checkbox"/> |

Note1: The only difference between sample #1 and sample #2 is whether to keep the original antenna, sample #1 is a conduction test product that removes the original antenna and is equipped with SMA wires, and sample #2 is a complete product that retains the original antenna.

3.6 Test Facility

Tset Location A : FCC Designation Number: CN1199


Tset Location B : FCC Designation Number: CN1321

4 TEST RESULTS

| | |
|-------------------------|----------------------|
| 4.1 Power Output | VERDICT: PASS |
|-------------------------|----------------------|

| 4.1.1 Limit | |
|---|---|
| Standard | FCC Part 15 Subpart E Paragraph 15.407 (a) |
| <input checked="" type="checkbox"/> | For the band 5.15-5.25 GHz |
| <input type="checkbox"/> | Outdoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$ and $\leq 125\text{mW}$ at any angle above 30 degrees |
| <input type="checkbox"/> | Indoor access point: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 6)$ |
| <input type="checkbox"/> | Fixed point-to-point access points: the maximum conducted output power shall not exceed 1 W. If $G_{TX} > 23\text{dBi}$, then $P_{out} \leq 30 - (G_{TX} - 23)$ |
| <input checked="" type="checkbox"/> | Mobile and portable client devices: the maximum conducted output power shall not exceed 250mW. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq 24 - (G_{TX} - 6)$ |
| <input checked="" type="checkbox"/> | For the band 5.25-5.35 GHz: |
| <input checked="" type="checkbox"/> | The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \text{Log B}$, where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \text{Log B}) - (G_{TX} - 6)$ |
| <input checked="" type="checkbox"/> | For the 5.47-5.725 GHz: |
| <input checked="" type="checkbox"/> | The maximum conducted output power shall not exceed 250mW or $11\text{dBm} + 10 \text{Log B}$, where B is the 26dB emission bandwidth in MHz. If $G_{TX} > 6\text{dBi}$, then $P_{out} \leq (\text{The lesser of } 24 \text{ or } 11\text{dBm} + 10 \text{Log B}) - (G_{TX} - 6)$ |
| <input checked="" type="checkbox"/> | For the band 5.725-5.85 GHz: |
| <input checked="" type="checkbox"/> | Point-to-multipoint systems (P2M): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W. If $G_{TX} > 6 \text{ dBi}$, then $P_{Out} = 30 - (G_{TX} - 6)$ |
| <input type="checkbox"/> | Point-to-point systems (P2P): the maximum conducted output power (P_{Out}) shall not exceed the lesser of 1 W |
| Note 1 : GTX directional gain of transmitting antennas. | |
| Note 2 : Pout is maximum conducted output power . | |

4.1.2 Test Setup

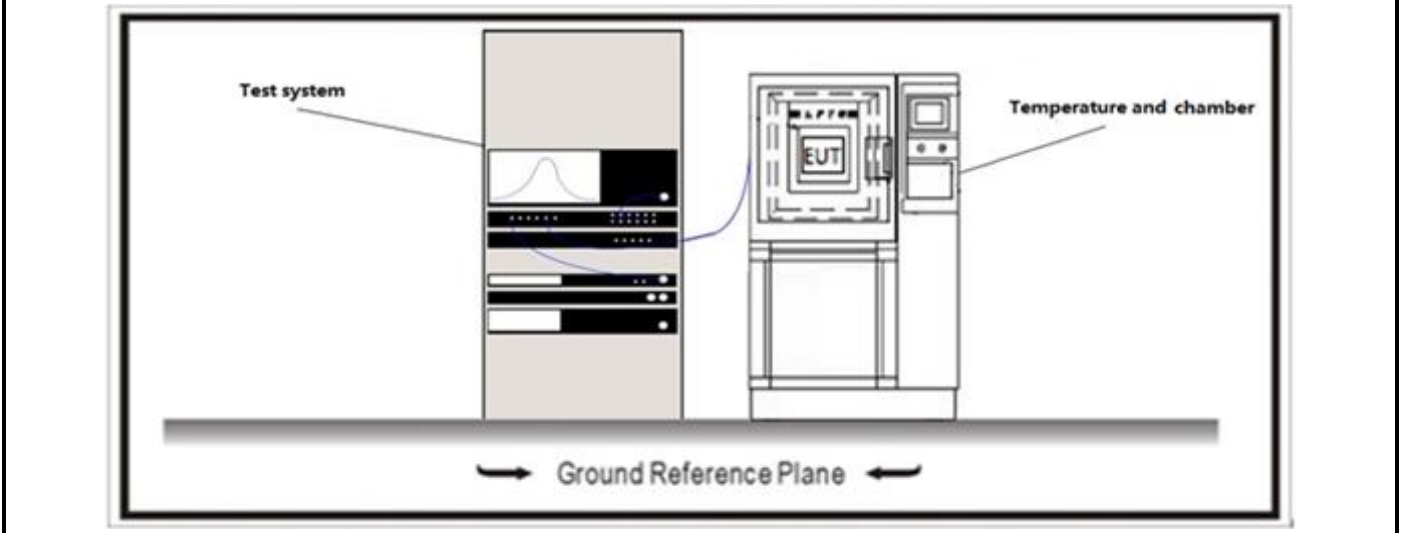

4.1.3 Test Procedure

| | References Rule | Chapter | Description |
|-------------------------------------|---|----------|---|
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.3 | Maximum conducted output power |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.3.2 | Maximum conducted output power measurement using a spectrum analyzer (SA) or EMI receiver |
| | <input type="checkbox"/> ANSI C63.10 | 12.3.2.2 | Method SA-1 |
| | <input type="checkbox"/> ANSI C63.10 | 12.3.2.3 | Method SA-1A (alternative) |
| | <input checked="" type="checkbox"/> ANSI C63.10 | 12.3.2.4 | Method SA-2 |
| | <input type="checkbox"/> ANSI C63.10 | 12.3.2.5 | Method SA-2A (alternative) |
| | <input type="checkbox"/> ANSI C63.10 | 12.3.2.6 | Method SA-3 |
| | <input type="checkbox"/> ANSI C63.10 | 12.3.2.7 | Method SA-3A (alternative) |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.3.3 | Maximum conducted output power using a power meter |
| | <input type="checkbox"/> ANSI C63.10 | 12.3.3.1 | Method PM |
| | <input checked="" type="checkbox"/> ANSI C63.10 | 12.3.3.2 | Method PM-G |

| Directional Gain Calculations for In-Band test method | | | | |
|---|-------------------------------------|-------------|-------------|---|
| | References Rule | | Chapter | Description |
| <input type="checkbox"/> | KDB 662911 | | F2)a) | Basic methodology |
| | <input type="checkbox"/> | KDB 662911 | F2)a) (i) | transmit signals are correlated |
| | <input type="checkbox"/> | KDB 662911 | F2)a) (ii) | transmit signals are uncorrelated |
| <input type="checkbox"/> | KDB 662911 | | F2)b) | Sectorized antenna systems. |
| <input type="checkbox"/> | KDB 662911 | | F2)c) | Cross-polarized antennas |
| | <input type="checkbox"/> | ANSI C63.10 | F2)c) (i) | Cross-polarized antennas |
| | <input type="checkbox"/> | ANSI C63.10 | F2)c) (ii) | Multiple antennas |
| <input type="checkbox"/> | KDB 662911 | | F2)e) | Spatial stream |
| | <input type="checkbox"/> | KDB 662911 | F2)e) (i) | Antennas have the same gain |
| | <input type="checkbox"/> | KDB 662911 | F2)e) (ii) | Antenna have the different gain with one spatial stream |
| | <input type="checkbox"/> | KDB 662911 | F2)e) (iii) | Antenna have the different gain with more than one spatial stream |
| <input checked="" type="checkbox"/> | KDB 662911 | | F2)f) | Cyclic Delay Diversity (CDD) |
| | <input type="checkbox"/> | KDB 662911 | F2)f) (i) | Antennas have the same gain |
| | <input type="checkbox"/> | KDB 662911 | F2)f) (ii) | Antenna have the different gain with one spatial stream |
| | <input checked="" type="checkbox"/> | KDB 662911 | F2)f) (iii) | Antenna have the different gain with more than one spatial stream |

4.2 Radiated Emissions**VERDICT: PASS****4.2.1 Limit****Standard** FCC Part 15 Subpart C Paragraph 15.205

Restricted Bands of operation

| MHz | MHz | MHz | GHz |
|--------------------------|---------------------|---------------|------------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| ¹ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (²) |
| 13.36-13.41 | | | |

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.²Above 38.6

FCC Part 15 Subpart C Paragraph 15.209 (Restricted Band Emissions Limit)


| Frequency (MHz) | Field strength (μ V/m) | Field strength (dB μ V/m) | Measurement distance (m) |
|-----------------|-----------------------------|-------------------------------|--------------------------|
| 0.009 - 0.49 | 2400/F(kHz) | 48.5 – 13.8 | 300 ^(Note 1) |
| 0.49 - 1.705 | 24000/F(kHz) | 33.8 - 23 | 30 ^(Note 1) |
| 1.705 - 30 | 30 | 29.5 | 30 ^(Note 1) |
| 30 - 88 | 100 | 40 | 3 ^(Note 2) |
| 88 - 216 | 150 | 43.5 | 3 ^(Note 2) |
| 216 - 960 | 200 | 46 | 3 ^(Note 2) |
| Above 960 | 500 | 54 | 3 ^(Note 2) |

Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).


FCC Part 15 Subpart C Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit)

| Operating Frequency Band (MHz) | EIRP Limit (dBm/MHz) | Equivalent Field Strength at 3m (dB μ V/m) |
|--------------------------------|----------------------|--|
| 5150 - 5250 | -27 | 68.3 |
| 5250 - 5350 | -27 | 68.3 |
| 5470 - 5725 | -27 | 68.3 |

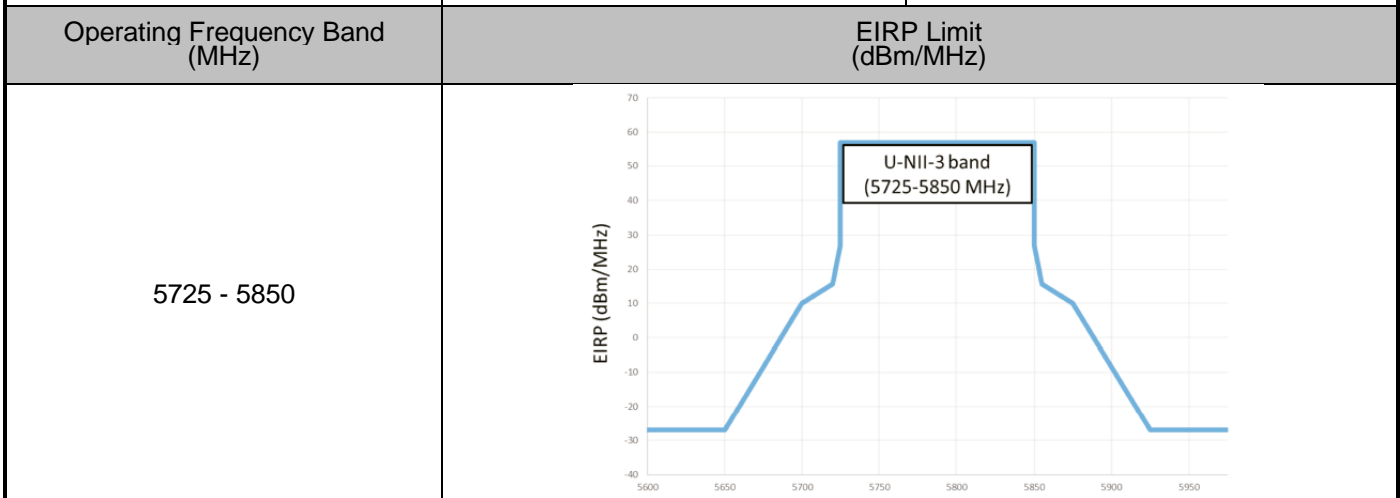


4.2.2 Test Setup


Below 30MHz Test Setup:

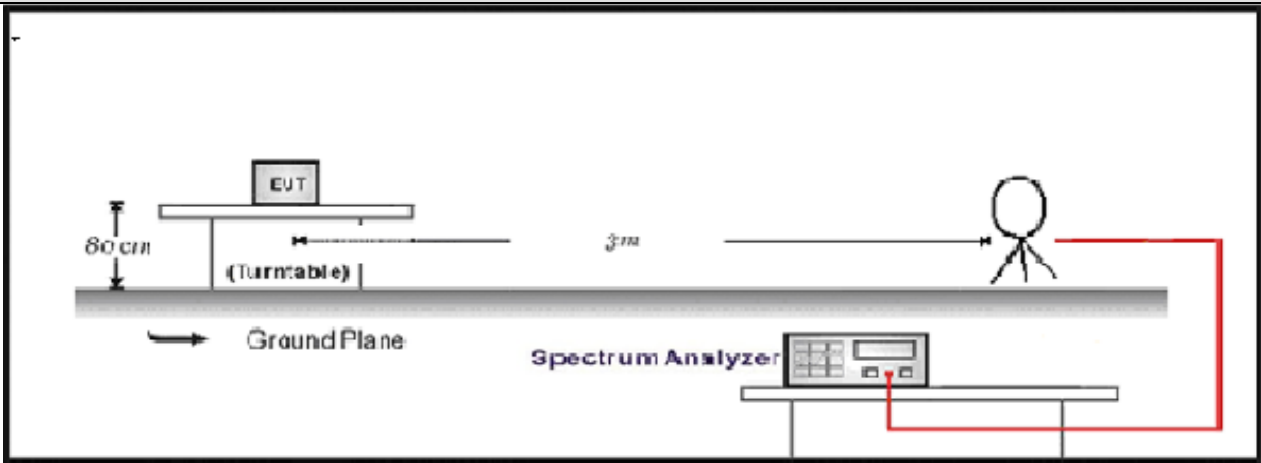

30MHz-1GHz Test Setup:

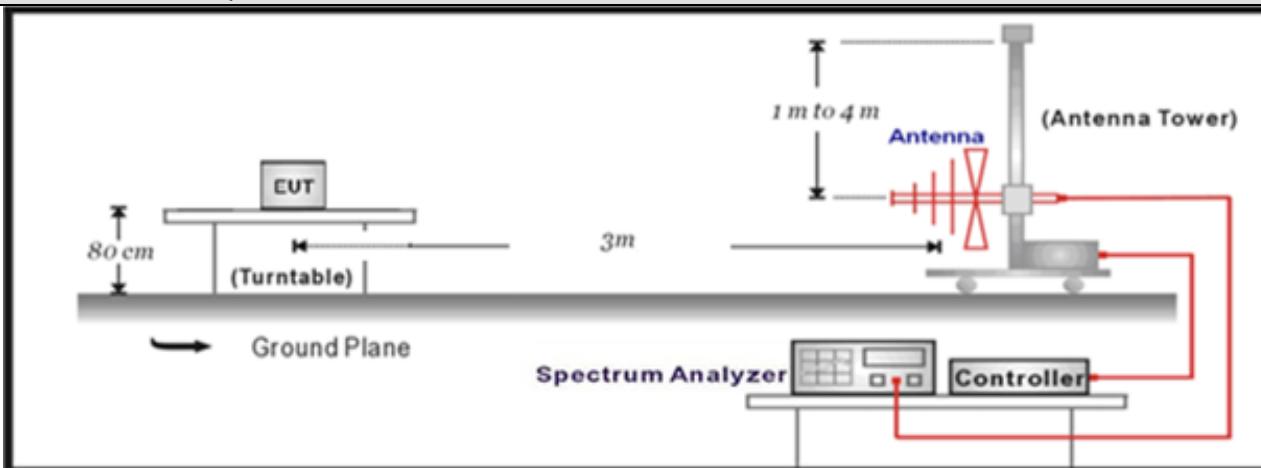

Above 1GHz Test Setup:

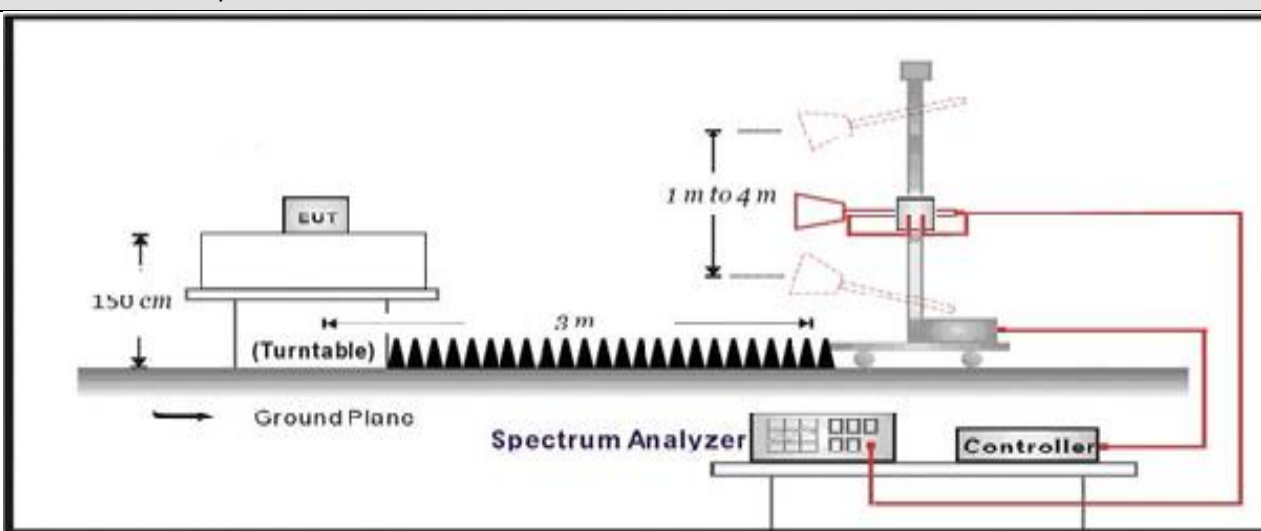

4.2.3 Test Procedure

| Test Method | | | |
|-------------------------------------|-----------------|----------|--|
| | References Rule | Chapter | Description |
| <input type="checkbox"/> | ANSI C63.10 | 12.7.3 | Emissions in non-restricted frequency bands |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.2 | Emissions in restricted frequency bands |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.5 | Radiated emission measurements |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.6 | Procedure for peak unwanted emissions measurements above 1000 MHz |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.7 | Procedures for average unwanted emissions measurements above 1000 MHz |
| <input type="checkbox"/> | ANSI C63.10 | 12.7.7.2 | Method AD (average detection)—primary method |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.7.3 | Method VB-A (Alternative) |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 6.4 | Radiated emissions from unlicensed wireless devices below 30 MHz |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 6.5 | Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 6.6 | Radiated emissions from unlicensed wireless devices above 1 GHz |

| | |
|---|----------------------|
| 4.3 AC Power Line Conducted Emission | VERDICT: PASS |
|---|----------------------|

4.3.1 Limit

| | | |
|-----------------------|--|---------------------------------|
| Standard | FCC Part 15 Subpart C Paragraph 15.207 | |
| Frequency range [MHz] | Limit: QP [dB(μV) ¹⁾ | Limit: AV [dB(μV) ¹⁾ |
| 0,15 - 0,50 | 66 – 56 ²⁾ | 56 - 46 ²⁾ |
| 0,50 - 5,0 | 56 | 46 |
| 5,0 - 30 | 60 | 50 |


¹⁾ At the transition frequency, the lower limit applies.

²⁾ The limit decreases linearly with the logarithm of the frequency.

NOTE 1: The exclusion band for transmitters shall be considered for transmitters operating at frequencies below 30 MHz.

NOTE 2: Where the AC output port is directly connected (or via a circuit breaker) to the AC power input port of the EUT the AC power output port need not to be tested.

4.3.2 Test Setup

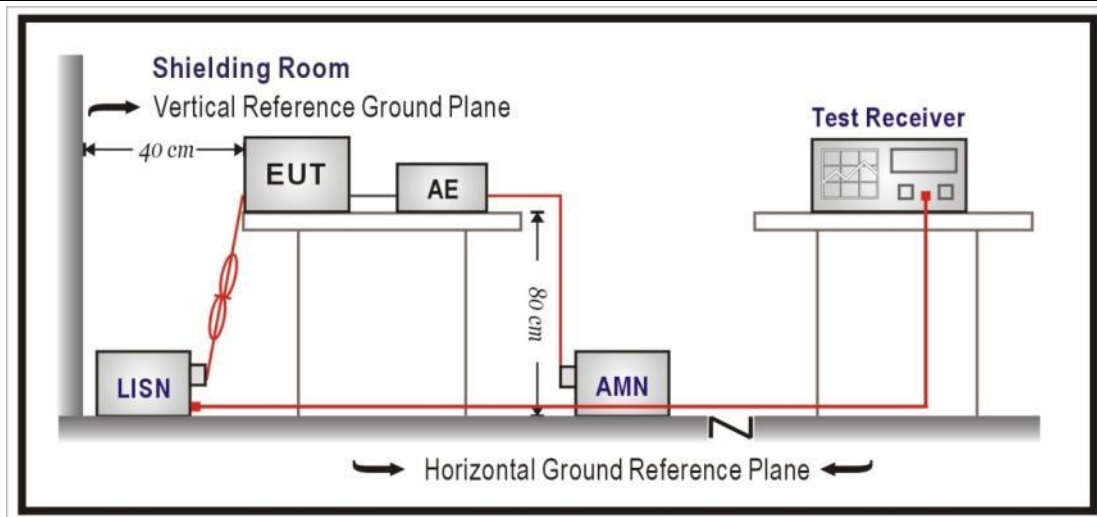

4.3.3 Test Procedure

| | References Rule | Chapter | Item |
|-------------------------------------|------------------|---------|---|
| <input checked="" type="checkbox"/> | ANSI C63.10-2013 | 6.2 | Standard test method for ac power-line conducted emissions from unlicensed wireless devices |

4.4 Radiated Emission Band Edge**VERDICT: PASS****4.4.1 Limit****Standard** FCC Part 15 Subpart C Paragraph 15.205

Restricted Bands of operation

| MHz | MHz | MHz | GHz |
|--------------------------|---------------------|---------------|------------------|
| 0.090-0.110 | 16.42-16.423 | 399.9-410 | 4.5-5.15 |
| ¹ 0.495-0.505 | 16.69475-16.69525 | 608-614 | 5.35-5.46 |
| 2.1735-2.1905 | 16.80425-16.80475 | 960-1240 | 7.25-7.75 |
| 4.125-4.128 | 25.5-25.67 | 1300-1427 | 8.025-8.5 |
| 4.17725-4.17775 | 37.5-38.25 | 1435-1626.5 | 9.0-9.2 |
| 4.20725-4.20775 | 73-74.6 | 1645.5-1646.5 | 9.3-9.5 |
| 6.215-6.218 | 74.8-75.2 | 1660-1710 | 10.6-12.7 |
| 6.26775-6.26825 | 108-121.94 | 1718.8-1722.2 | 13.25-13.4 |
| 6.31175-6.31225 | 123-138 | 2200-2300 | 14.47-14.5 |
| 8.291-8.294 | 149.9-150.05 | 2310-2390 | 15.35-16.2 |
| 8.362-8.366 | 156.52475-156.52525 | 2483.5-2500 | 17.7-21.4 |
| 8.37625-8.38675 | 156.7-156.9 | 2690-2900 | 22.01-23.12 |
| 8.41425-8.41475 | 162.0125-167.17 | 3260-3267 | 23.6-24.0 |
| 12.29-12.293 | 167.72-173.2 | 3332-3339 | 31.2-31.8 |
| 12.51975-12.52025 | 240-285 | 3345.8-3358 | 36.43-36.5 |
| 12.57675-12.57725 | 322-335.4 | 3600-4400 | (²) |
| 13.36-13.41 | | | |

¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.²Above 38.6

FCC Part 15 Subpart C Paragraph 15.209 (Restricted Band Emissions Limit)

| Frequency (MHz) | Field strength (μ V/m) | Field strength (dB μ V/m) | Measurement distance (m) |
|-----------------|-----------------------------|-------------------------------|--------------------------|
| 0.009 - 0.49 | 2400/F(kHz) | 48.5 – 13.8 | 300 ^(Note 1) |
| 0.49 - 1.705 | 24000/F(kHz) | 33.8 - 23 | 30 ^(Note 1) |
| 1.705 - 30 | 30 | 29.5 | 30 ^(Note 1) |
| 30 - 88 | 100 | 40 | 3 ^(Note 2) |
| 88 - 216 | 150 | 43.5 | 3 ^(Note 2) |
| 216 - 960 | 200 | 46 | 3 ^(Note 2) |
| Above 960 | 500 | 54 | 3 ^(Note 2) |


Note 1: At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade).

Note 2: At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

FCC Part 15 Subpart C Paragraph 15.407(5)(b) (Unrestricted Band Emissions Limit)


| Operating Frequency Band (MHz) | EIRP Limit (dBm/MHz) | Equivalent Field Strength at 3m (dB μ V/m) |
|--------------------------------|----------------------|--|
| 5150 - 5250 | -27 | 68.3 |
| 5250 - 5350 | -27 | 68.3 |
| 5470 - 5725 | -27 | 68.3 |

| Operating Frequency Band (MHz) | EIRP Limit (dBm/MHz) |
|--------------------------------|----------------------|
| 5725 - 5850 | |

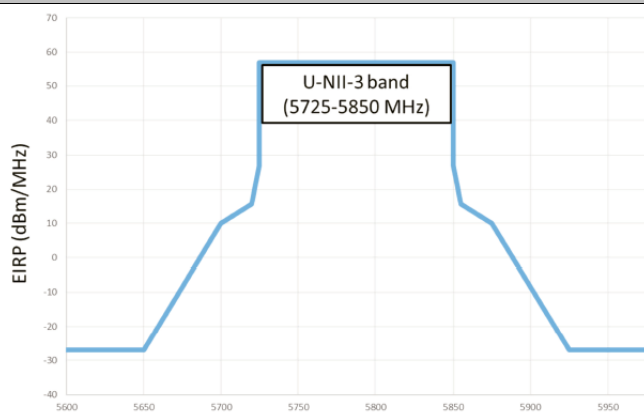

4.4.2 Test Setup

Above 1GHz Test Setup:

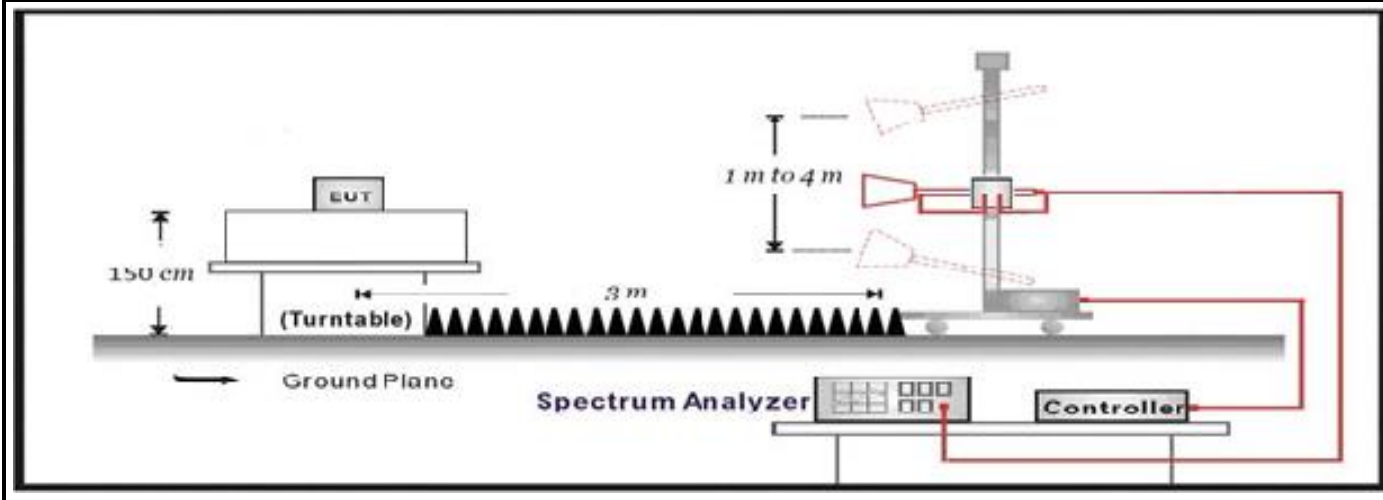

4.4.3 Test Procedure

| | References Rule | Chapter | Description |
|-------------------------------------|--------------------------|----------|--|
| <input type="checkbox"/> | ANSI C63.10 | 12.7.3 | Emissions in non-restricted frequency bands |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.2 | Emissions in restricted frequency bands |
| <input type="checkbox"/> | ANSI C63.10 | 12.7.5 | Radiated emission measurements |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.6 | Procedure for peak unwanted emissions measurements above 1000 MHz |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.7 | Procedures for average unwanted emissions measurements above 1000 MHz |
| <input type="checkbox"/> | ANSI C63.10 | 12.7.7.2 | Method AD (average detection)—primary method |
| <input checked="" type="checkbox"/> | ANSI C63.10 | 12.7.7.3 | Method VB-A (Alternative) |
| <input type="checkbox"/> | ANSI C63.10 | 6.4 | Radiated emissions from unlicensed wireless devices below 30 MHz |
| <input type="checkbox"/> | ANSI C63.10 | 6.5 | Radiated emissions from unlicensed wireless devices in the frequency range of 30 MHz to 1000 MHz |
| <input type="checkbox"/> | ANSI C63.10 | 6.6 | Radiated emissions from unlicensed wireless devices above 1 GHz |
| <input type="checkbox"/> | FCC KDB 789033 D02v02r01 | G.2 | Unwanted Emissions that fall Outside of the Restricted Bands |
| <input type="checkbox"/> | FCC KDB 789033 D02v02r01 | G.1 | Unwanted Emissions in the Restricted Bands |
| <input type="checkbox"/> | FCC KDB 789033 D02v02r01 | G.4 | Procedure for Unwanted Emissions Measurements below 1000 MHz |
| <input type="checkbox"/> | FCC KDB 789033 D02v02r01 | G.5 | Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz |
| <input type="checkbox"/> | FCC KDB 789033 D02v02r01 | G.6 | Procedures for Average Unwanted Emissions Measurements above 1000 MHz |

| | | | | |
|--|--------------------------|-----------------------------|-------|---|
| | <input type="checkbox"/> | FCC KDB 789033 D02v02r01 | G.6.c | Method AD (Average detection)—primary method |
| | <input type="checkbox"/> | FCC KDB 789033 D02v02r01 | G.6.d | Method VB (Averaging using reduced video bandwidth): Alternative method. |

5 TEST SETUP PHOTO AND EUT PHOTO

Remark: The test setup photo and EUT Photo please see appendix.

6 TEST RESULT

Appendix A: Power Output

U-NII-1/2A/2C/3


| SISO : Antenna 1 | | | | | | | |
|------------------|---------|----------------------|-----------------------|------------------|-----------------------------|------------------|--------|
| Mode | Channel | Test Frequency (MHz) | Conducted Power (dBm) | EIRP Power (dBm) | Conducted Power Limit (dBm) | EIRP Limit (dBm) | Result |
| Mode 1 | 36 | 5180 | 11.13 | 18.23 | 23.98 | 30.00 | PASS |
| | 40 | 5200 | 11.23 | 18.33 | 23.98 | 30.00 | PASS |
| | 48 | 5240 | 11.32 | 18.42 | 23.98 | 30.00 | PASS |
| | 52 | 5260 | 14.76 | 21.86 | 23.98 | 30.00 | PASS |
| | 60 | 5300 | 14.81 | 21.91 | 23.86 | 30.00 | PASS |
| | 64 | 5320 | 14.21 | 21.31 | 23.86 | 30.00 | PASS |
| | 100 | 5500 | 13.78 | 20.88 | 23.87 | 30.00 | PASS |
| | 116 | 5580 | 13.81 | 20.91 | 23.86 | 30.00 | PASS |
| | 140 | 5700 | 13.56 | 20.66 | 23.96 | 30.00 | PASS |
| | 149 | 5745 | 14.18 | 21.28 | 30.00 | 30.00 | PASS |
| | 157 | 5785 | 14.22 | 21.32 | 30.00 | 30.00 | PASS |
| | 165 | 5825 | 14.06 | 21.16 | 30.00 | 30.00 | PASS |
| Mode 2 | 36 | 5180 | 11.12 | 18.22 | 23.98 | 30.00 | PASS |
| | 40 | 5200 | 11.67 | 18.77 | 23.98 | 30.00 | PASS |
| | 48 | 5240 | 11.73 | 18.83 | 23.98 | 30.00 | PASS |
| | 52 | 5260 | 14.23 | 21.33 | 23.98 | 30.00 | PASS |
| | 60 | 5300 | 14.78 | 21.88 | 23.98 | 30.00 | PASS |
| | 64 | 5320 | 14.38 | 21.48 | 23.98 | 30.00 | PASS |
| | 100 | 5500 | 13.23 | 20.33 | 23.98 | 30.00 | PASS |
| | 116 | 5580 | 13.14 | 20.24 | 23.98 | 30.00 | PASS |
| | 140 | 5700 | 12.58 | 19.68 | 23.98 | 30.00 | PASS |
| | 149 | 5745 | 13.67 | 20.77 | 30.00 | 30.00 | PASS |
| | 157 | 5785 | 13.87 | 20.97 | 30.00 | 30.00 | PASS |
| | 165 | 5825 | 13.78 | 20.88 | 30.00 | 30.00 | PASS |
| Mode 3 | 38 | 5190 | 9.01 | 16.11 | 23.98 | 30.00 | PASS |
| | 46 | 5230 | 9.41 | 16.51 | 23.98 | 30.00 | PASS |
| | 54 | 5270 | 11.78 | 18.88 | 23.98 | 30.00 | PASS |
| | 62 | 5310 | 11.45 | 18.55 | 23.98 | 30.00 | PASS |
| | 102 | 5510 | 10.53 | 17.63 | 23.98 | 30.00 | PASS |
| | 110 | 5550 | 11.23 | 18.33 | 23.98 | 30.00 | PASS |
| | 134 | 5670 | 11.45 | 18.55 | 23.98 | 30.00 | PASS |
| | 151 | 5755 | 14.42 | 21.52 | 30.00 | 30.00 | PASS |
| | 159 | 5795 | 14.28 | 21.38 | 30.00 | 30.00 | PASS |
| Mode 4 | 36 | 5180 | 10.23 | 17.33 | 23.98 | 30.00 | PASS |
| | 40 | 5200 | 11.56 | 18.66 | 23.98 | 30.00 | PASS |

| | | | | | | | |
|--------|-----|------|-------|-------|-------|-------|------|
| | 48 | 5240 | 11.45 | 18.55 | 23.98 | 30.00 | PASS |
| | 52 | 5260 | 13.78 | 20.88 | 23.98 | 30.00 | PASS |
| | 60 | 5300 | 13.61 | 20.71 | 23.98 | 30.00 | PASS |
| | 64 | 5320 | 13.64 | 20.74 | 23.98 | 30.00 | PASS |
| | 100 | 5500 | 13.23 | 20.33 | 23.98 | 30.00 | PASS |
| | 116 | 5580 | 13.19 | 20.29 | 23.98 | 30.00 | PASS |
| | 140 | 5700 | 12.22 | 19.32 | 23.98 | 30.00 | PASS |
| | 149 | 5745 | 13.98 | 21.08 | 30.00 | 30.00 | PASS |
| | 157 | 5785 | 14.12 | 21.22 | 30.00 | 30.00 | PASS |
| | 165 | 5825 | 14.23 | 21.33 | 30.00 | 30.00 | PASS |
| Mode 5 | 38 | 5190 | 9.98 | 17.08 | 23.98 | 30.00 | PASS |
| | 46 | 5230 | 10.64 | 17.74 | 23.98 | 30.00 | PASS |
| | 54 | 5270 | 11.65 | 18.75 | 23.98 | 30.00 | PASS |
| | 62 | 5310 | 11.61 | 18.71 | 23.98 | 30.00 | PASS |
| | 102 | 5510 | 10.52 | 17.62 | 23.98 | 30.00 | PASS |
| | 110 | 5550 | 11.35 | 18.45 | 23.98 | 30.00 | PASS |
| | 134 | 5670 | 11.54 | 18.64 | 23.98 | 30.00 | PASS |
| | 151 | 5755 | 14.23 | 21.33 | 30.00 | 30.00 | PASS |
| | 159 | 5795 | 14.02 | 21.12 | 30.00 | 30.00 | PASS |
| Mode 6 | 42 | 5210 | 9.81 | 16.91 | 23.98 | 30.00 | PASS |
| | 58 | 5290 | 10.78 | 17.88 | 23.98 | 30.00 | PASS |
| | 106 | 5530 | 10.54 | 17.64 | 23.98 | 30.00 | PASS |
| | 122 | 5610 | 11.52 | 18.62 | 23.98 | 30.00 | PASS |
| | 155 | 5775 | 14.23 | 21.33 | 30.00 | 30.00 | PASS |

Note 1. EIRP=Conducted power+ Antenna Gain.

Note 2. Antenna Gain Refer to Clause 1.2.


Appendix B: Radiated Emission

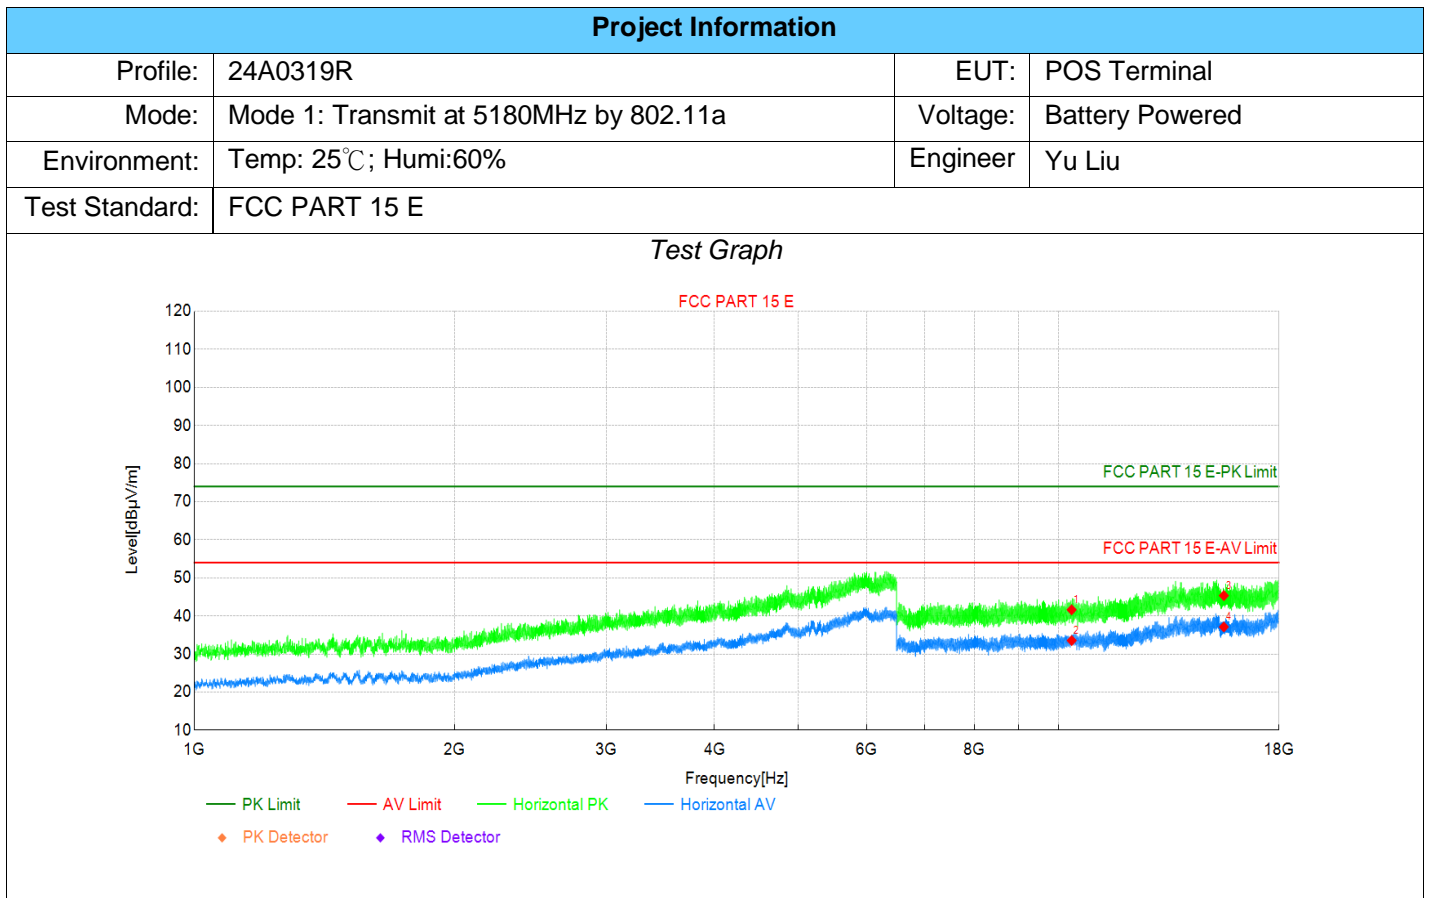

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10360 | 35.32 | 41.62 | 6.30 | 74.00 | 32.38 | PK | Horizo | PASS |
| 2 | 10360 | 27.24 | 33.54 | 6.30 | 54.00 | 20.46 | AV | Horizo | PASS |
| 3 | 15540 | 31.82 | 45.34 | 13.52 | 74.00 | 28.66 | PK | Horizo | PASS |
| 4 | 15540 | 23.59 | 37.11 | 13.52 | 54.00 | 16.89 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

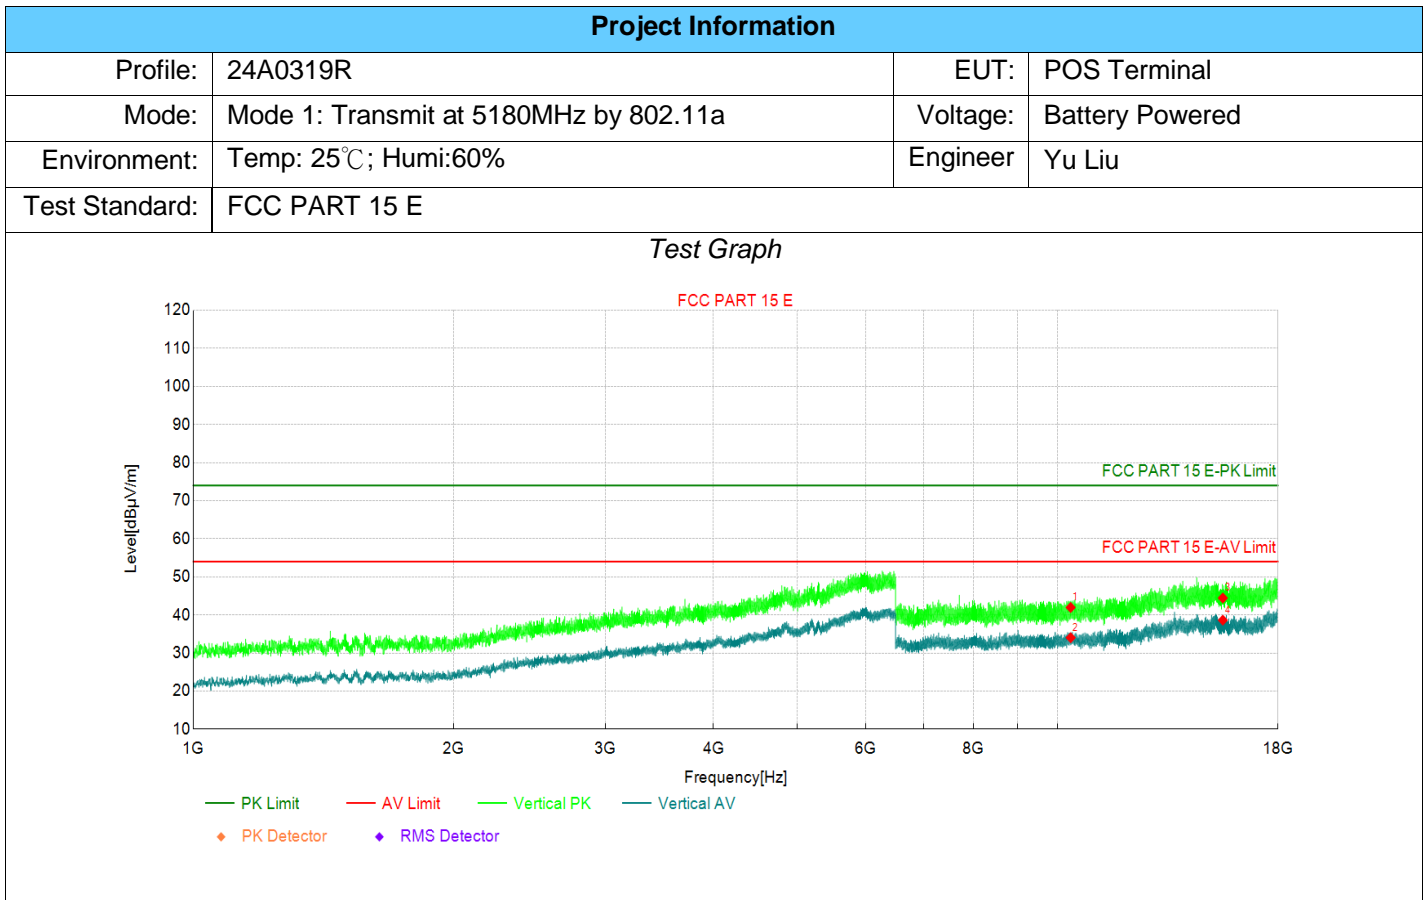

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10360 | 35.66 | 41.96 | 6.30 | 74.00 | 32.04 | PK | Vertic | PASS |
| 2 | 10360 | 27.73 | 34.03 | 6.30 | 54.00 | 19.97 | AV | Vertic | PASS |
| 3 | 15540 | 30.92 | 44.44 | 13.52 | 74.00 | 29.56 | PK | Vertic | PASS |
| 4 | 15540 | 25.12 | 38.64 | 13.52 | 54.00 | 15.36 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

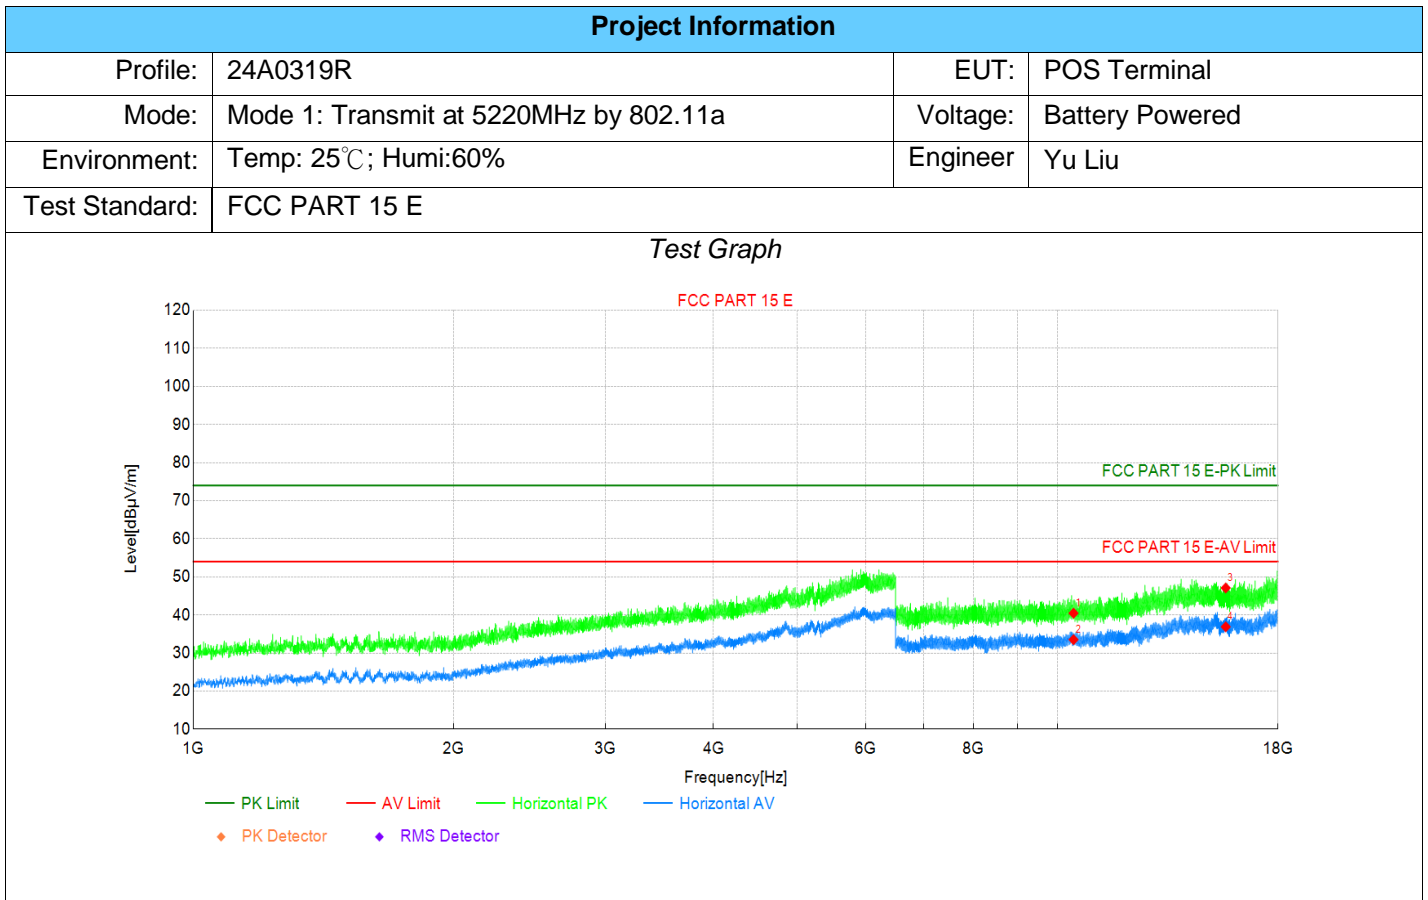

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10440 | 34.07 | 40.45 | 6.38 | 74.00 | 33.55 | PK | Horizo | PASS |
| 2 | 10440 | 27.13 | 33.51 | 6.38 | 54.00 | 20.49 | AV | Horizo | PASS |
| 3 | 15660 | 33.33 | 47.09 | 13.76 | 74.00 | 26.91 | PK | Horizo | PASS |
| 4 | 15660 | 23.12 | 36.88 | 13.76 | 54.00 | 17.12 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

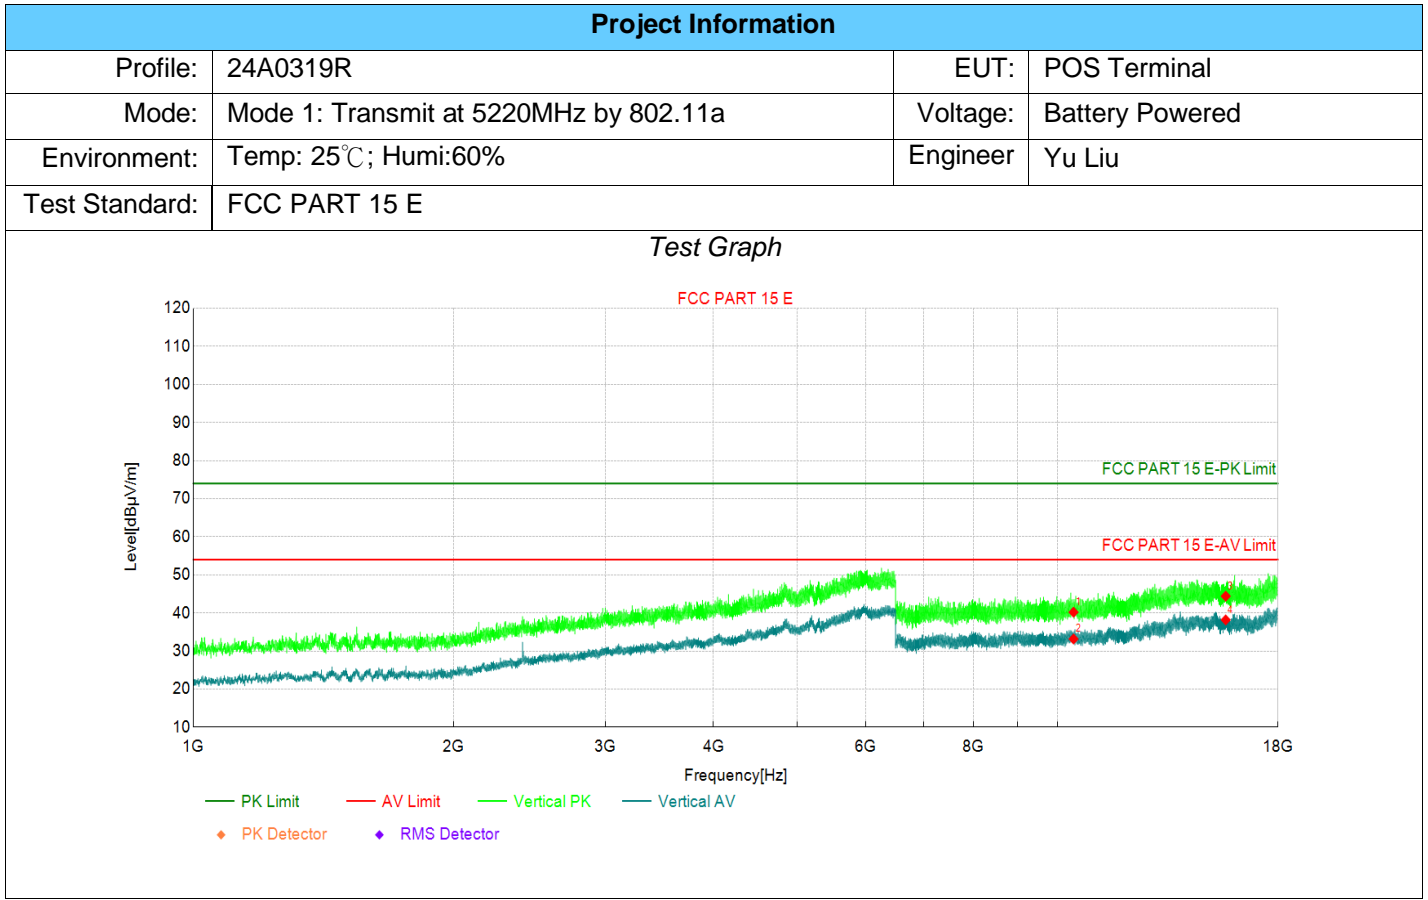

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10440 | 33.81 | 40.19 | 6.38 | 74.00 | 33.81 | PK | Vertic | PASS |
| 2 | 10440 | 26.78 | 33.16 | 6.38 | 54.00 | 20.84 | AV | Vertic | PASS |
| 3 | 15660 | 30.64 | 44.40 | 13.76 | 74.00 | 29.60 | PK | Vertic | PASS |
| 4 | 15660 | 24.41 | 38.17 | 13.76 | 54.00 | 15.83 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

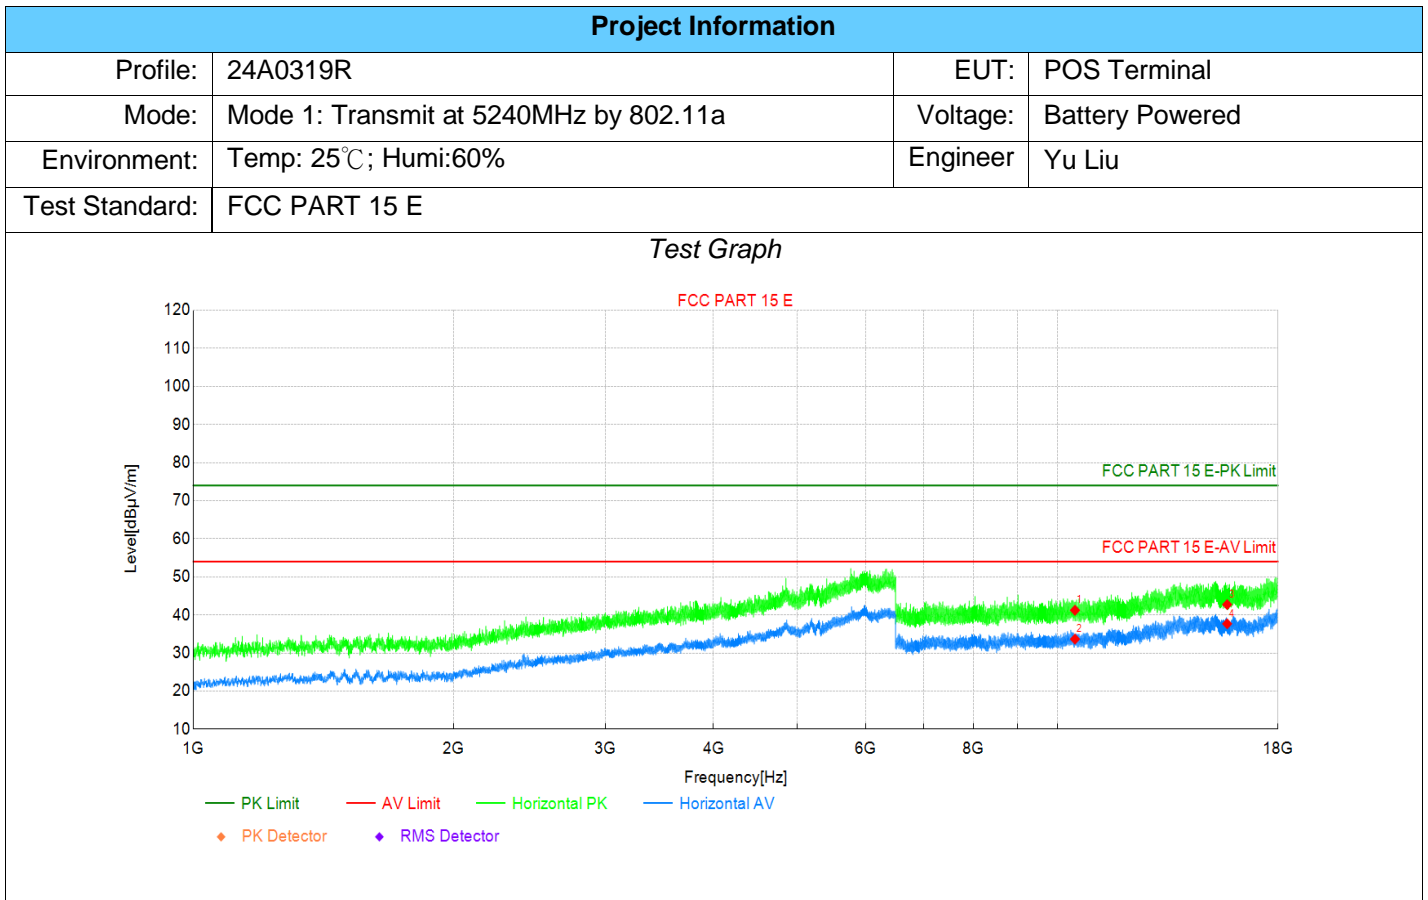

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10480 | 34.77 | 41.23 | 6.46 | 74.00 | 32.77 | PK | Horizo | PASS |
| 2 | 10480 | 27.19 | 33.65 | 6.46 | 54.00 | 20.35 | AV | Horizo | PASS |
| 3 | 15720 | 28.63 | 42.71 | 14.08 | 74.00 | 31.29 | PK | Horizo | PASS |
| 4 | 15720 | 23.60 | 37.68 | 14.08 | 54.00 | 16.32 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

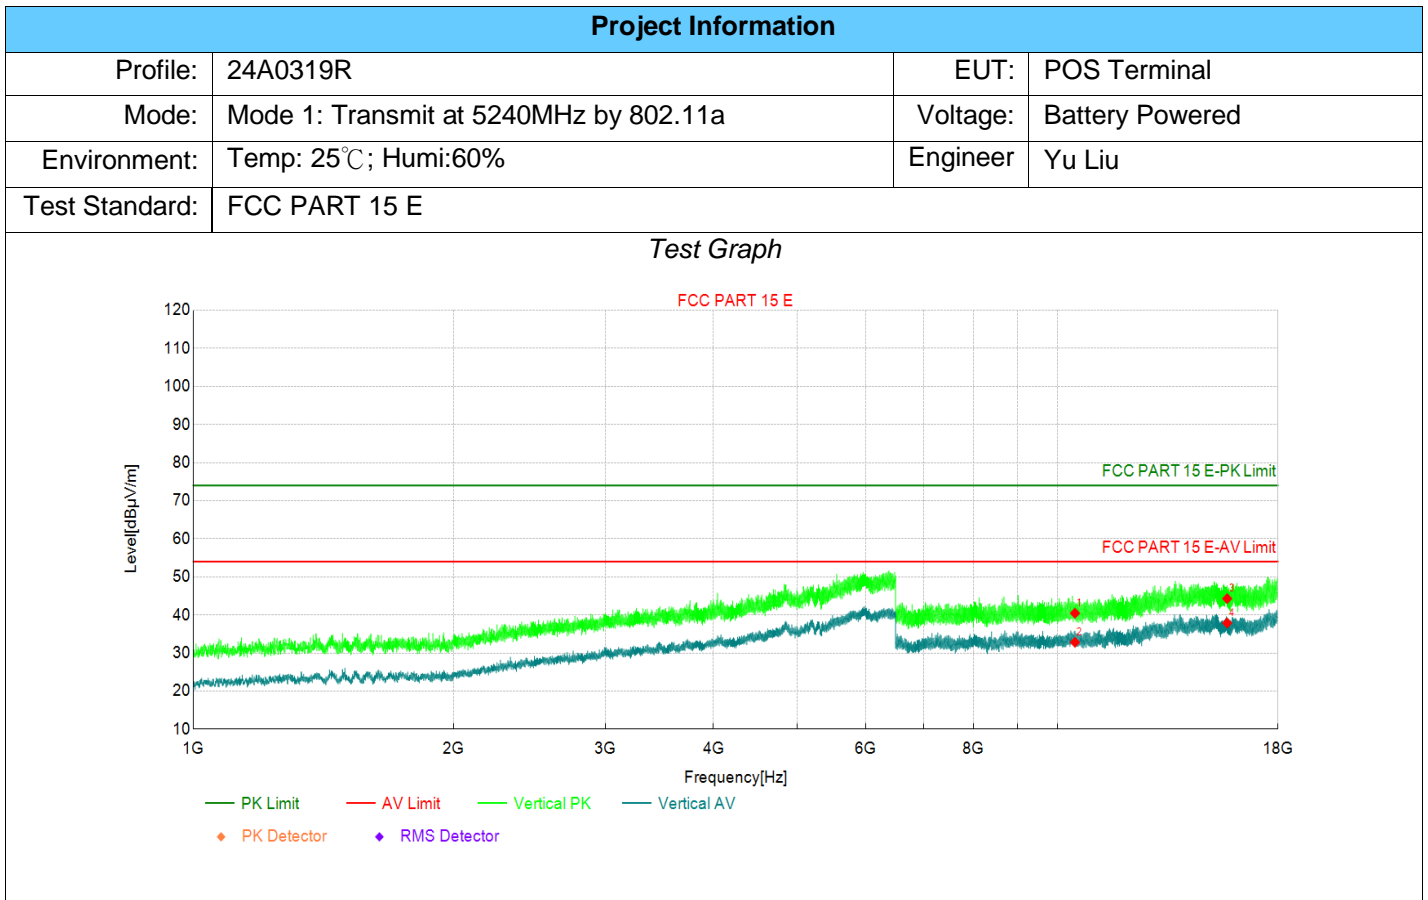

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10480 | 34.00 | 40.46 | 6.46 | 74.00 | 33.54 | PK | Vertic | PASS |
| 2 | 10480 | 26.36 | 32.82 | 6.46 | 54.00 | 21.18 | AV | Vertic | PASS |
| 3 | 15720 | 30.21 | 44.29 | 14.08 | 74.00 | 29.71 | PK | Vertic | PASS |
| 4 | 15720 | 23.81 | 37.89 | 14.08 | 54.00 | 16.11 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

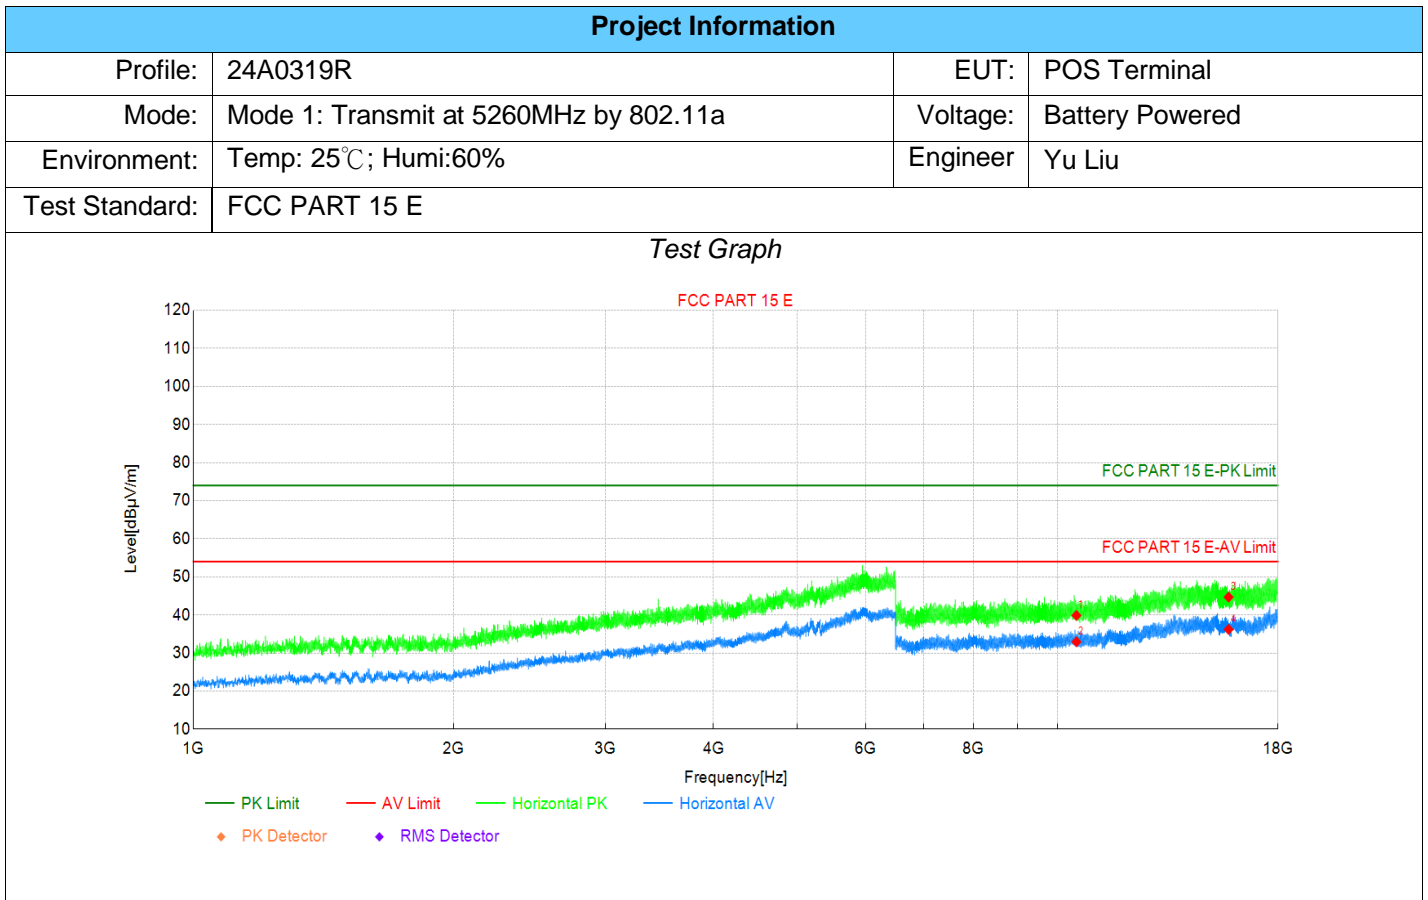

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10520 | 33.34 | 39.86 | 6.52 | 74.00 | 34.14 | PK | Horizo | PASS |
| 2 | 10520 | 26.42 | 32.94 | 6.52 | 54.00 | 21.06 | AV | Horizo | PASS |
| 3 | 15780 | 30.91 | 44.68 | 13.77 | 74.00 | 29.32 | PK | Horizo | PASS |
| 4 | 15780 | 22.44 | 36.21 | 13.77 | 54.00 | 17.79 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

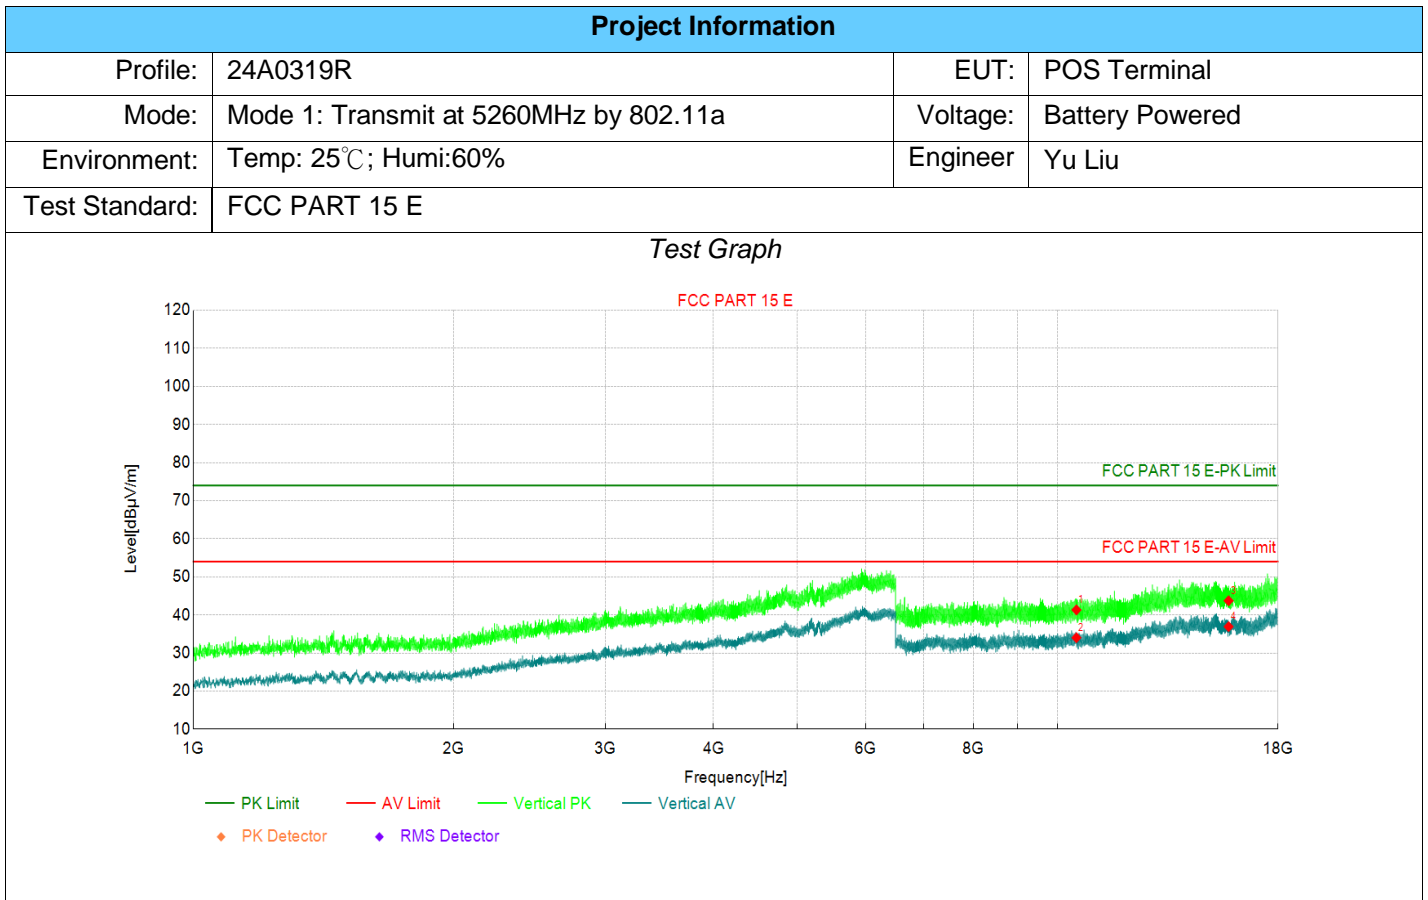

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10520 | 34.81 | 41.33 | 6.52 | 74.00 | 32.67 | PK | Vertic | PASS |
| 2 | 10520 | 27.50 | 34.02 | 6.52 | 54.00 | 19.98 | AV | Vertic | PASS |
| 3 | 15780 | 29.95 | 43.72 | 13.77 | 74.00 | 30.28 | PK | Vertic | PASS |
| 4 | 15780 | 23.15 | 36.92 | 13.77 | 54.00 | 17.08 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

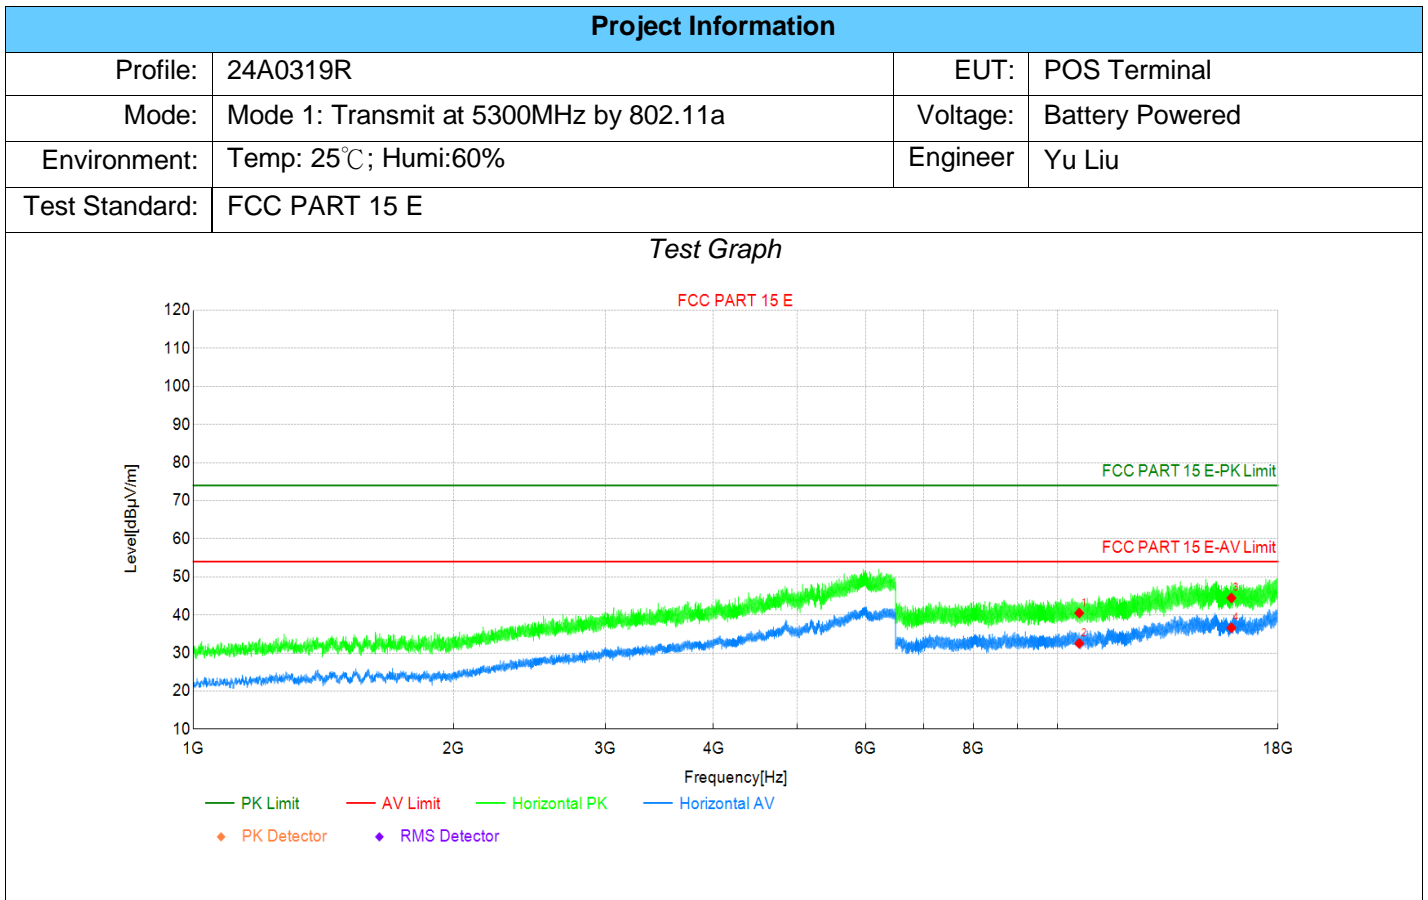

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10600 | 33.93 | 40.49 | 6.56 | 74.00 | 33.51 | PK | Horizo | PASS |
| 2 | 10600 | 25.95 | 32.51 | 6.56 | 54.00 | 21.49 | AV | Horizo | PASS |
| 3 | 15900 | 30.62 | 44.45 | 13.83 | 74.00 | 29.55 | PK | Horizo | PASS |
| 4 | 15900 | 22.78 | 36.61 | 13.83 | 54.00 | 17.39 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

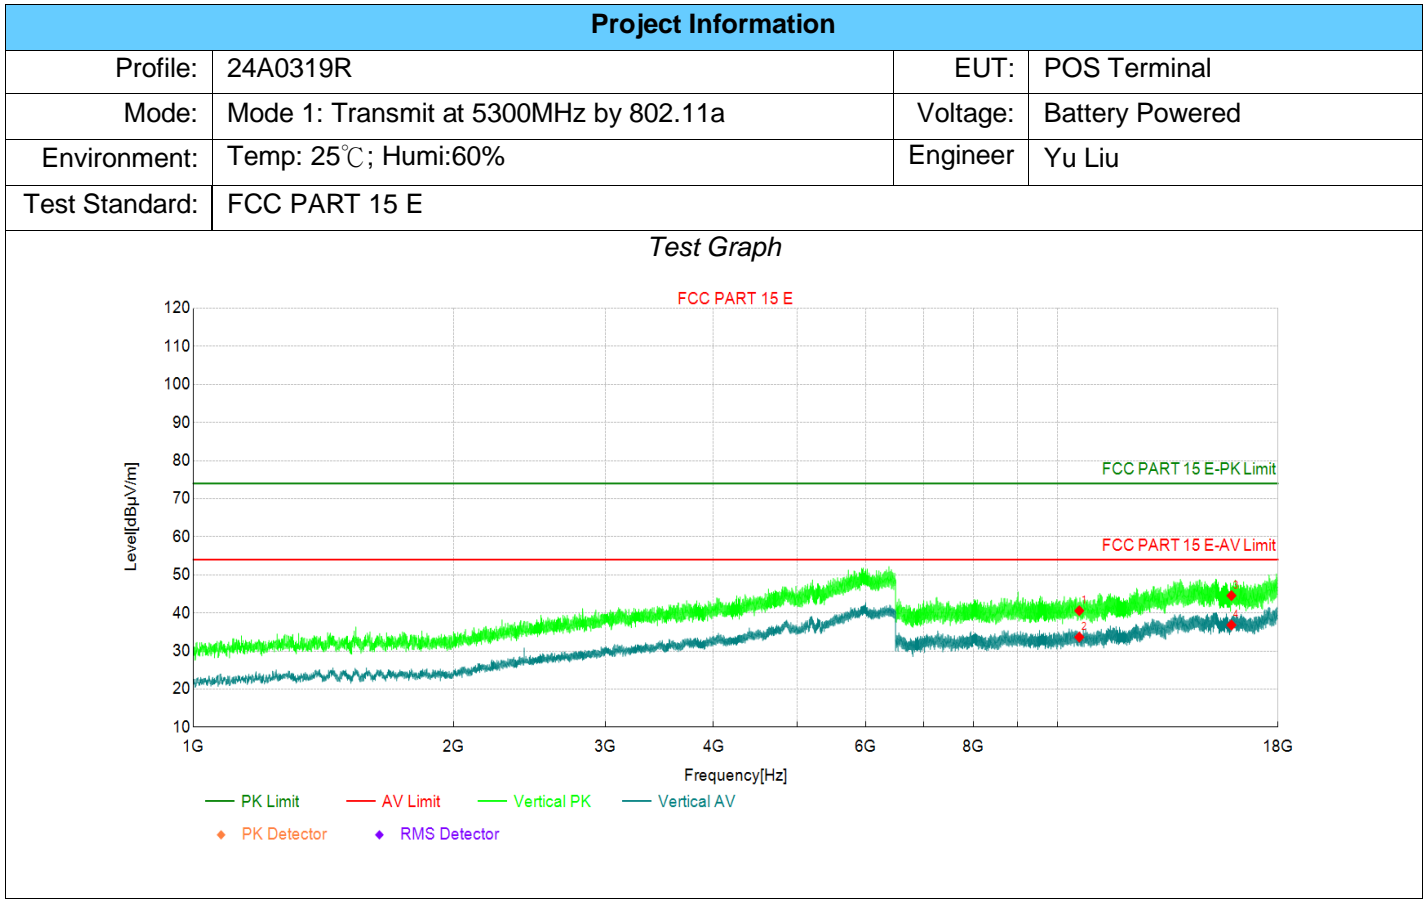

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10600 | 34.02 | 40.58 | 6.56 | 74.00 | 33.42 | PK | Vertic | PASS |
| 2 | 10600 | 27.09 | 33.65 | 6.56 | 54.00 | 20.35 | AV | Vertic | PASS |
| 3 | 15900 | 30.71 | 44.54 | 13.83 | 74.00 | 29.46 | PK | Vertic | PASS |
| 4 | 15900 | 23.00 | 36.83 | 13.83 | 54.00 | 17.17 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

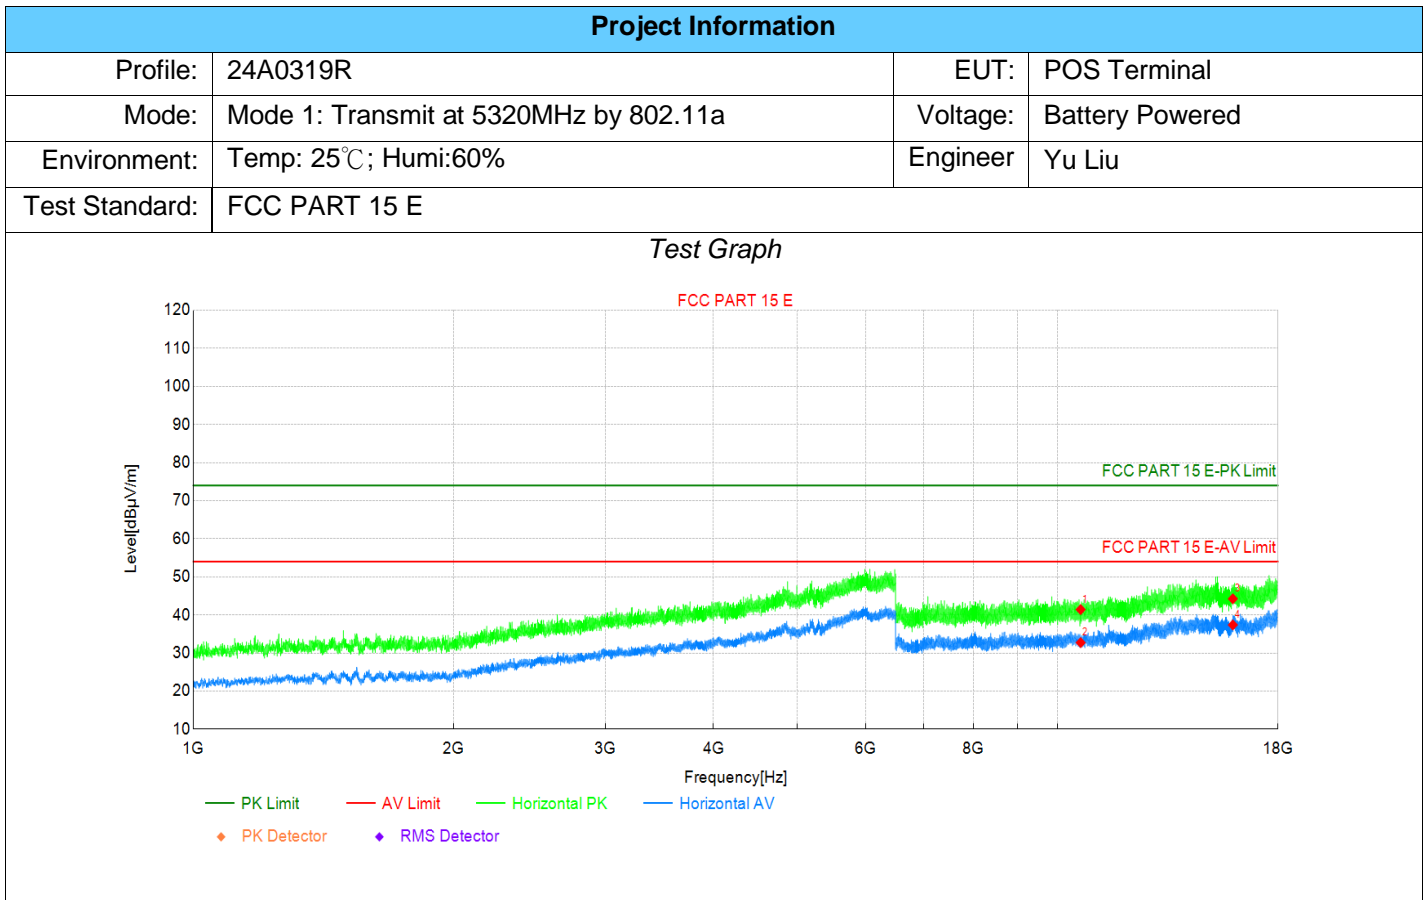

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10640 | 34.83 | 41.42 | 6.59 | 74.00 | 32.58 | PK | Horizo | PASS |
| 2 | 10640 | 26.13 | 32.72 | 6.59 | 54.00 | 21.28 | AV | Horizo | PASS |
| 3 | 15960 | 29.90 | 44.24 | 14.34 | 74.00 | 29.76 | PK | Horizo | PASS |
| 4 | 15960 | 23.04 | 37.38 | 14.34 | 54.00 | 16.62 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

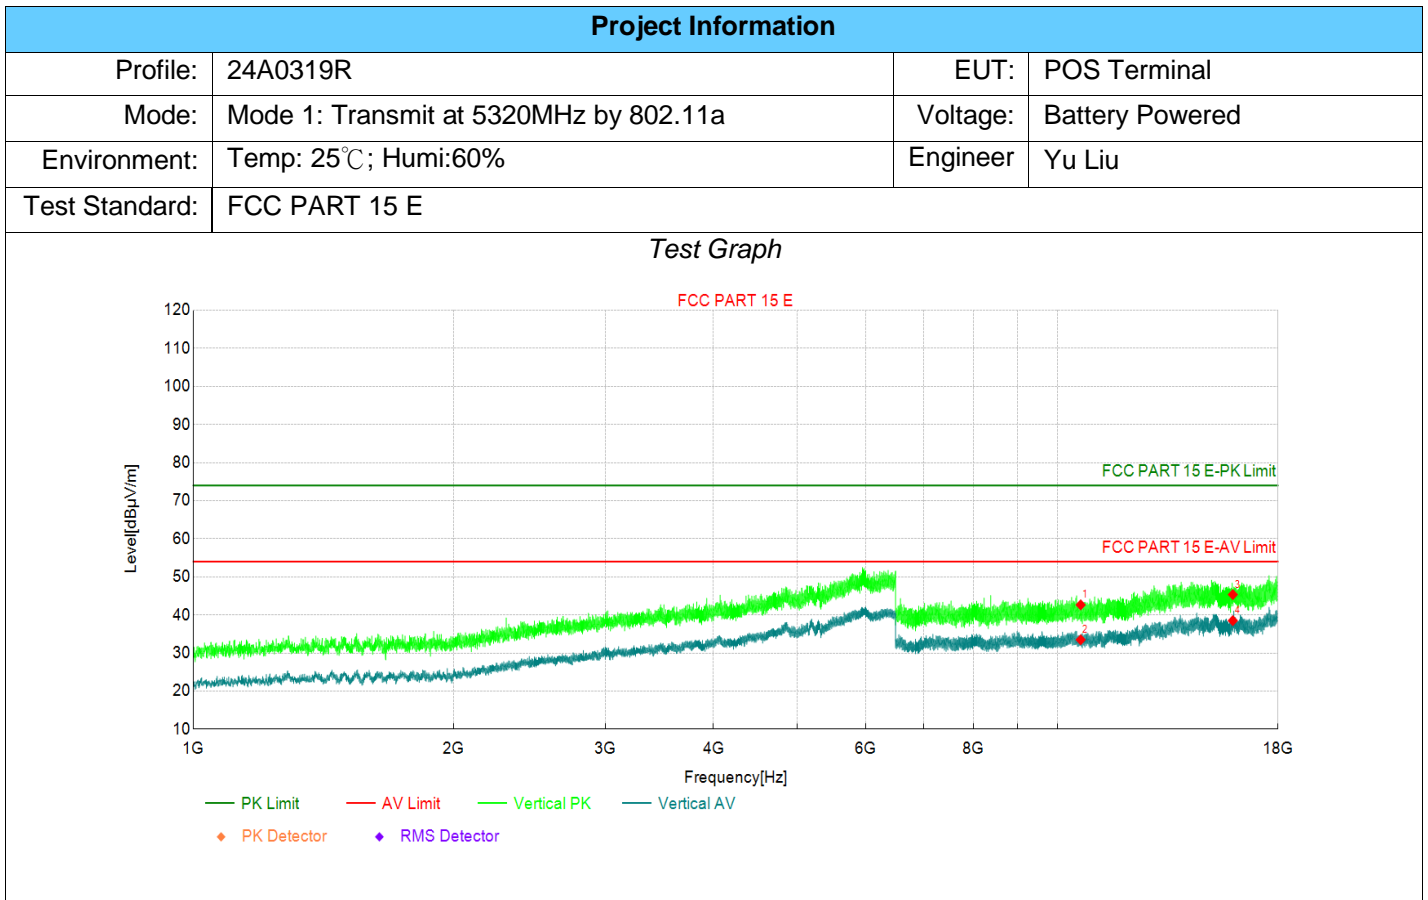

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10640 | 36.06 | 42.65 | 6.59 | 74.00 | 31.35 | PK | Vertic | PASS |
| 2 | 10640 | 26.89 | 33.48 | 6.59 | 54.00 | 20.52 | AV | Vertic | PASS |
| 3 | 15960 | 31.00 | 45.34 | 14.34 | 74.00 | 28.66 | PK | Vertic | PASS |
| 4 | 15960 | 24.17 | 38.51 | 14.34 | 54.00 | 15.49 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

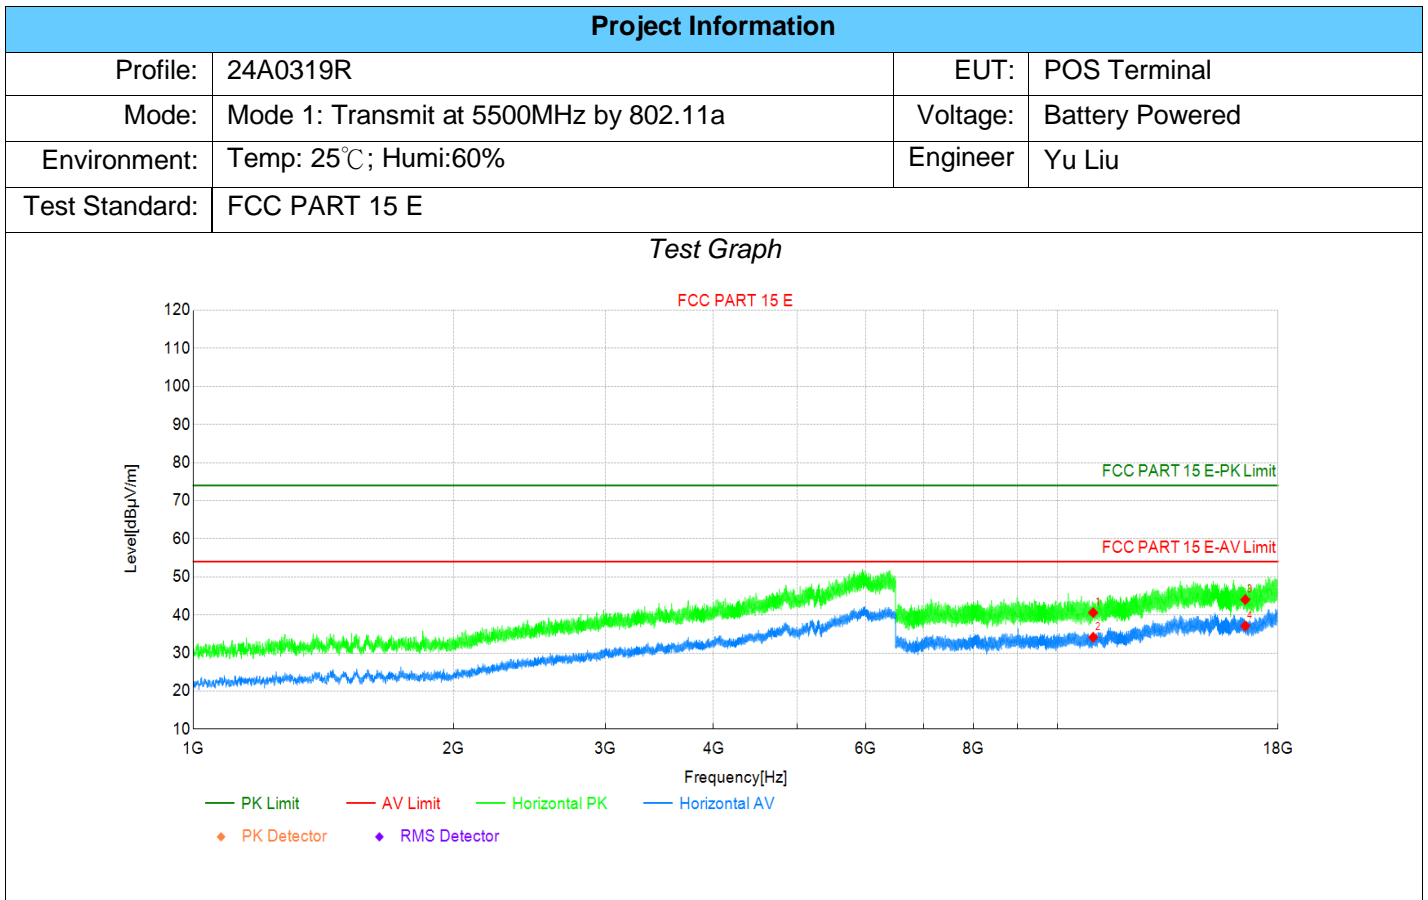

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11000 | 33.34 | 40.60 | 7.26 | 74.00 | 33.40 | PK | Horizo | PASS |
| 2 | 11000 | 26.87 | 34.13 | 7.26 | 54.00 | 19.87 | AV | Horizo | PASS |
| 3 | 16500 | 29.11 | 44.02 | 14.91 | 74.00 | 29.98 | PK | Horizo | PASS |
| 4 | 16500 | 22.20 | 37.11 | 14.91 | 54.00 | 16.89 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

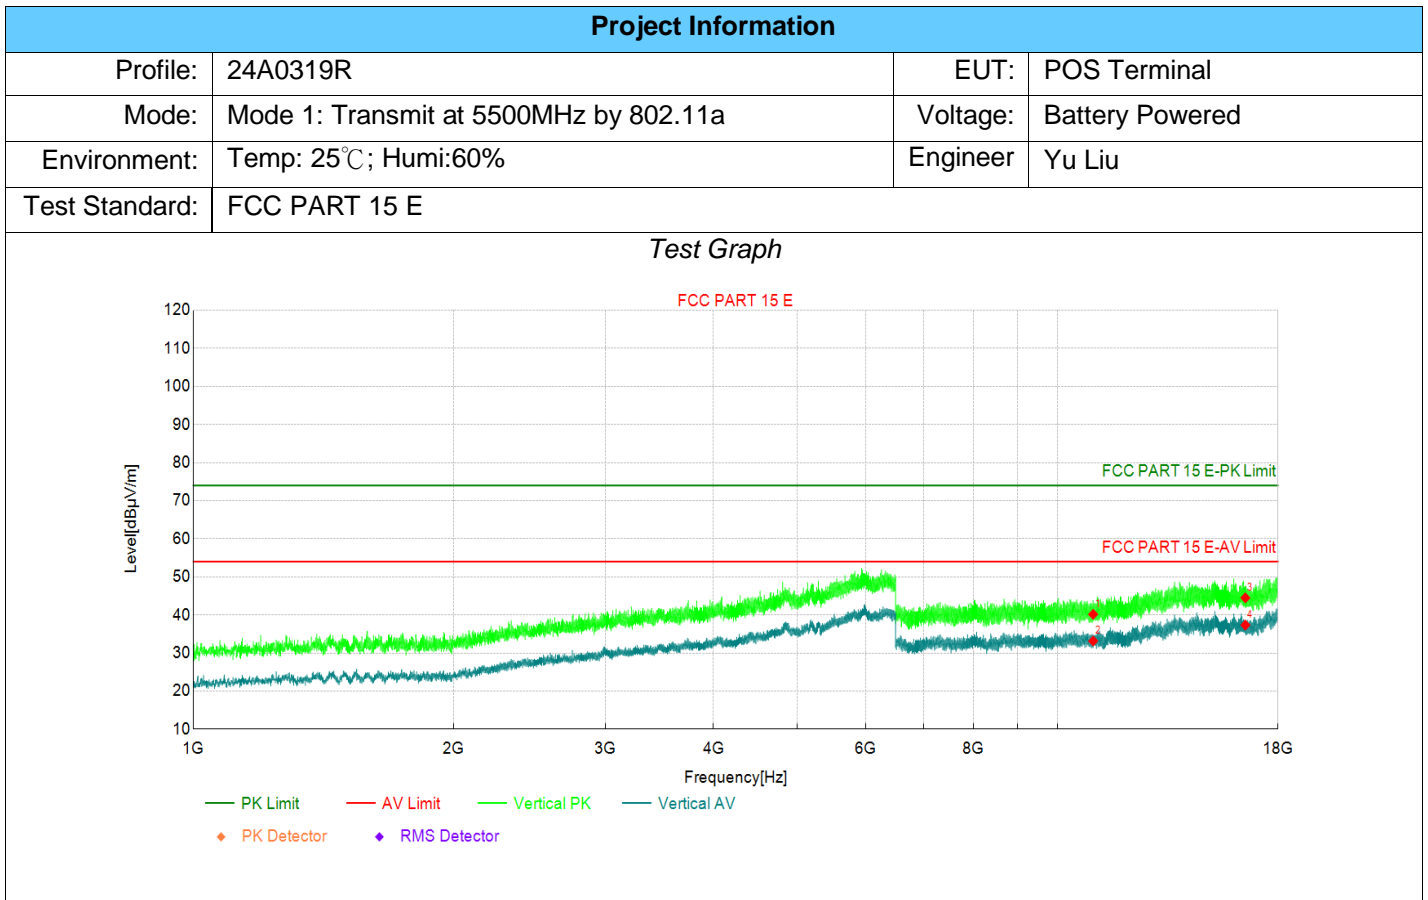

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11000 | 32.90 | 40.16 | 7.26 | 74.00 | 33.84 | PK | Vertic | PASS |
| 2 | 11000 | 25.90 | 33.16 | 7.26 | 54.00 | 20.84 | AV | Vertic | PASS |
| 3 | 16500 | 29.59 | 44.50 | 14.91 | 74.00 | 29.50 | PK | Vertic | PASS |
| 4 | 16500 | 22.42 | 37.33 | 14.91 | 54.00 | 16.67 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

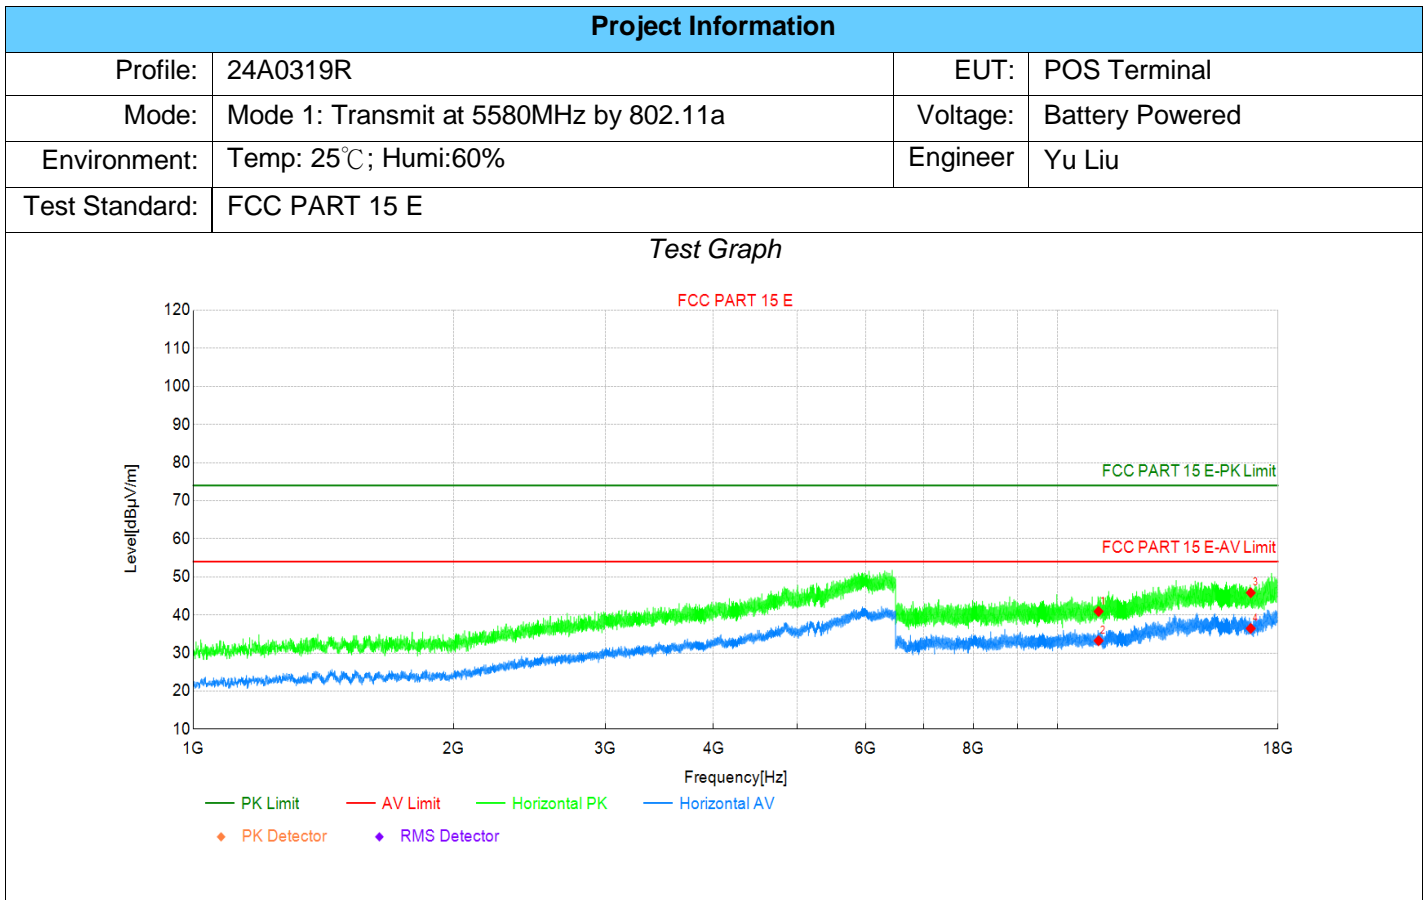

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11160 | 33.75 | 40.93 | 7.18 | 74.00 | 33.07 | PK | Horizo | PASS |
| 2 | 11160 | 26.06 | 33.24 | 7.18 | 54.00 | 20.76 | AV | Horizo | PASS |
| 3 | 16740 | 31.36 | 45.82 | 14.46 | 74.00 | 28.18 | PK | Horizo | PASS |
| 4 | 16740 | 21.99 | 36.45 | 14.46 | 54.00 | 17.55 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

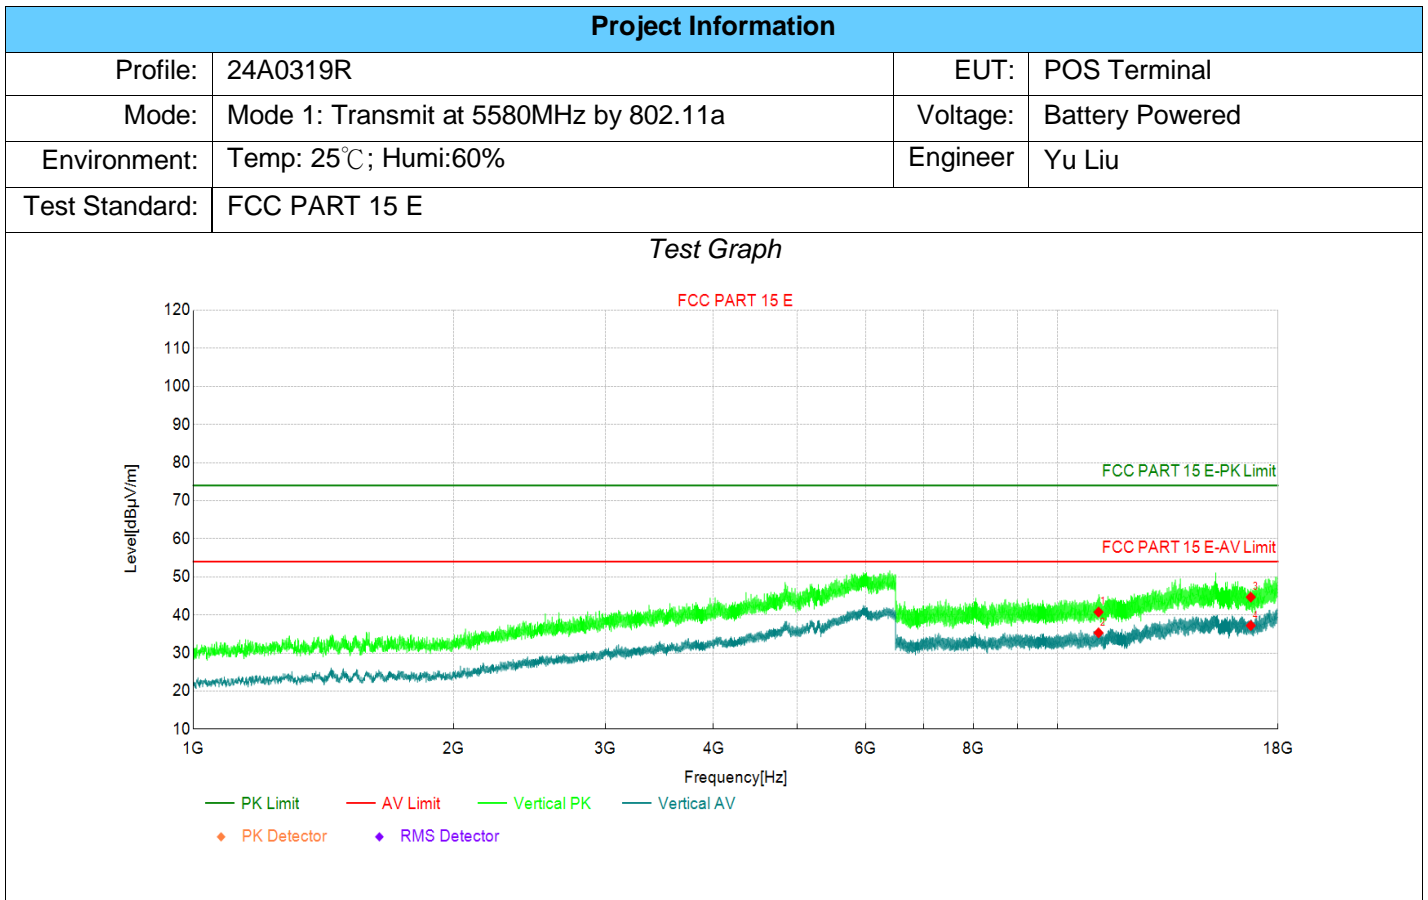

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11160 | 33.57 | 40.75 | 7.18 | 74.00 | 33.25 | PK | Vertic | PASS |
| 2 | 11160 | 28.12 | 35.30 | 7.18 | 54.00 | 18.70 | AV | Vertic | PASS |
| 3 | 16740 | 30.21 | 44.67 | 14.46 | 74.00 | 29.33 | PK | Vertic | PASS |
| 4 | 16740 | 22.75 | 37.21 | 14.46 | 54.00 | 16.79 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

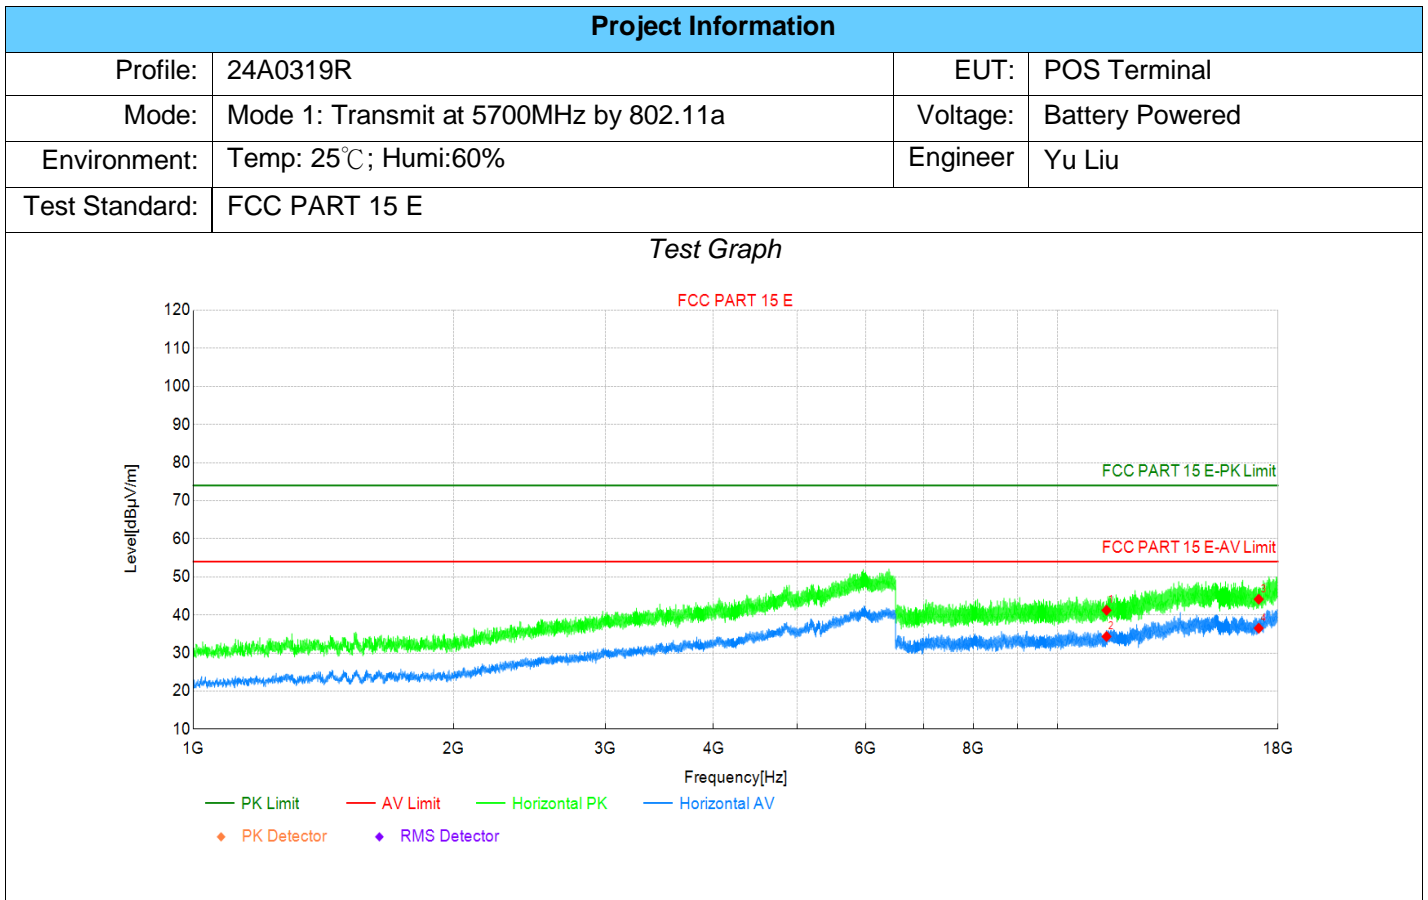

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11400 | 33.44 | 41.22 | 7.78 | 74.00 | 32.78 | PK | Horizo | PASS |
| 2 | 11400 | 26.55 | 34.33 | 7.78 | 54.00 | 19.67 | AV | Horizo | PASS |
| 3 | 17100 | 28.54 | 44.13 | 15.59 | 74.00 | 29.87 | PK | Horizo | PASS |
| 4 | 17100 | 20.93 | 36.52 | 15.59 | 54.00 | 17.48 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

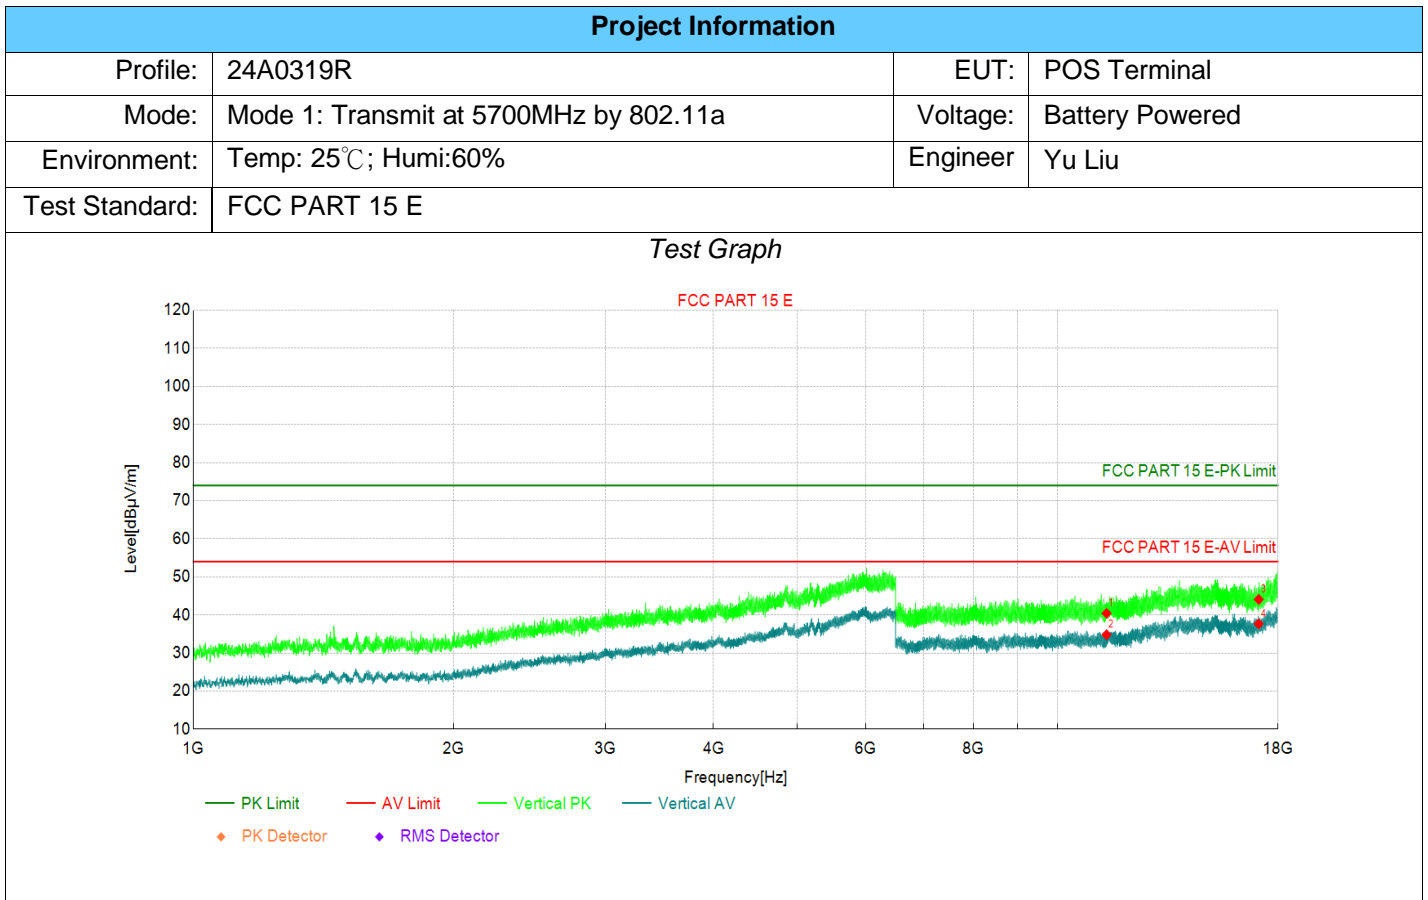

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11400 | 32.64 | 40.42 | 7.78 | 74.00 | 33.58 | PK | Vertic | PASS |
| 2 | 11400 | 27.02 | 34.80 | 7.78 | 54.00 | 19.20 | AV | Vertic | PASS |
| 3 | 17100 | 28.48 | 44.07 | 15.59 | 74.00 | 29.93 | PK | Vertic | PASS |
| 4 | 17100 | 22.08 | 37.67 | 15.59 | 54.00 | 16.33 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

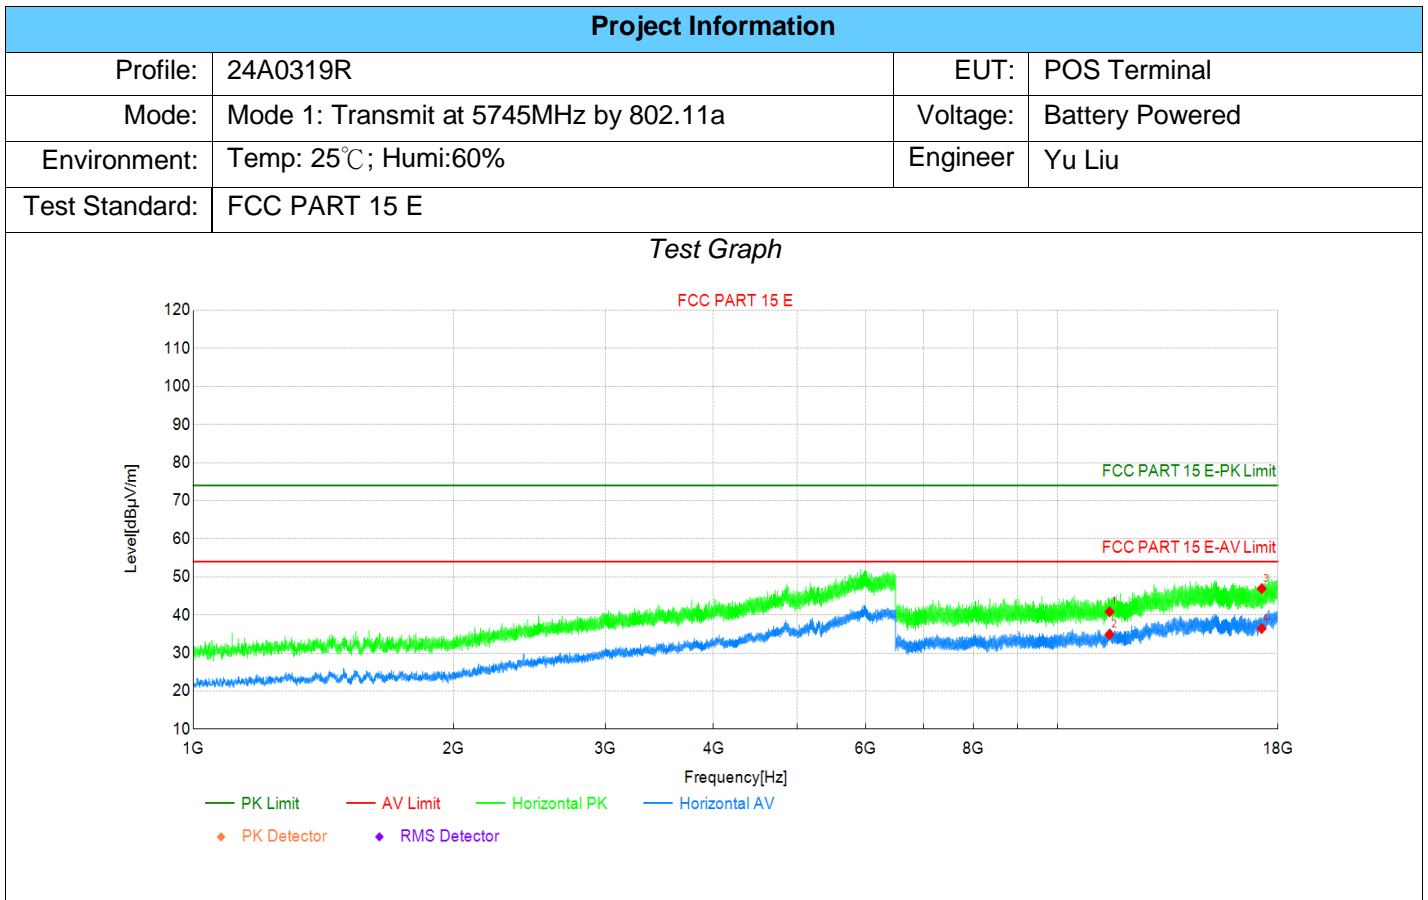

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11490 | 32.51 | 40.82 | 8.31 | 74.00 | 33.18 | PK | Horizo | PASS |
| 2 | 11490 | 26.57 | 34.88 | 8.31 | 54.00 | 19.12 | AV | Horizo | PASS |
| 3 | 17235 | 31.69 | 46.89 | 15.20 | 74.00 | 27.11 | PK | Horizo | PASS |
| 4 | 17235 | 21.25 | 36.45 | 15.20 | 54.00 | 17.55 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

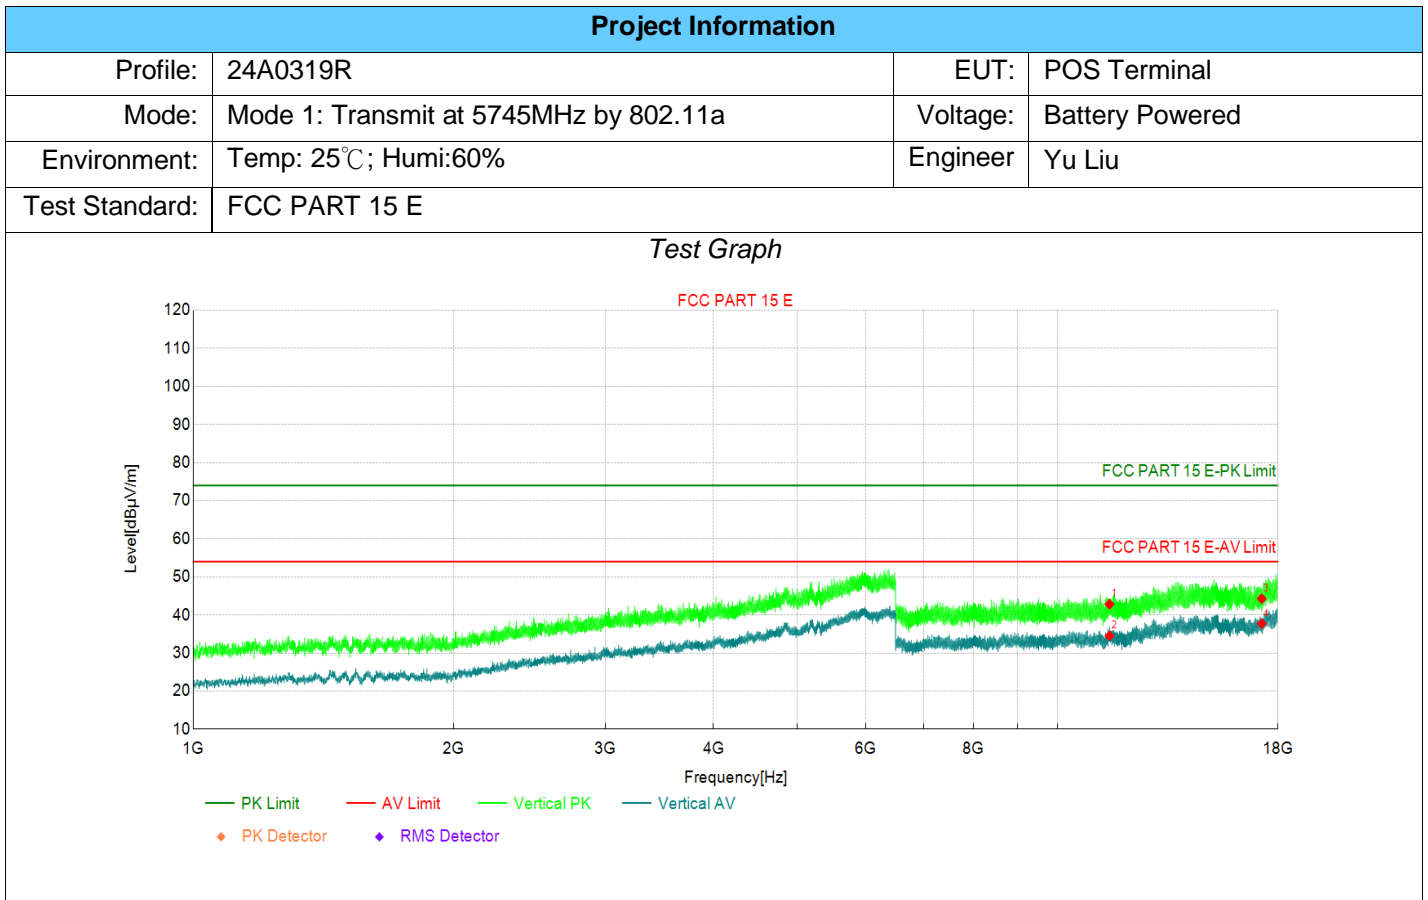

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11490 | 34.50 | 42.81 | 8.31 | 74.00 | 31.19 | PK | Vertic | PASS |
| 2 | 11490 | 26.21 | 34.52 | 8.31 | 54.00 | 19.48 | AV | Vertic | PASS |
| 3 | 17235 | 29.07 | 44.27 | 15.20 | 74.00 | 29.73 | PK | Vertic | PASS |
| 4 | 17235 | 22.51 | 37.71 | 15.20 | 54.00 | 16.29 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

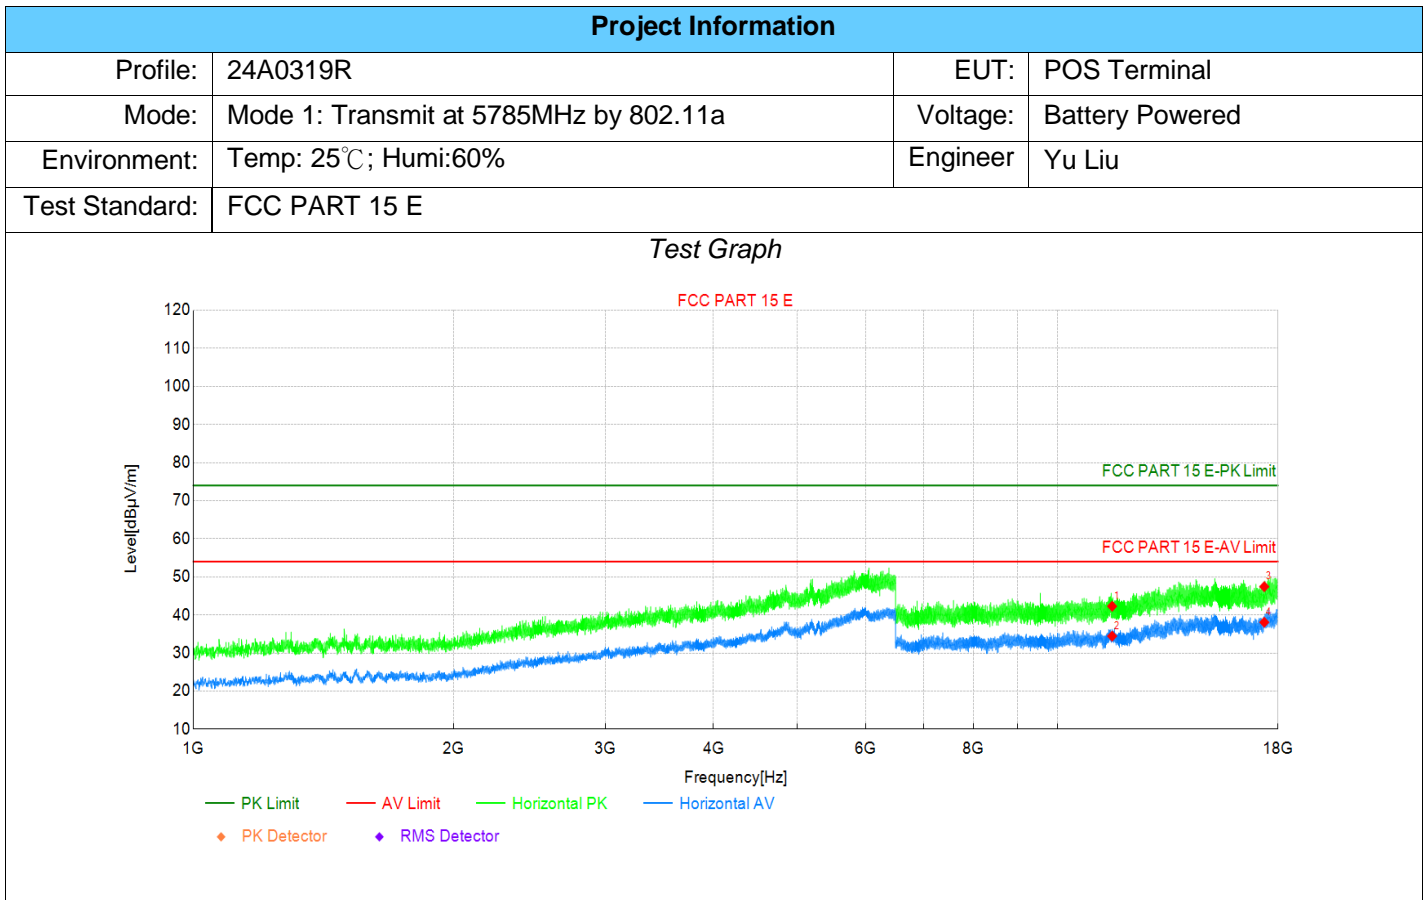

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11570 | 33.69 | 42.28 | 8.59 | 74.00 | 31.72 | PK | Horizo | PASS |
| 2 | 11570 | 25.84 | 34.43 | 8.59 | 54.00 | 19.57 | AV | Horizo | PASS |
| 3 | 17355 | 31.50 | 47.43 | 15.93 | 74.00 | 26.57 | PK | Horizo | PASS |
| 4 | 17355 | 22.14 | 38.07 | 15.93 | 54.00 | 15.93 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

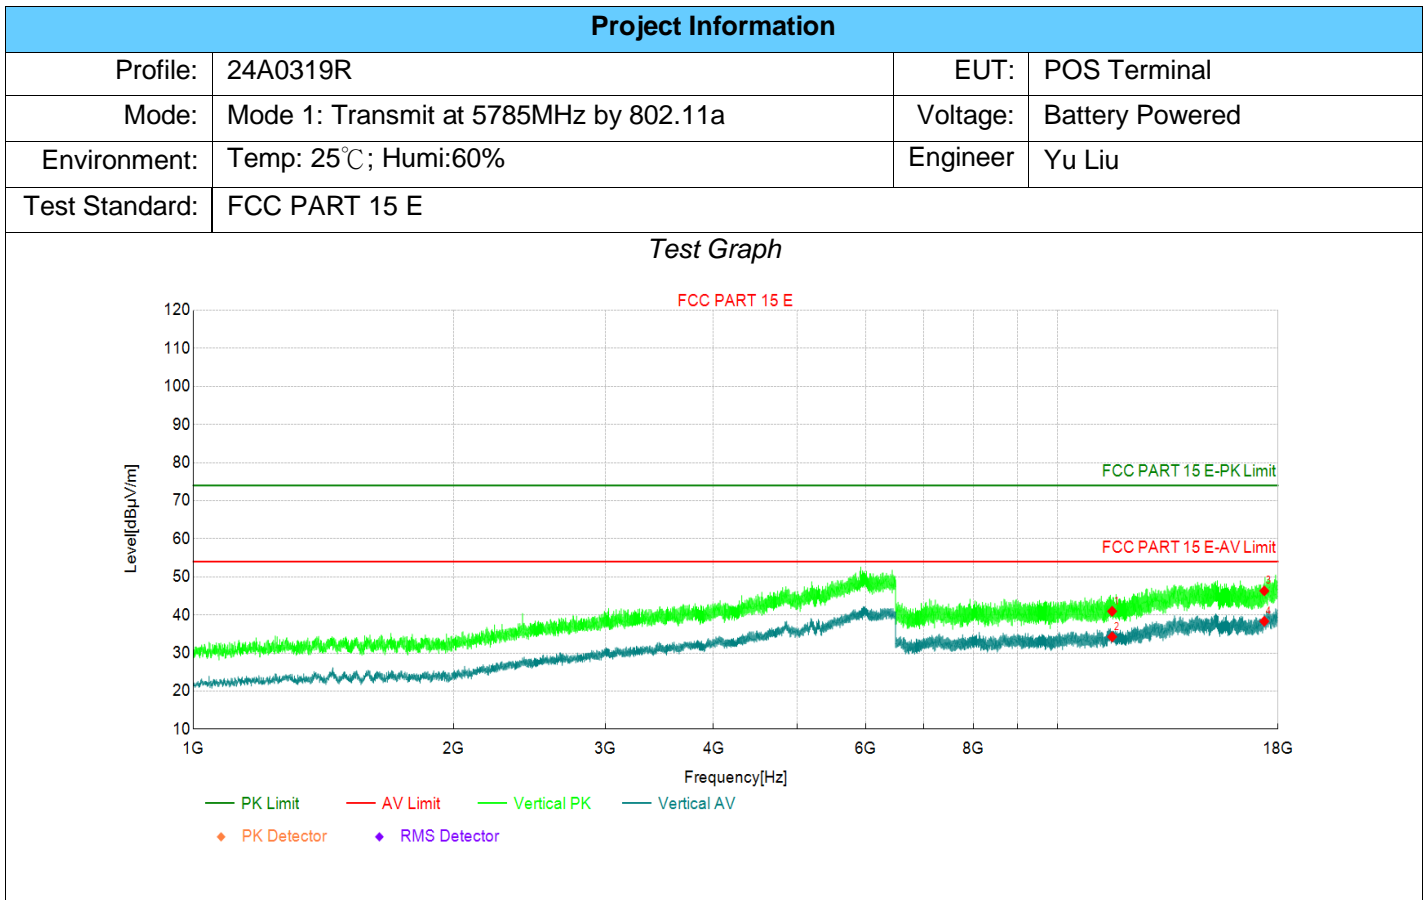

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11570 | 32.37 | 40.96 | 8.59 | 74.00 | 33.04 | PK | Vertic | PASS |
| 2 | 11570 | 25.66 | 34.25 | 8.59 | 54.00 | 19.75 | AV | Vertic | PASS |
| 3 | 17355 | 30.39 | 46.32 | 15.93 | 74.00 | 27.68 | PK | Vertic | PASS |
| 4 | 17355 | 22.41 | 38.34 | 15.93 | 54.00 | 15.66 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

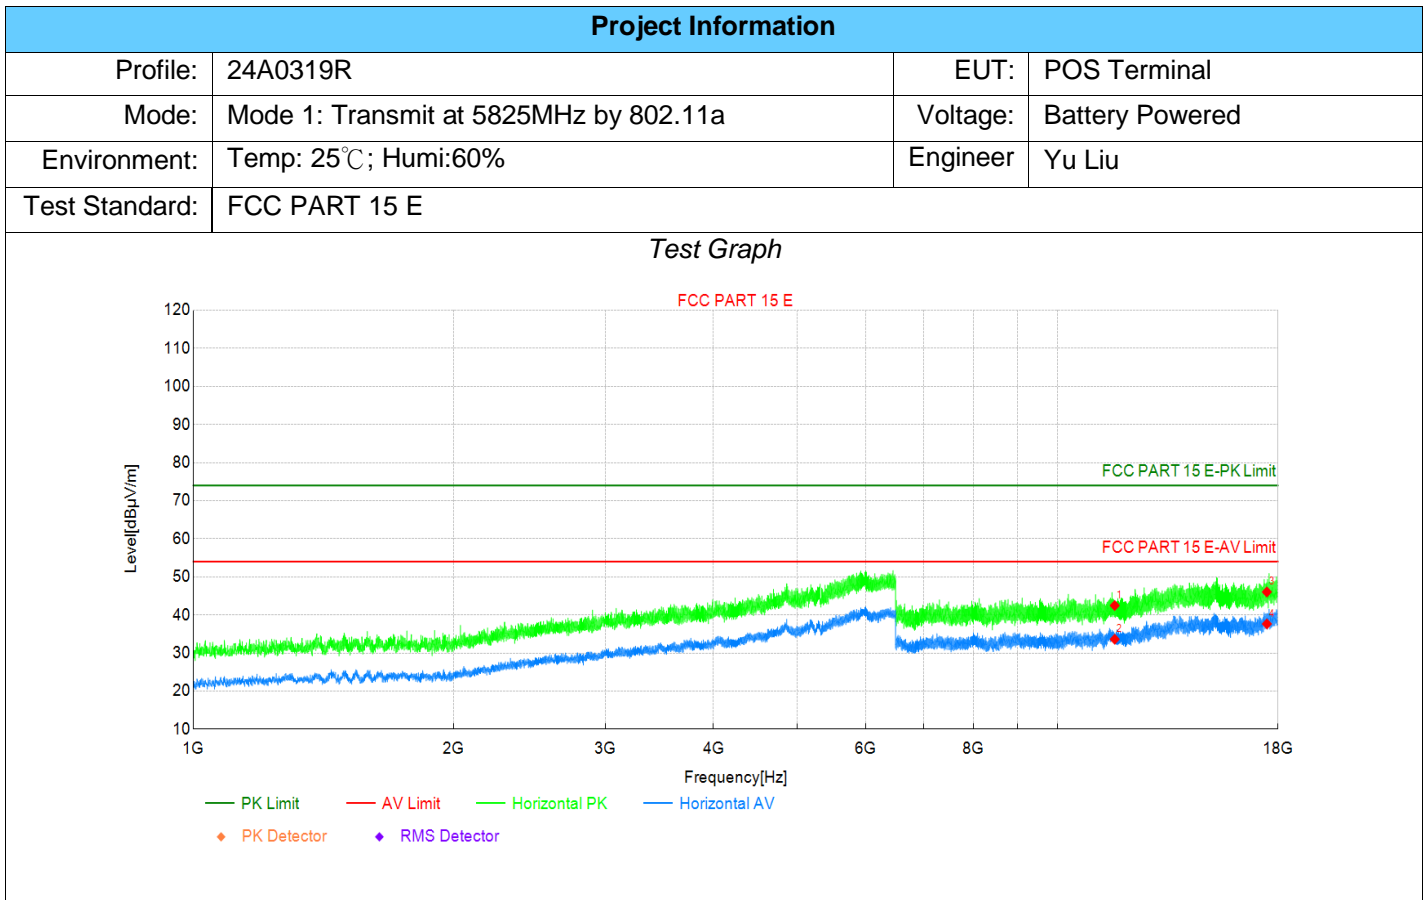

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11650 | 33.85 | 42.47 | 8.62 | 74.00 | 31.53 | PK | Horizo | PASS |
| 2 | 11650 | 25.00 | 33.62 | 8.62 | 54.00 | 20.38 | AV | Horizo | PASS |
| 3 | 17475 | 29.22 | 46.04 | 16.82 | 74.00 | 27.96 | PK | Horizo | PASS |
| 4 | 17475 | 20.82 | 37.64 | 16.82 | 54.00 | 16.36 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

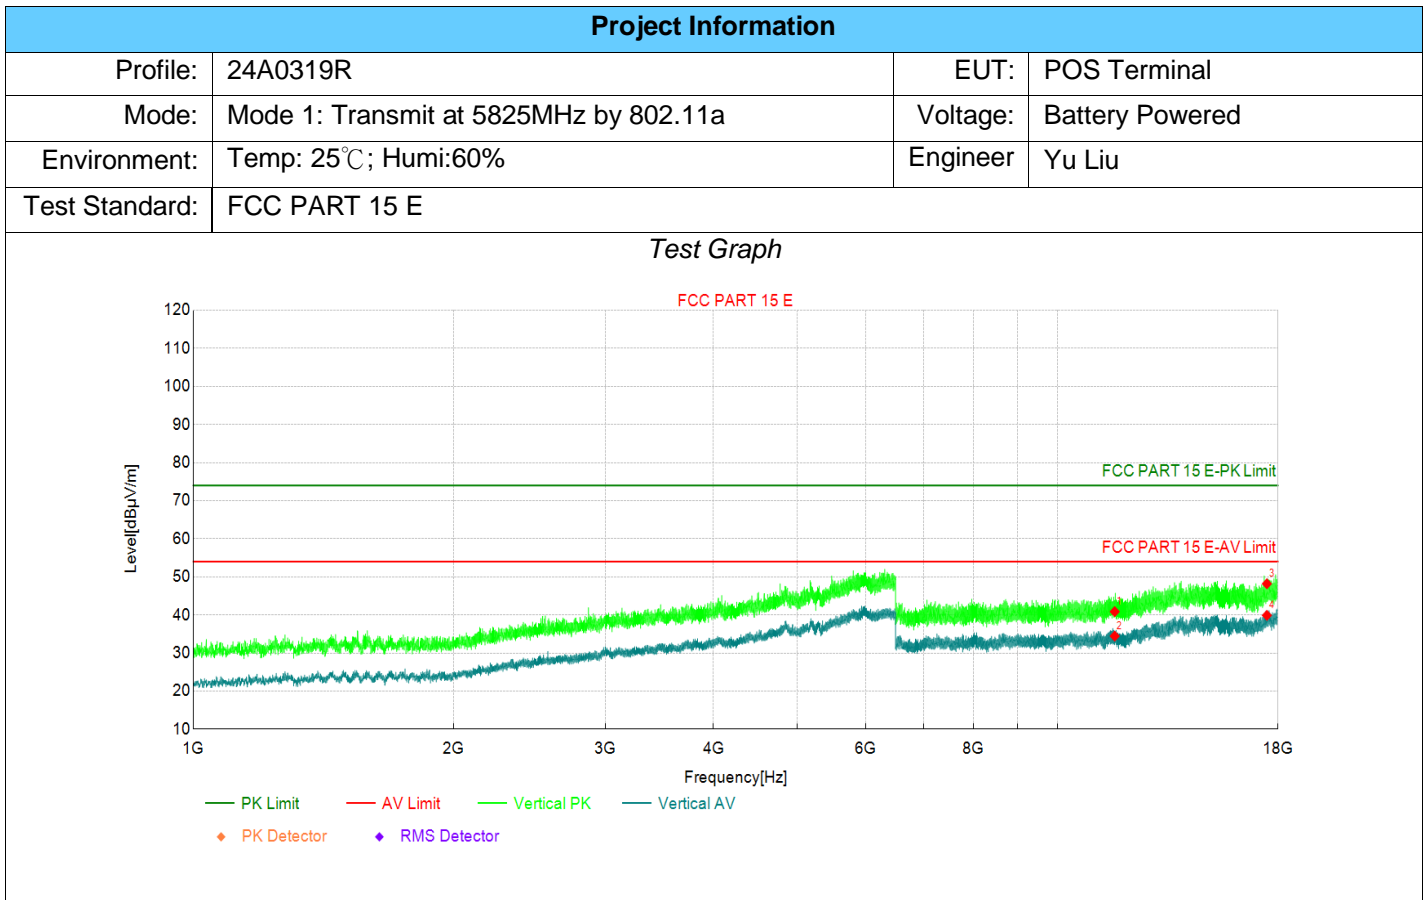

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11650 | 32.25 | 40.87 | 8.62 | 74.00 | 33.13 | PK | Vertic | PASS |
| 2 | 11650 | 25.83 | 34.45 | 8.62 | 54.00 | 19.55 | AV | Vertic | PASS |
| 3 | 17475 | 31.37 | 48.19 | 16.82 | 74.00 | 25.81 | PK | Vertic | PASS |
| 4 | 17475 | 23.07 | 39.89 | 16.82 | 54.00 | 14.11 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

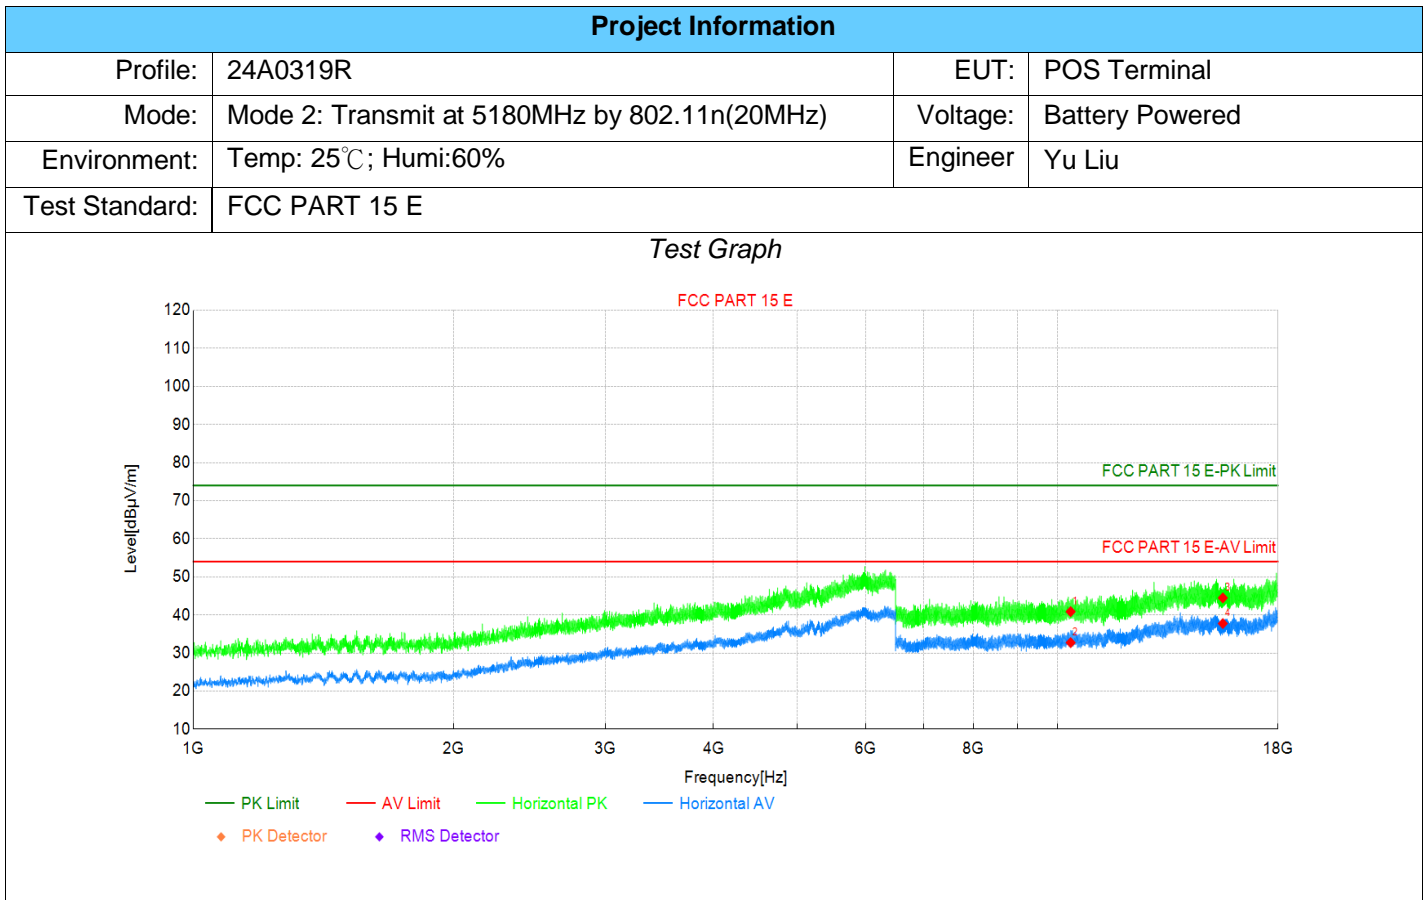

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10360 | 34.57 | 40.87 | 6.30 | 74.00 | 33.13 | PK | Horizo | PASS |
| 2 | 10360 | 26.42 | 32.72 | 6.30 | 54.00 | 21.28 | AV | Horizo | PASS |
| 3 | 15540 | 30.96 | 44.48 | 13.52 | 74.00 | 29.52 | PK | Horizo | PASS |
| 4 | 15540 | 24.22 | 37.74 | 13.52 | 54.00 | 16.26 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

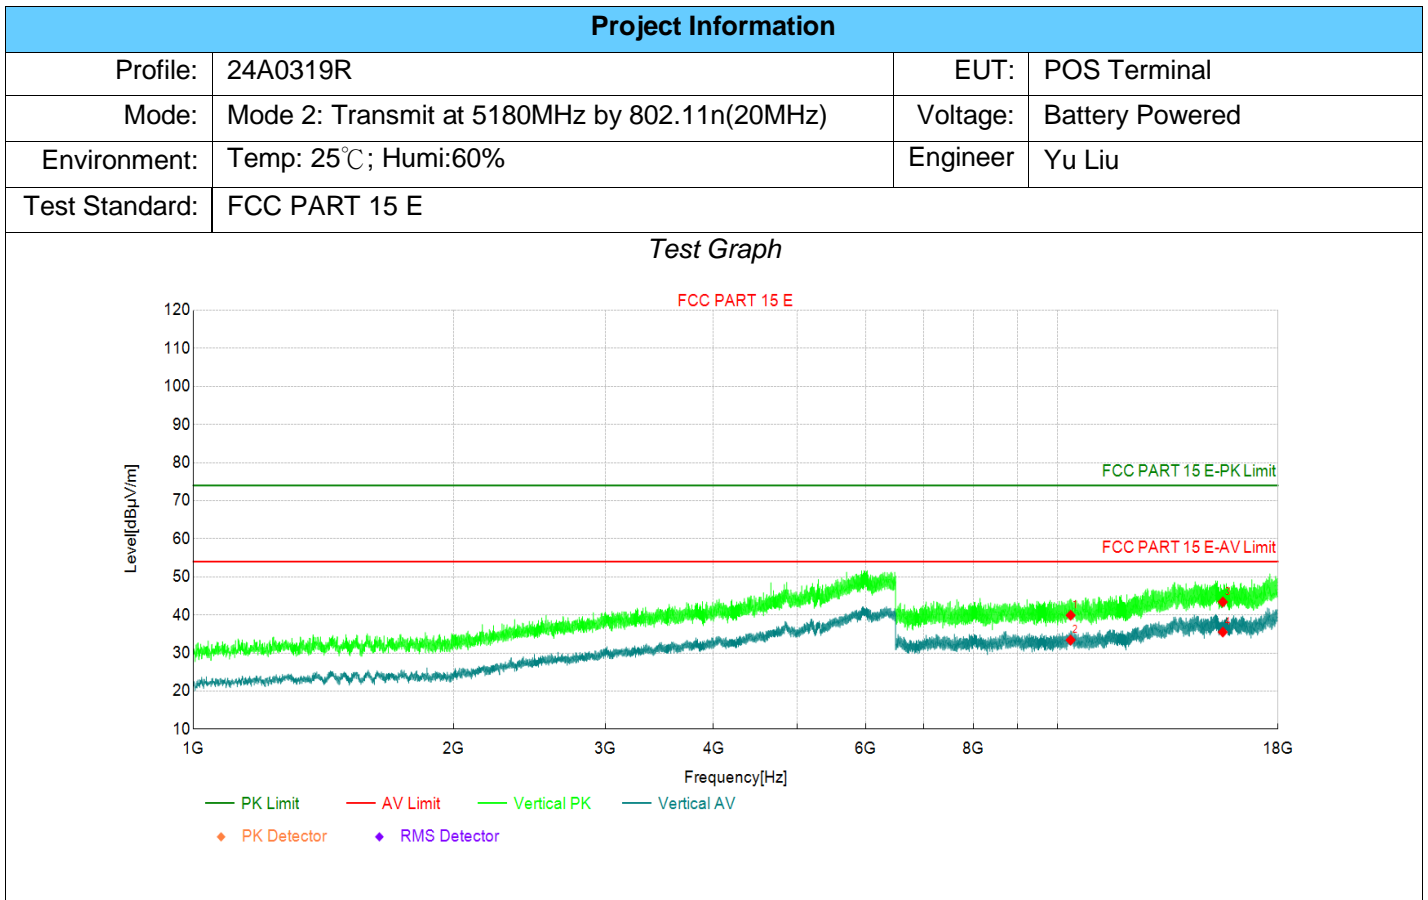

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10360 | 33.61 | 39.91 | 6.30 | 74.00 | 34.09 | PK | Vertic | PASS |
| 2 | 10360 | 27.11 | 33.41 | 6.30 | 54.00 | 20.59 | AV | Vertic | PASS |
| 3 | 15540 | 29.89 | 43.41 | 13.52 | 74.00 | 30.59 | PK | Vertic | PASS |
| 4 | 15540 | 21.98 | 35.50 | 13.52 | 54.00 | 18.50 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

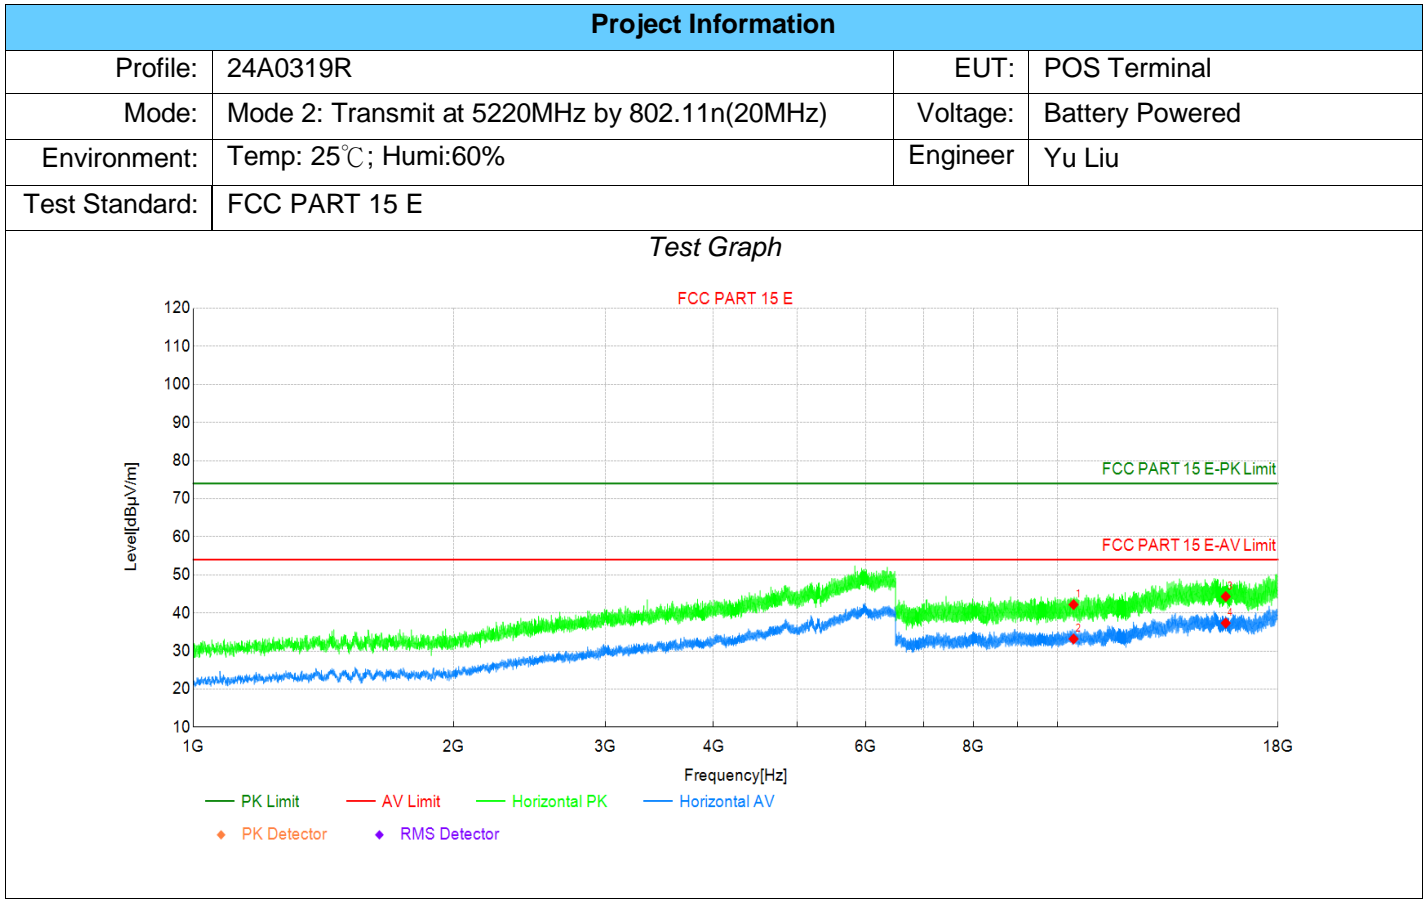

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10440 | 35.80 | 42.18 | 6.38 | 74.00 | 31.82 | PK | Horizo | PASS |
| 2 | 10440 | 26.78 | 33.16 | 6.38 | 54.00 | 20.84 | AV | Horizo | PASS |
| 3 | 15660 | 30.55 | 44.31 | 13.76 | 74.00 | 29.69 | PK | Horizo | PASS |
| 4 | 15660 | 23.58 | 37.34 | 13.76 | 54.00 | 16.66 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

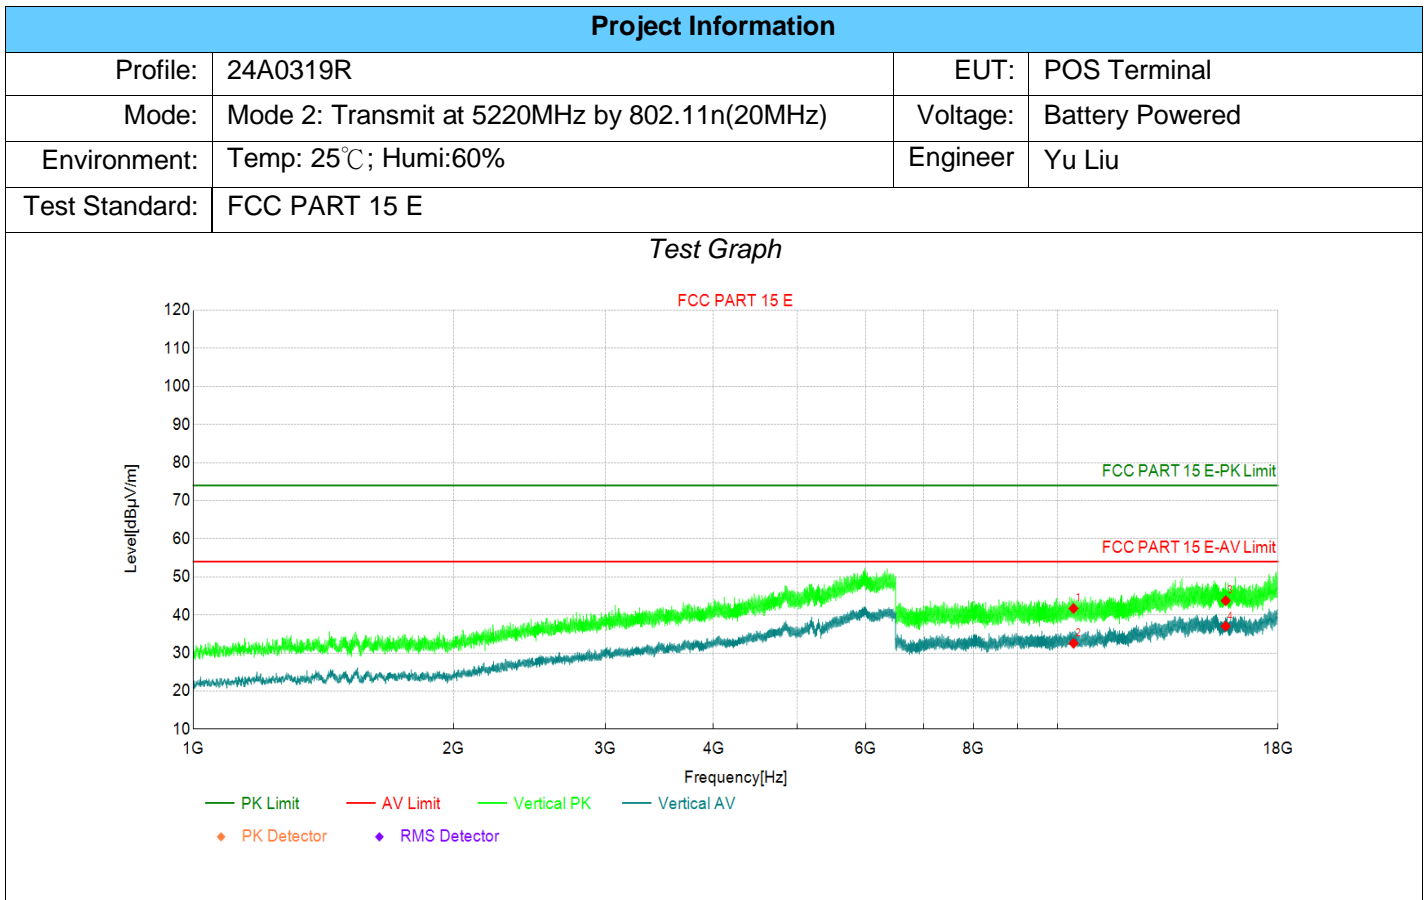

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10440 | 35.31 | 41.69 | 6.38 | 74.00 | 32.31 | PK | Vertic | PASS |
| 2 | 10440 | 26.16 | 32.54 | 6.38 | 54.00 | 21.46 | AV | Vertic | PASS |
| 3 | 15660 | 29.99 | 43.75 | 13.76 | 74.00 | 30.25 | PK | Vertic | PASS |
| 4 | 15660 | 23.28 | 37.04 | 13.76 | 54.00 | 16.96 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

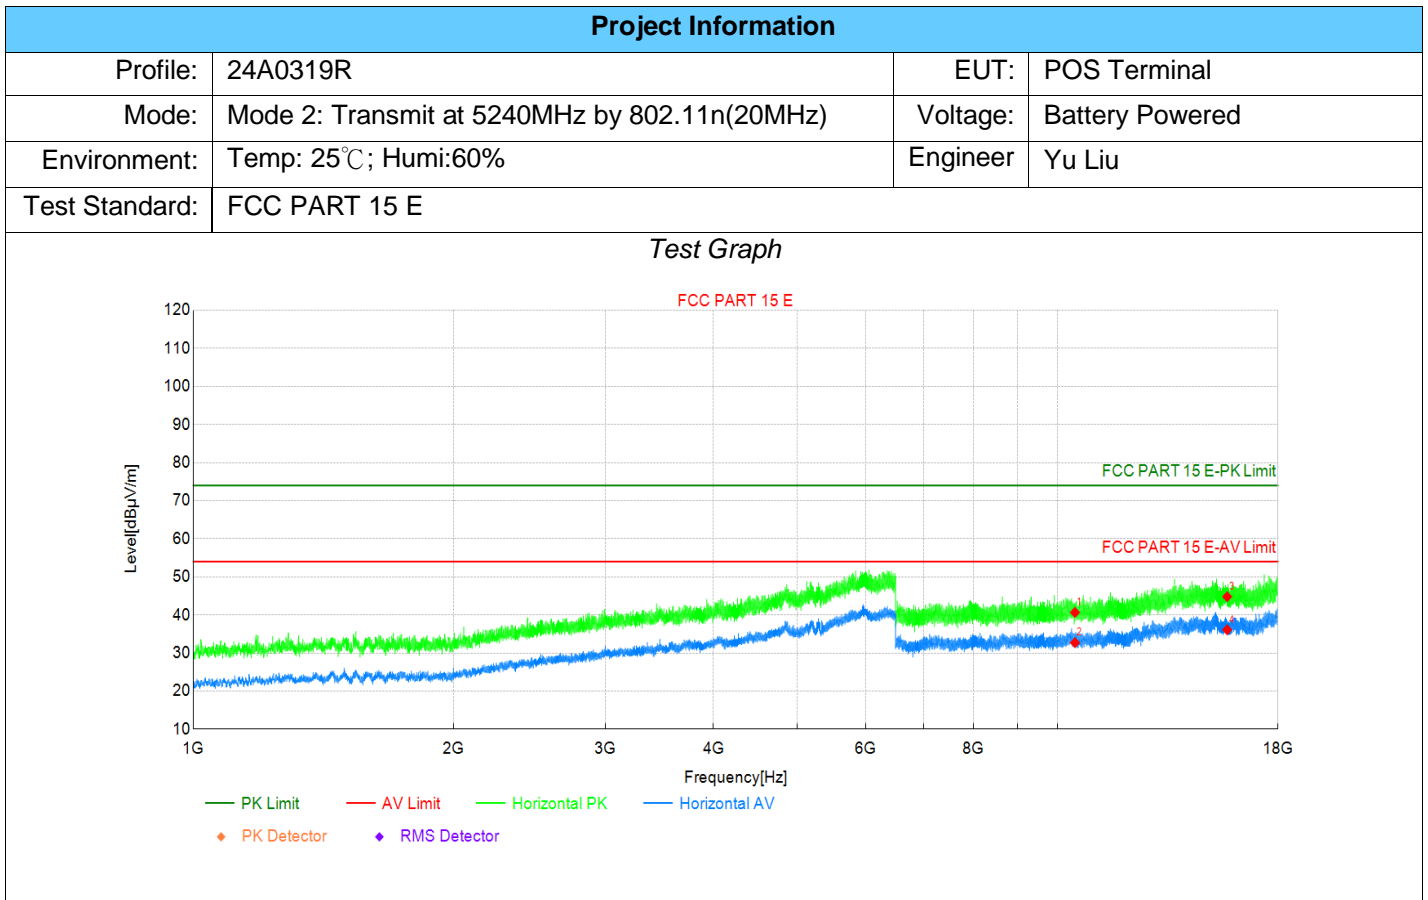

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10480 | 34.20 | 40.66 | 6.46 | 74.00 | 33.34 | PK | Horizo | PASS |
| 2 | 10480 | 26.24 | 32.70 | 6.46 | 54.00 | 21.30 | AV | Horizo | PASS |
| 3 | 15720 | 30.71 | 44.79 | 14.08 | 74.00 | 29.21 | PK | Horizo | PASS |
| 4 | 15720 | 22.03 | 36.11 | 14.08 | 54.00 | 17.89 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

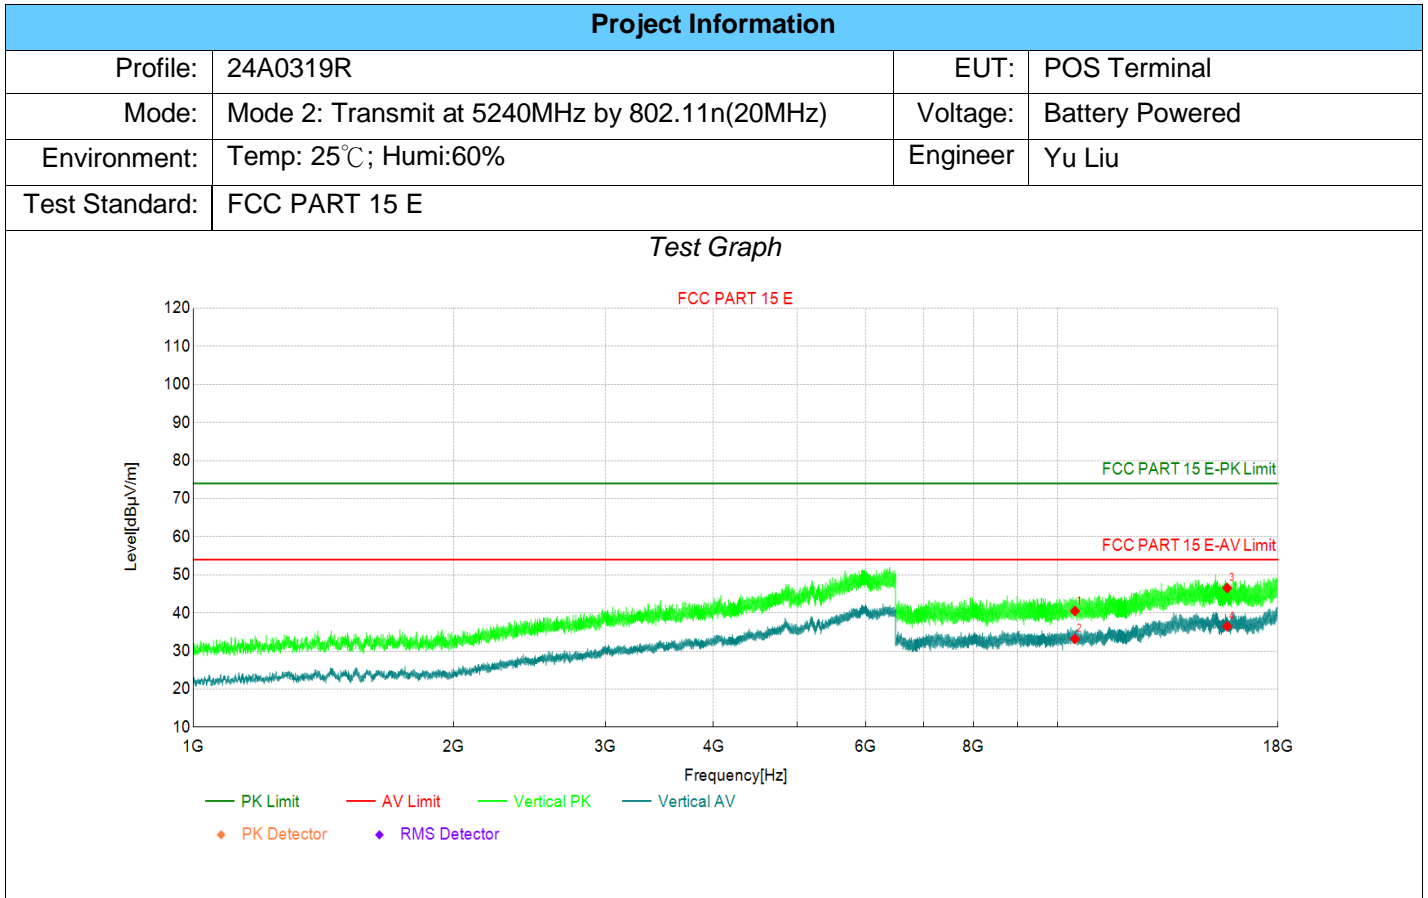

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10480 | 34.03 | 40.49 | 6.46 | 74.00 | 33.51 | PK | Vertic | PASS |
| 2 | 10480 | 26.72 | 33.18 | 6.46 | 54.00 | 20.82 | AV | Vertic | PASS |
| 3 | 15720 | 32.47 | 46.55 | 14.08 | 74.00 | 27.45 | PK | Vertic | PASS |
| 4 | 15720 | 22.40 | 36.48 | 14.08 | 54.00 | 17.52 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

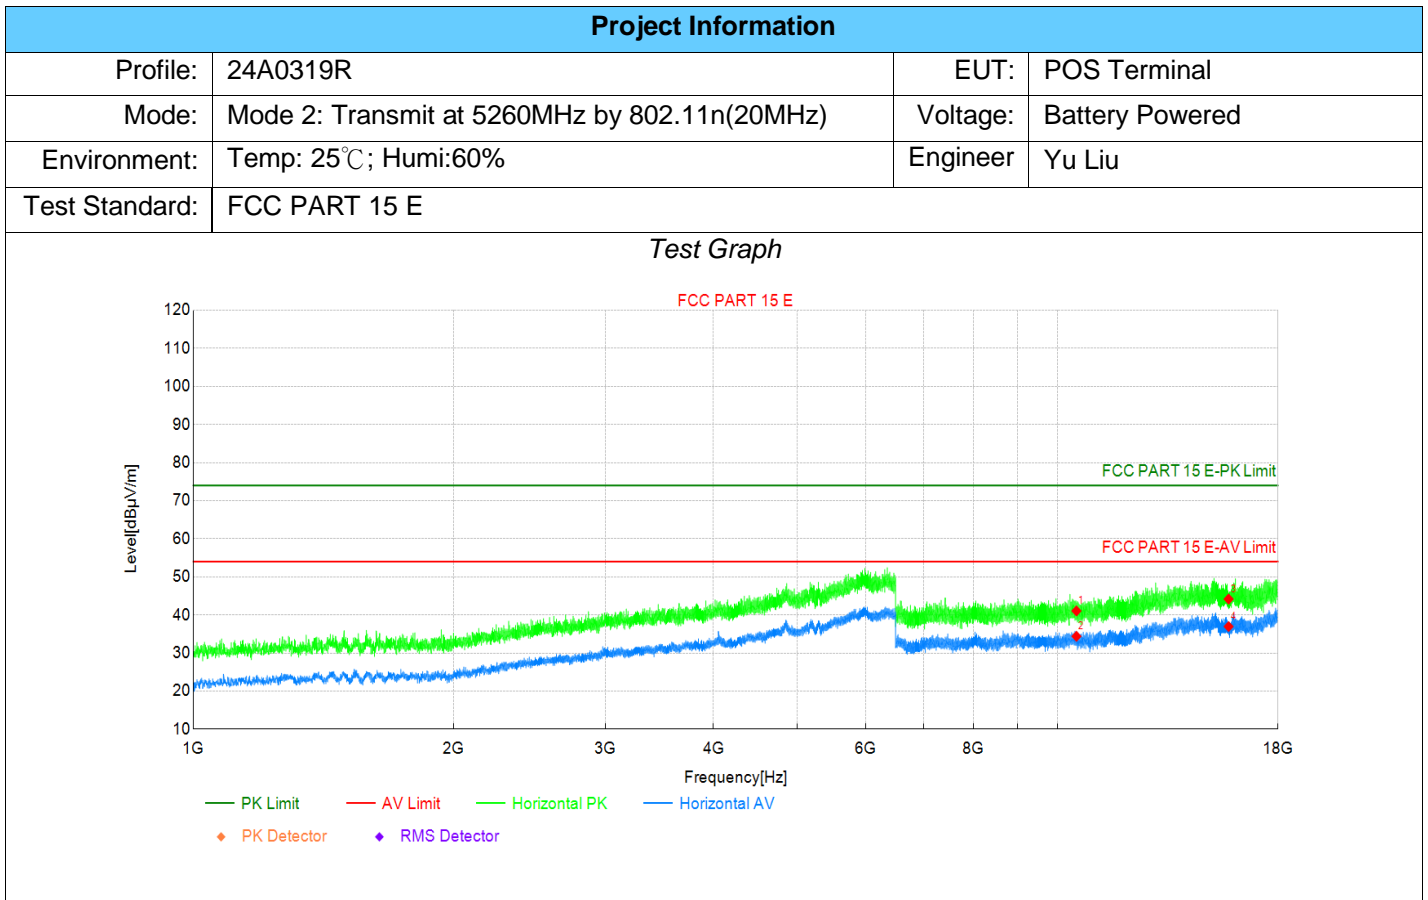

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10520 | 34.54 | 41.06 | 6.52 | 74.00 | 32.94 | PK | Horizo | PASS |
| 2 | 10520 | 27.87 | 34.39 | 6.52 | 54.00 | 19.61 | AV | Horizo | PASS |
| 3 | 15780 | 30.40 | 44.17 | 13.77 | 74.00 | 29.83 | PK | Horizo | PASS |
| 4 | 15780 | 23.19 | 36.96 | 13.77 | 54.00 | 17.04 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

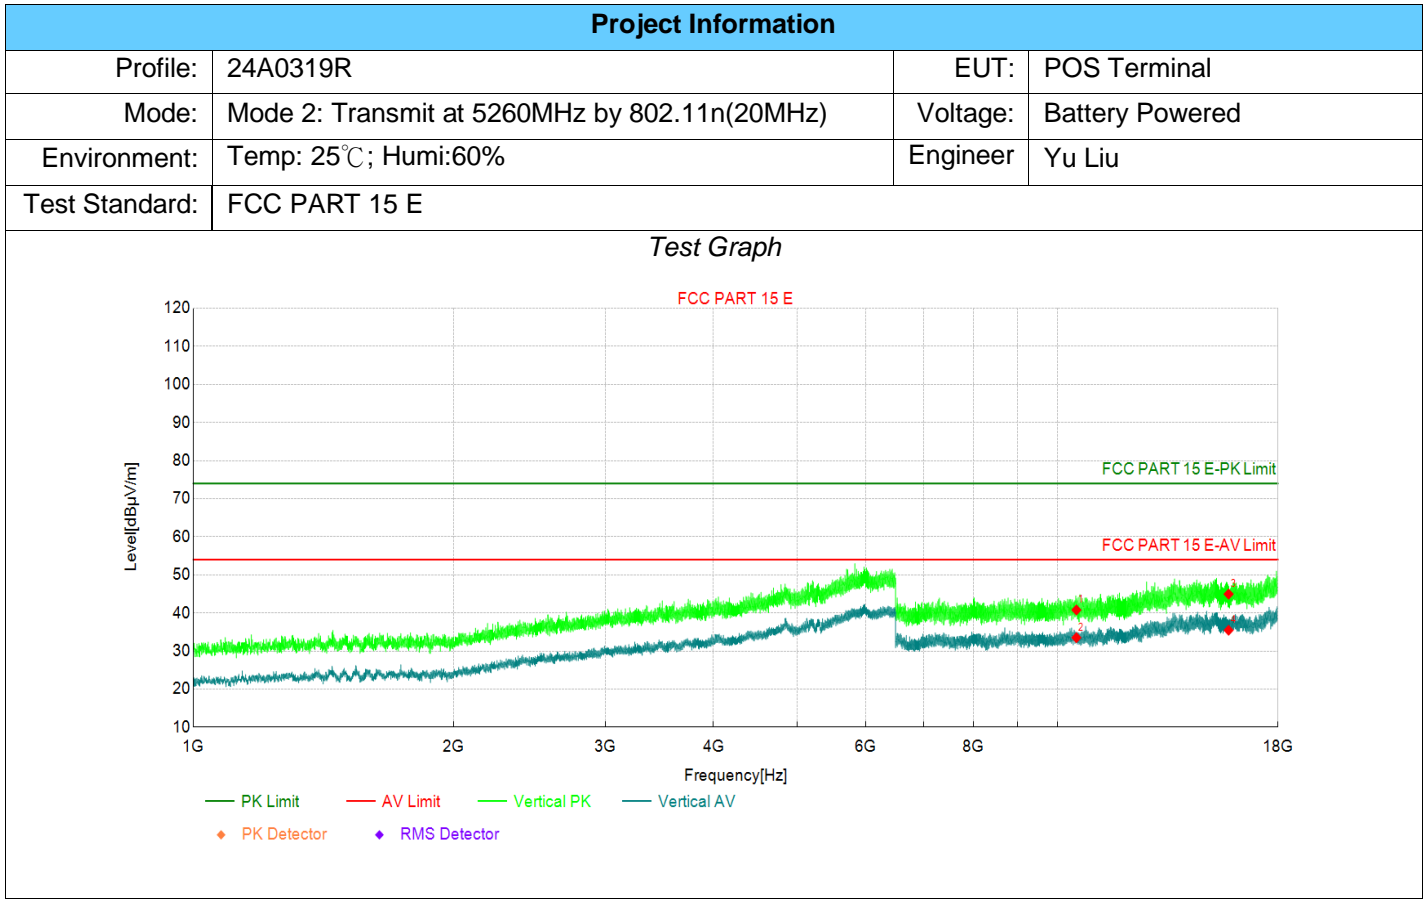


| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10520 | 34.26 | 40.78 | 6.52 | 74.00 | 33.22 | PK | Vertic | PASS |
| 2 | 10520 | 26.99 | 33.51 | 6.52 | 54.00 | 20.49 | AV | Vertic | PASS |
| 3 | 15780 | 31.18 | 44.95 | 13.77 | 74.00 | 29.05 | PK | Vertic | PASS |
| 4 | 15780 | 21.69 | 35.46 | 13.77 | 54.00 | 18.54 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level


| Project Information | | | |
|---------------------|---|----------|-----------------|
| Profile: | 24A0319R | EUT: | POS Terminal |
| Mode: | Mode 2: Transmit at 5300MHz by 802.11n(20MHz) | Voltage: | Battery Powered |
| Environment: | Temp: 25°C; Humi:60% | Engineer | Yu Liu |
| Test Standard: | FCC PART 15 E | | |

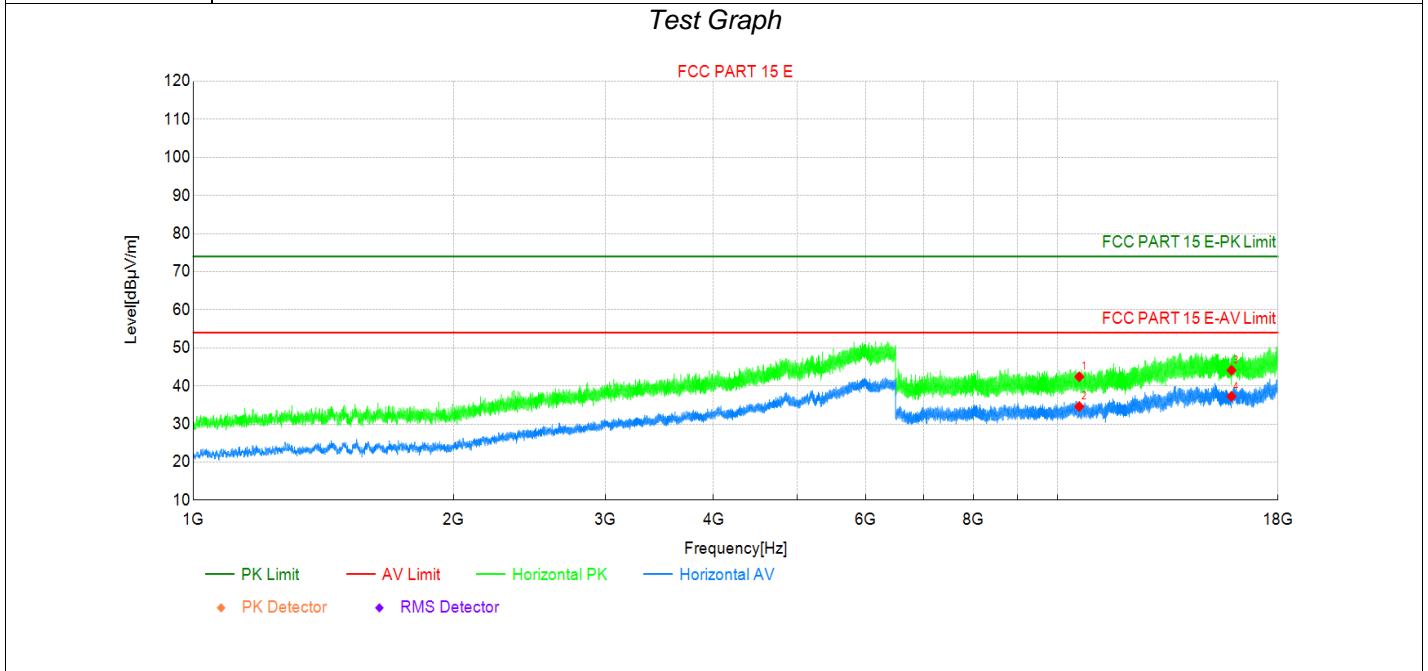

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10600 | 35.85 | 42.41 | 6.56 | 74.00 | 31.59 | PK | Horizo | PASS |
| 2 | 10600 | 28.02 | 34.58 | 6.56 | 74.00 | 39.42 | AV | Horizo | PASS |
| 3 | 15900 | 30.29 | 44.12 | 13.83 | 74.00 | 29.88 | PK | Horizo | PASS |
| 4 | 15900 | 23.44 | 37.27 | 13.83 | 74.00 | 36.73 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

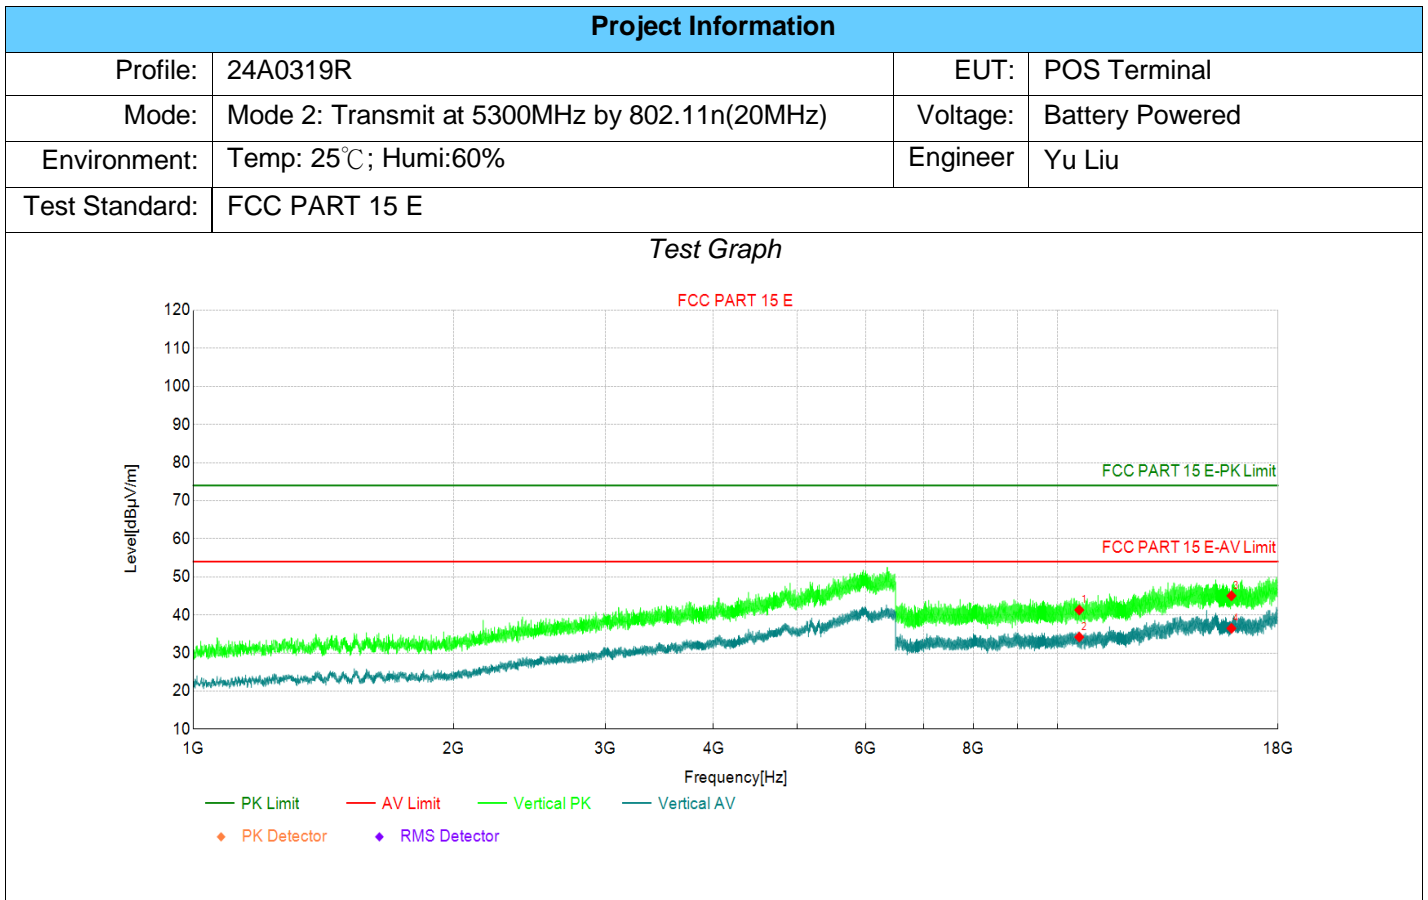

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10600 | 34.74 | 41.30 | 6.56 | 74.00 | 32.70 | PK | Vertic | PASS |
| 2 | 10600 | 27.62 | 34.18 | 6.56 | 54.00 | 19.82 | AV | Vertic | PASS |
| 3 | 15900 | 31.21 | 45.04 | 13.83 | 74.00 | 28.96 | PK | Vertic | PASS |
| 4 | 15900 | 22.64 | 36.47 | 13.83 | 54.00 | 17.53 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

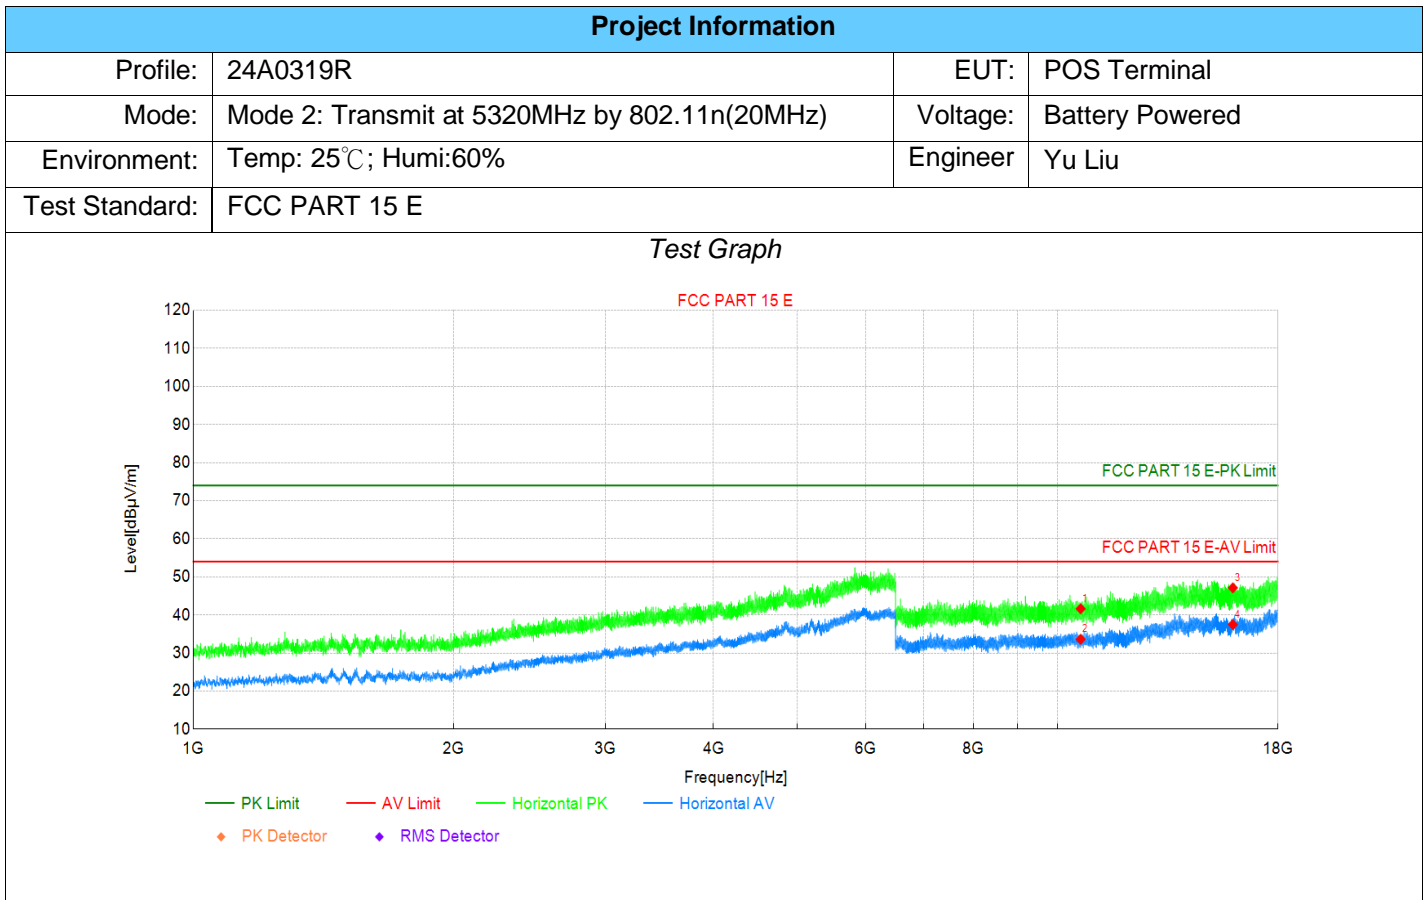

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10640 | 35.03 | 41.62 | 6.59 | 74.00 | 32.38 | PK | Horizo | PASS |
| 2 | 10640 | 27.02 | 33.61 | 6.59 | 54.00 | 20.39 | AV | Horizo | PASS |
| 3 | 15960 | 32.77 | 47.11 | 14.34 | 74.00 | 26.89 | PK | Horizo | PASS |
| 4 | 15960 | 23.14 | 37.48 | 14.34 | 54.00 | 16.52 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

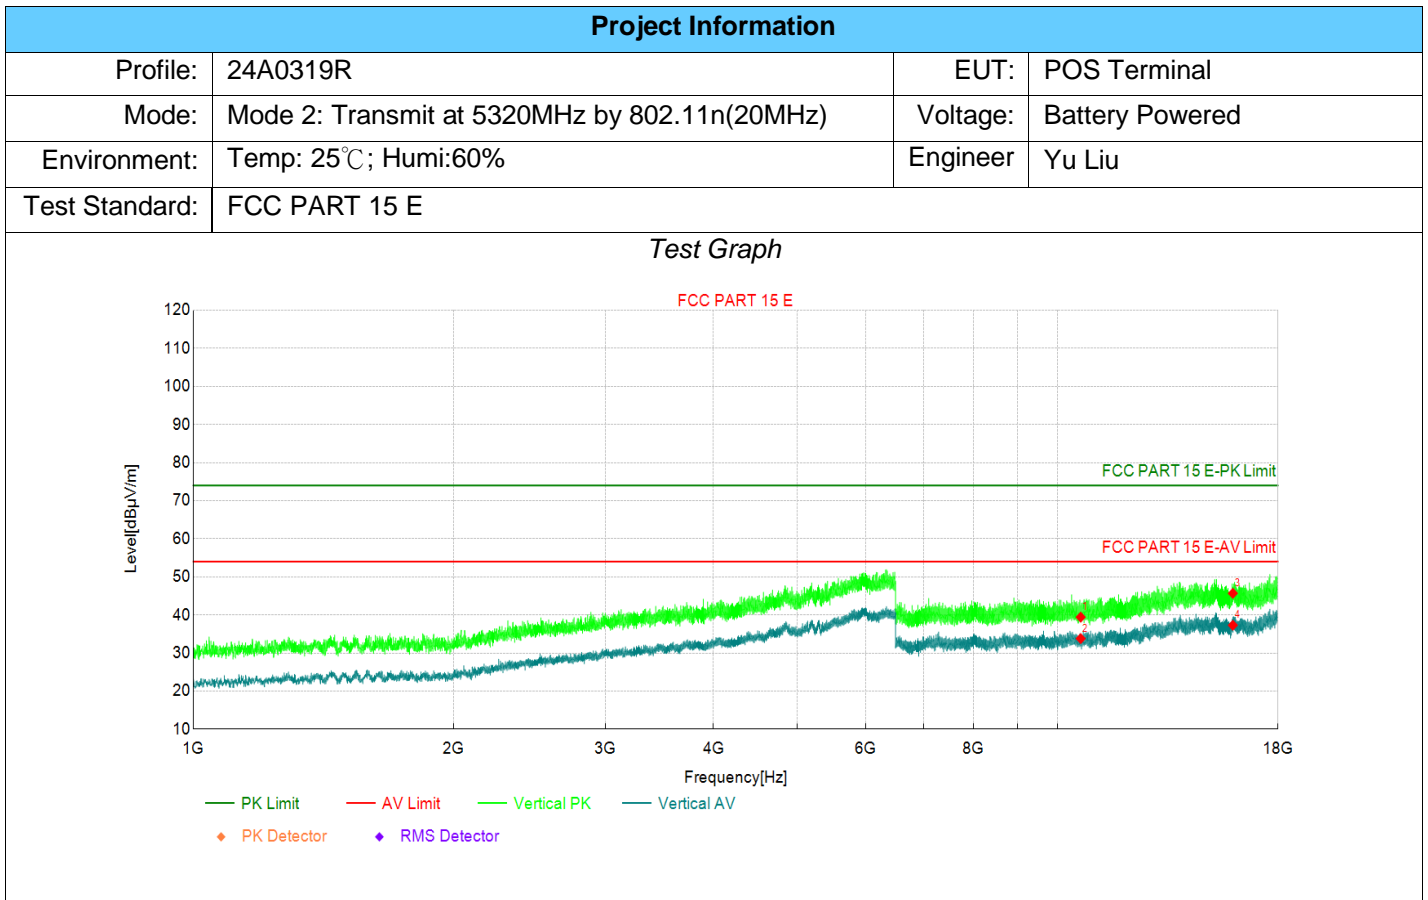

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10640 | 32.82 | 39.41 | 6.59 | 74.00 | 34.59 | PK | Vertic | PASS |
| 2 | 10640 | 27.21 | 33.80 | 6.59 | 54.00 | 20.20 | AV | Vertic | PASS |
| 3 | 15960 | 31.34 | 45.68 | 14.34 | 74.00 | 28.32 | PK | Vertic | PASS |
| 4 | 15960 | 22.95 | 37.29 | 14.34 | 54.00 | 16.71 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

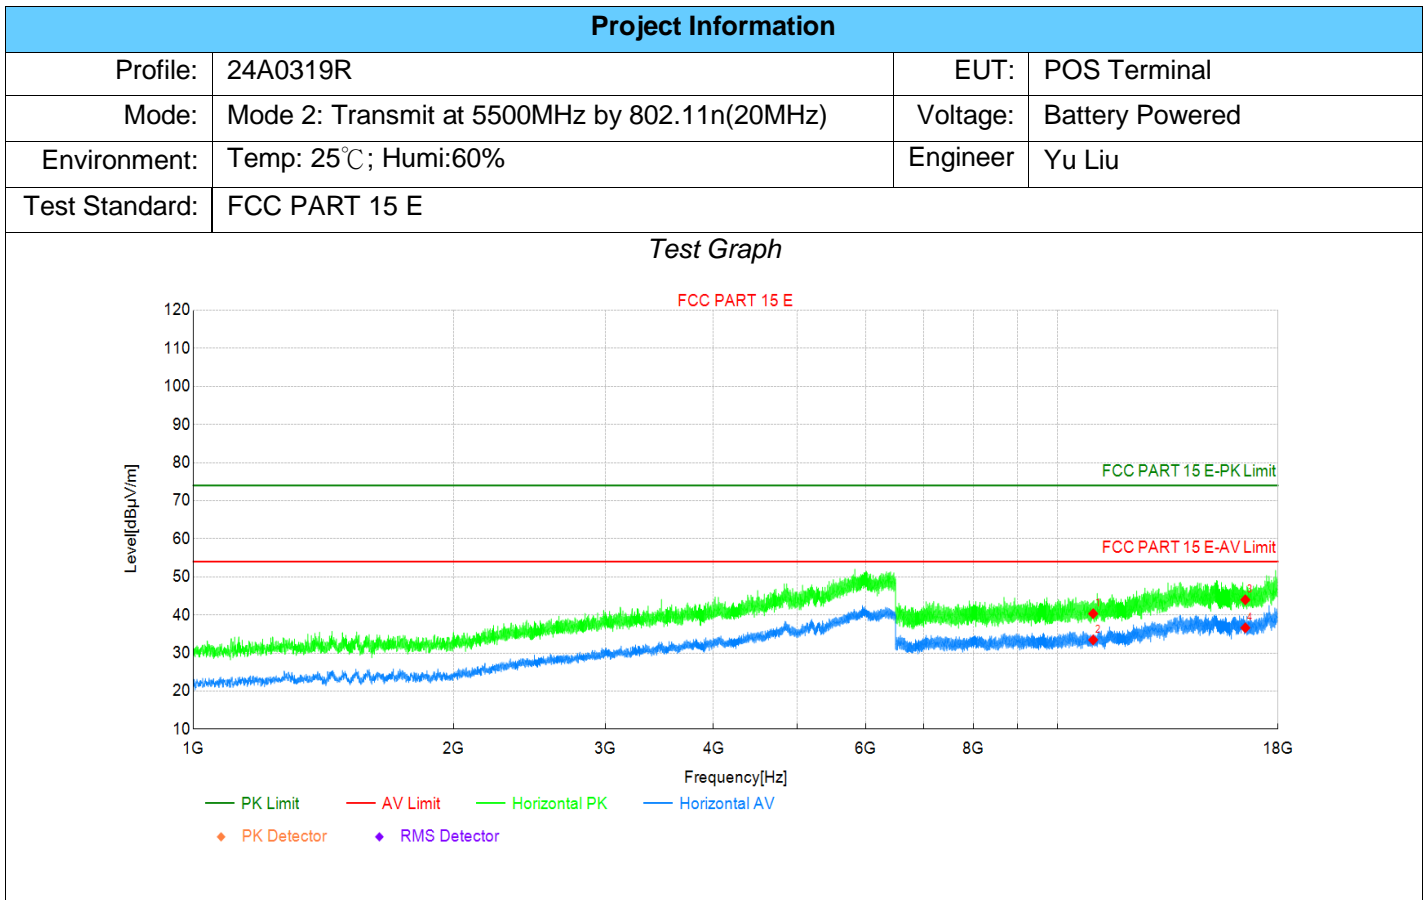

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11000 | 33.07 | 40.33 | 7.26 | 74.00 | 33.67 | PK | Horizo | PASS |
| 2 | 11000 | 26.19 | 33.45 | 7.26 | 54.00 | 20.55 | AV | Horizo | PASS |
| 3 | 16500 | 29.07 | 43.98 | 14.91 | 74.00 | 30.02 | PK | Horizo | PASS |
| 4 | 16500 | 21.70 | 36.61 | 14.91 | 54.00 | 17.39 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

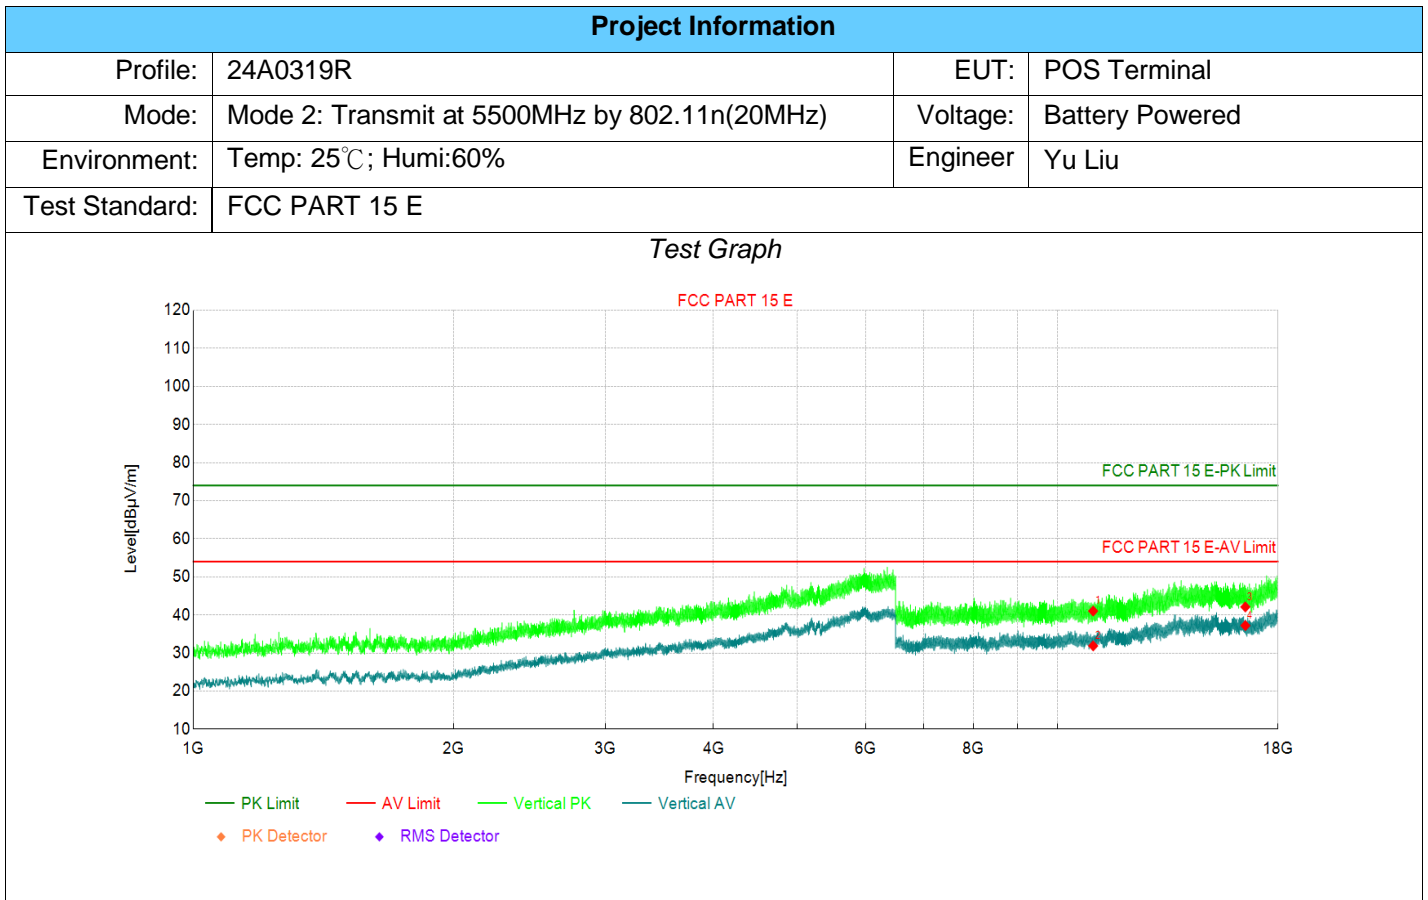

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11000 | 33.77 | 41.03 | 7.26 | 74.00 | 32.97 | PK | Vertic | PASS |
| 2 | 11000 | 24.61 | 31.87 | 7.26 | 74.00 | 42.13 | AV | Vertic | PASS |
| 3 | 16500 | 27.19 | 42.10 | 14.91 | 74.00 | 31.90 | PK | Vertic | PASS |
| 4 | 16500 | 22.29 | 37.20 | 14.91 | 74.00 | 36.80 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

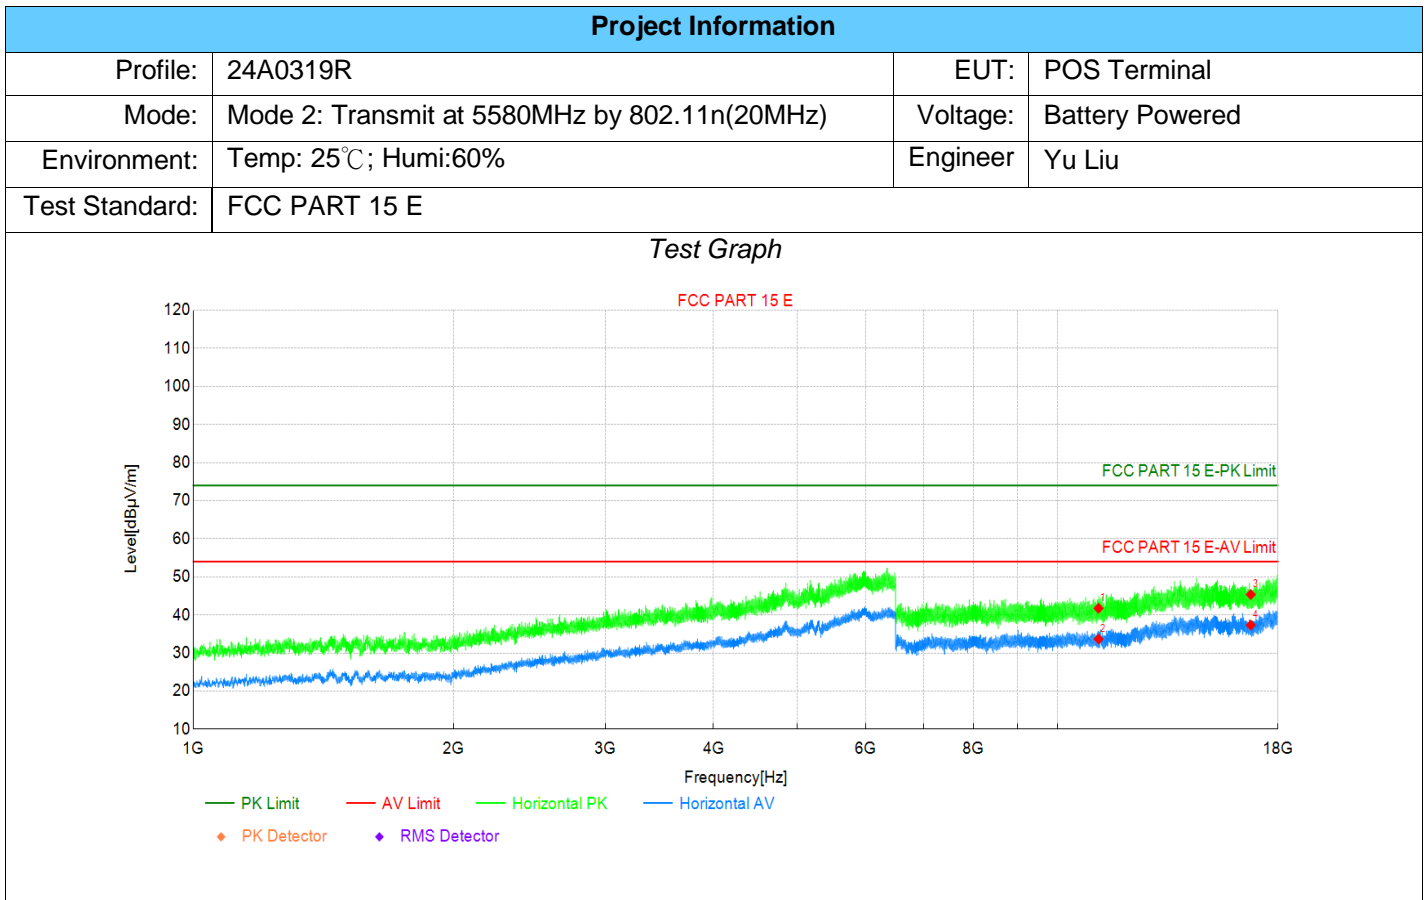

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11160 | 34.57 | 41.75 | 7.18 | 74.00 | 32.25 | PK | Horizo | PASS |
| 2 | 11160 | 26.50 | 33.68 | 7.18 | 54.00 | 20.32 | AV | Horizo | PASS |
| 3 | 16740 | 30.90 | 45.36 | 14.46 | 74.00 | 28.64 | PK | Horizo | PASS |
| 4 | 16740 | 22.88 | 37.34 | 14.46 | 54.00 | 16.66 | AV | Horizo | PASS |


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

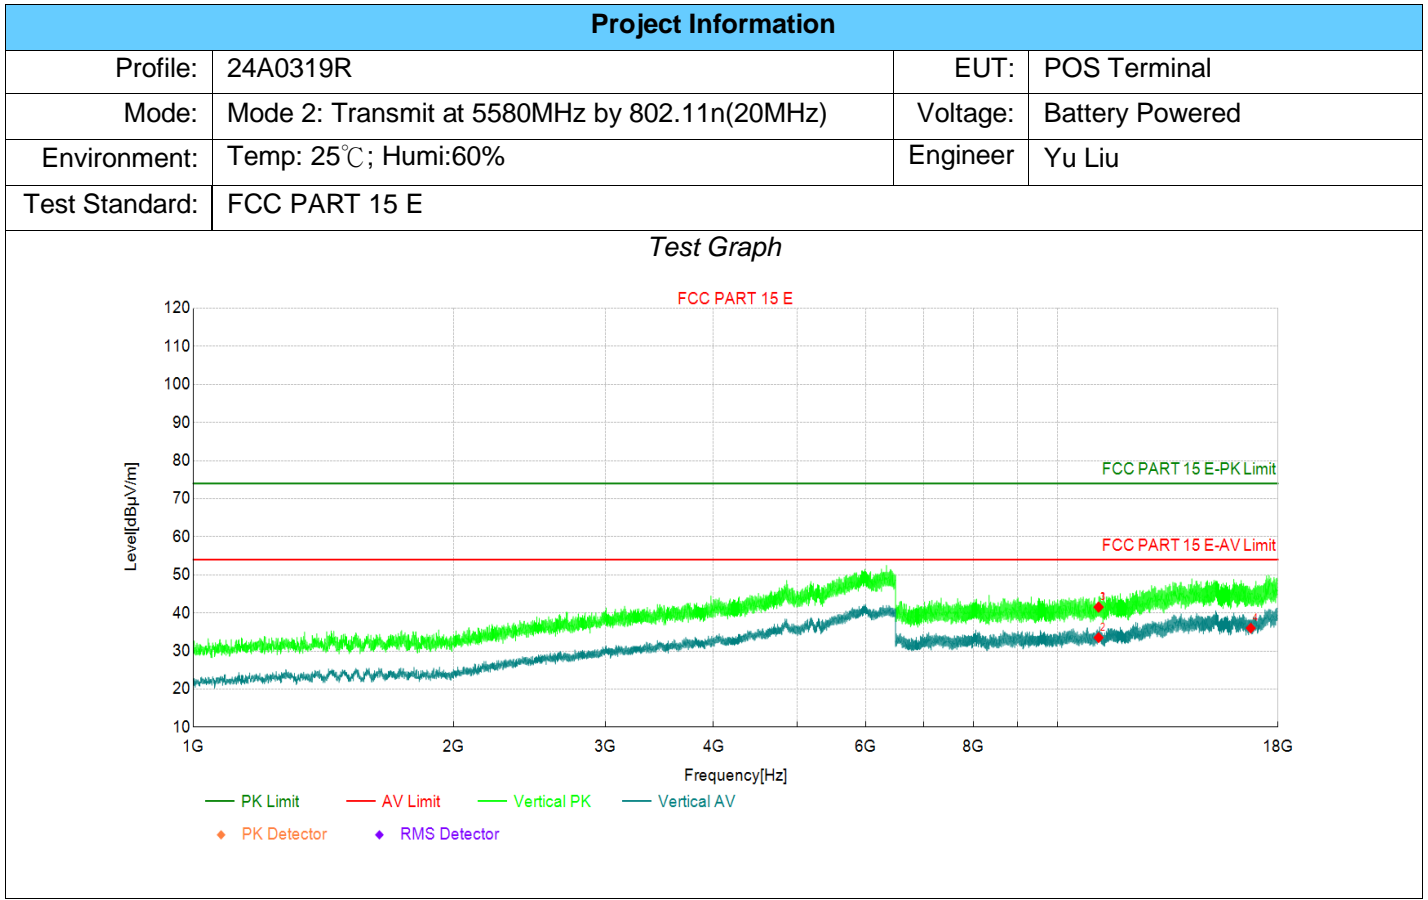

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11160 | 34.35 | 41.53 | 7.18 | 74.00 | 32.47 | PK | Vertic | PASS |
| 2 | 11160 | 26.34 | 33.52 | 7.18 | 54.00 | 20.48 | AV | Vertic | PASS |
| 3 | 11160 | 34.35 | 41.53 | 7.18 | 74.00 | 32.47 | PK | Vertic | PASS |
| 4 | 16740 | 21.55 | 36.01 | 14.46 | 54.00 | 17.99 | AV | Vertic | PASS |


Note:(1)Level=Reading+Factor
 (2)Margin=Limit-Level

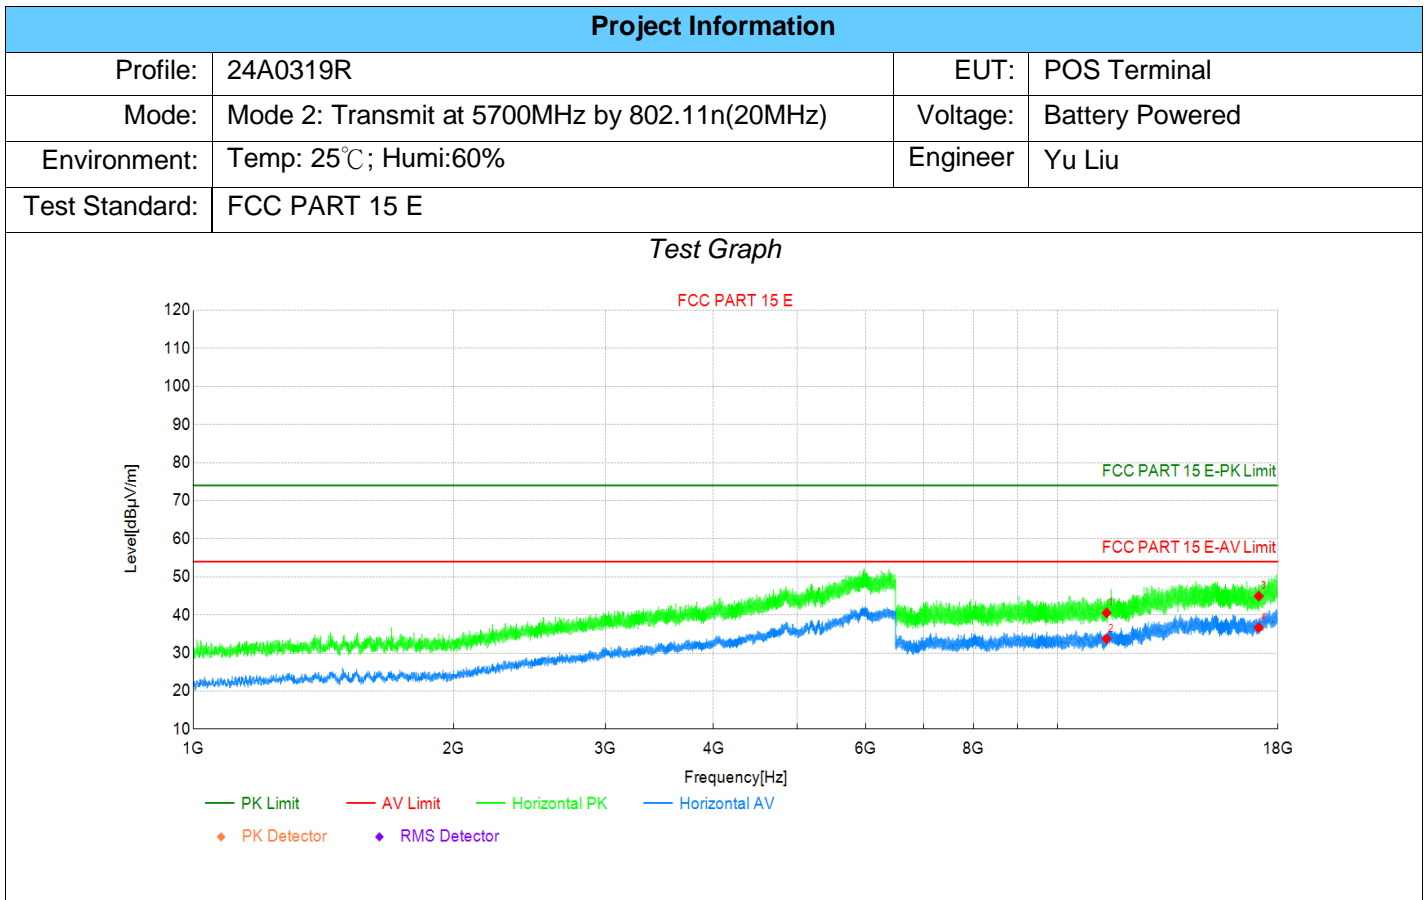

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11400 | 32.77 | 40.55 | 7.78 | 74.00 | 33.45 | PK | Horizo | PASS |
| 2 | 11400 | 25.95 | 33.73 | 7.78 | 54.00 | 20.27 | AV | Horizo | PASS |
| 3 | 17100 | 29.35 | 44.94 | 15.59 | 74.00 | 29.06 | PK | Horizo | PASS |
| 4 | 17100 | 21.08 | 36.67 | 15.59 | 54.00 | 17.33 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

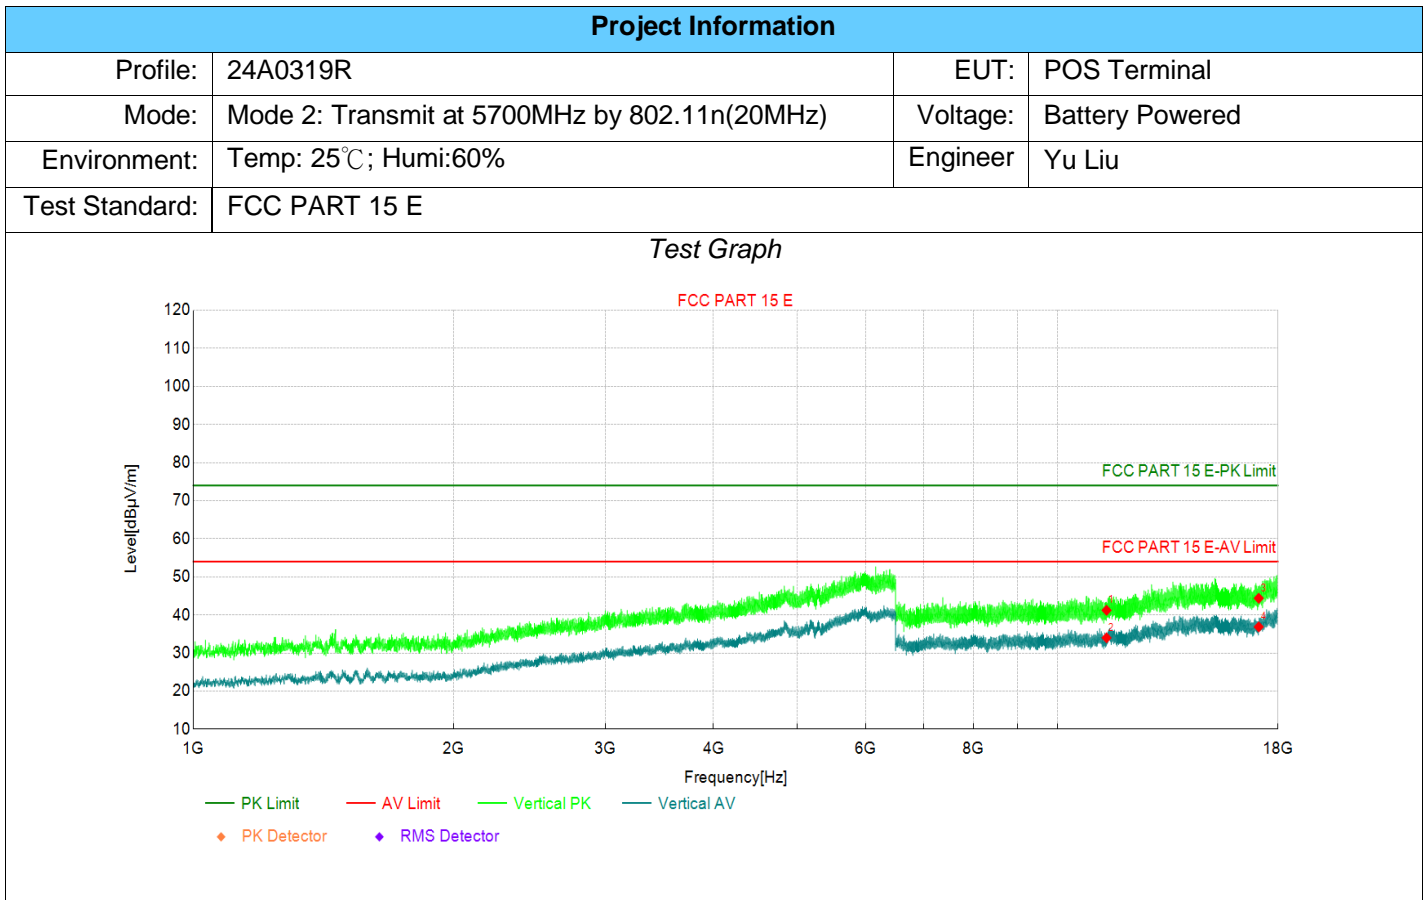

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11400 | 33.44 | 41.22 | 7.78 | 74.00 | 32.78 | PK | Vertic | PASS |
| 2 | 11400 | 26.21 | 33.99 | 7.78 | 54.00 | 20.01 | AV | Vertic | PASS |
| 3 | 17100 | 28.79 | 44.38 | 15.59 | 74.00 | 29.62 | PK | Vertic | PASS |
| 4 | 17100 | 21.27 | 36.86 | 15.59 | 54.00 | 17.14 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

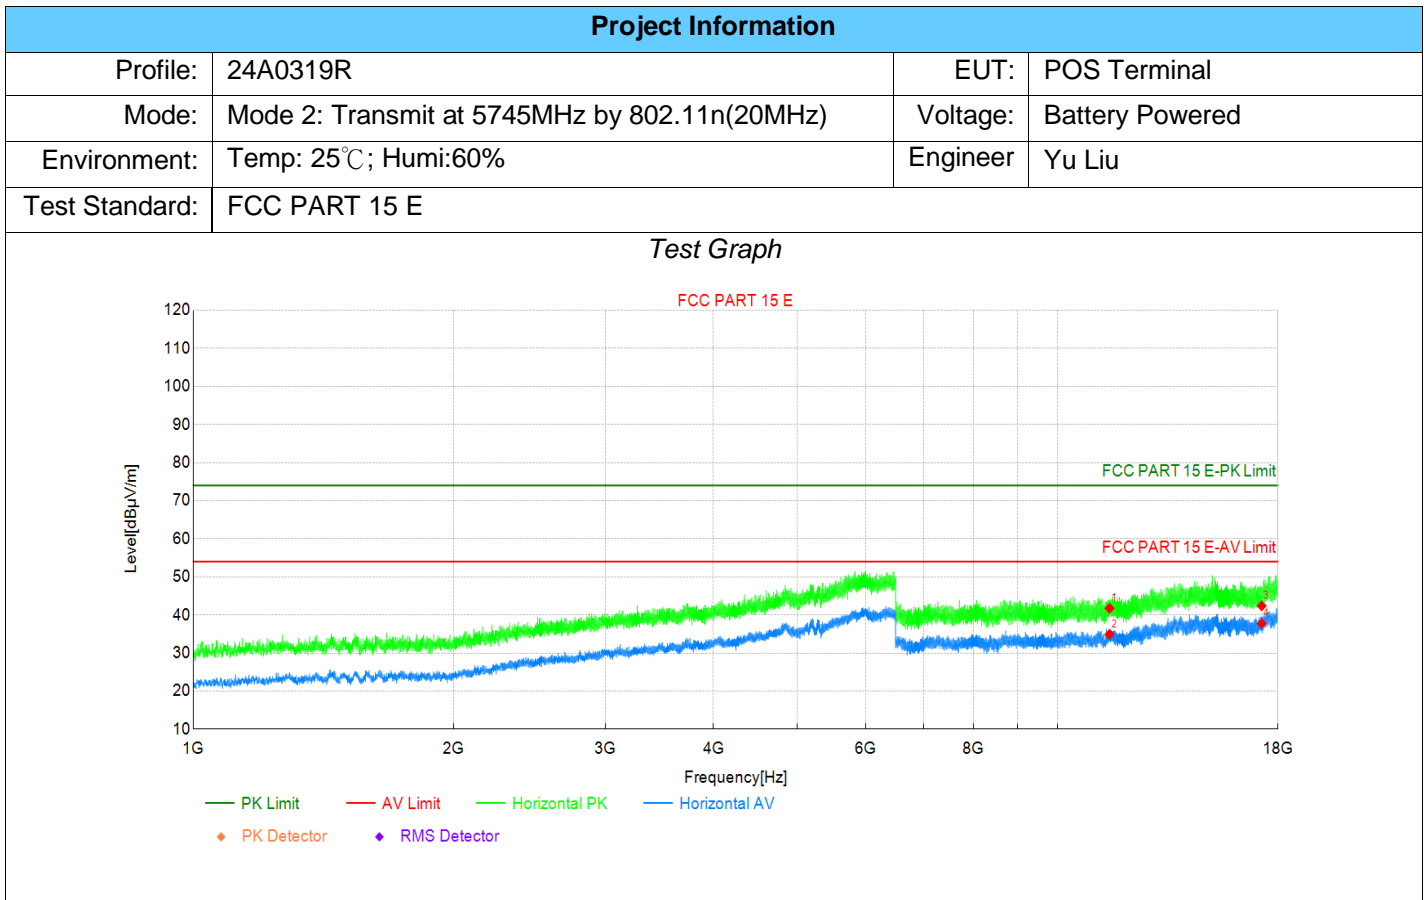

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11490 | 33.44 | 41.75 | 8.31 | 74.00 | 32.25 | PK | Horizo | PASS |
| 2 | 11490 | 26.59 | 34.90 | 8.31 | 54.00 | 19.10 | AV | Horizo | PASS |
| 3 | 17235 | 27.18 | 42.38 | 15.20 | 74.00 | 31.62 | PK | Horizo | PASS |
| 4 | 17235 | 22.56 | 37.76 | 15.20 | 54.00 | 16.24 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

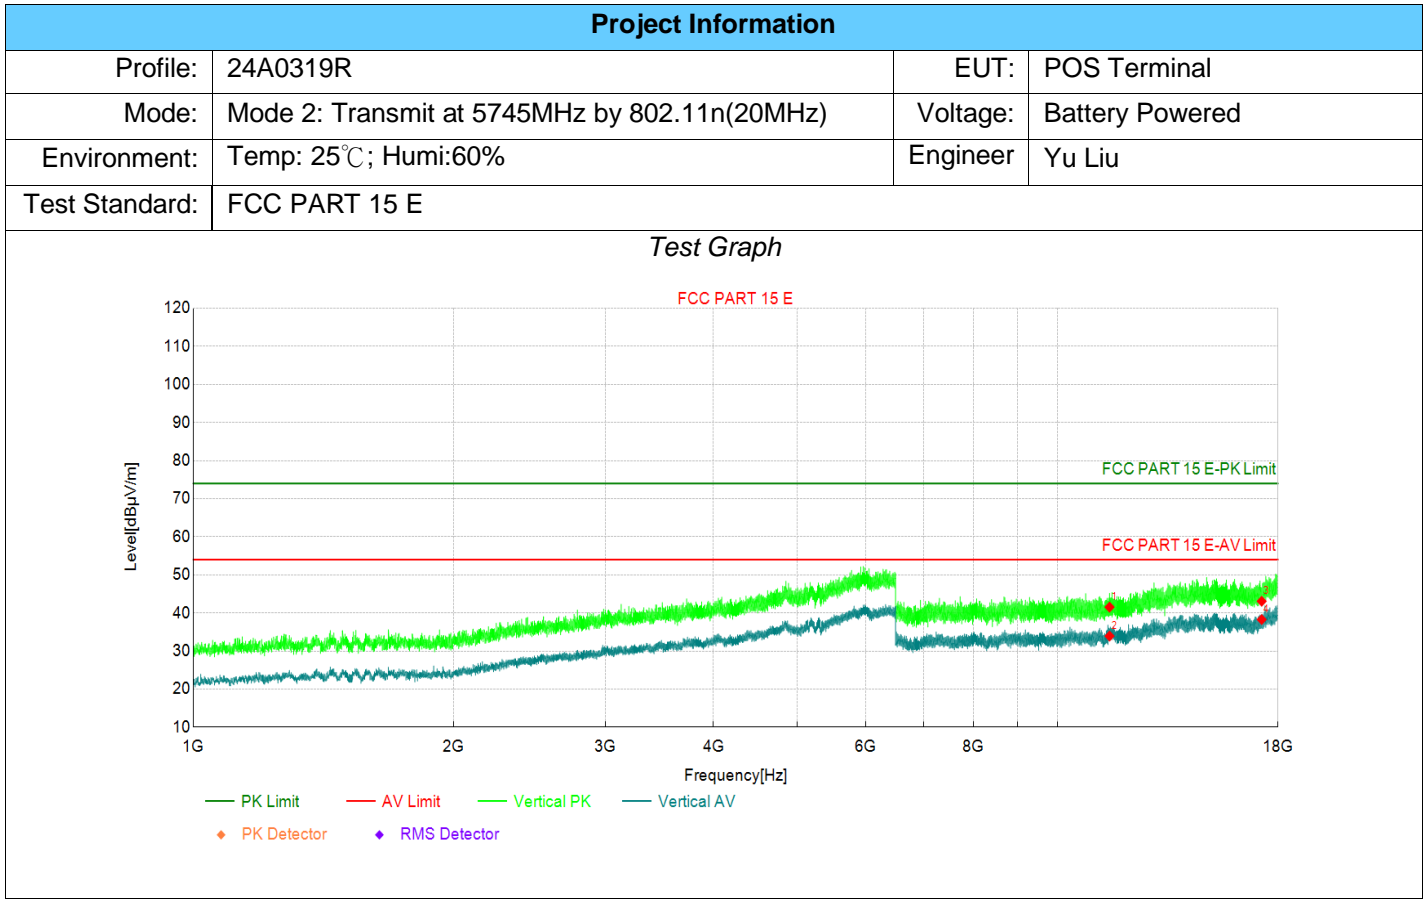

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11490 | 33.22 | 41.53 | 8.31 | 74.00 | 32.47 | PK | Vertic | PASS |
| 2 | 11490 | 25.61 | 33.92 | 8.31 | 54.00 | 20.08 | AV | Vertic | PASS |
| 3 | 17235 | 27.87 | 43.07 | 15.20 | 74.00 | 30.93 | PK | Vertic | PASS |
| 4 | 17235 | 23.07 | 38.27 | 15.20 | 54.00 | 15.73 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

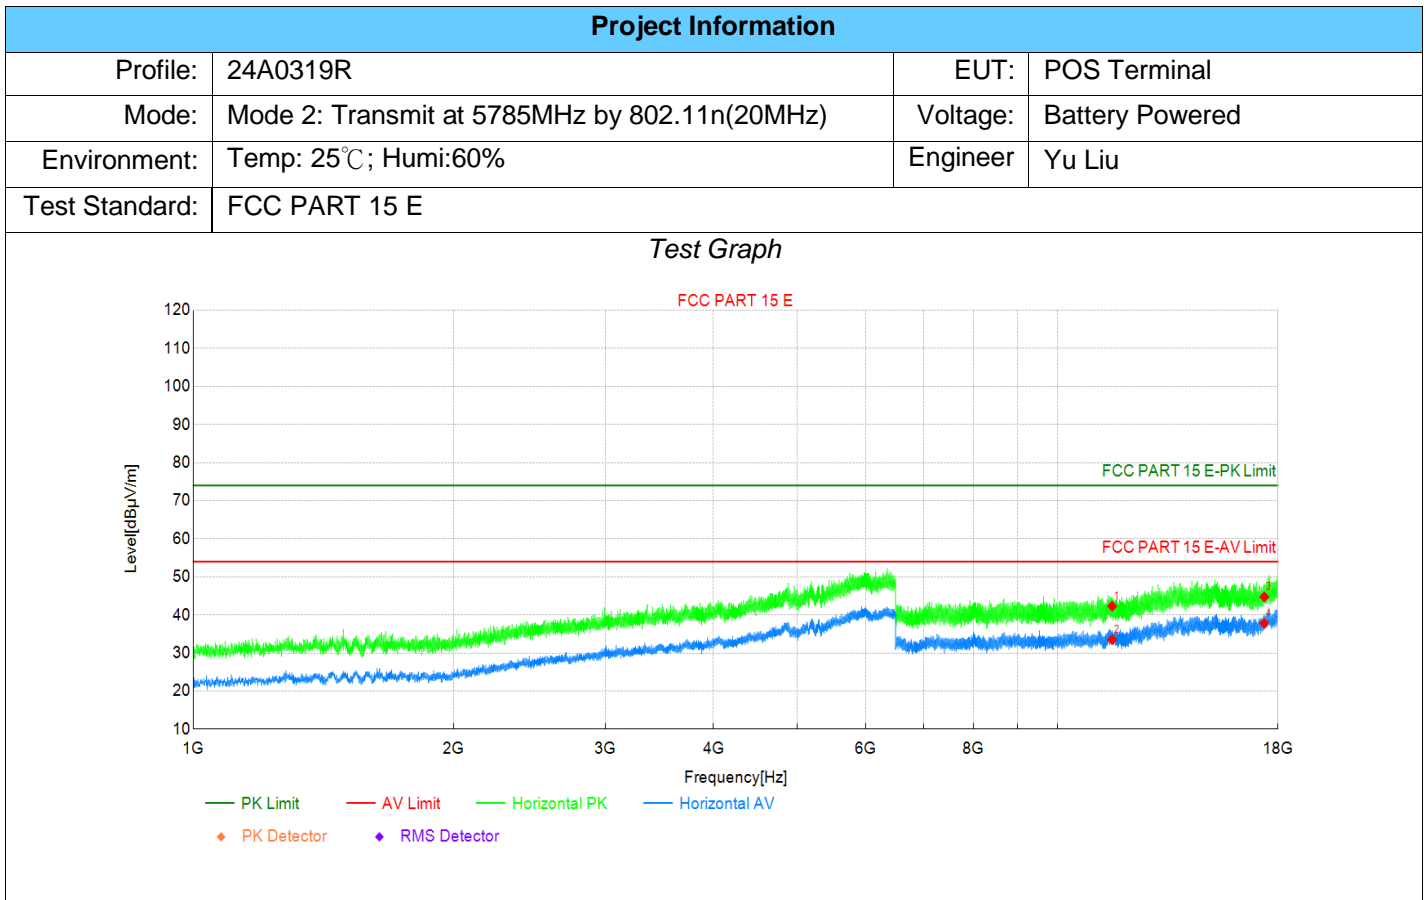

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11570 | 33.71 | 42.30 | 8.59 | 74.00 | 31.70 | PK | Horizo | PASS |
| 2 | 11570 | 24.94 | 33.53 | 8.59 | 54.00 | 20.47 | AV | Horizo | PASS |
| 3 | 17355 | 28.81 | 44.74 | 15.93 | 74.00 | 29.26 | PK | Horizo | PASS |
| 4 | 17355 | 21.89 | 37.82 | 15.93 | 54.00 | 16.18 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

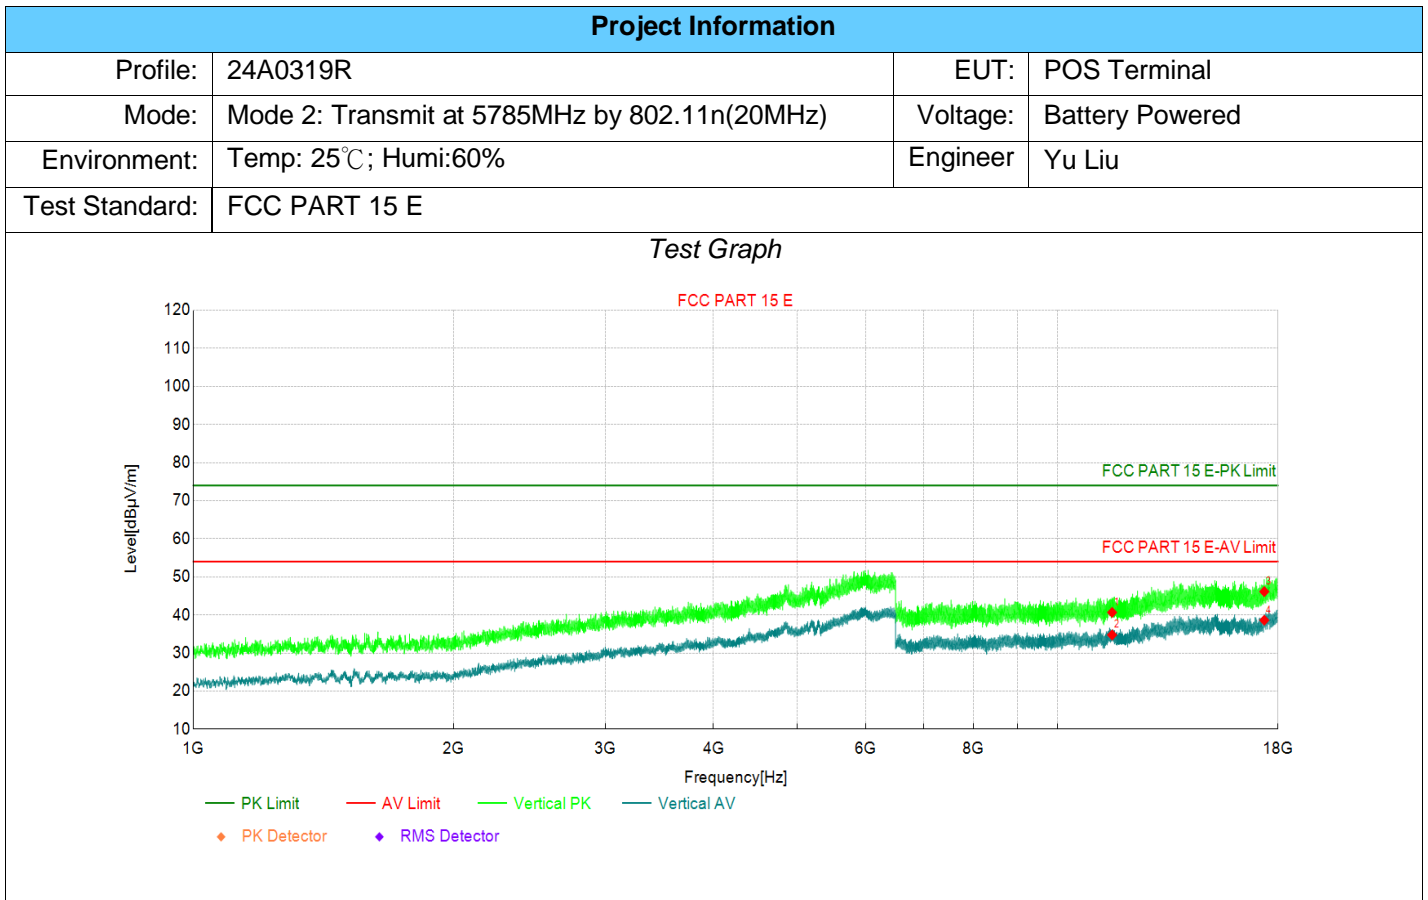

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11570 | 32.07 | 40.66 | 8.59 | 74.00 | 33.34 | PK | Vertic | PASS |
| 2 | 11570 | 26.16 | 34.75 | 8.59 | 54.00 | 19.25 | AV | Vertic | PASS |
| 3 | 17355 | 30.20 | 46.13 | 15.93 | 74.00 | 27.87 | PK | Vertic | PASS |
| 4 | 17355 | 22.69 | 38.62 | 15.93 | 54.00 | 15.38 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

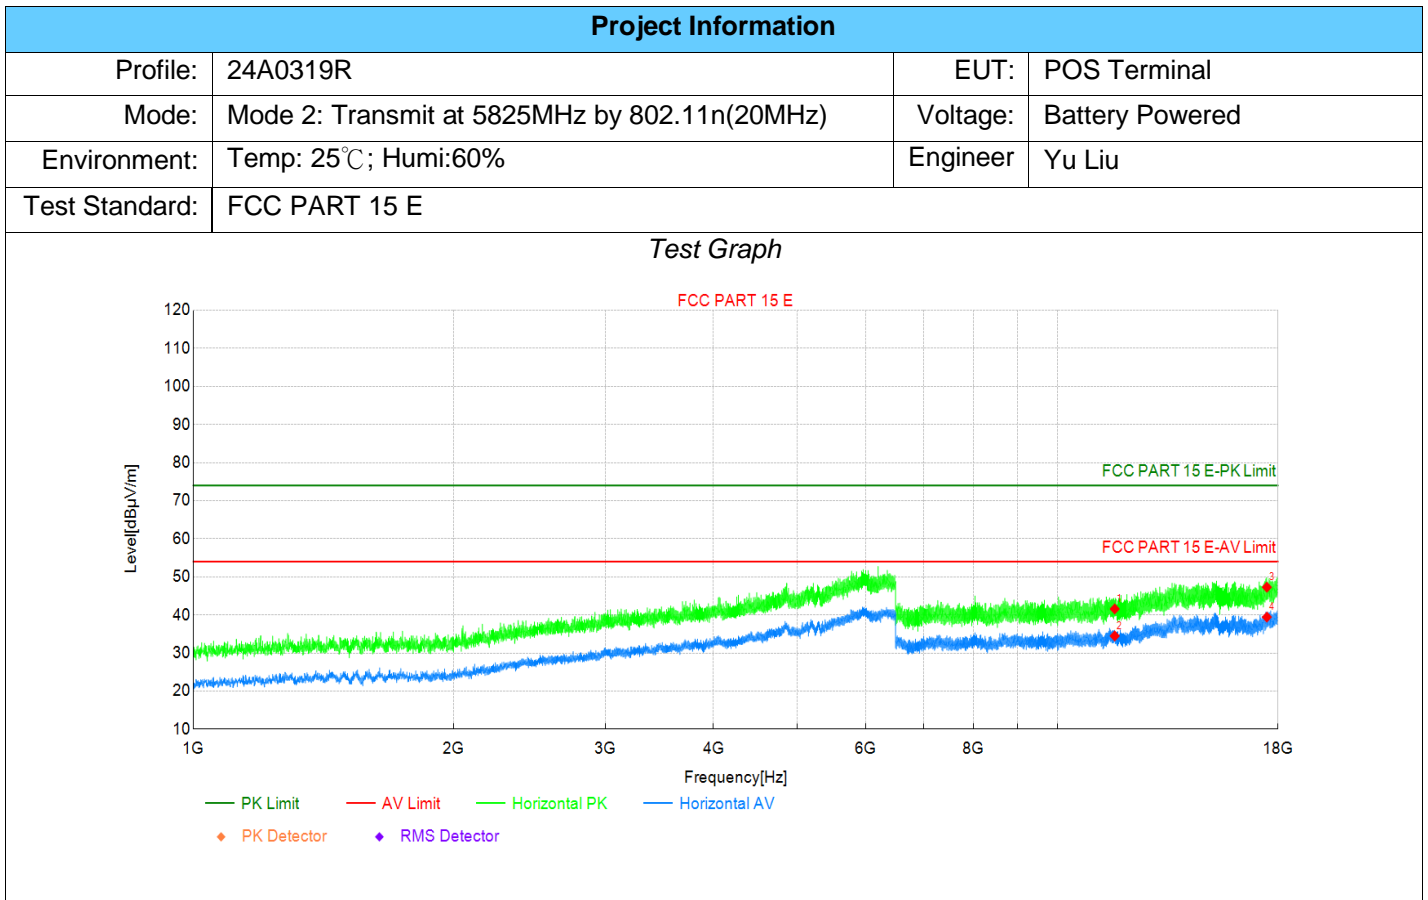

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11650 | 32.96 | 41.58 | 8.62 | 74.00 | 32.42 | PK | Horizo | PASS |
| 2 | 11650 | 25.86 | 34.48 | 8.62 | 54.00 | 19.52 | AV | Horizo | PASS |
| 3 | 17475 | 30.47 | 47.29 | 16.82 | 74.00 | 26.71 | PK | Horizo | PASS |
| 4 | 17475 | 22.62 | 39.44 | 16.82 | 54.00 | 14.56 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

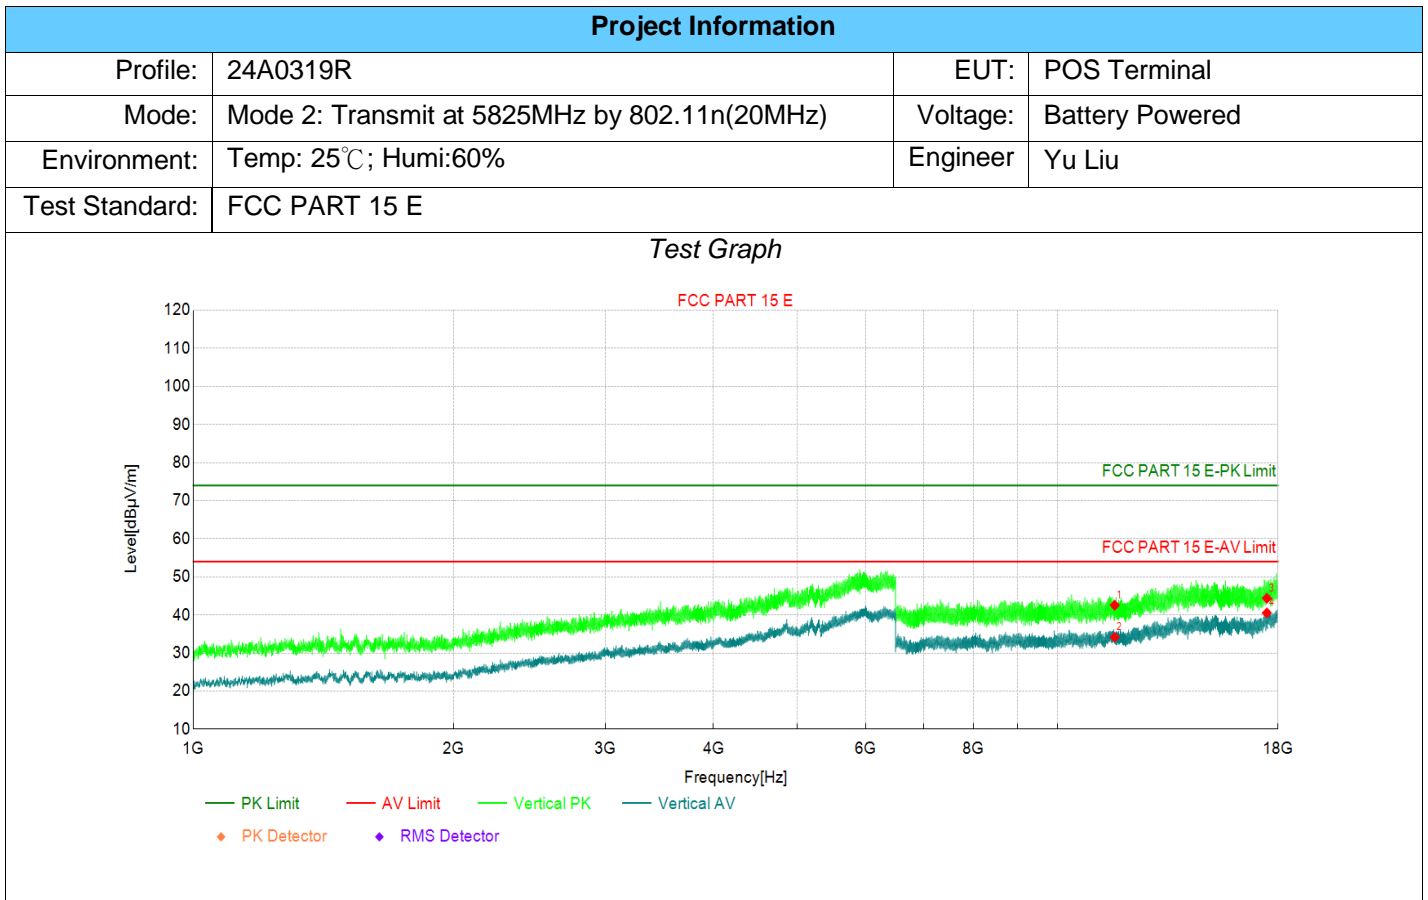

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 11650 | 33.92 | 42.54 | 8.62 | 74.00 | 31.46 | PK | Vertic | PASS |
| 2 | 11650 | 25.52 | 34.14 | 8.62 | 54.00 | 19.86 | AV | Vertic | PASS |
| 3 | 17475 | 27.57 | 44.39 | 16.82 | 74.00 | 29.61 | PK | Vertic | PASS |
| 4 | 17475 | 23.69 | 40.51 | 16.82 | 54.00 | 13.49 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

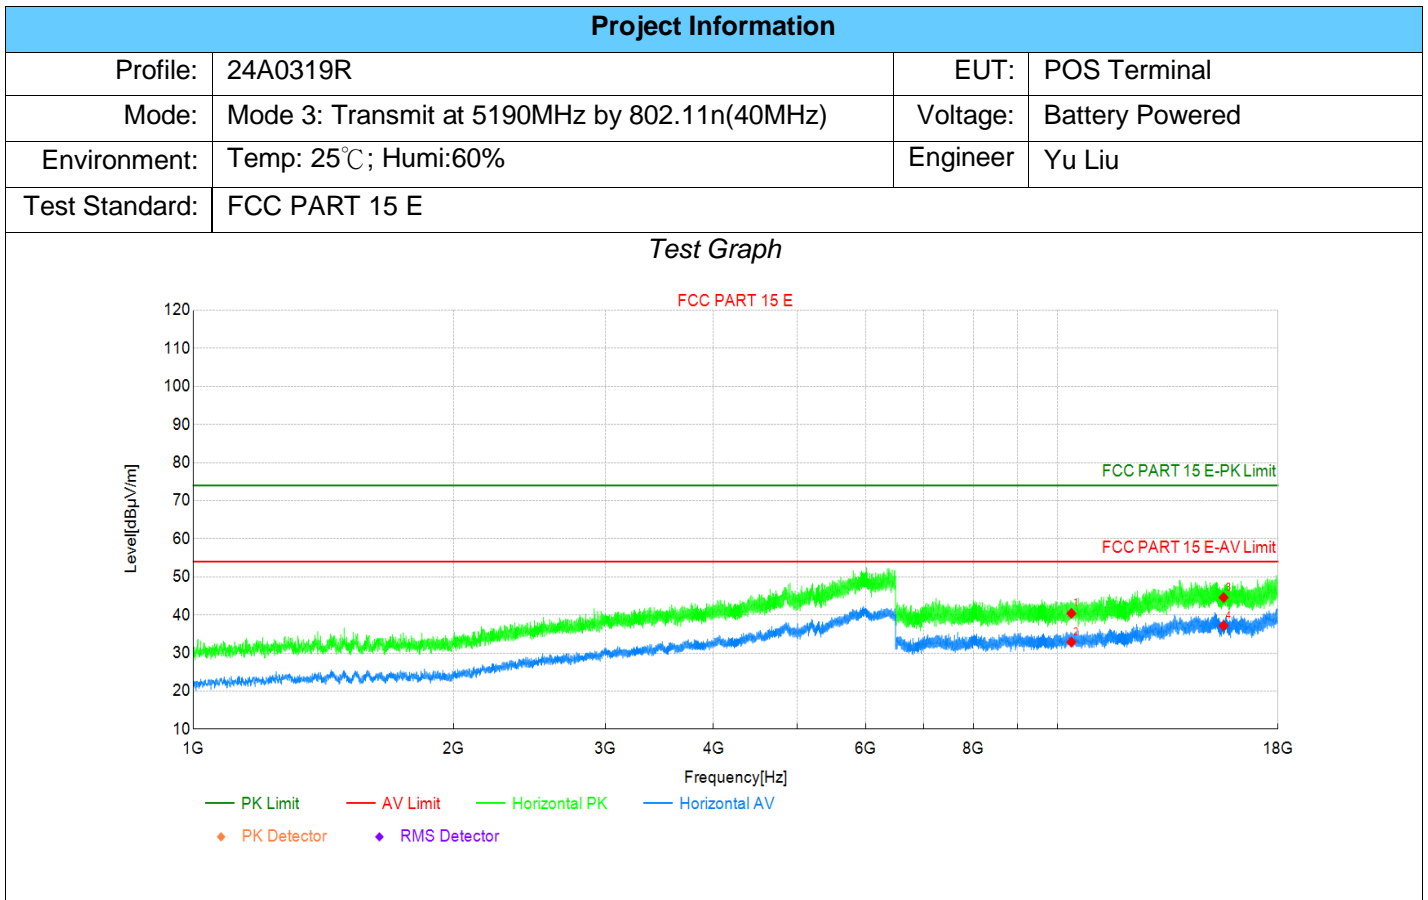

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10380 | 34.09 | 40.39 | 6.30 | 74.00 | 33.61 | PK | Horizo | PASS |
| 2 | 10380 | 26.56 | 32.86 | 6.30 | 54.00 | 21.14 | AV | Horizo | PASS |
| 3 | 15570 | 31.24 | 44.57 | 13.33 | 74.00 | 29.43 | PK | Horizo | PASS |
| 4 | 15570 | 23.85 | 37.18 | 13.33 | 54.00 | 16.82 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

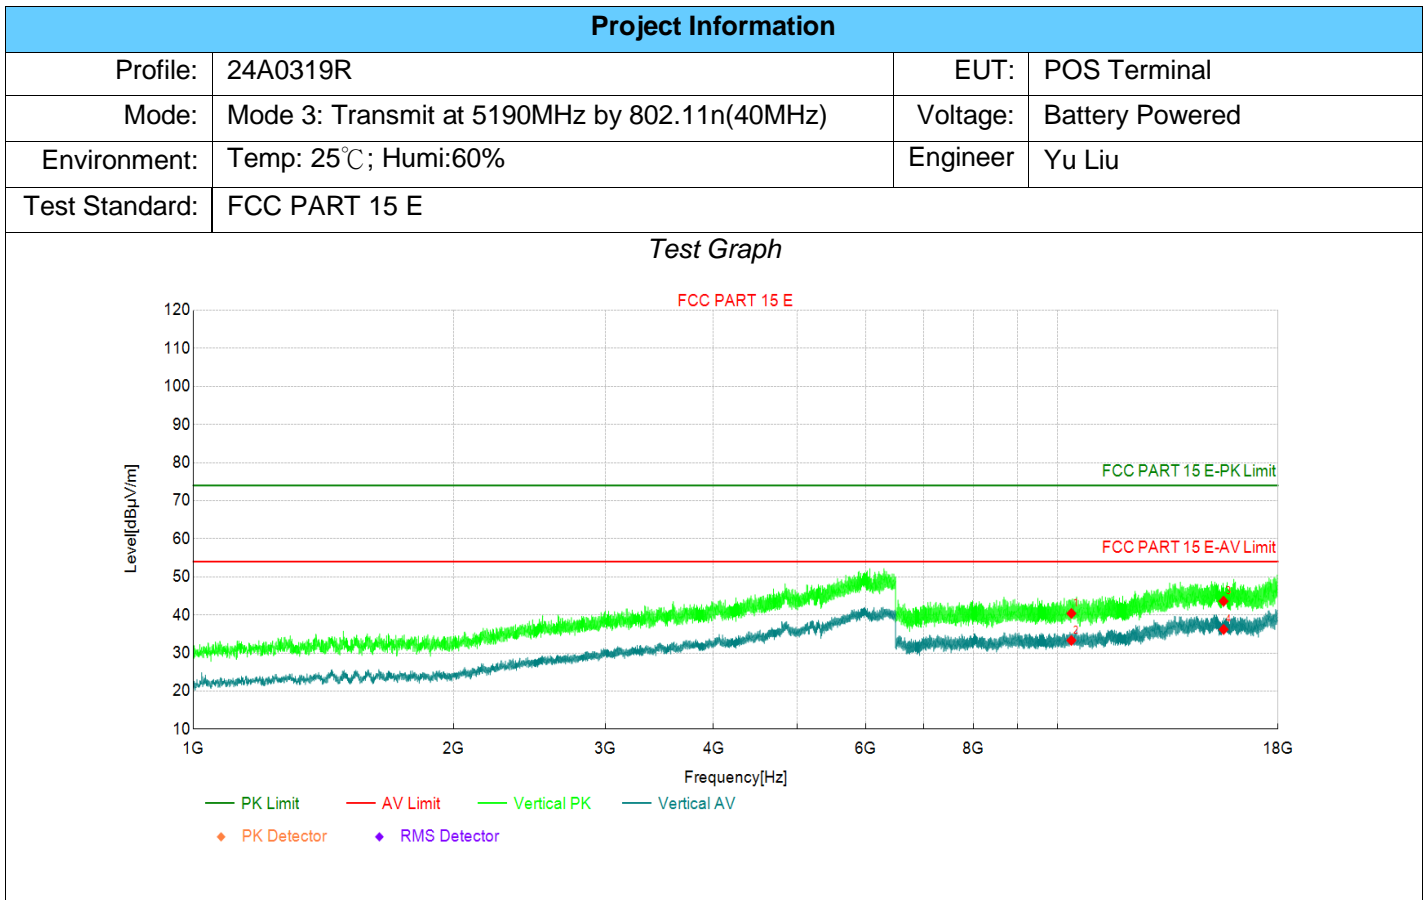

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10380 | 34.09 | 40.39 | 6.30 | 74.00 | 33.61 | PK | Vertic | PASS |
| 2 | 10380 | 27.01 | 33.31 | 6.30 | 54.00 | 20.69 | AV | Vertic | PASS |
| 3 | 15570 | 30.28 | 43.61 | 13.33 | 74.00 | 30.39 | PK | Vertic | PASS |
| 4 | 15570 | 22.86 | 36.19 | 13.33 | 54.00 | 17.81 | AV | Vertic | PASS |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

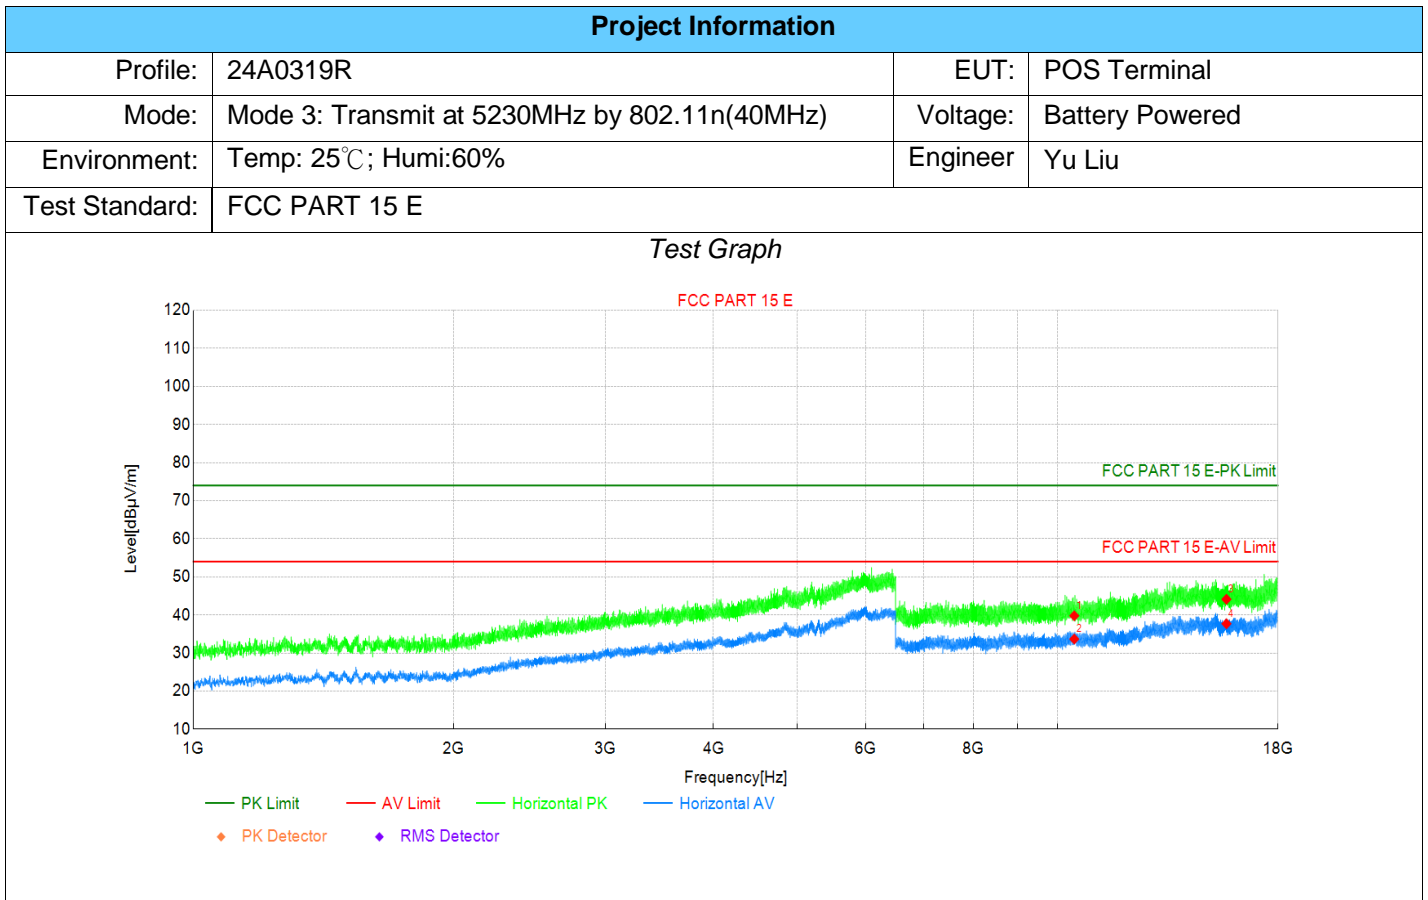

| Suspected Data List | | | | | | | | | |
|---------------------|-----------------|----------------|----------------|---------------|----------------|-------------|-----|--------|---------|
| NO | Frequency [MHz] | Reading [dBµV] | Level [dBµV/m] | Factor [dB/m] | Limit [dBµV/m] | Margin [dB] | Det | Pol | Verdict |
| 1 | 10460 | 33.35 | 39.77 | 6.42 | 74.00 | 34.23 | PK | Horizo | PASS |
| 2 | 10460 | 27.25 | 33.67 | 6.42 | 54.00 | 20.33 | AV | Horizo | PASS |
| 3 | 15690 | 30.04 | 44.12 | 14.08 | 74.00 | 29.88 | PK | Horizo | PASS |
| 4 | 15690 | 23.61 | 37.69 | 14.08 | 54.00 | 16.31 | AV | Horizo | PASS |

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level