


Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5230MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

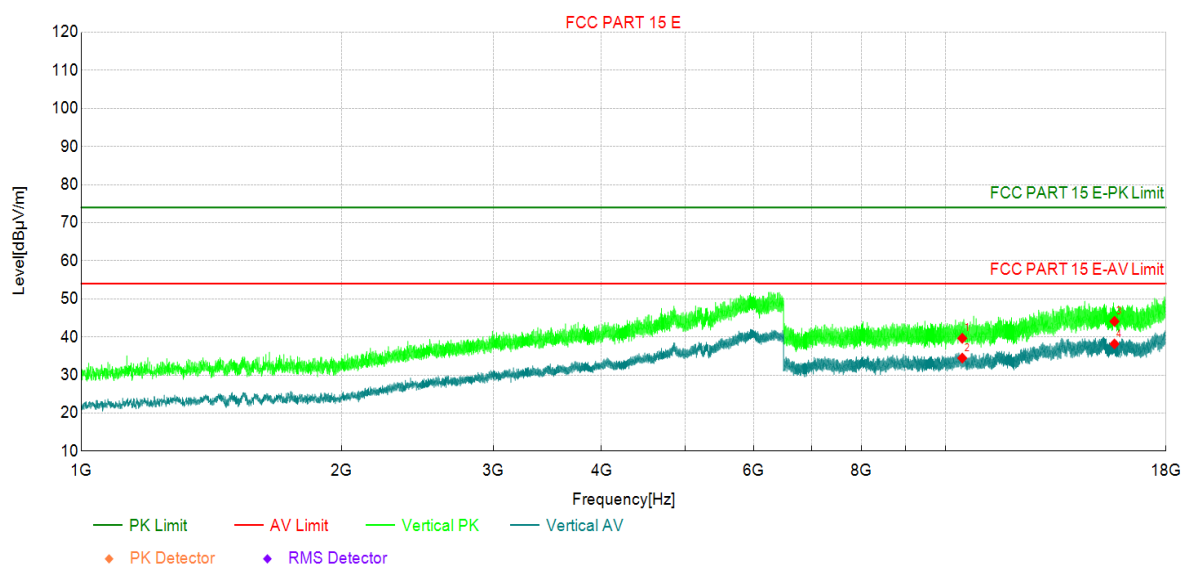

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	33.22	39.64	6.42	74.00	34.36	PK	Vertic	PASS
2	10460	28.03	34.45	6.42	54.00	19.55	AV	Vertic	PASS
3	15690	30.01	44.09	14.08	74.00	29.91	PK	Vertic	PASS
4	15690	24.08	38.16	14.08	54.00	15.84	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5270MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

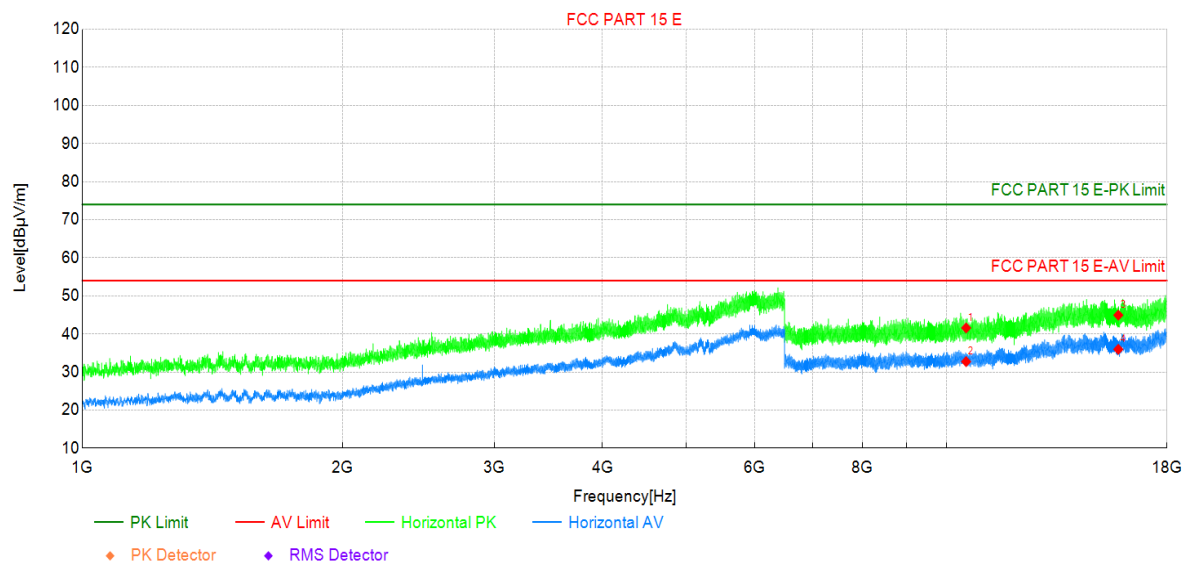

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	35.06	41.59	6.53	74.00	32.41	PK	Horizo	PASS
2	10540	26.20	32.73	6.53	54.00	21.27	AV	Horizo	PASS
3	15810	31.25	44.94	13.69	74.00	29.06	PK	Horizo	PASS
4	15810	22.27	35.96	13.69	54.00	18.04	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5270MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

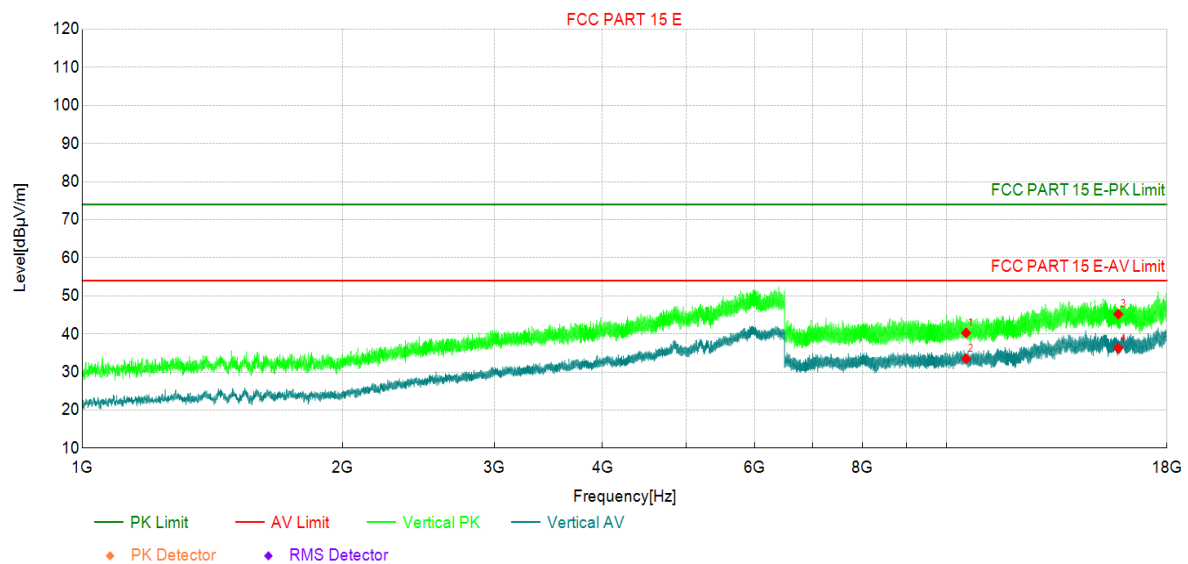

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	33.74	40.27	6.53	74.00	33.73	PK	Vertic	PASS
2	10540	26.98	33.51	6.53	54.00	20.49	AV	Vertic	PASS
3	15810	31.52	45.21	13.69	74.00	28.79	PK	Vertic	PASS
4	15810	22.59	36.28	13.69	54.00	17.72	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5310MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

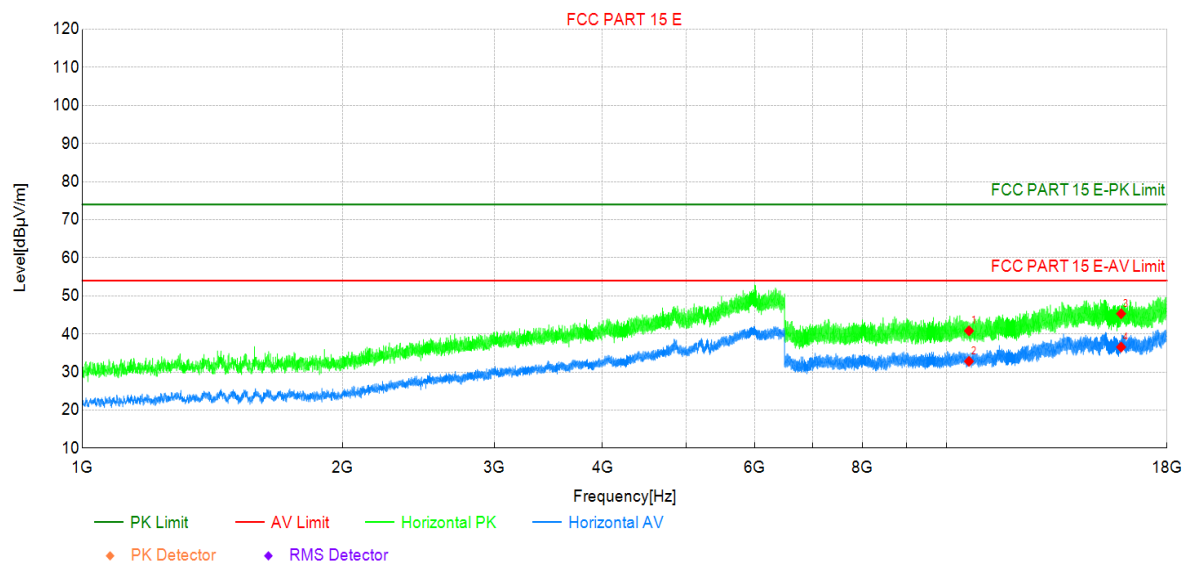


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	34.23	40.81	6.58	74.00	33.19	PK	Horizo	PASS
2	10620	26.22	32.80	6.58	54.00	21.20	AV	Horizo	PASS
3	15930	31.23	45.31	14.08	74.00	28.69	PK	Horizo	PASS
4	15930	22.47	36.55	14.08	54.00	17.45	AV	Horizo	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

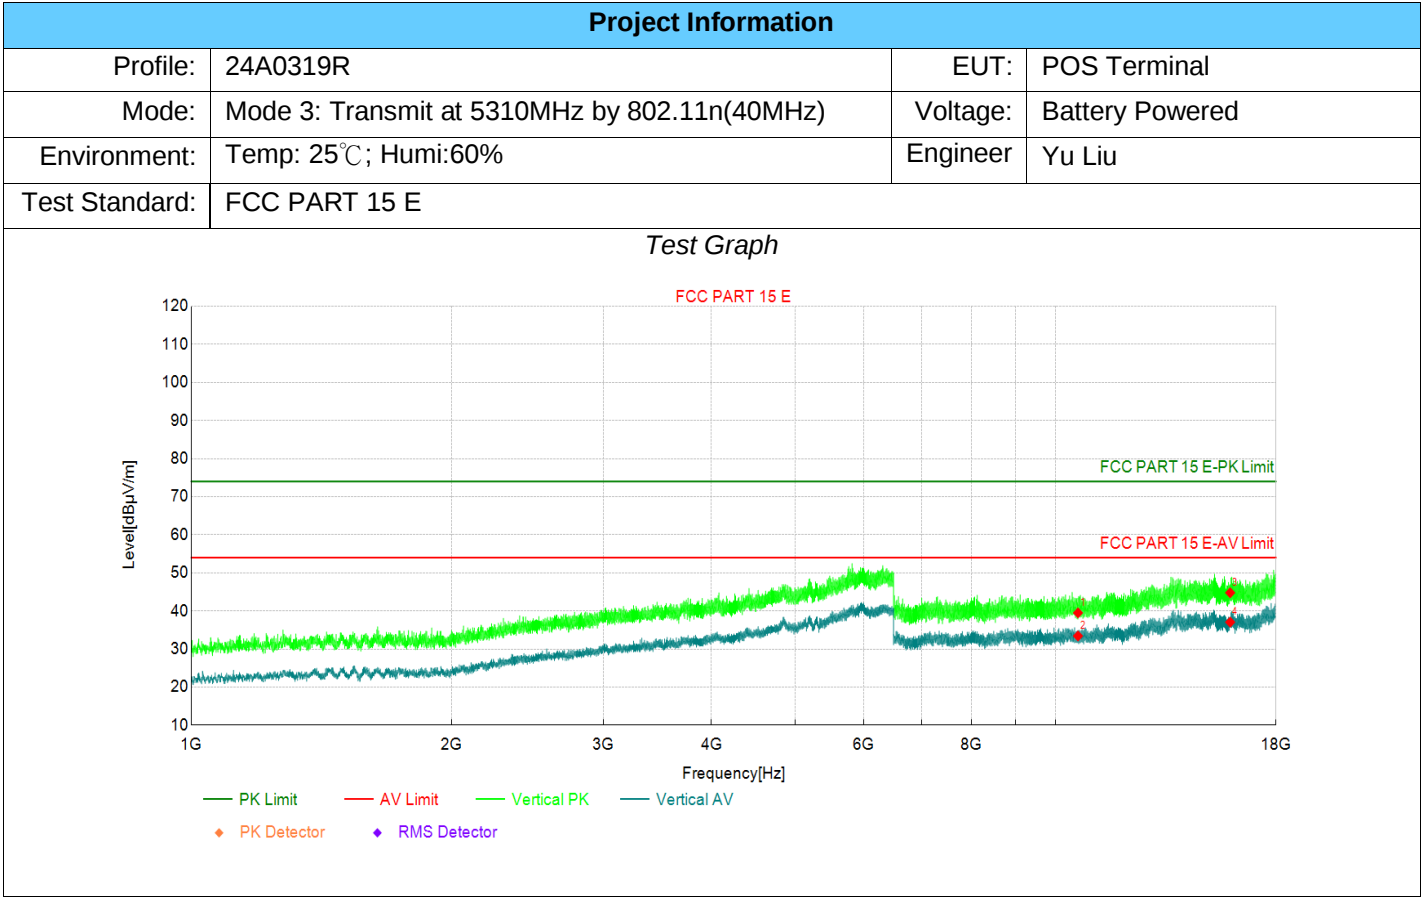


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	32.91	39.49	6.58	74.00	34.51	PK	Vertic	PASS
2	10620	26.85	33.43	6.58	54.00	20.57	AV	Vertic	PASS
3	15930	30.70	44.78	14.08	74.00	29.22	PK	Vertic	PASS
4	15930	22.98	37.06	14.08	54.00	16.94	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5510MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

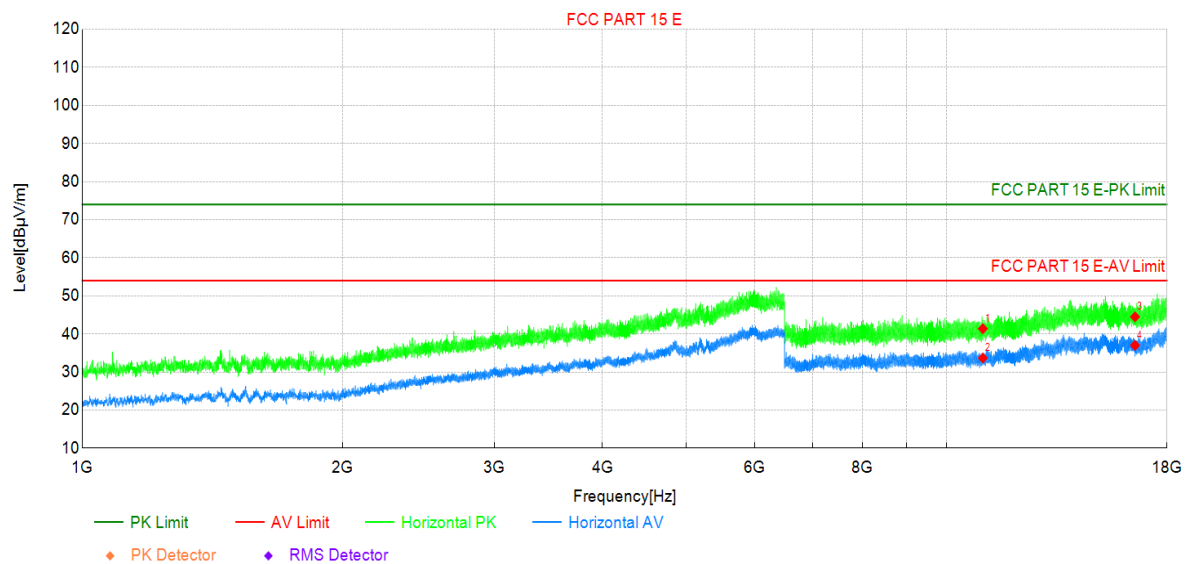

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	34.26	41.38	7.12	74.00	32.62	PK	Horizo	PASS
2	11020	26.55	33.67	7.12	54.00	20.33	AV	Horizo	PASS
3	16530	29.69	44.50	14.81	74.00	29.50	PK	Horizo	PASS
4	16530	22.19	37.00	14.81	54.00	17.00	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5510MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

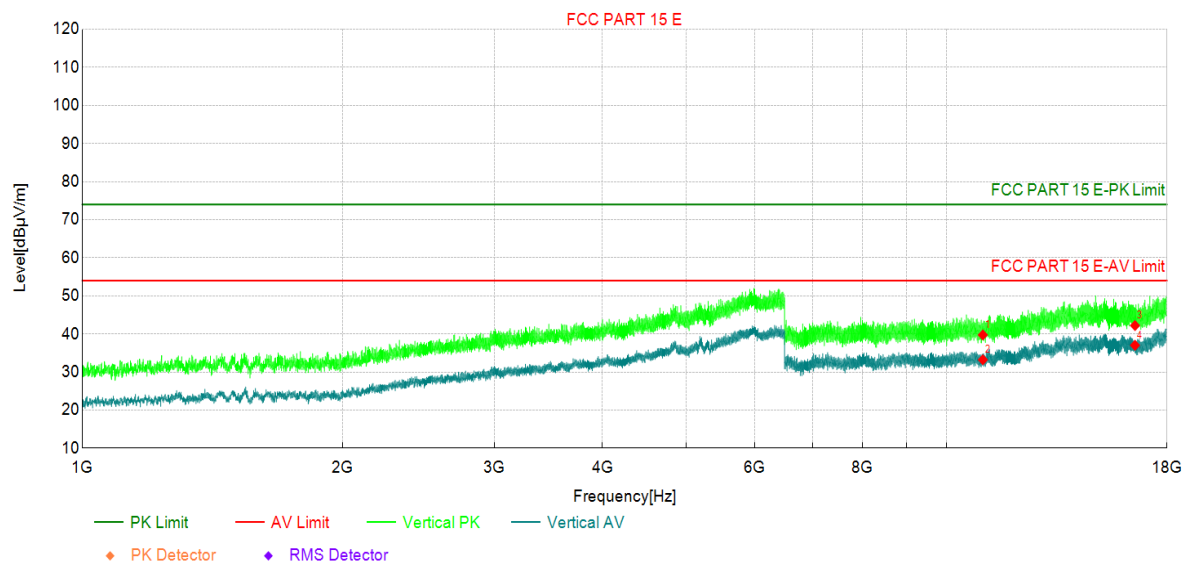

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	32.62	39.74	7.12	74.00	34.26	PK	Vertic	PASS
2	11020	26.10	33.22	7.12	54.00	20.78	AV	Vertic	PASS
3	16530	27.39	42.20	14.81	74.00	31.80	PK	Vertic	PASS
4	16530	22.20	37.01	14.81	54.00	16.99	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5550MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

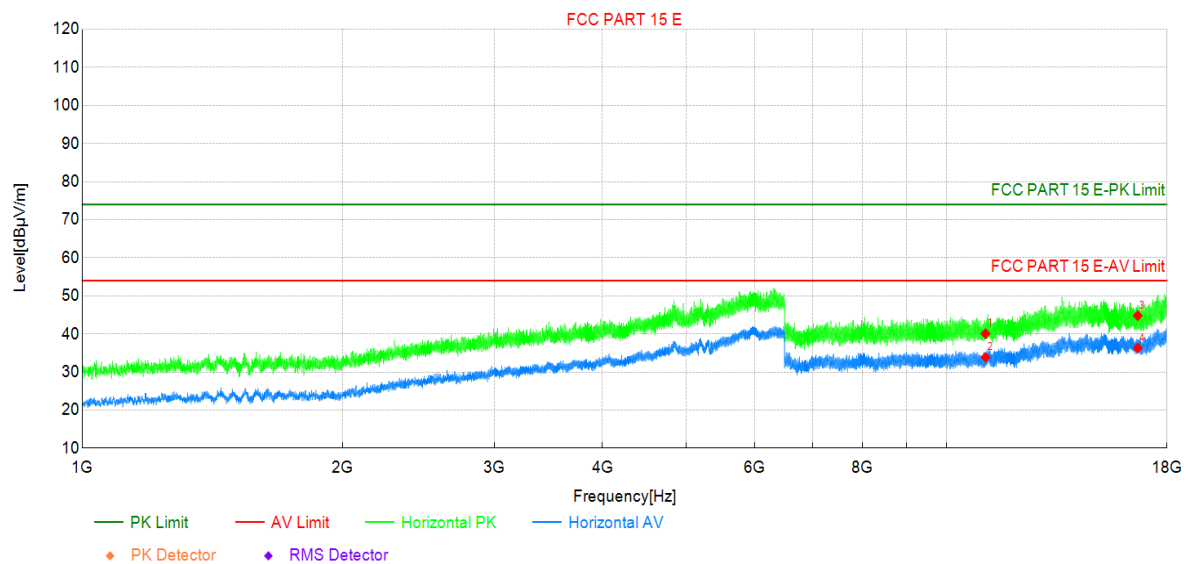

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	33.51	40.06	6.55	74.00	33.94	PK	Horizo	PASS
2	11100	27.30	33.85	6.55	54.00	20.15	AV	Horizo	PASS
3	16650	30.30	44.81	14.51	74.00	29.19	PK	Horizo	PASS
4	16650	21.78	36.29	14.51	54.00	17.71	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5550MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

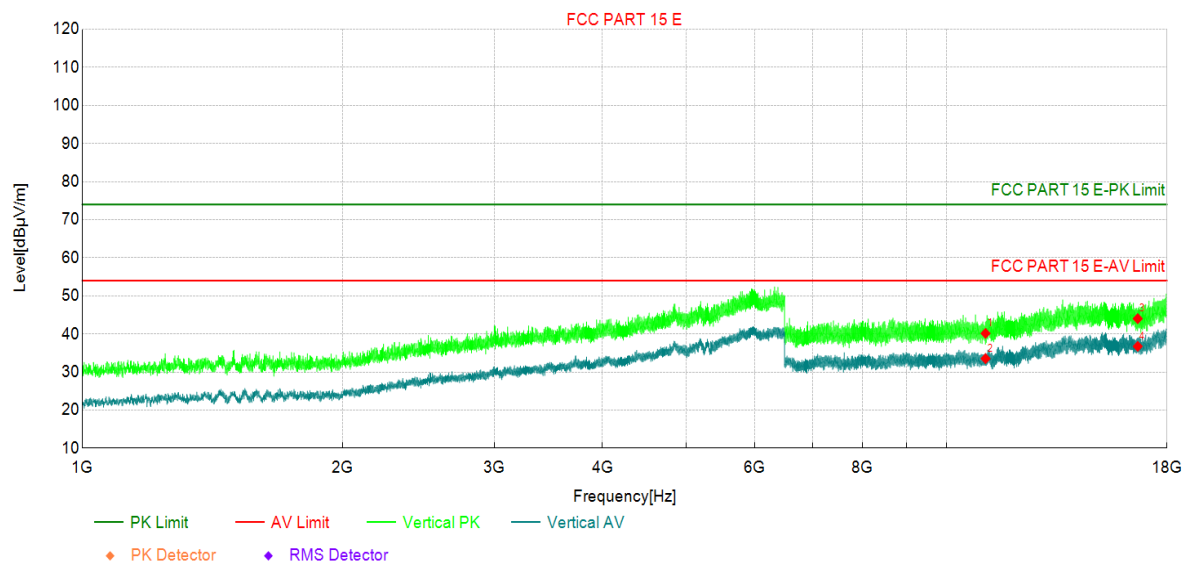

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	33.59	40.14	6.55	74.00	33.86	PK	Vertic	PASS
2	11100	26.98	33.53	6.55	54.00	20.47	AV	Vertic	PASS
3	16650	29.50	44.01	14.51	74.00	29.99	PK	Vertic	PASS
4	16650	22.22	36.73	14.51	54.00	17.27	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5670MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

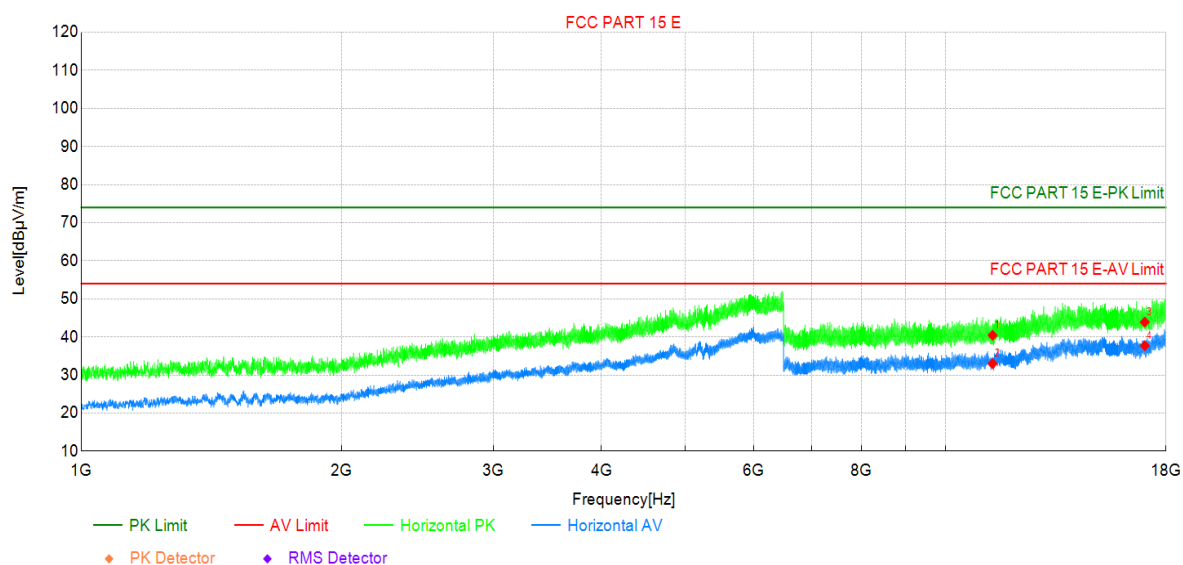

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	32.63	40.43	7.80	74.00	33.57	PK	Horizo	PASS
2	11340	25.20	33.00	7.80	54.00	21.00	AV	Horizo	PASS
3	17010	28.06	43.90	15.84	74.00	30.10	PK	Horizo	PASS
4	17010	21.87	37.71	15.84	54.00	16.29	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5670MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

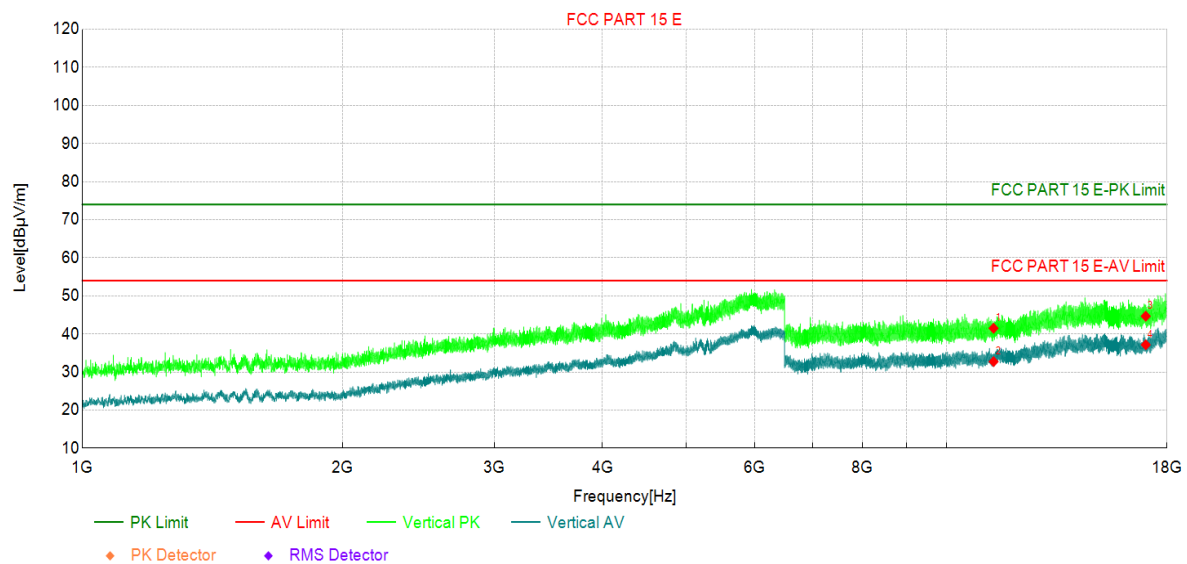

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	33.69	41.49	7.80	74.00	32.51	PK	Vertic	PASS
2	11340	24.94	32.74	7.80	54.00	21.26	AV	Vertic	PASS
3	17010	28.82	44.66	15.84	74.00	29.34	PK	Vertic	PASS
4	17010	21.31	37.15	15.84	54.00	16.85	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5755MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

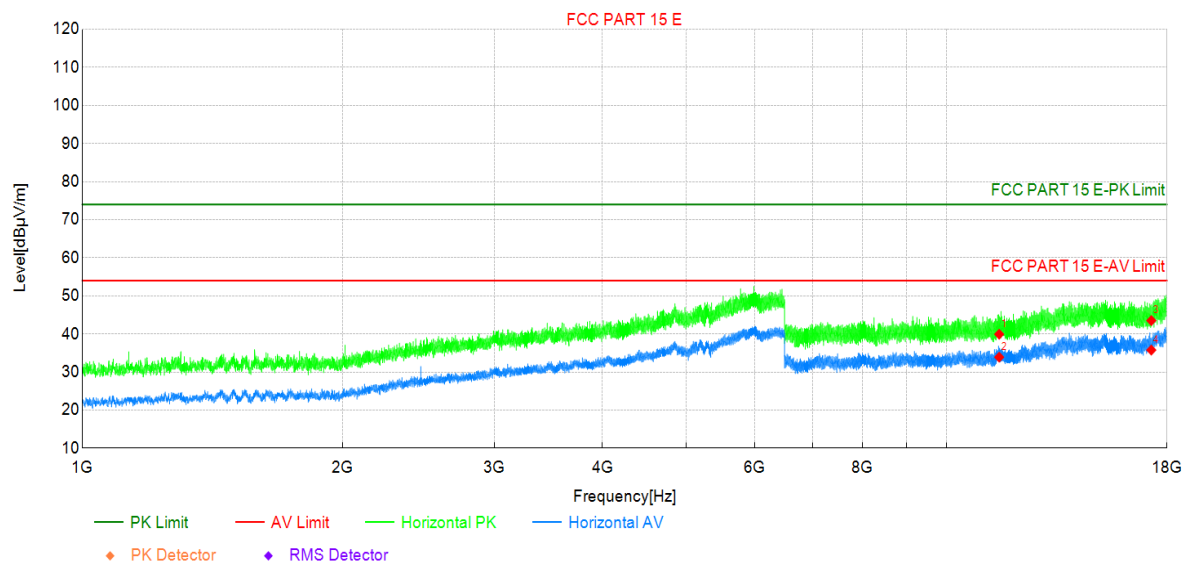

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	31.52	39.92	8.40	74.00	34.08	PK	Horizo	PASS
2	11510	25.50	33.90	8.40	54.00	20.10	AV	Horizo	PASS
3	17265	28.28	43.52	15.24	74.00	30.48	PK	Horizo	PASS
4	17265	20.53	35.77	15.24	54.00	18.23	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5755MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

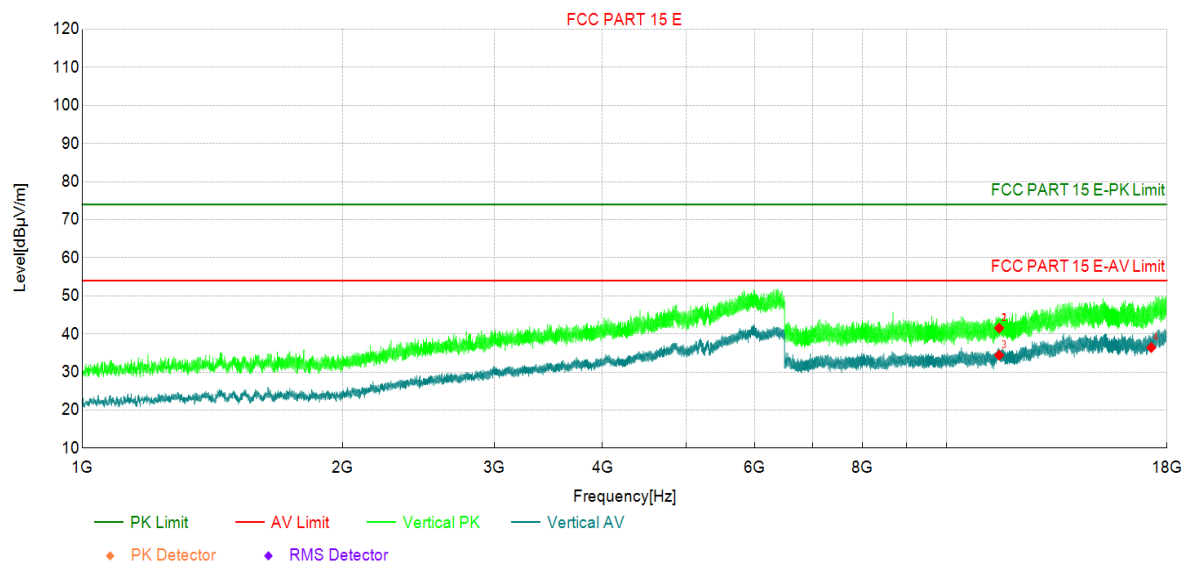


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	33.14	41.54	8.40	74.00	32.46	PK	Vertic	PASS
2	11510	33.14	41.54	8.40	74.00	32.46	PK	Vertic	PASS
3	11510	26.02	34.42	8.40	54.00	19.58	AV	Vertic	PASS
4	17265	21.19	36.43	15.24	54.00	17.57	AV	Vertic	PASS

Note:(1)Level=Reading+Factor


(2)Margin=Limit-Level

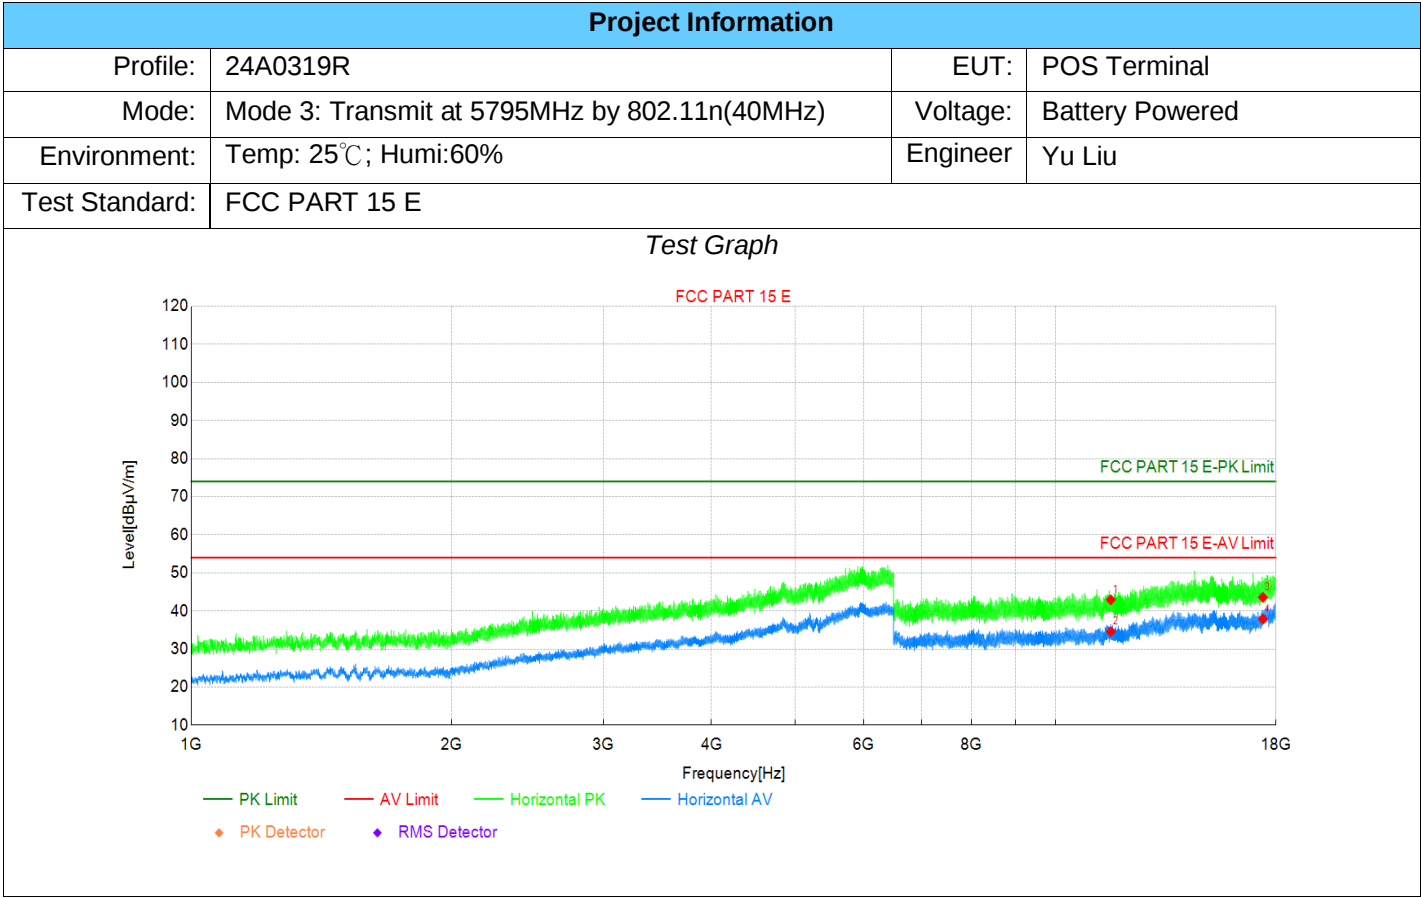

Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	34.29	42.93	8.64	74.00	31.07	PK	Horizo	PASS
2	11590	25.93	34.57	8.64	54.00	19.43	AV	Horizo	PASS
3	17385	27.28	43.56	16.28	74.00	30.44	PK	Horizo	PASS
4	17385	21.60	37.88	16.28	54.00	16.12	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Project Information			
Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 3: Transmit at 5795MHz by 802.11n(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25℃; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

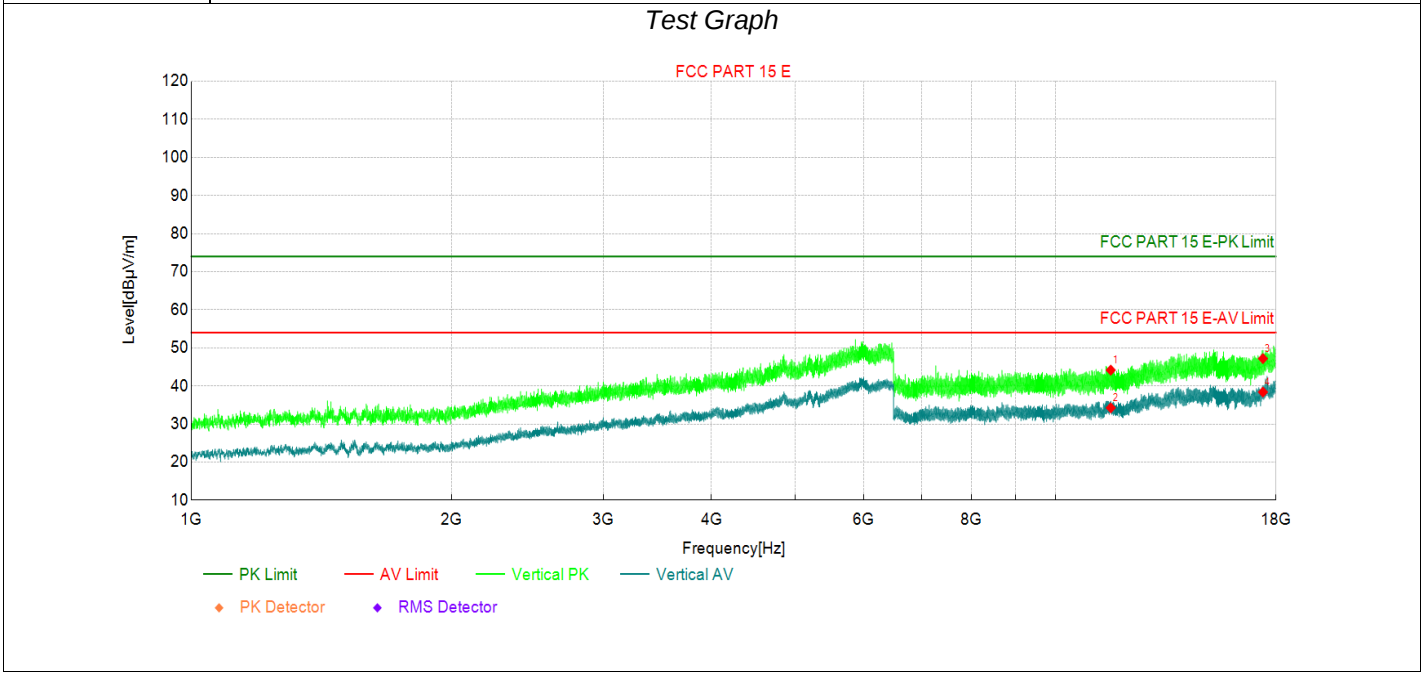


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	35.51	44.15	8.64	74.00	29.85	PK	Vertic	PASS
2	11590	25.60	34.24	8.64	54.00	19.76	AV	Vertic	PASS
3	17385	30.90	47.18	16.28	74.00	26.82	PK	Vertic	PASS
4	17385	22.11	38.39	16.28	54.00	15.61	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5180MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

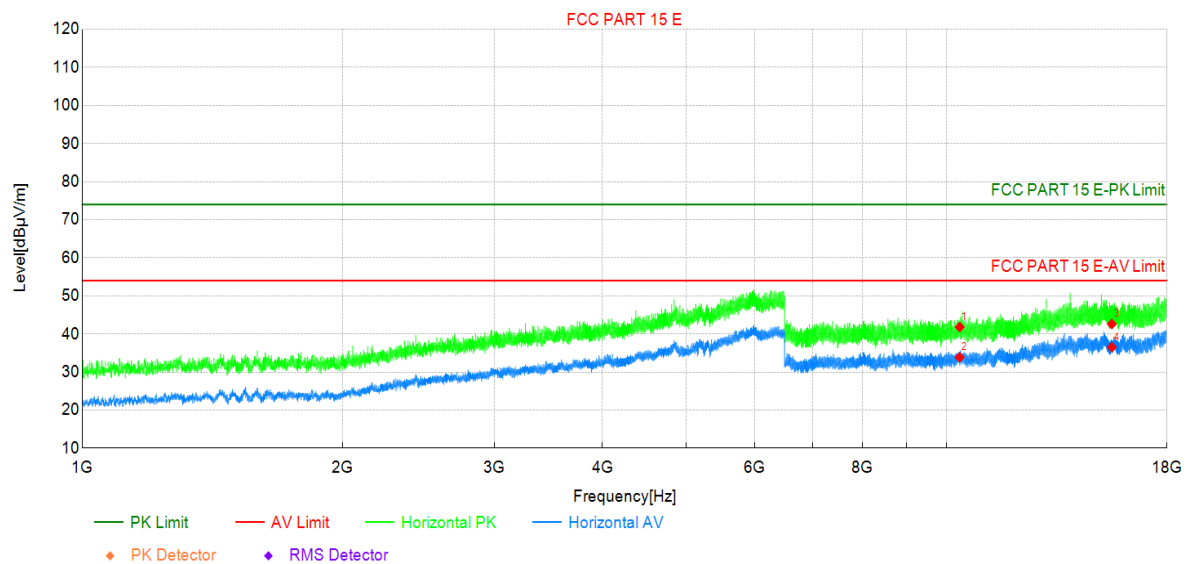

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	35.52	41.82	6.30	74.00	32.18	PK	Horizo	PASS
2	10360	27.56	33.86	6.30	54.00	20.14	AV	Horizo	PASS
3	15540	29.10	42.62	13.52	74.00	31.38	PK	Horizo	PASS
4	15540	22.98	36.50	13.52	54.00	17.50	AV	Horizo	PASS


Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5180MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

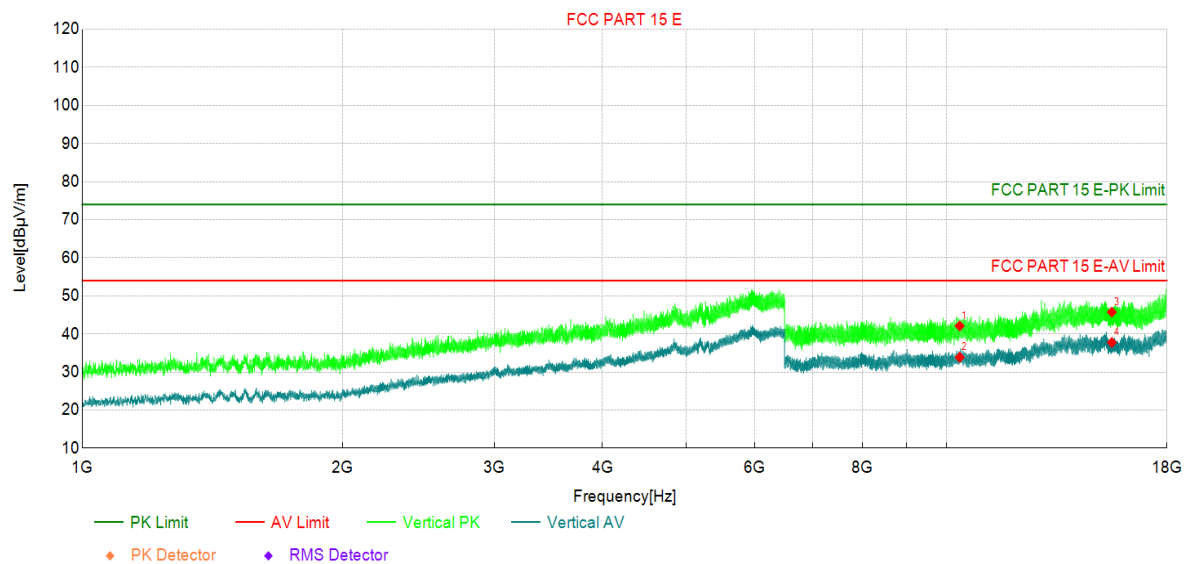

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10360	35.79	42.09	6.30	74.00	31.91	PK	Vertic	PASS
2	10360	27.56	33.86	6.30	54.00	20.14	AV	Vertic	PASS
3	15540	32.21	45.73	13.52	74.00	28.27	PK	Vertic	PASS
4	15540	24.22	37.74	13.52	54.00	16.26	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5220MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

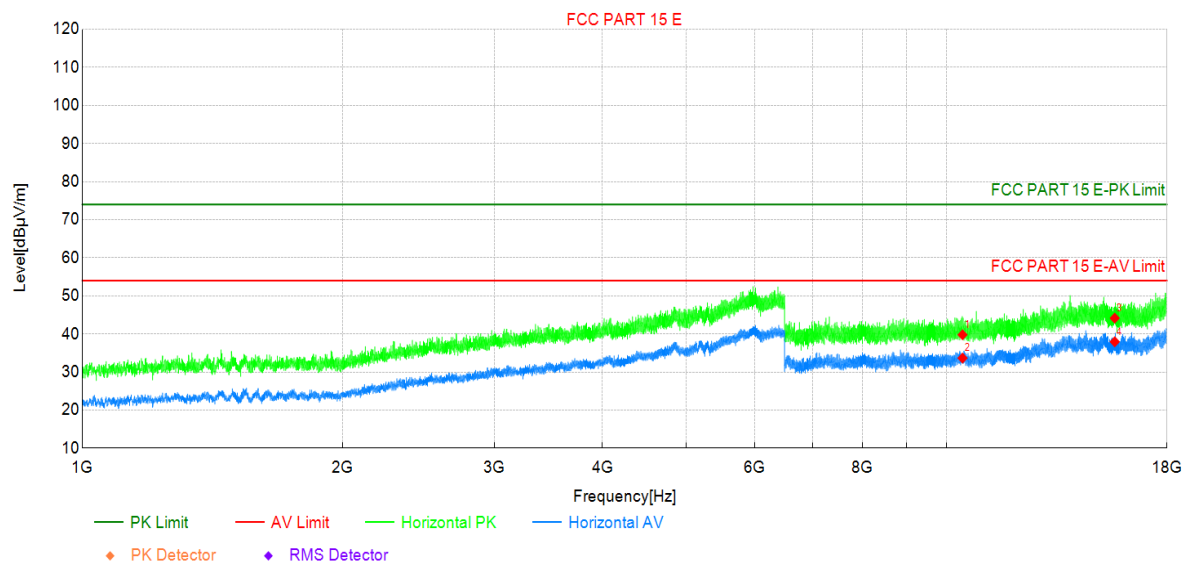

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	33.39	39.77	6.38	74.00	34.23	PK	Horizo	PASS
2	10440	27.27	33.65	6.38	54.00	20.35	AV	Horizo	PASS
3	15660	30.39	44.15	13.76	74.00	29.85	PK	Horizo	PASS
4	15660	24.19	37.95	13.76	54.00	16.05	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5220MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

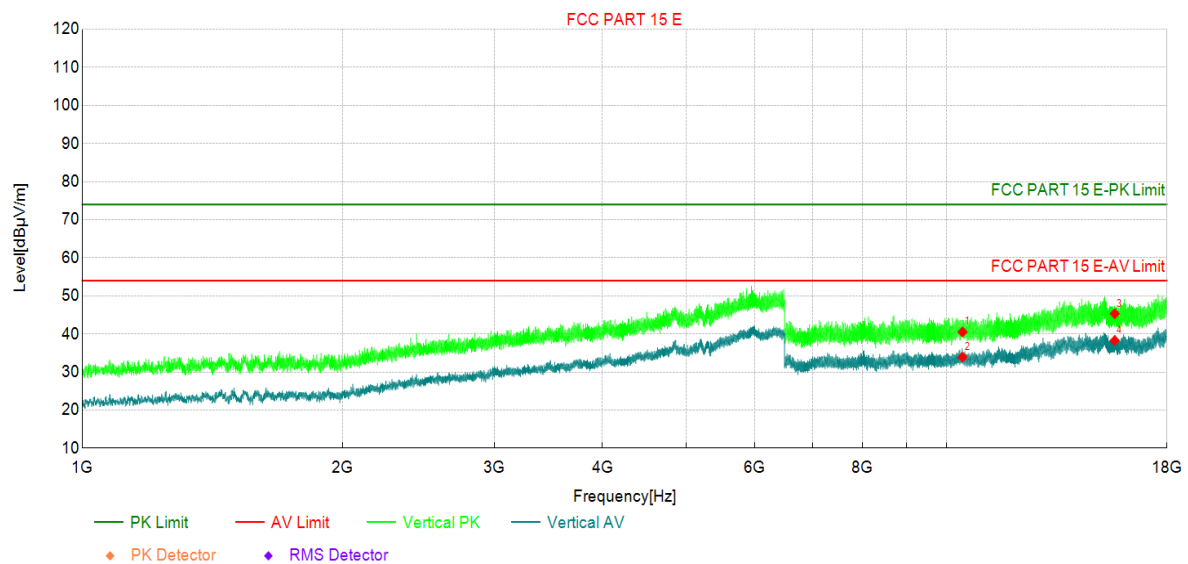

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10440	34.13	40.51	6.38	74.00	33.49	PK	Vertic	PASS
2	10440	27.55	33.93	6.38	54.00	20.07	AV	Vertic	PASS
3	15660	31.55	45.31	13.76	74.00	28.69	PK	Vertic	PASS
4	15660	24.51	38.27	13.76	54.00	15.73	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5240MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

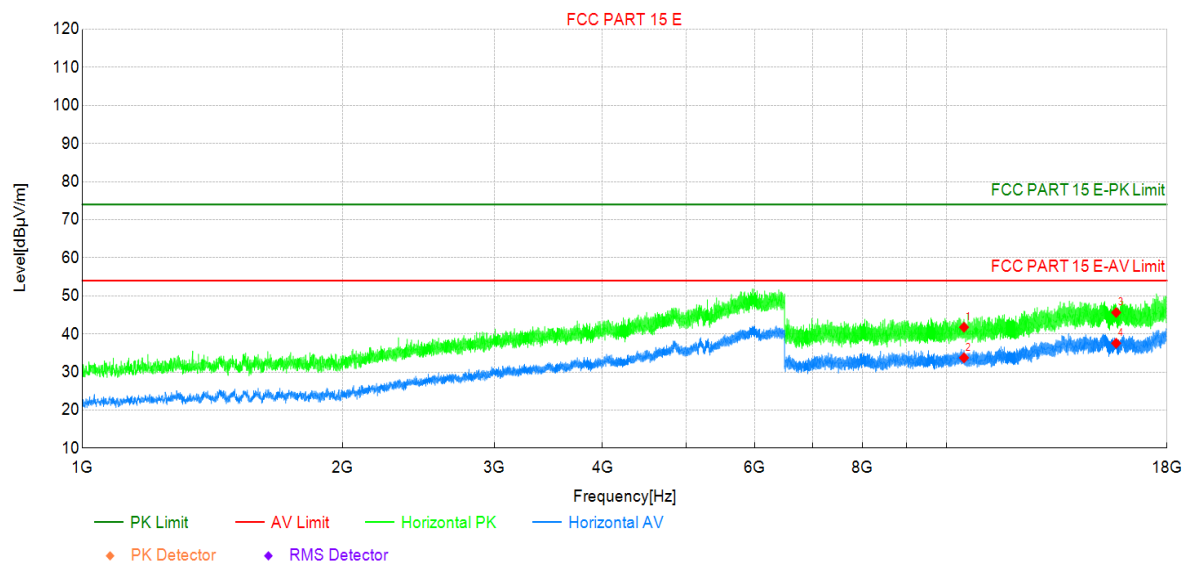

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	35.30	41.76	6.46	74.00	32.24	PK	Horizo	PASS
2	10480	27.28	33.74	6.46	54.00	20.26	AV	Horizo	PASS
3	15720	31.54	45.62	14.08	74.00	28.38	PK	Horizo	PASS
4	15720	23.48	37.56	14.08	54.00	16.44	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5240MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

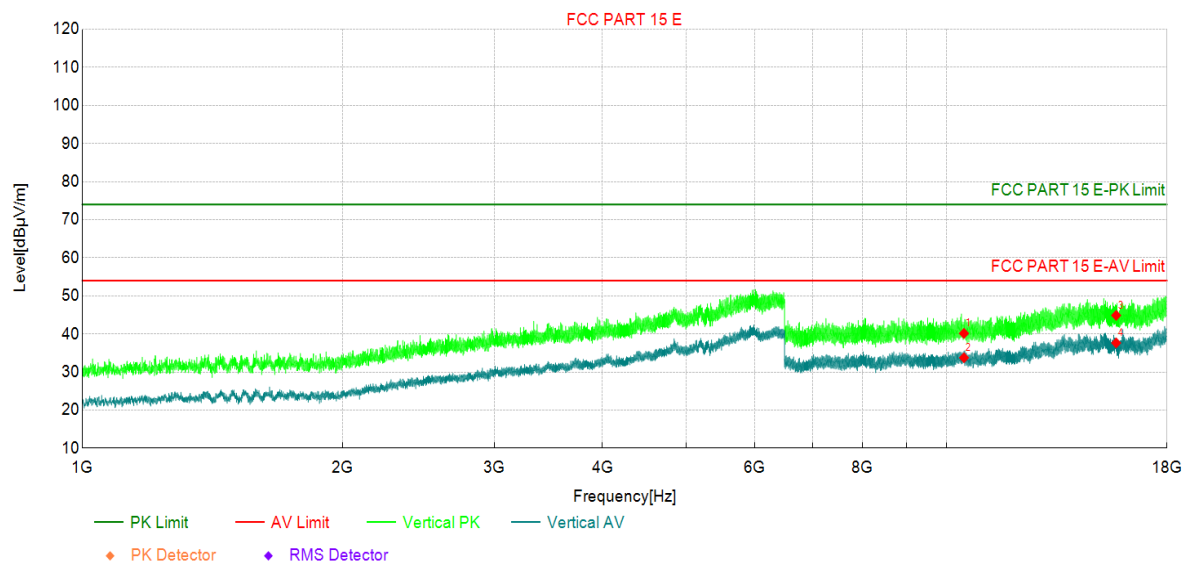

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10480	33.68	40.14	6.46	74.00	33.86	PK	Vertic	PASS
2	10480	27.30	33.76	6.46	54.00	20.24	AV	Vertic	PASS
3	15720	30.79	44.87	14.08	74.00	29.13	PK	Vertic	PASS
4	15720	23.57	37.65	14.08	54.00	16.35	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5260MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

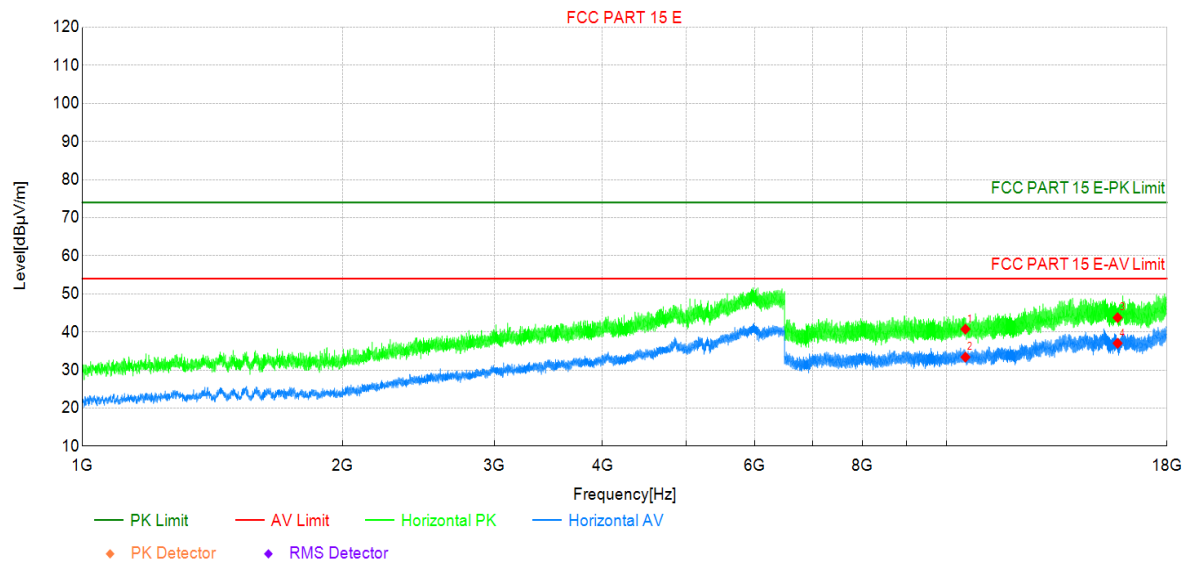

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	34.21	40.73	6.52	74.00	33.27	PK	Horizo	PASS
2	10520	26.87	33.39	6.52	54.00	20.61	AV	Horizo	PASS
3	15780	29.98	43.75	13.77	74.00	30.25	PK	Horizo	PASS
4	15780	23.26	37.03	13.77	54.00	16.97	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5260MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

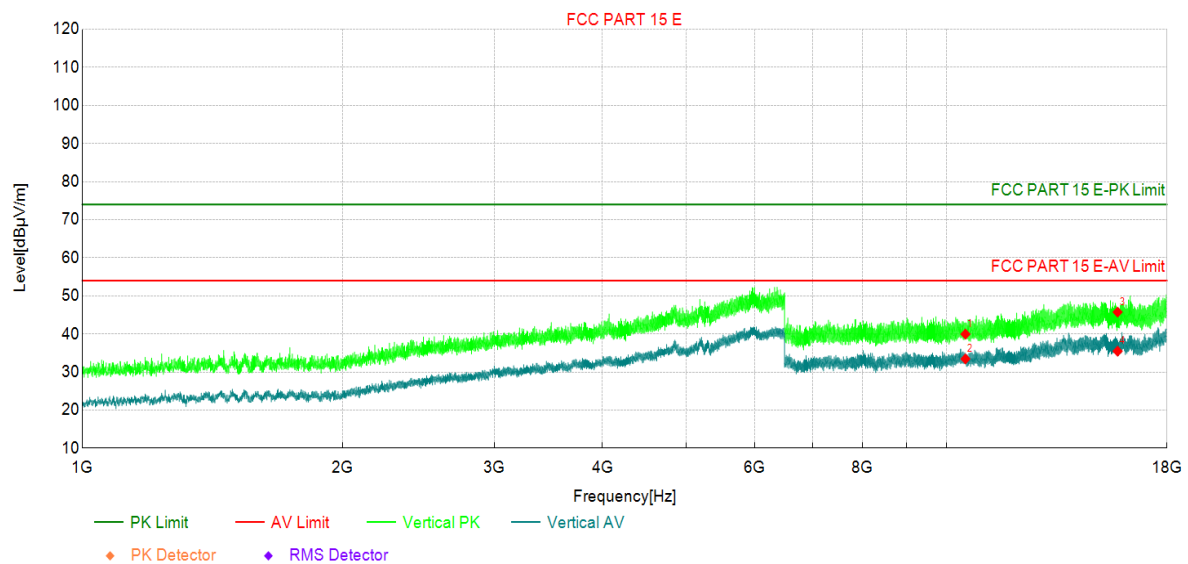

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10520	33.43	39.95	6.52	74.00	34.05	PK	Vertic	PASS
2	10520	26.93	33.45	6.52	54.00	20.55	AV	Vertic	PASS
3	15780	31.97	45.74	13.77	74.00	28.26	PK	Vertic	PASS
4	15780	21.70	35.47	13.77	54.00	18.53	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5300MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

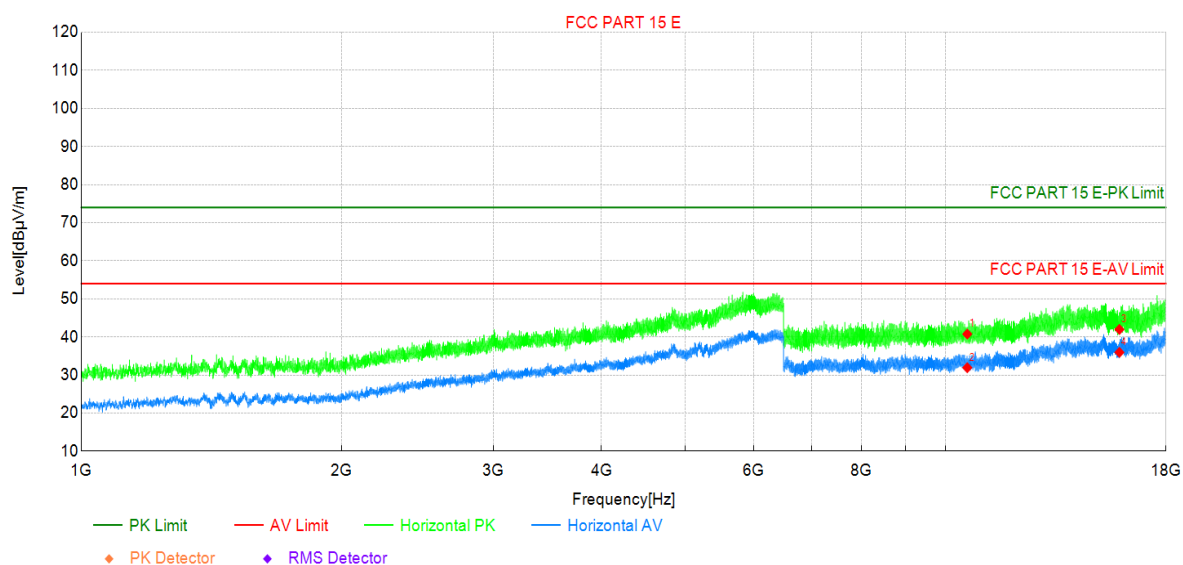

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	34.20	40.76	6.56	74.00	33.24	PK	Horizo	PASS
2	10600	25.37	31.93	6.56	54.00	22.07	AV	Horizo	PASS
3	15900	28.14	41.97	13.83	74.00	32.03	PK	Horizo	PASS
4	15900	22.12	35.95	13.83	54.00	18.05	AV	Horizo	PASS


Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5300MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

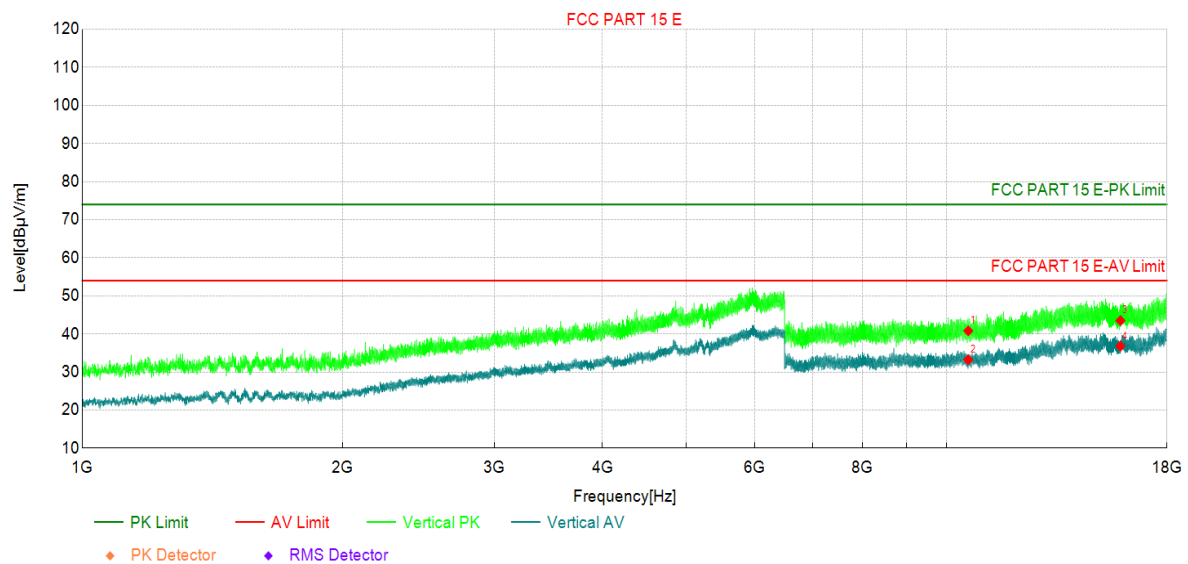

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10600	34.26	40.82	6.56	74.00	33.18	PK	Vertic	PASS
2	10600	26.66	33.22	6.56	54.00	20.78	AV	Vertic	PASS
3	15900	29.68	43.51	13.83	74.00	30.49	PK	Vertic	PASS
4	15900	22.98	36.81	13.83	54.00	17.19	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5320MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

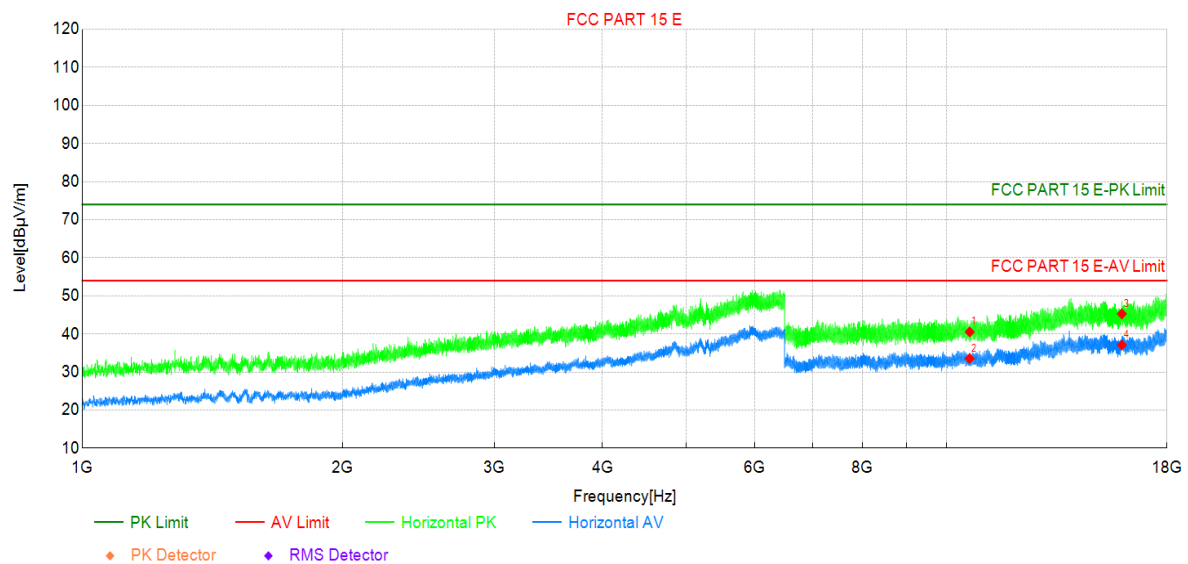

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	33.94	40.53	6.59	74.00	33.47	PK	Horizo	PASS
2	10640	26.94	33.53	6.59	54.00	20.47	AV	Horizo	PASS
3	15960	30.93	45.27	14.34	74.00	28.73	PK	Horizo	PASS
4	15960	22.75	37.09	14.34	54.00	16.91	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5320MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

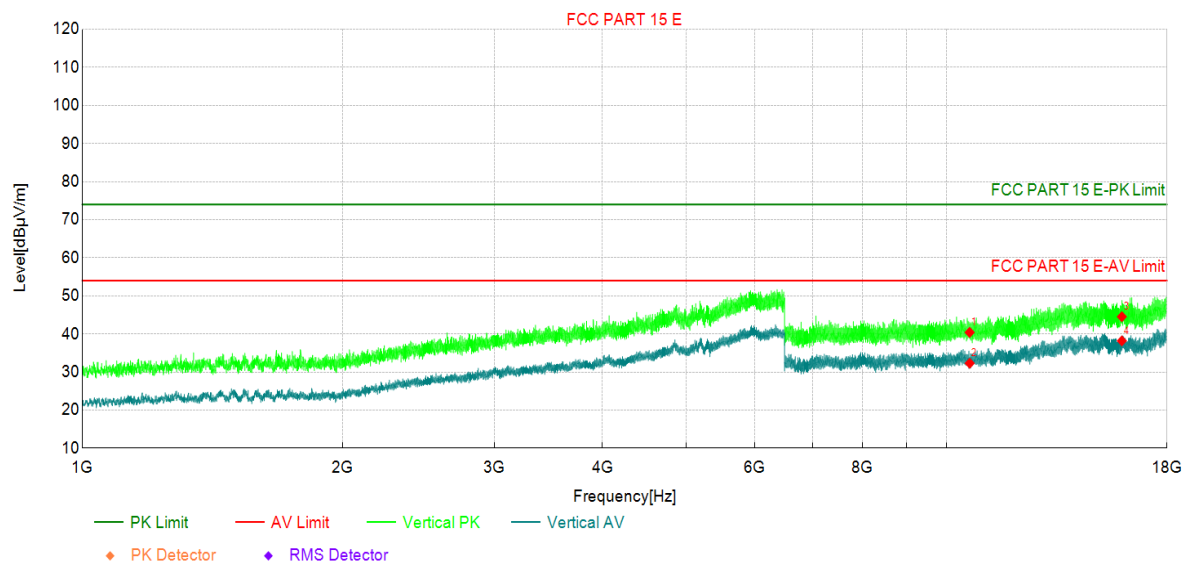

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10640	33.82	40.41	6.59	74.00	33.59	PK	Vertic	PASS
2	10640	25.71	32.30	6.59	54.00	21.70	AV	Vertic	PASS
3	15960	30.18	44.52	14.34	74.00	29.48	PK	Vertic	PASS
4	15960	23.85	38.19	14.34	54.00	15.81	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5500MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

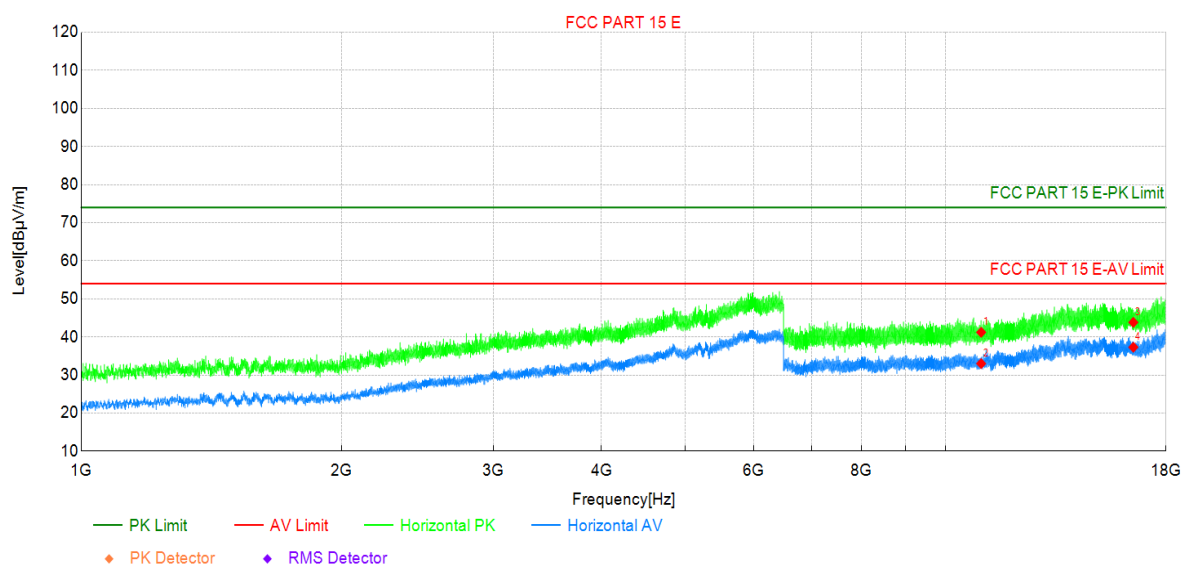

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	33.97	41.23	7.26	74.00	32.77	PK	Horizo	PASS
2	11000	25.74	33.00	7.26	54.00	21.00	AV	Horizo	PASS
3	16500	28.92	43.83	14.91	74.00	30.17	PK	Horizo	PASS
4	16500	22.39	37.30	14.91	54.00	16.70	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5500MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

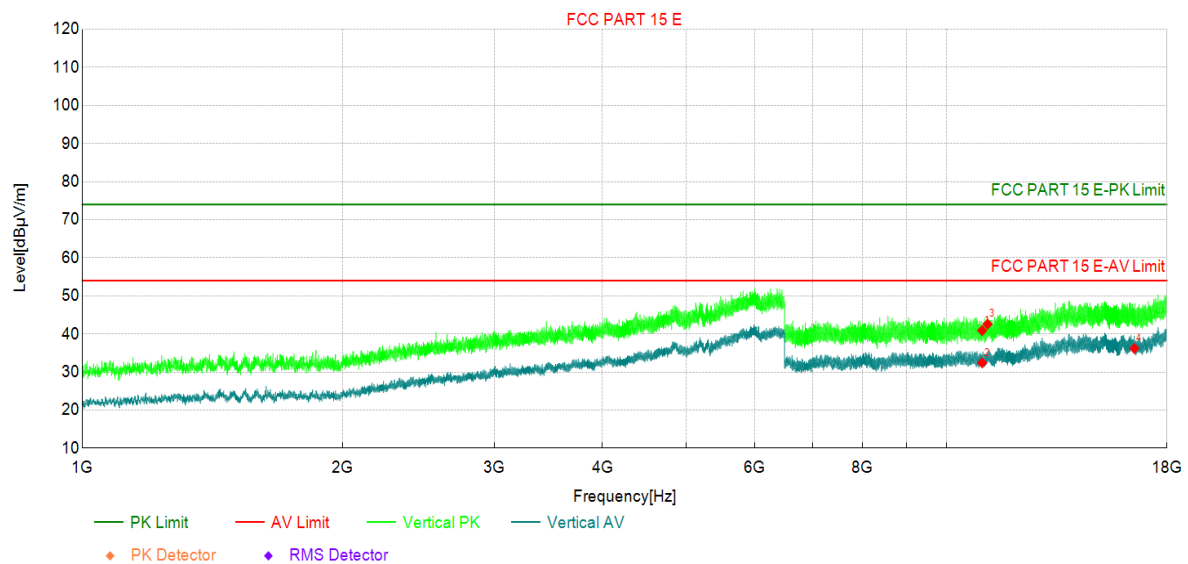

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11000	33.63	40.89	7.26	74.00	33.11	PK	Vertic	PASS
2	11000	25.14	32.40	7.26	54.00	21.60	AV	Vertic	PASS
3	11160	35.40	42.58	7.18	74.00	31.42	PK	Vertic	PASS
4	16500	21.27	36.18	14.91	54.00	17.82	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5580MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

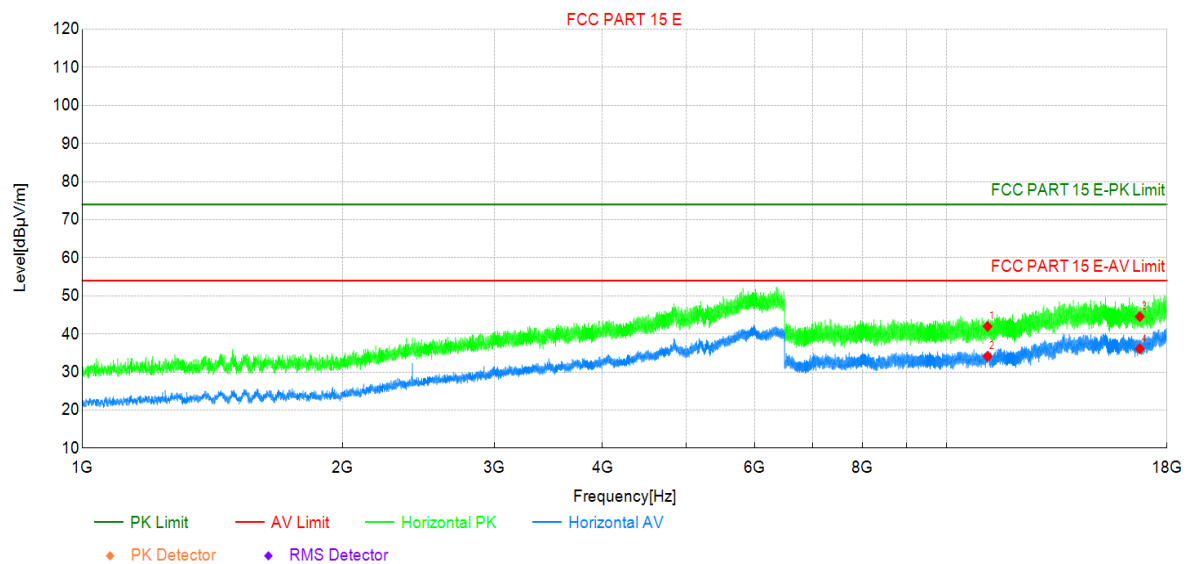

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	34.79	41.97	7.18	74.00	32.03	PK	Horizo	PASS
2	11160	26.93	34.11	7.18	54.00	19.89	AV	Horizo	PASS
3	16740	30.09	44.55	14.46	74.00	29.45	PK	Horizo	PASS
4	16740	21.66	36.12	14.46	54.00	17.88	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5580MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

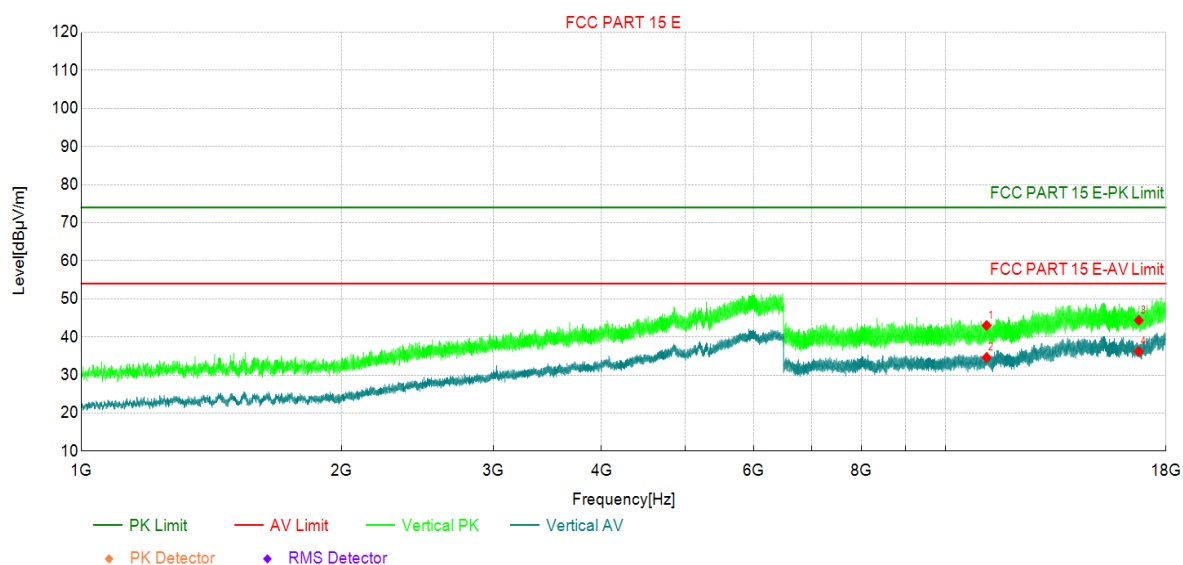

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11160	35.84	43.02	7.18	74.00	30.98	PK	Vertic	PASS
2	11160	27.43	34.61	7.18	54.00	19.39	AV	Vertic	PASS
3	16740	29.91	44.37	14.46	74.00	29.63	PK	Vertic	PASS
4	16740	21.73	36.19	14.46	54.00	17.81	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5700MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

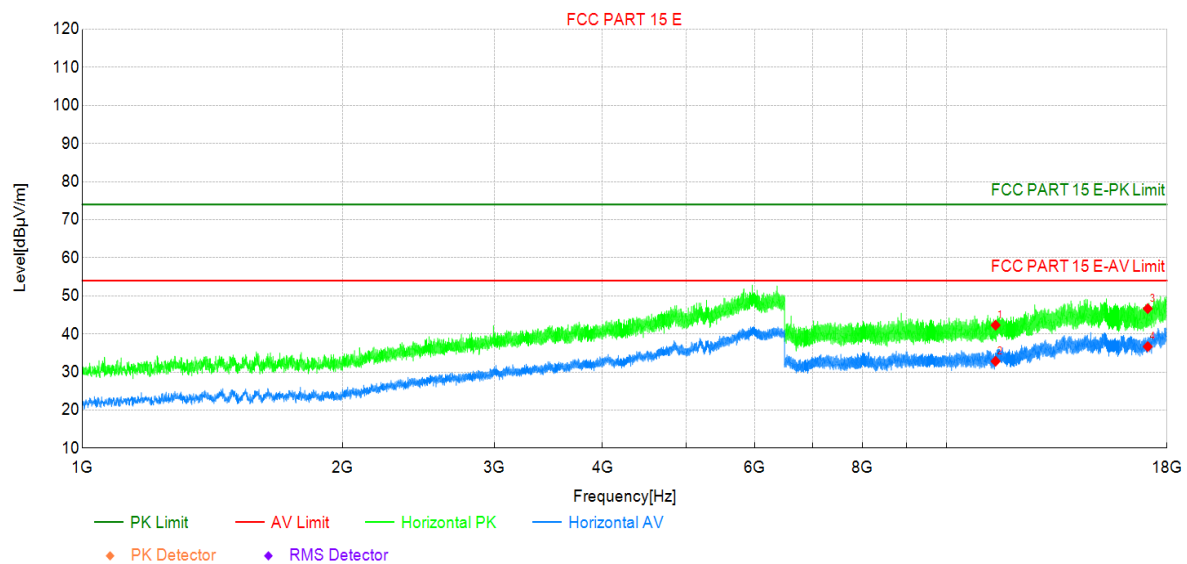

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	34.53	42.31	7.78	74.00	31.69	PK	Horizo	PASS
2	11400	25.04	32.82	7.78	54.00	21.18	AV	Horizo	PASS
3	17100	31.06	46.65	15.59	74.00	27.35	PK	Horizo	PASS
4	17100	21.09	36.68	15.59	54.00	17.32	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5700MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

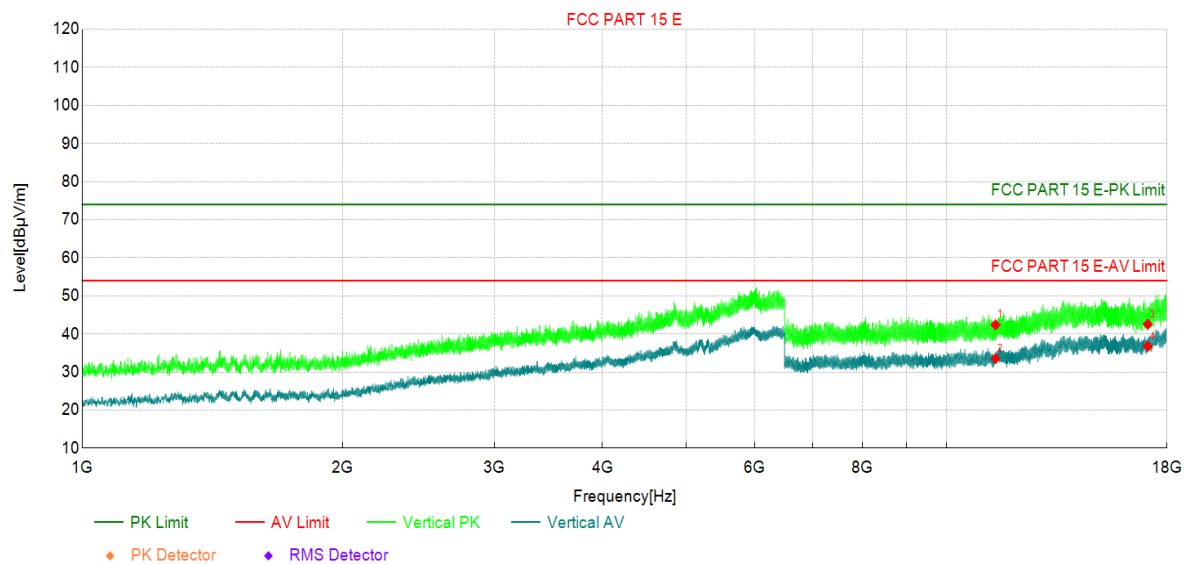

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11400	34.59	42.37	7.78	74.00	31.63	PK	Vertic	PASS
2	11400	25.75	33.53	7.78	54.00	20.47	AV	Vertic	PASS
3	17100	26.96	42.55	15.59	74.00	31.45	PK	Vertic	PASS
4	17100	21.16	36.75	15.59	54.00	17.25	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5745MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

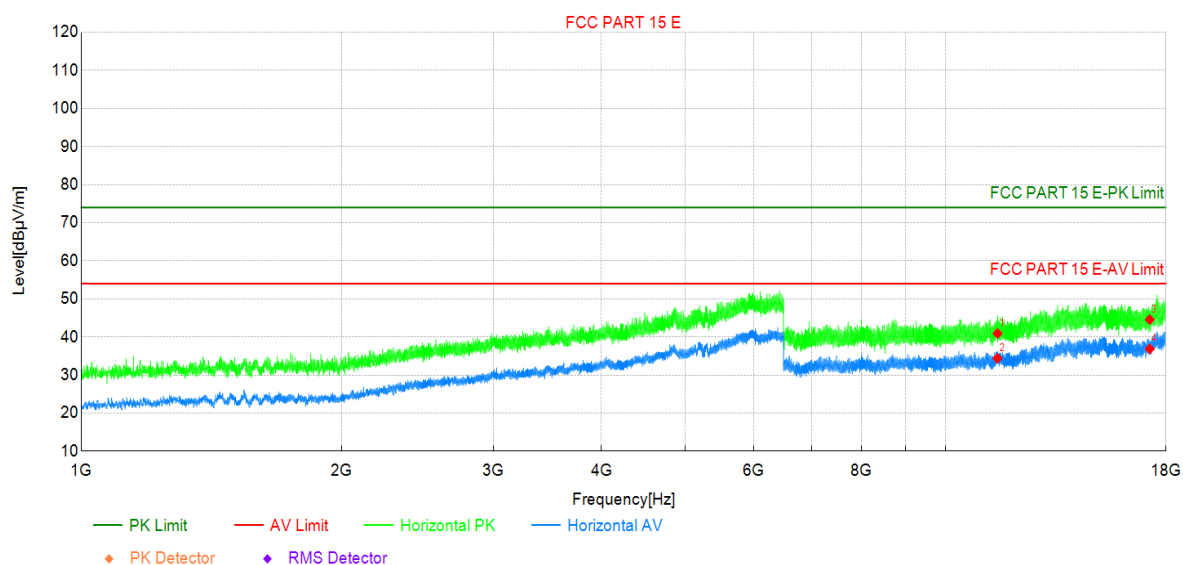

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11490	32.60	40.91	8.31	74.00	33.09	PK	Horizo	PASS
2	11490	26.08	34.39	8.31	54.00	19.61	AV	Horizo	PASS
3	17235	29.36	44.56	15.20	74.00	29.44	PK	Horizo	PASS
4	17235	21.66	36.86	15.20	54.00	17.14	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5745MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

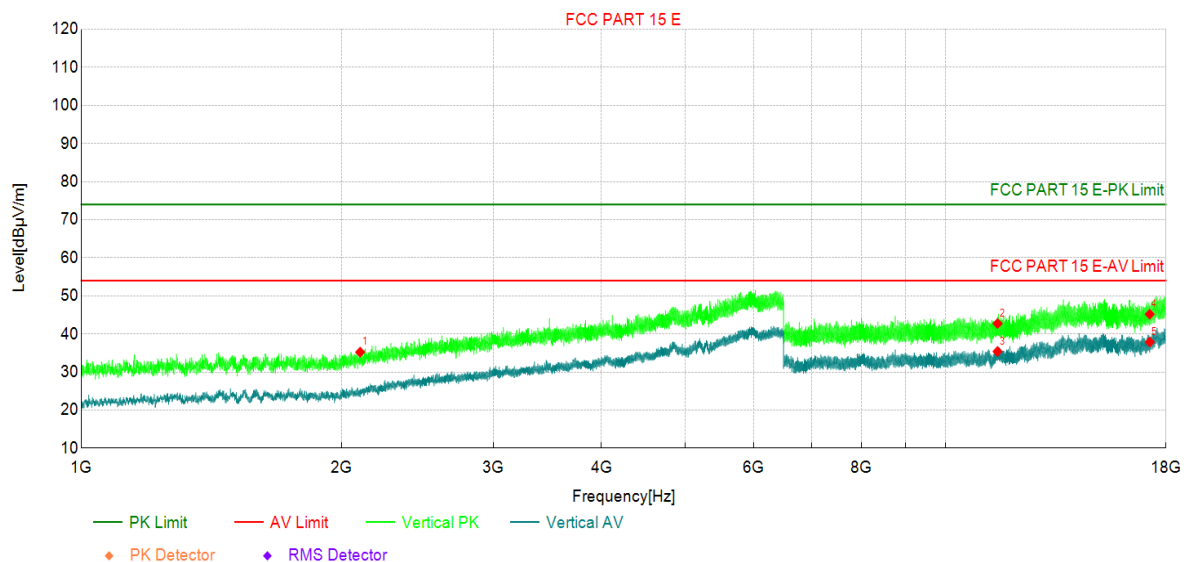

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	2103	32.09	35.22	3.13	74.00	38.78	PK	Vertic	PASS
2	11490	34.42	42.73	8.31	74.00	31.27	PK	Vertic	PASS
3	11490	27.08	35.39	8.31	54.00	18.61	AV	Vertic	PASS
4	17235	29.98	45.18	15.20	74.00	28.82	PK	Vertic	PASS
5	17235	22.68	37.88	15.20	54.00	16.12	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5785MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

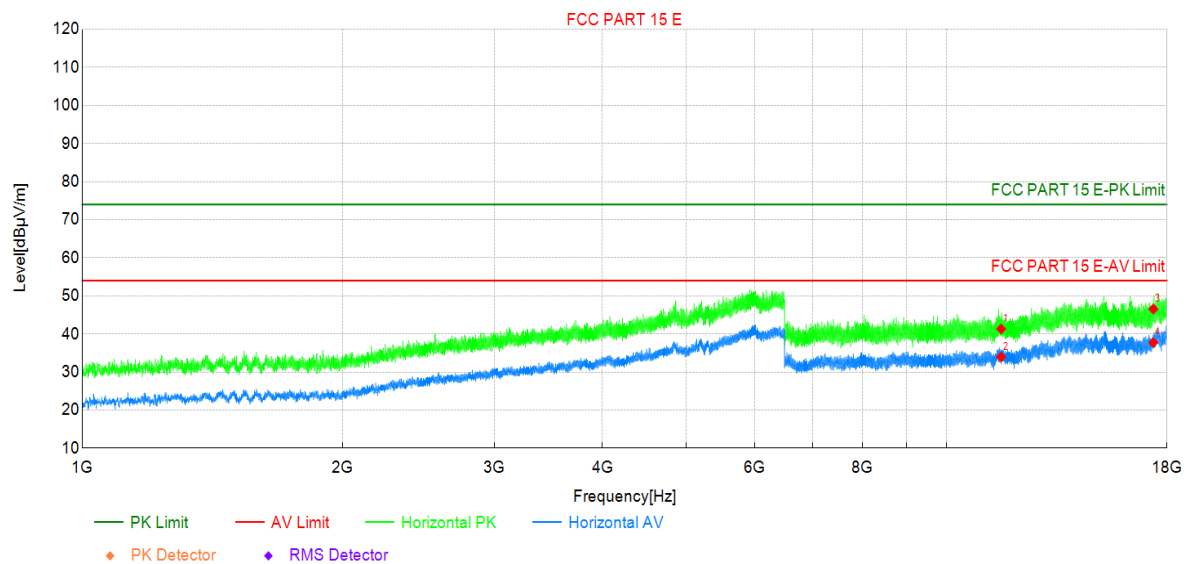

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	32.74	41.33	8.59	74.00	32.67	PK	Horizo	PASS
2	11570	25.35	33.94	8.59	54.00	20.06	AV	Horizo	PASS
3	17355	30.61	46.54	15.93	74.00	27.46	PK	Horizo	PASS
4	17355	21.81	37.74	15.93	54.00	16.26	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5785MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

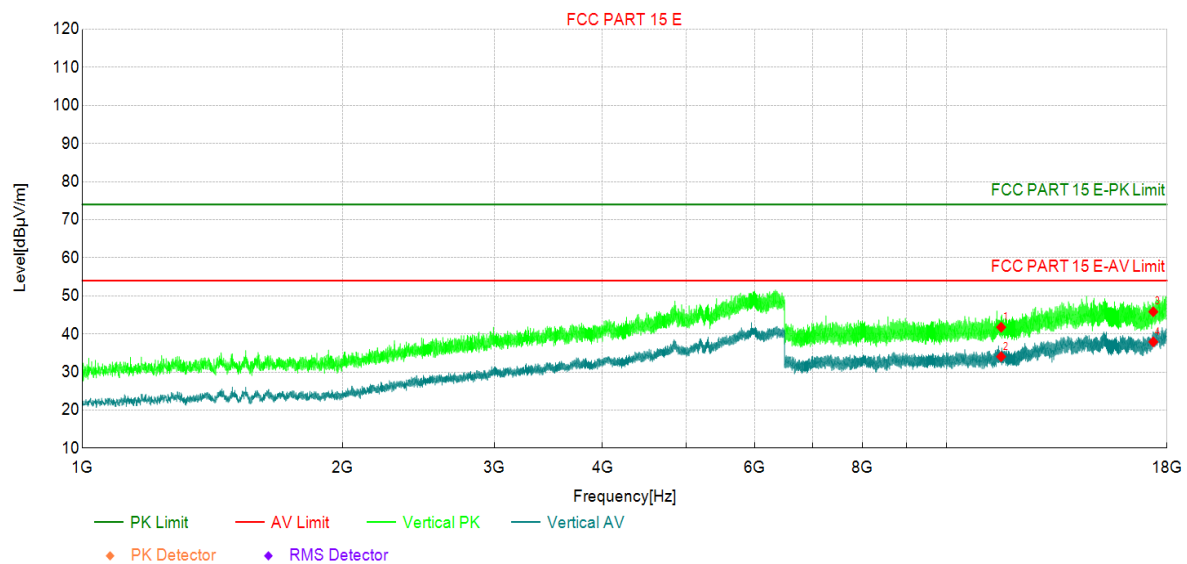


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11570	33.17	41.76	8.59	74.00	32.24	PK	Vertic	PASS
2	11570	25.45	34.04	8.59	54.00	19.96	AV	Vertic	PASS
3	17355	29.90	45.83	15.93	74.00	28.17	PK	Vertic	PASS
4	17355	21.99	37.92	15.93	54.00	16.08	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

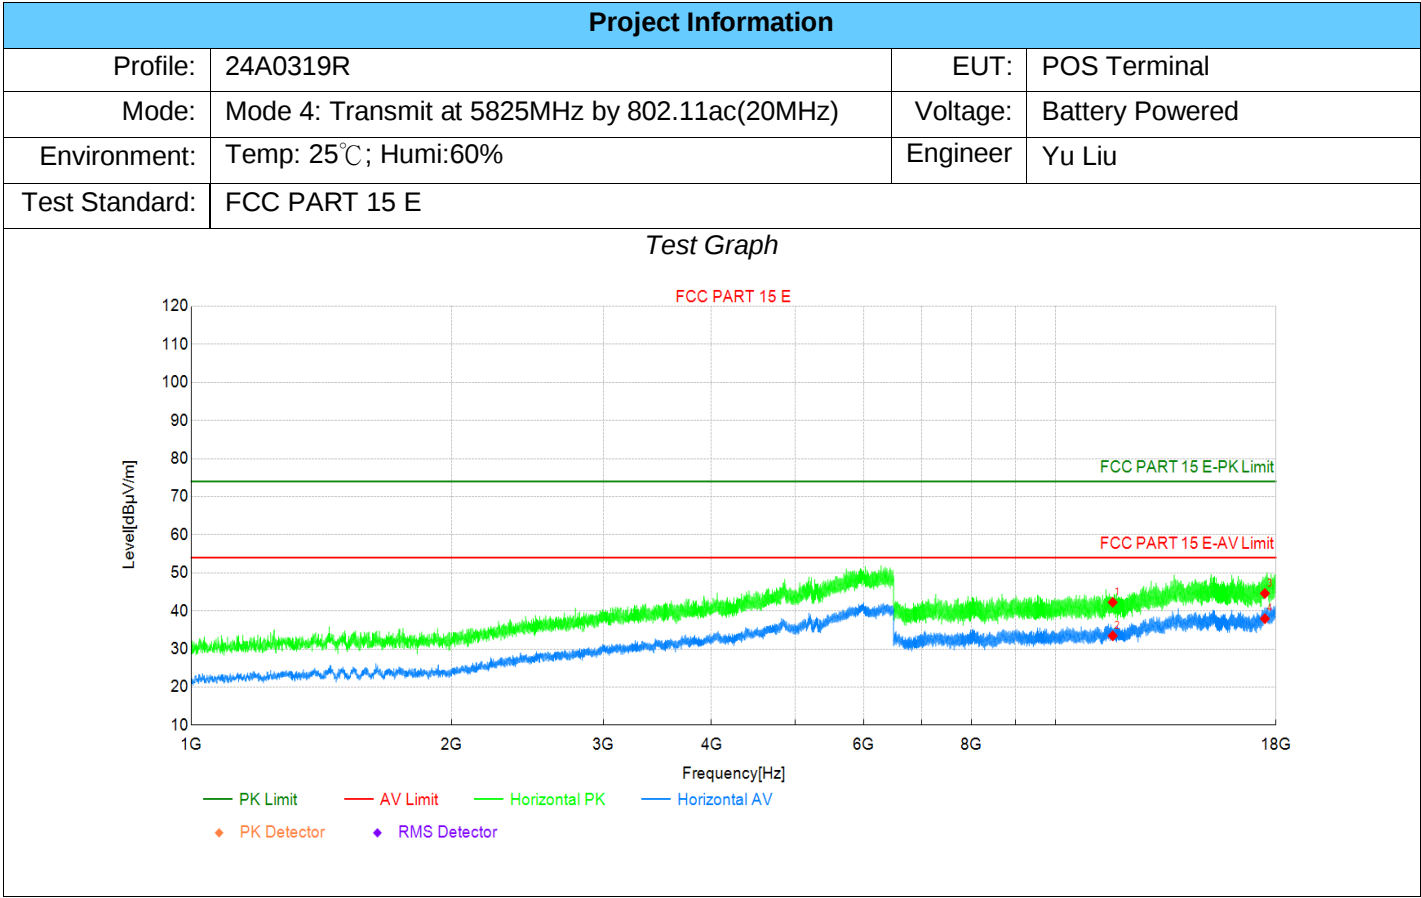


Suspected Data List									
NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	33.65	42.27	8.62	74.00	31.73	PK	Horizo	PASS
2	11650	24.84	33.46	8.62	54.00	20.54	AV	Horizo	PASS
3	17475	27.78	44.60	16.82	74.00	29.40	PK	Horizo	PASS
4	17475	21.15	37.97	16.82	54.00	16.03	AV	Horizo	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 4: Transmit at 5825MHz by 802.11ac(20MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

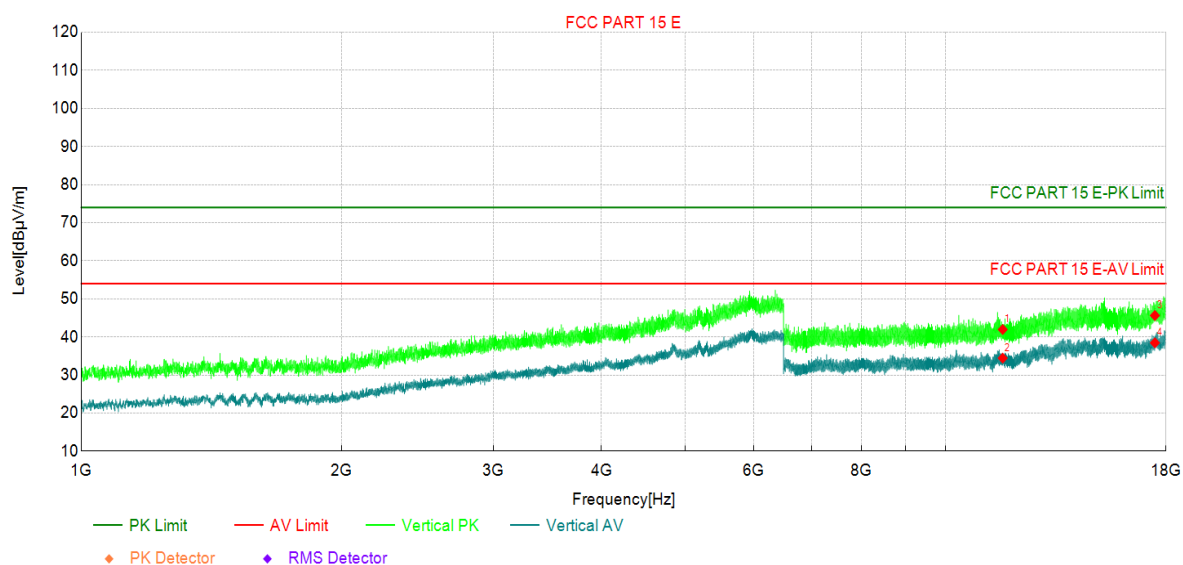

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11650	33.33	41.95	8.62	74.00	32.05	PK	Vertic	PASS
2	11650	25.81	34.43	8.62	54.00	19.57	AV	Vertic	PASS
3	17475	28.81	45.63	16.82	74.00	28.37	PK	Vertic	PASS
4	17475	21.63	38.45	16.82	54.00	15.55	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5190MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

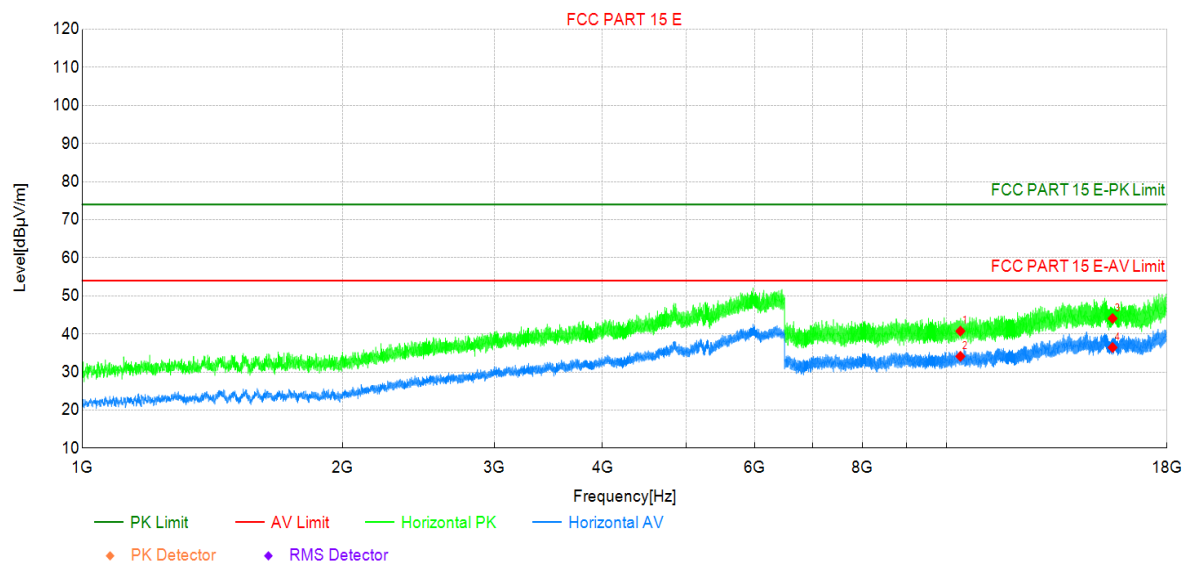

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380	34.45	40.75	6.30	74.00	33.25	PK	Horizo	PASS
2	10380	27.82	34.12	6.30	54.00	19.88	AV	Horizo	PASS
3	15570	30.73	44.06	13.33	74.00	29.94	PK	Horizo	PASS
4	15570	23.11	36.44	13.33	54.00	17.56	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5190MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

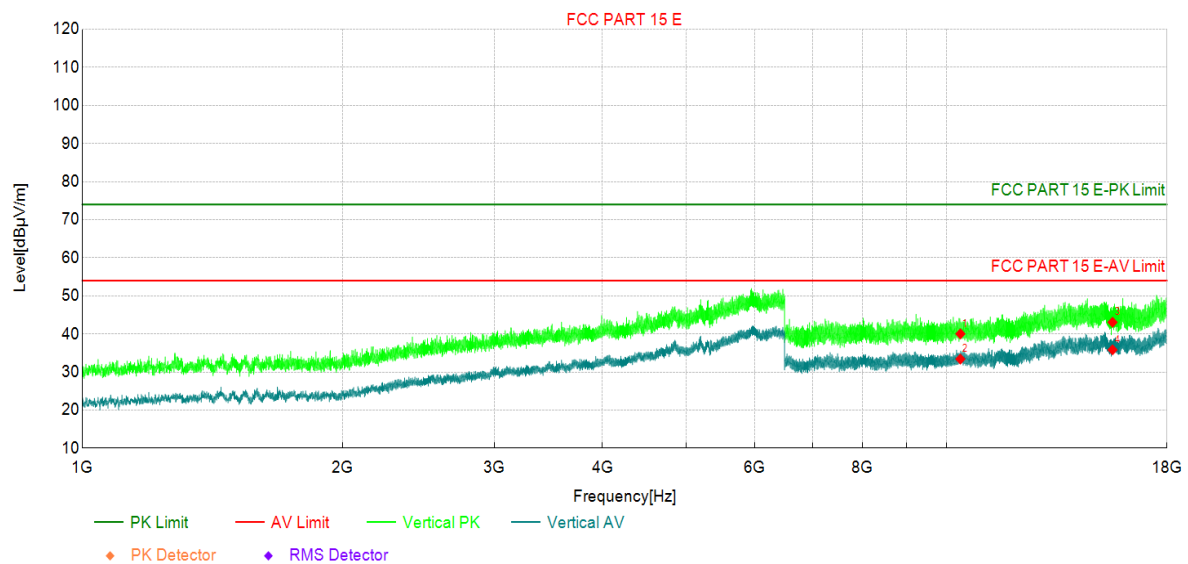

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10380	33.72	40.02	6.30	74.00	33.98	PK	Vertic	PASS
2	10380	27.11	33.41	6.30	54.00	20.59	AV	Vertic	PASS
3	15570	29.74	43.07	13.33	74.00	30.93	PK	Vertic	PASS
4	15570	22.51	35.84	13.33	54.00	18.16	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5230MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

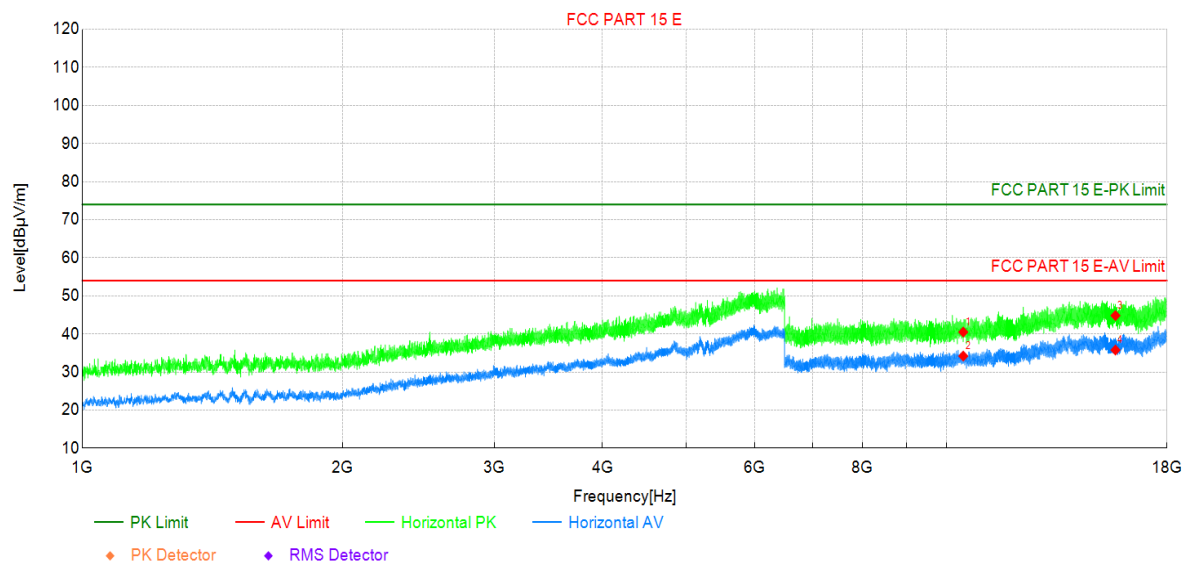


Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	34.08	40.50	6.42	74.00	33.50	PK	Horizo	PASS
2	10460	27.76	34.18	6.42	54.00	19.82	AV	Horizo	PASS
3	15690	30.74	44.82	14.08	74.00	29.18	PK	Horizo	PASS
4	15690	21.69	35.77	14.08	54.00	18.23	AV	Horizo	PASS

Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

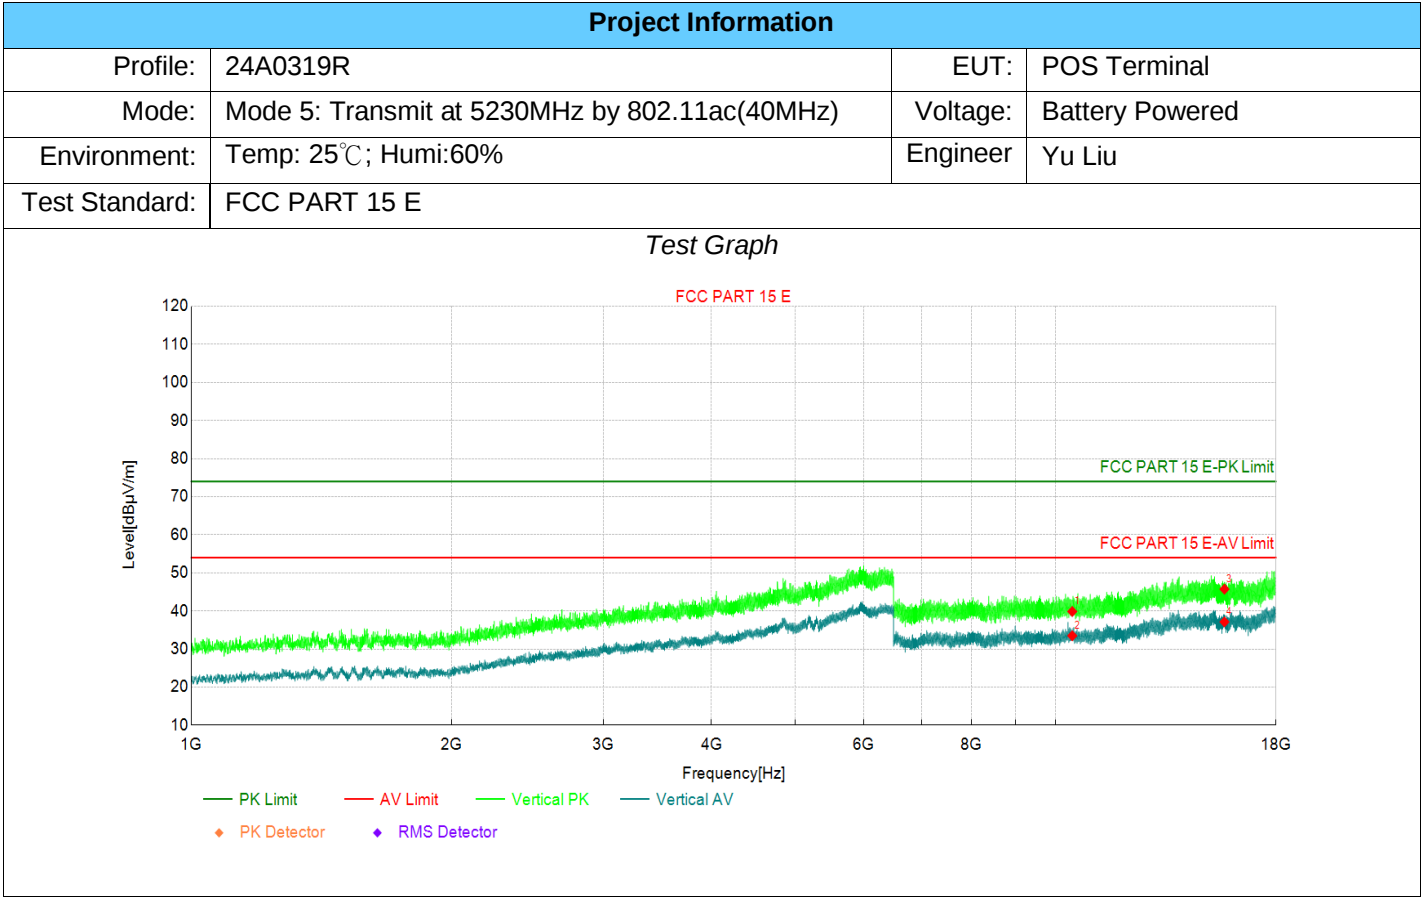


Suspected Data List									
NO	Frequency [MHz]	Reading [dBµV]	Level [dBµV/m]	Factor [dB/m]	Limit [dBµV/m]	Margin [dB]	Det	Pol	Verdict
1	10460	33.43	39.85	6.42	74.00	34.15	PK	Vertic	PASS
2	10460	27.06	33.48	6.42	54.00	20.52	AV	Vertic	PASS
3	15690	31.64	45.72	14.08	74.00	28.28	PK	Vertic	PASS
4	15690	23.05	37.13	14.08	54.00	16.87	AV	Vertic	PASS

Note:(1)Level=Reading+Factor
(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5270MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

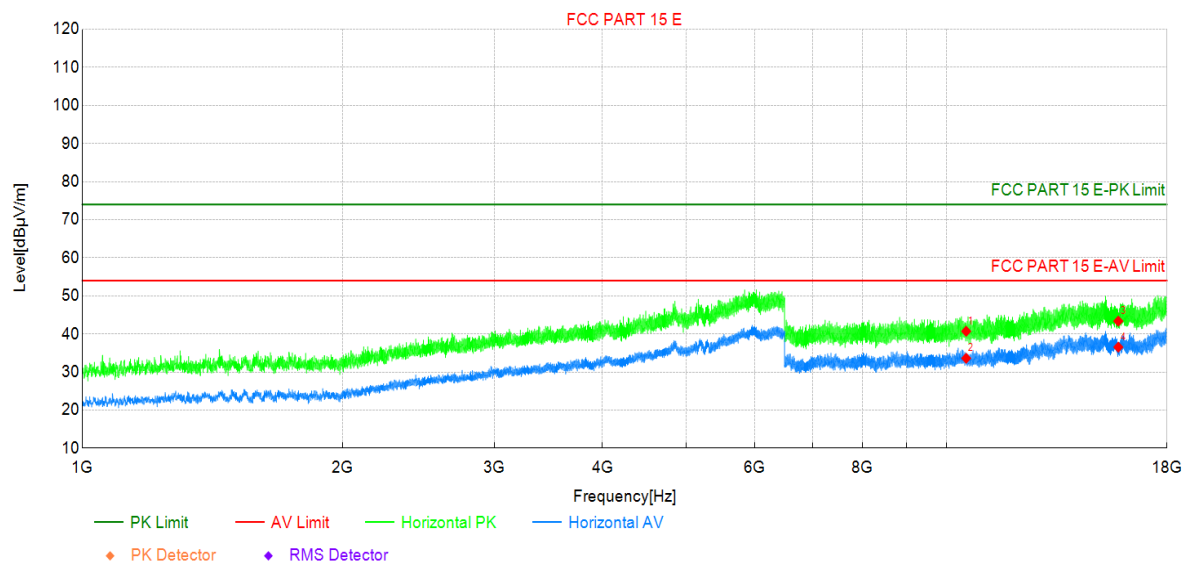

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	34.17	40.70	6.53	74.00	33.30	PK	Horizo	PASS
2	10540	27.08	33.61	6.53	54.00	20.39	AV	Horizo	PASS
3	15810	29.68	43.37	13.69	74.00	30.63	PK	Horizo	PASS
4	15810	22.85	36.54	13.69	54.00	17.46	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5270MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

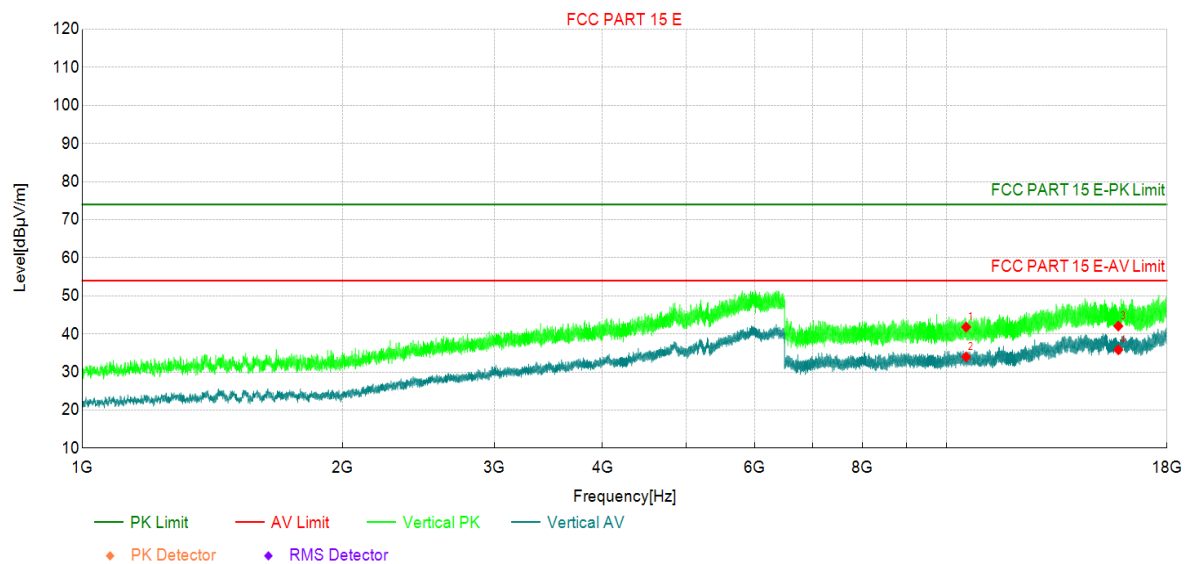

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10540	35.27	41.80	6.53	74.00	32.20	PK	Vertic	PASS
2	10540	27.45	33.98	6.53	54.00	20.02	AV	Vertic	PASS
3	15810	28.38	42.07	13.69	74.00	31.93	PK	Vertic	PASS
4	15810	22.14	35.83	13.69	54.00	18.17	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5310MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

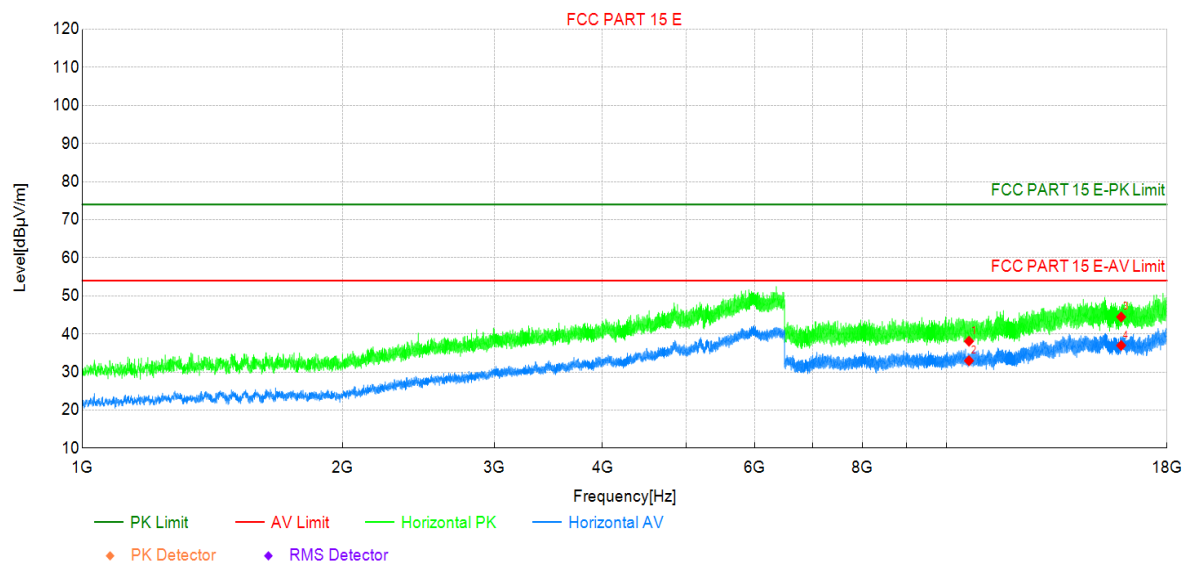

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	31.51	38.09	6.58	74.00	35.91	PK	Horizo	PASS
2	10620	26.38	32.96	6.58	54.00	21.04	AV	Horizo	PASS
3	15930	30.38	44.46	14.08	74.00	29.54	PK	Horizo	PASS
4	15930	22.89	36.97	14.08	54.00	17.03	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5310MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

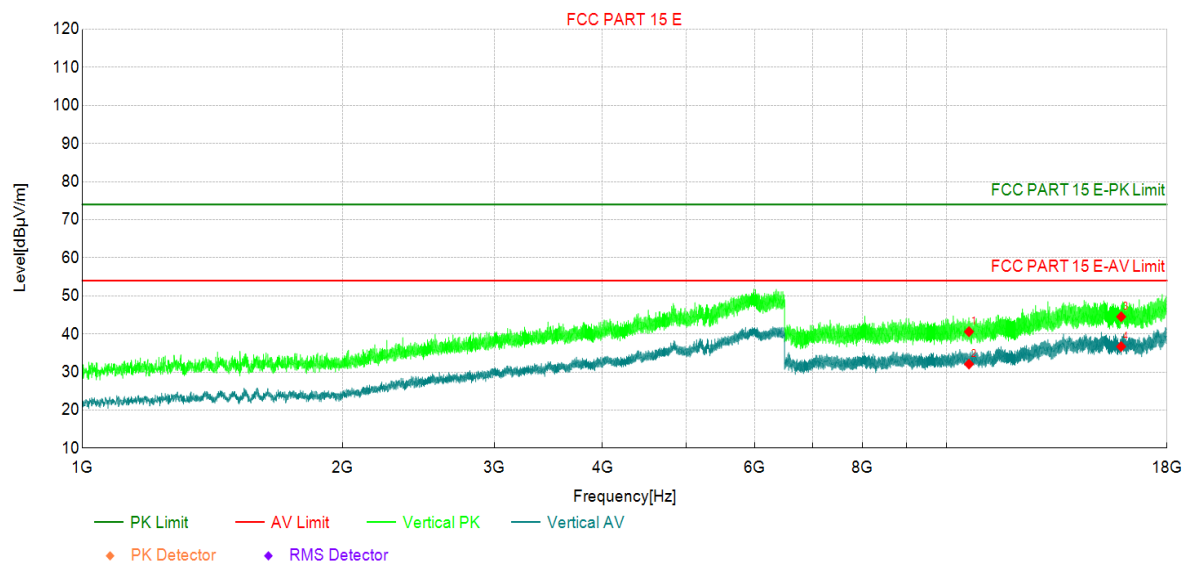

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	10620	34.02	40.60	6.58	74.00	33.40	PK	Vertic	PASS
2	10620	25.51	32.09	6.58	54.00	21.91	AV	Vertic	PASS
3	15930	30.44	44.52	14.08	74.00	29.48	PK	Vertic	PASS
4	15930	22.61	36.69	14.08	54.00	17.31	AV	Vertic	PASS


Note: (1) Level = Reading + Factor

(2) Margin = Limit - Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5510MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

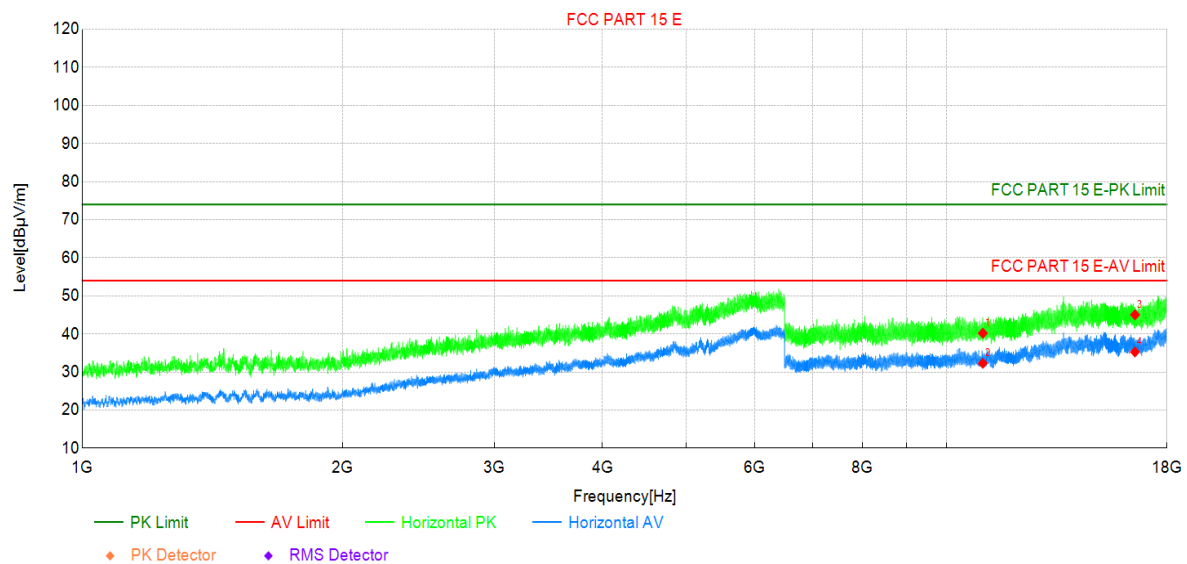

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	33.08	40.20	7.12	74.00	33.80	PK	Horizo	PASS
2	11020	25.16	32.28	7.12	54.00	21.72	AV	Horizo	PASS
3	16530	30.23	45.04	14.81	74.00	28.96	PK	Horizo	PASS
4	16530	20.47	35.28	14.81	54.00	18.72	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5510MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

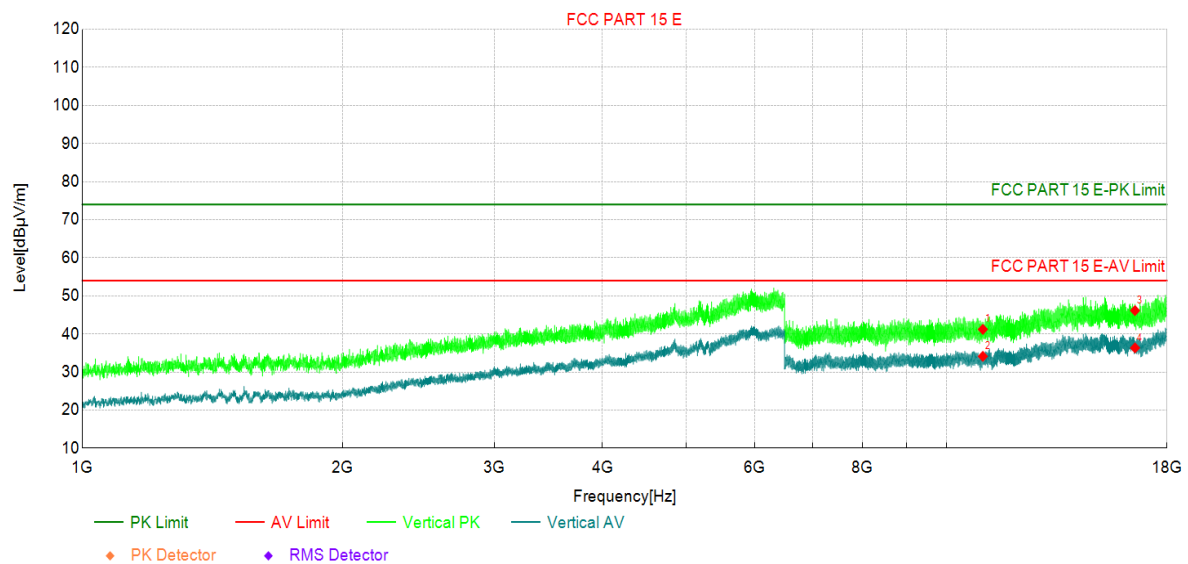

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11020	34.09	41.21	7.12	74.00	32.79	PK	Vertic	PASS
2	11020	27.00	34.12	7.12	54.00	19.88	AV	Vertic	PASS
3	16530	31.33	46.14	14.81	74.00	27.86	PK	Vertic	PASS
4	16530	21.53	36.34	14.81	54.00	17.66	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5550MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

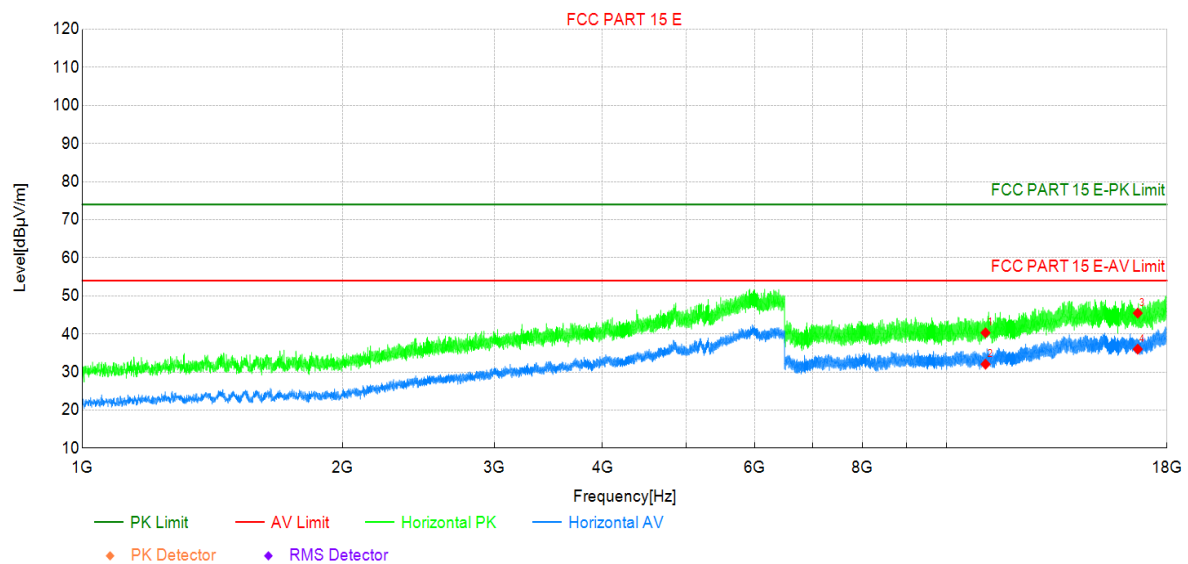

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	33.76	40.31	6.55	74.00	33.69	PK	Horizo	PASS
2	11100	25.50	32.05	6.55	54.00	21.95	AV	Horizo	PASS
3	16650	30.96	45.47	14.51	74.00	28.53	PK	Horizo	PASS
4	16650	21.49	36.00	14.51	54.00	18.00	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5550MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

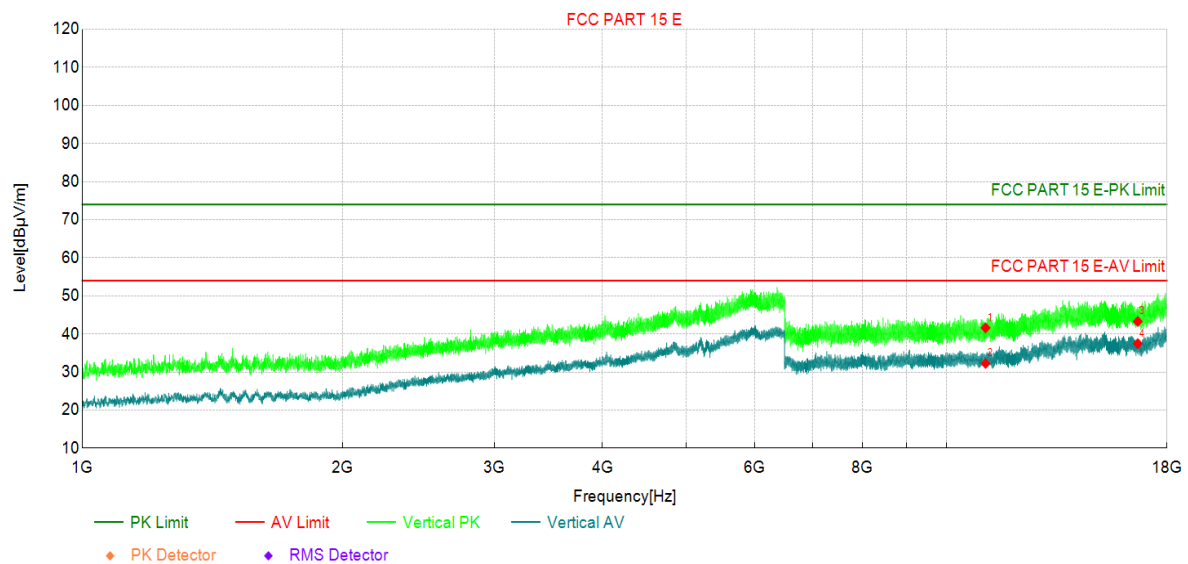

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11100	35.05	41.60	6.55	74.00	32.40	PK	Vertic	PASS
2	11100	25.69	32.24	6.55	54.00	21.76	AV	Vertic	PASS
3	16650	28.77	43.28	14.51	74.00	30.72	PK	Vertic	PASS
4	16650	22.94	37.45	14.51	54.00	16.55	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5670MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

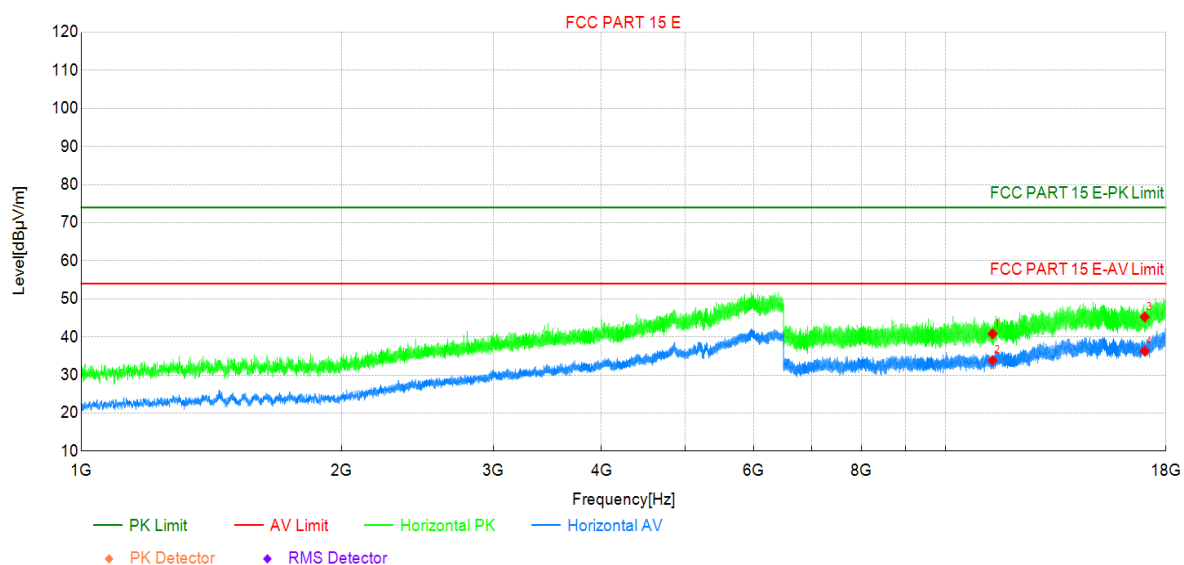

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	33.03	40.83	7.80	74.00	33.17	PK	Horizo	PASS
2	11340	26.05	33.85	7.80	54.00	20.15	AV	Horizo	PASS
3	17010	29.41	45.25	15.84	74.00	28.75	PK	Horizo	PASS
4	17010	20.43	36.27	15.84	54.00	17.73	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5670MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

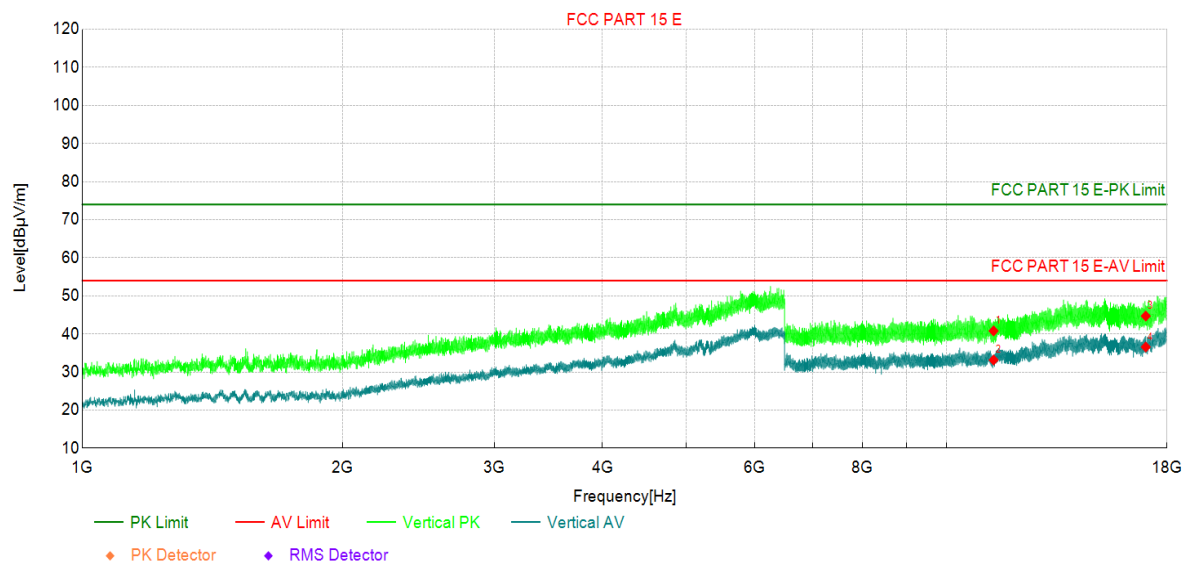

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11340	33.00	40.80	7.80	74.00	33.20	PK	Vertic	PASS
2	11340	25.36	33.16	7.80	54.00	20.84	AV	Vertic	PASS
3	17010	28.86	44.70	15.84	74.00	29.30	PK	Vertic	PASS
4	17010	20.73	36.57	15.84	54.00	17.43	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5755MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

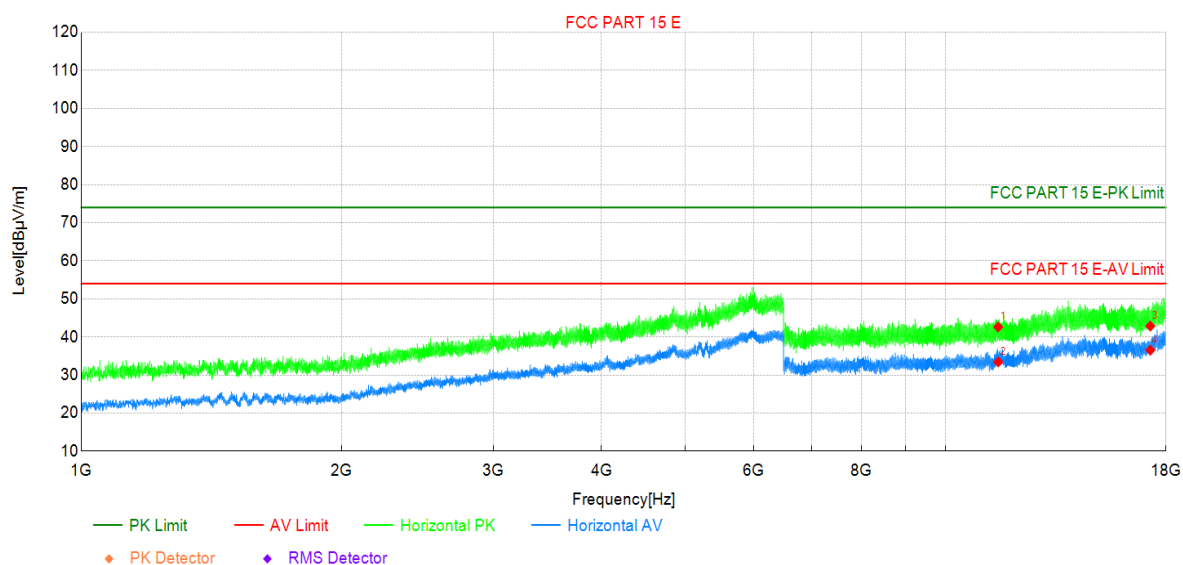

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	34.20	42.60	8.40	74.00	31.40	PK	Horizo	PASS
2	11510	25.03	33.43	8.40	54.00	20.57	AV	Horizo	PASS
3	17265	27.62	42.86	15.24	74.00	31.14	PK	Horizo	PASS
4	17265	21.29	36.53	15.24	54.00	17.47	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5755MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

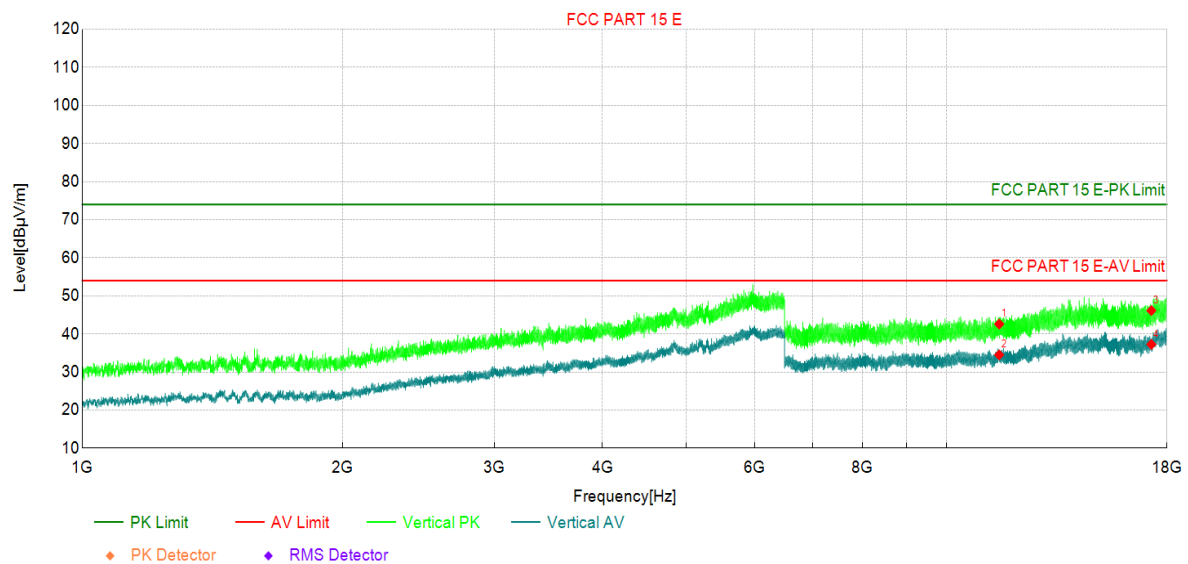

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11510	34.18	42.58	8.40	74.00	31.42	PK	Vertic	PASS
2	11510	26.11	34.51	8.40	54.00	19.49	AV	Vertic	PASS
3	17265	30.90	46.14	15.24	74.00	27.86	PK	Vertic	PASS
4	17265	22.01	37.25	15.24	54.00	16.75	AV	Vertic	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5795MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

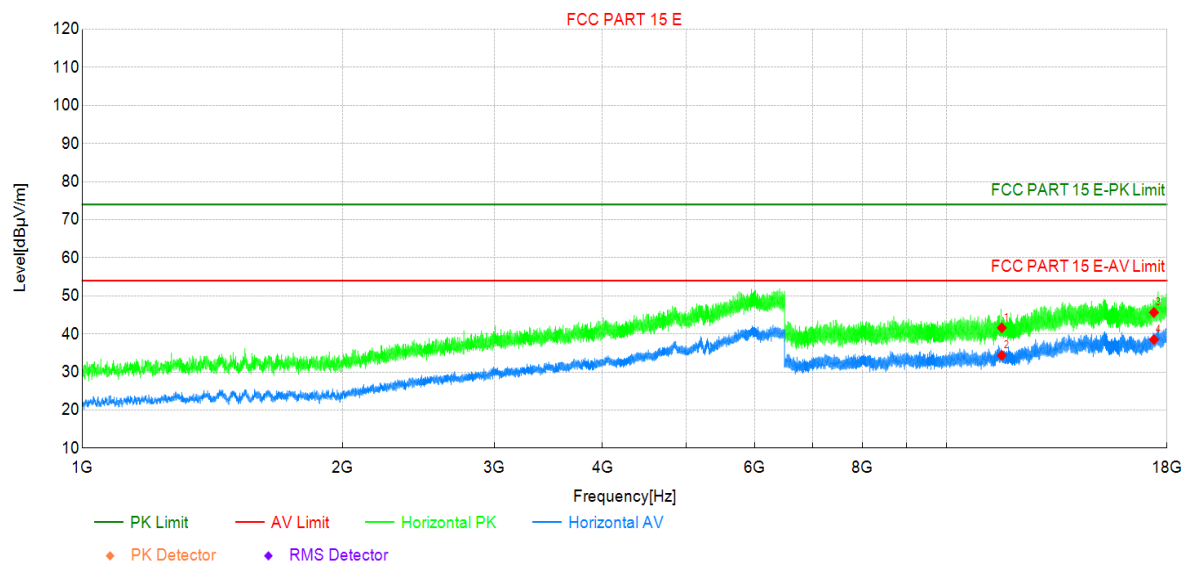

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	32.96	41.60	8.64	74.00	32.40	PK	Horizo	PASS
2	11590	25.71	34.35	8.64	54.00	19.65	AV	Horizo	PASS
3	17385	29.36	45.64	16.28	74.00	28.36	PK	Horizo	PASS
4	17385	22.23	38.51	16.28	54.00	15.49	AV	Horizo	PASS


Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level

Project Information

Profile:	24A0319R	EUT:	POS Terminal
Mode:	Mode 5: Transmit at 5795MHz by 802.11ac(40MHz)	Voltage:	Battery Powered
Environment:	Temp: 25°C ; Humi:60%	Engineer	Yu Liu
Test Standard:	FCC PART 15 E		

Test Graph

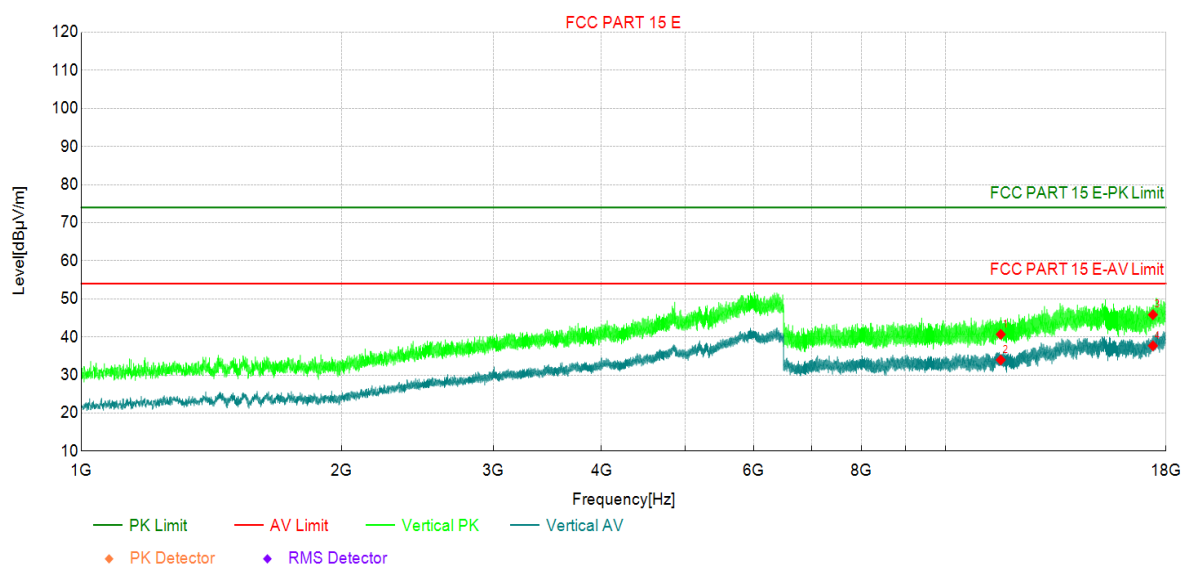

Suspected Data List

NO	Frequency [MHz]	Reading [dBμV]	Level [dBμV/m]	Factor [dB/m]	Limit [dBμV/m]	Margin [dB]	Det	Pol	Verdict
1	11590	32.05	40.69	8.64	74.00	33.31	PK	Vertic	PASS
2	11590	25.32	33.96	8.64	54.00	20.04	AV	Vertic	PASS
3	17385	29.56	45.84	16.28	74.00	28.16	PK	Vertic	PASS
4	17385	21.39	37.67	16.28	54.00	16.33	AV	Vertic	PASS

Note:(1)Level=Reading+Factor

(2)Margin=Limit-Level