

TEST REPORT

FCC ID. :	2AQRG-G3	
Test Report No..... :	TCT240508E021	
Date of issue..... :	May 13, 2024	
Testing laboratory	SHENZHEN TONGCE TESTING LAB	
Testing location/ address:	2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China	
Applicant's name..... :	Shenzhen Feihe Electronics Co., Ltd	
Address..... :	3/F, Bldg 3, HongFa Innovative Park, HuangMaBu Community, Baoan District, Shenzhen 518101 China.	
Manufacturer's name ... :	Shenzhen Feihe Electronics Co., Ltd	
Address..... :	3/F, Bldg 3, HongFa Innovative Park, HuangMaBu Community, Baoan District, Shenzhen 518101 China.	
Standard(s)	FCC CFR Title 47 Part 15 Subpart C	
Product Name..... :	LED Desk Lamp	
Trade Mark	N/A	
Model/Type reference..... :	G3, UL-G3, EN-G3	
Rating(s)..... :	Adapter Information: MODEL: K36C120250U INPUT: AC 100-240V, 50/60Hz, 0.9A OUTPUT: DC 12.0V, 2.5A	
Date of receipt of test item	May 08, 2024	
Date (s) of performance of test..... :	May 08, 2024 ~ May 13, 2024	
Tested by (+signature) ... :	Rleo LIU	
Check by (+signature).... :	Beryl ZHAO	
Approved by (+signature):	Tomsin	

**General disclaimer:**

This report shall not be reproduced except in full, without the written approval of SHENZHEN TONGCE TESTING LAB. This document may be altered or revised by SHENZHEN TONGCE TESTING LAB personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

Table of Contents

1. General Product Information	3
1.1. EUT description	3
1.2. Model(s) list.....	3
2. Test Result Summary	4
3. General Information.....	5
3.1. Test environment and mode.....	5
3.2. Description of Support Units.....	5
4. Facilities and Accreditations	6
4.1. Facilities	6
4.2. Location	6
4.3. Measurement Uncertainty.....	6
5. Test Results and Measurement Data	7
5.1. Antenna requirement	7
5.2. Conducted Emission.....	8
5.3. Radiated Spurious Emission Measurement.....	12
Appendix A: Photographs of Test Setup	
Appendix B: Photographs of EUT	

1. General Product Information

1.1. EUT description

Product Name.....:	LED Desk Lamp
Model/Type reference.....:	G3
Sample Number.....:	TCT240508E021-0101
Operation Frequency	110.62kHz ~ 175.00kHz
Output power	5W
Modulation Technology	Load modulation
Antenna Type.....:	Inductive loop coil Antenna
Rating(s).....:	Adapter Information: MODEL: K36C120250U INPUT: AC 100–240V, 50/60Hz, 0.9A OUTPUT: DC 12.0V, 2.5A

Note: The antenna gain listed in this report is provided by applicant, and the test laboratory is not responsible for this parameter.

1.2. Model(s) list

No.	Model No.	Tested with
1	G3	☒
Other models	UL-G3, EN-G3	☐

Note: G3 is tested model, other models are derivative models. The models are identical in circuit and PCB layout, only different on the model names. So the test data of G3 can represent the remaining models.

2. Test Result Summary

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Spurious Emission	§15.209(a)(f)	PASS

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

3. General Information

3.1. Test environment and mode

Operating Environment:		
Condition	Conducted Emission	Radiated Emission
Temperature:	24.2 °C	24.1 °C
Humidity:	50 % RH	52 % RH
Atmospheric Pressure:	1010 mbar	1010 mbar
Test Mode:		
AC mode:	Mode 1	Wireless Charging(Mobile Phone battery status>95%)
	Mode 2	Wireless Charging(Mobile Phone battery status<50%)
	Mode 3	Wireless Charging(Mobile Phone battery status<1%)
	Mode 4	Wireless Charging+ Half Load
	Mode 5	Wireless Charging+ Full Load
	Mode 6	Wireless Charging+ No Load
The sample was placed 0.8m for the measurement below above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case(Z axis) are shown in Test Results of the following pages.		

3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
Mobile Phone	SM-G9350	R28HA2ER3GT	/	SAMSUNG
Load	/	/	/	/

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4. Facilities and Accreditations

4.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

SHENZHEN TONGCE TESTING LAB

Designation Number: CN1205

The testing lab has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

SHENZHEN TONGCE TESTING LAB

CAB identifier: CN0031

The testing lab has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing.

4.2. Location

SHENZHEN TONGCE TESTING LAB

Address: 2101 & 2201, Zhenchang Factory, Renshan Industrial Zone, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, 518103, People's Republic of China

TEL: +86-755-27673339

4.3. Measurement Uncertainty

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	± 3.10 dB
2	RF power, conducted	± 0.12 dB
3	Spurious emissions, conducted	± 0.11 dB
4	All emissions, radiated(<1 GHz)	± 4.56 dB
5	All emissions, radiated(1 GHz - 18 GHz)	± 4.22 dB
6	All emissions, radiated(18 GHz- 40 GHz)	± 4.36 dB

5. Test Results and Measurement Data

5.1. Antenna requirement

Standard requirement:


FCC Part15 C Section 15.203

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

E.U.T Antenna:

The antenna is inductive loop coil antenna which permanently attached.

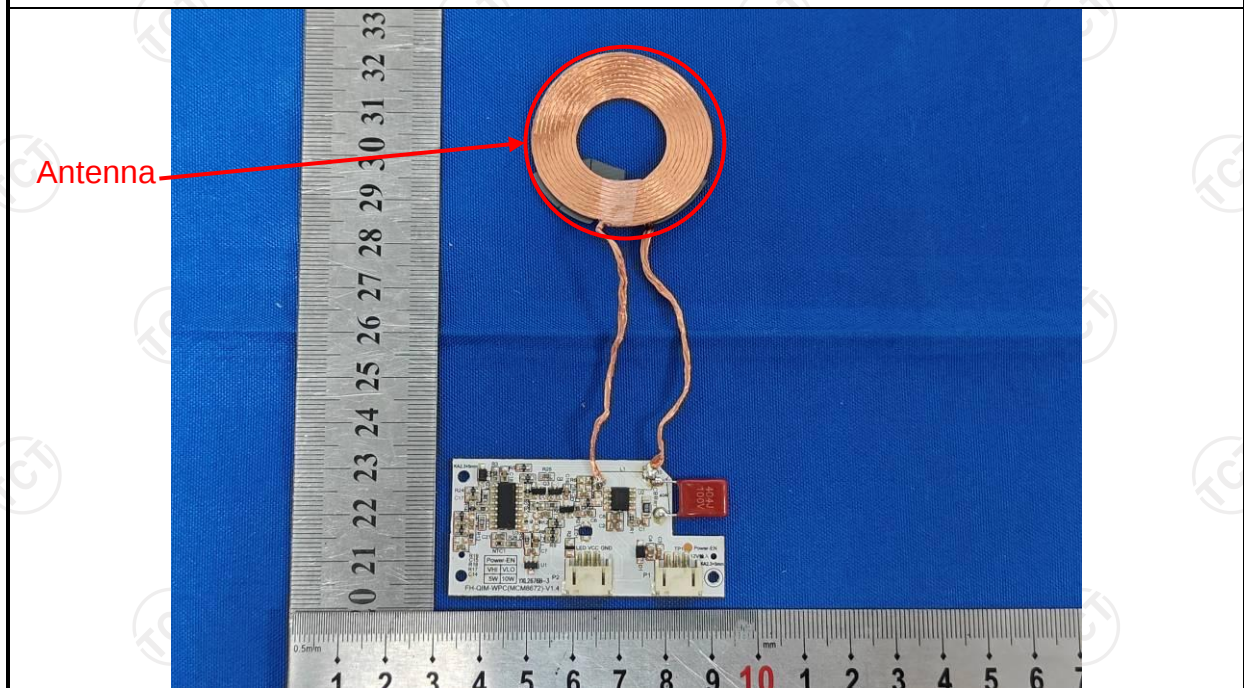

5.2. Conducted Emission

5.2.1. Test Specification

Test Requirement:	FCC Part15 C Section 15.207														
Test Method:	ANSI C63.10: 2013														
Frequency Range:	150 kHz to 30 MHz														
Receiver setup:	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
Limits:	<table><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
Test Setup:	Reference Plane 40cm 80cm E.U.T AC power LISN Filter AC power EMI Receiver Test table/Insulation plane Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m														
Test Mode:	Refer to item 3.1														
Test Procedure:	1. The E.U.T is connected to an adapter through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.														
Test Result:	PASS														


5.2.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI3	100898	Jun. 29, 2024
Line Impedance Stabilisation Newtork(LISN)	Schwarzbeck	NSLK 8126	8126453	Jan. 31, 2025
Line-5	TCT	CE-05	/	Jul. 03, 2024
EMI Test Software	Shurple Technology	EZ-EMC	/	/

5.2.3. Test data

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

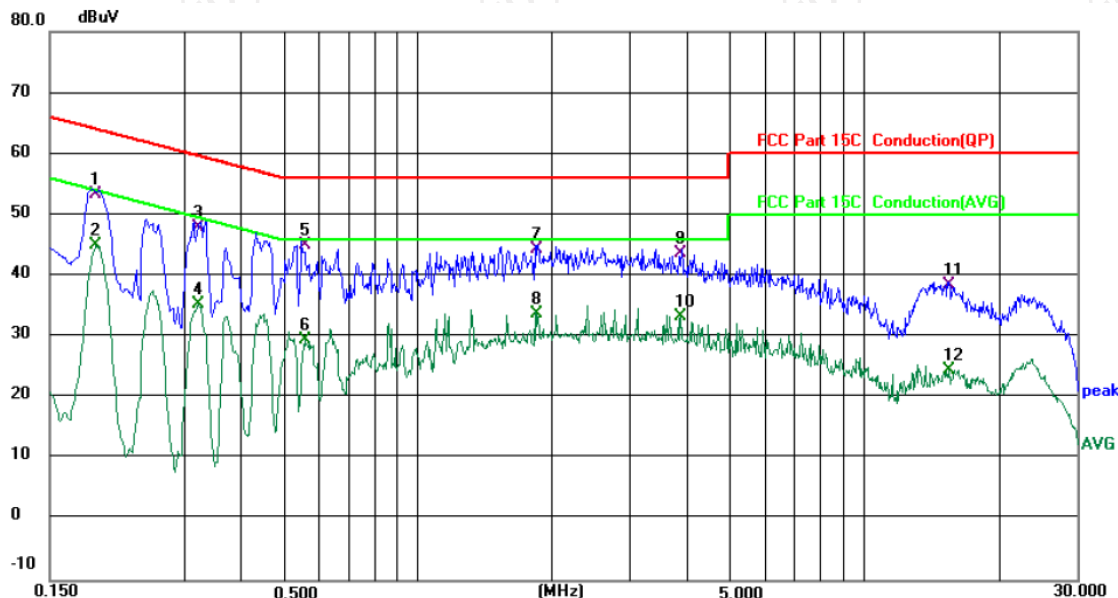

Site 844 Shielding Room

Phase: **L1**

Temperature: 24.2 (°C)

Humidity: 50 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector	Comment
1		0.1900	43.23	10.03	53.26	64.04	-10.78	QP	
2	*	0.1900	34.91	10.03	44.94	54.04	-9.10	AVG	
3		0.3220	38.02	9.84	47.86	59.66	-11.80	QP	
4		0.3220	25.57	9.84	35.41	49.66	-14.25	AVG	
5		0.5580	35.62	9.29	44.91	56.00	-11.09	QP	
6		0.5580	20.17	9.29	29.46	46.00	-16.54	AVG	
7		1.8500	34.30	10.02	44.32	56.00	-11.68	QP	
8		1.8500	23.67	10.02	33.69	46.00	-12.31	AVG	
9		3.8860	33.47	10.28	43.75	56.00	-12.25	QP	
10		3.8860	23.10	10.28	33.38	46.00	-12.62	AVG	
11		15.5340	27.82	10.60	38.42	60.00	-21.58	QP	
12		15.5340	13.91	10.60	24.51	50.00	-25.49	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)

Q.P. =Quasi-Peak

AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

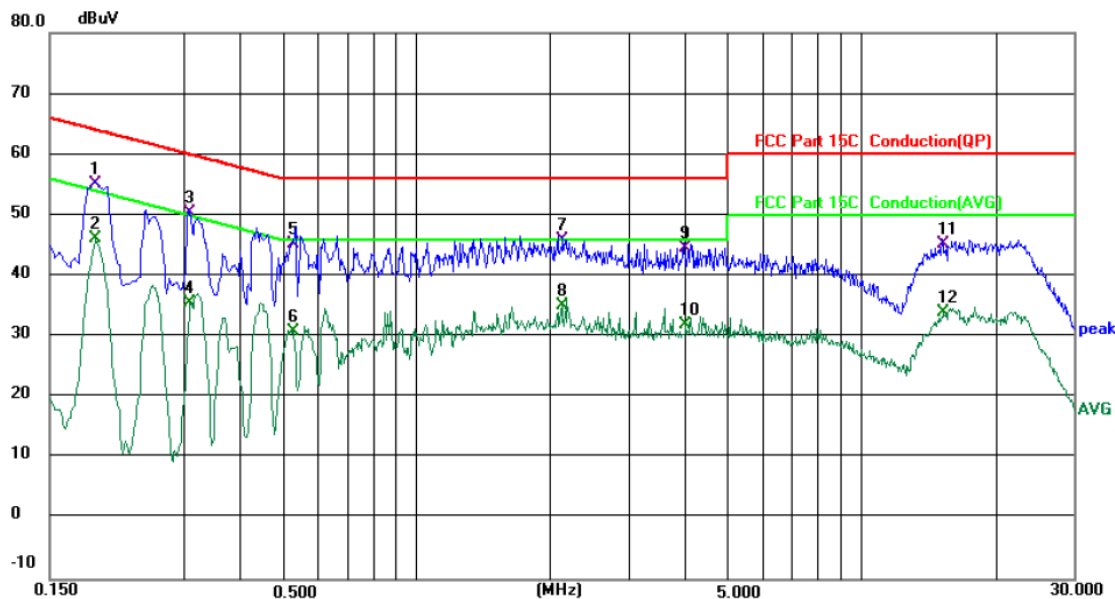

Site 844 Shielding Room

Phase: **N**

Temperature: 24.2 (°C)

Humidity: 50 %

Limit: FCC Part 15C Conduction(QP)

Power: AC 120 V/60 Hz

No. Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV	Limit dBμV	Over dB	Detector	Comment
1	0.1900	45.11	10.01	55.12	64.04	-8.92	QP	
2 *	0.1900	36.15	10.01	46.16	54.04	-7.88	AVG	
3	0.3100	40.53	9.82	50.35	59.97	-9.62	QP	
4	0.3100	25.71	9.82	35.53	49.97	-14.44	AVG	
5	0.5299	36.02	9.29	45.31	56.00	-10.69	QP	
6	0.5299	21.53	9.29	30.82	46.00	-15.18	AVG	
7	2.1300	35.82	9.99	45.81	56.00	-10.19	QP	
8	2.1300	25.19	9.99	35.18	46.00	-10.82	AVG	
9	4.0460	34.30	10.22	44.52	56.00	-11.48	QP	
10	4.0460	21.78	10.22	32.00	46.00	-14.00	AVG	
11	15.3260	34.75	10.58	45.33	60.00	-14.67	QP	
12	15.3260	23.31	10.58	33.89	50.00	-16.11	AVG	

Note:

Freq. = Emission frequency in MHz

Reading level (dBμV) = Receiver reading

Corr. Factor (dB) = LISN factor + Cable loss

Measurement (dBμV) = Reading level (dBμV) + Corr. Factor (dB)

Limit (dBμV) = Limit stated in standard


Margin (dB) = Measurement (dBμV) – Limits (dBμV)


Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz

5.3. Radiated Spurious Emission Measurement

5.3.1. Test Specification

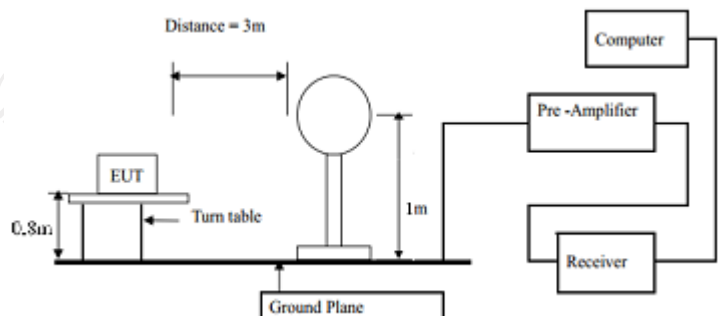Test Requirement:	FCC Part15 C Section 15.209																											
Test Method:	ANSI C63.10: 2013																											
Frequency Range:	9 kHz to 25 GHz																											
Measurement Distance:	3 m																											
Antenna Polarization:	Horizontal & Vertical																											
Operation mode:	Refer to item 3.1																											
Receiver Setup:	<table><tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr><tr><td>9kHz- 150kHz</td><td>Quasi-peak</td><td>200Hz</td><td>1kHz</td><td>Quasi-peak Value</td></tr><tr><td>150kHz- 30MHz</td><td>Quasi-peak</td><td>9kHz</td><td>30kHz</td><td>Quasi-peak Value</td></tr><tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>120KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr></table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value			
	Frequency	Detector	RBW	VBW	Remark																							
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																							
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																							
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																								
Limit:	<table><tr><td>Frequency</td><td>Field Strength (microvolts/meter)</td><td>Measurement Distance (meters)</td></tr><tr><td>0.009-0.490</td><td>2400/F(KHz)</td><td>300</td></tr><tr><td>0.490-1.705</td><td>24000/F(KHz)</td><td>30</td></tr><tr><td>1.705-30</td><td>30</td><td>30</td></tr><tr><td>30-88</td><td>100</td><td>3</td></tr><tr><td>88-216</td><td>150</td><td>3</td></tr><tr><td>216-960</td><td>200</td><td>3</td></tr><tr><td>Above 960</td><td>500</td><td>3</td></tr></table>				Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	0.009-0.490	2400/F(KHz)	300	0.490-1.705	24000/F(KHz)	30	1.705-30	30	30	30-88	100	3	88-216	150	3	216-960	200	3	Above 960	500	3
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																									
	0.009-0.490	2400/F(KHz)	300																									
	0.490-1.705	24000/F(KHz)	30																									
	1.705-30	30	30																									
	30-88	100	3																									
	88-216	150	3																									
	216-960	200	3																									
Above 960	500	3																										
Test setup:	For radiated emissions below 30MHz																											
	 Distance = 3m 0.8m Turn table 1m Ground Plane Computer Pre-Amplifier Receiver																											
	30MHz to 1GHz																											

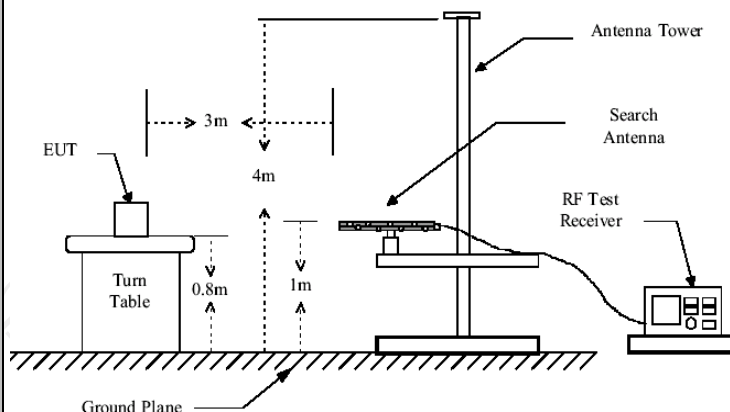

Test Procedure:

1. For the radiated emission test below 1GHz:
The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.
2. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
3. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
4. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=120 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \square 1$ GHz for peak measurement.

For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Test mode:

Refer to section 3.1 for details

Test results:

PASS

5.3.2. Test Instruments


Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESIB7	100197	Jun. 29, 2024
Spectrum Analyzer	R&S	FSQ40	200061	Jun. 29, 2024
Pre-amplifier	SKET	LNPA_0118G-45	SK2021012102	Jan. 31, 2025
Pre-amplifier	SKET	LNPA_1840G-50	SK202109203500	Jan. 31, 2025
Pre-amplifier	HP	8447D	2727A05017	Jun. 27, 2024
Loop antenna	Schwarzbeck	FMZB1519B	00191	Jul. 02, 2024
Broadband Antenna	Schwarzbeck	VULB9163	340	Jul. 01, 2024
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Jul. 01, 2024
Horn Antenna	Schwarzbeck	BBHA 9170	00956	Feb. 02, 2025
Antenna Mast	Keleto	RE-AM	/	/
Coaxial cable	SKET	RC-18G-N-M	/	Jan. 31, 2025
Coaxial cable	SKET	RC_40G-K-M	/	Jan. 31, 2025
EMI Test Software	Shurple Technology	EZ-EMC	/	/

5.3.3. Test Data

Coaxial:

Please refer to following diagram for individual
9KHz-30MHz

9KHz-150KHz:

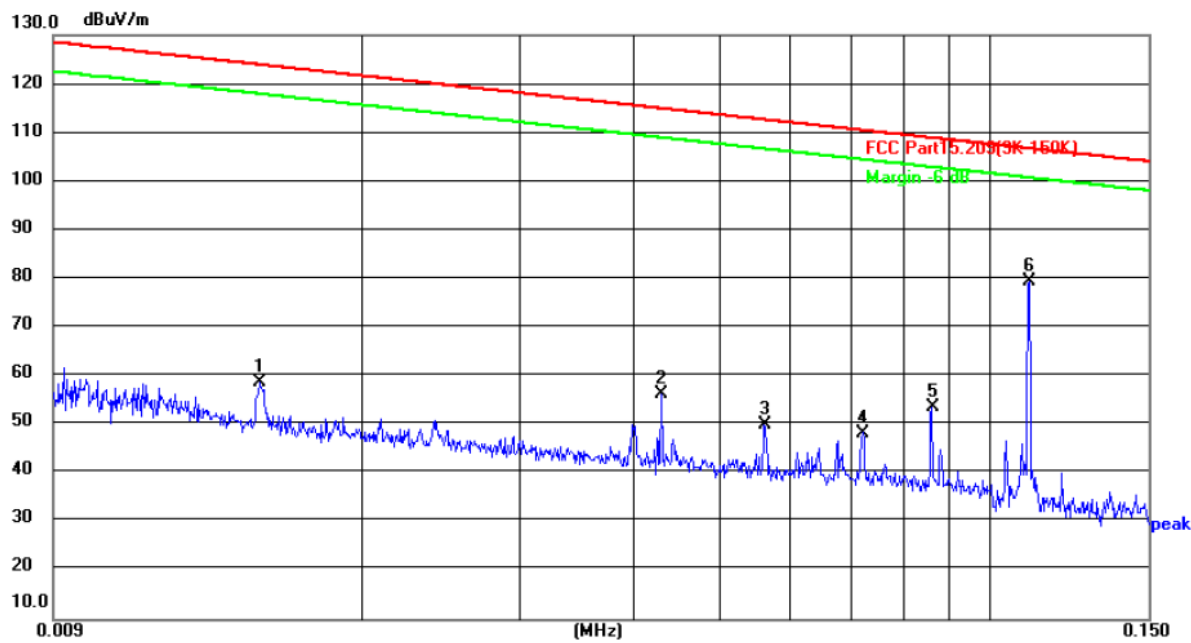

Site: 3m Anechoic Chamber

Polarization: **Coaxial**

Temperature: 23.3(°C)


Humidity: 52 %

Limit: FCC Part 15.209(9K-150K)

Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.0153	38.47	20.32	58.79	123.91	-65.12	peak	P	
2	0.0429	36.08	20.29	56.37	114.96	-58.59	peak	P	
3	0.0560	29.71	20.30	50.01	112.64	-62.63	peak	P	
4	0.0720	28.15	20.25	48.40	110.46	-62.06	peak	P	
5	0.0860	33.48	20.30	53.78	108.91	-55.13	peak	P	
6 *	0.1104	58.71	20.63	79.34	106.74	-27.40	peak	P	

150KHz-30MHz:

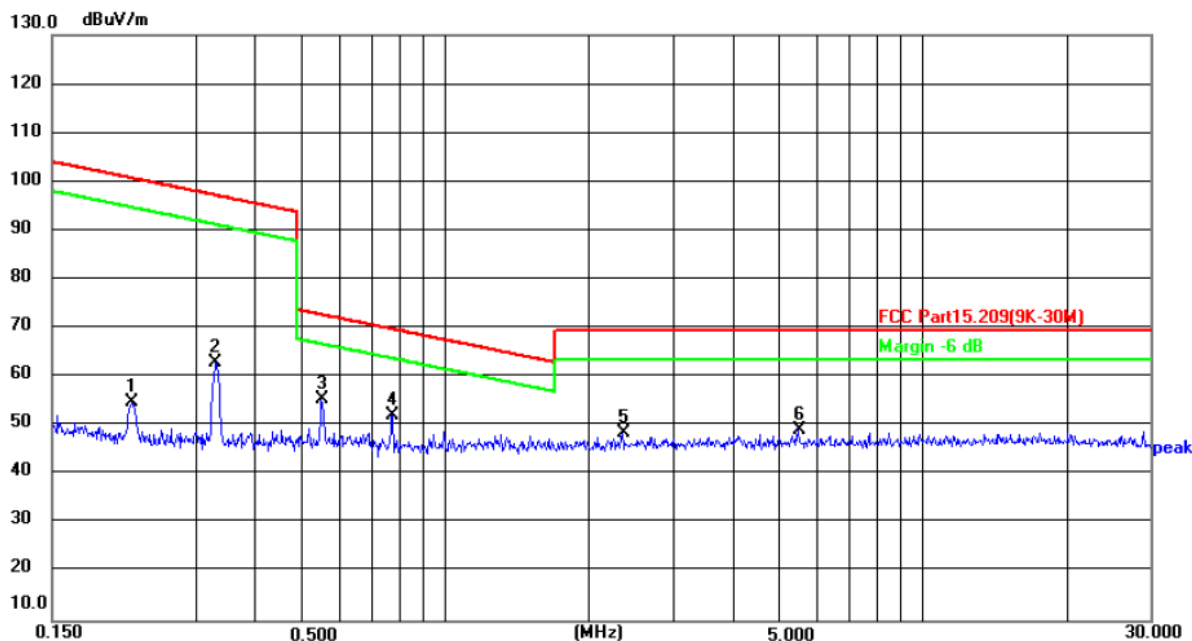

Site: 3m Anechoic Chamber

Polarization: **Coaxial**

Temperature: 23.3(°C)

Humidity: 52 %

Limit: FCC Part15.209(9K-30M)


Power: AC 120 V/60 Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	0.2215	34.56	20.24	54.80	100.70	-45.90	peak	P	
2	0.3305	42.42	20.42	62.84	97.22	-34.38	peak	P	
3 *	0.5511	34.50	20.81	55.31	72.78	-17.47	peak	P	
4	0.7748	31.08	21.20	52.28	69.83	-17.55	peak	P	
5	2.3460	24.09	24.33	48.42	69.50	-21.08	peak	P	
6	5.4851	18.65	30.60	49.25	69.50	-20.25	peak	P	

Note: Both Coaxial and coplanar have been tested and the worse Polarization (Coaxial) is reported only.

30MHz-1GHz

Horizontal:

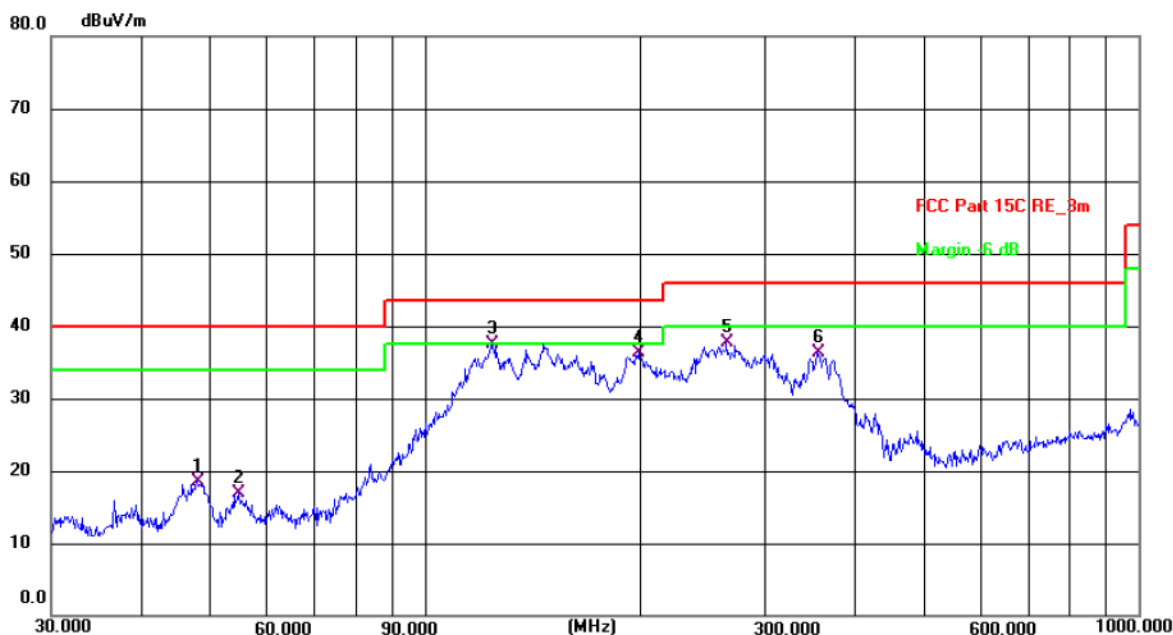

Site 3m Anechoic Chamber

Polarization: **Horizontal**

Temperature: 24.1(C) Humidity: 52 %

Limit: FCC Part 15C RE_3m

Power: AC 120V/60Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	47.9940	36.92	-18.32	18.60	40.00	-21.40	QP	P	
2	54.8348	35.66	-18.75	16.91	40.00	-23.09	QP	P	
3 *	124.5690	56.15	-18.62	37.53	43.50	-5.97	QP	P	
4	199.2855	57.27	-20.90	36.37	43.50	-7.13	QP	P	
5	264.7457	55.79	-18.07	37.72	46.00	-8.28	QP	P	
6	355.4273	52.35	-16.04	36.31	46.00	-9.69	QP	P	

Vertical:



Site 3m Anechoic Chamber

Polarization: **Vertical**

Temperature: 24.1(C) Humidity: 52 %

Limit: FCC Part 15C RE_3m

Power: AC 120V/60Hz

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	P/F	Remark
1	48.3316	51.01	-18.34	32.67	40.00	-7.33	QP	P	
2 *	117.3275	58.54	-19.28	39.26	43.50	-4.24	QP	P	
3 !	124.0880	57.75	-18.62	39.13	43.50	-4.37	QP	P	
4	228.4904	58.77	-19.87	38.90	46.00	-7.10	QP	P	
5	373.3112	42.47	-15.30	27.17	46.00	-18.83	QP	P	
6	663.4728	33.05	-7.83	25.22	46.00	-20.78	QP	P	

Note:



Emission Level=Peak Reading + Correction Factor; Correction Factor= Antenna Factor + Cable loss – Pre-amplifier



Appendix A: Photographs of Test Setup

Product: LED Desk Lamp


Model: G3

Radiated Emission

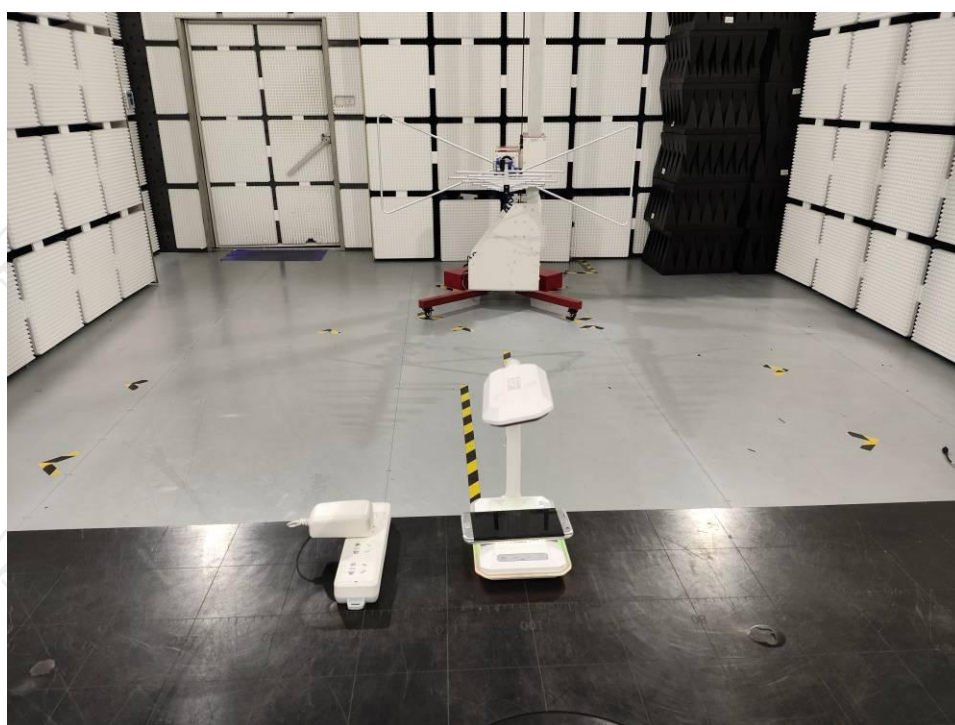
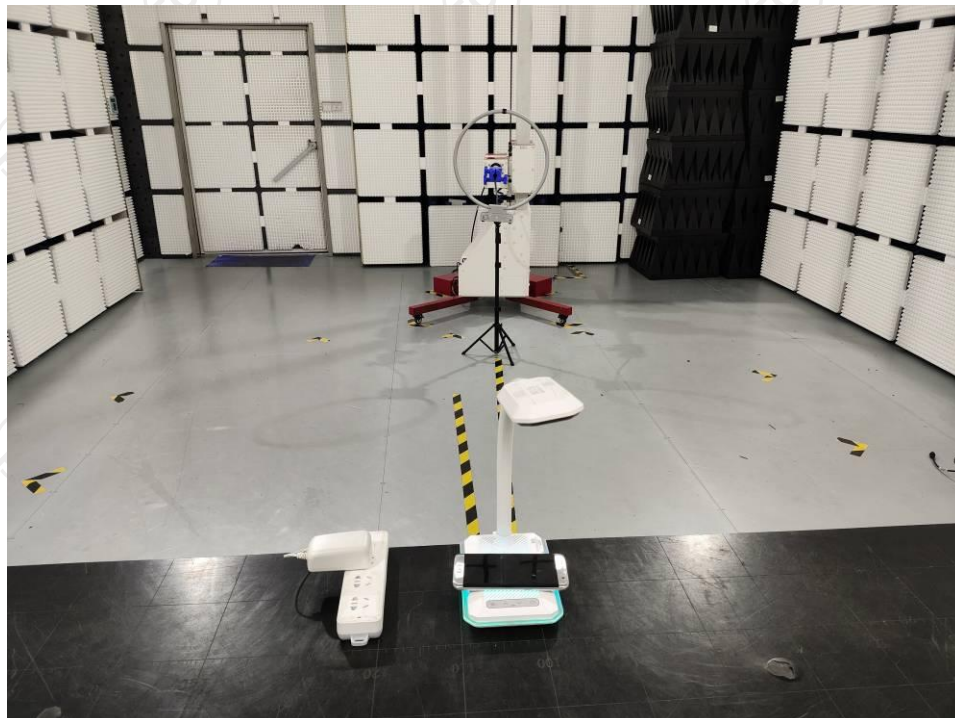


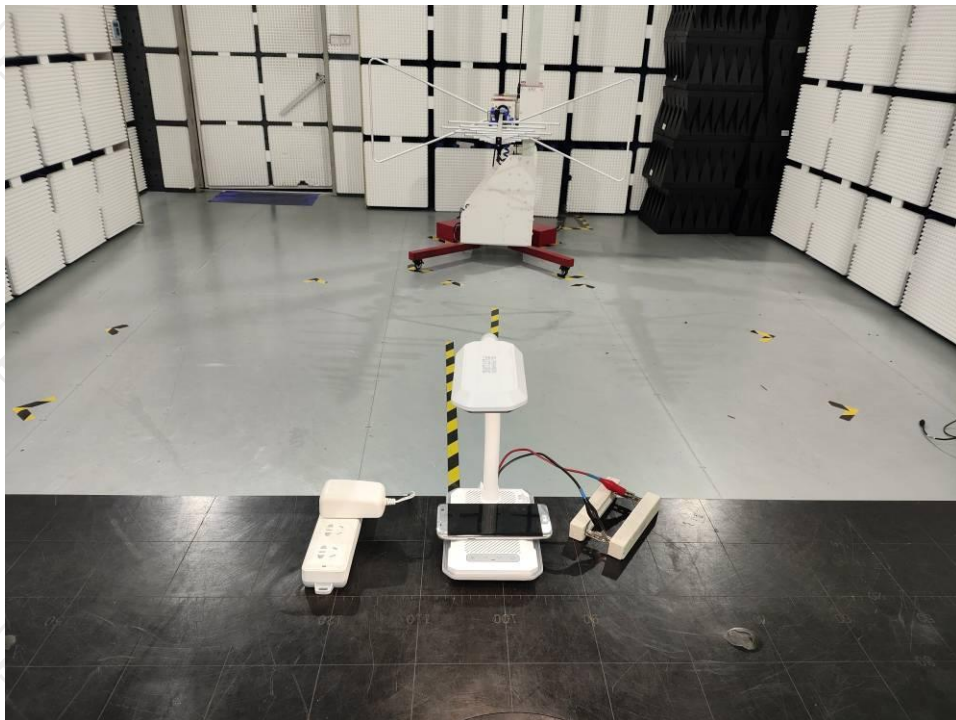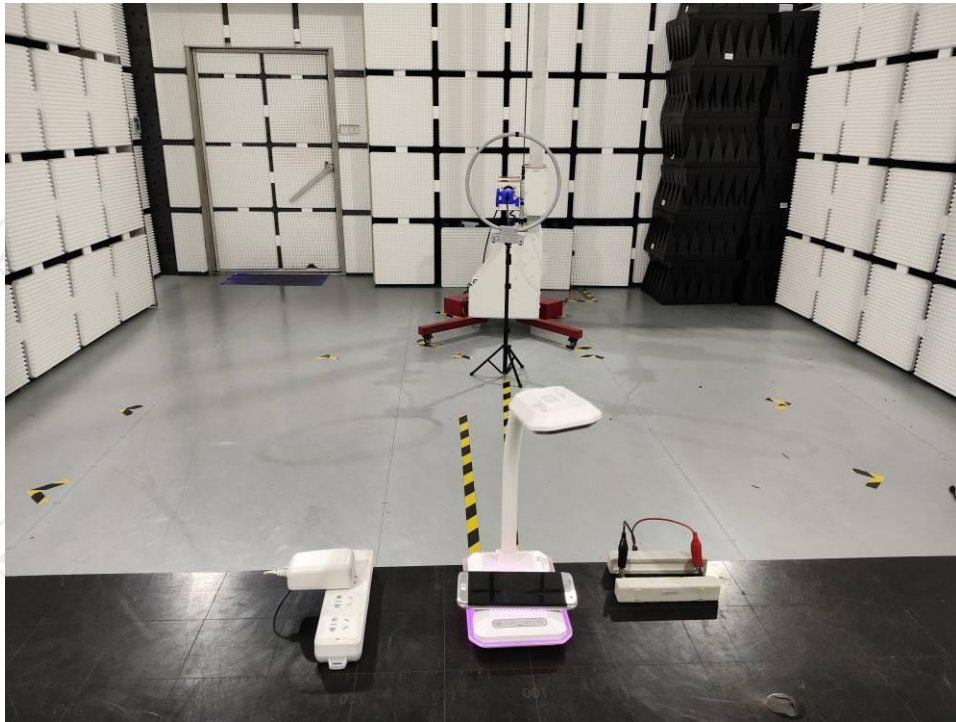




Conducted Emission

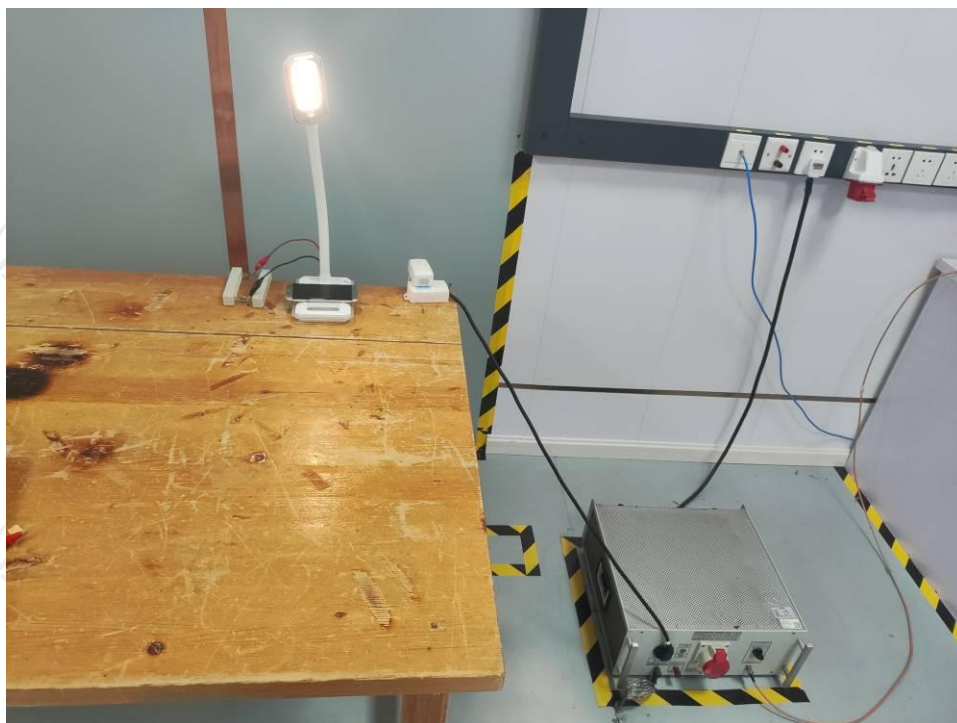

Appendix B: Photographs of EUT
Product: LED Desk Lamp
Model: G3
External Photos

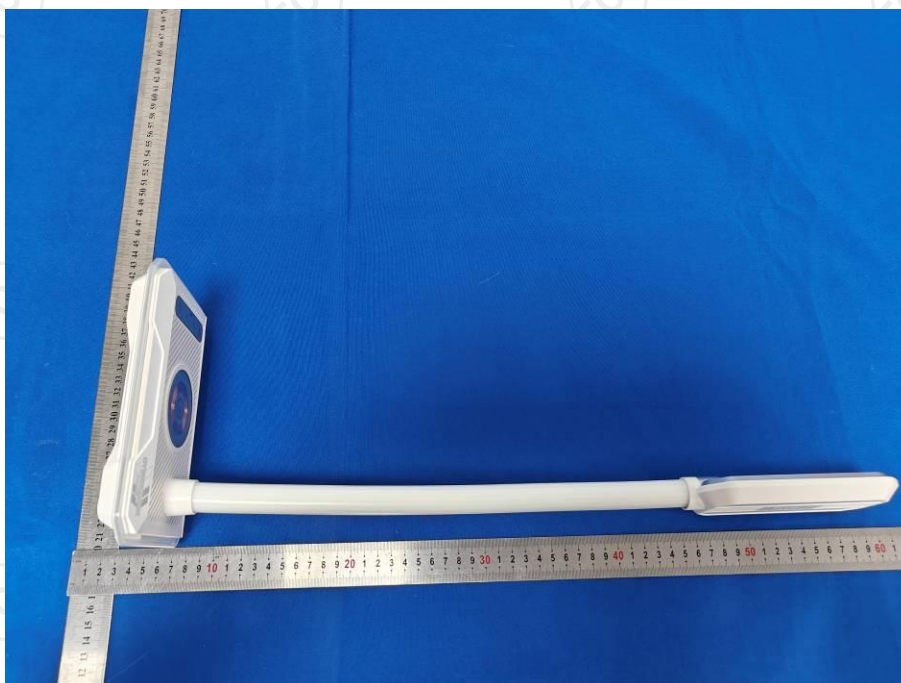
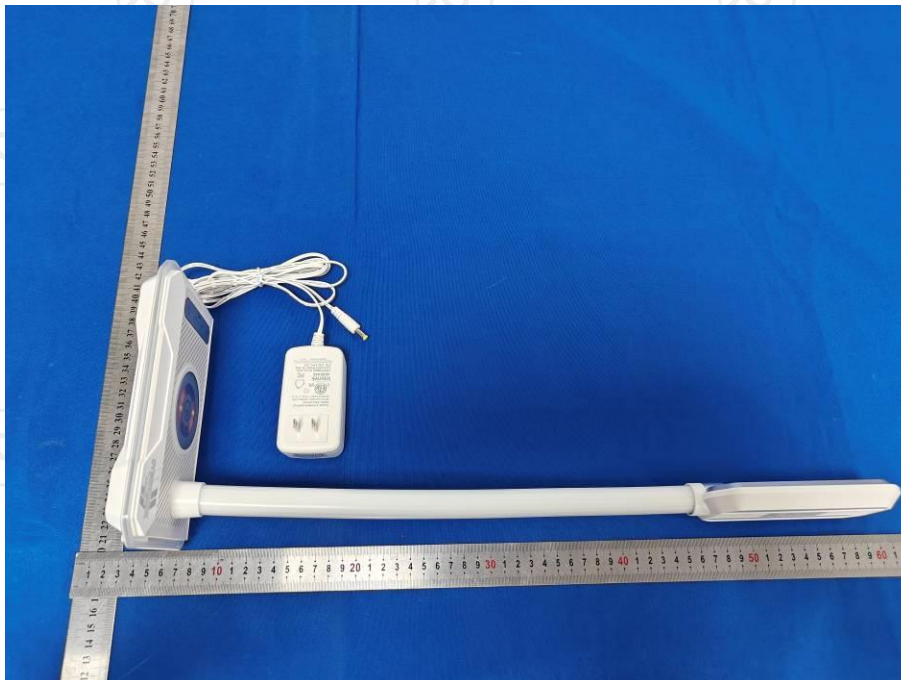



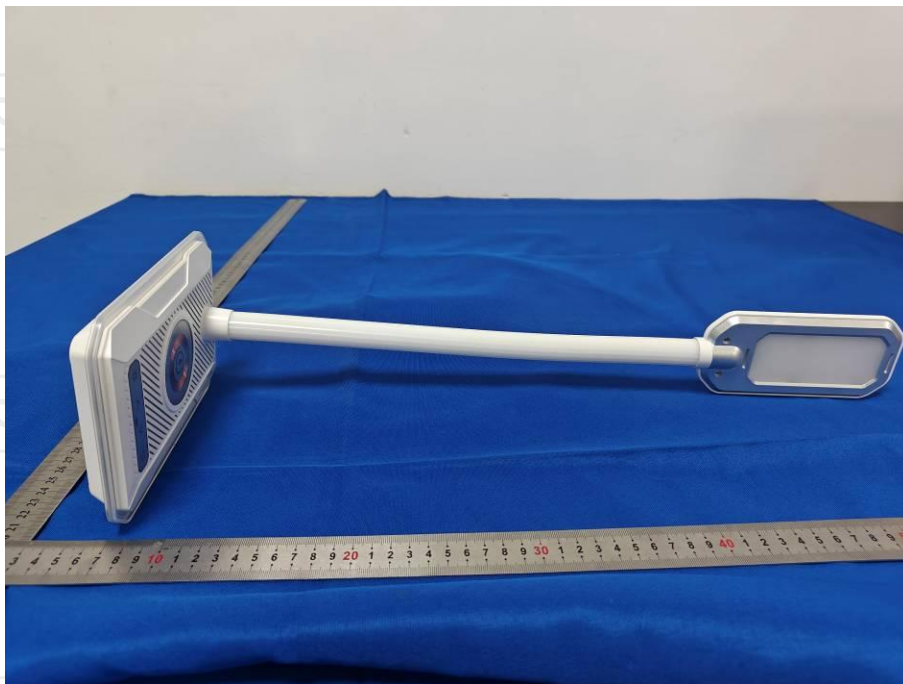


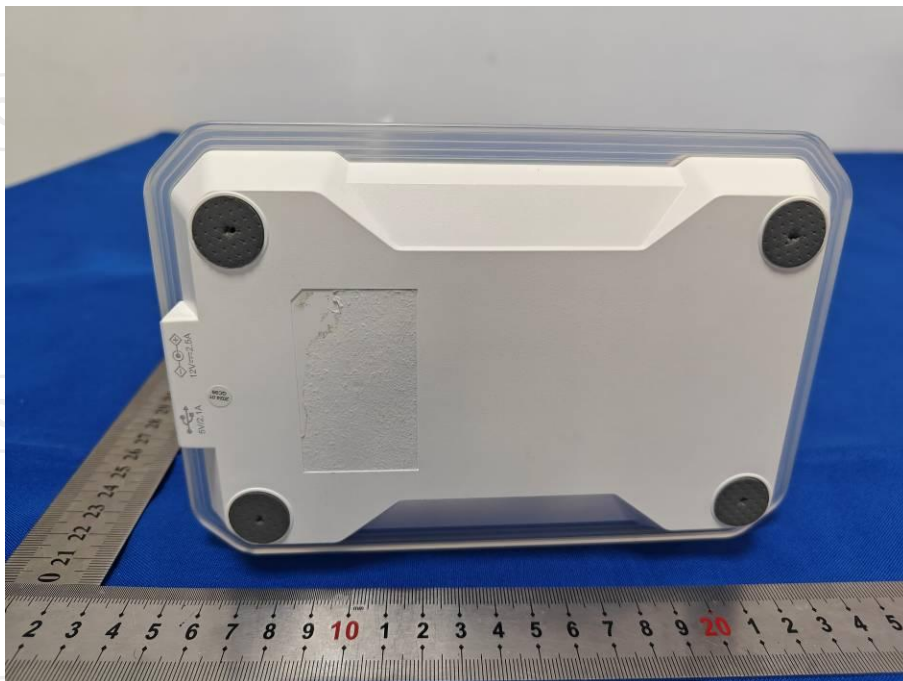
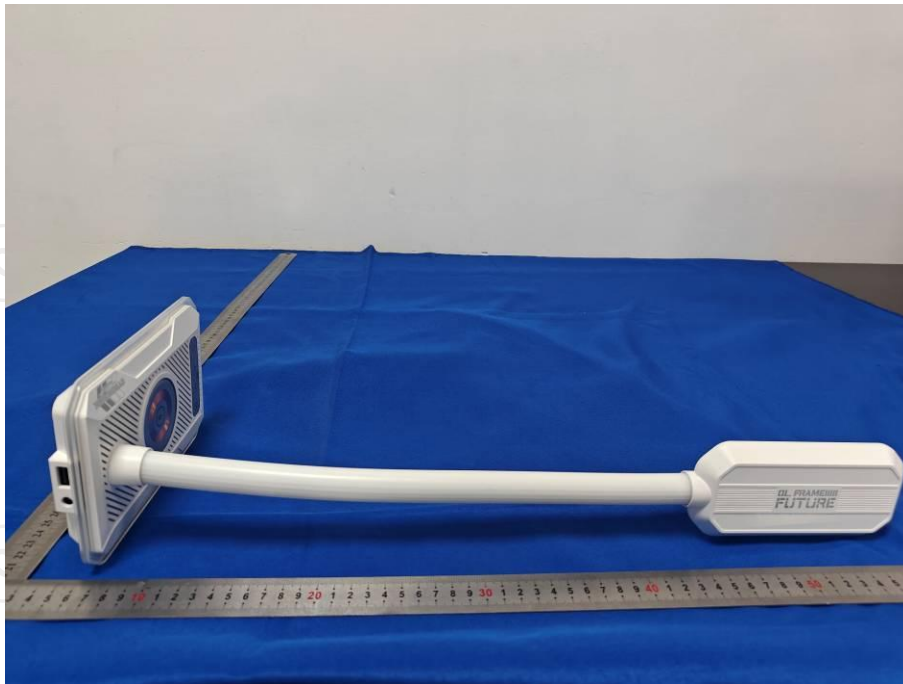








Product: LED Desk Lamp
Model: G3
Internal Photos

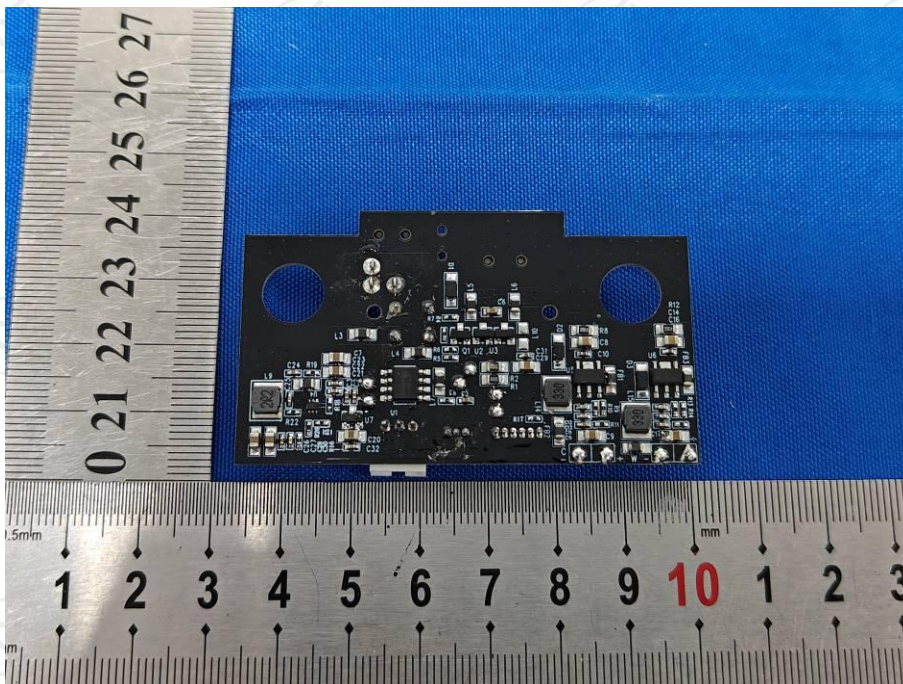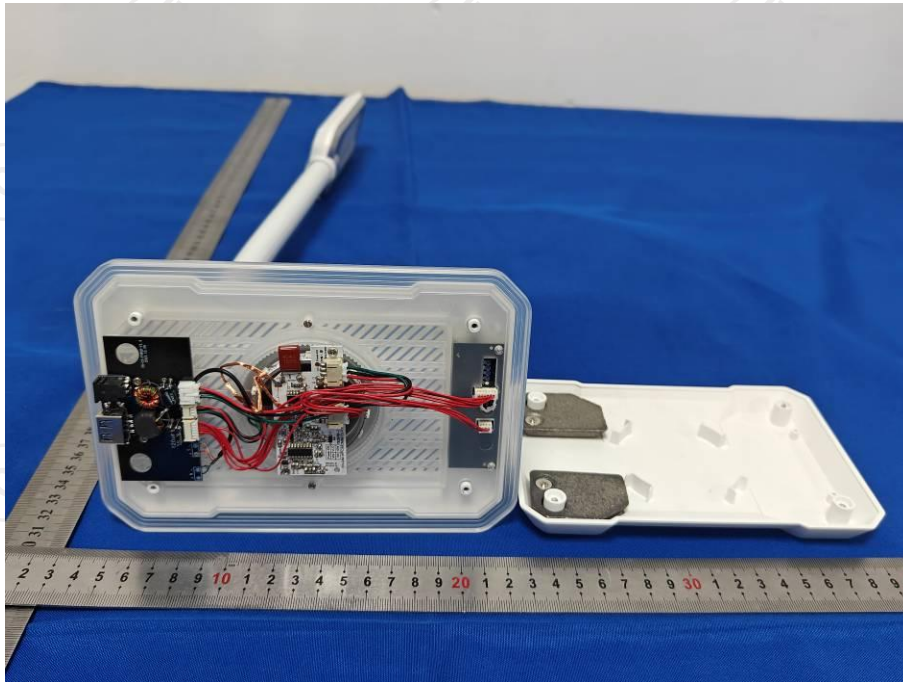


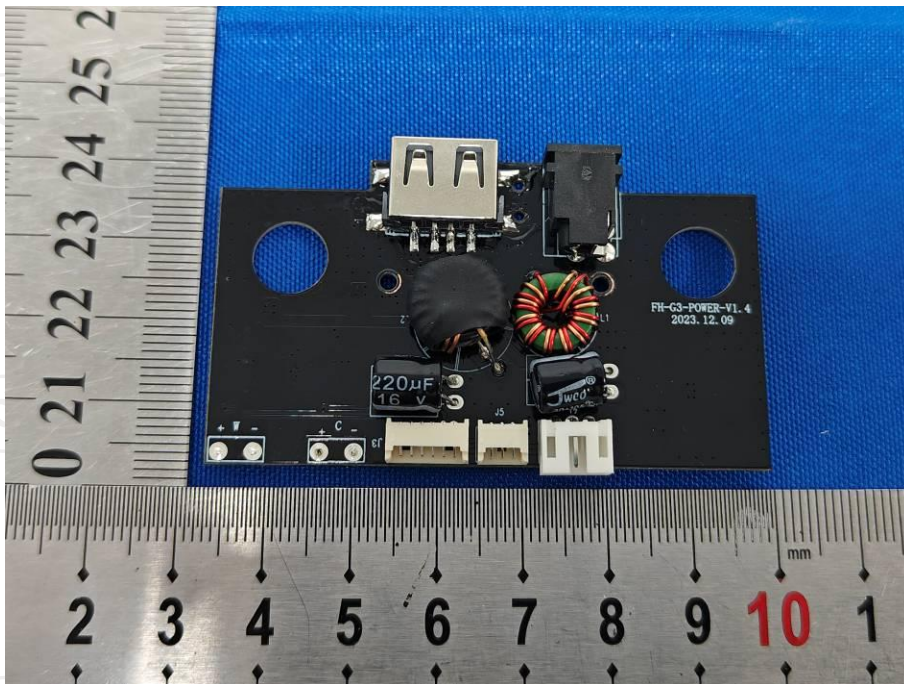
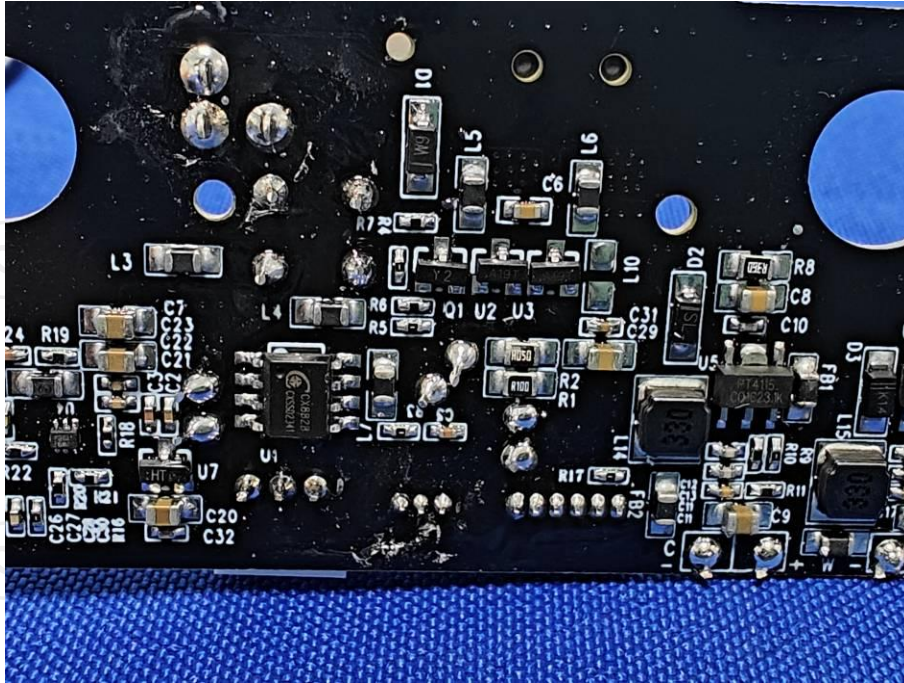


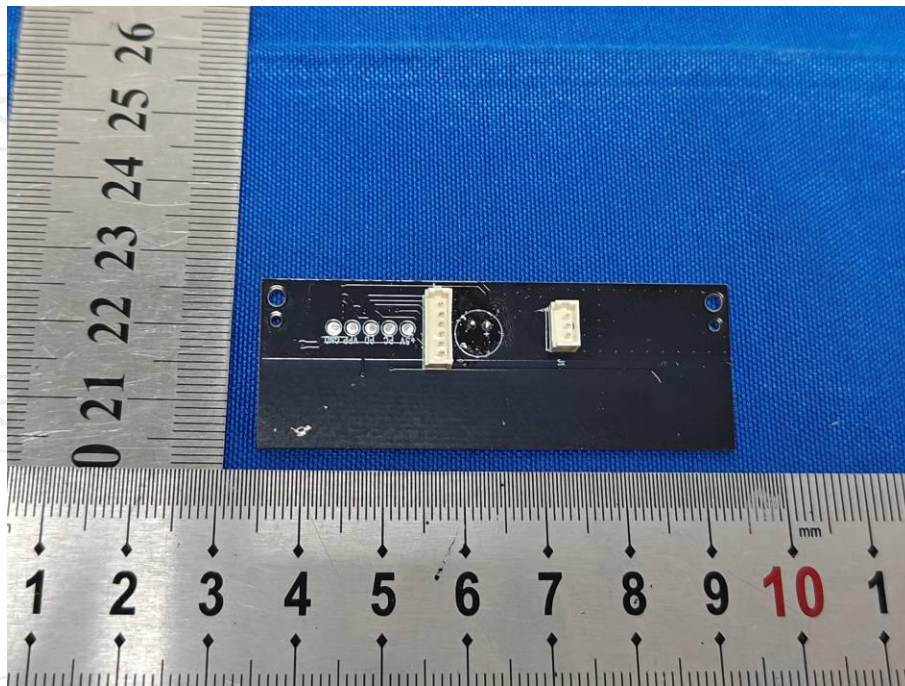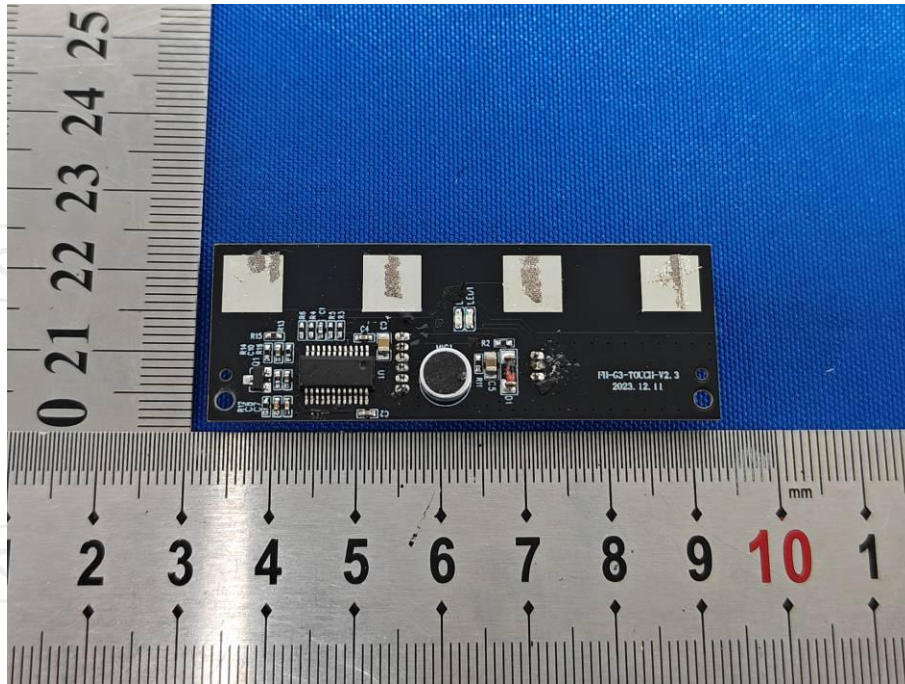

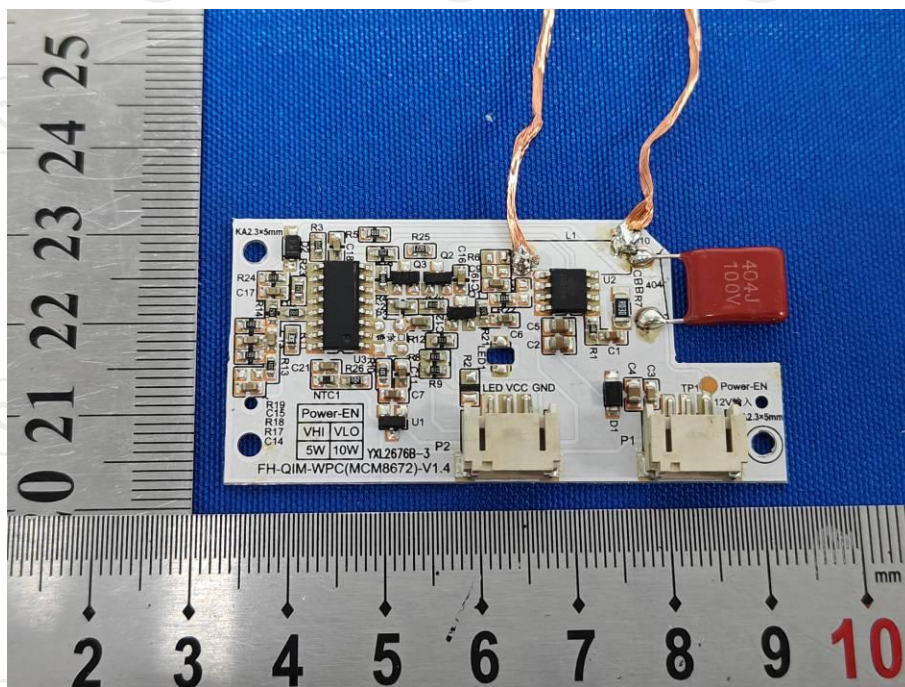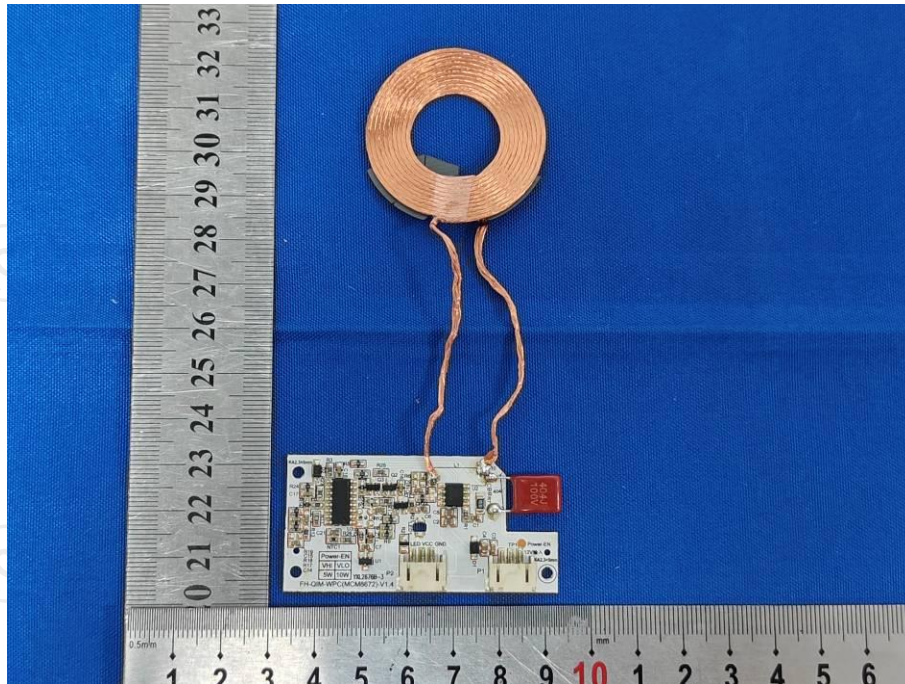

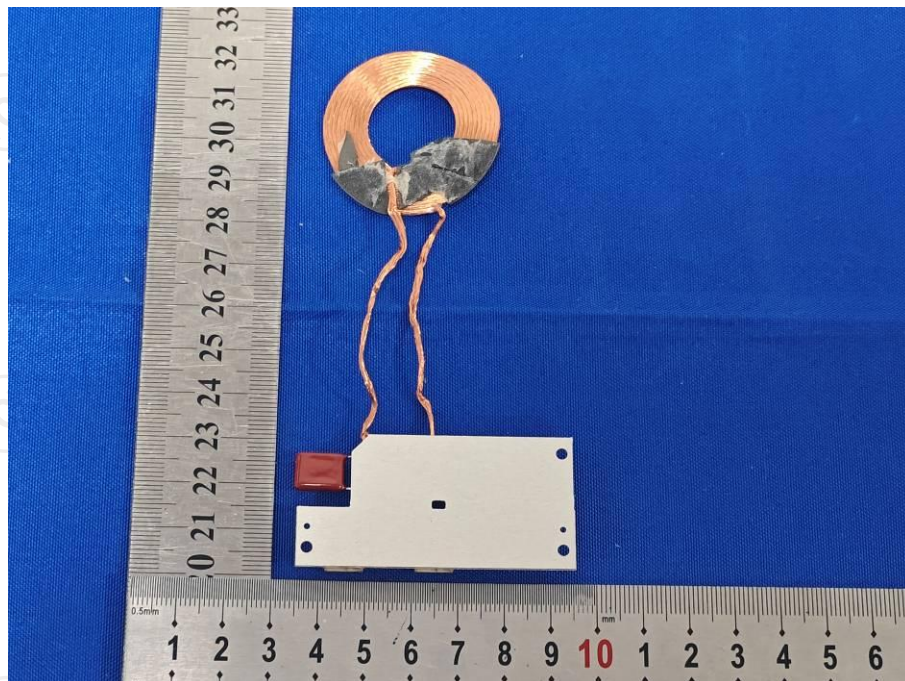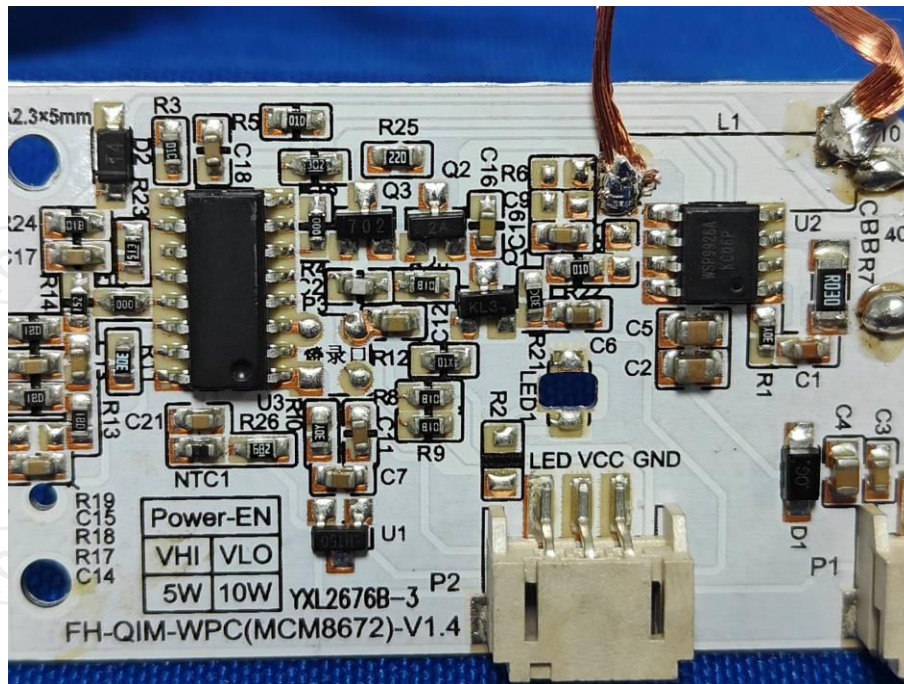

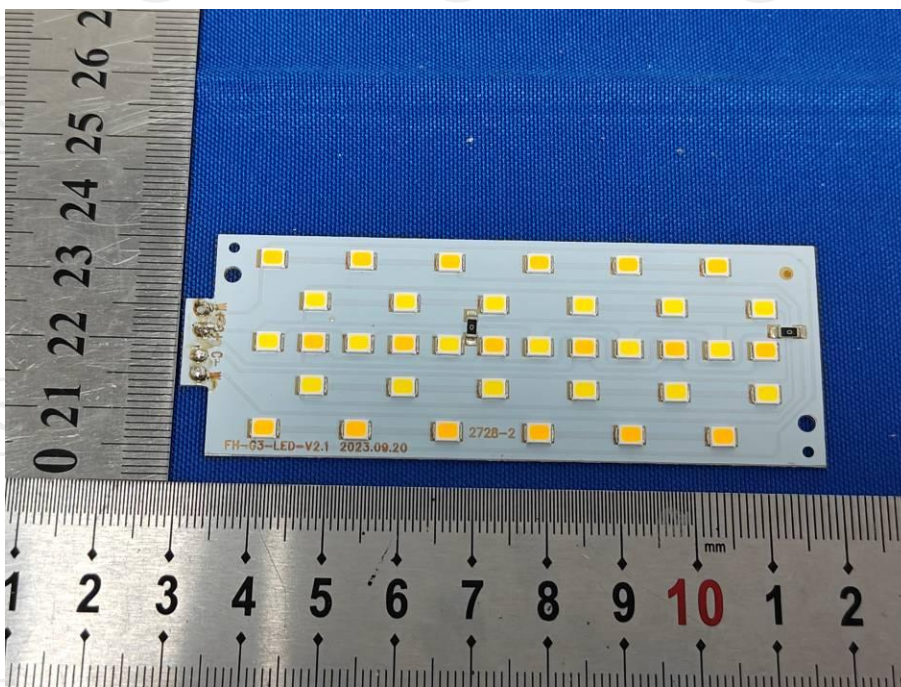

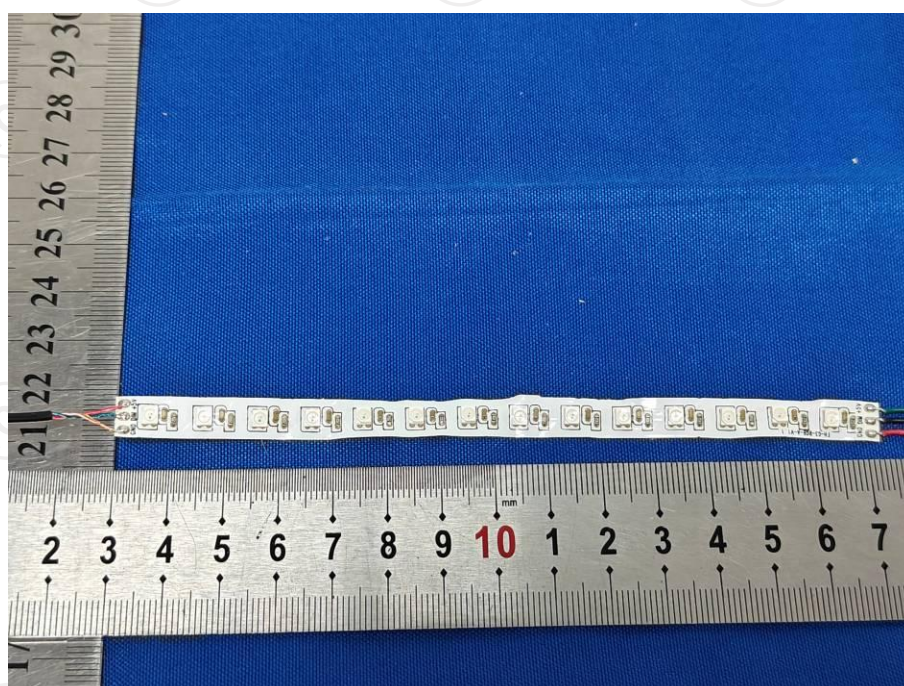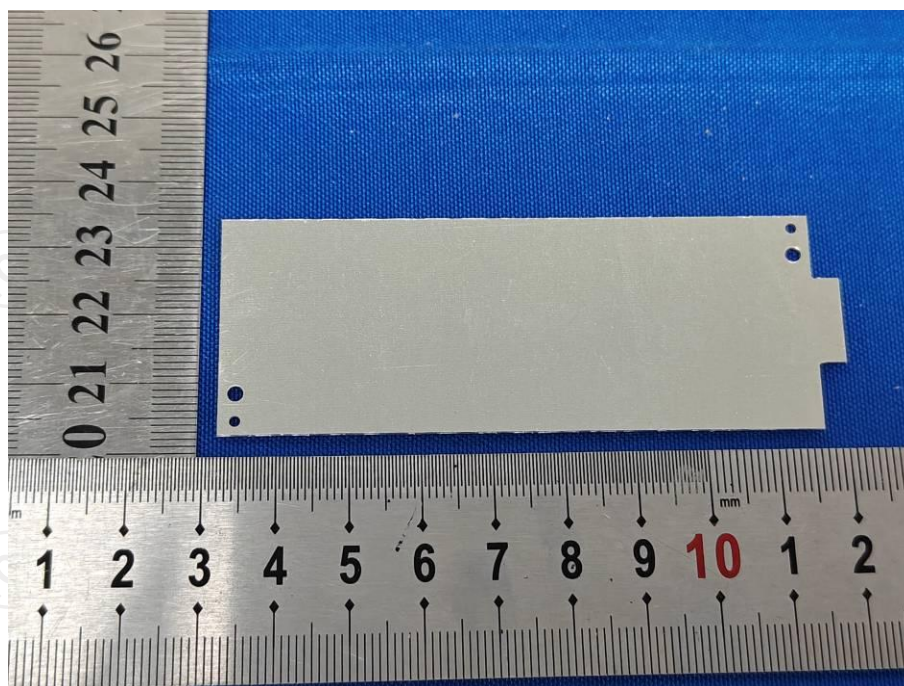

*******END OF REPORT*******