

FCC TEST REPORT

For

Dongguan Tyjin Electronics Co., Ltd.

Wireless Charging Pad

Model No.: C-067

Prepared For : Dongguan Tyjin Electronics Co., Ltd.
Address : Shitouling Industrial Zone, Wulian Village, Fenggang Town, Dongguan,
China 523690

Prepared By : Shenzhen Anbotek Compliance Laboratory Limited
Address : 1/F, Building D, Sogood Science and Technology Park, Sanwei
community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong,
China.518102
Tel: (86) 755-26066440 Fax: (86) 755-26014772

Report Number : SZAWW190104002-01

Date of Receipt : Jan. 04, 2019

Date of Test : Jan. 04~Feb. 19, 2019

Date of Report : Feb. 19, 2019

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	4
1.4. Description of Test Modes.....	5
1.5. Description Of Test Setup.....	6
1.6. Test Equipment List.....	7
1.7. Measurement Uncertainty.....	8
1.8. Description of Test Facility.....	8
2. Summary of Test Results.....	9
3. Conducted Emission Test.....	10
3.1. Test Standard and Limit.....	10
3.2. Test Setup.....	10
3.3. Test Procedure.....	10
3.4. Test Data.....	10
4. Radiation Spurious Emission and Band Edge.....	15
4.1. Test Standard and Limit.....	15
4.2. Test Setup.....	15
4.3. Test Procedure.....	16
4.4. Test Data.....	17
5. Antenna Requirement.....	23
5.1. Test Standard and Requirement.....	23
5.2. Antenna Connected Construction.....	23
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	24
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	26
APPENDIX III -- INTERNAL PHOTOGRAPH.....	30

TEST REPORT

Applicant : Dongguan Tyjin Electronics Co., Ltd.
Manufacturer : Dongguan Tyjin Electronics Co., Ltd.
Product Name : Wireless Charging Pad
Model No. : C-067
Trade Mark : N.A.
Rating(s) : Input: 5V--- 2A
Output: 5W

Test Standard(s) : FCC Part15 Subpart C 2018, Paragraph 15.209

Test Method(s) : ANSI C63.10: 2013

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.

Date of Test

Jan. 04~Feb. 19, 2019

Prepared By



Oliay Yang

(Engineer / Oliay Yang)

Reviewer

Snowy Meng

(Supervisor / Snowy Meng)

Approved & Authorized Signer

Sally Zhang

(Manager / Sally Zhang)

1. General Information

1.1. Client Information

Applicant	:	Dongguan Tyjin Electronics Co., Ltd.
Address	:	Shitouling Industrial Zone, Wulian Village, Fenggang Town, Dongguan, China 523690
Manufacturer	:	Dongguan Tyjin Electronics Co., Ltd.
Address	:	Shitouling Industrial Zone, Wulian Village, Fenggang Town, Dongguan, China 523690
Factory	:	Dongguan Tyjin Electronics Co., Ltd.
Address	:	Shitouling Industrial Zone, Wulian Village, Fenggang Town, Dongguan, China 523690

1.2. Description of Device (EUT)

Product Name	:	Wireless Charging Pad	
Model No.	:	C-067	
Trade Mark	:	N.A.	
Test Power Supply	:	AC 240V, 60Hz for adapter/ AC 120V, 60Hz for adapter	
Test Sample No.	:	S1(Normal Sample), S2(Engineering Sample)	
Product Description	:	Operation Frequency:	111~205KHz
	:	Modulation Type:	MSK
	:	Antenna Type:	Inductive loop coil Antenna
	:	Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

Adapter	:	Model: A2013 Input: 100-240V~ 50-60Hz 0.7A Output: 3.6-6.5V=== 3A/ 6.5-9V=== 2A/ 9-12V=== 1.5A
Mobile Phone	:	iPhone

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.



Remark: All the conditions have been tested. It is found that 5W is the worst mode, and the data in the report only reflects the worst mode.

Pretest Mode	Description
Mode 1	TX Mode

For Conducted Emission	
Final Test Mode	Description
Mode 1	TX Mode

For Radiated Emission	
Final Test Mode	Description
Mode 1	TX Mode

1.5. Description Of Test Setup

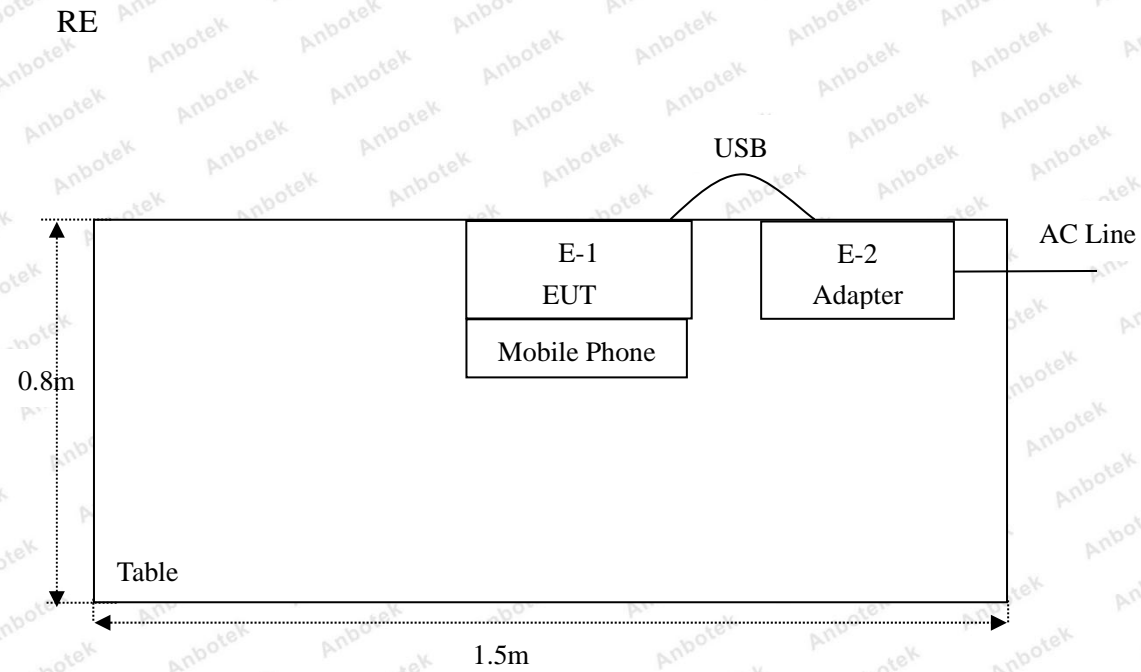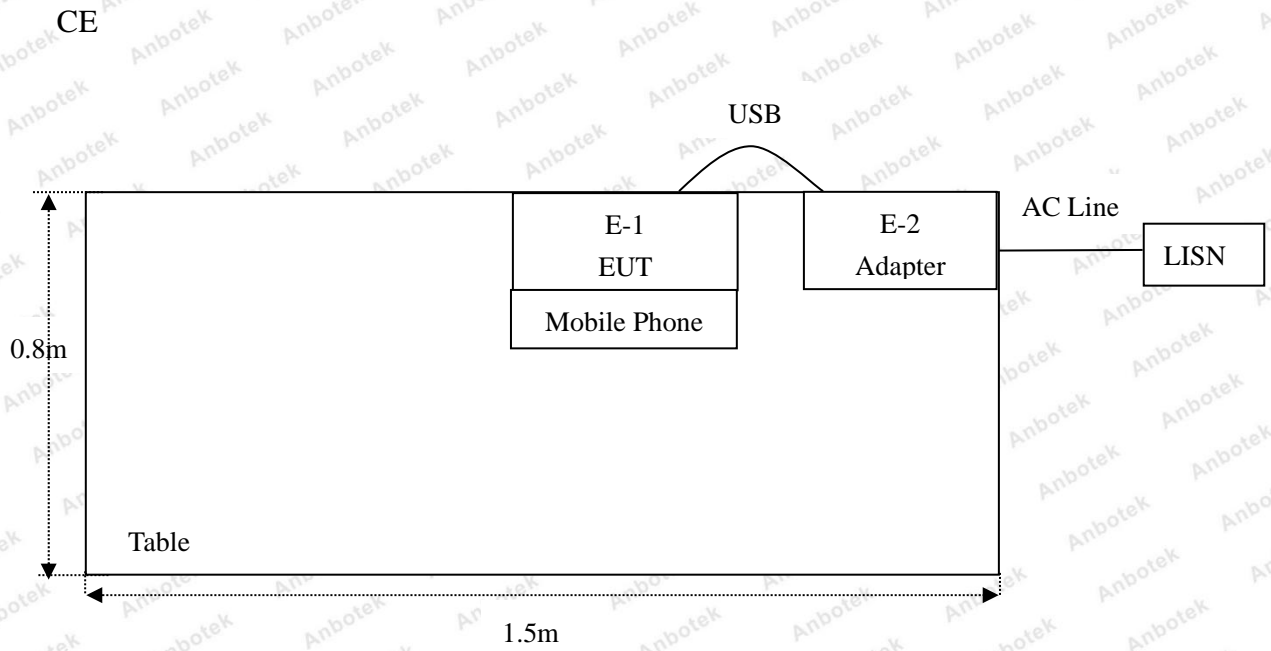

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Nov. 05, 2018	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESPI3	101604	Nov. 05, 2018	1 Year
3.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Nov. 05, 2018	1 Year
4.	Spectrum Analysis	Agilent	E4407B	US39390582	Nov. 05, 2018	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30D	KD17503	Nov. 05, 2018	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 20, 2018	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 19, 2018	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 20, 2018	1 Year
10.	Horn Antenna	A-INFO	LB-180400-KF	J211060628	Nov. 20, 2018	1 Year
11.	Pre-amplifier	SONOMA	310N	186860	Nov. 05, 2018	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Nov. 05, 2018	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Nov. 05, 2018	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Nov. 05, 2018	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Nov. 05, 2018	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Nov. 05, 2018	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Nov. 05, 2018	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Apr. 02, 2018	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80B	N/A	Nov. 01, 2018	1 Year

1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, July 31, 2017.

ISED-Registration No.: 8058A-1

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A-1, June 13, 2016.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518102

2. Summary of Test Results


Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS

3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
	5MHz~30MHz	60	50
Remark: (1) *Decreasing linearly with logarithm of the frequency. (2) The lower limit shall apply at the transition frequency.			

3.2. Test Setup

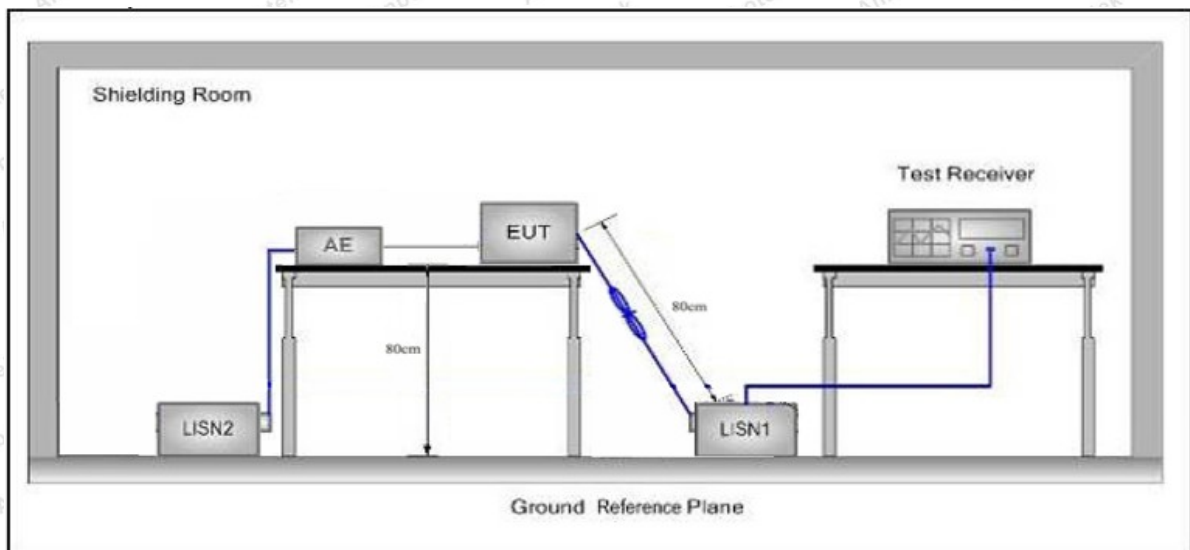

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2013 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: TX Mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 24.0°C Hum.: 47%

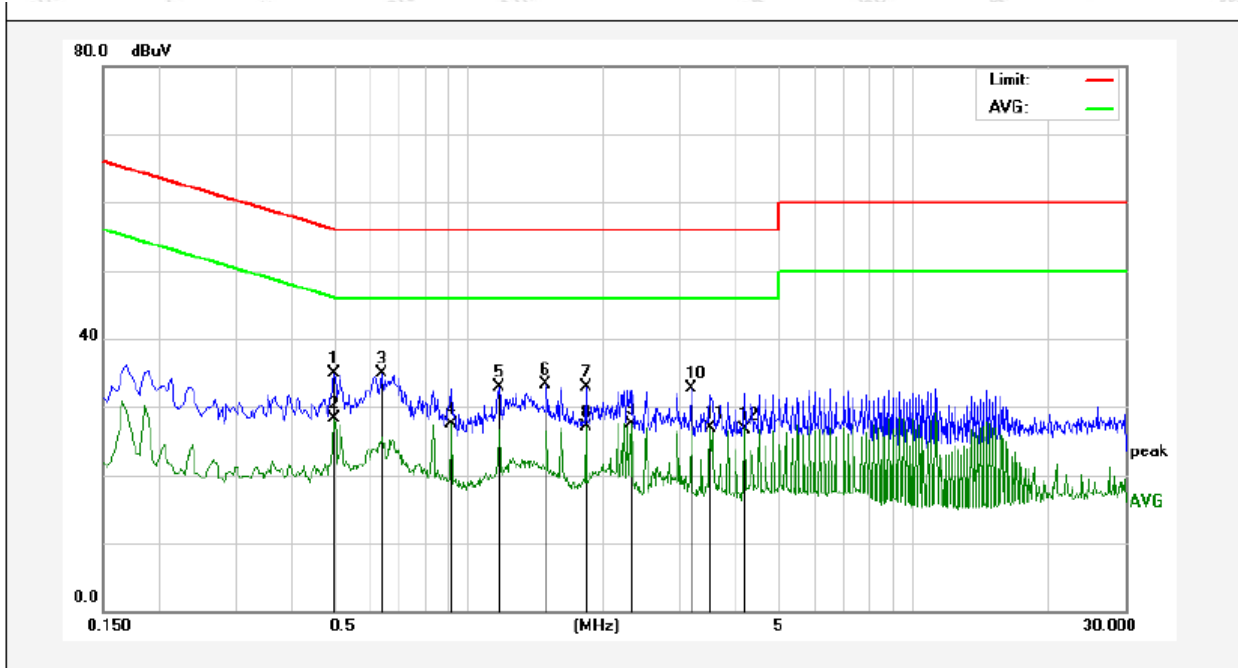

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4980	14.87	19.98	34.85	56.03	-21.18	QP	
2	0.4980	8.24	19.98	28.22	46.03	-17.81	AVG	
3	0.6340	14.98	20.02	35.00	56.00	-21.00	QP	
4	0.9140	7.35	20.10	27.45	46.00	-18.55	AVG	
5	1.1660	12.87	20.12	32.99	56.00	-23.01	QP	
6	1.4940	13.24	20.13	33.37	56.00	-22.63	QP	
7	1.8340	12.70	20.14	32.84	56.00	-23.16	QP	
8	1.8340	6.87	20.14	27.01	46.00	-18.99	AVG	
9	2.3300	7.34	20.15	27.49	46.00	-18.51	AVG	
10	3.1700	12.46	20.16	32.62	56.00	-23.38	QP	
11	3.5020	6.66	20.17	26.83	46.00	-19.17	AVG	
12	4.1700	6.62	20.18	26.80	46.00	-19.20	AVG	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: TX Mode
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 24.0°C Hum.: 47%

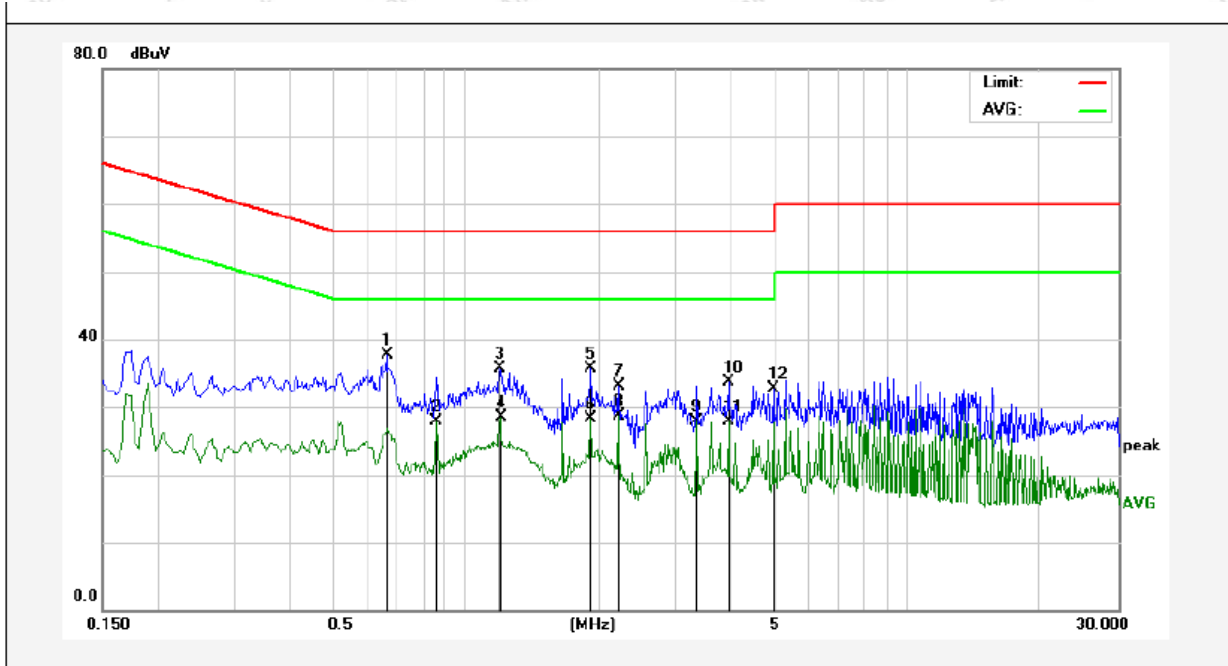

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.6620	17.71	20.03	37.74	56.00	-18.26	QP	
2	0.8580	7.77	20.08	27.85	46.00	-18.15	AVG	
3	1.1940	15.54	20.12	35.66	56.00	-20.34	QP	
4	1.2020	8.32	20.12	28.44	46.00	-17.56	AVG	
5	1.9220	15.61	20.14	35.75	56.00	-20.25	QP	
6	1.9220	8.25	20.14	28.39	46.00	-17.61	AVG	
7	2.2220	13.00	20.14	33.14	56.00	-22.86	QP	
8	2.2220	8.50	20.14	28.64	46.00	-17.36	AVG	
9	3.3300	7.68	20.17	27.85	46.00	-18.15	AVG	
10	3.9300	13.62	20.18	33.80	56.00	-22.20	QP	
11	3.9300	7.73	20.18	27.91	46.00	-18.09	AVG	
12	4.9580	12.50	20.21	32.71	56.00	-23.29	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: TX Mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 24.0°C Hum.: 47%

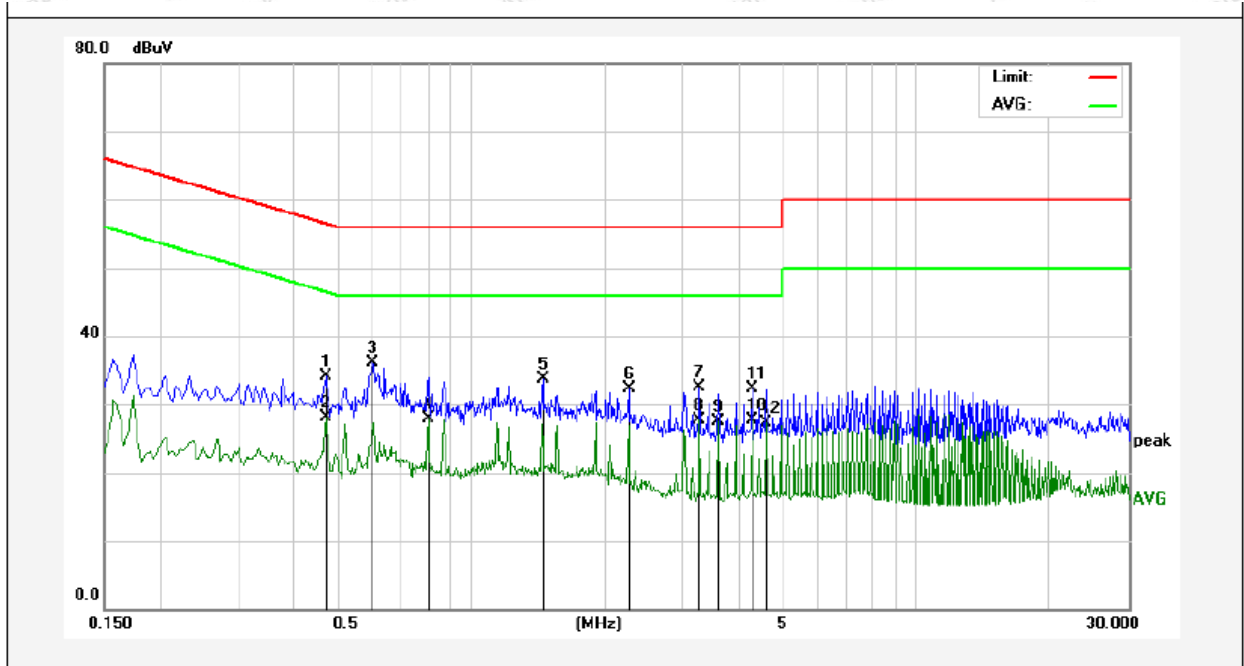

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4740	14.16	19.97	34.13	56.44	-22.31	QP	
2	0.4740	8.18	19.97	28.15	46.44	-18.29	AVG	
3	0.6020	16.18	20.01	36.19	56.00	-19.81	QP	
4	0.8020	7.90	20.07	27.97	46.00	-18.03	AVG	
5	1.4500	13.58	20.13	33.71	56.00	-22.29	QP	
6	2.2620	12.15	20.15	32.30	56.00	-23.70	QP	
7	3.2700	12.32	20.17	32.49	56.00	-23.51	QP	
8	3.2700	7.55	20.17	27.72	46.00	-18.28	AVG	
9	3.5900	7.37	20.17	27.54	46.00	-18.46	AVG	
10	4.2738	7.44	20.19	27.63	46.00	-18.37	AVG	
11	4.2740	12.07	20.19	32.26	56.00	-23.74	QP	
12	4.6139	7.05	20.20	27.25	46.00	-18.75	AVG	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: TX Mode
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 24.0°C Hum.: 47%

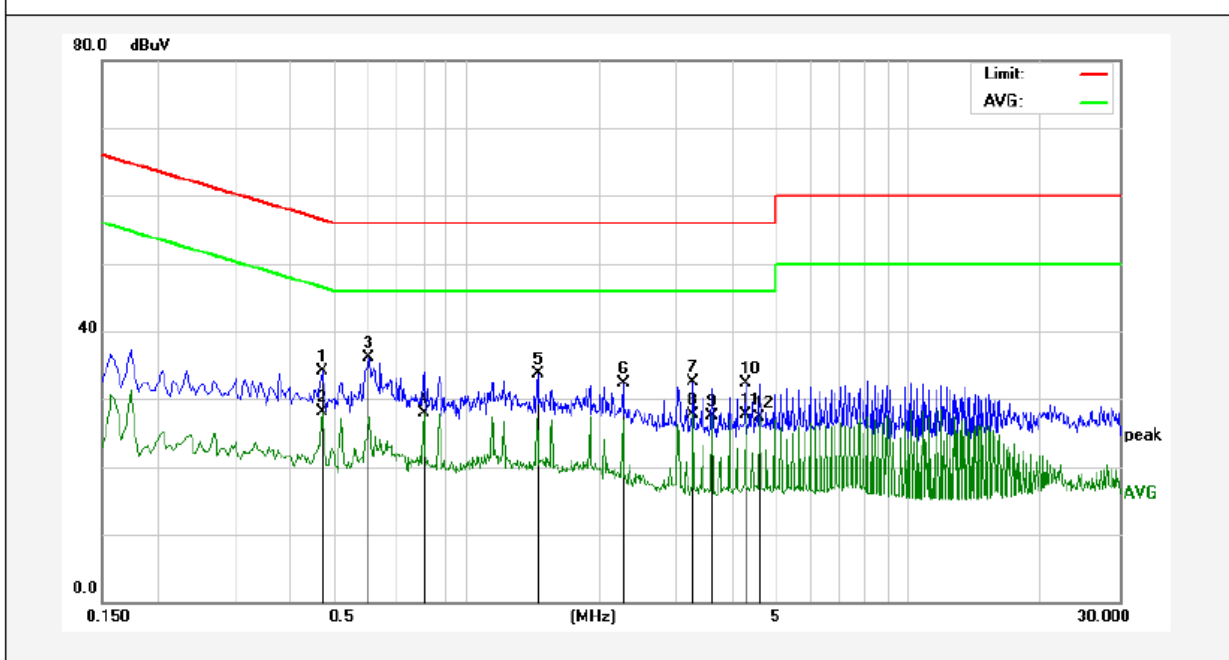

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Over Limit (dB)	Detector	Remark
1	0.4740	14.16	19.97	34.13	56.44	-22.31	QP	
2	0.4740	8.18	19.97	28.15	46.44	-18.29	AVG	
3	0.6020	16.18	20.01	36.19	56.00	-19.81	QP	
4	0.8020	7.90	20.07	27.97	46.00	-18.03	AVG	
5	1.4500	13.58	20.13	33.71	56.00	-22.29	QP	
6	2.2620	12.15	20.15	32.30	56.00	-23.70	QP	
7	3.2700	12.32	20.17	32.49	56.00	-23.51	QP	
8	3.2700	7.55	20.17	27.72	46.00	-18.28	AVG	
9	3.5900	7.37	20.17	27.54	46.00	-18.46	AVG	
10	4.2740	12.07	20.19	32.26	56.00	-23.74	QP	
11	4.2740	7.44	20.19	27.63	46.00	-18.37	AVG	
12	4.6140	7.05	20.20	27.25	46.00	-18.75	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		-	74.0	Peak	3

Remark:

(1)The lower limit shall apply at the transition frequency.

(2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

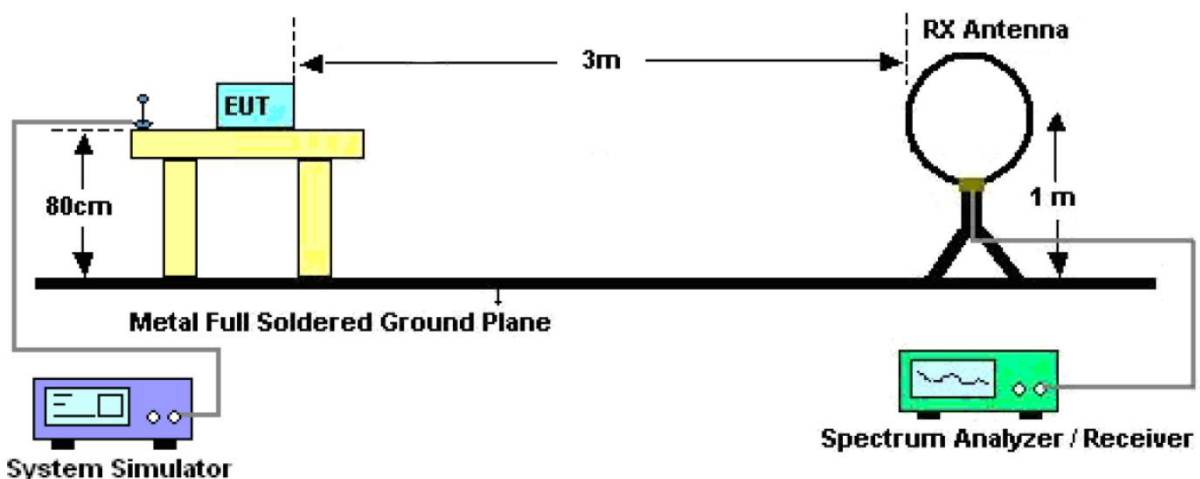


Figure 1. Below 30MHz

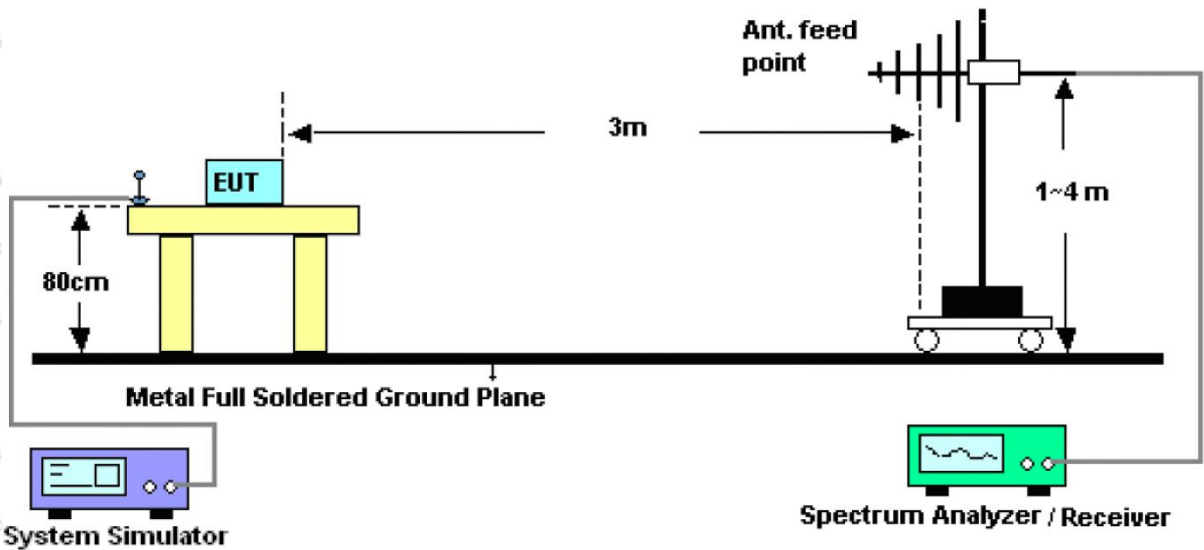


Figure 2. 30MHz to 1GHz

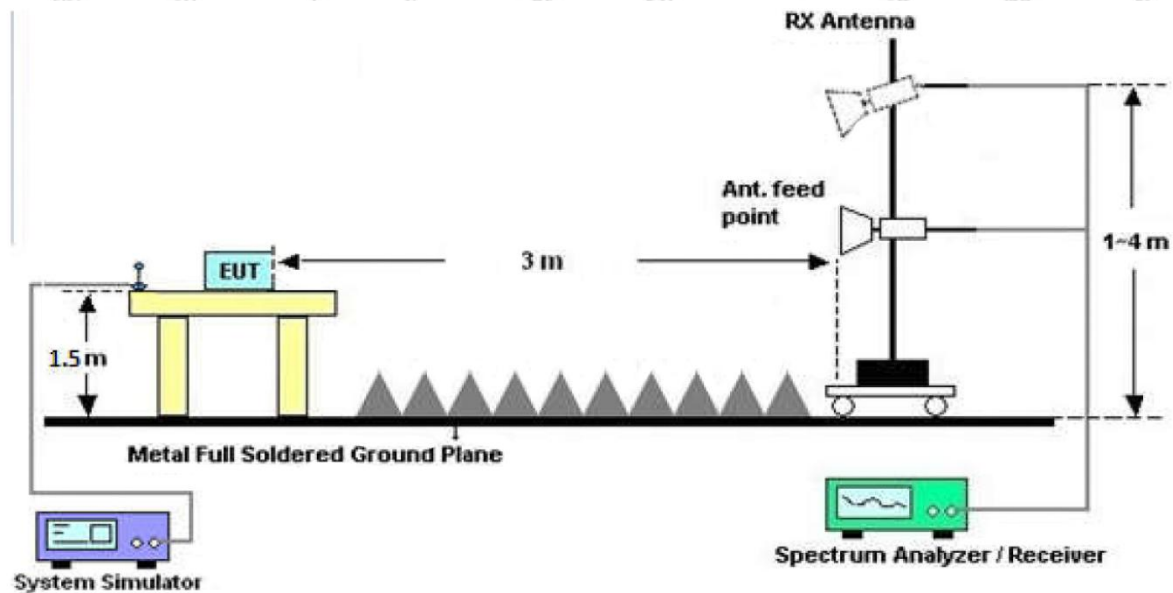


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW =1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9KHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.


4.4. Test Data

PASS

Test Results

(Between 9KHz – 30MHz)

Job No.:	SZAWW190104002-01	Power Source:	AC 120V, 60Hz for adapter
Standard:	FCC PART15 C _3m	Temp.(C)/Hum.(%RH):	24.0°C/47%RH
Test item:	Radiation Test	Distance:	3m
Test Mode:	Mode 1		

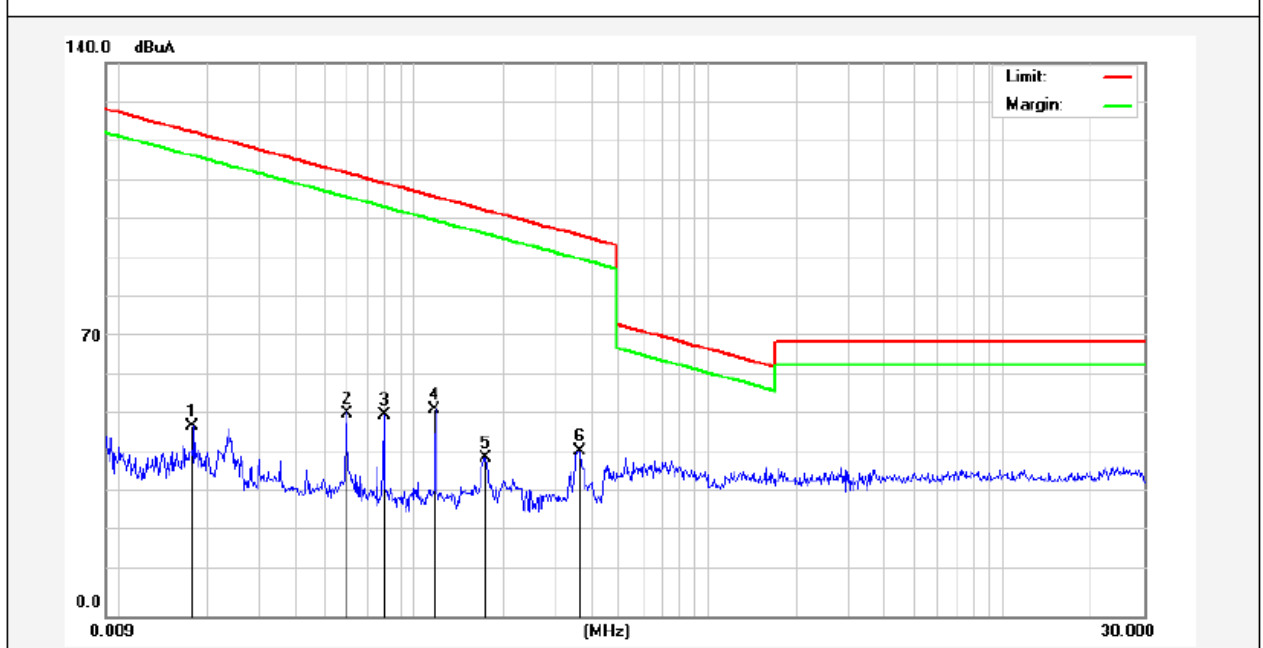


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	degree
				0					(dgc)
0.0177	46.08	19.28	2.53	0	67.89	142.48	-74.59	Peak	98
0.0177	26.16	19.28	2.53	0	47.97	122.48	-74.51	AV	98
0.0592	49.08	19.32	2.55	0	70.95	132.05	-61.10	Peak	114
0.0592	29.58	19.32	2.55	0	51.45	112.05	-60.60	AV	114
0.0792	47.96	19.36	2.56	0	69.88	129.54	-59.66	Peak	162
0.0792	28.91	19.44	2.56	0	50.91	109.54	-58.63	AV	162
0.1184	46.49	19.89	2.56	0	68.94	126.07	-57.13	Peak	156
0.1184	29.64	20.02	2.56	0	52.22	106.07	-53.85	AV	156
0.1751	37.77	19.89	2.56	0	60.22	122.69	-62.47	Peak	89
0.1751	17.45	20.02	2.56	0	40.03	102.69	-62.66	AV	89
0.3659	40.42	19.89	2.57	0	62.88	116.32	-53.44	Peak	66
0.3659	19.39	20.02	2.57	0	41.98	96.32	-54.34	AV	66

Remark: According to FCC PART 15.209 (d), the emission limits for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz, Radiated emission limits in these three bands are based on measurements employing an average detector.


(Between 30MHz -1000 MHz)

Job No.:	SZAWW190104002-01	Polarization:	Horizontal
Standard:	FCC PART15 C _3m	Power Source:	AC 240V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.1°C/50%RH
Test Mode:	Mode 1	Distance:	3m

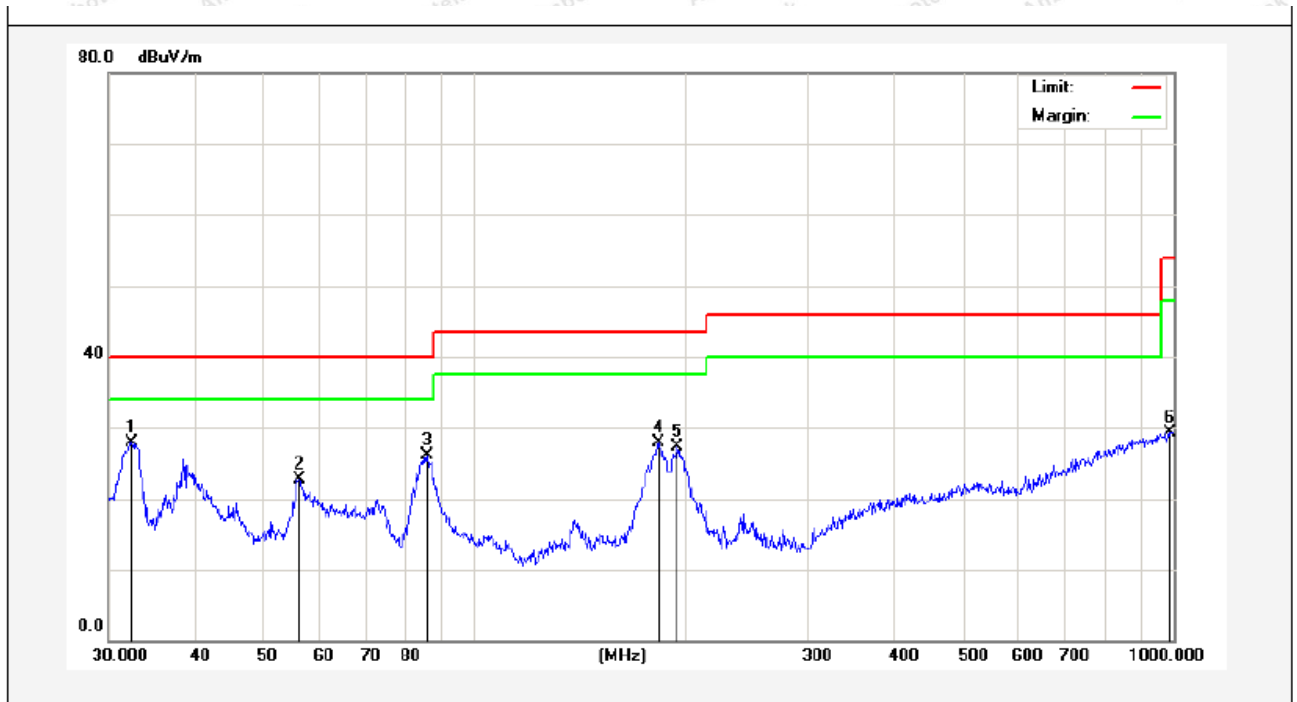


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	32.4059	45.72	-17.85	27.87	40.00	-12.13	QP	300	0	
2	56.1974	40.59	-17.80	22.79	40.00	-17.21	QP	300	54	
3	85.5977	48.40	-22.22	26.18	40.00	-13.82	QP	300	121	
4	183.2005	48.87	-20.87	28.00	43.50	-15.50	QP	300	223	
5	195.1365	47.68	-20.38	27.30	43.50	-16.20	QP	300	300	
6	986.0717	32.68	-3.36	29.32	54.00	-24.68	QP	300	360	

Job No.: SZAWW190104002-01 **Polarization:** Vertical
Standard: FCC PART15 C _3m **Power Source:** AC 240V, 60Hz for adapter
Test item: Radiation Test **Temp.(C)/Hum.(%RH):** 24.1 °C/50%RH
Test Mode: Mode 1 **Distance:** 3m

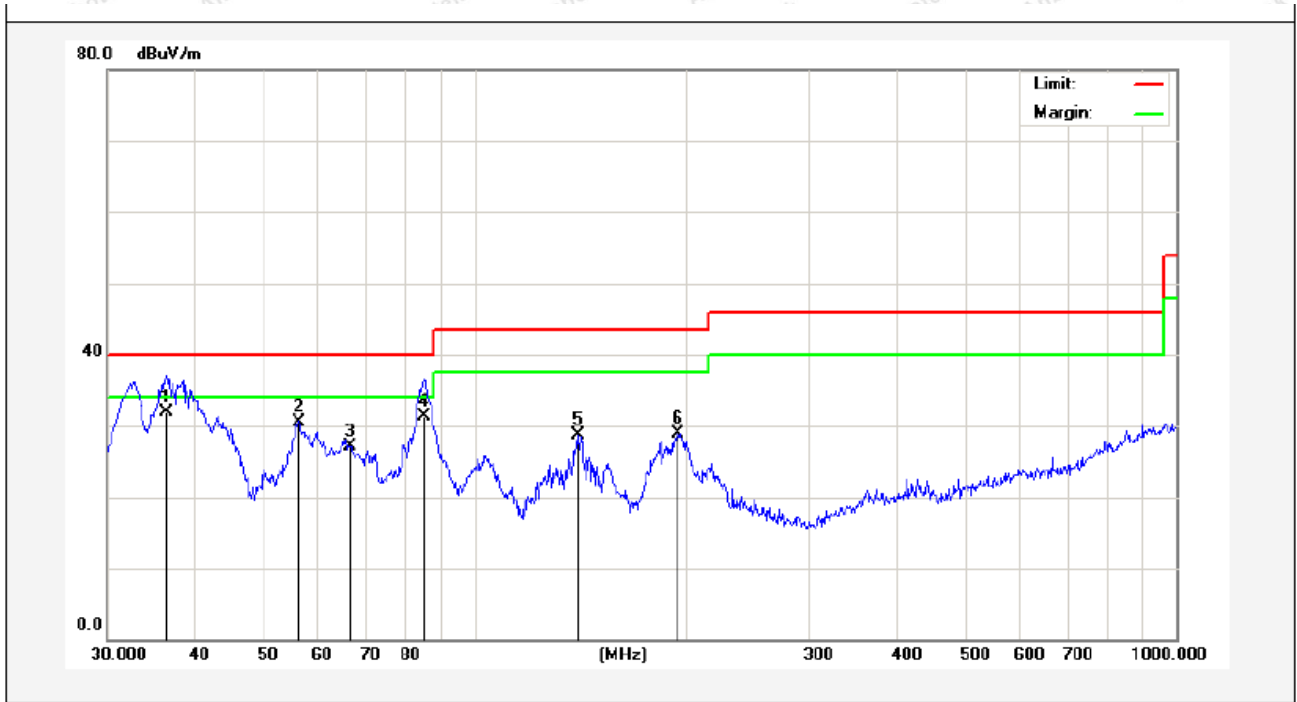


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	36.3714	47.30	-15.35	31.95	40.00	-8.05	QP	300	0	
2	56.1974	47.40	-16.80	30.60	40.00	-9.40	QP	300	57	
3	66.4989	46.53	-19.46	27.07	40.00	-12.93	QP	300	122	
4	84.9995	50.20	-18.95	31.25	40.00	-8.75	QP	300	233	
5	140.3421	47.26	-18.48	28.78	43.50	-14.72	QP	300	276	
6	195.1365	44.85	-15.89	28.96	43.50	-14.54	QP	300	360	

Job No.:	SZAWW190104002-01	Polarization:	Horizontal
Standard:	FCC PART15 C _3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.1°C/50%RH
Test Mode:	Mode 1	Distance:	3m

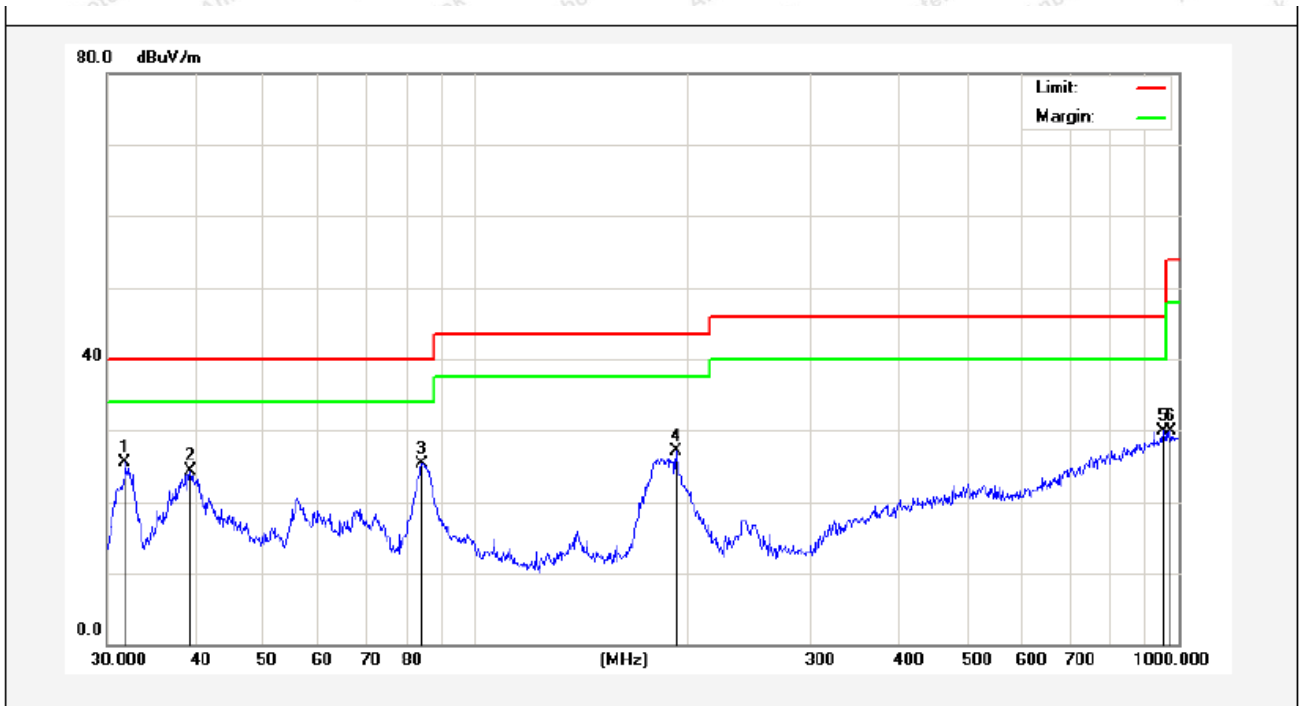

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	31.8427	43.46	-18.01	25.45	40.00	-14.55	QP	300	0	
2	39.4371	39.02	-14.67	24.35	40.00	-15.65	QP	300	54	
3	84.1100	47.54	-22.27	25.27	40.00	-14.73	QP	300	123	
4	193.0945	47.74	-20.60	27.14	43.50	-16.36	QP	300	223	
5	952.0937	33.76	-3.93	29.83	46.00	-16.17	QP	300	300	
6	975.7529	33.50	-3.54	29.96	54.00	-24.04	QP	300	360	

Job No.:	SZAWW190104002-01	Polarization:	Vertical
Standard:	FCC PART15 C _3m	Power Source:	AC 120V, 60Hz for adapter
Test item:	Radiation Test	Temp.(C)/Hum.(%RH):	24.1 °C/50%RH
Test Mode:	Mode 1	Distance:	3m

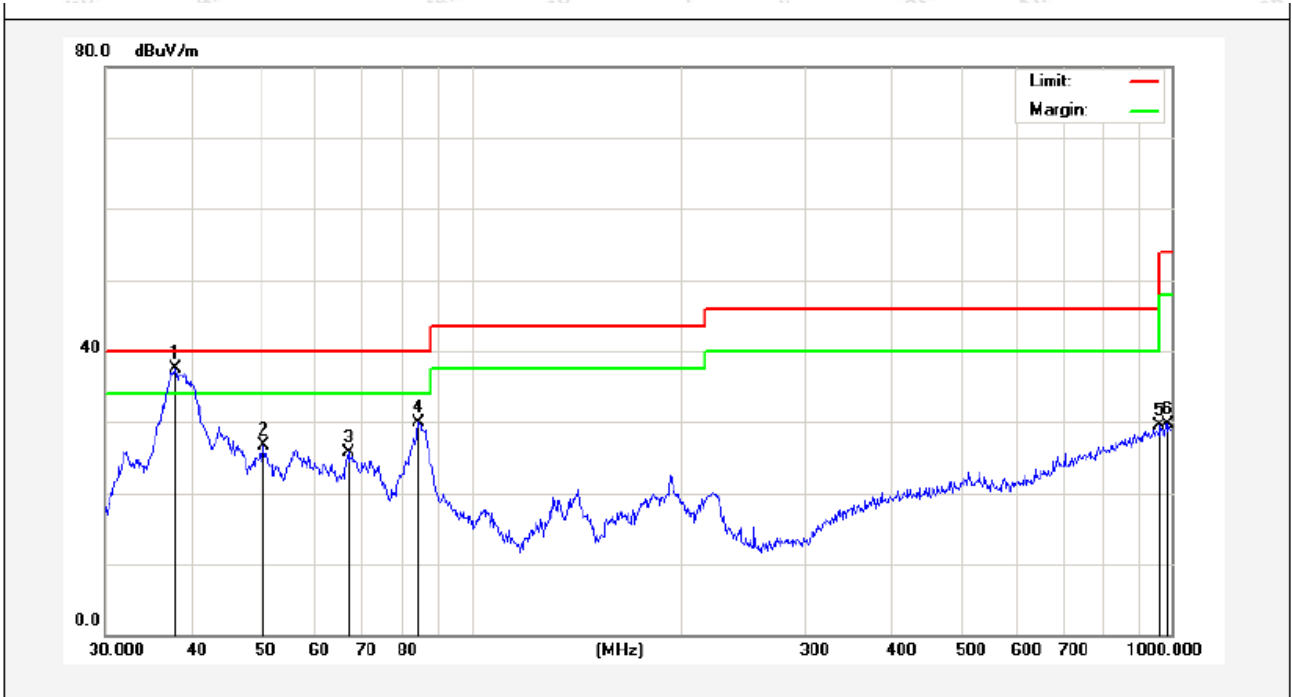

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	37.8121	52.02	-14.56	37.46	40.00	-2.54	QP	300	0	
2	50.4089	43.33	-16.59	26.74	40.00	-13.26	QP	300	27	
3	66.7325	45.22	-19.54	25.68	40.00	-14.32	QP	300	93	
4	84.1100	49.14	-19.27	29.87	40.00	-10.13	QP	300	122	
5	962.1623	32.33	-2.77	29.56	54.00	-24.44	QP	300	230	
6	989.5355	31.97	-2.31	29.66	54.00	-24.34	QP	300	360	


5. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard

5.2. Antenna Connected Construction

The Wireless Charging antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

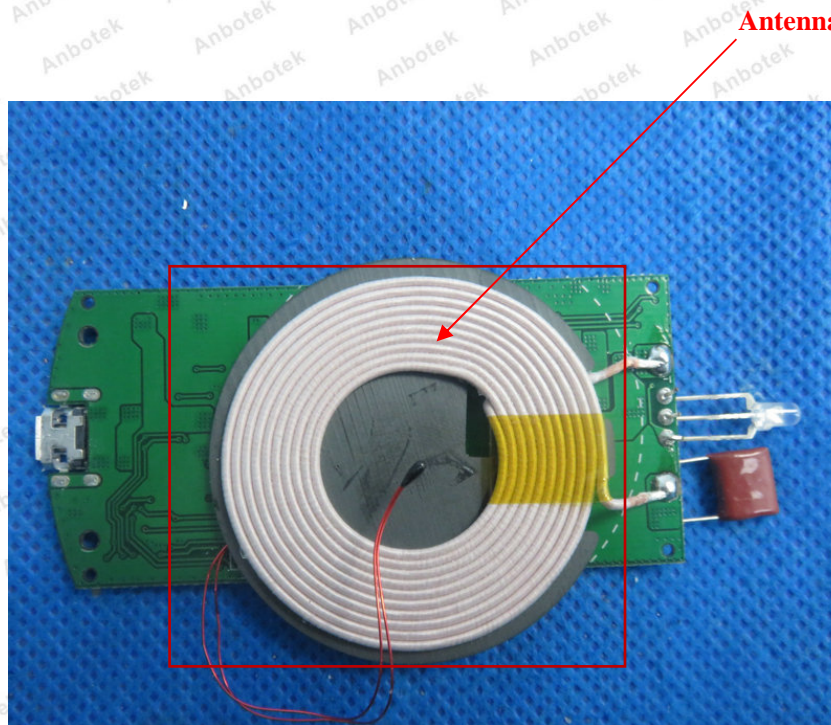



APPENDIX I-- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement




Photo of Radiation Emission Test


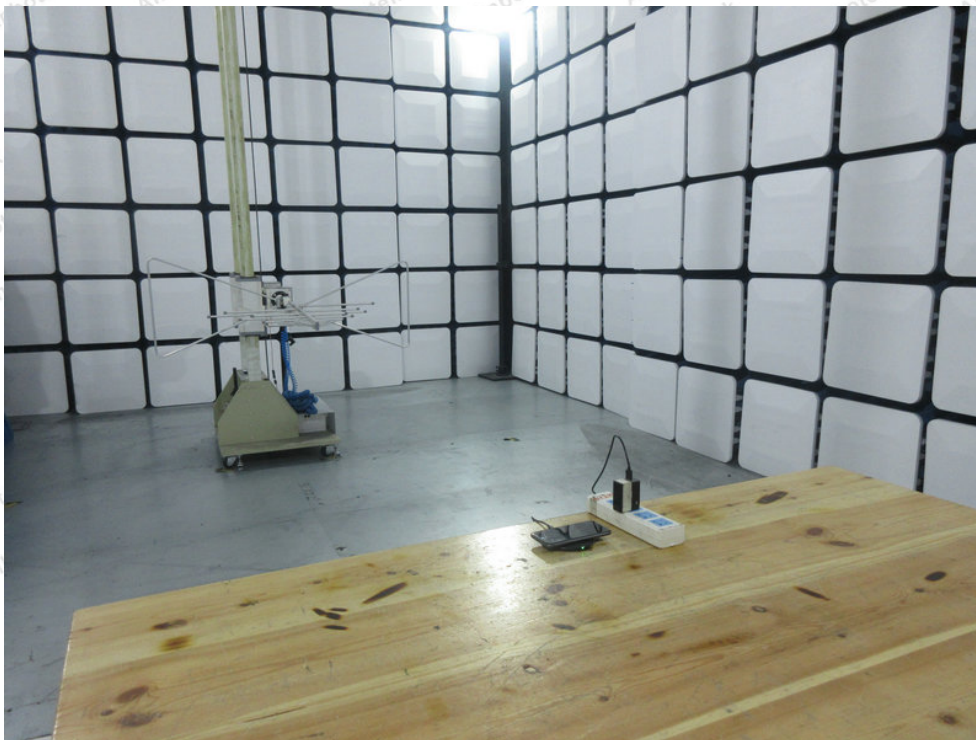


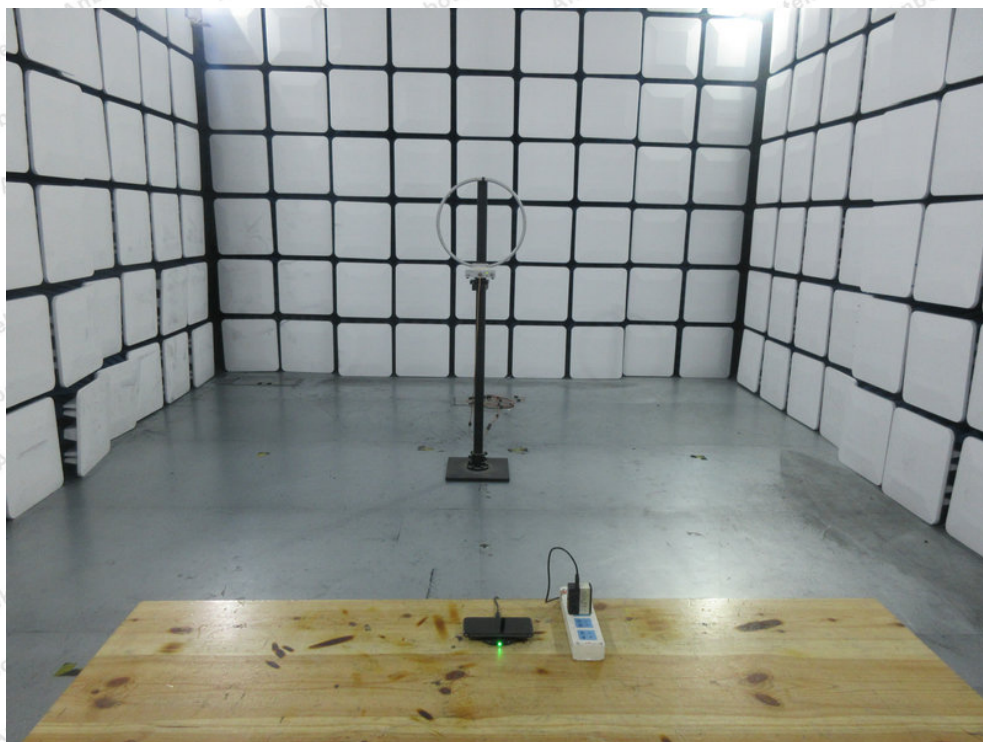


APPENDIX II -- EXTERNAL PHOTOGRAPH






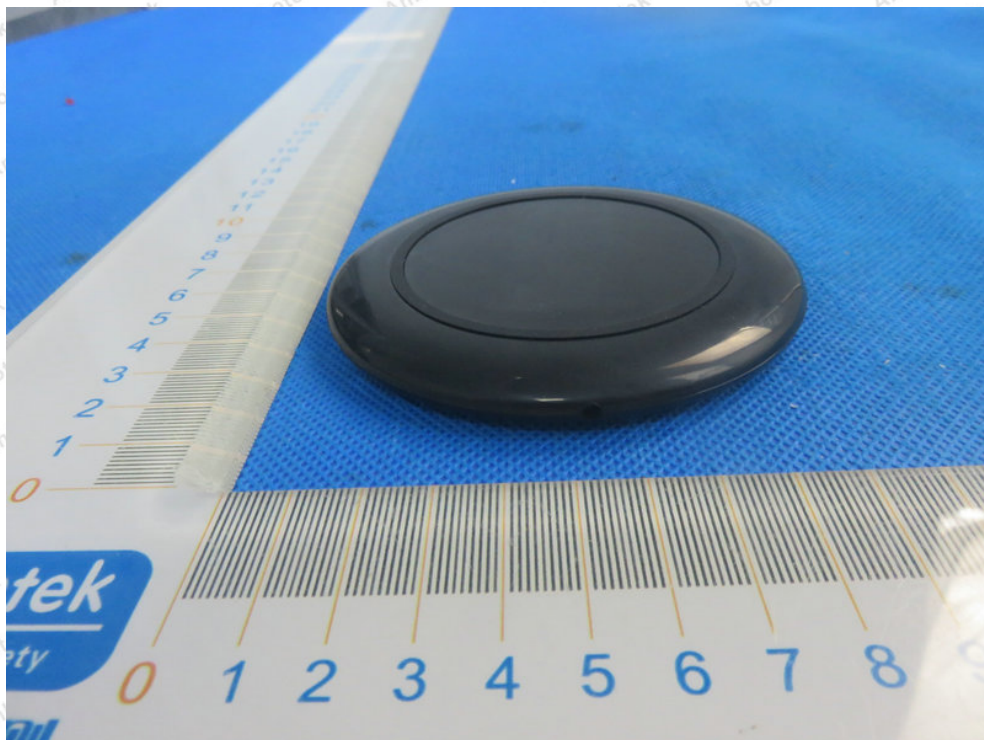


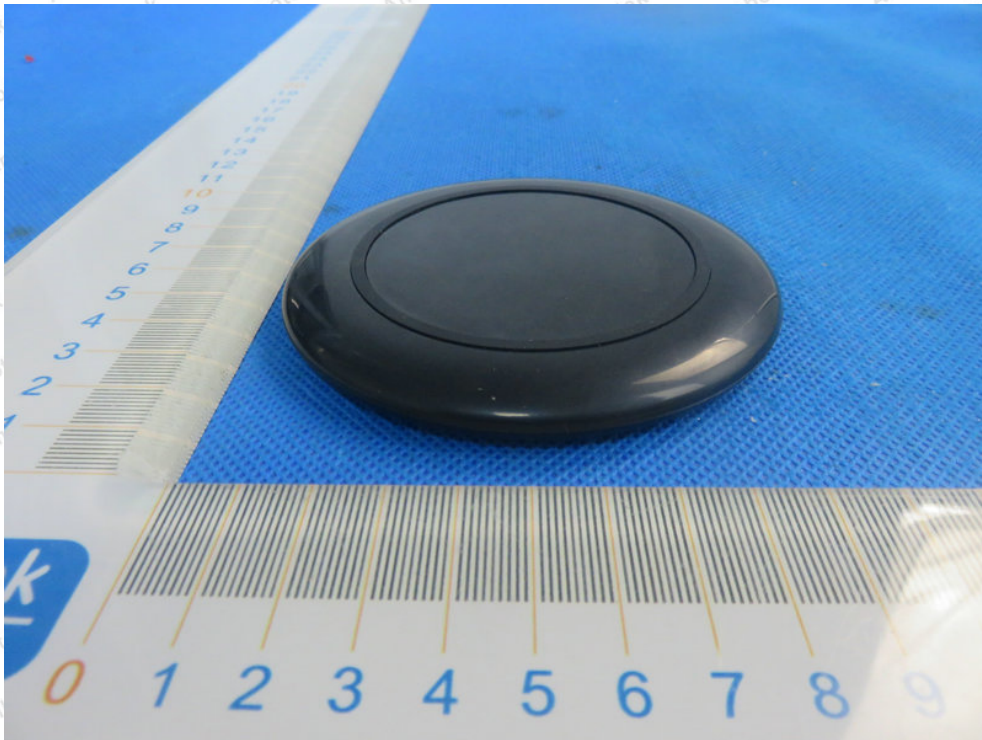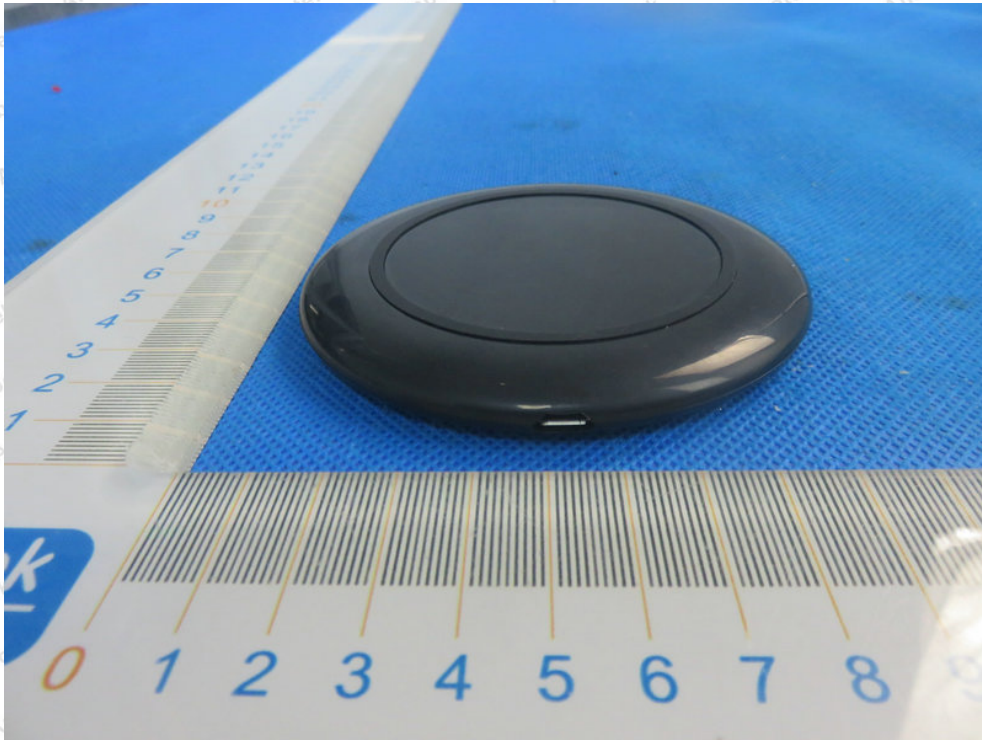


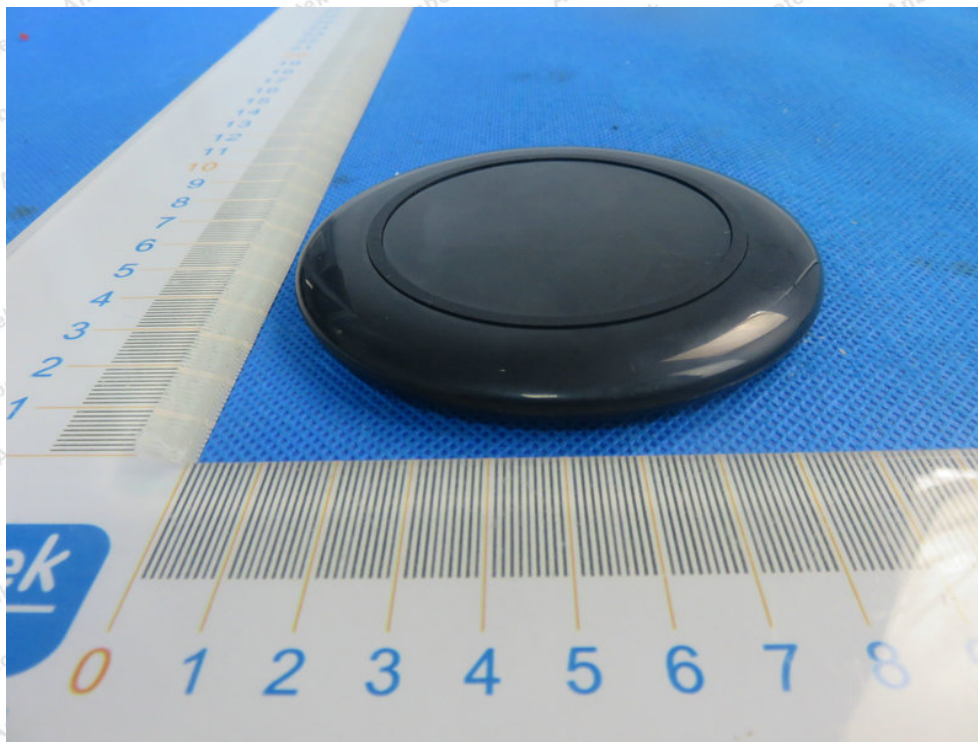

APPENDIX III -- INTERNAL PHOTOGRAPH

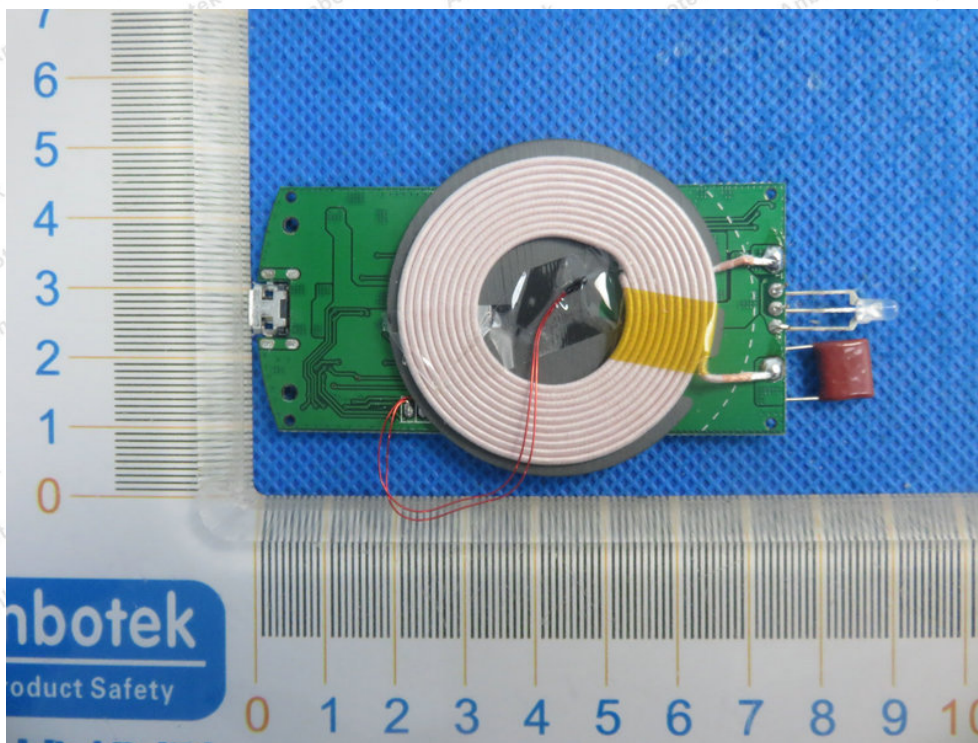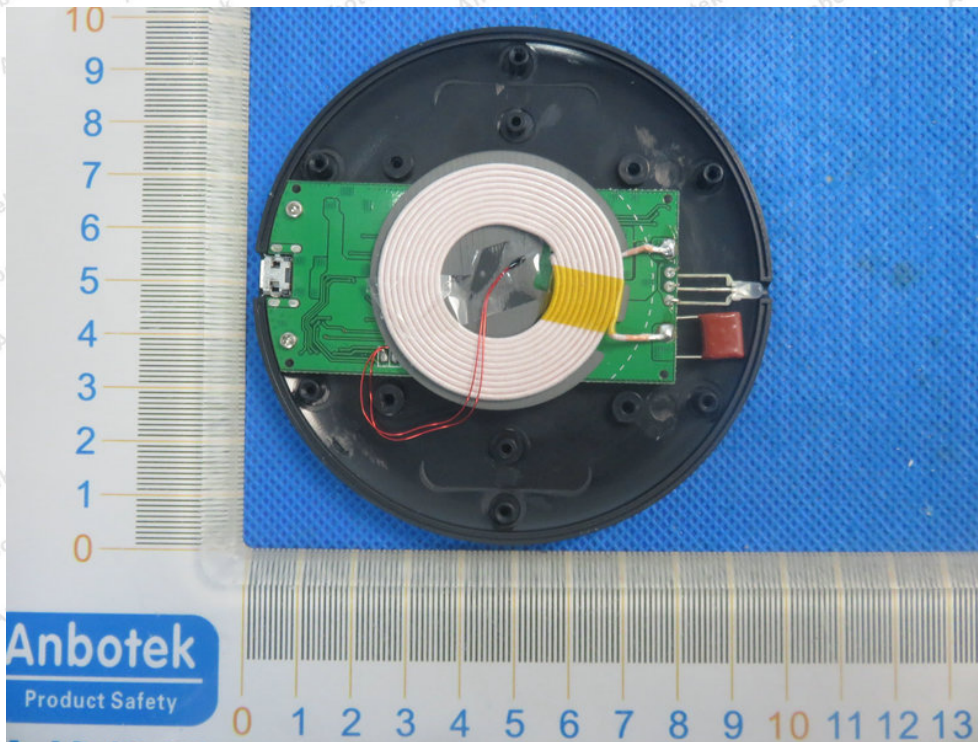

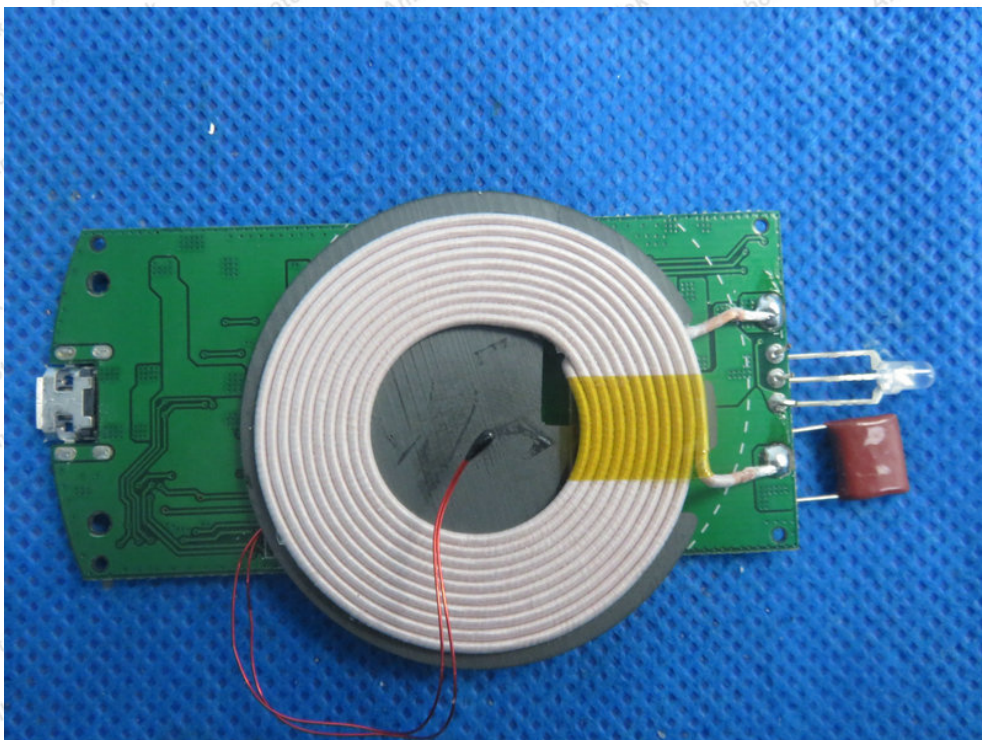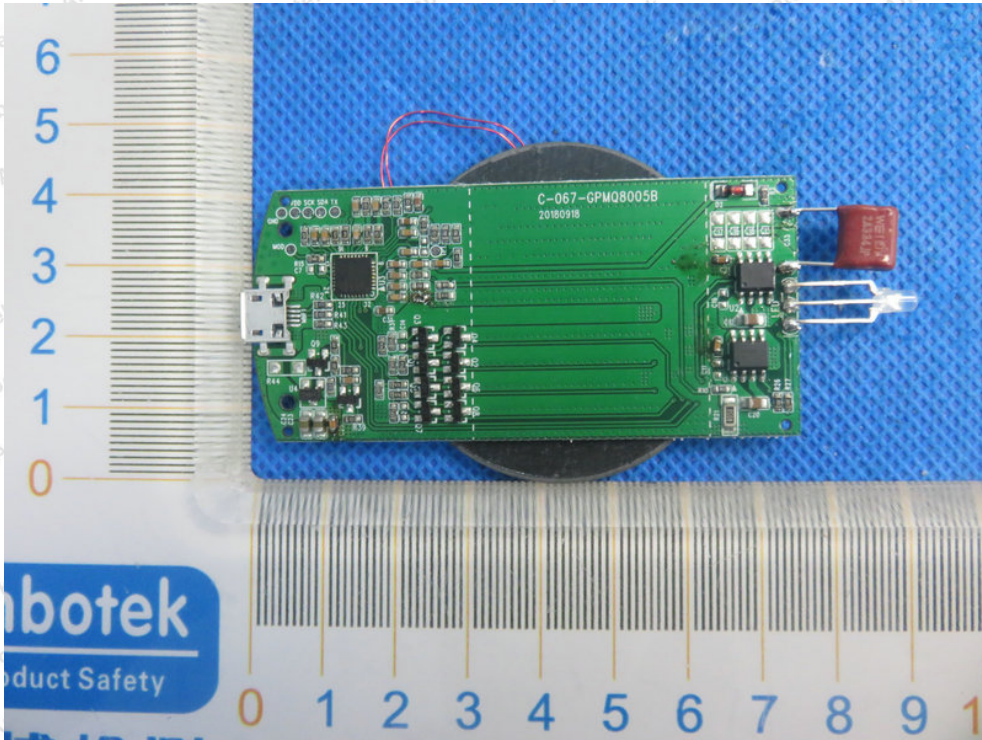

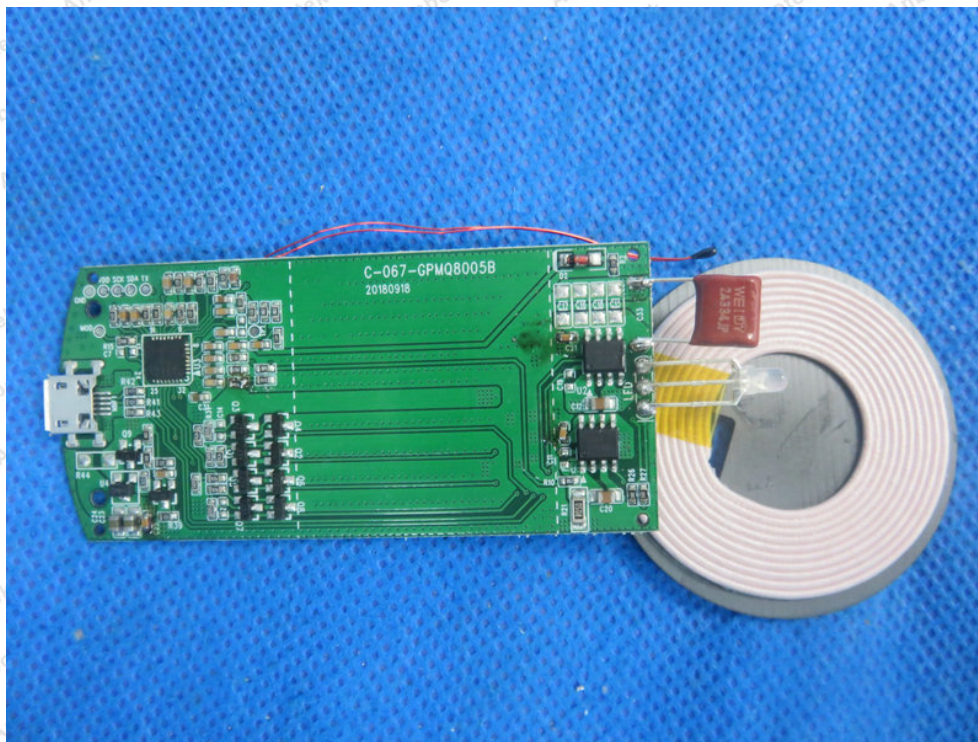

----- End of Report -----