

FCC TEST REPORT

Client Name : Dongguan Tyjin Electronics Co., Ltd.
Address : Room 101, Building 2, No.7 Keyan Road Wulian Village,
Fenggang Town Dongguan, Guangdong China 523690
Product Name : Wireless Charging Dock
Date : Aug. 04, 2021



Shenzhen Anbotek Compliance Laboratory Limited

Contents

1. General Information.....	4
1.1. Client Information.....	4
1.2. Description of Device (EUT).....	4
1.3. Auxiliary Equipment Used During Test.....	5
1.4. Description of Test Modes.....	5
1.5. Description Of Test Setup.....	6
1.6. Test Equipment List.....	8
1.7. Measurement Uncertainty.....	9
1.8. Description of Test Facility.....	9
2. Summary of Test Results.....	10
3. Conducted Emission Test.....	11
3.1. Test Standard and Limit.....	11
3.2. Test Setup.....	11
3.3. Test Procedure.....	11
3.4. Test Data.....	11
4. Radiation Spurious Emission and Band Edge.....	16
4.1. Test Standard and Limit.....	16
4.2. Test Setup.....	16
4.3. Test Procedure.....	17
4.4. Test Data.....	18
5. Antenna Requirement.....	23
5.1. Test Standard and Requirement.....	23
5.2. Antenna Connected Construction.....	23
APPENDIX I -- TEST SETUP PHOTOGRAPH.....	24
APPENDIX II -- EXTERNAL PHOTOGRAPH.....	26
APPENDIX III -- INTERNAL PHOTOGRAPH.....	30



TEST REPORT

Applicant : Dongguan Tyjin Electronics Co., Ltd.
Manufacturer : Dongguan Tyjin Electronics Co., Ltd.
Product Name : Wireless Charging Dock
Model No. : C-157, 2IHQI0787B0L2, 2IHQI0787W0L2
Trade Mark : N.A.
Rating(s) : Input: DC 5V, 3A / 9V, 2.22A
Wireless output 1: 5W, 7.5W, 10W
Wireless output 2: 5W
Total power: 15W Max

Test Standard(s) : FCC Part15 Subpart C 2019, Paragraph 15.209

Test Method(s) : ANSI C63.10: 2020

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with the FCC Part 15 Subpart C requirements.

This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.


Date of Receipt

Jul. 06, 2021

Date of Test

Jul. 06~Jul. 23, 2021

Prepared by



(Ella Liang)

Approved & Authorized Signer



(Kingkong Jin)

1. General Information

1.1. Client Information

Applicant	:	Dongguan Tyjin Electronics Co., Ltd.
Address	:	Room 101, Building 2, No.7 Keyan Road Wulian Village, Fenggang Town Dongguan,Guangdong China 523690
Manufacturer	:	Dongguan Tyjin Electronics Co., Ltd.
Address	:	Room 101, Building 2, No.7 Keyan Road Wulian Village, Fenggang Town Dongguan,Guangdong China 523690
Factory	:	Dongguan Tyjin Electronics Co., Ltd.
Address	:	Room 101, Building 2, No.7 Keyan Road Wulian Village, Fenggang Town Dongguan,Guangdong China 523690

1.2. Description of Device (EUT)

Product Name	:	Wireless Charging Dock	
Model No.	:	C-157, 2IHQI0787B0L2, 2IHQI0787W0L2 (Note: All samples are the same except the appearance, so we prepare "C-157" for test only.)	
Trade Mark	:	N.A.	
Test Power Supply	:	AC 120V, 60Hz for adapter / AC 240V, 60Hz for adapter	
Test Sample No.	:	1-2-1(Normal Sample), 1-2-1(Engineering Sample)	
Product Description	:	Operation Frequency:	110.1-205KHz
		Modulation Type:	ASK
		Antenna Type:	Inductive loop coil Antenna
		Antenna Gain(Peak):	0 dBi
Remark: 1) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.			

1.3. Auxiliary Equipment Used During Test

Wireless charging load	:	Manufacturer: Shenzhen Ouju Technology Co., Ltd. M/N: CD2526 Power: 5W Last Cal.: Oct. 26, 2020 Cal. Interval: 1 Year
Wireless charging load	:	Manufacturer: Shenzhen Ouju Technology Co., Ltd. M/N: CD2531 Power: 5W/7.5W/10W/15W Last Cal.: Oct. 26, 2020 Cal. Interval: 1 Year

1.4. Description of Test Modes

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Wireless Charging Mode for ANT1+ANT2
Mode 2	Wireless Charging Mode for ANT1
Mode 3	Wireless Charging Mode for ANT2



For Conducted Emission	
Final Test Mode	Description
Mode 1	Wireless Charging Mode for ANT1+ANT2
Mode 2	Wireless Charging Mode for ANT1
Mode 3	Wireless Charging Mode for ANT2

For Radiated Emission	
Final Test Mode	Description
Mode 1	Wireless Charging Mode for ANT1+ANT2
Mode 2	Wireless Charging Mode for ANT1
Mode 3	Wireless Charging Mode for ANT2

Note: (1) Test channel is 0.1408MHz and 0.1737MHz.

(2) The transfer system includes two coils, 2 coils can work individually or can work at the same time. All the situation(full load, half load and empty load) has been tested,only the worst situation (ANT1+ANT2 full load 15W) was recorded in the report.

1.5. Description Of Test Setup

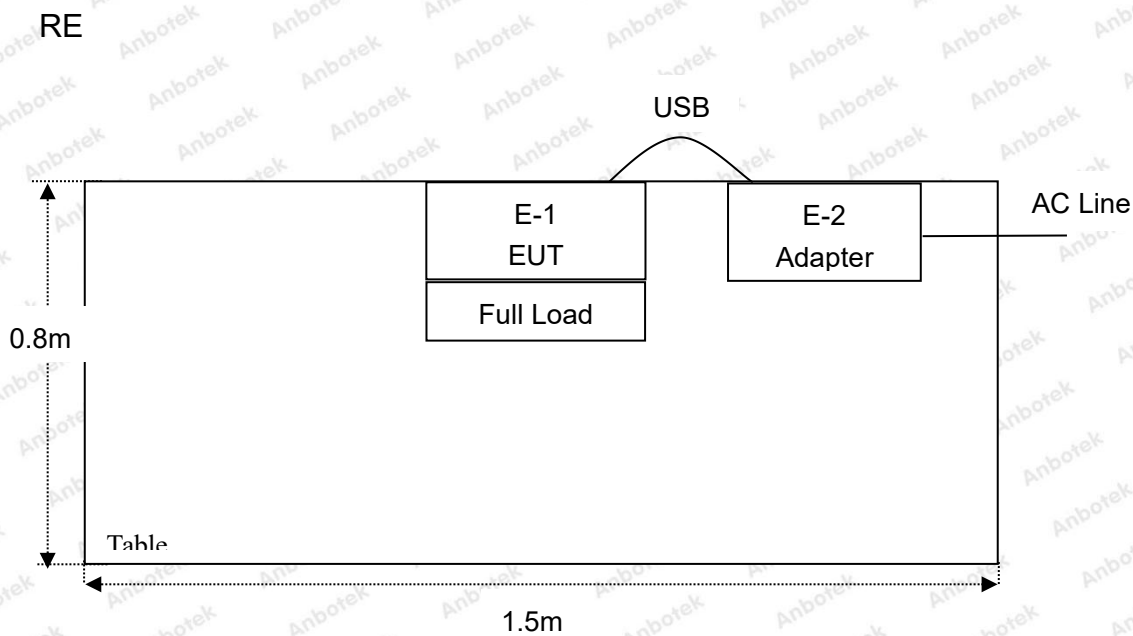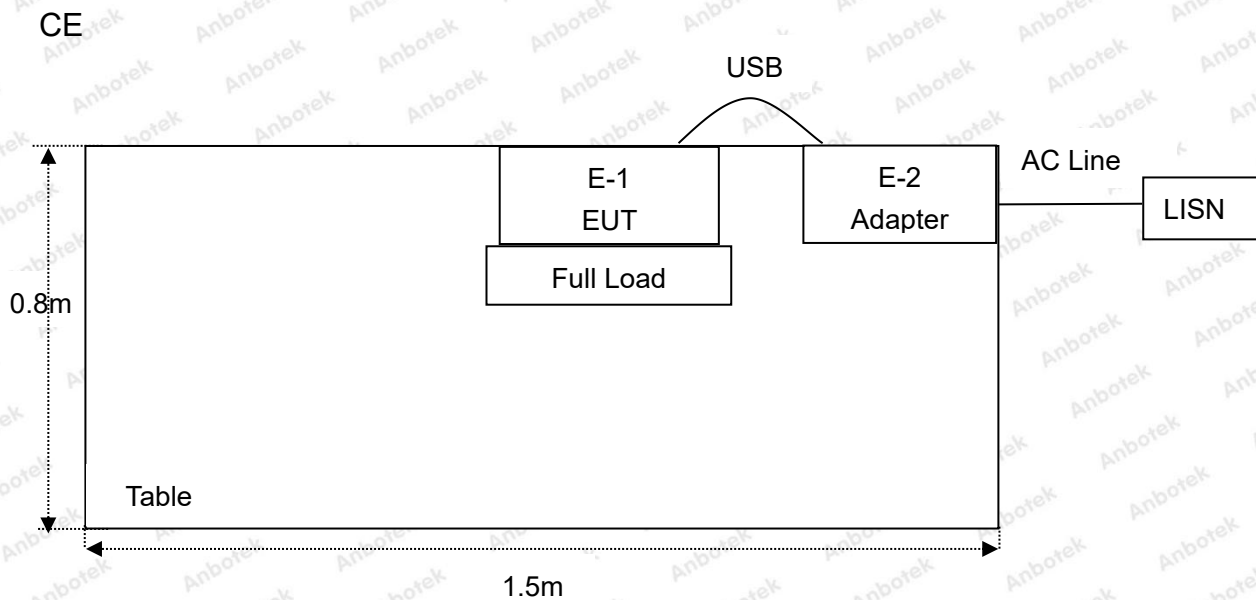

1.6. Test Equipment List

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	Oct. 26, 2020	1 Year
2.	EMI Test Receiver	Rohde & Schwarz	ESCI	100627	Oct. 26, 2020	1 Year
3.	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	Oct. 26, 2020	1 Year
4.	RF Switching Unit	Compliance Direction	RSU-M2	38303	Oct. 26, 2020	1 Year
5.	MAX Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
6.	Preamplifier	SKET Electronic	BK1G18G30 D	KD17503	Oct. 26, 2020	1 Year
7.	Double Ridged Horn Antenna	Instruments corporation	GTH-0118	351600	Nov. 02, 2020	2 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	VULB 9163-289	Nov. 02, 2020	2 Year
9.	Loop Antenna	Schwarzbeck	FMZB1519B	00053	Nov. 02, 2020	2 Year
10.	Horn Antenna	A-INFO	LB-180400- KF	J211060628	Nov. 02, 2020	2 Year
11.	Pre-amplifier	SONOMA	310N	186860	Oct. 26, 2020	1 Year
12.	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	N/A	N/A
13.	RF Test Control System	YIHENG	YH3000	2017430	Oct. 26, 2020	1 Year
14.	Power Sensor	DAER	RPR3006W	15I00041SN045	Oct. 26, 2020	1 Year
15.	Power Sensor	DAER	RPR3006W	15I00041SN046	Oct. 26, 2020	1 Year
16.	MXA Spectrum Analysis	Agilent	N9020A	MY51170037	Oct. 26, 2020	1 Year
17.	MXG RF Vector Signal Generator	Agilent	N5182A	MY48180656	Oct. 26, 2020	1 Year
18.	Signal Generator	Agilent	E4421B	MY41000743	Oct. 26, 2020	1 Year
19.	DC Power Supply	IVYTECH	IV3605	1804D360510	Oct. 26, 2020	1 Year
20.	Constant Temperature Humidity Chamber	ZHONGJIAN	ZJ-KHWS80 B	N/A	Oct. 26, 2020	1 Year

1.7. Measurement Uncertainty

Radiation Uncertainty	:	Ur = 3.9 dB (Horizontal)
		Ur = 3.8 dB (Vertical)
Conduction Uncertainty	:	Uc = 3.4 dB

1.8. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration No.: 184111

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 184111, September 30, 2020.

ISED-Registration No.: 8058A

Shenzhen Anbotek Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A, September 30, 2020.

Test Location

Shenzhen Anbotek Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.518128

2. Summary of Test Results

Standard Section	Test Item	Result
FCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS
FCC Part 15, Paragraph 15.209(a)(f)	Spurious Emission	PASS
Part 15.203	Antenna Requirement	PASS


3. Conducted Emission Test

3.1. Test Standard and Limit

Test Standard	FCC Part15 Section 15.207		
Test Limit	Frequency	Maximum RF Line Voltage (dBuV)	
		Quasi-peak Level	Average Level
	150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
	500kHz~5MHz	56	46
5MHz~30MHz	60	50	

Remark: (1) *Decreasing linearly with logarithm of the frequency.
 (2) The lower limit shall apply at the transition frequency.

3.2. Test Setup

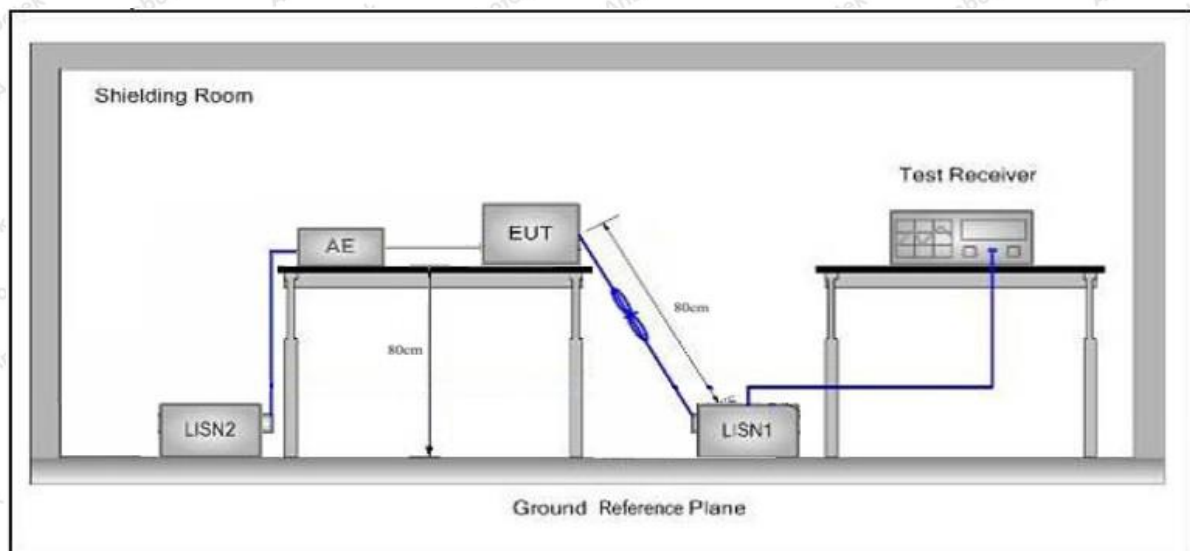

3.3. Test Procedure

The EUT system is connected to the power mains through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm coupling impedance for the EUT system. Please refer the block diagram of the test setup and photographs. Both sides of AC line are checked to find out the maximum conducted emission. In order to find the maximum emission levels, the relative positions of equipment and all of the interface cables shall be changed according to FCC ANSI C63.10-2020 on Conducted Emission Measurement.

The bandwidth of test receiver (ESCI) set at 9kHz.


The frequency range from 150kHz to 30MHz is checked.

3.4. Test Data

Please to see the following pages

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Live Line
 Tem.: 23.2°C Hum.: 48%

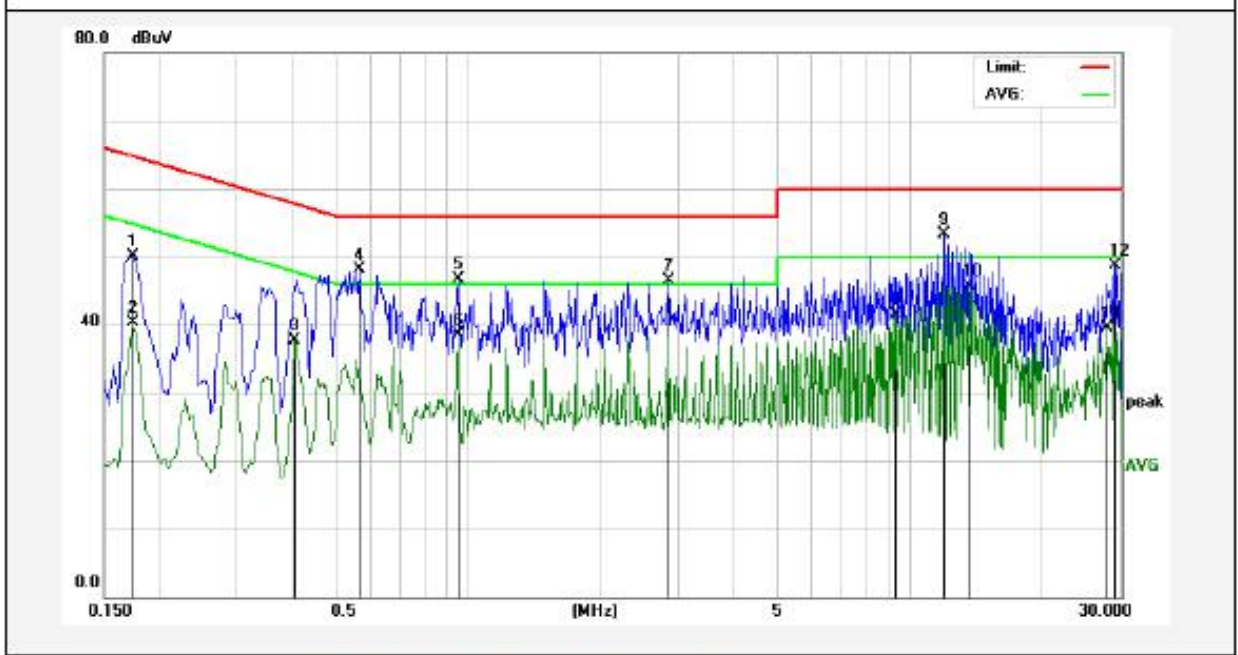

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1740	30.16	19.90	50.06	64.76	-14.70	QP	
2	0.1740	20.41	19.90	40.31	54.76	-14.45	AVG	
3	0.4060	17.73	19.94	37.67	47.73	-10.06	AVG	
4	0.5700	28.05	20.00	48.05	56.00	-7.95	QP	
5	0.9500	26.67	20.11	46.78	56.00	-9.22	QP	
6	0.9500	18.41	20.11	38.52	46.00	-7.48	AVG	
7	2.8500	26.44	20.16	46.60	56.00	-9.40	QP	
8	9.2660	21.21	20.32	41.53	50.00	-8.47	AVG	
9	11.9379	32.94	20.31	53.25	60.00	-6.75	QP	
10	13.5660	25.52	20.28	45.80	50.00	-4.20	AVG	
11	27.9420	19.29	20.27	39.56	50.00	-10.44	AVG	
12	29.0660	28.49	20.27	48.76	60.00	-11.24	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 120V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 23.2°C Hum.: 48%

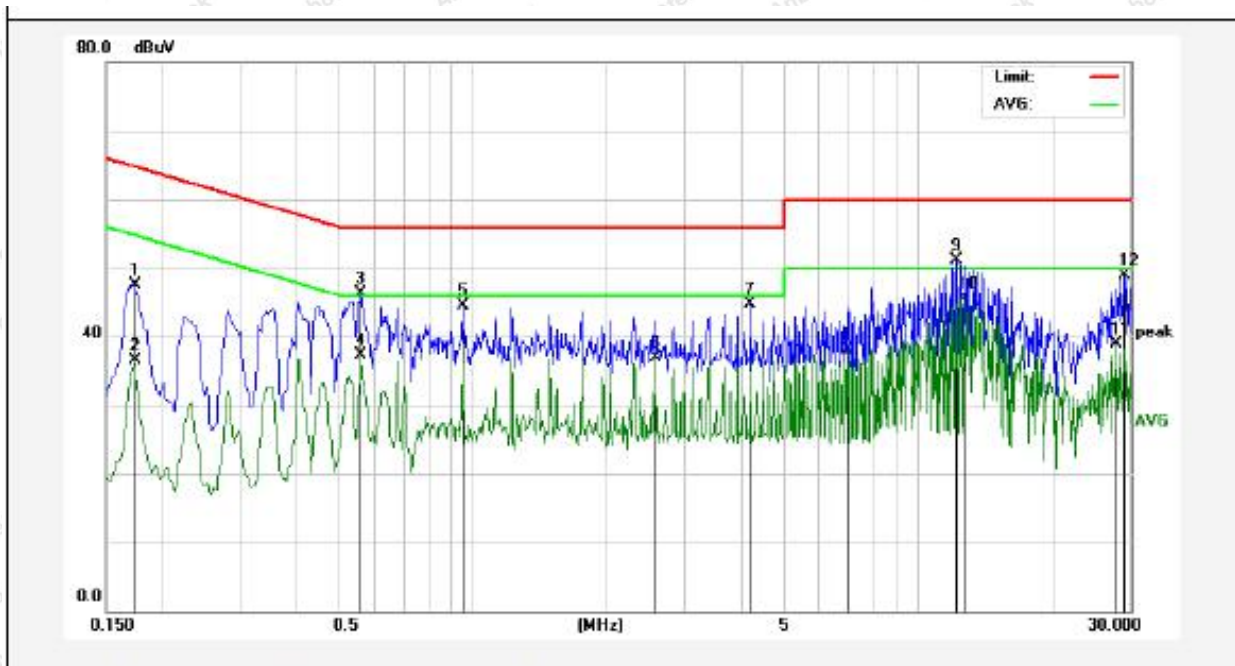

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1740	27.60	19.90	47.50	64.76	-17.26	QP	
2	0.1740	16.53	19.90	36.43	54.76	-18.33	AVG	
3	0.5620	26.36	20.00	46.36	56.00	-9.64	QP	
4	0.5620	17.24	20.00	37.24	46.00	-8.76	AVG	
5	0.9500	24.46	20.11	44.57	56.00	-11.43	QP	
6	2.5780	16.83	20.15	36.98	46.00	-9.02	AVG	
7	4.2100	24.56	20.19	44.75	56.00	-11.25	QP	
8	6.9220	17.80	20.26	38.06	50.00	-11.94	AVG	
9	12.2140	30.81	20.30	51.11	60.00	-8.89	QP	
10	12.7580	25.24	20.30	45.54	50.00	-4.46	AVG	
11	27.9540	18.59	20.27	38.86	50.00	-11.14	AVG	
12	29.0780	28.59	20.27	48.86	60.00	-11.14	QP	

Conducted Emission Test Data


Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Live Line
 Tem.: 23.2°C Hum.: 48%

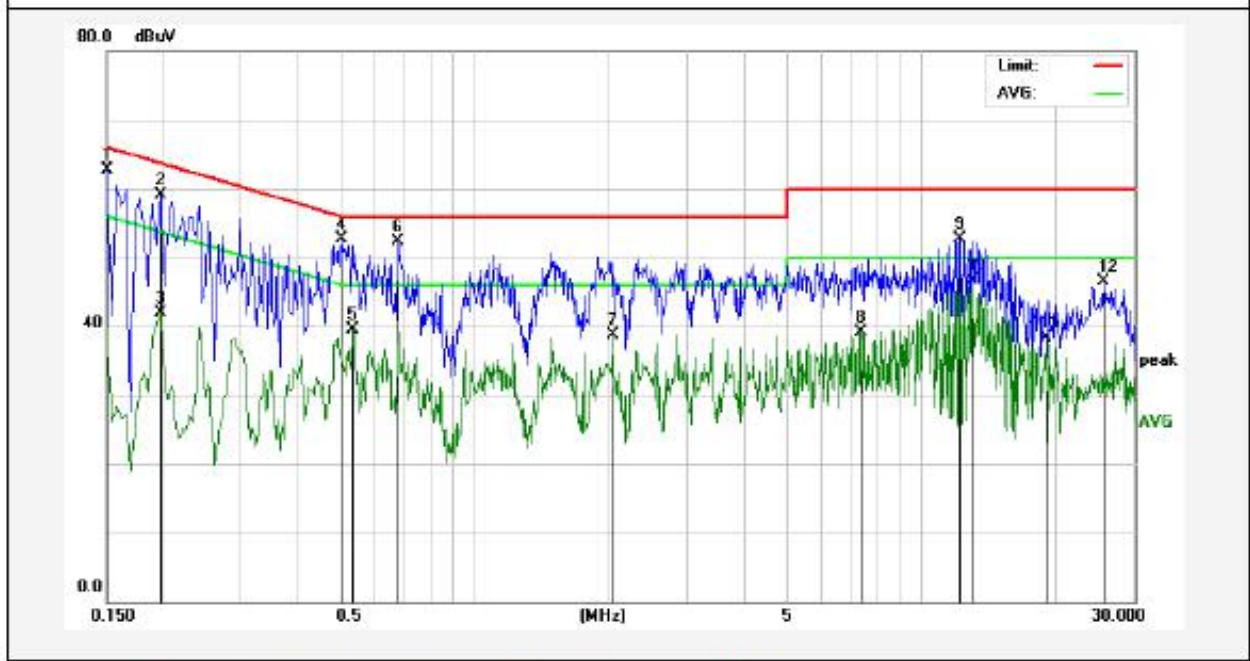

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1500	42.89	19.90	62.79	65.99	-3.20	QP	
2	0.1980	39.26	19.90	59.16	63.69	-4.53	QP	
3	0.1980	22.06	19.90	41.96	53.69	-11.73	AVG	
4	0.5020	32.70	19.98	52.68	56.00	-3.32	QP	
5	0.5340	19.43	19.99	39.42	46.00	-6.58	AVG	
6	0.6740	32.26	20.03	52.29	56.00	-3.71	QP	
7	2.0340	18.48	20.14	38.62	46.00	-7.38	AVG	
8	7.3060	18.81	20.27	39.08	50.00	-10.92	AVG	
9	12.2140	32.43	20.30	52.73	60.00	-7.27	QP	
10	13.0300	26.36	20.29	46.65	50.00	-3.35	AVG	
11	19.1060	17.98	20.33	38.31	50.00	-11.69	AVG	
12	25.6500	26.29	20.28	46.57	60.00	-13.43	QP	

Conducted Emission Test Data

Test Site: 1# Shielded Room
 Operating Condition: Mode 1
 Test Specification: AC 240V, 60Hz for adapter
 Comment: Neutral Line
 Tem.: 23.2°C Hum.: 48%

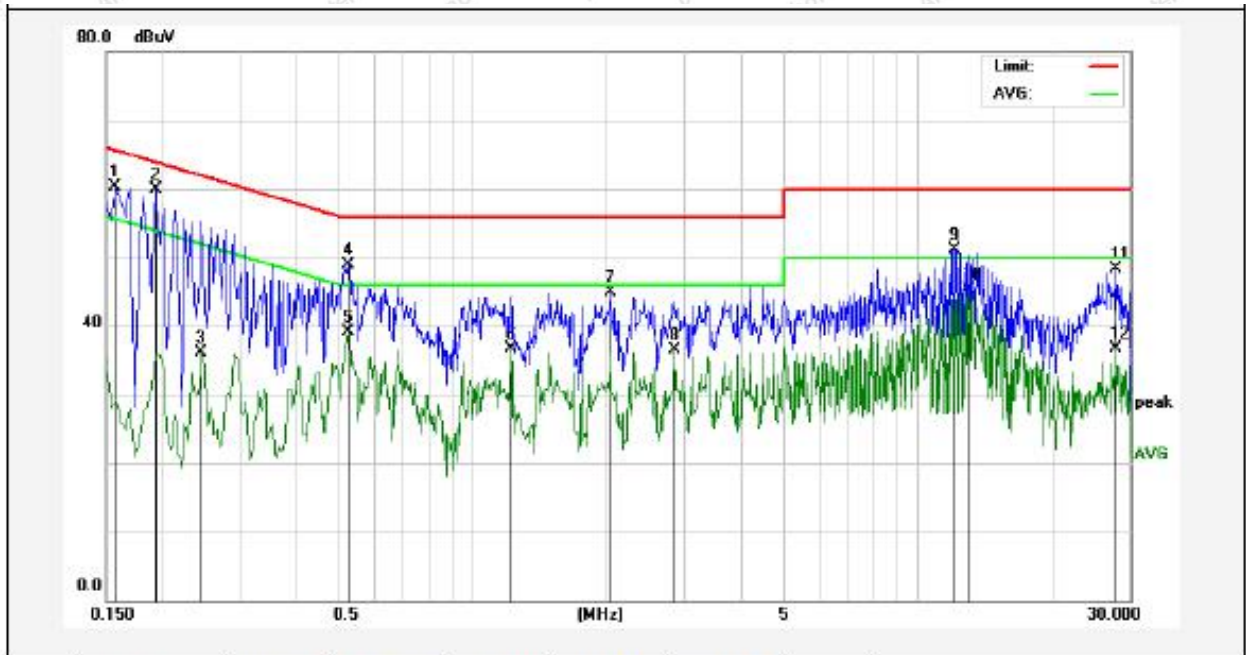

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.1580	40.37	19.90	60.27	65.56	-5.29	QP	
2	0.1940	40.02	19.90	59.92	63.86	-3.94	QP	
3	0.2460	16.24	19.89	36.13	51.89	-15.76	AVG	
4	0.5260	28.97	19.99	48.96	56.00	-7.04	QP	
5	0.5260	19.21	19.99	39.20	46.00	-6.80	AVG	
6	1.2220	16.51	20.12	36.63	46.00	-9.37	AVG	
7	2.0380	24.69	20.14	44.83	56.00	-11.17	QP	
8	2.8500	16.44	20.16	36.60	46.00	-9.40	AVG	
9	12.0780	30.76	20.31	51.07	60.00	-8.93	QP	
10	13.0300	25.05	20.29	45.34	50.00	-4.66	AVG	
11	27.9540	28.00	20.27	48.27	60.00	-11.73	QP	
12	27.9540	16.38	20.27	36.65	50.00	-13.35	AVG	

4. Radiation Spurious Emission and Band Edge

4.1. Test Standard and Limit

Test Standard	FCC Part15 C Section 15.209 and 15.205				
Test Limit	Frequency (MHz)	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
	0.009MHz~0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz~88MHz	100	40.0	Quasi-peak	3
	88MHz~216MHz	150	43.5	Quasi-peak	3
	216MHz~960MHz	200	46.0	Quasi-peak	3
	960MHz~1000MHz	500	54.0	Quasi-peak	3
	Above 1000MHz	500	54.0	Average	3
-		74.0	Peak	3	

Remark:

- (1)The lower limit shall apply at the transition frequency.
- (2) 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

4.2. Test Setup

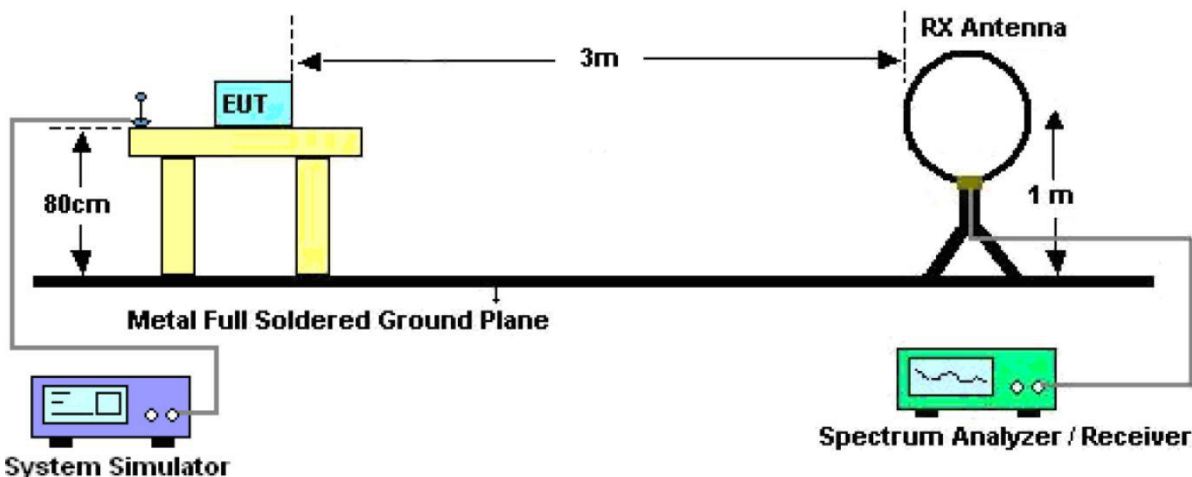


Figure 1. Below 30MHz

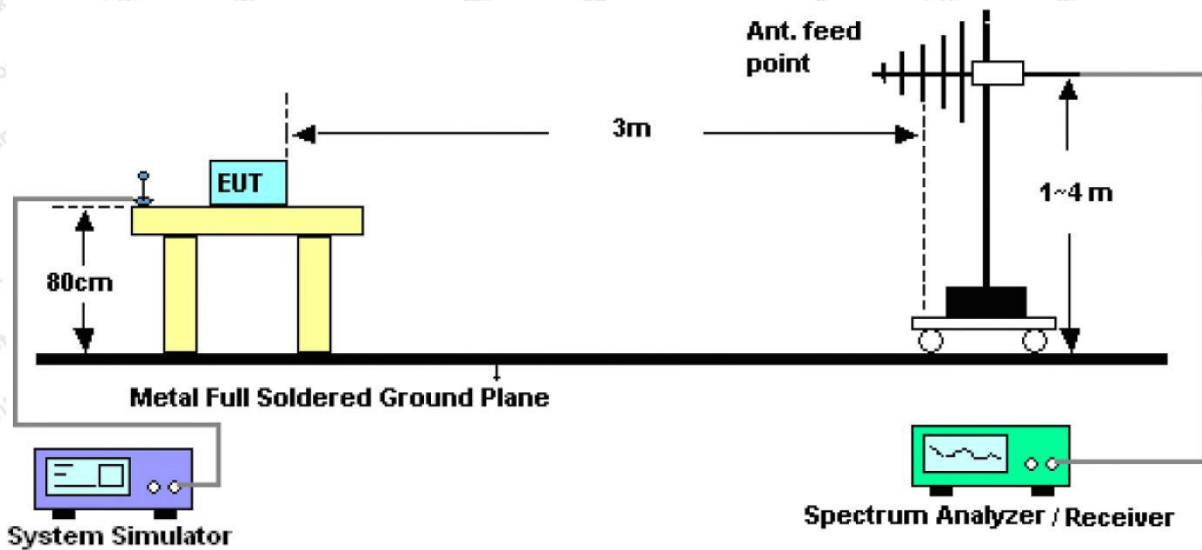


Figure 2. 30MHz to 1GHz

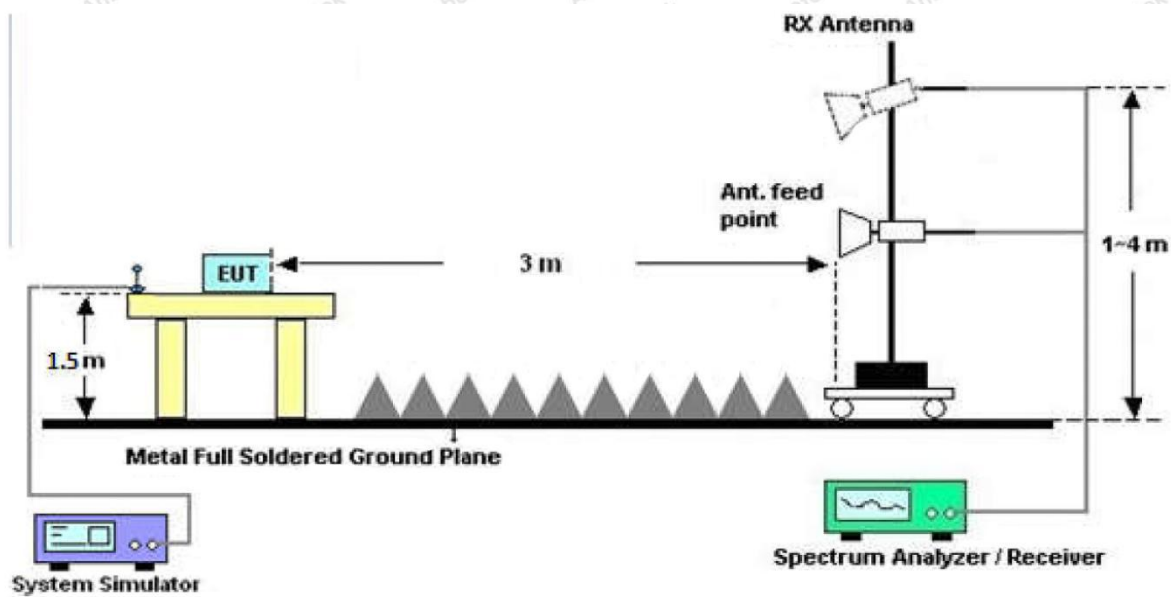


Figure 3. Above 1 GHz

4.3. Test Procedure

For below 1GHz: The EUT is placed on a turntable, which is 0.8m above the ground plane.

For above 1GHz: The EUT is placed on a turntable, which is 1.5m above the ground plane.

The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can be moved up and down from 1 to 4 meters to find out the maximum emission level. Rotated the EUT through three orthogonal axes to determine the maximum emissions, both horizontal and vertical polarization of the antenna are set on test. The EUT is tested in 9*6*6 Chamber. The device is evaluated in xyz orientation.

Report No.: 18220WC10152201

FCC ID: 2AQRPTJC157WC

Page 18 of 33

For 9kHz to 150kHz, Set the spectrum analyzer as:

RBW = 200Hz, VBW = 1kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 150kHz to 30MHz, Set the spectrum analyzer as:

RBW = 9kHz, VBW = 30kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.

For 30MHz to 1000MHz, Set the spectrum analyzer as:

RBW = 100kHz, VBW = 300kHz, Detector= Quasi-Peak, Trace mode= Max hold, Sweep- auto couple.


4.4. Test Data

PASS

Note: The data is in TX mode, and this is the worst mode.

Test Results (9K~15MHz)


Test Mode: Mode 1
 Power Source: AC 120V, 60Hz for adapter
 Temp.(°C)/Hum.(%RH): 22.1°C/50%RH
 Distance: 3m

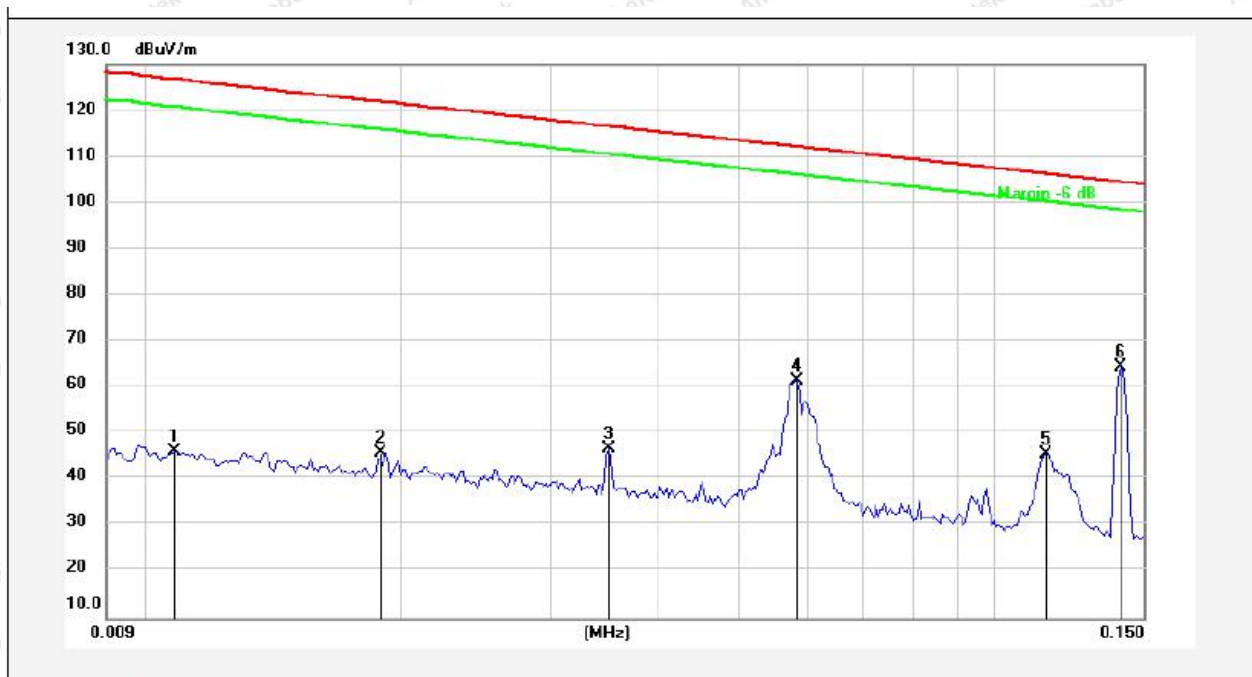

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.0108	26.06	20.06	46.12	126.73	-80.61	peak			
2	0.0189	25.54	20.31	45.85	121.90	-76.05	peak			
3	0.0350	26.28	20.49	46.77	116.58	-69.81	peak			
4	0.0585	41.15	20.36	61.51	112.15	-50.64	peak			
5	0.1150	25.31	20.31	45.62	106.31	-60.69	peak			
6	0.1408	44.09	20.33	64.42	104.57	-40.15	peak			

Test Results (15~30MHz)

Test Mode: Mode 1
 Power Source: AC 120V, 60Hz for adapter
 Temp.(°C)/Hum.(%RH): 22.1°C/50%RH
 Distance: 3m

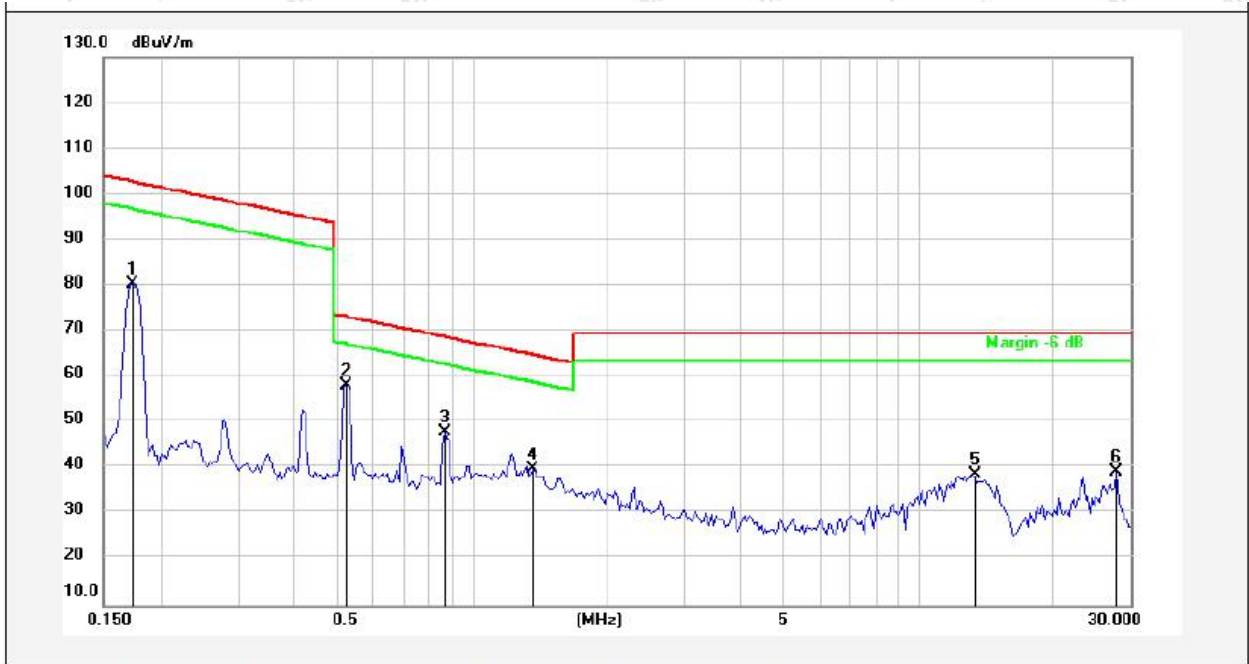

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	0.1737	60.13	20.32	80.45	102.75	-22.30	peak			
2	0.5237	38.02	20.27	58.29	73.22	-14.93	peak			
3	0.8709	27.76	20.26	48.02	68.82	-20.80	peak			
4	1.3735	19.73	20.26	39.99	64.87	-24.88	peak			
5	13.2667	18.08	20.54	38.62	69.50	-30.88	peak			
6	27.8551	18.54	20.65	39.19	69.50	-30.31	peak			

Test Results (30~1000MHz)

Test Mode: Mode 1
 Power Source: AC 120V, 60Hz for adapter
 Polarization: Vertical
 Temp.(°C)/Hum.(%RH): 22.3°C/46%RH
 Distance: 3m



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	36.5091	47.49	-15.47	32.02	40.00	-7.98	QP	100	0	
2	45.5347	47.67	-14.18	33.49	40.00	-6.51	QP	100	360	
3	54.2610	48.36	-16.28	32.08	40.00	-7.92	QP	100	0	
4	72.8465	51.33	-18.45	32.88	40.00	-7.12	QP	100	360	
5	144.8418	53.87	-19.99	33.88	43.50	-9.62	QP	100	0	
6	154.8204	53.62	-19.67	33.95	43.50	-9.55	QP	100	360	

Test Results (30~1000MHz)

Test Mode: Mode 1
 Power Source: AC 120V, 60Hz for adapter
 Polarization: Horizontal
 Temp.(°C)/Hum.(%RH): 22.3°C/46%RH
 Distance: 3m



No.	Freq. (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector	Height (cm)	degree (deg)	Remark
1	55.2207	46.81	-16.51	30.30	40.00	-9.70	QP	100	0	
2	69.1141	56.05	-20.34	35.71	40.00	-4.29	QP	100	360	
3	73.3593	49.51	-20.60	28.91	40.00	-11.09	QP	100	0	
4	144.3348	54.35	-20.83	33.52	43.50	-9.98	QP	100	360	
5	169.0054	53.58	-21.36	32.22	43.50	-11.28	QP	100	360	
6	286.9823	51.67	-15.48	36.19	46.00	-9.81	QP	100	0	


5. Antenna Requirement

5.1. Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203
Requirement	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can

5.2. Antenna Connected Construction

The antenna is a Inductive loop coil Antenna which permanently attached, and the best case gain of the antenna is 0 dBi. It complies with the standard requirement.

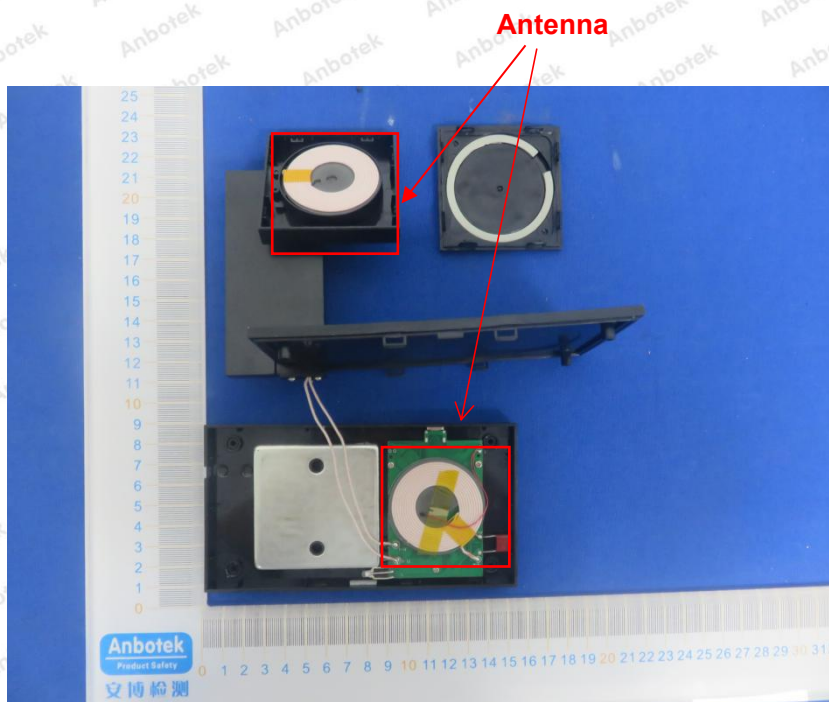

APPENDIX I -- TEST SETUP PHOTOGRAPH

Photo of Conducted Emission Measurement




Photo of Radiation Emission Test








APPENDIX II -- EXTERNAL PHOTOGRAPH




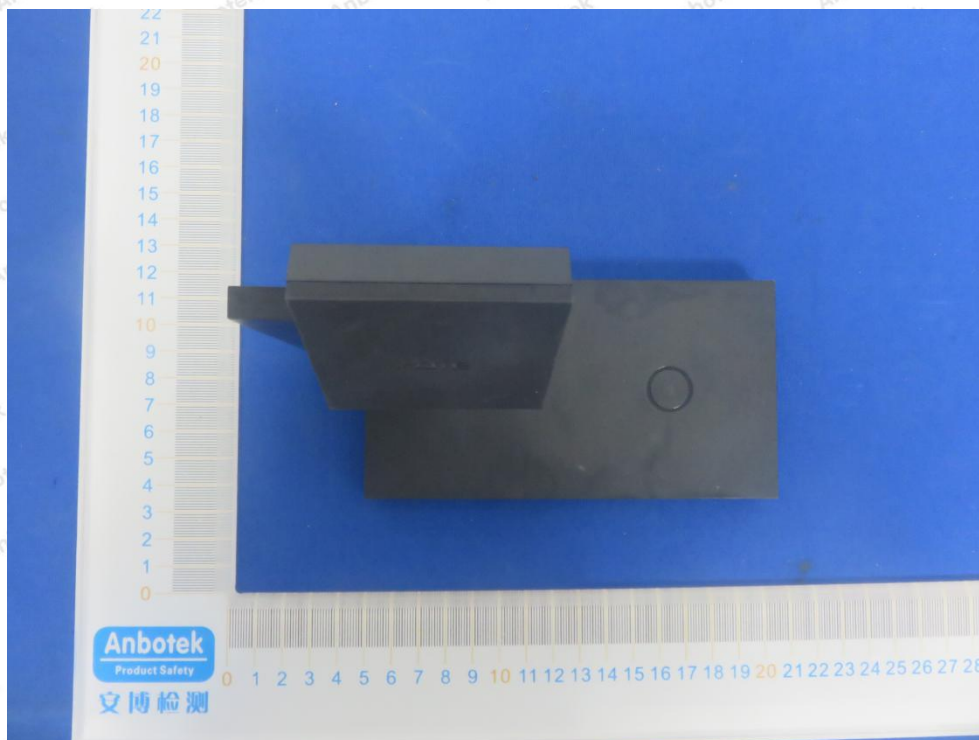


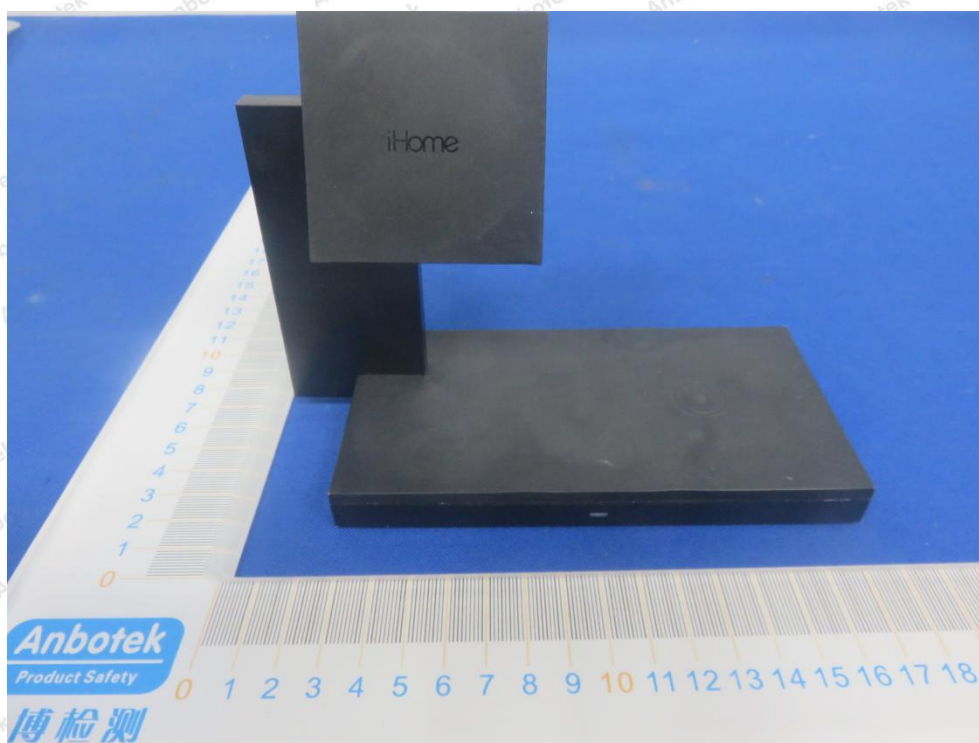
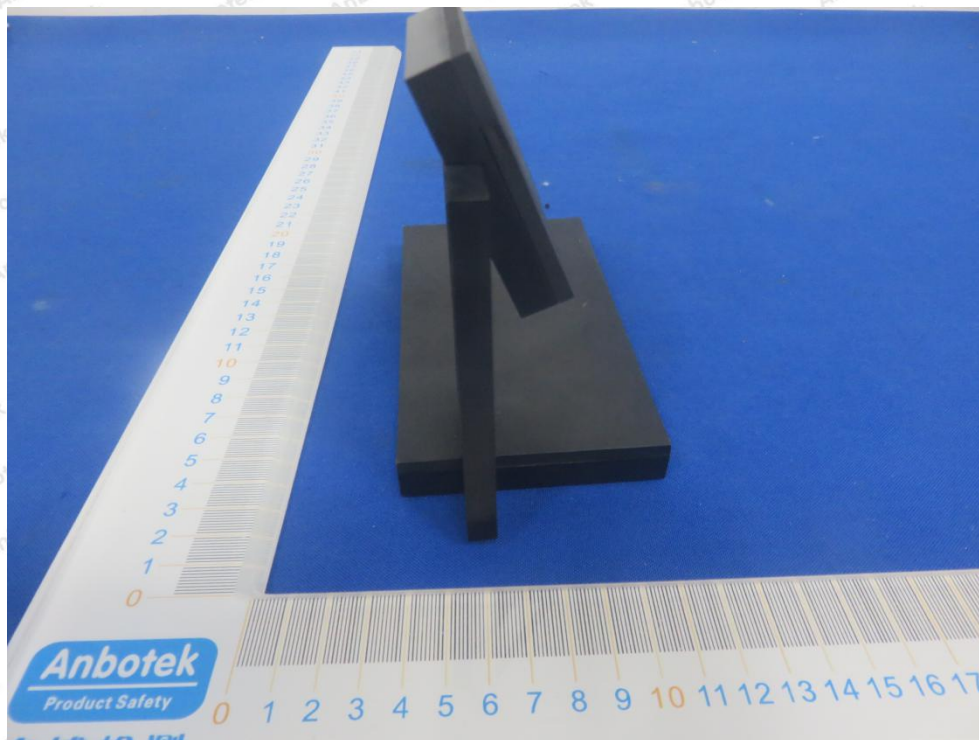


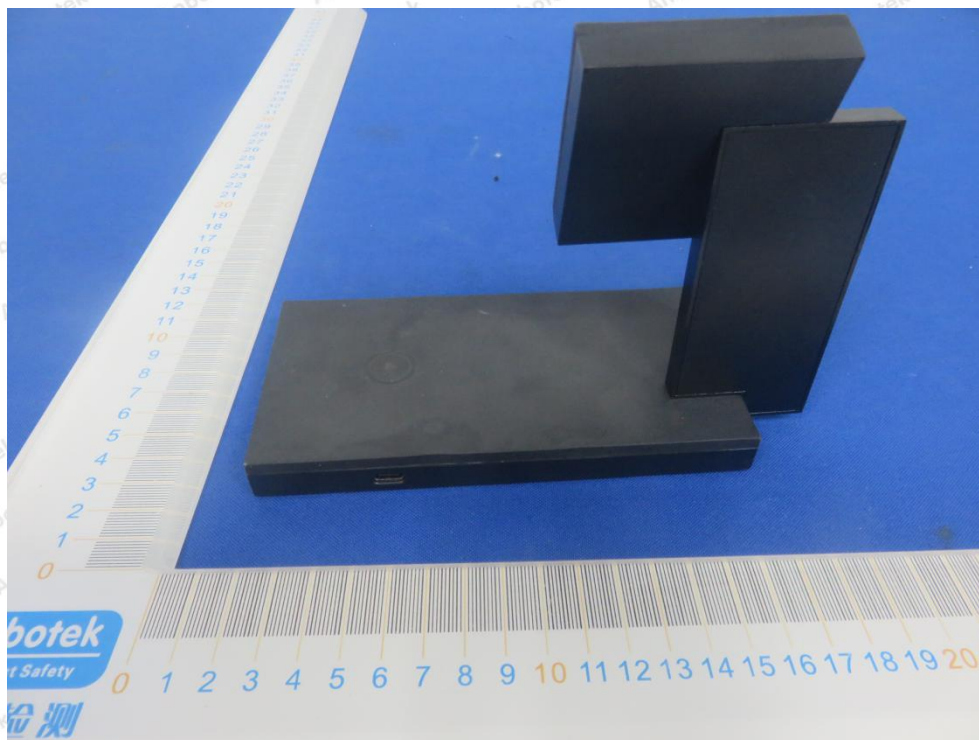


APPENDIX III -- INTERNAL PHOTOGRAPH

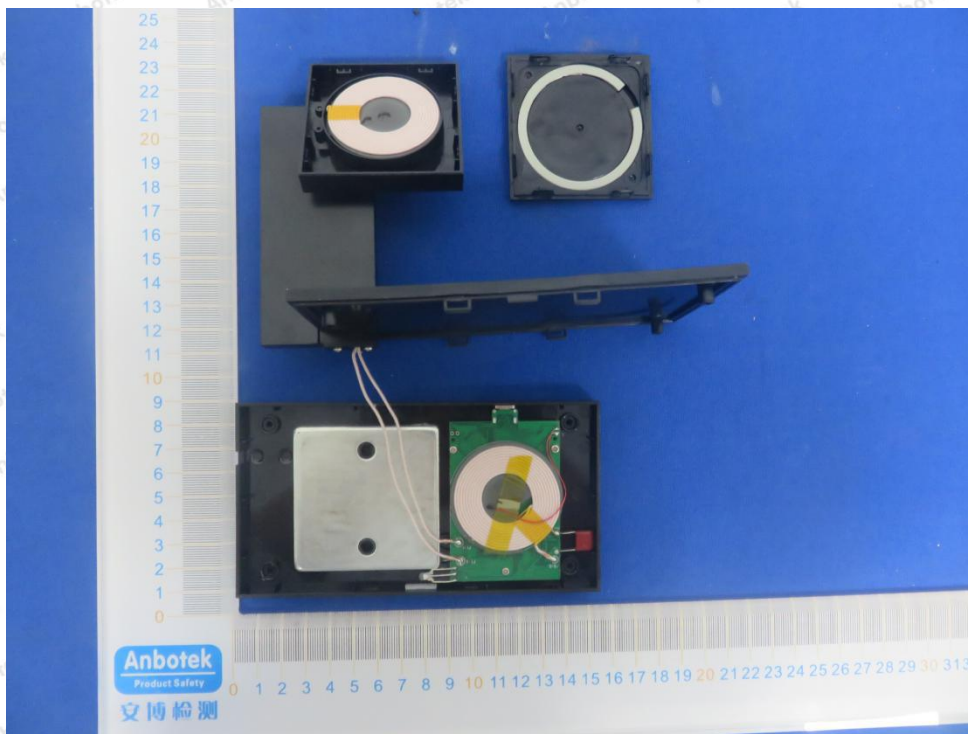

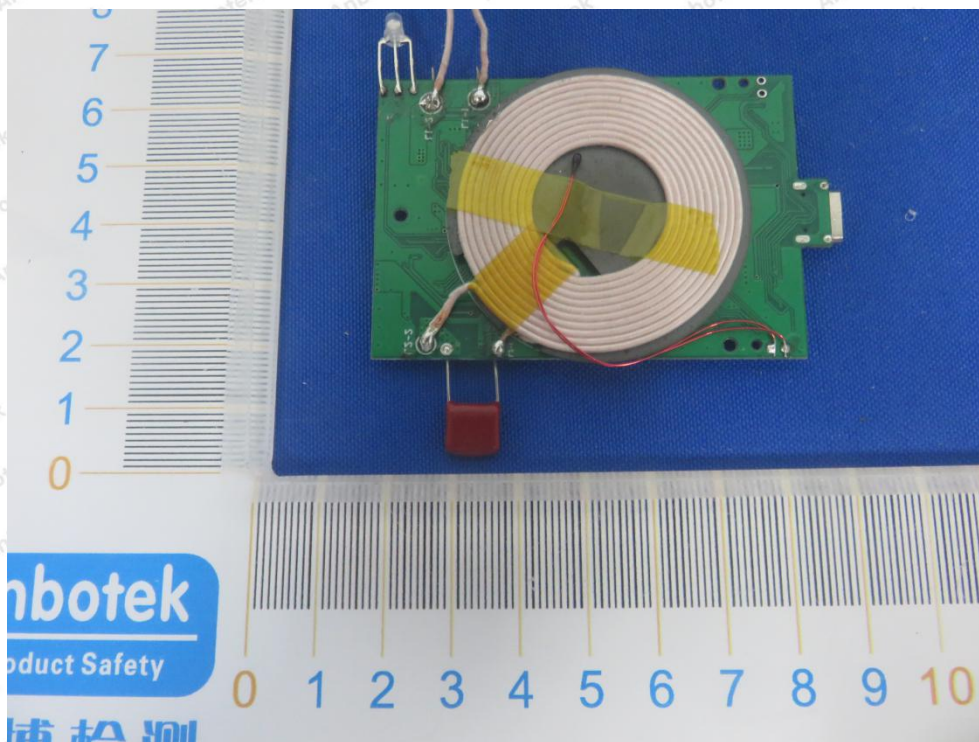

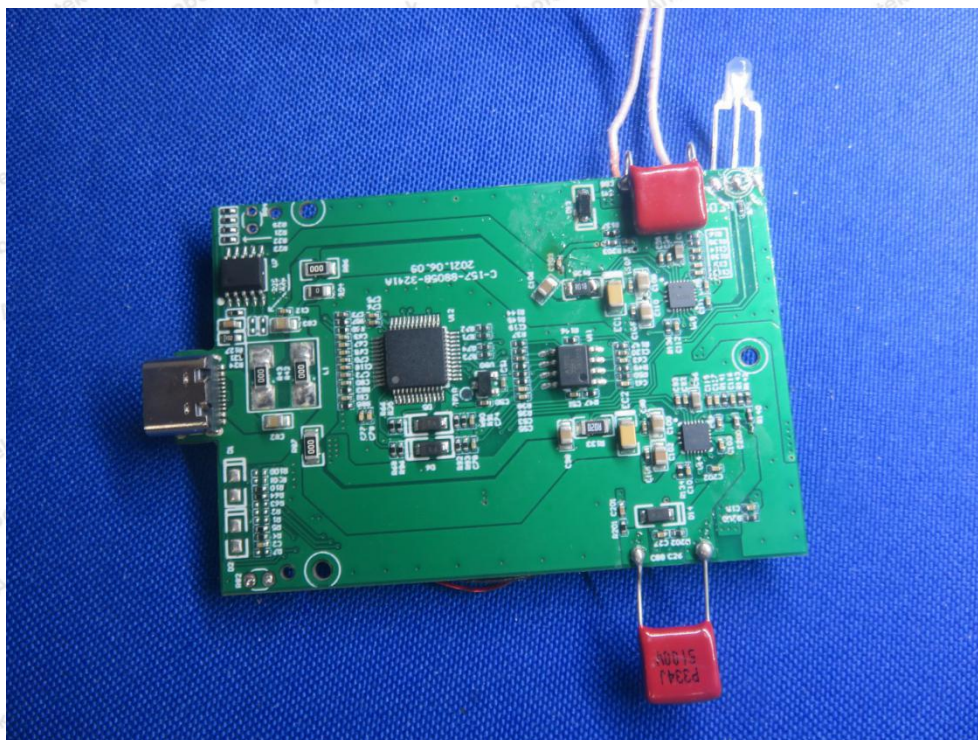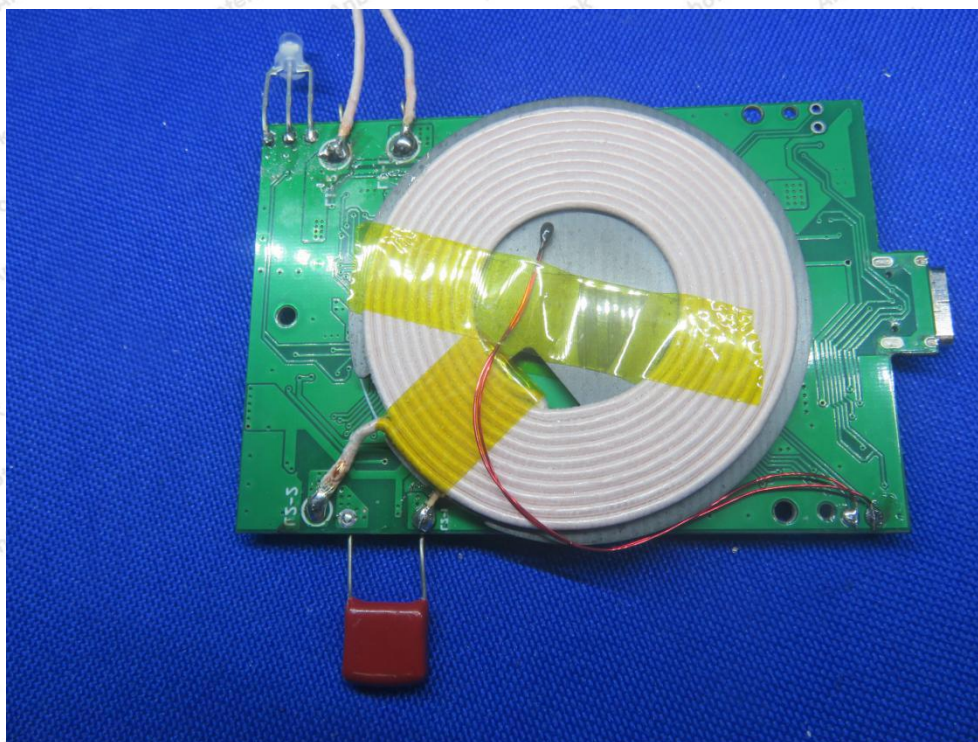

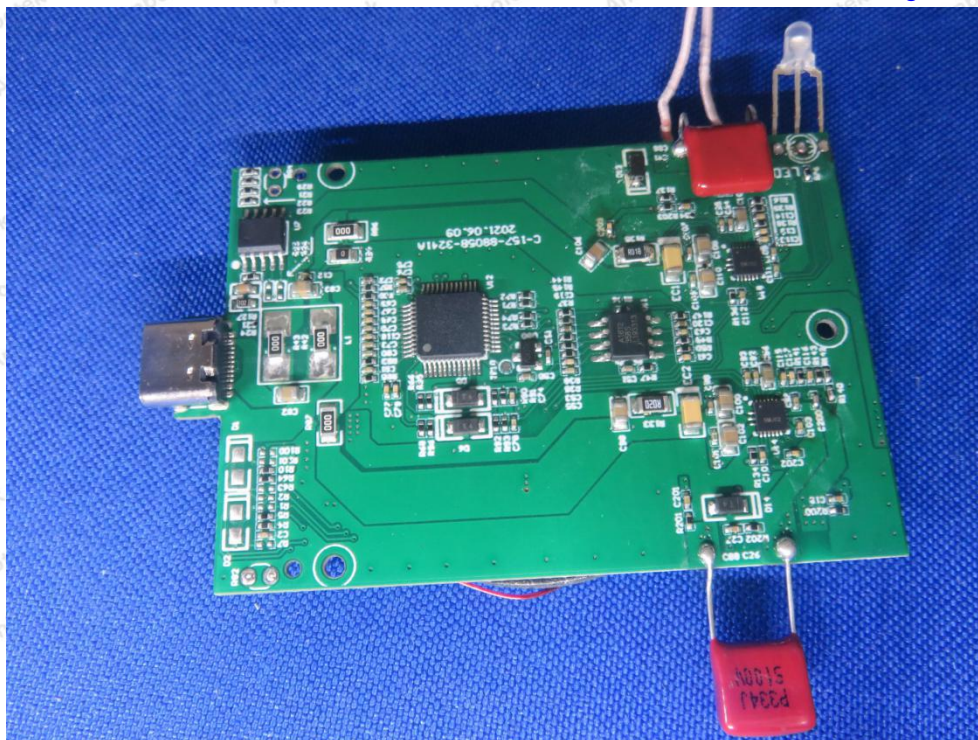

----- End of Report -----